# Solid-State Relays

## Features

- ⬊ Rugged, epoxy encapsulation construction
- ⬊ 4,000 volts of optical isolation
- ⬊ Subjected to full load test and six times the rated current surge before and after encapsulation
- ⬊ Unique heat-spreader technology
- ⬊ Guaranteed for life

**Opto 22 Power Series SSR**

improvements and the same 100% testing policy established over 40 years ago, Opto 22 is still recognized today for the very high quality and reliability of all our solid-state relays.

## Overview

In 1974, Opto 22 introduced the first liquid epoxy-filled line of power solid-state relays (SSR). This innovation in SSR design greatly improved the reliability and reduced the cost of manufacturing. At that time, we also incorporated into our manufacturing process 100% testing under full load conditions of every relay we produced.

By 1978, Opto 22 had gained such a reputation for reliability that we were recognized as the world's leading manufacturer of solid-state relays. Through continuous manufacturing

## Description

Opto 22 offers a complete line of SSRs, from the rugged 120/240/380-volt AC Series to the small footprint MP Series, designed for mounting on printed circuit boards. All Opto 22 SSRs feature 4,000 volts of optical isolation, and most are UL and CSA recognized. The innovative use of room-temperature liquid epoxy encapsulation, coupled with Opto 22's unique heat-spreader technology, are key to mass producing the world's most reliable solid state relays.

Every Opto 22 solid state relay is subjected to full load test and six times the rated current surge both before and after

## Part Numbers

| Part | Description |
|---|---|
| **AC Switching** | |
| 120A10 | 120 VAC, 10 Amp, AC Control |
| 120A25 | 120 VAC, 25 Amp, AC Control |
| 240A10 | 240 VAC, 10 Amp, AC Control |
| 240A25 | 240 VAC, 25 Amp, AC Control |
| 240A45 | 240 VAC, 45 Amp, AC Control |
| 120D3 | 120 VAC, 3 Amp, DC Control |
| 120D10 | 120 VAC, 10 Amp, DC Control |
| 120D25 | 120 VAC, 25 Amp, DC Control |
| 120D45 | 120 VAC, 45 Amp, DC Control |
| 240D3 | 240 VAC, 3 Amp, DC Control |
| 240D10 | 240 VAC, 10 Amp, DC Control |
| 240Di10 | 240 VAC, 10 Amp, DC Control, with LED Indicators |
| 240D25 | 240 VAC, 25 Amp, DC Control |
| 240Di25 | 240 VAC, 25 Amp, DC Control, with LED Indicators |
| 240D30-HS | 240 VAC, 30 Amp, DC Control, with integrated heatsink |
| 240D45 | 240 VAC, 45 Amp, DC Control |
| 240Di45 | 240 VAC, 45 Amp, DC Control, with LED Indicators |
| 380D25 | 380 VAC, 25 Amp, DC Control |
| 380D45 | 380 VAC, 45 Amp, DC Control |
| 480D10-12 | 480 VAC, 10 Amp, DC Control, Transient Proof |
| 480D15-12 | 480 VAC, 15 Amp, DC Control, Transient Proof |
| 480D25-12 | 480 VAC, 25 Amp, DC Control, Transient Proof |
| 480D25-HS | 480 VAC, 25 Amp, DC Control, Transient Proof, with integrated heatsink |
| 480D45-12 | 480 VAC, 45 Amp, DC Control, Transient Proof |

| Part | Description |
|---|---|
| **AC Switching** | |
| 575D15-12 | 575 VAC, 15 Amp, DC Control, Transient Proof |
| 575D45-12 | 575 VAC, 45 Amp, DC Control, Transient Proof |
| 575D30-HS | 575 VAC, 30 Amp, DC Control, Transient Proof, with integrated heatsink |
| 575Di45-12 | 575 VAC, 45 Amp, DC Control, Transient Proof, with LED Indicators |
| MP120D2 or P120D2 | 120 VAC, 2 Amp, DC Control. P model is low profile. |
| MP120D4 or P120D4 | 120 VAC, 4 Amp, DC Control. P model is low profile. |
| MP240D2 or P240D2 | 240 VAC, 2 Amp, DC. P model is low profile. |
| MP240D4 or P240D4 | 240 VAC, 4 Amp, DC. P model is low profile. |
| MP380D4 | 380 VAC, 4 Amp, DC |
| Z120D10 | Z Model, 120 VAC, 10 Amp, DC Control |
| Z240D10 | Z Model, 240 VAC, 10 Amp, DC Control |

| DC Switching | |
|---|---|
| DC60P or DC60MP | 60 VDC, 3 Amp, DC Control. P model is low profile. |
| DC200P or DC200MP | 200 VDC, 1 Amp, DC Control. P model is low profile. |
| DC60S-3 | 60 VDC, 3 Amp, DC Control |
| DC60S-5 | 60 VDC, 5 Amp, DC Control |

| Accessories | |
|---|---|
| SAFETY COVER | Power Series SSR safety cover |
| SSR-HS | Power Series SSR heatsink |
| SSR-THERMOPAD | Thermal conductive pad (pack of 10) |

Opto 22 • 43044 Business Park Drive • Temecula, CA 92590-3614 • www.opto22.com
**SALES** 800-321-6786 • 951-695-3000 • FAX 951-695-3095 • sales@opto22.com • **SUPPORT** 800-835-6786 • 951-695-3080 • FAX 951-695-3017 • support@opto22.com

Courtesy of Steven Engineering, Inc - (800) 258-9200 - sales@steveneng.com - www.steveneng.com

encapsulation. This double testing of every part before it leaves the factory means you can rely on Opto 22 solid state relays. All Opto 22 SSRs are guaranteed for life.

Accessories for the Power-Series SSRs include a safety cover, a heatsink, and a matching thermal conductive pad. See .

## Power Series SSRs

Opto 22 provides a full range of Power Series relays with a wide variety of voltage (120–575 volts) and current options (3–45 amps). All Power Series relays feature 4,000 volts of optical isolation and have a high PRV rating. Some Power Series relays include built-in LEDs to indicate operation.
See .

### DC Series

The DC Series delivers isolated DC control to large OEM customers worldwide. All DC control SSRs are LS TTL compatible.

### AC Series

The AC Series offers the ultimate in solid state reliability. All AC Power Series relays feature a built-in snubber as well as zero-voltage turn-on and zero-current turn-off. Transient-proof models offer self protection for noisy electrical environments.

## Z Series SSRs

The Z Series employs a unique heat transfer system that makes it possible for Opto 22 to deliver a low-cost, 10-amp, solid state relay in an all-plastic case. The push-on, tool-free quick-connect terminals make the Z Series ideal for high-volume OEM applications. Operating temperature: –40 °C to 100 °C. See .

## Printed Circuit Series SSRs

Opto 22's Printed Circuit Series allows OEMs to easily deploy solid state relays on printed circuit boards. Two unique packages are available, both of which will switch loads up to four amps. Operating temperature: –40 °C to 100 °C. See .

### MP Series

The MP Series packaging is designed with a minimum footprint to allow maximum relay density on the printed circuit board.

### P Series

The P Series power relays provide low-profile [0.5 in. (12.7 mm)] center mounting on printed circuit boards.

## HS Series SSRs

The HS Series features an integrated heatsink, which makes them so *cool*. These relays have less thermal resistance inside, so heat dissipates more easily than in a standard SSR mounted to the same heatsink. With the heatsink built-in, you don't have to select one from a catalog, and installation is much easier. Includes a DIN-rail adapter. See .

## Specifications
## (all Power Series models)

- 4,000 V optical isolation, input to output
- Zero voltage turn-on
- Zero-current turn-off
- Turn-on time: 0.5 cycle maximum
- Turn-off time: 0.5 cycle maximum
- Operating temperature: –40 °C to 100 °C
- Operating frequency: 25 to 65 Hz (operates at 400 Hz with six times off-state leakage)
- Coupling capacitance, input to output: 8 pF maximum
- Hermetically sealed
- DV/DT Off-state: 200 volts per microsecond
- DV/DT commutating: snubbed for rated current at 0.5 power factor
- UL recognized
- CSA certified
- CE component
- Torque specs for screws (this spec is both the recommended torque and the maximum torque you should use):
  Control terminals, 10 in-lb (1.13 N-m)
  Field terminals, 18 in-lb (2.03 N-m)

# Solid-State Relays

## Power Series SSR Accessories

### Safety Cover

A plastic safety cover (Opto 22 part number SAFETY COVER) is available for use with Opto 22 Power Series SSRs. The safety cover reduces the chance of accidental contact with relay terminals, while providing access holes for test instrumentation.
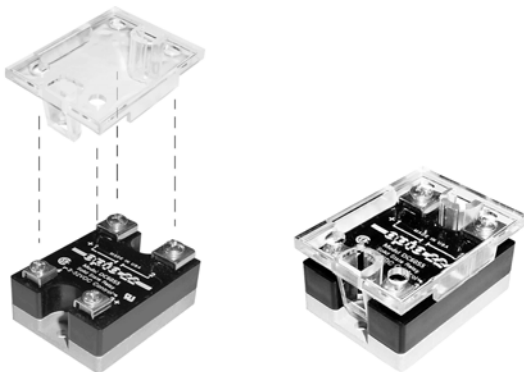
An optional plastic safety cover can be installed on a Power Series SSR.
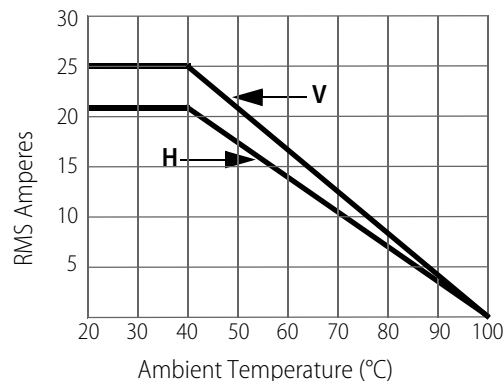
### SSR-HS Heatsink

Custom designed for the Power Series SSRs, the SSR-HS heatsink provides excellent heat dissipation when mounted to the SSR with a matching thermal conductive pad, used in place of silicon grease. One thermal pad is included with the heatsink. Additional pads may be purchased in packs of 10 (part number SSR-THERMOPAD). DIN-rail adapter is included.
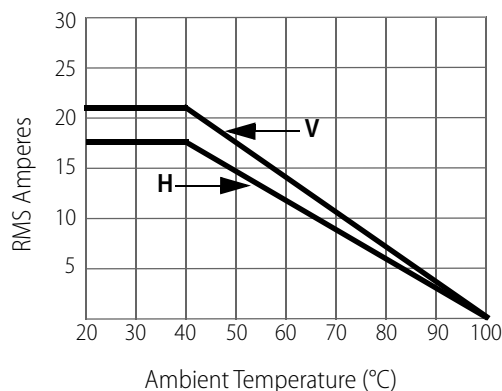
### Thermal Ratings

The thermal ratings shown in the following graphs were obtained with an SSR attached to a heatsink using a thermal conductive pad.

**45 Amp Relay on SSR-HS Heatsink Derating**

**V**: Heatsink mounted to a **vertical** surface
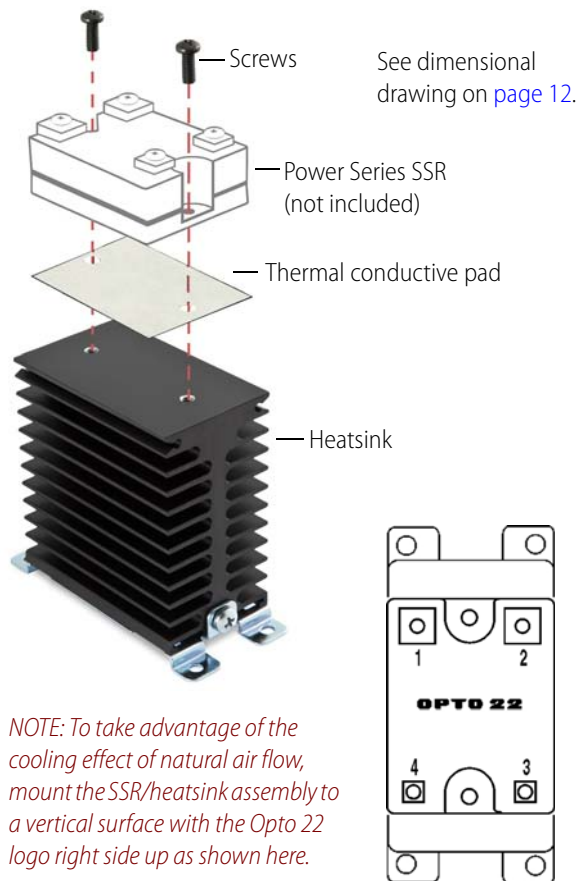**H**: Heatsink mounted to a **horizontal** surface.

**25 Amp Relay on SSR-HS Heatsink Derating**

**V**: Heatsink mounted to a **vertical** surface
**H**: Heatsink mounted to a **horizontal** surface.

### Heatsink Assembly

Before attaching the SSR, remove the protective film from both sides of the thermal pad, then place the pad on the heatsink making sure to align the holes. Secure the SSR to the heatsink with the two 8-32 x 3/8˝ panhead Phillips screws included in the kit. Use 20 in-lb (2.26 N-m) of torque.

Screws

See dimensional drawing on .

Power Series SSR (not included)

Thermal conductive pad

Heatsink

*NOTE: To take advantage of the cooling effect of natural air flow, mount the SSR/heatsink assembly to a vertical surface with the Opto 22 logo right side up as shown here.*

OPTO 22

Opto 22 • 43044 Business Park Drive • Temecula, CA 92590-3614 • www.opto22.com
**SALES** 800-321-6786 • 951-695-3000 • FAX 951-695-3095 • sales@opto22.com • **SUPPORT** 800-835-6786 • 951-695-3080 • FAX 951-695-3017 • support@opto22.com

Courtesy of Steven Engineering, Inc - (800) 258-9200 - sales@steveneng.com - www.steveneng.com

## AC Power Series Specifications

Opto 22 provides a full range of Power Series relays with a wide variety of voltage (120–575) and current options (3–45 amps). All Power Series relays feature 4,000 volts of optical isolation and have a high PRV rating. Operating temperature is –40 °C to 100 °C. (Ambient temperature will affect the current rating.)

### 120/240/380 Volt

NOTE: Model numbers ending in -17 are replacement parts only. Their specifications are identical to the same model number without the -17. For example, 240D10-17 is identical to 240D10.

| Model Number | Nominal AC Line Voltage | Nominal Current Rating (Amps) | 1 cycle Surge (Amps) Peak | Nominal Signal Input Resistance (Ohms) | Signal Pick-up Voltage | Signal Drop-out Voltage | Peak Repetitive Voltage Maximum | Maximum Output Voltage Drop | Off-State Leakage (mA) Maximum** | Operating Voltage Range (Volts AC) | I²t Rating t=8.3 (ms) | Isolation Voltage | θjc*** (°C/Watt) | Dissipation (Watts/Amp) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 120D3 | 120 | 3* | 85 | 1000 | 3VDC (32V allowed) | 1 VDC | 600 | 1.6 volts | 2.5mA | 12–140 | 30 | 4,000V$_{RMS}$ | 11 | 1.7 |
| 120D10 | 120 | 10* | 110 | 1000 | 3VDC (32V allowed) | 1 VDC | 600 | 1.6 volts | 7 mA | 12–140 | 50 | 4,000V$_{RMS}$ | 1.3 | 1.6 |
| 120D25 | 120 | 25* | 250 | 1000 | 3VDC (32V allowed) | 1 VDC | 600 | 1.6 volts | 7 mA | 12–140 | 250 | 4,000V$_{RMS}$ | 1.2 | 1.3 |
| 120D45 | 120 | 45* | 650 | 1000 | 3VDC (32V allowed) | 1 VDC | 600 | 1.6 volts | 7 mA | 12–140 | 1750 | 4,000V$_{RMS}$ | 0.67 | 0.9 |
| 240D3 | 240 | 3* | 85 | 1000 | 3VDC (32V allowed) | 1 VDC | 600 | 1.6 volts | 5 mA | 24–280 | 30 | 4,000V$_{RMS}$ | 11 | 1.7 |
| 240D10 | 240 | 10* | 110 | 1000 | 3VDC (32V allowed) | 1 VDC | 600 | 1.6 volts | 14 mA | 24–280 | 50 | 4,000V$_{RMS}$ | 1.3 | 1.6 |
| 240Di10 | 240 | 10* | 110 | 730 | 3VDC (32V allowed) | 1 VDC | 600 | 1.6 volts | 14 mA | 24–280 | 50 | 4,000V$_{RMS}$ | 1.3 | 1.6 |
| 240D25 | 240 | 25* | 250 | 1000 | 3VDC (32V allowed) | 1 VDC | 600 | 1.6 volts | 14 mA | 24–280 | 250 | 4,000V$_{RMS}$ | 1.2 | 1.3 |
| 240Di25 | 240 | 25* | 250 | 730 | 3VDC (32V allowed) | 1 VDC | 600 | 1.6 volts | 14 mA | 12–280 | 250 | 4,000V$_{RMS}$ | 1.2 | 1.3 |
| 240D45 | 240 | 45* | 650 | 1000 | 3VDC (32V allowed) | 1 VDC | 600 | 1.6 volts | 14 mA | 24–280 | 1750 | 4,000V$_{RMS}$ | 0.67 | 0.9 |
| 240Di45 | 240 | 45* | 650 | 730 | 3VDC (32V allowed) | 1 VDC | 600 | 1.6 volts | 14 mA | 24–280 | 1750 | 4,000V$_{RMS}$ | 0.67 | 0.9 |
| 380D25 | 380 | 25* | 250 | 1000 | 3VDC (32V allowed) | 1 VDC | 800 | 1.6 volts | 12 mA | 24–420 | 250 | 4,000V$_{RMS}$ | 1.2 | 1.3 |
| 380D45 | 380 | 45* | 650 | 1000 | 3VDC (32V allowed) | 1 VDC | 800 | 1.6 volts | 12 mA | 24–420 | 1750 | 4,000V$_{RMS}$ | 0.67 | 0.9 |
| 120A10 | 120 | 10* | 110 | 33K | 85VAC (280V allowed) | 10 VAC | 600 | 1.6 volts | 7 mA | 12–140 | 50 | 4,000V$_{RMS}$ | 1.3 | 1.6 |
| 120A25 | 120 | 25* | 250 | 33K | 85VAC (280V allowed) | 10 VAC | 600 | 1.6 volts | 7 mA | 12–140 | 250 | 4,000V$_{RMS}$ | 1.2 | 1.3 |
| 240A10 | 240 | 10* | 110 | 33K | 85VAC (280V allowed) | 10 VAC | 600 | 1.6 volts | 14 mA | 24–280 | 50 | 4,000V$_{RMS}$ | 1.3 | 1.6 |
| 240A25 | 240 | 25* | 250 | 33K | 85VAC (280V allowed) | 10 VAC | 600 | 1.6 volts | 14 mA | 24–280 | 250 | 4,000V$_{RMS}$ | 1.2 | 1.3 |
| 240A45 | 240 | 45* | 650 | 33K | 85VAC (280V allowed) | 10 VAC | 600 | 1.6 volts | 14 mA | 24–280 | 1750 | 4,000V$_{RMS}$ | 0.67 | 0.9 |

**Notes:** * Ambient temperature will affect the current rating. For details, see the Thermal Ratings chart.
** Operating Frequency: 25 to 65 Hz (operates at 400 Hz with 6 times the offstate leakage)
*** θjc = Thermal resistance from internal junction to base. Maximum internal junction temperature is 110 °C.

### Connection Diagram, DC Power Series



Control Current varies with control voltage. See "Control Current Calculation" on page 17 for information.
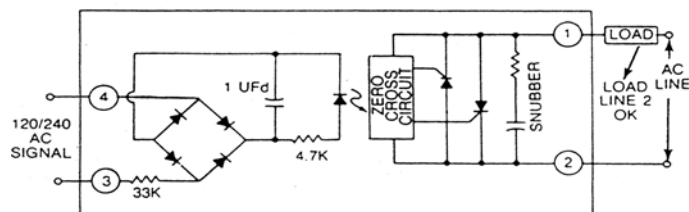
OPTO 22
Solid-State Relays

# Solid-State Relays

## 120/240/380 Volt (cont.)

### Surge Current Data

| Time (Seconds) | Time* (Cycles) | 3-Amp Peak Amps | 10-Amp Peak Amps | 25-Amp Peak Amps | 45-Amp Peak Amps |
|---|---|---|---|---|---|
| 0.017 | 1 | 85 | 110 | 250 | 650 |
| 0.050 | 3 | 66 | 85 | 175 | 420 |
| 0.100 | 6 | 53 | 70 | 140 | 320 |
| 0.200 | 12 | 45 | 60 | 112 | 245 |
| 0.500 | 30 | 37 | 50 | 80 | 175 |
| 1 | 60 | 31 | 40 | 67 | 134 |
| 2 | 120 | 28 | 33 | 53 | 119 |
| 3 | 180 | 27 | 32 | 49 | 98 |
| 4 | 240 | 26 | 31 | 47 | 95 |
| 5 | 300 | 25 | 30 | 45 | 91 |
| 10 | 600 | 24 | 28 | 42 | 84 |

Note: *60 Hz.

### Connection Diagram, AC Power Series



### Dimensional Drawings

*NOTE: All dimensions are nominal. We do not recommend mounting the terminal side of the SSR to a flat PCB (printed circuit board) or other flat surface, because there may be some variation in terminal height from one terminal to another and from one SSR to another.*



### Thermal Ratings

Ambient temperature will affect the current rating.



- ● Free Air
- □ Mounted on a heat sink with 2 °C/watt rating
- △ Mounted on a heat sink with 1 °C/watt rating



Side view: Part numbers DC60S3, 120D3, and 240D3 only

DC60S-3

Side view: All other part numbers

DC60S-5

## 480/575 Volt

| Model Number | Nominal AC Line Voltage | Nominal Current Rating (Amps) | 1 cycle Surge (Amps) Peak | Nominal Signal Input Resistance (Ohms) | Signal Pick-up Voltage | Signal Drop-out Voltage | Peak Repetitive Voltage Maximum | Maximum Output Voltage Drop | Off-State Leakage (mA) Maximum** | Operating Voltage Range (Volts AC) | I²t Rating t=8.3 (ms) | Isolation Voltage | θjc*** (°C/Watt) | Dissipation (Watts/Amp) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 480D10-12 | 480 | 10* | 110 | 1000 | 3VDC (32V allowed) | 1 VDC | 1200 | 3.2 volts | 11 mA | 100–530 | 50 | 4,000V$_{RMS}$ | 1.2 | 2.5 |
| 480D15-12 | 480 | 15* | 150 | 1000 | 3VDC (32V allowed) | 1 VDC | 1200 | 3.2 volts | 11 mA | 100–530 | 50 | 4,000V$_{RMS}$ | 1.2 | 2.5 |
| 480D25-12 | 480 | 25* | 250 | 1000 | 3VDC (32V allowed) | 1 VDC | 1000 | 1.6 volts | 11 mA | 100–530 | 250 | 4,000V$_{RMS}$ | 1.3 | 1.3 |
| 480D45-12 | 480 | 45* | 650 | 1000 | 3VDC (32V allowed) | 1 VDC | 1000 | 1.6 volts | 11 mA | 100–530 | 1750 | 4,000V$_{RMS}$ | 0.67 | 0.9 |
| 575D15-12 | 575 | 15* | 150 | 1000 | 3VDC (32V allowed) | 1 VDC | 1200 | 3.2 volts | 15 mA | 100–600 | 90 | 4,000V$_{RMS}$ | 1.2 | 2.5 |
| 575D45-12 | 575 | 45* | 650 | 1000 | 3VDC (32V allowed) | 1 VDC | 1000 | 1.6 volts | 15 mA | 100–600 | 1750 | 4,000V$_{RMS}$ | 0.67 | 0.9 |
| 575Di45-12 | 575 | 45* | 650 | 730 | 3VDC (32V allowed) | 1 VDC | 1000 | 1.6 volts | 15 mA | 100–600 | 1750 | 4,000V$_{RMS}$ | 0.67 | 0.9 |

**Notes:** * Ambient temperature will affect the current rating. For details, see the Thermal Ratings chart.
** Operating Frequency: 25 to 65 Hz (operates at 400 Hz with 6 times the offstate leakage)
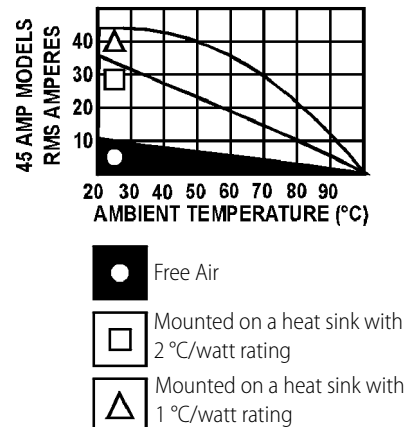*** θjc = Thermal resistance from internal junction to base. Maximum internal junction temperature is 110 °C.

## Surge Current Data

| Time Second | Time*** (Cycles) | 10-Amp Peak Amps | 15-Amp Peak Amps | 25-Amp Peak Amps | 45-Amp Peak Amps |
|---|---|---|---|---|---|
| 0.017 | 1 | 110 | 150 | 250 | 650 |
| 0.050 | 3 | 85 | 140 | 175 | 420 |
| 0.100 | 6 | 70 | 110 | 140 | 320 |
| 0.200 | 12 | 60 | 90 | 112 | 245 |
| 0.500 | 30 | 50 | 70 | 80 | 175 |
| 1 | 60 | 40 | 55 | 67 | 134 |
| 2 | 120 | 33 | 49 | 53 | 119 |
| 3 | 180 | 32 | 47 | 49 | 98 |
| 4 | 240 | 31 | 43 | 47 | 95 |
| 5 | 300 | 30 | 40 | 45 | 91 |
| 10 | 600 | 28 | 35 | 42 | 84 |

Note: ***60 Hz

## Thermal Ratings

Ambient temperature will affect the current rating.



- ● Free Air
- ☐ Mounted on a heat sink with 2 °C/watt rating
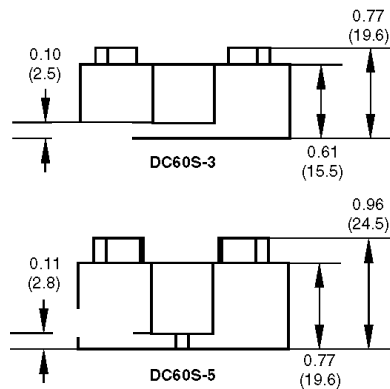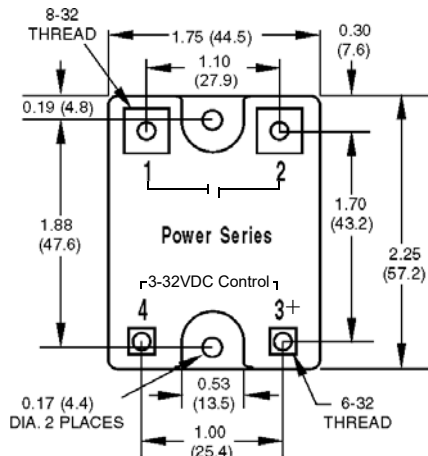- △ Mounted on a heat sink with 1 °C/watt rating

# Solid-State Relays

## 480/575 Volt (cont)

### Dimensional Drawings

*NOTE: All dimensions are nominal. We do not recommend mounting the terminal side of the SSR to a flat PCB (printed circuit board) or other flat surface, because there may be some variation in terminal height from one terminal to another and from one SSR to another.*



Side view: Part numbers DC60S3, 120D3, and 240D3 only

Side view: All other part numbers

## Z Series Specifications

### AC Power: 120/240 Volt

The Z Series employs a unique heat transfer system that makes it possible for Opto 22 to deliver a low-cost, 10-amp, solid-state relay in an all-plastic case. The push-on tool-free quick-connect terminals make the Z Series ideal for high-volume OEM applications. Operating temperature is –40 °C to 100 °C. (Ambient temperature will affect the current rating.)

| | Z120D10 | Z240D10 |
|---|---|---|
| Nominal AC Line Voltage Nominal | 120 | 240 |
| Current Rating (Amps) | 10* | 10* |
| 1 cycle Surge (Amps) Peak | 110 | 110 |
| Nominal Signal Input Resistance (Ohms) | 1000 | 1000 |
| Signal Pick-up Voltage | 3VDC (32V allowed) | 3VDC (32V allowed) |
| Signal Drop-out Voltage | 1 VDC | 1 VDC |
| Peak Repetitive Voltage Maximum | 600 | 600 |
| Maximum Output Voltage Drop | 1.6 volts | 1.6 volts |
| Off-State Leakage (mA) Maximum** | 6 mA | 12 mA |
| Operating Voltage Range (Volts AC) | 12–140 | 24–280 |
| $I^2t$ Rating t=8.3 (ms) | 50 | 50 |
| Isolation Voltage | 4,000 $V_{RMS}$ | 4,000 $V_{RMS}$ |
| θjc*** (°C/Watt) Dissipation (Watts/Amp) | 4 | 4 |

*NOTE: Part number Z240D10-17 is a replacement part only. Its specifications are identical to Z240D10.*

**Notes:** * Ambient temperature will affect the current rating. For details, see the Thermal Ratings chart.
** Operating Frequency: 25 to 65 Hz (operates at 400 Hz with 6 times the offstate leakage).

*** θjc = Thermal resistance from internal junction to base. Maximum internal junction temperature is 110 °C.

Opto 22 • 43044 Business Park Drive • Temecula, CA 92590-3614 • www.opto22.com
**SALES** 800-321-6786 • 951-695-3000 • FAX 951-695-3095 • sales@opto22.com • **SUPPORT** 800-835-6786 • 951-695-3080 • FAX 951-695-3017 • support@opto22.com

Courtesy of Steven Engineering, Inc - (800) 258-9200 - sales@steveneng.com - www.steveneng.com

## AC Power: 120/240 Volt (cont.)

### Thermal Ratings

Ambient temperature will affect the current rating.
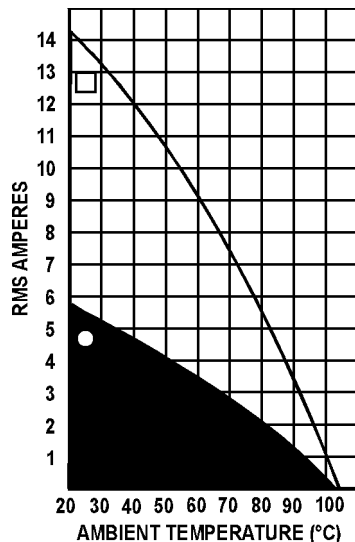


■● Free Air

□ Mounted on a heat sink with 2 °C/watt rating

### Surge Current Data

| Time Second | Time* (Cycles) | Peak Amps |
|---|---|---|
| 0.017 | 1 | 110 |
| 0.050 | 3 | 85 |
| 0.100 | 6 | 70 |
| 0.200 | 12 | 60 |
| 0.500 | 30 | 50 |
| 1 | 60 | 40 |
| 2 | 120 | 33 |
| 3 | 180 | 32 |
| 4 | 240 | 31 |
| 5 | 300 | 30 |
| 10 | 600 | 28 |

Note: *60 Hz

### Connection Diagram
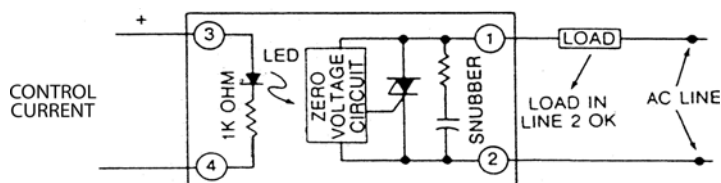


Control Current varies with control voltage. See for information.

### Dimensional Drawings
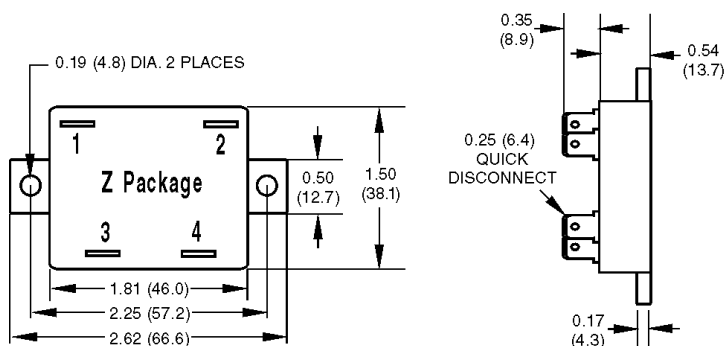


*NOTE: All dimensions are nominal. We do not recommend mounting the terminal side of the SSR to a flat PCB (printed circuit board) or other flat surface, because there may be some variation in terminal height or alignment from one terminal to another and from one SSR to another.*

# Solid-State Relays

## Printed Circuit Series Specifications

### AC Power: MP and P Series

The MP Series packaging is designed with a minimum footprint to allow maximum relay density on the printed circuit board. The P Series power relays provide low-profile for 0.5-inch (12.7 mm) center mounting on printed circuit boards. Operating temperature: –40 °C to 100 °C. (Ambient temperature will affect the current rating.)

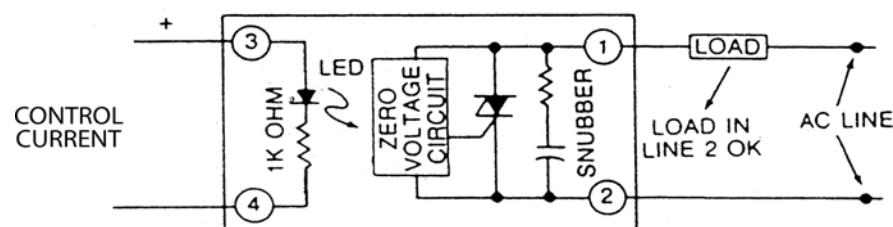| | MP120D2 or P120D2 | MP120D4 or P120D4 | MP240D2 or P240D2 | MP240D4 or P240D4 | MP380D4 |
|---|---|---|---|---|---|
| Nominal AC Line Voltage | 120 | 120 | 240 | 240 | 380 |
| Nominal Current Rating (Amps) | 2* | 4* | 2* | 4* | 4* |
| 1 cycle Surge (Amps) Peak | 20 | 85 | 20 | 85 | 85 |
| Nominal Signal Input Resistance (Ohms) | 1000 | 1000 | 1000 | 1000 | 1000 |
| Signal Pick-up Voltage | 3VDC**** (24V allowed) | 3VDC**** (24V allowed) | 3VDC**** (24V allowed) | 3VDC**** (24V allowed) | 3VDC**** (24V allowed) |
| Signal Drop-out Voltage | 1 VDC | 1 VDC | 1 VDC | 1 VDC | 1 VDC |
| Peak Repetitive Voltage Maximum | 600 | 600 | 600 | 600 | 800 |
| Maximum Output Voltage Drop | 1.6 volts | 1.6 volts | 1.6 volts | 1.6 volts | 1.6 volts |
| Off-State Leakage mA Maximum** | 5 mA | 5 mA | 5 mA | 5 mA | 5 mA |
| Operating Voltage Range (Volts AC) | 12–140 | 12–140 | 24–280 | 24–280 | 24–420 |
| $I^2t$ Rating t=8.3 (ms) | 2 | 30 | 2 | 30 | 30 |
| Isolation Voltage | 4,000 $V_{RMS}$ | 4,000 $V_{RMS}$ | 4,000 $V_{RMS}$ | 4,000 $V_{RMS}$ | 4,000 $V_{RMS}$ |
| θjc*** °C/Watt | 20 | 6.5 | 20 | 6.5 | 6.5 |
| Dissipation Watts/Amp | 1.2 | 1.2 | 1.2 | 1.2 | 1.2 |
| Rating (Motor Load) | 1 FLA at 120 VAC 6 LRA at 120 VAC | 2.5 FLA at 240 VAC 6 LRA at 240 VAC | 1 FLA at 120 VAC 15 LRA at 120 VAC | 2.5 FLA at 240 VAC 15 LRA at 240 VAC | 2.5 FLA at 380 VAC 15 LRA at 380 VAC |

**Notes:** * Ambient temperature will affect the current rating. For details, see the Thermal Ratings chart.
** Operating Frequency: 25 to 65 Hz (operates at 400 Hz with 6 times the offstate leakage)
*** θjc = Thermal resistance from internal junction to base. Maximum internal junction temperature is 110 °C.
**** = P Series 32 volts maximum.

### Connection Diagram



NOTE: Part numbers ending in -17 are replacement parts only. Their specifications are identical to the same part number without the -17. For example, P240D4-17 is identical to P240D4.

Control Current varies with control voltage. See "Control Current Calculation" on page 17 for information.
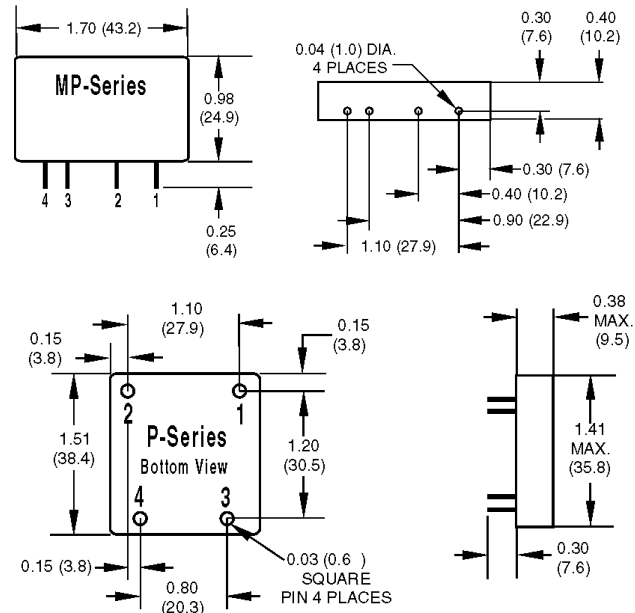
## AC Power: MP and P Series (cont.)

### Surge Current Data

| Time (Seconds) | Time* (Cycles) | 2-Amp Peak Amps | 4-Amp Peak Amps |
|---|---|---|---|
| 0.017 | 1 | 20 | 85 |
| 0.050 | 3 | 18 | 66 |
| 0.100 | 6 | 15 | 53 |
| 0.200 | 12 | 11 | 45 |
| 0.500 | 30 | 9 | 37 |
| 1 | 60 | 8.5 | 31 |
| 2 | 120 | 8 | 28 |
| 3 | 180 | 7.5 | 27 |
| 4 | 240 | 7 | 26 |
| 5 | 300 | 6.5 | 25 |
| 10 | 600 | 6 | 24 |

Note: *60 Hz

### Dimensional Drawings

*NOTE: All dimensions are nominal.*

MP-Series

1.70 (43.2)
0.98 (24.9)
0.25 (6.4)

4 3 2 1

0.04 (1.0) DIA. 4 PLACES
0.30 (7.6)  0.40 (10.2)
0.30 (7.6)
0.40 (10.2)
0.90 (22.9)
1.10 (27.9)

P-Series Bottom View
1.10 (27.9)
0.15 (3.8)
0.15 (3.8)
1.51 (38.4)
1.20 (30.5)
2 1
4 3
0.15 (3.8)
0.80 (20.3)
0.03 (0.6) SQUARE PIN 4 PLACES

0.38 MAX. (9.5)
1.41 MAX. (35.8)
0.30 (7.6)

### Thermal Ratings

Ambient temperature will affect the current rating.

2 AMP MODELS RMS AMPERES — MP120 & 240D2
AMBIENT TEMPERATURE (°C)

2 AMP MODELD RMS AMPERES — P120 & 240D2
AMBIENT TEMPERATURE (°C)

4 AMP MODELS RMS AMPERES — MP120 & 240D4
AMBIENT TEMPERATURE (°C)

4 AMP MODELS RMS AMPERES — P120 & 240D4
AMBIENT TEMPERATURE (°C)

○ FREE AIR

□ MOUNTED ON A HEAT SINK WITH 2° C/WATT RATING

# Solid-State Relays

## DC Switching Series Specifications

| | DC60P or DC60MP | DC200P or DC200MP | DC60S-3 | DC60S-5 |
|---|---|---|---|---|
| Operating Voltage Range | 5–60 VDC | 5–200 VDC | 5–60 VDC | 5–60 VDC |
| Forward Voltage Drop | 1.5 volts at 3 amps | 1.5 volts at 1 amp | 1.5 volts at 3 amps | 1.5 volts at 5 amps |
| Nominal Current Rating (Amps) | 3* | 1* | 3* | 5* |
| Off-State Blocking | 60 VDC | 250 VDC | 60 VDC | 60 VDC |
| Signal Pickup Voltage | 3 VDC 32 Volts** allowed | 3 VDC 32 Volts** allowed | 3 VDC 32 Volts allowed | 3 VDC 32 Volts allowed |
| Signal Dropout Voltage | 1 VDC | 1 VDC | 1 VDC | 1 VDC |
| Signal Input Impedance | 1,000 ohms | 1,000 ohms | 1,000 ohms | 1,000 ohms |
| 1 Second Surge | 5 amps | 2 amps | 5 amps | 10 amps |
| Operating Temp. Range | –40 °C to 100 °C | –40 °C to 100 °C | –40 °C to 100 °C | –40 °C to 100 °C |
| Isolation Voltage | 4,000 $V_{RMS}$ | 4,000 $V_{RMS}$ | 4,000 $V_{RMS}$ | 4,000 $V_{RMS}$ |
| Off-State Leakage | 1 mA maximum | 1 mA maximum | 1 mA maximum | 1 mA maximum |
| Package Type | P/MP series | P/MP series | Power series | Power series |
| Turn-on Time | 100 usec | 100 usec | 100 usec | 100 usec |
| Turn-off Time | 750 usec | 750 usec | 750 usec | 750 usec |

Notes: * Ambient temperature will affect the current rating. For details, see the Thermal Ratings chart.
** MP series maximum allowed control signal is 24 VDC.

### Thermal Ratings
Ambient temperature will affect the current rating.



● Free Air

□ Mounted on a heat sink with 2 °C/watt rating

*NOTE: When controlling an inductive load, like a solenoid or coil, a commutating diode must be used. Install the commutating diode across the terminals of the load (not the SSR terminals). This will protect the SSR from damage caused by voltage spikes when turning off the load.*
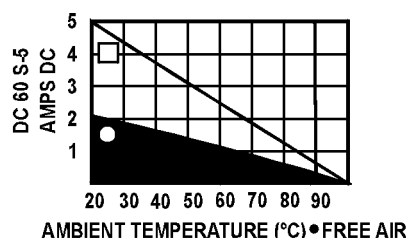
**Model DC60MP Basic Schematic (also applies to the other SSRs on this page)**
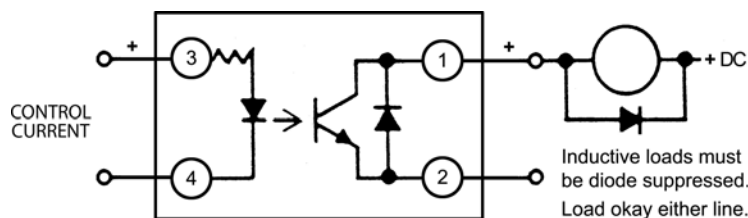


CONTROL CURRENT

Inductive loads must be diode suppressed.
Load okay either line.

Control Current varies with control voltage. See for information.

## Dimensional Drawings

*NOTE: All dimensions are nominal. We do not recommend mounting the terminal side of a Power Series or Z series SSR to a flat PCB (printed circuit board) or other flat surface, because there* *may be some variation in terminal height or alignment from one terminal to another and from one SSR to another. For mounting on PCBs, use the MP series or P series.*
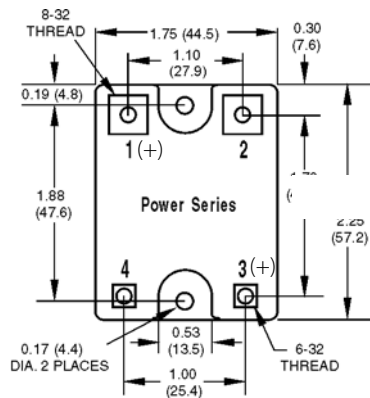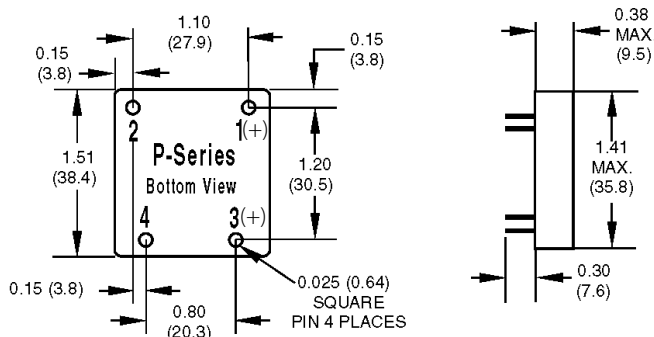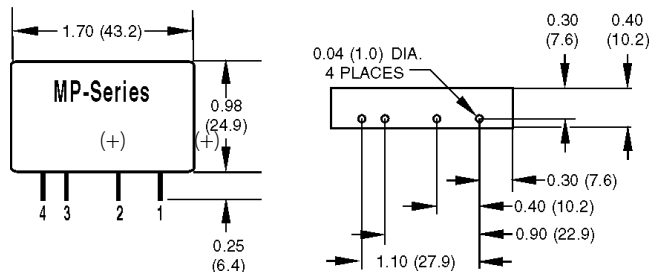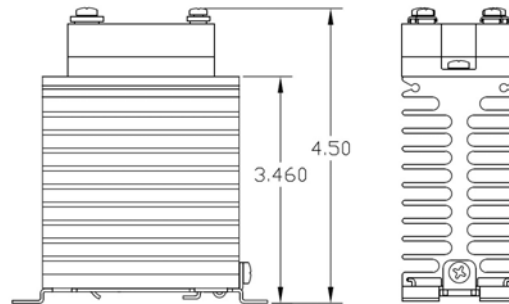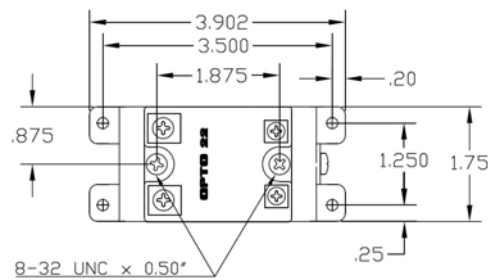


Side view: Part numbers DC60S3, 120D3, and 240D3 only

Side view: All other part numbers

Power Series SSR with SSR-HS Heat Sink, top view

Power Series SSR with SSR-HS Heat Sink, side view

# Solid-State Relays

## HS Series Specifications

The HS Series features an integrated heatsink, which makes them so cool. Because there is less thermal resistance internal to the unit than in a standard SSR mounted to the same heat sink, heat dissipates more easily. The built-in heatsink means you don't have to select a heatsink, and installation is much easier. Each HS-series SSR has built-in hardware for screw mounting and a built-in DIN-rail adapter clip for mounting to a 35mm DIN rail.

| Model Number | 240D30-HS | 480D25-HS | 575D30-HS |
|---|---|---|---|
| Nominal AC Line Voltage | 240 | 480 | 575 |
| Operating Voltage Range (Volts AC) | 24–280 | 100–530 | 100–600 |
| Peak Repetitive Voltage Maximum | 600 | 1000 | 1200 |
| Off-State Leakage (mA) Maximum* | 5 mA | 10 mA | 12 mA |
| Nominal Output Voltage Drop (RMS) | 1.0 volts | 1.0 volts | 1.0 volts |
| Nominal Current Rating (Amps) | 30** | 25** | 30** |
| 1 cycle Surge (Amps) Peak | 610 | 610 | 610 |
| $I^2t$ Rating t=8.3 (ms) | 1550 | 1550 | 1550 |
| Isolation Voltage (transient 4KV) | $2,500V_{RMS}$ | $2,500V_{RMS}$ | $2,500V_{RMS}$ |
| Dissipation (Nominal Watts/Amp) | 1.0 | 1.0 | 1.0 |
| Signal Pick-up Voltage | 4VDC (32V allowed) | 4VDC (32V allowed) | 4VDC (32V allowed) |
| Signal Drop-out Voltage | 1 VDC | 1 VDC | 1 VDC |
| Nominal Signal Input Resistance (Ohms) | 730 | 1000 | 1000 |
| $\theta$ja*** (°C/Watt) | 2.2 | 2.2 | 2.2 |

**Notes:** * Operating Frequency: 25 to 65 Hz (operates at 400 Hz with 6 times the offstate leakage)
** Ambient temperature will affect the current rating. For details, see the associated Thermal Ratings chart.
*** $\theta$ja = Thermal resistance from internal junction to base. Maximum internal junction temperature is 110 °C.

### Surge Current Data, Peak Amps

| Time Second | 60HZ | 50HZ |
|---|---|---|
| 0.0167 | 610 | 580 |
| 0.05 | 394 | 375 |
| 0.1 | 300 | 386 |
| 0.2 | 230 | 219 |
| 0.5 | 164 | 156 |
| 1 | 126 | 120 |
| 2 | 112 | 106 |
| 3 | 92 | 87 |
| 4 | 89 | 85 |
| 5 | 85 | 81 |
| 10 | 79 | 75 |

Courtesy of Steven Engineering, Inc - (800) 258-9200 - sales@steveneng.com - www.steveneng.com

## HS-series (cont.)

### Thermal Ratings

Ambient temperature will affect the current rating.
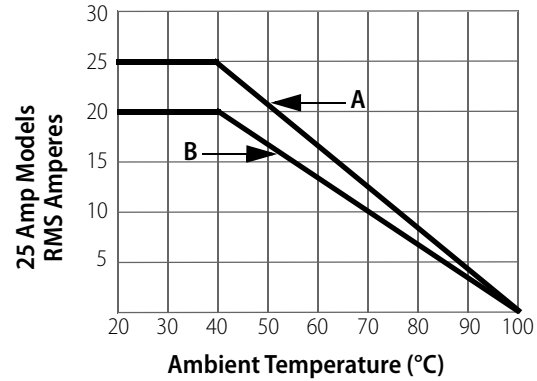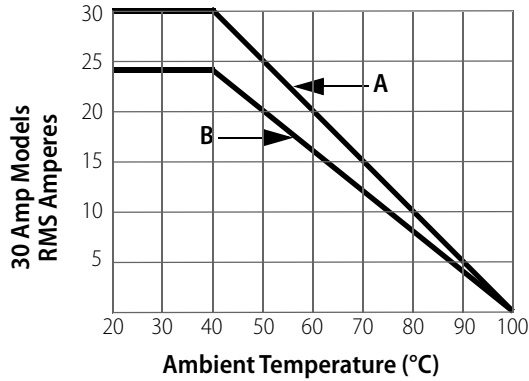


**A:** Single relay or with 0.75″ spacing between relays. Derate above 40 °C; subtract 0.5 amp/°C.

**B:** Three relays side by side with 0.25″ spacing. All relays with the same load. Derate above 40 °C; subtract 0.4 amp/°C.

*NOTE: This data is for SSRs mounted to a horizontal surface. To take advantage of the cooling effect of natural air flow, we recommend mounting HS-series SSRs to a vertical surface with the Opto 22 logo right side up as shown here.*

### Dimensional Drawing
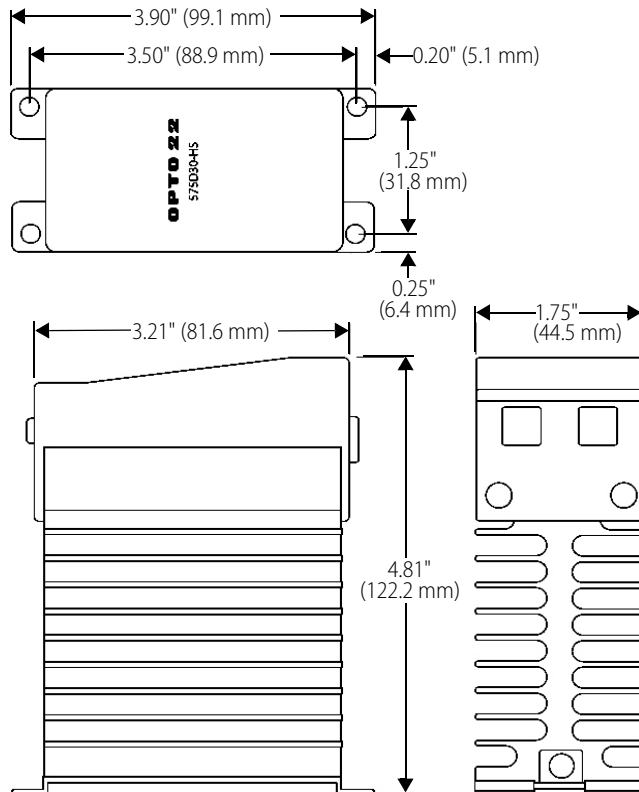
# Solid-State Relays

## Applications: Tips

### Heat Sink Calculation

Like all semiconductor devices, SSR current ratings must be based on maximum internal junction temperature. All Opto 22 SSRs operate conservatively at maximum internal junction temperatures of 110 °C. Use the equation below to calculate the maximum allowable heat sink thermal resistance for your application. It is good engineering practice to provide a margin for error instead of running the application right at the limits. If your application is near the thermal limit, it can be helpful to add a fan to move air across the heat sink.

$$\text{Heat Sink Max Thermal Resistance (°C/Watt)} = \frac{\left[ \text{SSR Max allowed internal junction temp} - \text{Max Ambient Temp} - \left[ \text{Max Load Current} \times \text{SSR Heat Dissipation Factor} \times \text{SSR Thermal Resistance} \right] \right]}{\left[ \text{Max Load Current} \times \text{SSR Heat Dissipation Factor} \right]}$$

**IMPORTANT: Thermally conductive grease must be used between the relay base and the heat sink.**

### Sample Calculation 1

120-volt, 20-amp load; 50 °C ambient air temperature

Model: 120D25 SSR.

See the last two columns of the table on for *thermal resistance* and *dissipation* values for the 120D25. Also, see the note at the bottom of the table.

Dissipation: 1.3 watts/amp
Thermal resistance: 1.2 °C/watt
Maximum junction temperature: 110 °C

The calculation would be as follows:

| Example for 120D25 | | | Units | |
|---|---|---|---|---|
| Max Ambient Temp | = | 50.00 | ° C | |
| Max Load Current | = | 20.00 | Amps | |
| | | | | |
| SSR Heat Dissipation Factor | = | 1.30 | Watts/Amp | From Data Sheet |
| SSR Thermal Resistance | = | 1.20 | ° C/Watt | |
| SSR Max allowed internal junction temp | = | 110.00 | ° C | |
| | | | | |
| Heat Sink Max Thermal Resistance (°C/Watt) | = | $\frac{(110 - 50 - (20 \times 1.3 \times 1.2))}{(20 \times 1.3)}$ | ° C/Watt | |
| Heat Sink Max Thermal Resistance (°C/Watt) | = | $\frac{28.8}{26}$ | ° C/Watt | |
| Heat Sink Max Thermal Resistance (°C/Watt) | = | 1.1 | ° C/Watt | |

This calculation indicates that you should select a heat sink with a thermal resistance of less than 1.1 °C/watt.

Opto 22 • 43044 Business Park Drive • Temecula, CA 92590-3614 • www.opto22.com
**SALES** 800-321-6786 • 951-695-3000 • FAX 951-695-3095 • sales@opto22.com • **SUPPORT** 800-835-6786 • 951-695-3080 • FAX 951-695-3017 • support@opto22.com

Courtesy of Steven Engineering, Inc - (800) 258-9200 - sales@steveneng.com - www.steveneng.com

## Sample Calculation 2

240-volt,18-amp load, 25 °C ambient air temperature

Model: 240D45

See the last two columns of the table on page 4 for thermal resistance and dissipation values for the 240D45. Also, see the note at the bottom of the table.

Dissipation: 0.9 watts/amp
Thermal resistance: 0.67 °C/watt
Maximum junction temperature: 110 °C

The calculation would be as follows:

**Example for 240D45**

| | | | Units |
|---|---|---|---|
| Max Ambient Temp | = | 25.00 | ° C |
| Max Load Current | = | 18.00 | Amps |
| SSR Heat Dissipation Factor | = | 0.90 | Watts/Amp |
| SSR Thermal Resistance | = | 0.67 | ° C/Watt |
| SSR Max allowed internal junction temp | = | 110.00 | ° C |
| Heat Sink Max Thermal Resistance (°C/Watt) | = | $\frac{(110 - 25 - (18 \times 0.9 \times 0.67))}{(18 \times 0.9)}$ | ° C/Watt |
| Heat Sink Max Thermal Resistance (°C/Watt) | = | $\frac{74.146}{16.2}$ | ° C/Watt |
| Heat Sink Max Thermal Resistance (°C/Watt) | = | 4.6 | ° C/Watt |

*From Data Sheet* (applies to SSR Heat Dissipation Factor, SSR Thermal Resistance, and SSR Max allowed internal junction temp rows)

This calculation indicates that you should select a heat sink with a thermal resistance of less than 4.6 °C/watt.

## Duty Cycle Calculation

When solid-state relays are operated in an on/off mode, it may be advantageous to calculate the RMS value of the current through the SSR for heat sinking or determining the proper current rating of the SSR for the given application.

$I_{RMS}$ = RMS value of load or SSR

$T_1$ = Time current is on

$T_2$ = Time current is off

$I_{ON}$ = RMS value of load current during on period

$$I_{RMS} = \sqrt{\frac{(I_{ON})^2 \times T_1}{T_1 + T_2}}$$

# Solid-State Relays

## Transformer Loads

Careful consideration should be given to the selection of the proper SSR for driving a given transformer. Transformers are driven from positive saturation of the iron core to negative saturation of the core each half cycle of the alternating voltage. Large inrush currents can occur during the first half cycle of line voltage if a zero-voltage SSR happens to turn on during the positive half cycle of voltage when the core is already in positive saturation. Inrush currents greater than 10 times rated transformer current can easily occur. The following table provides a guide for selecting the proper SSR for a given transformer rating.

| 120-Volt Transformers | |
|---|---|
| SSR MODEL | TRANSFORMER |
| P or MP 120D2 | 100 VA |
| Z120D10 | 500 VA |
| 120D3 | 100 VA |
| P or MP 120D4 | 250 VA |
| 120D10 or 120A10 | 500 VA |
| 120D25 or 120A25 | 1 KVA |
| 120D45 | 2 KVA |
| **240-Volt Transformers** | |
| P or MP240D2 | 200 VA |
| Z240D10 | 1 KVA |
| 120D3 | 200 VA |
| P or MP240D4 | 500 VA |
| 240D10 or 240A10 | 1 KVA |
| 240D25 or 240A25 | 2 KVA |
| 240D45 | 4 KVA |
| **480-Volt Transformers** | |
| SSR MODEL | TRANSFORMER |
| 480D10-12 | 5-Amp Primary |
| 480D15-12 | 5-Amp Primary |

## Control Current Calculation

All Opto 22 DC-controlled SSRs have a control circuit consisting of 1000 ohms in series with an Optocoupler LED. The LED will drop 1 volt, so the voltage across the internal resistor will be 1 volt less than the control voltage.

The control current ($I_C$) can be calculated from the control voltage ($V_C$) as follows:

$I_C = (V_C - 1)/1000$

Examples:

3 VDC control voltage:
$I_C = (3 - 1)/1000 = 0.002$ A (2 mA)

32 VDC control voltage:
$I_C = (32 - 1)/1000 = 0.031$ A (31 mA)

For control voltages above 32 VDC, an external resistor can be added in series with the SSR to limit the control current. Also, if the device driving the control current to the SSR is limited, you can limit the control current by using an external resistor ($R_e$).

$I_C = (V_C - 1)/ (R_e + 1000)$

$R_e = [(V_C - 1)/(I_C)] - 1000$

To limit the control current to 2 mA, this simplifies to:

$R_e = 500 (V_C - 3)$



## Solenoid Valve and Contactor Loads

All Opto 22 SSRs are designed to drive inductive loads such as solenoid valves and electromechanical contactors. The built-in snubber in each SSR assures proper operation into inductive loads. The following table is a guide in selecting an SSR to drive a solenoid or contactor.

| 120-Volt Coils | | |
|---|---|---|
| SSR CURRENT RATING | SOLENOID | CONTACTOR |
| 2-Amp | 1-Amp | NEMA Size 4 |
| 4-Amp | 3-Amp | NEMA Size 7 |
| **240-Volt Coils** | | |
| SSR CURRENT RATING | SOLENOID | CONTACTOR |
| 2-Amp | 1-Amp | NEMA Size 7 |
| 4-Amp | 3-Amp | NEMA Size 7 |

Opto 22 SSRs for controlling single-phase motors are shown in the following tables:

| 120-Volt Single-Phase Non-Reversing Motors | |
|---|---|
| SSR Model | MOTOR RATING |
| P or MP120D2 | 1 Amp |
| Z120D10 | 1/4 HP |
| 120D3 | 1-1/2 Amp |
| P or MP120D4 | 1-1/2 Amp |
| 120D10 or 120A10 | 1/4 HP |
| 120D25 or 120A25 | 1/3 HP |
| 120D45 | 3/4 HP |

| 240-Volt Single Phase Non-Reversing Motors | |
|---|---|
| SSR Model | MOTOR RATING |
| P or MP240D2 | 1 Amp |
| Z240D10 | 1/4 HP |
| 240D3 | 1-1/2 Amp |
| P or MP240D4 | 1-1/2 Amp |
| 240D10 or 240A10 | 1/3 HP |
| 240D25 or 120A25 | 1/2 HP |
| 240D45 | 1-1/2 HP |

| 120-Volt Single-Phase Reversing Motors | |
|---|---|
| SSR Model | MOTOR RATING |
| P or MP240D2 | 1 Amp |
| Z240D10 | 1/4 HP |
| 240D3 | 1-1/2 Amp |
| P or MP240D4 | 1-1/2 Amp |
| 240D10 or 240A10 | 1/4 HP |
| 240D25 or 120A25 | 1/3 HP |
| 240D45 | 3/4 HP |

| 240-Volt Single-Phase Reversing Motors | |
|---|---|
| SSR Model | MOTOR RATING |
| 480D10-12 | 1/4 HP |
| 480D15-12 | 1/4 HP |

## Solid-State Relays in Series

In applications requiring higher voltage, two Opto 22 SSRs may be operated in series for double the voltage rating. The built-in snubber in each SSR assures proper voltage sharing of the two SSRs in series. In the following diagram, two 240-volt, 45-amp SSRs are connected in series for operation on a 480-volt line. The control is shown with a parallel hook-up but it should be noted that a serial connection can also be implemented.
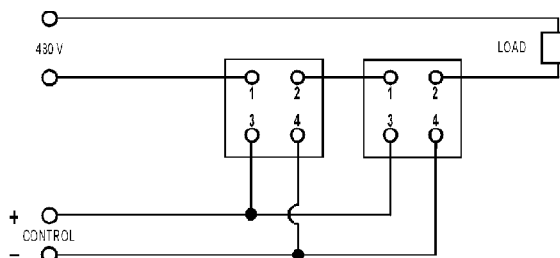


## Lamp Loads

Since all Opto 22 AC output SSRs use zero-voltage turn-on, they are ideal for driving incandescent lamps, because the initial inrush current into a cold filament is reduced. The life of the lamp is increased when switched by a zero-voltage turn-on SSR. The following table is a guide to selecting an Opto 22 SSR for switching a given incandescent lamp.

| 120 Volt Lamps | |
|---|---|
| SSR CURRENT RATING | LAMP RATING |
| 2-Amp | 100 Watt |
| 4-Amp | 400 Watt |
| 10-Amp | 1 Kilowatt |
| 25-Amp | 2 Kilowatt |
| 45-Amp | 3 Kilowatt |
| 240 Volt Rating | |
| SSR CURRENT RATING | LAMP RATING |
| 2-Amp | 200 Watt |
| 4-Amp | 800 Watt |
| 10-Amp | 2 Kilowatt |
| 25-Amp | 4 Kilowatt |
| 45-Amp | 6 Kilowatt |

# Solid-State Relays

## Heater Loads

Care should be taken in selecting a SSR for driving a heater load if the load is cycled on and off in a continuous manner as might occur in a temperature control application. Constant cycling can cause thermal fatigue in the thyristor chip at the point where the chip bonds to the lead frame. Opto 22 employs a thick copper lead frame for mounting the SCR chips in the power series SSRs to eliminate thermal fatigue failures. In addition, Opto 22 recommends operating any SSR at 75% rated current for cycling heater loads to ensure complete reliability.

The following table is a guide to selecting the proper SSR for a given heater load.*

| Nominal SSR Current Rating | Maximum Recommended Heater Current |
|---|---|
| 2-Amp | 1½-Amp |
| 4-Amp | 2½-Amp |
| 10-Amp | 7½-Amp |
| 25-Amp | 18-Amp |
| 45-Amp | 35-Amp |
| 10 480V | 8-Amp |
| 10 480V | 8-Amp |

* Ambient temperature will affect the current rating. For details, see the Thermal Ratings charts.

## Single-Phase Reversing Motor Control

The circuit diagram below illustrates a typical 1 Ø motor winding inductance and the phase shift capacitor can cause twice-line voltage to appear across the open SSR. A 240-volt SSR should be used for a 120-volt line. During the transition period when one SSR is turned on and the other SSR is going off, both SSRs may be on. In this case, the capacitor may discharge through the two SSRs, causing large currents to flow, which may destroy the SSRs. The addition of RL as shown will protect the SSRs from the short circuit capacitor discharge current.

CALCULATE RL as: $RL = \dfrac{1.4\ EAC}{10 \times SSR\ full\ load\ rating}$

EXAMPLE: 10 amp SSR
120 V AC Line
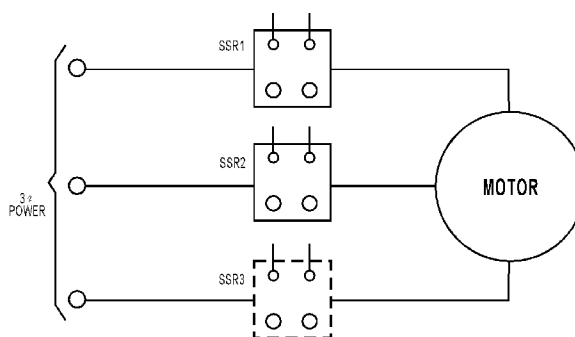
$RL = \dfrac{1.4 \times 120}{10 \times 10} = 1.7\ ohm$

## Single-Phase Reversing Motor Control (cont.)
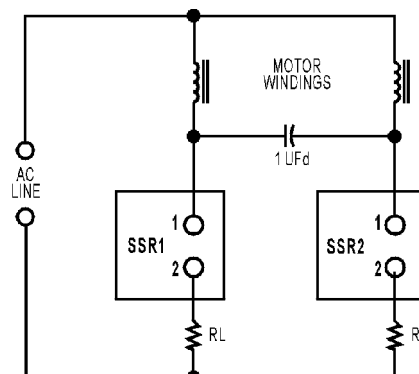


The resistors are unnecessary if the control circuit is designed to ensure that one SSR is off before the other SSR is on.

## Three-Phase Motor Control



Three-phase motors may be controlled by solid-state relays as shown. A third SSR as shown is optional, but not necessary. The control windings may be connected in series or parallel. Care should be taken to ensure that the surge current drawn by the motor does not exceed the surge current rating of the SSR.

| 240 Volt Three-Phase Motor | |
|---|---|
| SSR MODEL | MOTOR |
| Z240D10 | 3/4 HP |
| 240D10 | 3/4 HP |
| 240A10 | 3/4 HP |
| 240D25 | 2 HP |
| 240A25 | 2 HP |
| 240D45 | 3 HP |

# Solid-State Relays

| 480 Volt Three-Phase Motors | |
|---|---|
| SSR MODEL | MOTOR |
| 480D10-12 | 1-½ HP |
| 480D15-12 | 1-½ HP |

## Three-Phase Reversing Motor Control



Three-phase reversing motor control can be implemented with four SSRs as shown in the connection diagram. The SSRs work in pairs with SSR1 and SSR3 operated for rotation in one direction and SSR2 and SSR4 operated for rotation in the reverse direction. The resistor R1 as shown in the connection diagram protects against line-to-line shorts if SSR1 and SSR4 or SSR3 and SSR2 are on at the same time during the reversing transition period. Use the following table as a guide to the proper selection of an SSR for this application.

| Opto 22 Relay | Motor Full Load Rating | Resistor for 120V line | Resistor for 240V line |
|---|---|---|---|
| 3-Amp | 1.25-Amp | 4 ohm 50 W | 8 ohm 50 W |
| 10-Amp | 5-Amp | 1 ohm 100 W | 2 ohm 100 W |
| 25-Amp | 8-Amp | .5 ohm 100 W | 1 ohm 100 W |
| 45-Amp | 16-Amp | .25 ohm 150 W | .5 ohm 150 W |
| 15-Amp | 5-Amp | 1 ohm 100 W | 2 ohm 100 W |

## FAQ: SSR Applications

### Q : What is a solid-state relay?

A: A solid-state relay (SSR) is a semiconductor device that can be used in place of a mechanical relay to switch electricity to a load in many applications. Solid-state relays are purely electronic, normally composed of a low current "control" side (equivalent to the coil on an electromechanical relay) and a high-current load side (equivalent to the contact on a conventional relay). SSRs typically also feature electrical isolation to several thousand volts between the control and load sides. Because of this isolation, the load side of the relay is actually powered by the switched line; both line voltage and a load (not to mention a control signal) must be present for the relay to operate.

### Q : What are the advantages of using an SSR over a mechanical relay?

A: There are many applications that require a moderate amount of power (W to kW) to be switched on and off fairly rapidly. A good example would be the operation of a heater element in a controlled-temperature system. Typically, the amount of heat put into the system is regulated using pulse-width modulation turning a fixed-power heating element on and off for time periods ranging from seconds to minutes. Mechanical relays have a finite cycle life, as their components tend to wear out over thousands to millions of cycles. SSRs do not have this problem; in the proper application, they could be operated almost infinitely.

### Q : What are the limitations of using an SSR?

A: SSRs have a few limitations when compared to the capabilities of their mechanical counterparts. First, because the relay is semiconductor-based, it will never turn all the way on, nor off. This means that in the "on" state, the relay still has some internal resistance to the flow of electricity, causing it to get hot. When in the "off" state, the relay will exhibit a small amount of leakage current, typically a few mA. This leakage can conspire to keep some loads, especially ones with a high impedance, from turning off! Additionally, SSRs are more sensitive to voltage transients; while Opto 22 relays are very well transient-protected, if a relay gets hit hard enough a sufficient number of times, it will die or degrade. This makes SSRs less ideal for driving highly inductive electromechanical loads, such as some solenoids or motors. SSRs should also never be used for applications such as safety power disconnects, because even in the off state, leakage current is present. Leakage current through an SSR also implies the presence of a potentially high voltage. Even though the relay is not conducting a large amount of current, the switched terminal will still be "hot," and thus dangerous.

# Solid-State Relays

**Q: Which SSRs should I use with a printed circuit board (PCB)?**

A: If you are mounting SSRs to a PCB, use the MP or P series SSRs which are designed for that purpose.

We do not recommend mounting the terminal side of a Power Series or Z series SSR to a flat PCB (or to any other flat surface), because there may be some variation in terminal height or alignment from one terminal to another and from one SSR to another.

**Q : Do you make multi-pole or multi-throw SSRs?**

A: Opto 22 manufactures only single-pole, single-throw SSRs. If multi-phase operation is required, just use a relay on each phase. Because of the limitations on semiconductor devices of the type used in SSRs, it is not practical to build single-device multi-throw SSRs. However, an alternative to multi-throw operation may be accomplished with multiple relays.

**Q : Can I hook up SSRs in parallel to achieve a higher current rating?**

A: No. There is no way to guarantee that two or more relays will turn on simultaneously when operated in parallel. Each relay requires a minimum voltage across the output terminals to function; because of the optical isolation feature, the "contact" part of the SSR is actually powered by the line it switches. One relay turning on before the other will cause the second relay to lose its turn-on voltage, and it won't ever turn on, or at least not until the first relay fails from carrying too much current.

**Q : What does a "zero-crossing" turn-on circuit refer to?**

A: An AC sine wave will be positive for the first half of each cycle and negative for the second half of each cycle. The voltage will cross through zero when the sine wave changes from the positive half-cycle to the negative half-cycle, and vice versa. So the voltage crosses through zero twice with each full AC sine wave cycle. "Zero-crossing" turn-on means that the SSR will only turn on when the AC sine wave passes through zero voltage. The actual turn-on will occur at or near zero voltage. All Opto 22 AC output solid-state relays are designed with a zero-crossing turn-on circuit. Zero-voltage turn-on has the benefit of minimizing electrical noise. All Opto 22 AC output solid-state relays use a zero-current turn-off circuit as well.

**Q : Can I use an AC SSR to switch DC?**

A: No. Because of the zero-crossing circuit described above, the relay will most likely never turn on, and even if it is on, it will most likely not be able to be turned off.

**Q : Can I use a DC SSR to switch AC?**

A: No. The semiconductor device used in Opto 22's DC SSRs is polarized. It may break down and conduct for the portion of the waveform that is reversed in polarity.

**Q : Can a DC SSR be used to switch an analog signal?**

A: This is not recommended at all. First, the voltage drop across the relay will cause signal loss. Second, the conduction characteristics of the SSR are very non-linear at low operating voltages and currents. Use a mechanical relay; it will work much better.

**Q : What agency approvals do your SSRs carry?**

A: In general, Opto 22 relays carry UL, CSA, and CE approval. See **http://support.opto22.com.** Additionally, some SSRs contain VDE-approved optocouplers; contact Opto 22 for more information.

## FAQ: SSR Troubleshooting

**Q : My SSR does not function anymore. What may have happened?**

A: There is no "normal" mode of failure for SSRs. They just stop working, by refusing to turn on or off. An improper installation is often to blame for an SSR failure, as these are very simple, reliable devices. If you have a failed SSR, it is important to look at the normal operating parameters of that relay within the larger system to make sure that the relay being used is appropriate to the application, and that the relay is being properly installed in the system. The three most common causes of SSR failure are as follows:

- **SSR improperly matched to load.** The relay was destroyed by overheating from carrying too much current too long.

- **SSR insufficiently protected.** Remember, a semiconductor is less tough than a simple metal contact. Reverse voltages exceeding the PRV rating of the relay will cause damage. Voltage spikes on the switched line, perhaps from inductive kickback, may have destroyed one or more of the internal switching devices. Remember to use snubbers, transorbs, MOVs, and/or commutating diodes on highly inductive loads.

- **SSR improperly installed.** The SSR was not mounted to a large enough heat sink, or no thermal compound was used, causing the relay to overheat. Also, insufficient tightening of the load terminals can cause arcing and ohmic heating of the relay. Opto 22 recommends 18 inch-pounds of torque on the load screw terminals. Similar failures have also been attributed to the use of

Opto 22 • 43044 Business Park Drive • Temecula, CA 92590-3614 • www.opto22.com
**SALES** 800-321-6786 • 951-695-3000 • FAX 951-695-3095 • sales@opto22.com • **SUPPORT** 800-835-6786 • 951-695-3080 • FAX 951-695-3017 • support@opto22.com

Courtesy of Steven Engineering, Inc - (800) 258-9200 - sales@steveneng.com - www.steveneng.com

crimp-on terminal lugs or spades; make sure such terminals are tightly crimped, and even drip some solder into the joint to ensure good electrical contact and protection from corrosion.

### Q : How can I test my SSR?

A: It is not possible to test an SSR by the same methods used to test mechanical relays; a typical SSR will always show an infinite impedance to a resistance meter placed across the output terminals. There are a few reasons for this. First, the SSR requires a small amount of power to operate, derived from whatever voltage source is placed on the load terminals. A typical multimeter will not supply sufficient voltage to cause the relay to change state. Second, AC SSRs contain zero-voltage turn-on and zero-current turn-off circuits. The SSR will not be able to turn on unless there is AC voltage connected to the output terminals. Most test equipment will supply a DC voltage to the relay, so it will never see the zero-voltage transition it requires to turn on. To test an SSR, it is best to operate it at the actual line voltage it will be used at, driving a load such as a large light bulb.

### Q : I have an SSR driving a load. The load turns on okay, but never seems to turn off, unless I remove power from the relay entirely. What might be happening?

A: This is normally a problem when using an SSR with a high-impedance load, such as a neon lamp or a small solenoid. Loads like these often have relatively large initial currents, but relatively small "hold in" currents. The result is that the off-state leakage current through the relay (see previous section) is insufficient to cause the load to turn on to start with, but sufficient to keep it on, once started. The solution is to place a power resistor, sized for 8–10 times the rated maximum leakage current for the SSR in parallel with the load. Make sure that this resistor has a high enough power rating for the application. For example, for a 5 mA leakage current at 120 VAC, a resistor drawing 50 mA would be desirable. Using Ohm's Law, the resistor value becomes 2,400 ohms. This resistor will dissipate 6 watts, so a 7.5 or 10-watt size power resistor should be used.

### Q : I have a new AC SSR driving a solenoid. It turns on okay once, but will not turn on again. What is going on?

A: Some solenoids, some types of halogen lights, and some types of strobe lights incorporate a diode in series with the coil or filament. This causes the light to behave as a half-wave rectifier. Opto 22 SSRs have a built-in R-C snubber circuit in parallel with the output. The capacitor in this circuit charges up but cannot discharge through the series diode, causing a voltage to appear across the SSR terminals. Because the SSR must detect the AC waveform cross through zero volts on the load terminals, it will not be able to turn on again. The solution here would be to put a high-value resistor (several tens of Kohms) across the terminals of the relay, to allow the capacitor to drain its charge.

## PRODUCTS

Opto 22 develops and manufactures reliable, easy-to-use, open standards-based hardware and software products used worldwide.

Industrial automation, process control, building automation, industrial refrigeration, remote monitoring, data acquisition, and Industrial Internet of Things (IIoT) applications all rely on Opto 22.

### *groov*

Monitor and control your equipment from anywhere using your smartphone or tablet with groov. Build your own mobile app easily—just drag, drop, and tag. No programming or coding. Visit groov.com for more information and your free trial.

### SNAP PAC System

Developer- and IIoT-ready, the SNAP PAC System connects physical assets to databases and applications using open standards. The SNAP PAC System consists of four integrated components:
- SNAP PAC controllers
- PAC Project™ Software Suite
- SNAP PAC brains
- SNAP I/O™

### SNAP PAC Controllers

SNAP PAC programmable automation controllers handle a wide range of digital, analog, and serial functions for data collection, remote monitoring, process control, and discrete and hybrid manufacturing.

For IIoT applications and easier integration with company systems, standalone and rack-mounted SNAP PACs include a built-in HTTP/HTTPS server and **RESTful API** (application program interface). The REST API gives you secure, direct access to I/O and variable data using your choice of programming languages. No middleware, protocol converters, drivers, or gateways needed.

Based on open Ethernet and Internet Protocol (IP) standards, SNAP PACs make it easier to build or extend a system without the expense and limitations of proprietary networks and protocols.

### PAC Project Software Suite

Opto 22's PAC Project Software Suite offers full-featured, cost-effective control programming, HMI (human machine interface), OPC server, and database connectivity software.

Control programming includes both easy-to-learn flowcharts and optional scripting. Commands are in plain English; variables and I/O point names are fully descriptive.

PAC Project Basic offers control and HMI tools and is free for download on our website, www.opto22.com. PAC Project Professional, available for separate purchase, adds one SoftPAC software-based controller, OptoOPCServer, OptoDataLink, options for controller redundancy or segmented networking, and support for legacy Opto 22 serial *mistic*™ I/O units.

### SNAP PAC Brains

While SNAP PAC controllers provide central control and data distribution, SNAP PAC brains provide distributed intelligence for I/O processing and communications. Brains offer analog, digital, and serial functions, including thermocouple linearization, local PID loop control, watchdog, totalizing, and much more.

### SNAP I/O

I/O provides the local connection to sensors and equipment. Opto 22 SNAP I/O offers 1 to 32 points of reliable I/O per module. Analog, digital, and serial modules are mixed on one mounting rack and controlled by a SNAP PAC brain or rack-mounted PAC.

## QUALITY

Founded in 1974, Opto 22 has established a worldwide reputation for high-quality products. All are made in the U.S.A. at our manufacturing facility in Temecula, California.

Because we test each product twice before it leaves our factory, rather than only testing a sample of each batch, we can guarantee most solid-state relays and optically isolated I/O modules for life.

## FREE PRODUCT SUPPORT

Opto 22's California-based Product Support Group offers free, comprehensive technical support for Opto 22 products from engineers with decades of training and experience. Support is available in English and Spanish by phone or email, Monday–Friday, 7 a.m. to 5 p.m. PST.

Support is always available on our website: how-to videos, user's guides, OptoKnowledgeBase, self-training guide, troubleshooting, and OptoForums. In addition, hands-on training is available for free at our Temecula, California headquarters, and you can register online.

## PURCHASING OPTO 22 PRODUCTS

Opto 22 products are sold directly and through a worldwide network of distributors, partners, and system integrators. For more information, contact Opto 22 headquarters at 800-321-6786 (toll-free in the U.S. and Canada) or 951-695-3000, or visit our website at www.opto22.com.

Form 1335-170413

Courtesy of Steven Engineering, Inc - (800) 258-9200 - sales@steveneng.com - www.steveneng.com