




SENSORS FOR DOORS, GATES AND ELEVATORS



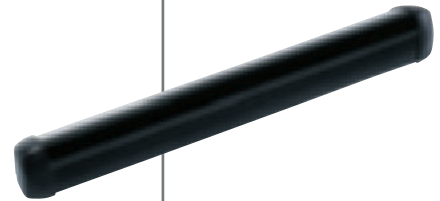

Photoelectric sensors for doors, gates, and elevators

Contents	Page
Foreword	8
Overview	10
Functional principles of photoelectric sensors for doors, gates, and elevators	12
Sensors for automatic doors	14
RMS series	
Radar sensors for use as opening pulse generator for all automatic doors incl. closing edge protection in sliding doors (DIN 18650)	16
FLT-D series	
Active infrared sensors for use as opening pulse generator for all automatic doors incl. closing edge protection in sliding doors	24
PROSCAN series	
Active infrared sensors for closing edge protection in automatic sliding doors	22
PIR series	
Passive infrared sensors for use as opening pulse generator for all automatic doors	26
TOPSCAN-S series	
Active infrared sensors for protecting (anti-collision) revolving doors in accordance with (DIN 18650) and rotating doors	28
TOPSCAN series	
Active infrared sensors for protecting (anti-collision) revolving doors/rotating doors	32
AIR30 series	
Active infrared sensors for closing edge protection in automatic doors	36
ML29 series	
Single path light barrier for integration into door frames	38
FLT-...-CLS series	
Light scanners for counting people with detection of direction of movement	46
Sensors for industrial gates, fire protection light barriers	48
RLK29 and RLK31 series	
Reflection light barrier for lateral protection in gates	50
LA31/LK31 series	
Reflection light barrier for lateral protection in gates	56
RMS-G-RC series	
Radar sensors for use as opening pulse generator, especially for gates	58
LT2 and LTK2 series	
Reflection light scanner with background suppression and evaluation	60
LC10 series	
Loop detectors	66
MLV12 series	
Fire protection reflection light barrier	70
Sensors for elevators	72
AL21 series	
Light grids for multibeam protection on closing edges in elevator doors	74
AL20 and AL40 series	
Light grids for multibeam safety on closing edges in elevator doors	76
RL91 and RLK91 series	
Reflection light barriers for safety on closing edges of elevator doors	78
FLT series	
Active infrared sensor for vestibule/cabin monitoring	86
VDM70 series	
Distance measuring device for monitoring elevator positions	90
Accessories	92
Device options	109
Pepperl+Fuchs around the world	110
Model index	119

Worldwide presence of a new product brand

Visolux – synonym for photoelectric competence

The VISOLUX brand name, in the Pepperl+Fuchs business sector, stands for factory automation for all photoelectric sensors, including door/gate/elevator sensors and sensors for safety applications. In its 50-year history, Pepperl+Fuchs has developed into one of the most well-known sensor manufacturers with a world-wide presence. During this time, the company has often played a pioneering role in technology. With responsibility for products, solutions and issues in optoelectronics the VISOLUX sector fits seamlessly into the Pepperl+Fuchs tradition and company philosophy: To enable rational automation solutions through innovative and high quality developments and thereby providing clients with decisive benefits in the global competitive environment. At the same time, the photoelectric sensor competence centre benefits from the global distribution network and world-wide manufacturing facilities of the parent corporation, with locations in all important industrial regions in Europe, Asia, and America.

A comprehensive range of products

A wide range of products allows Pepperl+Fuchs and the Visolux brand to fulfil a role as complete provider and market leader with a highly developed range of end products. Thus the solutions of the photoelectric specialists are easy to optimize for individual applications. The spectrum includes standard light barriers in various shapes, light scanners, colour sensors, laser systems, data transmission light barriers, image processing systems, distance measurement devices, light curtains, light grids, and safety light barriers. The latter can, for instance, be used in touch-free safety applications. Finally, light beam switches using wireless data transmissions can ensure that machine down time caused by broken cables or communication errors is a thing of the past.

Need customer-specific solutions?

If the right sensor cannot be found in the range, or if problems occur which cannot be solved with standard off the shelf products, the Pepperl+Fuchs development team is ready for action. In numerous customer-specific solutions, the photoelectric specialists have already demonstrated their flexibility and performance.



Industry-specific sensors

Photoelectric sensors for doors, gates, and elevators

The secure and safe operation of doors and gates is the theme of these specialized sensors from Pepperl+Fuchs/Visolux, which cater for the opening pulse initiation of automatic doors and industrial gates, the monitoring and start-up control of escalators in public facilities, opening pulse generators and closing edge protection for industrial gates, or the vestibule and cabin occupation control and closing edge protection for elevator doors.

In addition, DIN 18650 applies in Germany since 01/07/2006. This places basic requirements on the safety of automatic doors and comprehensively defines the technical requirements for different automatic doors. In addition to the basic product requirements, the standard describes in particular potential risks and safety options.

It obliges manufacturers to carry out a detailed risk assessment. The basic message of the standard is that contrary to earlier practice a limiting of forces is not adequate as the only protection device during door movement. For sliding doors there is the additional stipulation that light barriers for hazard prevention may now only be used in conjunction with motion detectors. As we cooperate closely with leading door manufacturers of automatic doors and are actively involved in creating standard test principles for sensors on doors and safety components at TÜV Nord, sensors of Pepperl+Fuchs incorporate all of the current requirements.

An assortment of different operating principles is employed on this very wide range of sensors offered by Pepperl+Fuchs for this specialized industry:

- Radar sensors for use as opening pulse generators for all automatic doors incl. closing edge protection in sliding doors.


- Light scanners for the detection of the presence of people and safeguarding closing edges on revolving and sliding doors – in buses and trains, too.




- Area scanners for monitoring the approach areas to door entry compartments and the areas surrounding doors – with optional counter function.
- Loop detectors as opening pulse generators in barriers and gates.
- Light barriers with increased range and water-tight housing for gate and barrier systems
Certificated fire protection light barriers as safety device for fixed installations in fire barriers or fire-proof gates
- Elevator light grids to provide for the safe and convenient operation of the closing edges of lift doors




Opening pulse generator and closing edge monitor for automatic doors

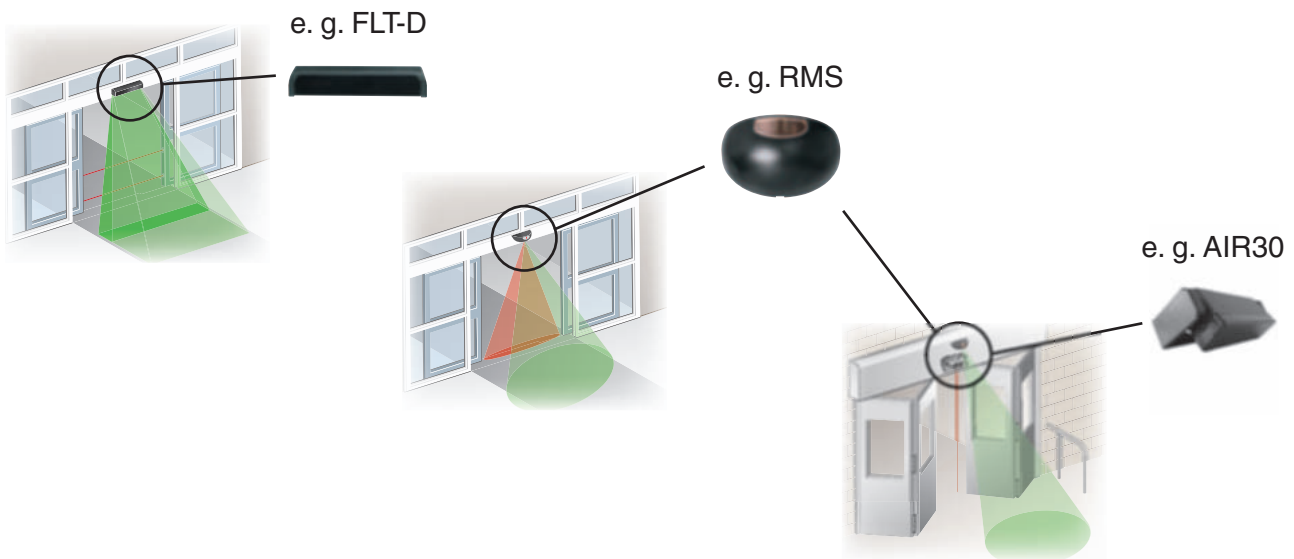


Anti-collision protection for revolving and automatic doors

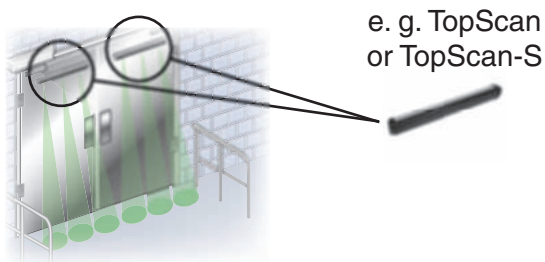


Opening pulse generator, closing edge monitor and pinch protection for industrial doors

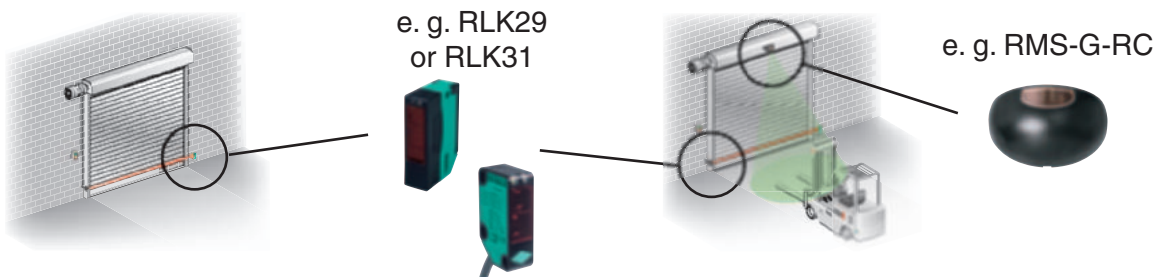


Opening pulse generator and closing edge monitor for cabinet systems

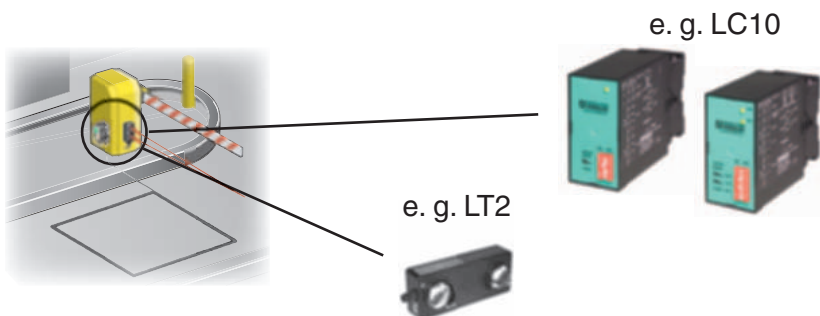

Closing edge monitors for elevators

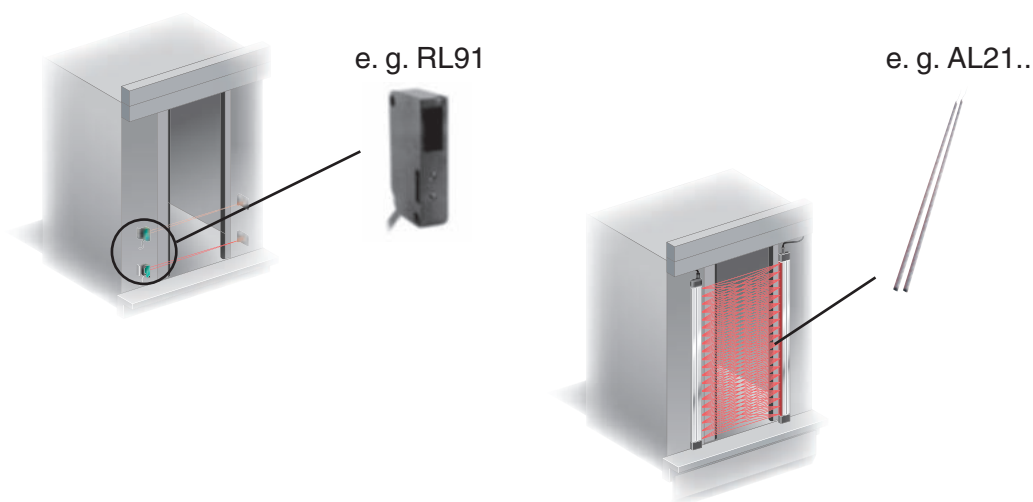


Cage positioning for elevators

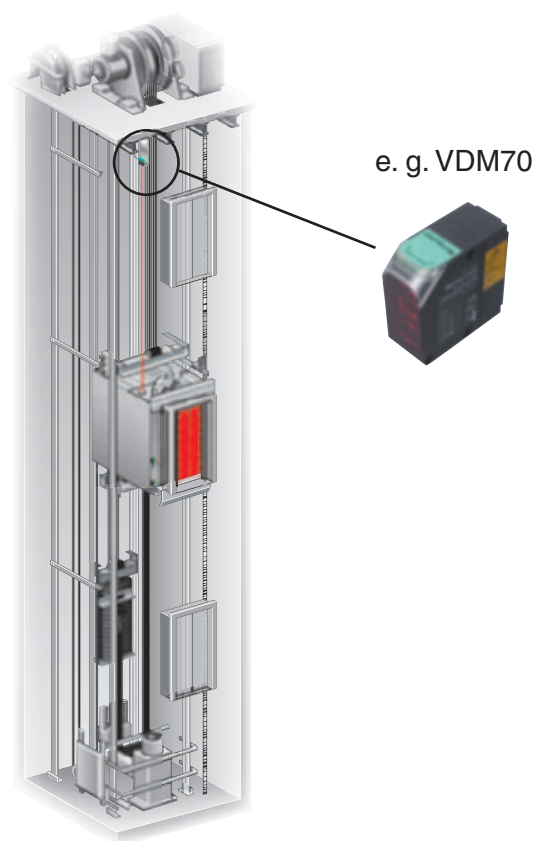

Functional principles in overview

Type, size, shape, and surface properties of the objects to be detected, the distance between sensor and object, and the ambient conditions all determine the layout of the system and selection of appropriate types of sensors.


1. Thru-beam sensor



Thru-beam sensors in profile housings for installation in door frames require a pair of devices for operation, consisting of one light transmitter and one light receiver. The transmitter and receiver must be oriented in a line with one another. The infrared light sent out from the transmitter is collected and evaluated by the receiver.

The light barrier can detect people and objects regardless of movement and surface structure, as long as an object breaks the detection beam.

2. Retro reflective sensor



For particular applications, Pepperl+Fuchs offers a particular selection of sensors:

For monitoring elevator doors, particularly narrow reflection light barriers, also with polarisation filter and transistor or relay output, designs for direct-current operation and alternating current designs up to 264 VAC.


Robust devices with a high protection class of IP67 and visible red light are ideally suited for numerous monitoring tasks in outdoors and boundary areas, or in harsh environments in general. They are equipped with polarisation filters and, with a double functional reserve, can easily span distances of up to 12 m. As "all-voltage sensors", they can work with arbitrary power supply voltages between 24 V and 240 V and with direct or alternating current. Besides a generally high service lifetime, their main advantage is there is no measurable interference emission in these light barriers.

Fire protection light barriers with certification




In case of fire, fire may not spread in buildings through halls, entryways, or shafts. Applicable fire protection regulations thus require so-called fire protection enclosures. These include fire protection doors, gates, and shutters, which are normally always closed. So that these doors may remain open in commonly-used entryways, there must be a self-closing mechanism which is triggered in case of fire. However, the door may not close right in the moment where a person is occupying it. Regulators thus require monitoring with corresponding safety systems. The technical challenge is to ignore any smoke and still be able to detect people reliably. This function can be fulfilled, for instance, by certified light barriers from Pepperl+Fuchs.

3. Diffuse mode sensor




If people and objects must be detected within a sharply defined area, then diffuse mode sensors from Pepperl+Fuchs are ideal. These devices offer configurable detection ranges of up to 6 m, timer functions, and transistor or relay outputs.

Diffuse mode sensor with background suppression




In the background-suppressing operating mode, sensors can be operated for door and gate monitoring and collision prevention in the direction of movement independent of the properties of the background.

Diffuse mode sensor with background evaluation



In the background-evaluation operating mode, the background serves as a reference surface. This allows even reflecting or shiny objects, like vehicles in parking garages, to be detected reliably.

Area scanner




For surface monitoring of doors and gates using area scanners, Pepperl+Fuchs offers the most extensive product line on the market thanks to their years of specialisation in the area.

The product line includes sensors with fan-shaped detection fields and automatic adjustment to the background, sensors for row installation in narrow profile housings, compact sensors for surface detection in different detection field sizes, and counting sensors for counting people with direction detection.

All sensors offer numerous possibilities for the configuration of the monitoring area, e.g. configurable detection ranges, user-switchable detection fields, and a choice between background suppression and background evaluation.

The product line includes designs for direct and alternating current, with transistor or relay outputs, light/dark switches, and configurable timing functions.

Passive infrared motion detectors




For the monitoring of the space before elevators and doors, as a cost-effective impulse sensor for any automatic system and signal sensors for open entryways, anywhere where people are to be detected, passive-infrared motion

detectors can be used, since they react to changes in the heat images when a person moves within the detection field.

Using zoom technology and apertures, the shape of the monitoring field can be set precisely. The product line includes designs for direct and alternating current.

Radar motion detectors



Radar motion detectors work with microwaves and detect moving objects.

They are used as openers on doors and gates, as control sensors in traffic applications for portable traffic lights, and in

buildings as presence sensors for lighting, air conditioning, and heating.


Depending on the radar module, the user can choose the sensor's large range of detection settings using a simple manual configuration or by hand held Remote Control.

Functions like direction detection, distinguishing between people and vehicles, filter functions to prevent interferences, and timer functions give these sensors a broad spectrum of applications.

Latest versions now offer closing edge monitoring with an additional field.

The product line includes designs for direct and alternating current with relay outputs, with configurable light/dark switching, and designs for use outdoors.

Elevator light grids



When operating elevators, it is necessary to prevent incoming or outgoing passengers from being touched or even injured by closing doors.


The AL20/AL40 light grid by Pepperl+Fuchs was designed especially for convenience elevators and is the first product of this kind with a 7-segment display. This greatly simplifies operation and service work.

The series includes light grids with 20 or 40 infrared beams and different profile widths. With an operating range of four meters, 1650-mm-high protection fields with up to 194 crossed beams, starting at a height of 20 mm above the floor, can be implemented. In the area close to the floor, smaller beam gaps and an asymmetrical beam pattern ensure that even small objects, like the points of shoes, are detected reliably.

Standard-conformal to the EN81-70 are available light grids up to 1800 mm protection field.

All functional units, including power unit, evaluation electronics, switching outputs, and test input, are integrated directly into the transmitter or receiver module. This compact solution thus avoids separate control units.

Distance measurement device



The time required for a beam of light to cover the route transmitter - object - receiver - is a measure of the distance to the object. One method for the indirect distance measurement is the so-called pulse time measurement.

Pulse time is the time the light beam takes to be reflected back to the source. By measuring this time the distance between the source and the object can be calculated using the speed of light.

Sensors for automatic doors,
incl buses and trains

Sensors for industrial gates,
fire protection light barriers

Sensors for elevators

Accessories



Date of issue 06/20/2007

Subject to reasonable modifications due to technical advances.

Copyright Pepperl+Fuchs, Printed in Germany

Pepperl+Fuchs Group • Tel.: Germany +49 621 776-0 • USA +1 330 4253555 • Singapore +65 67799091 • Internet <http://www.pepperl-fuchs.com>

Courtesy of Steven Engineering, Inc. • 230 Ryan Way, South San Francisco, CA 94080-6370 • General Inquiries: (800) 670-4183 • www.stevenengineering.com



Description

Sensors increasingly shape the face of modern building technology. Powerful sensors are indispensable for the operability and safety of automatic door and access systems. Besides the generation of opening pulses for approaching people they must also monitor the main and secondary closing edges to prevent any personal injuries.

Pepperl+Fuchs supplies all sensor components relevant to the operation and safety of automatic door systems.

DIN18650

Since 1 July 2006 automatic doors must only be installed in Germany if they meet the requirements defined in DIN 18650. Door sensors specially developed for this purpose make an important contribution to the safety of people and other items.

The active infrared light sensor TopScan-S, for example, is one of the first devices tested by TÜV and certified in accordance with DIN 18650. It can be supplied as a moving sensor and is thus ideally suited for revolving doors.

The radar sensors of series RMS-S provide a maximum of reliability and safety when opening and monitoring sliding doors. One of their interesting highlights is the static function which makes the use of light barriers in addition to a motion detector obsolete and at the same time meets all requirements of the current standard.

	Type code	Principle of operation	Application areas	Page
	RMS-M	Radar motion sensors	Opening pulse	16
	RMS-D		Opening pulse	18
	RMS-D-RC			
	RMS - S		Opening pulse generator and closing edge protection for sliding doors in accordance with DIN18650	20
	FLT-D/38a sw	Area scanner	Closing edge protection and opening pulse generator	24
	PROSCAN/32	Diffuse mode sensor	Closing edge safety along sliding doors	22
	PROSCAN/38a		For bus and railway doors	
	PROSCAN-T/32/76a			
	PIR20	Passive infrared motion detectors	Opening pulse generator for sliding and revolving doors	26
	TOPSCAN-S	Active Infrared area Scanner	Anti-collision protection at revolving doors in accordance with DIN 18650	28
	TOPSCAN2-8-HS-2500-...	Active infrared ara scanner with background suppression and evaluation	Anti-collision protection in revolving and rotating doors	32
	AIR30-8	Active infrared area scanner with background evaluation	Closing edge monitoring in rotating doors	36
	ML29-P/...	Thru-beam sensor	Closing edge monitoring in sliding doors	38
	ML29T-P/25/102/115	Thru-beam sensor	Thru-beam sensor compliant with railway standard EN50155	44
	FLT-8-HW-2800-CLS	Area scanner with background evaluation and counter function	Light scanner for counting people at doorways, with recognition of direction	46

Sensors for automatic doors, incl buses and trains

Sensors for industrial gates, fire protection light barriers


Sensors for elevators

Accessories

Date of issue 06/20/2007

Subject to reasonable modifications due to technical advances.

Copyright Pepperl+Fuchs, Printed in Germany




Features

- Opening impulse sensor
- Simple mounting
- Programmable
RMS-M
- Programmable, also with separate remote control
RMS-M-RC

Technical data



		RMS-M	RMS-M-RC
Function principle	Micro wave module	◆	◆
Detection speed	min. 0.1 m/s	◆	◆
Marking	CE	◆	◆
Setting angle	0 ... 40 ° in 5 ° steps	◆	◆
Sensing range	broad: 2000x 4500 mm (TxB) at 2200 mm mounting height and 30° tilt angle narrow: 4500x 2000 mm (TxB) at 2200 mm mounting height and 30° tilt angle	◆	◆
Operating frequency	24.05 ... 24.25 GHz K-Band	◆	◆
Operating mode	Radar motion sensor	◆	◆
Function display	LED red/green	◆	◆
Operating elements	Potentiometer and programming button for setting: Method of connection, dropout time, response time, Interference behavior	◆	◆
Operating elements	sensitivity adjuster	◆	◆
Operating elements	Programming via menu driven remote control possible (Accessories. to order separately)	◆	◆
Operating voltage	12 ... 36 V DC , 12 ... 28 V AC	◆	◆
No-load supply current	≤ 50 mA at 24 V DC	◆	◆
Power consumption	≤ 1 W	◆	◆
Switching type	active/passive	◆	◆
Signal output	relay	◆	◆
Switching voltage	max. 48 V AC / 48 V DC	◆	◆
Switching current	max. 0.5 A AC / 1 A DC	◆	◆
Switch power	max. 24 W / 60 VA	◆	◆
De-energized delay	0.2 ... 10 s adjustable (1 sec factory setting)	◆	◆
Standards	EN 60950:2000; EN 60335-1:1994; EN 301489-3 V1.4.1; EN 61000-6-1:2001, EN 61000-6-2:2001; EN 61000-6-3:2001; EN 61000-4:2001 ; EN 300440-2 V1.1.1	◆	◆
Standards 2	CETECOM	◆	◆
Ambient temperature	-20 ... 60 °C (253 ... 333 K)	◆	◆
Relative humidity	max. 90 % non-condensing	◆	◆
Mounting height	max. 4000 mm	◆	◆
Protection degree	IP54	◆	◆
Connection	terminal strip 4-pin	◆	◆
Housing	ABS, anthracite	◆	◆
Mass	120 g	◆	◆

Dimensions

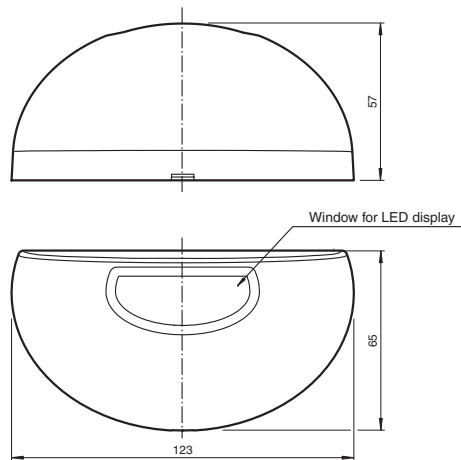

Electrical connection

Connection type



terminal compartment

Functional description

The motion detectors based on the latest 24 GHz technology with microprocessor control ensure high reliability under difficult operating conditions and enable target applications from the supermarket door to the garage gate. The core of the sensors are the planar modules with integrated patch aerials in robust metal design; behind the front-end there is the microprocessor controlled evaluation electronics. The 24 GHz frequency in the so-called K band has been reserved globally for this application area by CETECOM.


The motion detectors of series RMS with their intelligent functions can flexibly respond to the most different requirement profiles.

Sensors for automatic doors,
incl buses and trains

Sensors for industrial gates,
fire protection light barriers

Sensors for elevators

Accessories




Features

- Opening impulse sensor
- Direction detection
- "Turtle-Mode" for extremely slow motions
- Cross traffic suppression
- 16 preprogrammed basic settings
- Programmable, also with separate remote control RMS-D-RC

Technical data



		RMS-D	RMS-D-RC
Function principle	Micro wave module	◆	◆
Detection speed	min. 0.1 m/s	◆	◆
Marking	CE	◆	◆
Setting angle	0 ... 40 ° in 5 ° steps	◆	◆
Sensing range	3000x 2500 mm (TxB) at 2200 mm mounting height and 30° tilt angle	◆	◆
Operating frequency	24.05 ... 24.25 GHz K-Band	◆	◆
Operating mode	Radar motion sensor	◆	◆
Function display	LED red/green	◆	◆
Operating elements	DIP-switch for selection of operating modes : Direction detection , Cross traffic suppression , Turtle mode , Switching type	◆	◆
Operating elements	sensitivity adjuster	◆	◆
Operating elements	Adjuster for de-energised delay	◆	◆
Operating voltage	12 ... 36 V DC , 12 ... 28 V AC	◆	◆
No-load supply current	≤ 50 mA at 24 V DC	◆	◆
Power consumption	≤ 1 W	◆	◆
Switching type	active/passive	◆	◆
Signal output	relay, 1 N.O.	◆	◆
Switching voltage	max. 48 V AC / 48 V DC	◆	◆
Switching current	max. 0.5 A AC / 1 A DC	◆	◆
Switch power	max. 24 W / 60 VA	◆	◆
De-energized delay	0.2 ... 5 s adjustable (1 sec factory setting)	◆	◆
Standards	EN 60950:2000; EN 60335-1:1994; EN 301489-3 V1.4.1; EN 61000-6-1:2001, EN 61000-6-2:2001; EN 61000-6-3:2001; EN 61000-4:2001 ; EN 300440-2 V1.1.1	◆	◆
Standards 2	CETECOM	◆	◆
Ambient temperature	-20 ... 60 °C (253 ... 333 K)	◆	◆
Relative humidity	max. 90 % non-condensing	◆	◆
Mounting height	max. 4000 mm	◆	◆
Protection degree	IP54	◆	◆
Connection	plug-in screw terminals 4-pin , 8 m connecting cable included in delivery	◆	◆
Housing	ABS, anthracite	◆	◆
Mass	120 g	◆	◆

Dimensions

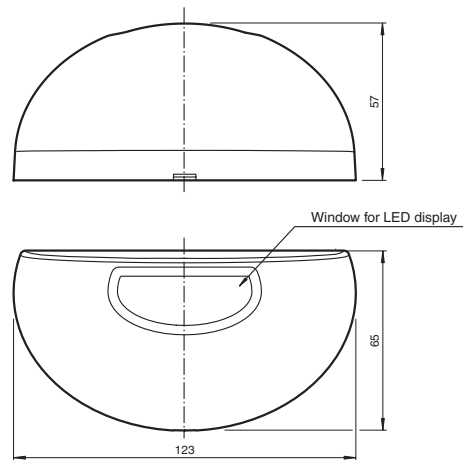

Electrical connection

Connection type



terminal compartment

Functional description

The motion detectors based on the latest 24 GHz technology with microprocessor control ensure high reliability under difficult operating conditions and enable target applications from the supermarket door to the garage gate. The core of the sensors are the planar modules with integrated patch aerials in robust metal design; behind the front-end there is the microprocessor controlled evaluation electronics. The 24 GHz frequency in the so-called K band has been reserved globally for this application area by CETECOM.

The motion detectors of series RMS with their intelligent functions like direction detection, suppression of crossing traffic and "turtle mode" can flexibly respond to the most different requirement profiles. The suppression of crossing traffic is particularly useful in narrow shopping streets. Here the system can be configured to only open the door when people move towards it whilst ignoring passing traffic. Two sensitivity stages can be set to take into account crossing traffic of different intensity. The use as revolving door sensors on the sides of the door hinges is also possible, because with suppression of crossing traffic enabled the closing door leaf does not cause false triggers.


Sensors for automatic doors,
incl buses and trains

Sensors for industrial gates,
fire protection light barriers

Sensors for elevators

Accessories

Date of issue: 06/19/2007



Features


- Opening impulse sensor
- Maximum safety to DIN 18650
- Motion detection/Static detection/Detection of slow-moving or stationary objects
- Closing edge safety on sliding doors with photoelectric sensors replacement
- Approved for escape and rescue routes in accordance with AutSchR (German directive governing automatic sliding doors for rescue routes)
RMS-S-FRW

Technical data

		RMS-S	RMS-S-FRW
Function principle	Micro wave module	◆	◆
Detection speed	min. 0.1 m/s	◆	◆
Marking	CE	◆	◆
Setting angle	0 ... 40 ° in 5 ° steps	◆	◆
Operating frequency	24.05 ... 24.25 GHz K-Band	◆	◆
Operating mode	Radar motion sensor and presence sensor	◆	◆
Function display	LED red/green	◆	◆
Operating elements	Programming push-button for selection of operating modes : Direction detection , Cross traffic suppression , Turtle mode , Switching type	◆	◆
Operating voltage	12 ... 36 V DC	◆	◆
No-load supply current	< 200 mA at 24 V DC	◆	◆
Power consumption	< 3 W	◆	◆
Test input	programmable with U _B + or 0 V	◆	◆
Switching type	active/passive	◆	◆
Signal output	2 relay outputs for dynamic output and transistor output pnp/npn for static output , combination of static and dynamic output can be programmed	◆	◆
	2 relay outputs for dynamic output and transistor output pnp/npn or frequency output or voltage output for static output , combination of static and dynamic output can be programmed		◆
Output type	relay output	◆	◆
Switching voltage	48 V DC / AC	◆	◆
Switching current	max. 1 A DC; 0.5 A AC	◆	◆
	max. 1 A DC; 0.5 A AC		◆
Switch power	30 W DC / 60 VA AC	◆	◆
Output type	voltage output		◆
Output rated operating current	max. 10 mA at 3.2 V DC		◆
Open loop voltage	max. ≤ 10 V DC		◆
Output type	Frequency output		◆
Output rated operating current	max. 50 mA		◆
	≤ 2 V DC		◆
Pulse/Pause ratio	1:1 , deviation max. 10 %		◆
Output frequency	100 Hz		◆
Standards	EN 60950:2000; EN 60335-1:1994; EN 301489-3 V1.4.1; EN 61000-6-1:2001, EN 61000-6-2:2001; EN 61000-6-3:2001; EN 61000-4:2001 ; EN 300440-2 V1.1.1	◆	◆
Standards 2	CETECOM	◆	◆
Standards 3	DIN 18650	◆	◆
Standards 4	TÜV	◆	◆
Ambient temperature	-20 ... 60 °C (253 ... 333 K)	◆	◆
Relative humidity	max. 90 % non-condensing	◆	◆
Mounting height	max. 3000 mm	◆	◆
Protection degree	IP54	◆	◆
Connection	plug strip 8-pin with cable	◆	◆
Housing	ABS, anthracite	◆	◆
Mass	140 g	◆	◆

Date of issue: 06/19/2007

Dimensions

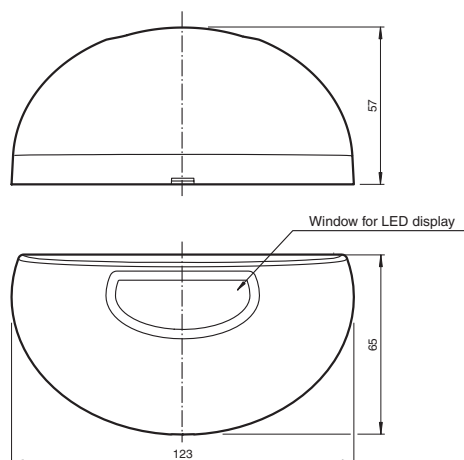


Electrical connection

Connection type

Pinning according 8-pin plug strip (Relay output)

Pin	Signal	Colour
1	+12 ... 36 V DC	white
2	GND	brown
3	Relais 1	green
4	Relais 1	yellow
5	Relais 2	grey
6	Relais 2	pink
7	Testinput	blu
8	Presence output	red



terminal compartment

Pinning according 8-pin plug strip (Voltage output)

Pin	Signal	Colour
1	+12 ... 36 V DC	white
2	GND	brown
3	Uout +	green
4	Uout -	yellow
5	NC	grey
6	NC	pink
7	Testinput	blu
8	Presence output	red

Pinning according 8-pin plug strip (Frequency output)

Pin	Signal	Colour
1	+12 ... 36 V DC	white
2	GND	brown
3	Fout +	green
4	Uin -	yellow
5	Uin +	grey
6	NC	pink
7	Testinput	blu
8	Presence output	red

Functional description


The radar sensors of series RMS-S provide a maximum of reliability and safety when monitoring sliding doors. These are radar motion sensors of the latest generation opening up numerous application options due to their proven principle of operation and their microprocessor control. This is also contributed to by intelligent functions like direction detection, suppression of crossing traffic and "turtle mode".

Normally detection via radar requires the target objects to move. Unlike common radar motion detectors the devices of series RMS-S do, however, have several detection modes (multiple detection). An interesting highlight is here the static function which makes the use of light barriers obsolete. The same technology is used both for dynamic and static detection of people and objects. In this the RMS-S sensors have the optimum safety functions for sliding doors.

In normal motion detection for opening pulse generation the sensor registers all movement at a distance of at least 2.5 cm at a minimum speed of 0.1 m/s. The device can evaluate the direction of movement and thus be programmed to e.g. only open the door when it is approached, if the movement is away from it, or in any direction of movement.

Whilst the dynamic detection is enabled with the door closed, the system switches to static detection as soon as the door is opened. In this mode the sensor captures the static objects within and in front of the closing range of the door; the environment will be automatically learned adaptively. This permits the complete monitoring of a defined safety area. With these functions a single sensor is sufficient for opening pulse generation and the safety monitoring for personal protection.

In addition, the device has approval for escape and rescue routes.



Features


- Closing safety monitoring over the complete door width
- Auto-TEACH function
- Maximum safety due to a minimum distance of the light beam
- Automatic long-time drift compensation
- Open time: adjustable time for automatic adaptation to a new background
- Small size
- Mounting bracket included in delivery
- Certification in accordance with rail and automobile standards
PROSCAN-T/32/76a

Technical data

		PROSCAN/32	PROSCAN/38a	PROSCAN-T/32/76a
Detection field	total field: 2300 mm x 80 mm left/right field: 1150 mm x 80 mm center field: 1000 mm x 80 mm	◆	◆	◆
Light source	12 x IRED	◆	◆	◆
Teach-in time	approx. 4 s	◆	◆	◆
Marking	CE	◆	◆	◆
Open Time	3 min/10 s, programmable	◆	◆	
	3 s / 10 s, programmable			◆
Light type	infrared, modulated light	◆	◆	◆
Function display	LED red: on for object detection, flashes during teaching phase	◆	◆	◆
Operating elements	Programmable switch for switching type, open time, detection field	◆	◆	◆
Operating voltage	12 ... 38 V DC	◆		◆
	12 ... 38 V DC / 12 ... 28 V AC		◆	
Ripple	10 %	◆		◆
No-load supply current	100 mA	◆	◆	◆
Power consumption	3 VA		◆	
Test input	emitter deactivation with +Ub	◆		◆
Switching type	Output active / inactive programmable	◆	◆	◆
Signal output	Relay, 1 alternator		◆	
	1 pnp, short-circuit proof, protected from reverse polarity, open collector	◆		◆
Switching voltage	38 V DC	◆		◆
	48 V DC		◆	
Switching current	1 A at 24 V DC		◆	
	200 mA	◆		◆
Response time	< 50 ms	◆	◆	◆
De-energized delay	200 ms	◆	◆	◆
Standards	EN 60947-5-2	◆	◆	◆
Standards 2	EN 50155			◆
	EN 61000-6-2 without EN 61000-4-5, EN 61000-4-11	◆	◆	
Standards 3	EN 50121-3-2			◆
	EN 61000-6-3	◆	◆	
Standards 4	E1 RL72/245/EWG (RL95/54/EG)			◆
Standards 5	2006/28/EG			◆
Ambient temperature	-20 ... 60 °C (253 ... 333 K)	◆	◆	◆
Storage temperature	-20 ... 70 °C (253 ... 343 K)	◆	◆	◆
Mounting height	1000 ... 2500 mm	◆	◆	◆
Protection degree	IP52	◆	◆	◆
Connection	fixed cable 3 m, halogen-free, with ferrite core			◆
	fixed cable 5 m	◆	◆	
Housing	ABS	◆	◆	◆
Optical face	PMMA	◆	◆	◆
Mass	approx. 100 g	◆	◆	◆


Date of issue: 06/19/2007

Dimensions

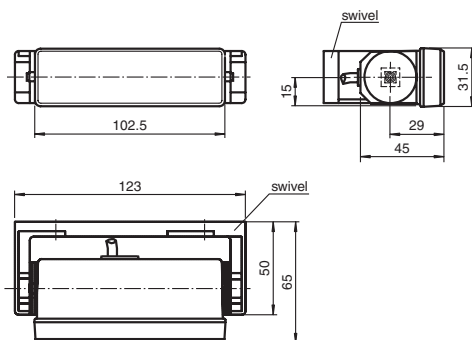

Mounting dimensions for swivel

Mounting dimensions with mounting bracket set AIR30


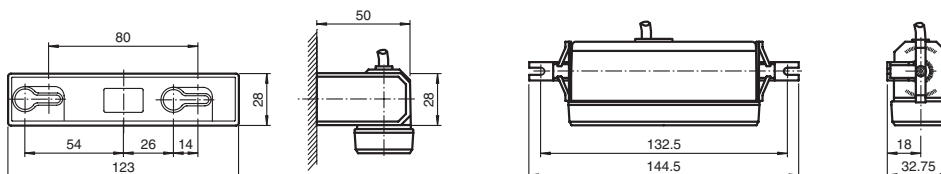


Electrical connection

Connection type

Option /38a



Option /32



fixed cable

Diagrams


Timing diagram Proscan

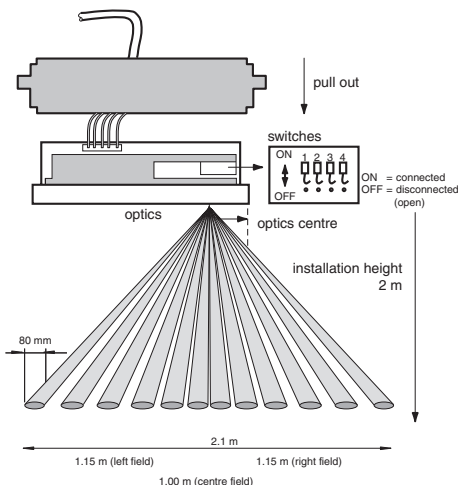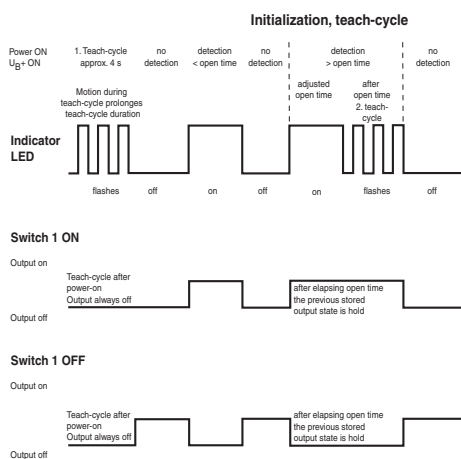

Date of issue: 06/19/2007

Subject to reasonable modifications due to technical advances.

Copyright Pepperl+Fuchs, Printed in Germany



Features

- Vestibule and closing edge monitoring for automatic sliding doors
- Closing safety monitoring over the complete door width
- Open time: adjustable time for automatic adaptation to a new background
- Test input
- Opening impulse sensor
- 20 programmable monitoring fields
- Test body detection according to EN12650

Technical data


Detection field	programmable , total field: 2200 mm x 1500 mm (WxD) at 2200 mm installation height
Light source	10 IRED 950 nm
Marking	CE, UL
Setting angle	-6 ... 9 ° at 2200 mm installation height
Open Time	programmable
Operating mode	Energetic diffuse mode sensor
Light type	infrared, modulated light
Function display	LED red: on for object detection, flashes during teaching phase
Operating elements	Programmable switch for switching type, open time, detection field
Parameterisation display	5 LED, red
Operating voltage	12 ... 31 V DC / 12 ... 30 V AC
No-load supply current	≤ 100 mA
Power consumption	3.5 VA
Test input	active with +U _B
Switching type	Light/dark ON selectable programmable
Signal output	Relay, 1 alternator
Switching voltage	AC : 30 V ; DC : 32 V
Switching current	300 mA
Switch power	55 VA
Response time	≤ 110 ms
Standards	EN 60947-5-2
Standards 2	EN 61000-6-1 ,
Standards 3	EN 61000-6-2 without EN 61000-4-5, EN 61000-4-11 ,
Standards 4	EN 61000-6-3 , EN 61000-6-4
Standards 5	ANSI 156,10 (as activation sensor)
Ambient temperature	-20 ... 60 °C (253 ... 333 K)
Storage temperature	-30 ... 75 °C (243 ... 348 K)
Mounting height	max. 2200 mm
Protection degree	IP54 (in the mounted state)
Connection	terminal strip 8-pin 1 ... 1.5 mm ²
Housing	PC
Optical face	PC
Covering	ASA , black
Mass	195 g

FLT-D/38a sw




Date of issue: 06/19/2007


Dimensions

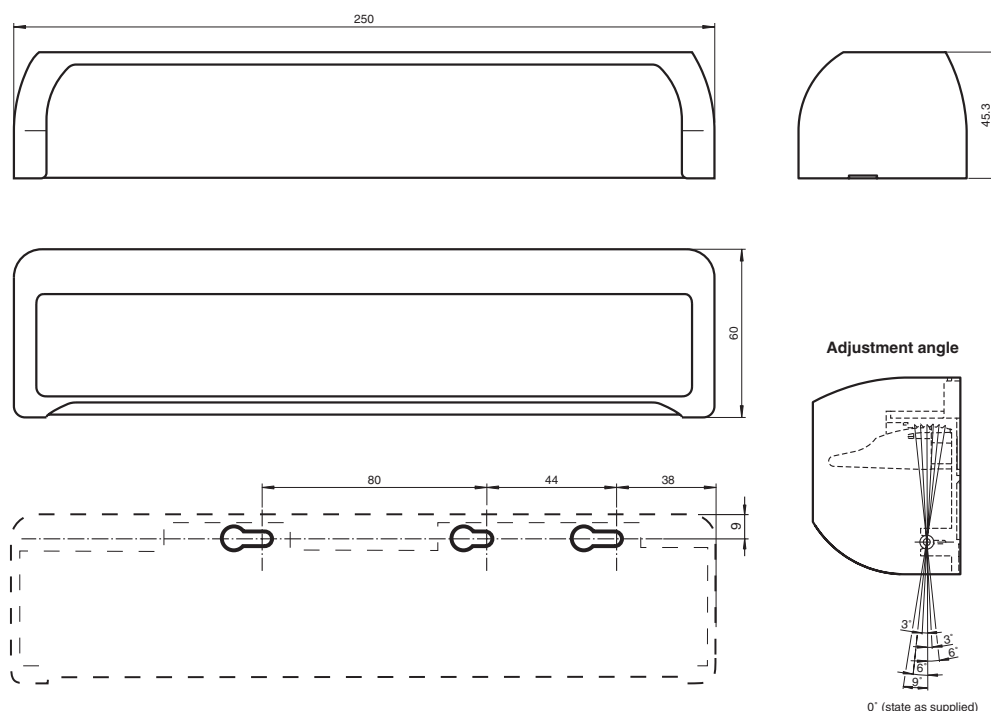

Electrical connection

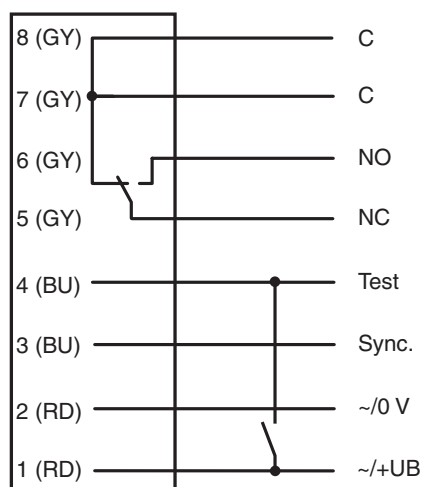

Connection type



terminal compartment

Description


The FLT-D has special features that make it suitable for use in door control systems and safety systems for closing edges. The FLT-D is an energetic area scanner. Movable objects are detected in a defined field by an optical transmitter/receiver section and a corresponding signal is generated to the door control system by an analyser unit. Immediately after the device is turned on, the reflected radiation characteristics of the environment located in the detection field are programmed as a reference. This allows for error-free monitoring even under changing ambient conditions such as rain, snow or dirt. If the environment is permanently changed, reprogramming will occur after a defined period of time. This eliminates interfering factors, for example an object placed in the entrance area of a door. The FLT-D is delivered from the factory with standard programming. If necessary, the field sizes, programming time, sensitivity and type of switching can be changed or reprogrammed. The entire functionality of the FLT-D can be checked using its test input.

Sensors for automatic doors,
incl buses and trainsSensors for industrial gates,
fire protection light barriers

Sensors for elevators

Accessories

Date of issue: 06/19/2007



Features


- Small dimensions
- Precise range adjustment possible using 12 Fresnel lenses
- Zoom function for infinite adjustment of the detection-angle size
- Switches at a temperature difference of $\pm 2^\circ\text{C}$ relative to the background
- Mounting bracket included in delivery

Technical data


		PIR20/31 sw
Effective detection range	max. 12 m (frontal)	◆
Detection field	max. 1800 mm x 2600 mm for a mounting height of 2500 mm	◆
Approvals	CE	◆
Operating display	LED green	◆
Function display	LED red: illuminates upon detection	◆
Operating elements	zoom screw for detection field adjustment , sensitivity adjuster , changeover switch, active/passive	◆
Operating voltage	12 ... 24 V AC / 12 ... 30 V DC	◆
No-load supply current	approx. 15 mA	◆
Power consumption	approx. 350 mW at 24 V	◆
Switching type	Output active / inactive , programmable	◆
Signal output	Relay, 1 alternator	◆
Switching voltage	48 V AC/DC	◆
Switching current	1 A	◆
Switch power	max. 30 W / 60 VA	◆
De-energized delay	0.5 s (fixed setting)	◆
Standards	89/336 EWG	◆
Ambient temperature	-20 ... 60 °C (253 ... 333 K)	◆
Mounting height	recommended: max. 3.5 m	◆
Protection degree	IP52	◆
Connection	screw terminals, removable	◆
Housing	ABS, black	◆
Optical face	Plastic lens	◆
Mass	approx. 40 g	◆

Dimensions

Mounting dimensions with mounting bracket

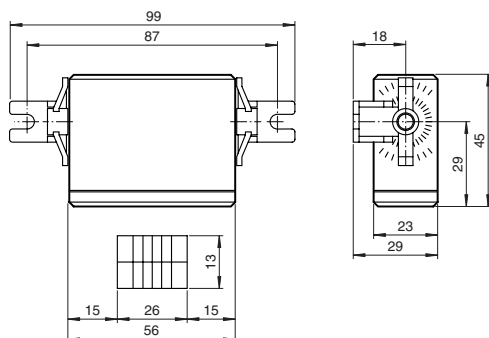



Mounting dimensions for swivel

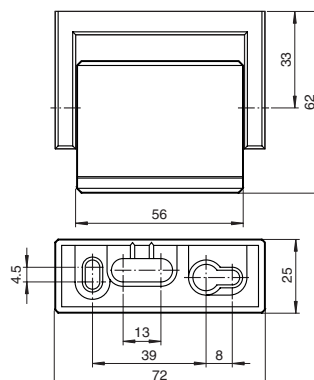

Electrical connection

Connection type


Option /31




terminal compartment

Diagrams

Field dimension max.

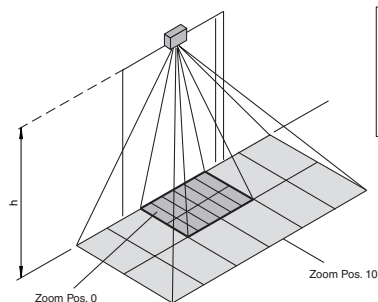


Field dimension min.

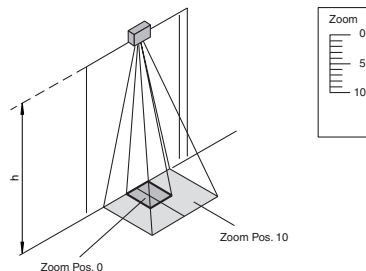

Date of issue: 06/19/2007

Subject to reasonable modifications due to technical advances.

Copyright Pepperl+Fuchs, Printed in Germany




Features

- Moving presence sensor for swing doors
- Configurable for a wide range of door leaf widths
- Certified as cat. 2 in accordance with DIN 18650
- Test piece detection
- Modular construction with master/slave
- Reversible closing safety
- Mechanical adjustable detection range
- Background evaluation

Technical data



		TopScan-S-M/L310	TopScan-S-M2S/L750	TopScan-S-M3S/L900	TopScan-S-M5S/L1400
Detection range min.	0 ... 1500 mm	◆	◆	◆	◆
Detection range max.	0 ... 2500 mm	◆	◆	◆	◆
Light source	IREDD	◆	◆	◆	◆
Black/White difference (6 %/90 %)	< 2 % at 2000 mm sensor range	◆	◆	◆	◆
Marking	CE	◆	◆	◆	◆
Number of beams	(number of built-in sensor modules AIR 16)	1	3	4	6
Operating mode	Background evaluation	◆	◆	◆	◆
Diameter of the light spot	3 cm x 8 cm at 2000 mm sensor range	◆	◆	◆	◆
Function display	LED red/green	◆	◆	◆	◆
Operating elements	sensing range adjuster	◆	◆	◆	◆
Operating voltage	24 V DC +/- 20 %	◆	◆	◆	◆
No-load supply current		65 mA	175 mA	230 mA	340 mA
Test input	active at U = 11 V DC at 30 V DC inactive at U = -3 V DC at 5 V DC	◆	◆	◆	◆
Switching type	Relay de-energized at object inside the scanning range	◆	◆	◆	◆
Signal output	Relay, 1 alternator	◆	◆	◆	◆
Switching voltage	≤ 250 V AC/DC	◆	◆	◆	◆
Switching current	≤ 1 A	◆	◆	◆	◆
Response time	≤ 70 ms	◆	◆	◆	◆
Standards	EN 60947-5-2	◆	◆	◆	◆
Standards 2	EN 61000-6-2 without EN 61000-4-5, EN 61000-4-11	◆	◆	◆	◆
Standards 3	EN 61000-6-3	◆	◆	◆	◆
Standards 4	DIN 18650	◆	◆	◆	◆
Standards 5	EN 12978	◆	◆	◆	◆
Ambient temperature	-10 ... 50 °C (263 ... 323 K)	◆	◆	◆	◆
Length of housing L		310 mm	750 mm	900 mm	1400 mm
Mounting height	max. 2500 mm	◆	◆	◆	◆
Protection degree	IP52 , IP54 Optional (with special seal)	◆	◆	◆	◆
Connection	screw terminals	◆	◆	◆	◆
Housing	aluminium / ABS	◆	◆	◆	◆
Optical face	PMMA	◆	◆	◆	◆

Dimensions

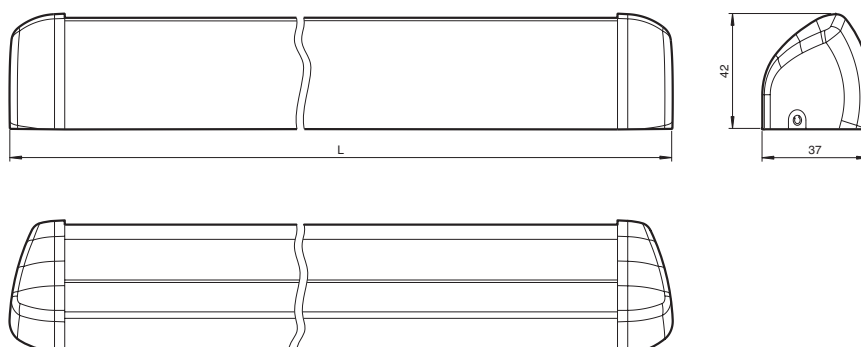

Electrical connection

Connection type

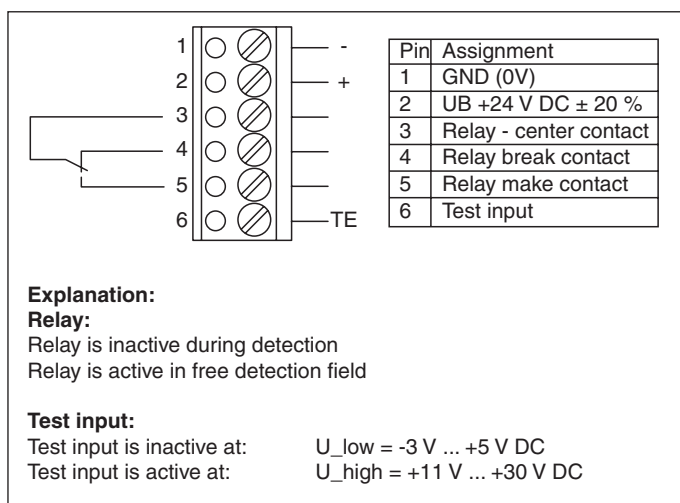

Functional description


The TopScan-S is an active infrared scanner.

TopScan-S operates on the active infrared method with evaluation in the background, and enables traveling installation on door wings apart from static operation. Thus, it is ideal for securing the closing edges of automatic revolving doors. In case of revolving doors, a sensor mounted to the door wing offer the best possible protection as it always monitors the direct vicinity of the respectively present door wing position.

Arrangement

The TopScan-S consists of an aluminum profile with front cover which can be adapted as required to the various door widths of up to 1,400 mm. The profile is fitted with sensor modules, and is arranged modularly according to the master/slave principle. The minimum arrangement with sensor modules in keeping with German standard DIN 18650 consists of a master module AIR16-S master and a slave module AIR16-S slave and provides a twin-beam protection. For a 900 mm door, for example, a master module and three slave units are required whilst a seven-beam system with master and six slaves covers a maximum variant of 1,400 mm.

The TopScan-S system can either be ordered in the requested configuration or it can be flexibly plugged together as required for the necessary expansion stage.




Features

- **Sensor module for configurable TopScan-S**
- **Certified as cat. 2 in accordance with DIN 18650**
- **Slave module**
AIR 16-S SLAVE
- **Master module**
AIR 16-S MASTER

Technical data


		AIR 16-S MASTER	AIR 16-S SLAVE
Detection range min.	0 ... 1500 mm	◆	◆
Detection range max.	0 ... 2500 mm	◆	◆
Light source	IREDD	◆	◆
Black/White difference (6 %/90 %)	< 2 % at 2000 mm sensor range	◆	◆
Marking	CE	◆	◆
Operating mode	Background evaluation	◆	◆
Diameter of the light spot	3 cm x 8 cm at 2000 mm sensor range	◆	◆
Function display	LED red/green	◆	◆
Operating elements	sensing range adjuster	◆	◆
Operating voltage	24 V DC +/- 20 %	◆	◆
No-load supply current	55 mA		◆
	65 mA	◆	
Test input	active at U = 11 V DC at 30 V DC inactive at U = -3 V DC at 5 V DC	◆	
Switching type	Relay de-energized at object inside the scanning range	◆	
Signal output	Relay, 1 alternator	◆	
Switching voltage	≤ 250 V AC/DC	◆	
Switching current	≤ 1 A	◆	
Response time	≤ 70 ms	◆	◆
Standards	EN 60947-5-2	◆	◆
Standards 2	EN 61000-6-2 without EN 61000-4-5, EN 61000-4-11	◆	◆
Standards 3	EN 61000-6-3	◆	◆
Standards 4	DIN 18650	◆	◆
Standards 5	EN 12978	◆	◆
Ambient temperature	-10 ... 50 °C (263 ... 323 K)	◆	◆
Mounting height	max. 2500 mm	◆	◆

Dimensions

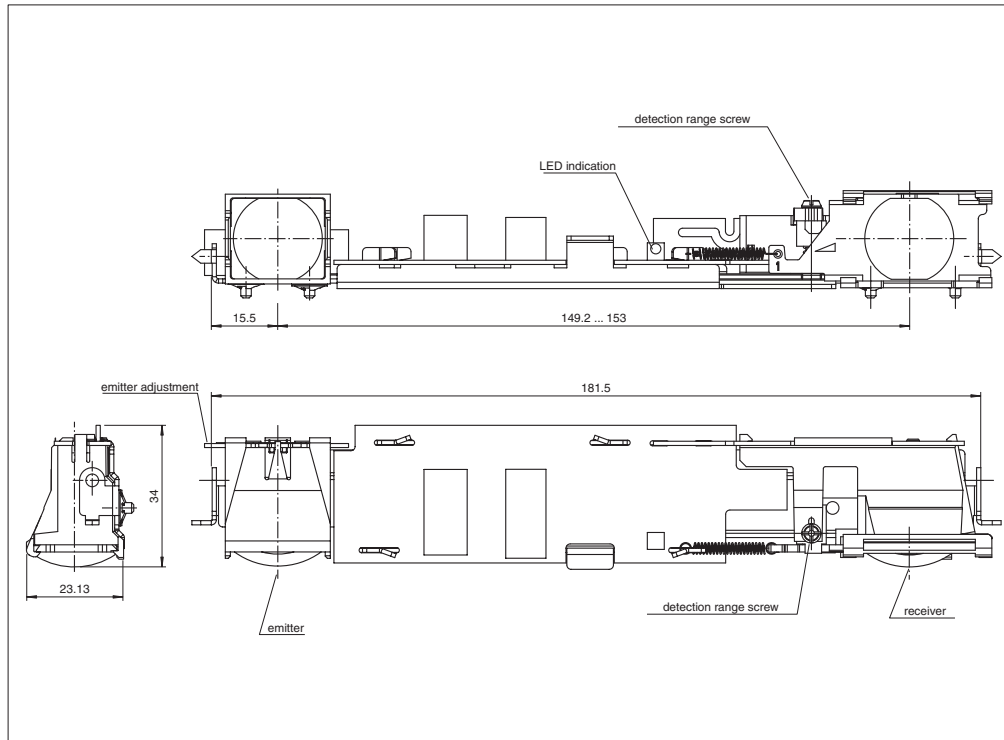

Electrical connection

Connection type



Pin	Assignment
1	GND (0V)
2	UB +24 V DC $\pm$ 20 %
3	Relay - center contact
4	Relay break contact
5	Relay make contact
6	Test input


Explanation:

Relay:

Relay is inactive during detection
Relay is active in free detection field

Test input:


Test input is inactive at: $U_{low} = -3 \text{ V} \dots +5 \text{ V DC}$
Test input is active at: $U_{high} = +11 \text{ V} \dots +30 \text{ V DC}$



Option 116
terminal compartment

Description


Design of the device

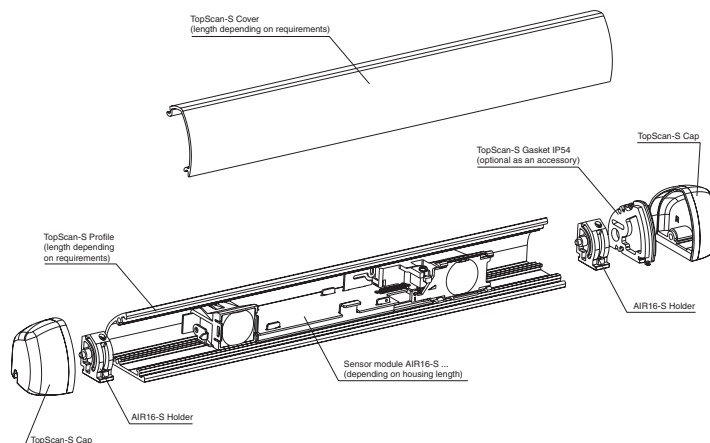

Date of issue: 06/19/2007

Subject to reasonable modifications due to technical advances.

Copyright Pepperl+Fuchs, Printed in Germany



Features


- Configurable scanner in an aluminium housing, with 1 beam
- Mechanical adjustable detection range
- Reversible closing safety
- Detection in wide passageways
- Selectable background suppression and evaluation
- Fast and simple replacement of system parts due to an innovative latching mechanism

Technical data

		TOPSCAN2-8-HS-2500-1/L 330/38a	TOPSCAN2-8-HS-2500-1/L 750/38a	TOPSCAN2-8-HS-2500-1/L 900/38a	TOPSCAN2-8-HS-2500-1/L 1000/38a
Detection range min.	0 ... 1500 mm by background evaluation, 500 ... 1500 mm by background suppression	◆	◆	◆	◆
Detection range max.	0 ... 2500 mm with background evaluation, 500 ... 2500 mm with background suppression	◆	◆	◆	◆
Light source	IREL	◆	◆	◆	◆
Black/White difference (6 %/90 %)	< 20 % at 2000 mm sensor range	◆	◆	◆	◆
Marking	CE	◆	◆	◆	◆
Number of beams	1 (number of built-in sensor modules AIR 16)	◆	◆	◆	◆
Operating mode	switching between background suppression/evaluation	◆	◆	◆	◆
Diameter of the light spot	75 x 75 mm by sensing range 2000 mm	◆	◆	◆	◆
Function display	LED red	◆	◆	◆	◆
Operating elements	Detection range adjuster, light-dark switch, changeover switch for mode of operation	◆	◆	◆	◆
Operating voltage	17 ... 30 V DC , 18 ... 28 V AC	◆	◆	◆	◆
No-load supply current	< 100 mA	◆	◆	◆	◆
Test input	emitter deactivation with U = 17 ... 30 V DC only in background evaluation mode of operation	◆	◆	◆	◆
Switching type	Light/dark switch	◆	◆	◆	◆
Signal output	Relay, 1 alternator	◆	◆	◆	◆
Switching voltage	max. 24 V DC , 48 V AC	◆	◆	◆	◆
Switching current	≤ 1 A	◆	◆	◆	◆
Switch power	24 W / 55 VA	◆	◆	◆	◆
Response time	30 ms , 2 s after test	◆	◆	◆	◆
Standards	EN 60947-5-2	◆	◆	◆	◆
Standards 2	EN 61000-6-2 without EN 61000-4-5, EN 61000-4-11	◆	◆	◆	◆
Standards 3	EN 61000-6-3	◆	◆	◆	◆
Ambient temperature	-20 ... 60 °C (253 ... 333 K)	◆	◆	◆	◆
Length of housing L		330 mm	750 mm	900 mm	1000 mm
Mounting height	max. 2500	◆	◆	◆	◆
Protection degree	IP52	◆	◆	◆	◆
Connection	screw terminals	◆	◆	◆	◆
Housing	aluminium / ABS	◆	◆	◆	◆
Optical face	PMMA	◆	◆	◆	◆
Mass	approx. 200 g	◆			
	approx. 400 g		◆		
	approx. 500 g			◆	◆



Date of issue: 06/19/2007

Dimensions

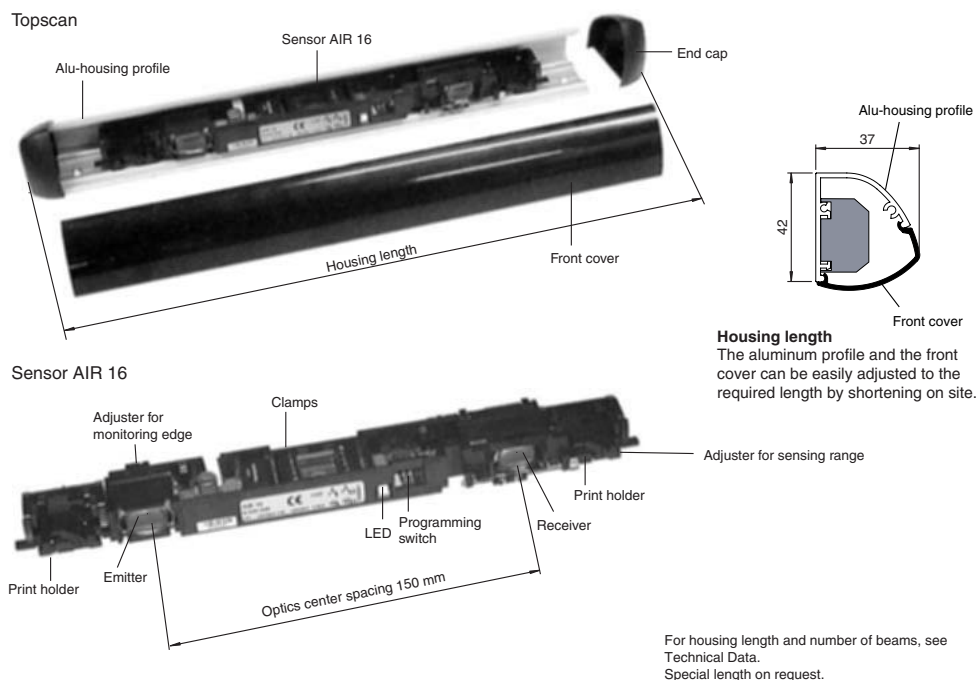


Electrical connection


Connection type

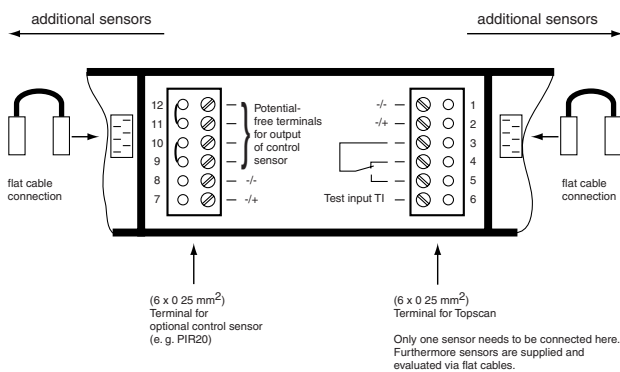

terminal compartment

Diagrams

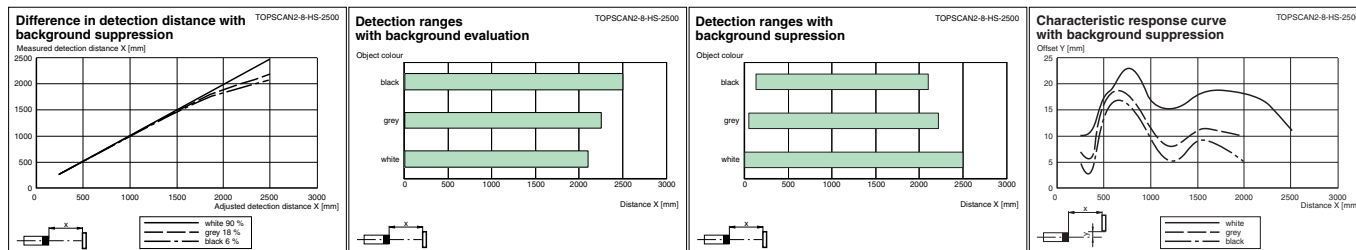



Features


- Mechanical adjustable detection range
- Reversible closing safety
- Detection in wide passageways
- Selectable background suppression and evaluation
- Fast and simple replacement of system parts due to an innovative latching mechanism
- Configurable scanner in an aluminium housing, with 3 beams
TOPSCAN2-8-HS-2500-3/L900/38a
TOPSCAN2-8-HS-2500-3/L1200/38a
TOPSCAN2-8-HS-2500-3/L1350/38a
- Configurable scanner in an aluminium housing, with 2 beams
TOPSCAN2-8-HS-2500-2/L750/38a

Technical data

		TOPSCAN2-8-HS-2500-2/L750/38a	TOPSCAN2-8-HS-2500-3/L900/38a	TOPSCAN2-8-HS-2500-3/L1200/38a	TOPSCAN2-8-HS-2500-3/L1350/38a
Detection range min.	0 ... 1500 mm by background evaluation, 500 ... 1500 mm by background suppression	◆	◆	◆	◆
Detection range max.	0 ... 2500 mm with background evaluation, 500 ... 2500 mm with background suppression	◆	◆	◆	◆
Light source	IREDD	◆	◆	◆	◆
Black/White difference (6 %/90 %)	< 20 % at 2000 mm sensor range	◆	◆	◆	◆
Marking	CE	◆	◆	◆	◆
Number of beams	2 (number of built-in sensor modules AIR 16)	◆			
	3 (number of built-in sensor modules AIR 16)		◆	◆	◆
Operating mode	switching between background suppression/evaluation	◆	◆	◆	◆
Diameter of the light spot	75 x 75 mm by sensing range 2000 mm	◆	◆	◆	◆
Function display	LED red	◆	◆	◆	◆
Operating elements	Detection range adjuster, light-dark switch, changeover switch for mode of operation	◆	◆	◆	◆
Operating voltage	17 ... 30 V DC , 18 ... 28 V AC	◆	◆	◆	◆
No-load supply current	< 100 mA	◆	◆	◆	◆
Test input	emitter deactivation with U = 17 ... 30 V DC only in background evaluation mode of operation	◆	◆	◆	◆
Switching type	Light/dark switch	◆	◆	◆	◆
Signal output	Relay, 1 alternator	◆	◆	◆	◆
Switching voltage	max. 24 V DC , 48 V AC	◆	◆	◆	◆
Switching current	≤ 1 A	◆	◆	◆	◆
Switch power	24 W / 55 VA	◆	◆	◆	◆
Response time	30 ms , 2 s after test	◆	◆	◆	◆
Standards	EN 60947-5-2	◆	◆	◆	◆
Standards 2	EN 61000-6-2 without EN 61000-4-5, EN 61000-4-11	◆	◆	◆	◆
Standards 3	EN 61000-6-3	◆	◆	◆	◆
Ambient temperature	-20 ... 60 °C (253 ... 333 K)	◆	◆	◆	◆
Length of housing L		750 mm	900 mm	1200 mm	1350 mm
Mounting height	max. 2500	◆	◆	◆	◆
Protection degree	IP52	◆	◆	◆	◆
Connection	screw terminals	◆	◆	◆	◆
Housing	aluminium / ABS	◆	◆	◆	◆
Optical face	PMMA	◆	◆	◆	◆
Mass	approx. 500 g	◆			
	approx. 650 g		◆	◆	◆



Date of issue: 06/19/2007

Dimensions

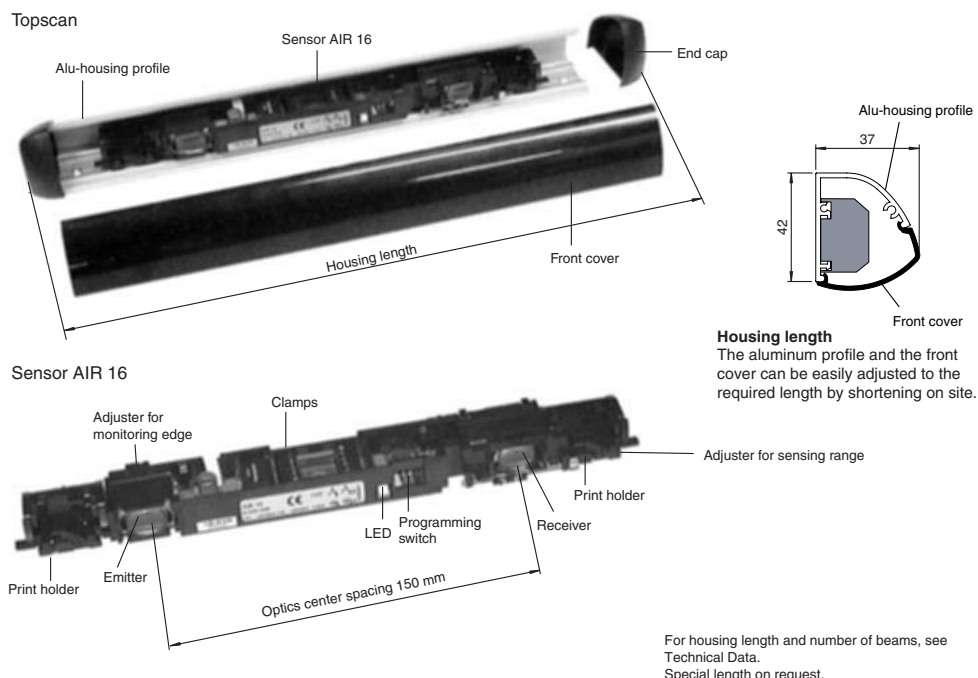


Electrical connection


Connection type

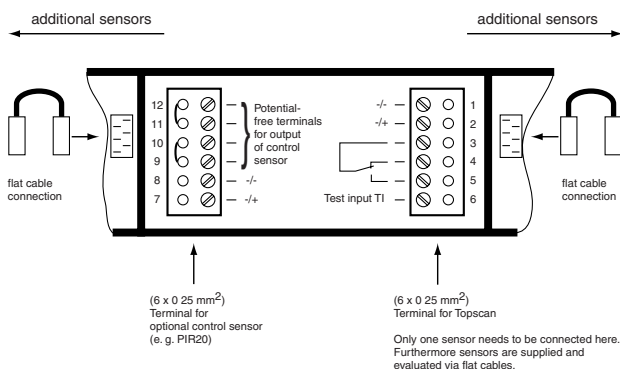

terminal compartment

Diagrams

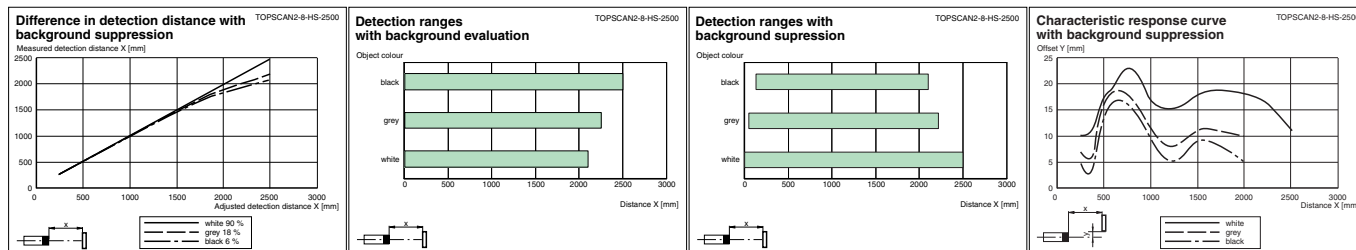



Features


- Closing edge safety on revolving doors and carousel doors
- Mechanical adjustable detection range
- Light/dark switch
- Mounting bracket included in delivery
- **Background suppression**
AIR30-8-H-2500/32/76a
AIR30-8-H-2500/38a
- **Background evaluation**
AIR30-8-HW-2500/32/76a
AIR30-8-HW-2500/38a/76a

Technical data


		AIR30-8-HW-2500/32/76a	AIR30-8-HW-2500/38a/76a	AIR30-8-H-2500/32/76a	AIR30-8-H-2500/38a
Detection range					
Detection range min.	0 ... 1000 mm	◆	◆		
	100 ... 1000 mm			◆	◆
Detection range max.	0 ... 2500 mm	◆	◆		
	100 ... 2500 mm			◆	◆
Light source	IREDD	◆	◆	◆	◆
Black/White difference (6 %/90 %)	≤ 400 mm at a distance of 2000 mm	◆	◆	◆	◆
Approvals	CE	◆	◆	◆	◆
Operating mode	Background suppression			◆	◆
	Background evaluation	◆	◆		
Light type	infrared, modulated light	◆	◆	◆	◆
Diameter of the light spot	50 mm at 2000 mm sensor range	◆	◆	◆	◆
Angle of divergence	approx. 1.4 °	◆	◆	◆	◆
Function display	LED red: lights up, when output is active	◆	◆	◆	◆
Operating elements	Sensing range adjuster, light/dark switch	◆	◆	◆	◆
Operating voltage	10 ... 30 V DC	◆		◆	
	10 ... 48 V DC / 11 ... 38 V AC		◆		◆
No-load supply current	100 mA	◆	◆	◆	◆
Test input	emitter deactivation at +U _B	◆	◆	◆	◆
Switching type	light/dark ON, switchable	◆	◆	◆	◆
Signal output	relay, 1 N.O.		◆		◆
	1 PNP output, short-circuit proof, protected from reverse polarity, open collector	◆		◆	
Switching voltage	≤ 240 V AC / 24 V DC		◆		◆
	30 V DC	◆		◆	
Switching current	≤ 200 mA	◆		◆	
	≤ 200 mA AC / 1 A DC		◆		◆
Response time	50 ms	◆	◆	◆	◆
De-energized delay	approx. 200 ms	◆	◆	◆	◆
Standards	EN 60947-5-2 EN 61000-6-2 without EN 61000-4-5, EN 61000-4-11 EN 61000-6-3	◆	◆	◆	◆
Ambient temperature	-20 ... 60 °C (253 ... 333 K)	◆	◆	◆	◆
Storage temperature	-20 ... 75 °C (253 ... 348 K)	◆	◆	◆	◆
Protection degree	IP54	◆	◆	◆	◆
Connection	fixed cable 5 m	◆	◆	◆	◆
Housing	Luran	◆	◆	◆	◆
Optical face	plastic	◆	◆	◆	◆
Mass	40 g	◆		◆	
	50 g		◆		◆

Date of issue: 06/19/2007


Dimensions

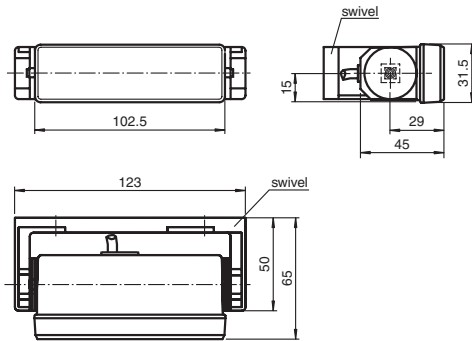

Mounting dimensions for swivel

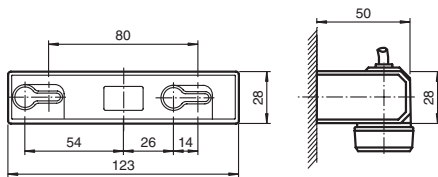


Mounting dimensions with mounting bracket set AIR30

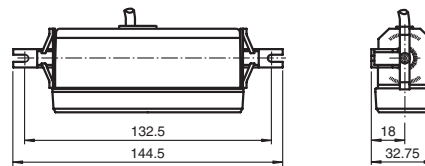


Electrical connection

Option /32/76a




Option -H.../38a




Note:
Test input can not
be used, if sensor
is supplied with
AC voltage!

Option -HW.../38a/76a






Note:
Test input can not
be used, if sensor
is supplied with
AC voltage!

Connection type



fixed cable


Diagrams

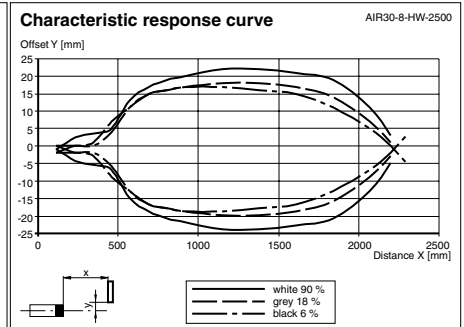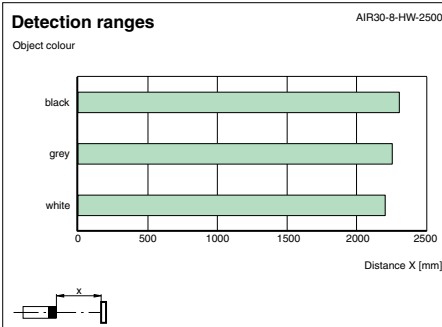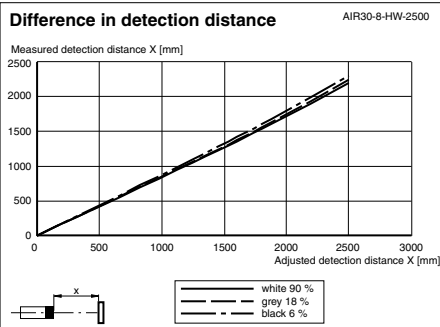

Date of issue: 06/19/2007

Subject to reasonable modifications due to technical advances.

Copyright Pepperl+Fuchs, Printed in Germany



Features

- Double beam version Master/Slave (2x emitter, 2x receiver)
- Dual-trace closing edge safety on doors
- Ideal for installation in door profiles
- Small, compact design
- Test input


Technical data

Effective detection range	0 ... 5 m	◆
Threshold detection range	7 m	◆
Light source	IRET, 880 nm	◆
Approvals	CE	◆
Light type	infrared, modulated light	◆
Angle of divergence	emitter +/- 8 °, receiver +/- 10 °	◆
Optical face	lateral	◆
Ambient light limit	40000 Lux	◆
Operating voltage	11 ... 30 V DC	◆
No-load supply current	≤ 35 mA per device	◆
Test input	emitter deactivation at 0 V	◆
Switching type	light ON	◆
Signal output	1 PNP output, short-circuit proof, protected from reverse polarity, open collector	◆
Switching voltage	max. 30 V DC	◆
Switching current	max. 0.1 A	◆
Switching frequency	50 Hz	◆
Response time	10 ms	◆
Standards	EN 60947-5-2	◆
Standards 2	EN 61000-6-2	◆
Standards 3	EN 61000-6-3	◆
Ambient temperature	-20 ... 60 °C (253 ... 333 K)	◆
Storage temperature	-20 ... 75 °C (253 ... 348 K)	◆
Relative humidity	90 %, non-condensing	◆
Protection degree	IP65	◆
Connection	Plastic connector diameter 6.5 mm; 4-pin	◆
Housing	Transmitter: PMMA black Receiver: PMMA red	◆
Optical face	Plastic pane	◆
Mass	555 g	◆

ML29-2P/25/103/143



Date of issue: 06/19/2007

Dimensions

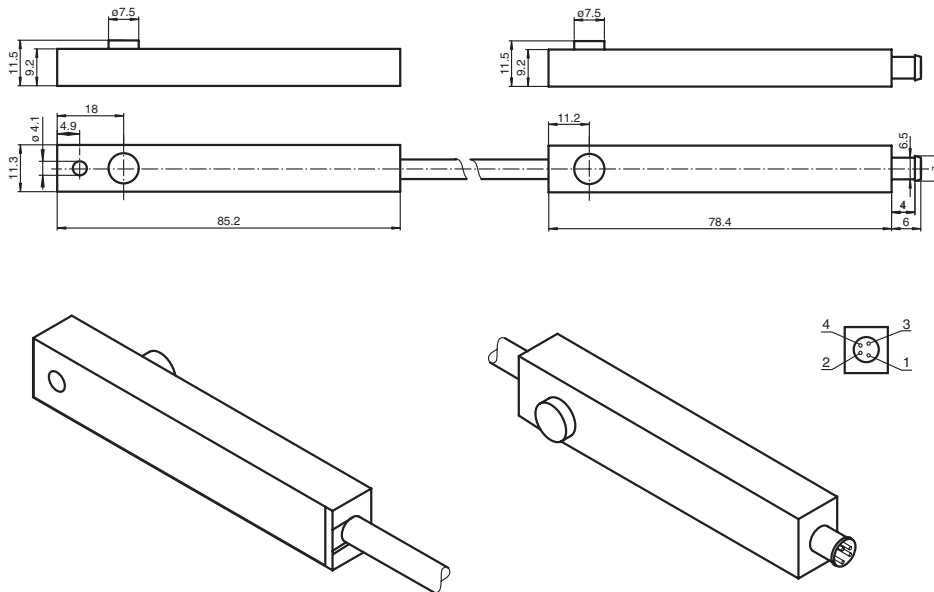

Electrical connection

Connection type

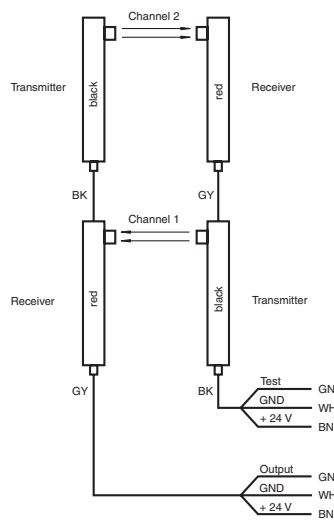

Sensors for automatic doors,
incl buses and trains

Sensors for industrial gates,
fire protection light barriers


Sensors for elevators

Accessories

Date of issue: 06/19/2007

Subject to reasonable modifications due to technical advances.

Copyright Pepperl+Fuchs, Printed in Germany



CE


Features

- Ideal for installation in door profiles
- Light-On switching

Technical data




		ML29-P/25/102/115	ML29-P/25/102/143	ML29-P/25/103/115	ML29-P/25/103/143
Effective detection range	0 ... 6 m	◆	◆	◆	◆
Threshold detection range	8.5 m	◆	◆	◆	◆
Light source	IRET, 880 nm	◆	◆	◆	◆
Approvals	CE	◆	◆	◆	◆
Light type	infrared, modulated light	◆	◆	◆	◆
Angle of divergence	+/- 8 °	◆	◆	◆	◆
Optical face	lateral	◆	◆	◆	◆
Ambient light limit	40000 Lux	◆	◆	◆	◆
Function display	LED red in receiver : lights up, when receiving the light beam	◆	◆	◆	◆
Operating voltage	11 ... 30 V DC	◆	◆	◆	◆
No-load supply current	Emitter: ≤ 25 mA Receiver: ≤ 10 mA	◆	◆	◆	◆
Test input	emitter deactivation at +U _B ≤ 5 V DC	◆	◆	◆	◆
Switching type	light ON	◆	◆	◆	◆
Signal output	1 NPN output, short-circuit proof, protected from reverse polarity, open collector 1 PNP output, short-circuit proof, protected from reverse polarity, open collector	◆	◆	◆	◆
Switching voltage	max. 30 V DC	◆	◆	◆	◆
Switching current	max. 0.1 A	◆	◆	◆	◆
Switching frequency	100 Hz	◆	◆	◆	◆
Response time	5 ms	◆	◆	◆	◆
Standards	EN 60947-5-2	◆	◆	◆	◆
Standards 2	EN 61000-6-2	◆	◆	◆	◆
Standards 3	EN 61000-6-3	◆	◆	◆	◆
Ambient temperature	-20 ... 60 °C (253 ... 333 K)	◆	◆	◆	◆
Storage temperature	-20 ... 75 °C (253 ... 348 K)	◆	◆	◆	◆
Relative humidity	90 % , non-condensing	◆	◆	◆	◆
Protection degree	IP65	◆	◆	◆	◆
Connection	fixed cable 6 m Plastic connector diameter 6.5 mm; 4-pin	◆	◆	◆	◆
Housing	PMMA , black	◆	◆	◆	◆
Optical face	Plastic pane	◆	◆	◆	◆
Mass	per device 120 g	◆	◆	◆	◆

Dimensions


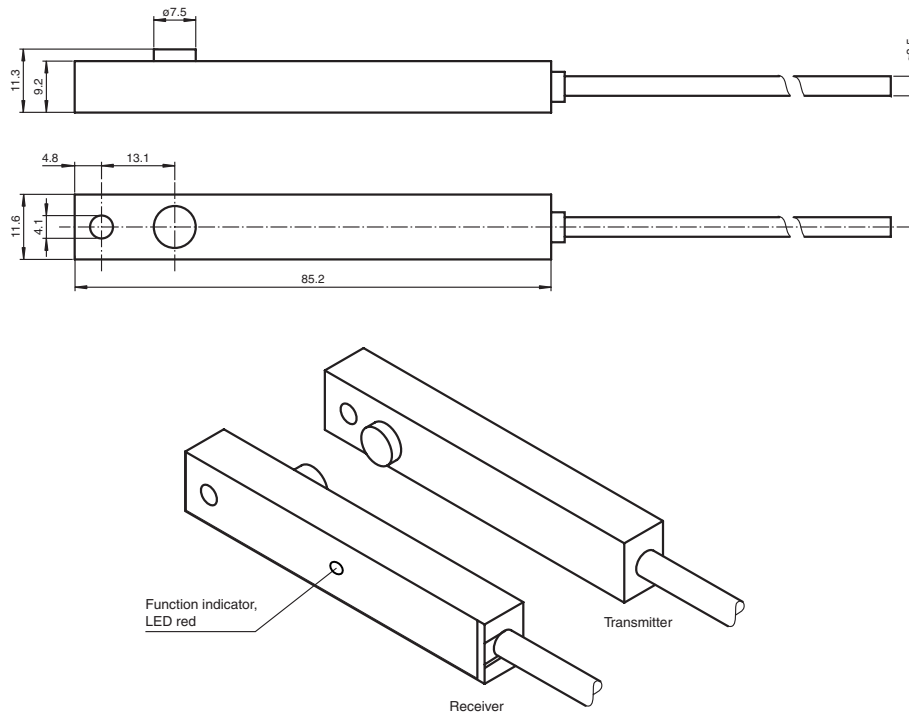


Electrical connection

Connection type

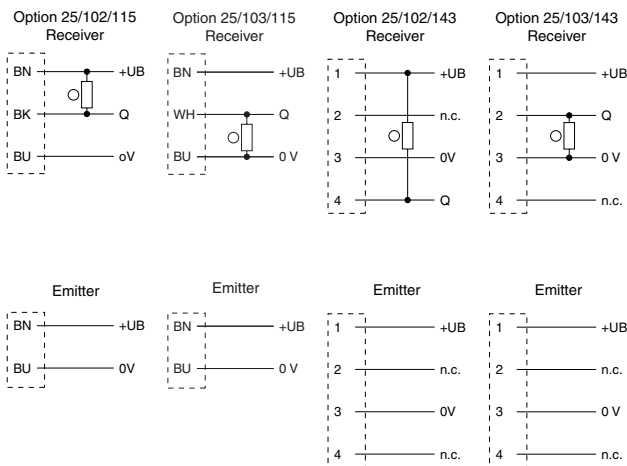


Diagrams

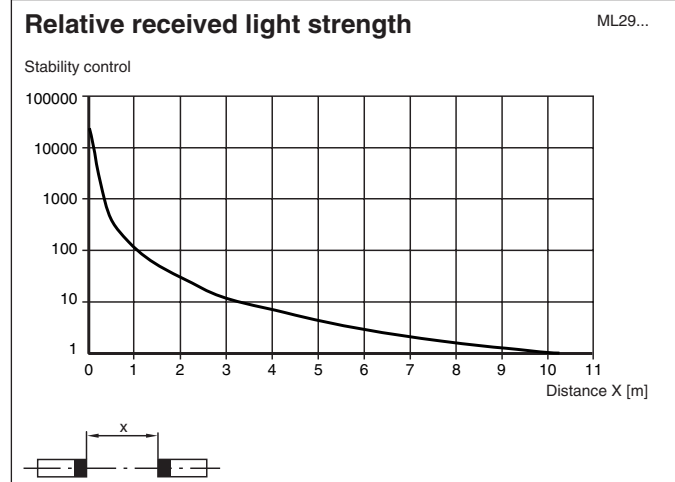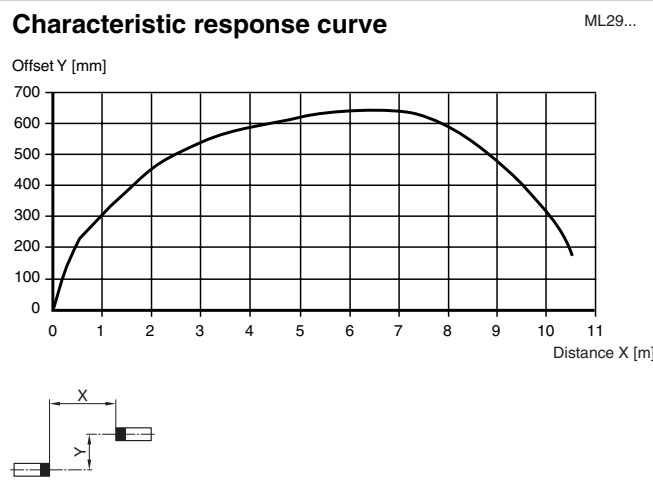

Date of issue: 06/19/2007

Subject to reasonable modifications due to technical advances.

Copyright Pepperl+Fuchs, Printed in Germany



CE


Features

- Ideal for installation in door profiles
- Dark-On switching

Technical data




		ML29-P/59/102/115	ML29-P/59/102/143	ML29-P/59/103/115	ML29-P/59/103/143
Effective detection range	0 ... 6 m	◆	◆	◆	◆
Threshold detection range	8.5 m	◆	◆	◆	◆
Light source	IRET, 880 nm	◆	◆	◆	◆
Approvals	CE	◆	◆	◆	◆
Light type	infrared, modulated light	◆	◆	◆	◆
Angle of divergence	+/- 8 °	◆	◆	◆	◆
Optical face	lateral	◆	◆	◆	◆
Ambient light limit	40000 Lux	◆	◆	◆	◆
Function display	LED red in receiver : lights up, when receiving the light beam	◆	◆	◆	◆
Operating voltage	11 ... 30 V DC	◆	◆	◆	◆
No-load supply current	Emitter: ≤ 25 mA Receiver: ≤ 10 mA	◆	◆	◆	◆
Test input	emitter deactivation at +U _B ≤ 5 V DC	◆	◆	◆	◆
Switching type	dark ON	◆	◆	◆	◆
Signal output	1 NPN output, short-circuit proof, protected from reverse polarity, open collector	◆	◆		
	1 PNP output, short-circuit proof, protected from reverse polarity, open collector			◆	◆
Switching voltage	max. 30 V DC	◆	◆	◆	◆
Switching current	max. 0.1 A	◆	◆	◆	◆
Switching frequency	100 Hz	◆	◆	◆	◆
Response time	5 ms	◆	◆	◆	◆
Standards	EN 60947-5-2	◆	◆	◆	◆
Standards 2	EN 61000-6-2	◆	◆	◆	◆
Standards 3	EN 61000-6-3	◆	◆	◆	◆
Ambient temperature	-20 ... 60 °C (253 ... 333 K)	◆	◆	◆	◆
Storage temperature	-20 ... 75 °C (253 ... 348 K)	◆	◆	◆	◆
Relative humidity	90 % , non-condensing	◆	◆	◆	◆
Protection degree	IP65	◆	◆	◆	◆
Connection	fixed cable 6 m	◆		◆	
	Plastic connector diameter 6.5 mm; 4-pin		◆		◆
Housing	PMMA , black	◆	◆	◆	◆
Optical face	Plastic pane	◆	◆	◆	◆
Mass	per device 120 g	◆	◆	◆	◆

Dimensions

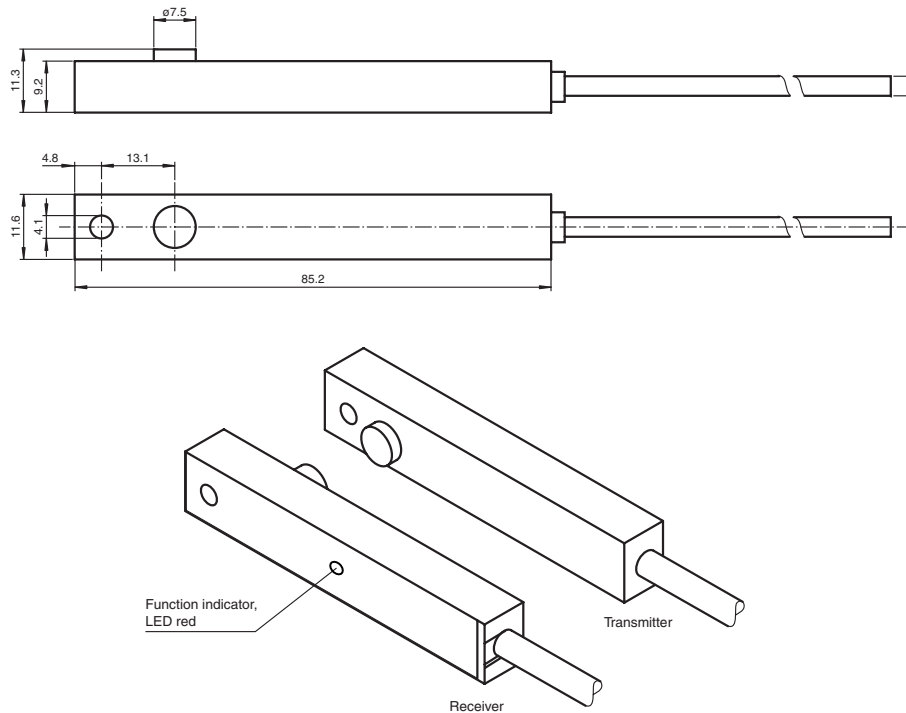

Electrical connection



Connection type

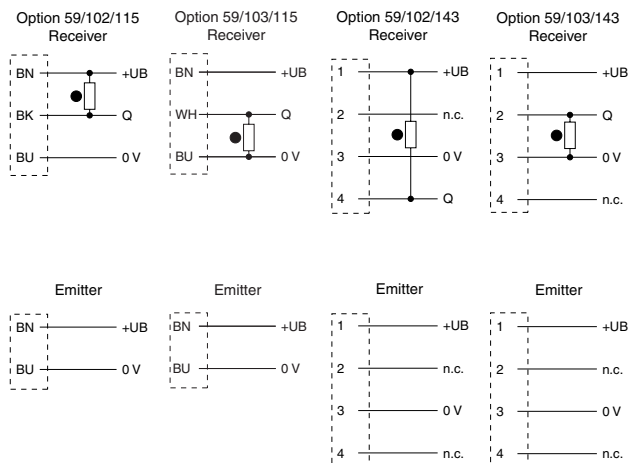

Diagrams



Characteristic response curve

ML29...

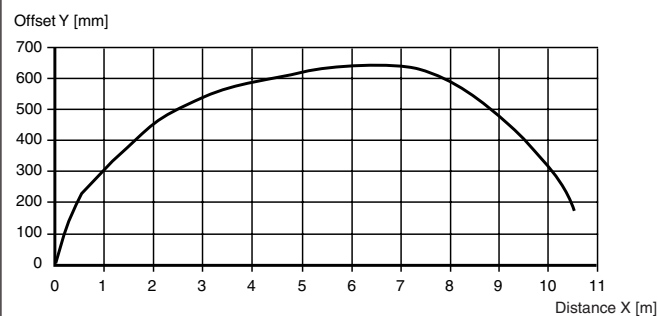

Relative received light strength


ML29...

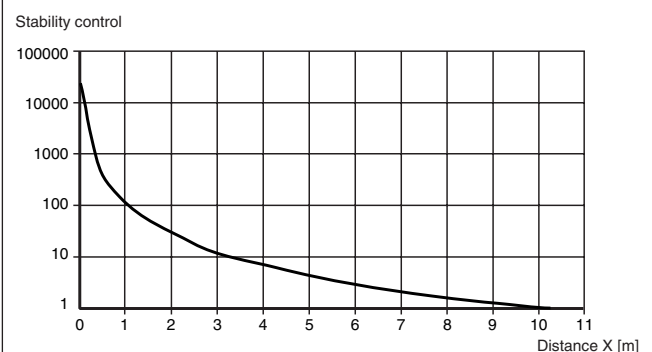

Date of issue: 06/19/2007

Subject to reasonable modifications due to technical advances.

Copyright Pepperl+Fuchs, Printed in Germany



CE

Features


- Ideal for installation in door profiles
- Certification in accordance with railway standard EN50155

Technical data

		ML29T-P/32/59/115 100mm
Effective detection range	0 ... 2.5 m	◆
Threshold detection range	3.5 m	◆
Light source	IRET , 950 nm	◆
Approvals	CE	◆
Light type	infrared, modulated light	◆
Angle of divergence	+/- 8 °	◆
Optical face	lateral	◆
Ambient light limit	40000 Lux	◆
Function display	LED red in receiver : lights up, when receiving the light beam	◆
Operating voltage	10 ... 32 V DC	◆
No-load supply current	Emitter: ≤ 20 mA Receiver: ≤ 10 mA	◆
Test input	emitter deactivation at +U _B ≤ 5 V DC	◆
Switching type	dark ON	◆
Signal output	1 PNP output, short-circuit proof, protected from reverse polarity, open collector	◆
Switching voltage	max. 32 V DC	◆
Switching current	max. 0.2 A	◆
Switching frequency	10 Hz	◆
Response time	50 ms	◆
Standards	EN 60947-5-2	◆
Standards 2	EN 50121-3-2	◆
Standards 3	EN 50155	◆
Standards 5		◆
Ambient temperature	-25 ... 60 °C (248 ... 333 K)	◆
Storage temperature	-25 ... 75 °C (248 ... 348 K)	◆
Relative humidity	90 % , non-condensing	◆
Protection degree	IP65	◆
Connection	Fixed cable 100 mm	◆
Housing	PMMA , black	◆
Optical face	Plastic pane	◆
Mass	per device 120 g	◆

Date of issue: 06/19/2007


Dimensions

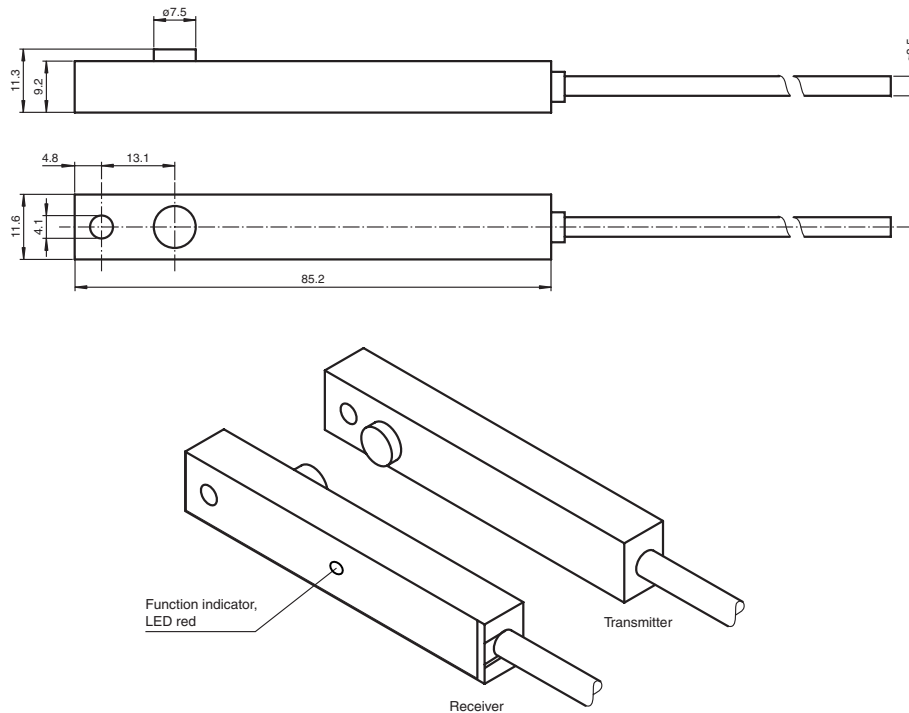



Electrical connection

Connection type

Option 32/59/115
Receiver



Emitter





Option 115
fixed cable

Diagrams



Characteristic response curve

ML29T...

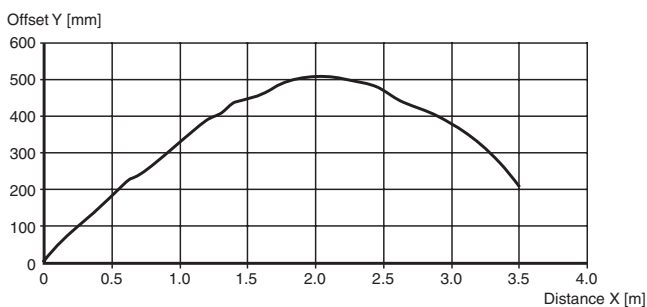

Relative received light strength


ML29T...

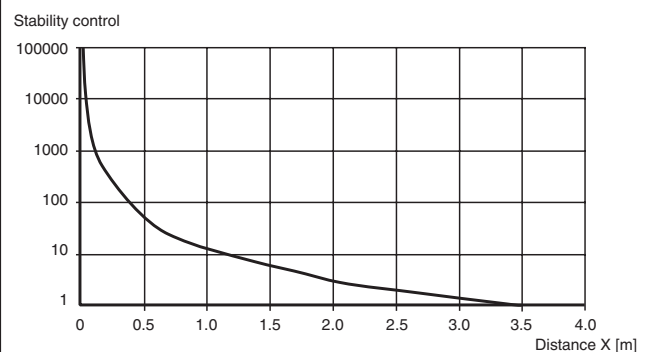

Date of issue: 06/19/2007

Subject to reasonable modifications due to technical advances.

Copyright Pepperl+Fuchs, Printed in Germany



Features

- Counting in two motion directions
- Each motion direction has an output
- Counting of approx. 3 persons per seconds
- Background evaluation
- Protection degree IP65


Technical data

Detection field	500 mm x 500 mm at 2000 mm sensor range	◆
Detection range min.	0 ... 1200 mm	◆
Detection range max.	0 ... 2800 mm	◆
Light source	4 IRED	◆
Marking	CE	◆
Operating mode	Background evaluation	◆
Light type	infrared, modulated light	◆
Function display	2 LEDs red, light up in case of detection	◆
Operating elements	sensing range adjuster	◆
Operating voltage	15 ... 48 V DC	◆
Ripple	10 %	◆
No-load supply current	60 mA	◆
Switching type	light ON	◆
Signal output	2 pulse outputs pnp, short-circuit proof, open collectors	◆
Switching voltage	≤ 48 V DC	◆
Switching current	≤ 200 mA	◆
Switching frequency	3 Hz	◆
Response time	40 ms at a remission level of 6 % 10 ms at a remission level of 18 %	◆
De-energized delay	150 ms	◆
Standards	EN 60947-5-2	◆
Standards 2	EN 61000-6-2 without EN 61000-4-5, EN 61000-4-11	◆
Standards 3	EN 61000-6-3	◆
Ambient temperature	-20 ... 60 °C (253 ... 333 K)	◆
Storage temperature	-20 ... 75 °C (253 ... 348 K)	◆
Mounting height	max. 2800	◆
Protection degree	IP65	◆
Connection	Connector, with 2 m cable connector	◆
Housing	Makrolon GV30 black	◆
Optical face	glass, red	◆
Mass	350 g	◆

FLT-8-HW-2800-CLS

Date of issue: 06/19/2007



Dimensions

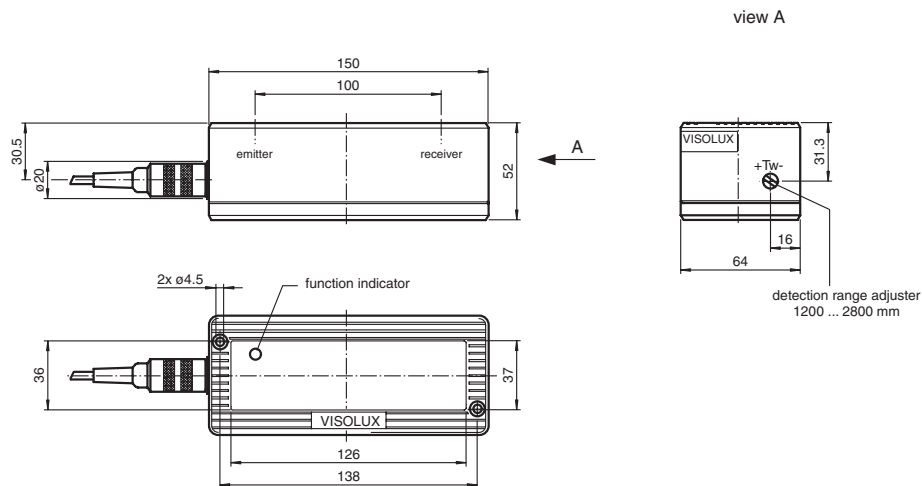

Electrical connection

Connection type


Option CLS



plug M12, 5 pin

Diagrams

Function

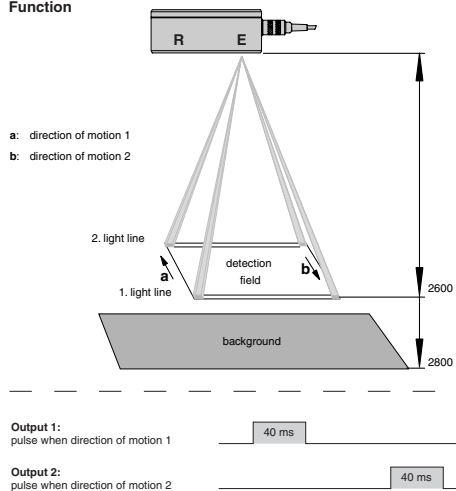

Date of issue: 06/19/2007

Subject to reasonable modifications due to technical advances.

Copyright Pepperl+Fuchs, Printed in Germany



Date of issue 06/20/2007



Description

The applications for our door sensors include activation and safeguarding of industrial gates.

The specific requirements for an opening pulse generator for gate areas are, for example, met by the radar sensor RMS-G. The adjustable detection field can be adapted to any gate dimension. This accommodates installation heights up to seven meters without problems. The RMS-G can differentiate between people and vehicles.

An induction loop before a gate is another affordable variant of an opening pulse generator. The loop detector LC10 is particularly well suited for this kind of solution.

If the gate moves up or down the risk of injury at the closing edges must be eliminated using suitable sensors. The robust gate light barriers of series 29 and 31 are ideal for this purpose.


	Type code	Principle of operation	Application areas	Page
	RLK29-55/25/116 RLK29-55/59/116	Retroreflective sensor with polarization filters	Pinch protection and closing edge monitoring	50
	RLK31-54			52
	LA31/LK31	Thru-beam sensor	Pinch protection and closing edge monitoring	56
	RMS-G-RC	Radar motion sensors	Opening pulse generators for industrial gates	58
	LT2-8-HS-2000 LT2-8-HS-6000	Diffuse mode sensor with background suppression and evaluation	Opening pulse generators and closing edge monitoring for barriers	60
	LTK2-8-HS-2000 LTK2-8-HS-6000			62
	LC10-1	Loop detectors with connection for an induction loop	Opening pulse generators for gates	66
	LC10-2	Loop detectors with connection for two induction loops		68
	MLV12-54-2563/49/124	Fire protection reflection light barrier with polarization filters	Closing edge monitoring for fire-proof gates	70

Sensors for automatic doors, incl buses and trains

Sensors for industrial gates, fire protection light barriers

Sensors for elevators

Accessories




Features

- Retroreflective sensor with increased range and water-tight housing for door and cabinet systems
- No measurable emitted interference on all frequencies
- Particularly insensitive to interference in the service radio and mobile phone ranges
- 2500 V Proof voltage between the relay connection terminals and the device electronics
- Not sensitive to ambient light, even with energy saving lamps
- Supplied with reflector and mounting accessory
RLK29-55/25/116-Set

Technical data

		RLK29-55/25/116	RLK29-55/25/116-Set
Effective detection range	0 ... 12 m	◆	◆
Reflector distance	0.04 ... 12 m (with C110-2 reflector)	◆	◆
Threshold detection range	14 m		◆
	14 m (with H85 reflector)	◆	
Light source	LED	◆	◆
Approvals	CE	◆	◆
USA	cULus	◆	◆
Canada	cULus	◆	◆
Reference target	reflector C110_2 Diameter: 84 mm , included with delivery		◆
Light type	red, modulated light 640 nm	◆	◆
Diameter of the light spot	approx. 35 mm at a distance of 12 m	◆	◆
Angle of divergence	± 1 °	◆	◆
Ambient light limit	90000 Lux	◆	◆
Function display	LED red illuminates: when beam is free flashes: when level falls below function reserve off: when beam is interrupted	◆	◆
Operating voltage	24 ... 230 V AC/DC	◆	◆
Ripple	10 %	◆	◆
No-load supply current	≤ 8.5 mA	◆	◆
Power consumption	0.2 W at 24 V DC , 1.8 W at 230 V AC 3 VA	◆	◆
Switching type	light ON	◆	◆
Signal output	Relay, 1 alternator	◆	◆
Switching voltage	230 V AC	◆	◆
Switching current	max. 2 A	◆	◆
Switching frequency	7 Hz	◆	◆
Response time	50 ms	◆	◆
Standards	EN 60947-5-2	◆	◆
Ambient temperature	-20 ... 60 °C (253 ... 333 K)	◆	◆
Storage temperature	-30 ... 70 °C (243 ... 343 K)	◆	◆
Protection degree	IP67	◆	◆
Connection	terminal compartment	◆	◆
Housing	Plastic ABS, flame resistant	◆	◆
Optical face	plastic	◆	◆
Mass	approx. 200 g		◆
	100.7 g	◆	

Dimensions


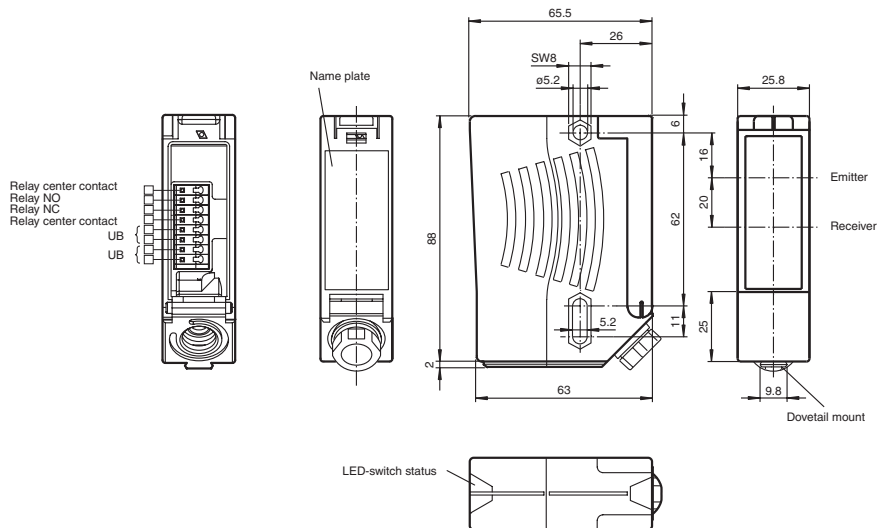


Electrical connection

Connection type



Option /25/116

Option 55/25/116




Option 116 terminal compartment

Diagrams

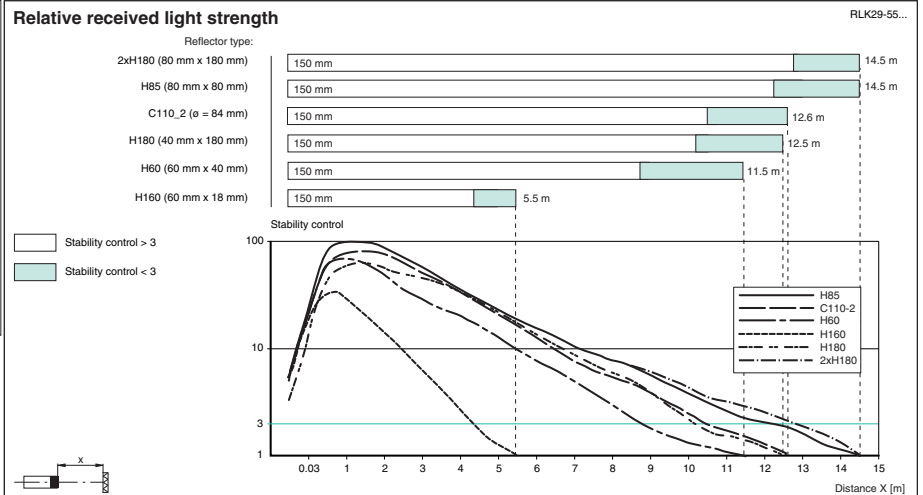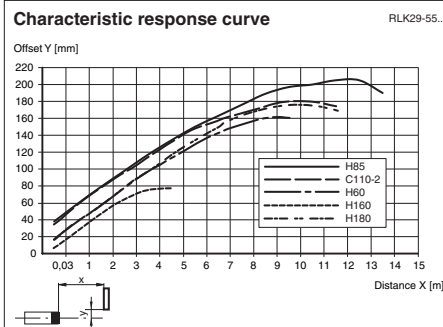

Subject to reasonable modifications due to technical advances.

Copyright Pepperl+Fuchs, Printed in Germany




Features

- Retroreflective sensor with increased range and water-tight housing for door and cabinet systems
- No measurable emitted interference on all frequencies
- 2500 V Proof voltage between the relay connection terminals and the device electronics
- Particularly insensitive to interference in the service radio and mobile phone ranges
- Not sensitive to ambient light, even with energy saving lamps
RLK29-55/59/116
- Supplied with reflector and mounting accessory
RLK29-55/59/116-Set

Technical data

		RLK29-55/59/116	RLK29-55/59/116-Set
Effective detection range	0 ... 12 m	◆	◆
Reflector distance	0.04 ... 12 m (with C110-2 reflector)	◆	◆
Threshold detection range	14 m	◆	◆
	14 m (with H85 reflector)	◆	◆
Light source	LED	◆	◆
Approvals	CE	◆	◆
USA	cULus	◆	◆
Kanada	cULus	◆	◆
Reference target	reflector C110_2 Diameter: 84 mm , included with delivery	◆	◆
Light type	red, modulated light 640 nm	◆	◆
Diameter of the light spot	approx. 35 mm at a distance of 12 m	◆	◆
Angle of divergence	± 1 °	◆	◆
Ambient light limit	90000 Lux	◆	◆
Function display	LED red illuminates: when beam is free flashes: when level falls below function reserve off: when beam is interrupted	◆	◆
Operating voltage	24 ... 230 V AC/DC	◆	◆
Ripple	10 %	◆	◆
No-load supply current	≤ 8.5 mA	◆	◆
Power consumption	0.2 W at 24 V DC , 1.8 W at 230 V AC 3 VA	◆	◆
Switching type	dark ON	◆	◆
Signal output	Relay, 1 alternator	◆	◆
Switching voltage	230 V AC	◆	◆
Switching current	max. 2 A	◆	◆
Switching frequency	7 Hz	◆	◆
Response time	50 ms	◆	◆
Standards	EN 60947-5-2	◆	◆
Ambient temperature	-20 ... 60 °C (253 ... 333 K)	◆	◆
Storage temperature	-30 ... 70 °C (243 ... 343 K)	◆	◆
Protection degree	IP67	◆	◆
Connection	terminal compartment	◆	◆
Housing	Plastic ABS, flame resistant	◆	◆
Optical face	plastic	◆	◆
Mass	100.7 g	◆	◆

Dimensions


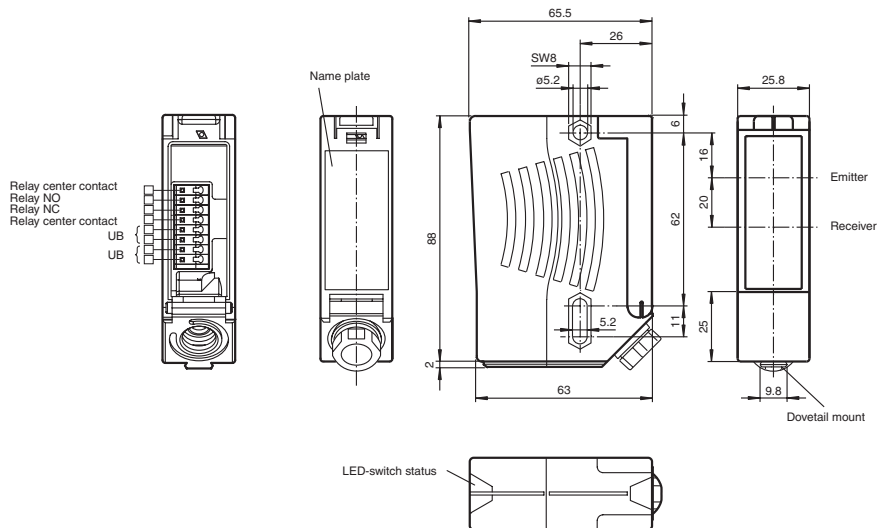


Electrical connection

Connection type

Option /59/116

Option 55/59/116




Option 116
terminal compartment

Diagrams


Characteristic response curve

RLK29-55...

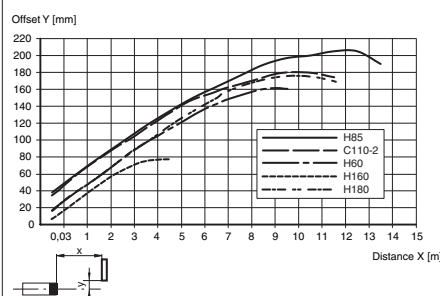


Relative received light strength

RLK29-55...

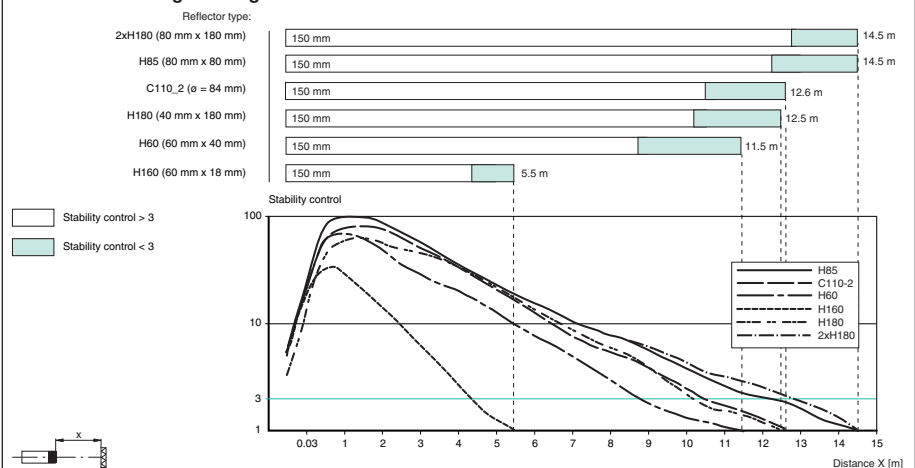

Subject to reasonable modifications due to technical advances.

Copyright Pepperl+Fuchs, Printed in Germany



Features

- Operating voltage AC / DC
- Very clearly visible LED
- Relay output
- Compact and stable housing
- Protection class II
- Supplied with reflector and mounting accessory


Technical data

Effective detection range	0 ... 9000 mm	◆
Reflector distance	20 ... 9000 mm	◆
Threshold detection range	12 m with reflector C110-2	◆
Light source	LED, 630 nm polarised	◆
Approvals	CE	◆
Light type	red, modulated light	◆
Diameter of the light spot	approx. 200 mm at a distance of 6 m	◆
Angle of divergence	3 °	◆
Ambient light limit	50000 Lux	◆
Accessories provided	reflector C110_2 Mounting bracket OMH-RL31-01	◆
Operating display	LED green: power on	◆
Function display	LED yellow: 1. LED lits constantly: signal > 2 x switching point (function reserve) 2. LED flashes: signal between 1 x switching point and 2 x switching point 3. LED off: signal < switching point	◆
Operating voltage	24 ... 240 V AC 12 ... 240 V DC	◆
Protection class	II, rated voltage ≤ 250 V AC with degree of pollution 1-2 according to IEC 60664-1 Output circuit basis insulation of input circuit according to EN50178, rated insulation voltage 240 V AC	◆
No-load supply current	≤ 40 mA	◆
Power consumption	≤ 2 VA	◆
Switching type	light ON	◆
Signal output	1 relay output, 1 alternator	◆
Switching voltage	max. 240 V AC	◆
Switching current	max. 3 A	◆
Switching frequency	20 Hz	◆
Response time	≤ 25 ms	◆
Standards	EN 60947-5-2	◆
Ambient temperature	-25 ... 55 °C (248 ... 328 K)	◆
Storage temperature	-40 ... 70 °C (233 ... 343 K)	◆
Protection degree	IP67	◆
Connection	fixed cable 2 m , 5-core	◆
Housing	plastic	◆
Optical face	PMMA	◆
Mass	154 g	◆
Mounting	Mounting accessories included	◆

RLK31-54/25/31/115 SET

Date of issue: 06/21/2007



Dimensions

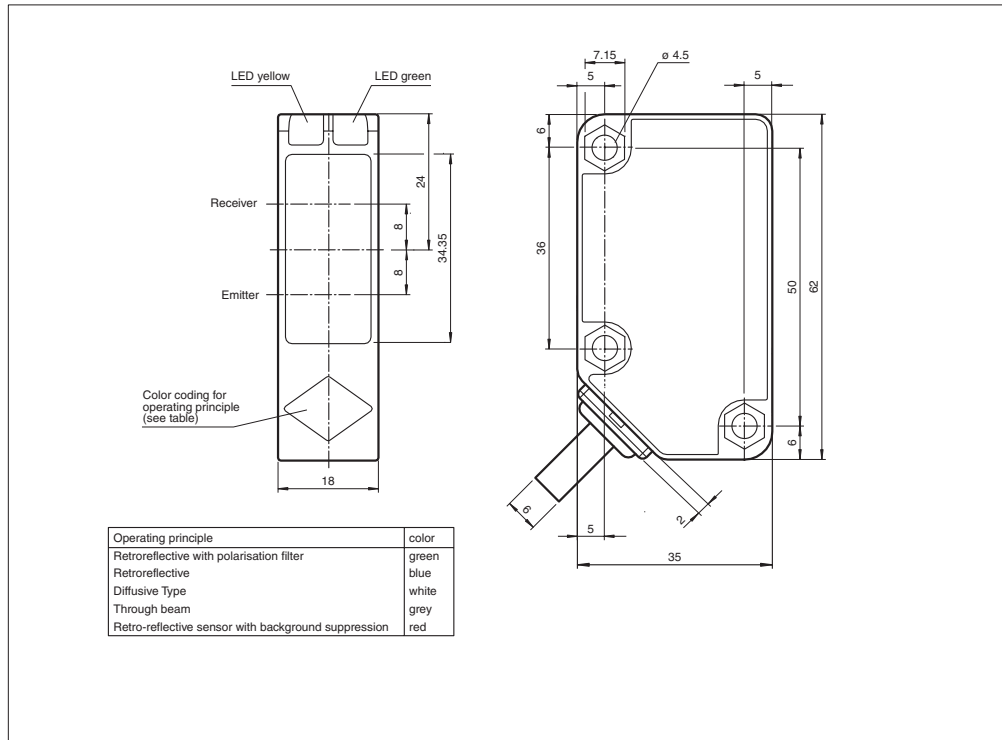

Electrical connection

Connection type


Option 31/115




Diagrams

Characteristic response curve

RLK31-54/...31/115

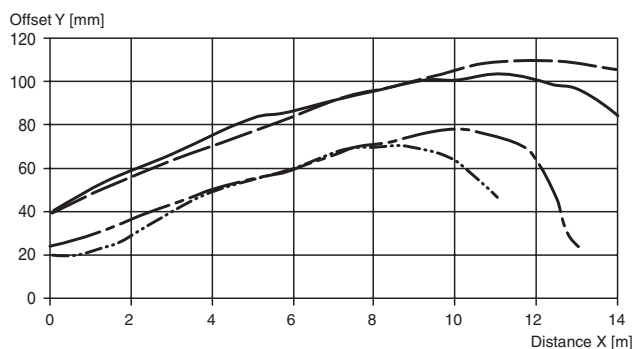

Relative received light strength

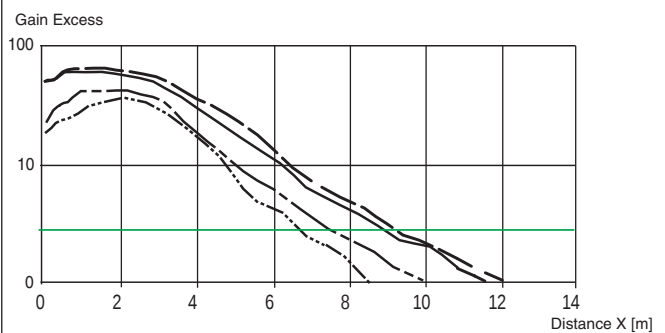RLK31-54/...
RLK31-54/...

Date of issue: 06/21/2007

Subject to reasonable modifications due to technical advances.

Copyright Pepperl+Fuchs, Printed in Germany



Features

- Operating voltage AC / DC
- Very clearly visible LED
- Protection class II
- Relay output
- Compact and stable housing
- Supplied with reflector and mounting accessory


Technical data

Effective detection range	0 ... 30 m	◆
Threshold detection range	43 m	◆
Light source	LED, 630 nm	◆
Approvals	CE	◆
Alignment aid	LED yellow: 1. LED illuminates: Sufficient light signal received, emitter und receiver alignment is correct 2. LED flashes: Reaching switching point 3. LED off: Light beam is interrupted or the alignment is out	◆
Light type	red, modulated light	◆
Diameter of the light spot	approx. 800 mm at a distance of 30 m	◆
Angle of divergence	Emitter: 0.5 °, Receiver: 1.5 °	◆
Ambient light limit	50000 Lux	◆
Accessories provided	2 x Mounting bracket OMH-RL31-01	◆
Operating display	LED green: power on	◆
Function display	LED yellow: 1. LED lits constantly: signal > 2 x switching point (function reserve) 2. LED flashes: signal between 1 x switching point and 2 x switching point 3. LED off: signal < switching point	◆
Operating voltage	24 ... 240 V AC 12 ... 240 V DC	◆
Protection class	II, rated voltage ≤ 250 V AC with degree of pollution 1-2 according to IEC 60664-1 Output circuit basis insulation of input circuit according to EN50178, rated insulation voltage 240 V AC	◆
No-load supply current	Emitter: ≤ 40 mA Receiver: ≤ 3 mA	◆
Power consumption	Emitter: ≤ 2 VA Receiver: ≤ 1 VA	◆
Switching type	light ON	◆
Signal output	1 relay output, 1 alternator	◆
Switching voltage	max. 250 V AC/DC	◆
Switching current	max. 3 A	◆
Switching frequency	≤ 20 Hz	◆
Response time	≤ 25 ms	◆
Standards	EN 60947-5-2	◆
Ambient temperature	-25 ... 55 °C (248 ... 328 K)	◆
Storage temperature	-40 ... 70 °C (233 ... 343 K)	◆
Protection degree	IP67	◆
Connection	Emitter: fixed cable 2 m, 2-core Receiver: fixed cable 2 m, 5-core	◆
Housing	plastic	◆
Optical face	PMMA	◆
Mass	Emitter: 116 g Receiver: 131 g	◆
Mounting	Mounting accessories included	◆

LA31/LK31/25/31/115 SET

Date of issue: 06/21/2007


Dimensions

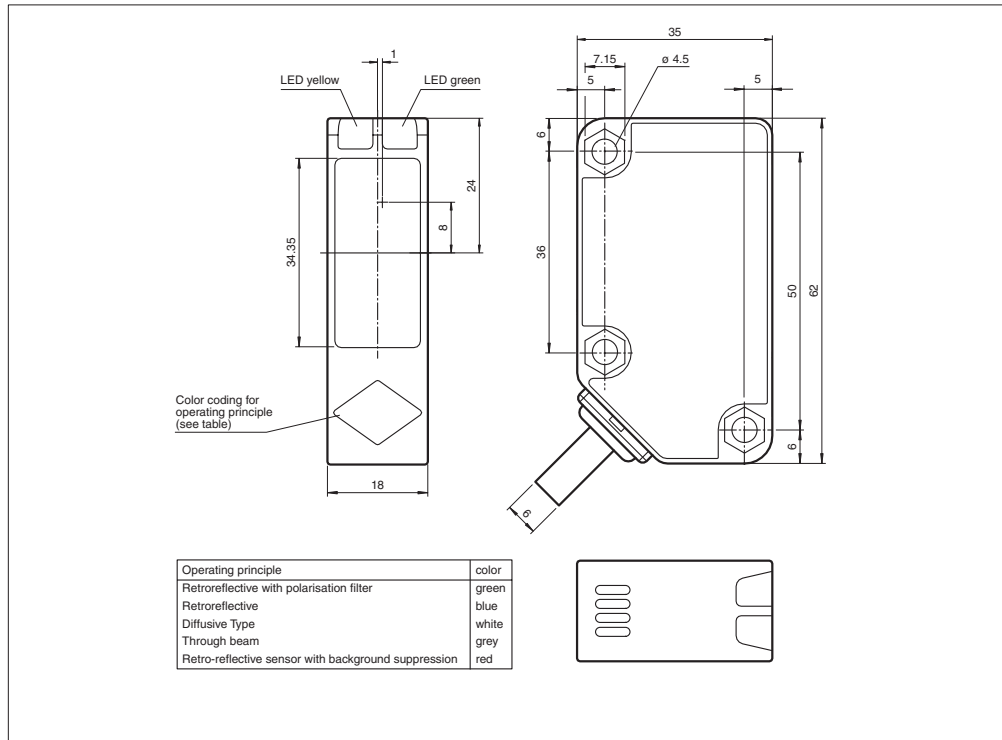



Electrical connection

Connection type

Option /31/115
Receiver



Emitter




Option 115
fixed cable

Diagrams


Characteristic response curve

LA31/LK31/...31/115

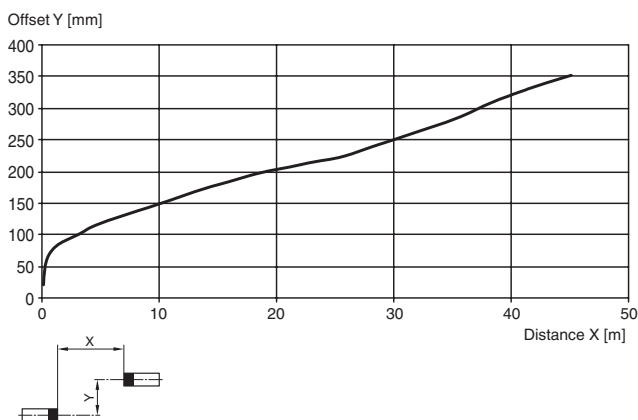

Relative received light strength


LD31/LV31...
LA31/LK31...

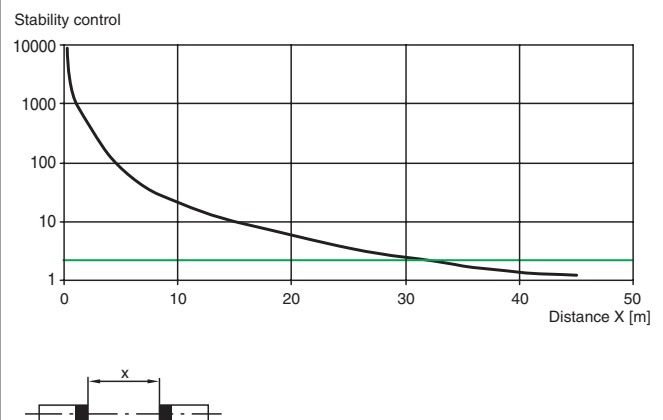

Date of issue: 06/21/2007

Subject to reasonable modifications due to technical advances.

Copyright Pepperl+Fuchs, Printed in Germany



Features


- Opening impulse sensor
- Programmable, also with separate remote control
- Direction detection
- Differentiated vehicle / personnel detection
- Cross traffic suppression
- 2 relay outputs
- Simple mounting

Technical data

Marking	CE	RMS-G-RC
Operating mode	Radar motion sensor	◆
Detection speed	min. 0.1 m/s	◆
Setting angle	0 ... 40 ° in 5 ° steps	◆
Sensing range	7000x 6000 mm (TxB) at 5000 mm mounting height and 30° tilt angle 8000x 5000 mm (TxB) at 7000 mm mounting height and 30° tilt angle	◆
Operating frequency	24.05 ... 24.25 GHz K-Band	◆
Function display	LED red/green	◆
Operating elements	Programming push-button for selection of operating modes : Direction detection , Cross traffic suppression , Vehicle detection , Switching type	◆
Operating elements	Adjuster for de-energised delay	◆
Operating elements	Programming via 2 keys , alternative via remote control (Accessories. to order separately)	◆
Operating voltage	12 ... 36 V DC , 12 ... 28 V AC	◆
No-load supply current	≤ 50 mA at 24 V DC	◆
Power consumption	≤ 1 W	◆
Switching type	active/passive	◆
Signal output	2 relay outputs	◆
Switching voltage	max. 48 V AC / 48 V DC	◆
Switching current	max. 0.5 A AC / 1 A DC	◆
Standards	EN 60950:2000; EN 60335-1:1994; EN 301489-3 V1.4.1; EN 61000-6-1:2001, EN 61000-6-2:2001; EN 61000-6-3:2001; EN 61000-4:2001 ; EN 300440-2 V1.1.1	◆
Standards 2	CETECOM	◆
Ambient temperature	-20 ... 60 °C (253 ... 333 K)	◆
Protection degree	IP54	◆
Connection	plug-in screw terminals 4-pin and 2 pin , 8 m connecting cable included in delivery	◆
Housing	ABS, anthracite	◆
Mass	120 g	◆

Date of issue: 06/19/2007


Dimensions

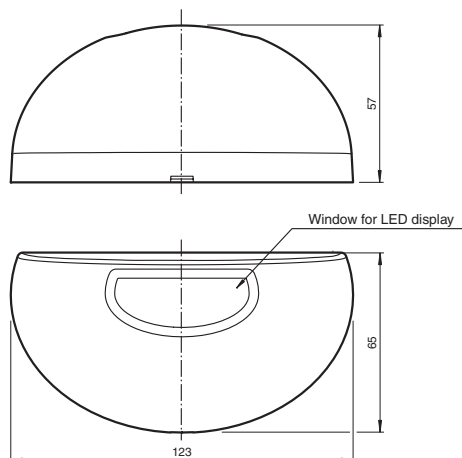



Electrical connection

Connection type

4-pin terminal



2-pin terminal



Functional description

The motion detectors based on the latest 24 GHz technology with microprocessor control ensure high reliability under difficult operating conditions and enable target applications from the supermarket door to the garage gate. The core of the sensors are the planar modules with integrated patch aerials in robust metal design; behind the front-end there is the microprocessor controlled evaluation electronics. The 24 GHz frequency in the so-called K band has been reserved globally for this application area by CETECOM.

The motion detectors of series RMS with their intelligent functions like direction detection, suppression of crossing traffic and "turtle mode" can flexibly respond to the most different requirement profiles. The suppression of crossing traffic is particularly useful in narrow shopping streets. Here the system can be configured to only open the door when people move towards it whilst ignoring passing traffic. Two sensitivity stages can be set to take into account crossing traffic of different intensity. The use as revolving door sensors on the sides of the door hinges is also possible, because with suppression of crossing traffic enabled the closing door leaf does not cause false triggers.

The specific requirements for an opening pulse generator for gate areas are, for example, met by the radar sensor RMS-G. The adjustable detection field can be adapted to any gate dimension. This accommodates installation heights up to seven meters without problems. The RMS-G can differentiate between people and vehicles.

Date of issue: 06/19/2007

Subject to reasonable modifications due to technical advances.

Copyright Pepperl+Fuchs, Printed in Germany




Features

- Background suppression and evaluation
- Mechanical adjustable detection range
- Light/dark switching
- Adjustable time functions
- Test input

Technical data

		LT2-8-HS-2000/47/105	LT2-8-HS-2000/47/115	LT2-8-HS-2000/49/105	LT2-8-HS-2000/49/115
Detection range min.	0 ... 500 mm by background evaluation, 350 ... 500 mm by background suppression	◆	◆	◆	◆
Detection range max.	0 ... 2000 mm by background evaluation, 350 ... 2500 mm by background suppression	◆	◆	◆	◆
Light source	IREDD	◆	◆	◆	◆
Marking	CE	◆	◆	◆	◆
Operating mode	switching between background suppression/evaluation	◆	◆	◆	◆
Light type	infrared, modulated light	◆	◆	◆	◆
Diameter of the light spot	50 mm at 2000 mm sensor range	◆	◆	◆	◆
Function display	LED green: power on LED red: object detection	◆	◆	◆	◆
Operating elements	Detection range setting, programming switch for time functions, time setting	◆	◆	◆	◆
Operating voltage	15 ... 35 V DC	◆	◆	◆	◆
Ripple	10 %	◆	◆	◆	◆
No-load supply current	100 mA	◆	◆	◆	◆
Test input	emitter deactivation with +Ub	◆	◆	◆	◆
Switching type	Light/dark ON selectable programmable , Factory setting: light ON	◆	◆	◆	◆
Signal output	1 npn, 1 pnp, short-circuit proof, open collectors 2 pnp, antivalent, short-circuit proof, open collectors	◆	◆	◆	◆
Switching voltage	35 V DC	◆	◆	◆	◆
Switching current	200 mA	◆	◆	◆	◆
Response time	50 ms	◆	◆	◆	◆
Timer function	Programmable on/off delay, adjustable 0.1 ... 10 s	◆	◆	◆	◆
Standards	EN 60947-5-2	◆	◆	◆	◆
Standards 2	EN 61000-6-2 without EN 61000-4-5, EN 61000-4-11	◆	◆	◆	◆
Standards 3	EN 61000-6-3	◆	◆	◆	◆
Ambient temperature	-20 ... 60 °C (253 ... 333 K)	◆	◆	◆	◆
Protection degree	IP65	◆	◆	◆	◆
Connection	fixed cable 5 m Plastic M12 connector, 5-pin, without cable	◆	◆	◆	◆
Housing	Makrolon GV30	◆	◆	◆	◆
Optical face	Hardened plastic lens	◆	◆	◆	◆
Mass	320 g	◆	◆	◆	◆


Dimensions

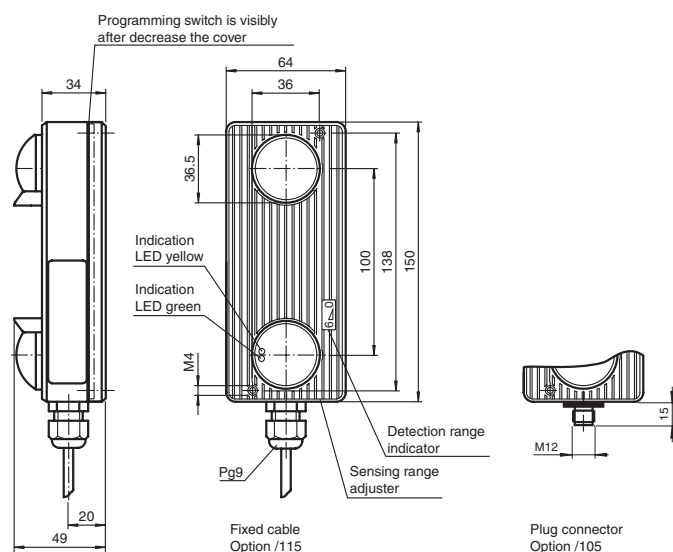


Electrical connection

Connection type


Option 47/105





Option 47/115




Option 49/105



Option 49/115




Option 115
fixed cable



Option 105
plug M12, 5 pin

Diagrams

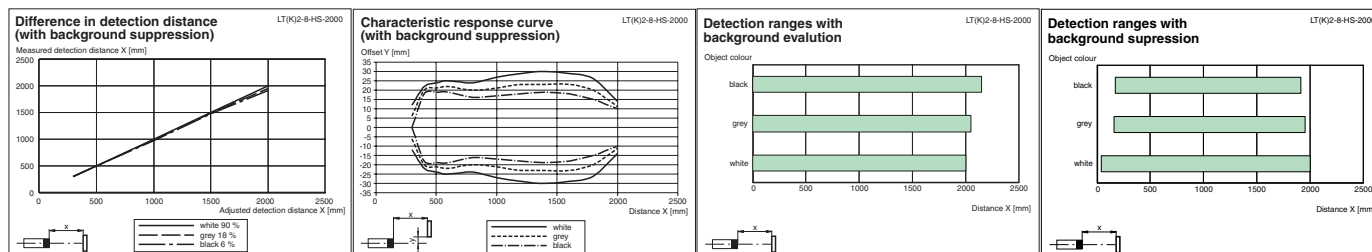

Date of issue: 06/19/2007

Subject to reasonable modifications due to technical advances.

Copyright Pepperl+Fuchs, Printed in Germany

Pepper+Fuchs Group • Tel.: Germany +49 621 776-0 • USA +1 330 4253555 • Singapore +65 67799091 • Internet <http://www.pepper-fuchs.com>
 Courtesy of Steven Engineering, Inc. • 230 Ryan Way, South San Francisco, CA 94080-6370 • General Inquiries: (800) 670-4183 • www.stevenengineering.com




Features

- Background suppression and evaluation
- Mechanical adjustable detection range
- Light/dark switching
- Adjustable time functions
- Test input

Technical data

		LT2-8-HS-6000/47/105	LT2-8-HS-6000/47/115	LT2-8-HS-6000/49/105	LT2-8-HS-6000/49/115
Detection range min.	0 ... 500 mm by background evaluation, 350 ... 500 mm by background suppression	◆	◆	◆	◆
Detection range max.	0 ... 6000 mm by background evaluation, 200 ... 6000 mm by background suppression	◆	◆	◆	◆
Light source	IREDD	◆	◆	◆	◆
Marking	CE	◆	◆	◆	◆
Operating mode	switching between background suppression/evaluation	◆	◆	◆	◆
Light type	infrared, modulated light	◆	◆	◆	◆
Diameter of the light spot	150 mm at 6000 mm sensor range 50 mm at 2000 mm sensor range	◆	◆	◆	◆
Function display	LED green: power on LED red: object detection	◆	◆	◆	◆
Operating elements	Detection range setting, programming switch for time functions, time setting	◆	◆	◆	◆
Operating voltage	15 ... 35 V DC	◆	◆	◆	◆
Ripple	10 %	◆	◆	◆	◆
No-load supply current	100 mA	◆	◆	◆	◆
Test input	emitter deactivation with +Ub	◆	◆	◆	◆
Switching type	Light/dark ON selectable programmable, Factory setting: light ON	◆	◆	◆	◆
Signal output	1 npn, 1 pnp, short-circuit proof, open collectors 2 pnp, antivalent, short-circuit proof, open collectors	◆	◆	◆	◆
Switching voltage	35 V DC	◆	◆	◆	◆
Switching current	200 mA	◆	◆	◆	◆
Response time	100 ms	◆	◆	◆	◆
Timer function	Programmable on/off delay, adjustable 0.1 ... 10 s	◆	◆	◆	◆
Standards	EN 60947-5-2	◆	◆	◆	◆
Standards 2	EN 61000-6-2 without EN 61000-4-5, EN 61000-4-11	◆	◆	◆	◆
Standards 3	EN 61000-6-3	◆	◆	◆	◆
Ambient temperature	-20 ... 60 °C (253 ... 333 K)	◆	◆	◆	◆
Protection degree	IP65	◆	◆	◆	◆
Connection	fixed cable 5 m Plastic M12 connector, 5-pin, without cable	◆	◆	◆	◆
Housing	Makrolon GV30	◆	◆	◆	◆
Optical face	Hardened plastic lens	◆	◆	◆	◆
Mass	320 g	◆	◆	◆	◆


Dimensions

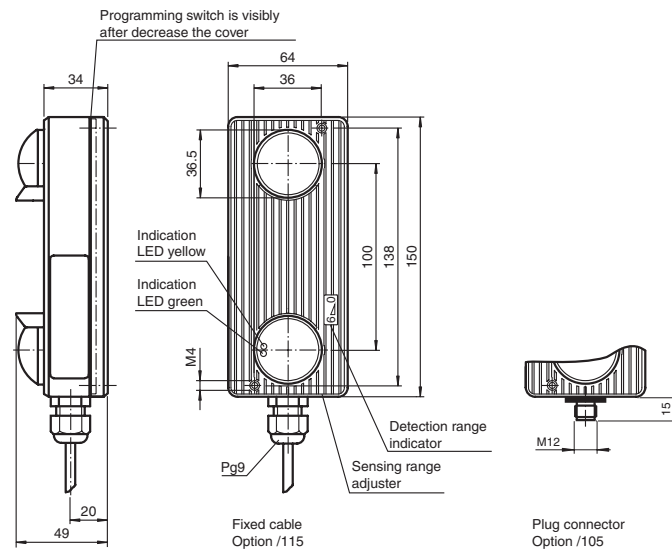


Electrical connection

Connection type


Option 47/105





Option 47/115




Option 49/105



Option 49/115




Option 115
fixed cable



Option 105
plug M12, 5 pin

Diagrams

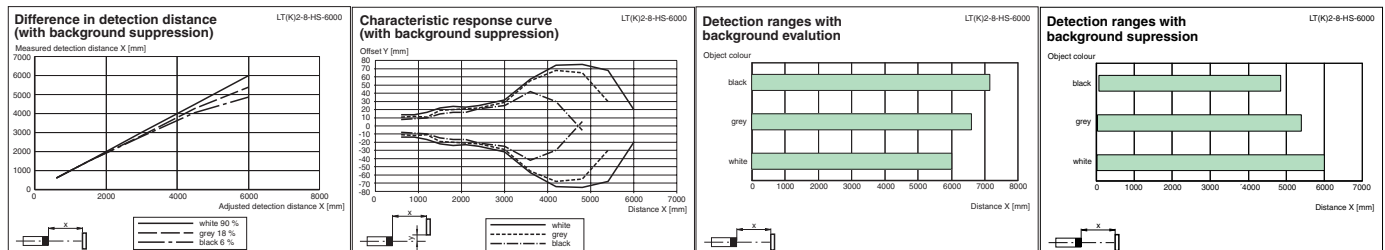

Date of issue: 06/19/2007

Subject to reasonable modifications due to technical advances.

Copyright Pepperl+Fuchs, Printed in Germany

Pepperl+Fuchs Group • Tel.: Germany +49 621 776-0 • USA +1 330 4253555 • Singapore +65 67799091 • Internet <http://www.pepperl-fuchs.com>
 Courtesy of Steven Engineering, Inc. • 230 Ryan Way, South San Francisco, CA 94080-6370 • General Inquiries: (800) 670-4183 • www.stevenengineering.com




Features

- Background suppression and evaluation
- Mechanical adjustable detection range
- Light/dark switching
- Adjustable time functions

Technical data

		LTK2-8-HS-2000/31/105	LTK2-8-HS-2000/31/115	LTK2-8-HS-6000/31/105	LTK2-8-HS-6000/31/115
Detection range min.	0 ... 500 mm by background evaluation, 350 ... 500 mm by background suppression	◆	◆	◆	◆
Detection range max.	0 ... 2000 mm by background evaluation, 350 ... 2500 mm by background suppression 0 ... 6000 mm by background evaluation, 200 ... 6000 mm by background suppression	◆	◆		
Light source	IREL	◆	◆	◆	◆
Marking	CE	◆	◆	◆	◆
Operating mode	switching between background suppression/evaluation	◆	◆	◆	◆
Light type	infrared, modulated light	◆	◆	◆	◆
Diameter of the light spot	150 mm at 6000 mm sensor range 50 mm at 2000 mm sensor range	◆	◆		
Function display	LED green: power on LED red: object detection	◆	◆	◆	◆
Operating elements	Detection range setting, programming switch for time functions, time setting	◆	◆	◆	◆
Operating voltage	11 ... 48 V DC / 12 ... 24 V AC	◆	◆	◆	◆
No-load supply current	100 mA	◆	◆	◆	◆
Switching type	Light/dark ON selectable programmable, Factory setting: light ON	◆	◆	◆	◆
Signal output	Relay, 1 alternator	◆	◆	◆	◆
Switching voltage	240 V AC/DC	◆	◆	◆	◆
Switching current	2 A	◆	◆	◆	◆
Response time	100 ms 50 ms	◆	◆		
Timer function	Programmable on/off delay, adjustable 0.1 ... 10 s	◆	◆	◆	◆
Standards	EN 60947-5-2	◆	◆	◆	◆
Standards 2	EN 61000-6-2 without EN 61000-4-5, EN 61000-4-11	◆	◆	◆	◆
Standards 3	EN 61000-6-3	◆	◆	◆	◆
Ambient temperature	-20 ... 60 °C (253 ... 333 K)	◆	◆	◆	◆
Protection degree	IP65	◆	◆	◆	◆
Connection	fixed cable 5 m Plastic M12 connector, 5-pin, without cable	◆	◆	◆	◆
Housing	Makrolon GV30	◆	◆	◆	◆
Optical face	Hardened plastic lens	◆	◆	◆	◆
Mass	320 g	◆	◆	◆	◆

Dimensions


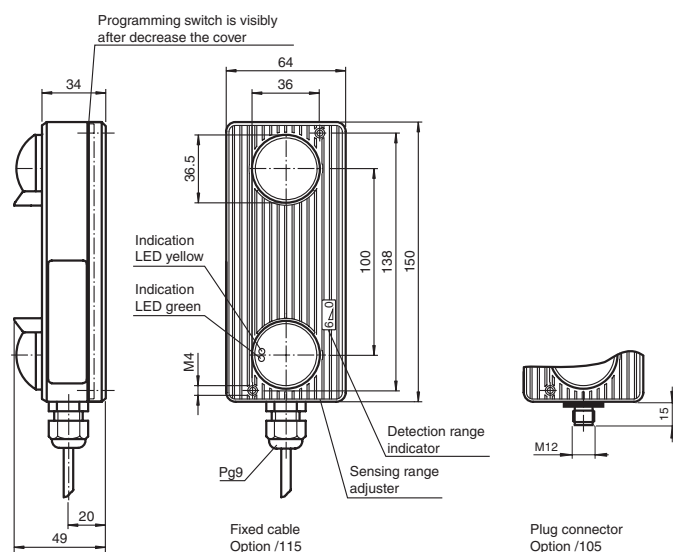


Electrical connection


Connection type

Option 31/105

Option 31/115











Option 115
fixed cable



Option 105
plug M12, 5 pin

Diagrams



Date of issue: 06/19/2007

Subject to reasonable modifications due to technical advances.

Copyright Pepperl+Fuchs, Printed in Germany

Pepperl+Fuchs Group • Tel.: Germany +49 621 776-0 • USA +1 330 4253555 • Singapore +65 67799091 • Internet <http://www.pepperl-fuchs.com>
 Courtesy of Steven Engineering, Inc. • 230 Ryan Way, South San Francisco, CA 94080-8370 • General Inquiries: (800) 670-4183 • www.steven.com




Features

- Reliable detection with long service life
- Different operating modes
- Boost function for increasing sensitivity
- Changeable loop frequency
- Display of loop frequency and sensitivity
- Fault display for loop break and loop short circuit
- Test function


Technical data

		LC10-1-D 115 VAC	LC10-1-D 230 VAC	LC10-1-D 24 VAC	LC10-1-D 24 VDC
Marking	CE	◆	◆	◆	◆
Operating mode	Pulsed and continuous signal	◆	◆	◆	◆
Operating elements	DIP-switch	◆	◆	◆	◆
Switching state	LED	◆	◆	◆	◆
Operating voltage	115 V AC (electrically isolated from loop)	◆			
	230 V AC (electrically isolated from loop)		◆		
	24 V AC (electrically isolated from loop)			◆	
	24 V DC (no electrical isolation)				◆
Ripple	-15 %/+10 %	◆	◆	◆	◆
Power consumption	1.6 VA	◆	◆	◆	◆
Settling time	2 s	◆	◆	◆	◆
Loop inductivity	100 ... 1000 µH	◆	◆	◆	◆
Loop frequency	20 ... 120 kHz	◆	◆	◆	◆
Number of channels	1	◆	◆	◆	◆
Switching voltage	250 V AC	◆	◆	◆	◆
Switching current	6 A	◆	◆	◆	◆
Output type	relay	◆	◆	◆	◆
Pulse length	period or 800 ms Pulse	◆	◆	◆	◆
Response time	100 ms	◆	◆	◆	◆
Ambient temperature	-20 ... 70 °C (253 ... 343 K)	◆	◆	◆	◆
Storage temperature	-40 ... 70 °C (233 ... 343 K)	◆	◆	◆	◆
Protection degree	IP30	◆	◆	◆	◆
Connection	Plug socket ; 11-pin Terminal connection ≤ 1.5 mm ²	◆	◆	◆	◆

Dimensions

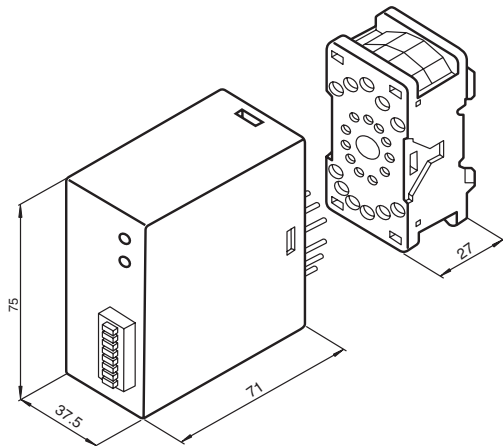

Electrical connection

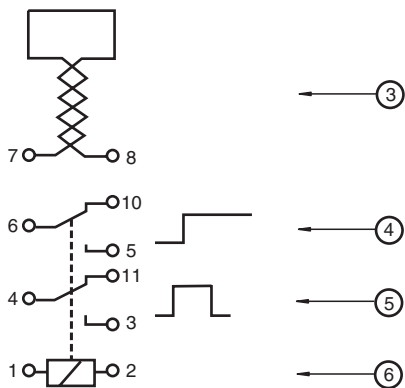

Description

Number	Explanation	Connector terminals
3	Loop connection	7/8
4	Signal output, maintained contact	5/6 = NO 6/10 = NC
5	signal output, pulse contact	3/4 = NO 4/11 = NC
6	Operating voltage	1/2

Date of issue: 06/19/2007

Subject to reasonable modifications due to technical advances.

Copyright Pepperl+Fuchs, Printed in Germany



Features


- Reliable detection with long service life
- Dual inputs
- Boost function for increasing sensitivity
- Changeable loop frequency
- Display of loop frequency and sensitivity
- Fault display for loop break and loop short circuit
- Direction detection
- Test function

Technical data


		LC10-2-D 115 VAC	LC10-2-D 230 VAC	LC10-2-D 24 VAC	LC10-2-D 24VDC
Marking	CE	◆	◆	◆	◆
Operating mode	Continuous signal	◆	◆	◆	◆
Operating elements	DIP-switch	◆	◆	◆	◆
Switching state	LED	◆	◆	◆	◆
Operating voltage	115 V AC (electrically isolated from loop)	◆			
	230 V AC (electrically isolated from loop)		◆		
	24 V AC (electrically isolated from loop)			◆	
	24 V DC (no electrical isolation)				◆
Ripple	-15 %/+10 %	◆	◆	◆	◆
Power consumption	2.2 VA	◆	◆	◆	◆
Settling time	2 s	◆	◆	◆	◆
Loop inductivity	100 ... 1000 µH	◆	◆	◆	◆
Loop frequency	20 ... 120 kHz	◆	◆	◆	◆
Number of channels	2	◆	◆	◆	◆
Switching voltage	250 V AC	◆	◆	◆	◆
Switching current	6 A	◆	◆	◆	◆
Output type	relay	◆	◆	◆	◆
Pulse length	period	◆	◆	◆	◆
Response time	200 ms	◆	◆	◆	◆
Ambient temperature	-20 ... 70 °C (253 ... 343 K)	◆	◆	◆	◆
Storage temperature	-40 ... 70 °C (233 ... 343 K)	◆	◆	◆	◆
Protection degree	IP30	◆	◆	◆	◆
Connection	Plug socket ; 11-pin Terminal connection ≤ 1.5 mm ²	◆	◆	◆	◆



Dimensions

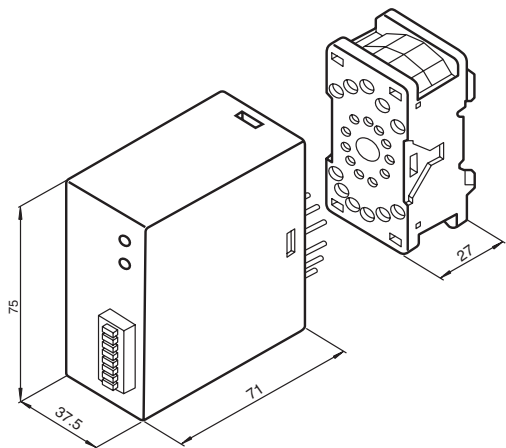

Electrical connection

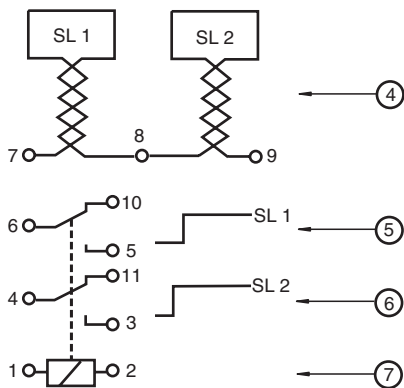

Description

Number	Explanation	Connector terminals
3	Loop connection, Loops 1/2	7/8 = Loop 1 8/9 = Loop 2
4	Signal output, Loop 1	5/6 = NO 6/10 = NC
5	Signal output, Loop 2	3/4 = NO 4/11 = NC
6	Operating voltage	1/2

06/19/2007

Date of issue:

Subject to reasonable modifications due to technical advances.

Copyright Pepperl+Fuchs, Printed in Germany

Pepperl+Fuchs Group • Tel.: Germany +49 621 776-0 • USA +1 330 4253555 • Singapore +65 67799091 • Internet <http://www.pepperl-fuchs.com>

Courtesy of Steven Engineering, Inc. • 230 Ryan Way, South San Francisco, CA 94080-6370 • General Inquiries: (800) 670-4183 • www.stevenengineering.com

Sensors for automatic doors,
incl buses and trains

Sensors for industrial gates,
fire protection light barriers

Sensors for elevators

Accessories



Features

- Retroreflective sensor for safety devices on fire protection enclosures (Fire doors)
- Ultra bright LEDs for power on, stability control and switching state
- Not sensitive to ambient light, even with switched energy saving lamps
- Multiple device installation possible, no mutual interference
- Approval in accordance with VdS Test Report FSA and externally monitored manufacture (Ü Symbol)
- Sturdy housing, high grade surface
- Waterproof, protection class IP67
- High protection against contact


Technical data

Effective detection range	0 ... 2.1 m (with H60 reflector)	◆
Reflector distance	0.2 ... 2.1 m	◆
Light source	LED, 660 nm	◆
Approvals	CE	◆
USA	UL	◆
Kanada	UL	◆
Reference target	H60 reflector	◆
Light type	red, modulated light	◆
Diameter of the light spot	approx. 70 mm	◆
Angle of divergence	1.5 °	◆
Ambient light limit	50000 Lux	◆
Operating display	LED green, flashes in case of short-circuit	◆
Function display	2 LEDs yellow, light up when light beam is free, flash when falling short of the stability control, off when light beam is interrupted	◆
Operating elements	rotary switch for light/dark	◆
Operating voltage	10 ... 30 V DC	◆
Protection class	2 in acc. with VDE	◆
Ripple	max. 10 %	◆
No-load supply current	max. 40 mA	◆
Control input		
Switching type	Light/dark ON, switchable	◆
Signal output	1 NPN and 1 PNP output, direct switching, short-circuit proof, protected from reverse polarity, open collector	◆
Switching voltage	max. 30 V DC	◆
Switching current	max. 0.2 A	◆
Voltage drop	≤ 2.5 V DC	◆
Switching frequency	≤ 40 Hz	◆
Response time	10 ms	◆
Standards	EN 60947-5-2	◆
Ambient temperature	-40 ... 60 °C (233 ... 333 K)	◆
Storage temperature	-40 ... 75 °C (233 ... 348 K)	◆
Protection degree	IP67	◆
Connection	connector, 5-pin with metal thread M12 x 1, may be rotated 90°	◆
Housing	Frame: die-cast zinc, nickel-plated Laterals: plastic PC, glass-fiber reinforced	◆
Optical face	Plastic pane	◆
Mass	60 g	◆

MLV12-54-2563/49/124

Date of issue: 06/19/2007



Dimensions

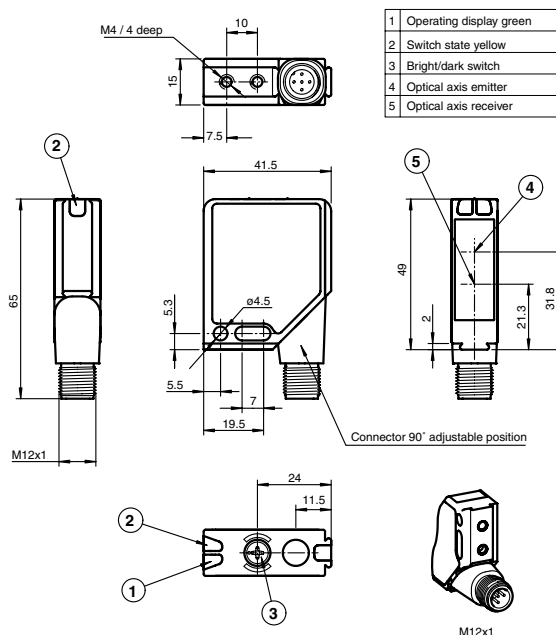

Electrical connection

Connection type


Option /49/124

Option 124
plug M12, 5 pin

Diagrams


Characteristic response curve

MLV12-54-2563

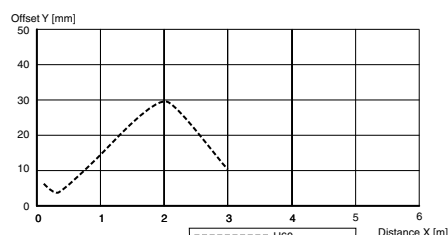

Relative received light strength

MLV12-54-2563

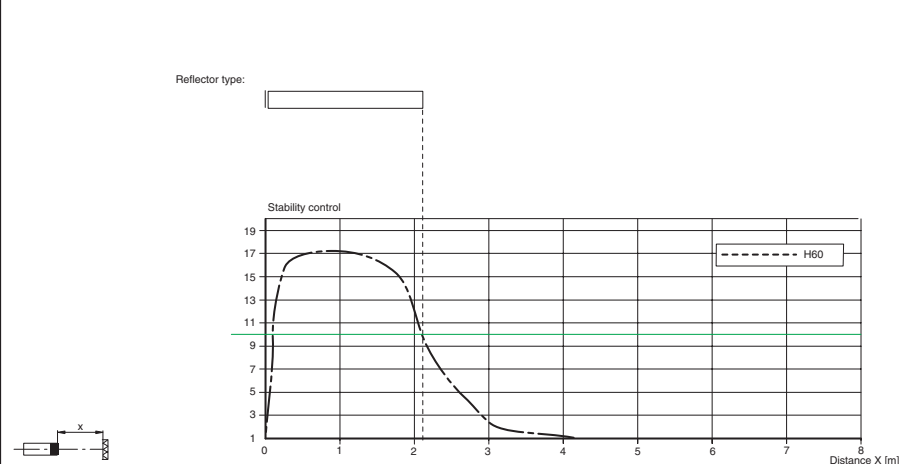

Date of issue: 06/19/2007

Subject to reasonable modifications due to technical advances.

Copyright Pepperl+Fuchs, Printed in Germany





Here, two different areas are differentiated. Firstly personal protection, and secondly the exact positioning of the cage.

Protection description

Glass elevators, standing for modern design and innovative technology, require a pinch protection which suits the shape and operation of the elevator door and provides optimum safety. We offer specially developed sensors for passenger and comfort elevators.

In our elevator light grids we combine a slim design with high functional scope. The automatic beam crossing creates e.g. a grid of up to 135 detection beams. The capture of items, animals or people is guaranteed until the door fully closes.

Light barriers are simple and affordable options for protecting the cabin door. Extra slim housings permit the installation in tight spaces in the door frame or in other gaps. Different principles of operation and devices for low or multiple voltages are available.

Positioning description

The determination of distances is one of the basic sensor technologies.

This technology is used for cabin positioning.

	Type code	Principle of operation	Application areas	Page
	AL2109-P-1820/136/143	Light grids for elevators	Closing edge monitoring in elevator doors	74
	AL2012-P-1650/49/76a AL2016-P-1650/49/76a AL4012-P-1650/49/76a AL4016-P-1650/49/76a			76
	RL91-54-RT/25/49/115 RL91-54-RT/38a/59/115 RL91-54-RT/49/59/115 RLK91-54-RT/31/59/115	Retroreflective sensors with polarization filter	Single beam closing edge monitoring in elevator doors	78
	RL91-6-IR/25/38a/115 RL91-6-IR/25/49/115 RL91-6-IR/38a/59/115 RL91-6-IR/49/59/115 RLK91-6-IR/25/31/115 RLK91-6-IR/31/59/115	Retroreflective sensors with long range		82
	FLT-8-H-2800-300/120a FLT-8-H-2800-300/25/31 FLT-8-H-2800-50/120a FLT-8-H-2800-50/25/31 FLT-8-H-2800-500/120a FLT-8-H-2800-500/59/101 FLT-8-H-2800-500/59/31	Area scanner with back-ground suppression	Vestibule/cabin monitoring	86
	FLT-8-HW-2800-300/25/31 FLT-8-HW-2800-50/25/31 FLT-8-HW-2800-50/31/59 FLT-8-HW-2800-500/25/31 FLT-8-HW-2800-500/59/101	Area scanner with back-ground evaluation		88
	VDM70-10-L VDM70-250-R	Distance measurement device	Cage positioning	90



Features

- Object detection up to distance of zero
- Dense monitoring field with up to 135 beams
- Automatic crossing of beams
- Automatic beam suppression
- Ambient light limit > 100,000 Lux
- Protected M8 connector
- In accord with EN81-70 and EN12015/16
- Various possibilities for mounting
- Profile width 9 mm


Technical data

Effective detection range	0 ... 3500 mm	◆
Light source	IREC 950 nm	◆
Approvals	CE	◆
Field height	1800 mm	◆
Chipping	automatic, 3x/5x/7x (depending on distance between transmitter/receiver)	◆
Tuning-out of beam	Defective beams are faded out after 60 s. Deactivation of the light grid upon failure of 2 adjacent beams or more than 50 % of all beams	◆
Beam spacing	90 mm	◆
Number of beams	61 ... 135 (dynamic)	◆
Light type	infrared, modulated light	◆
Angle of divergence	Emitter: < 20 °, Receiver: < 6 °	◆
Ambient light limit	> 100000 Lux	◆
Function display	LED red (in receiver): Illuminates after connecting operating power, out when object is detected, flashes in case of permanent interruption of 2 neighbouring beams	◆
Operating voltage	11 ... 30 V DC	◆
Ripple	10 %	◆
No-load supply current	< 180 mA	◆
Switching type	Light/dark ON selectable programmable	◆
Signal output	1 PNP and 1 NPN, short-circuit proof	◆
Switching voltage	max. 30 V DC	◆
Switching current	100 mA	◆
Switching frequency	< 3 Hz	◆
Response time	< 100 ms	◆
Standards	EN 12015, EN 12016	◆
Ambient temperature	-10 ... 60 °C (263 ... 333 K)	◆
Storage temperature	-20 ... 65 °C (253 ... 338 K)	◆
Protection degree	IP54	◆
Connection	Connector, male	◆
Housing	aluminium	◆
Optical face	plastic	◆
Mass	2000 g (device)	◆

AL2109-P-1820/40b/49/143

Date of issue: 06/19/2007


Dimensions

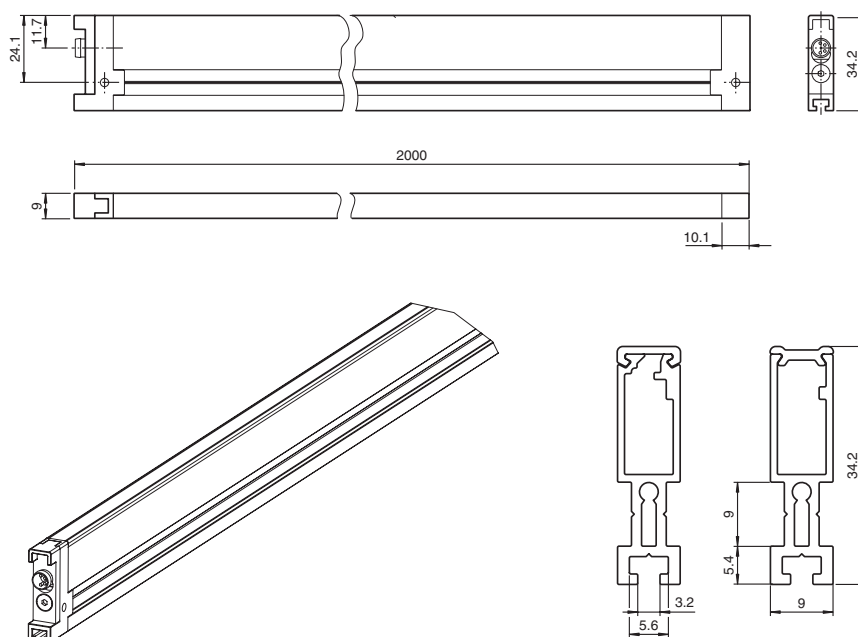


Electrical connection

Connection type


Option /40b/49/143
Receiver



Emitter



Don't leave
input floating!



Option 143
plug M8, 4 pin

Functional description

The preferred use of the AL2109 light grid is access monitoring in elevators. It consists of a transmitter and receiver unit. The entire electronic evaluation system as well as the power supply is integrated into the device. No additional external components are required for operation.

The light grid is equipped with automatic switching from 7x to 5x to 3x crossing in its standard design. At a distance of more than 0.8 m between transmitter and receiver, the light grid selects the "7x crossing" operating mode. In this operating mode, each receiver evaluates the beams of 7 transmitters. In this manner, 7x crossing increases resolution to 135 beams.

The red LED in the top end of the receiver is continuously lit after the operating voltage is applied. This indicates the light grid is ready for operation.

When an object is detected, the red LED turns off until the light beams are no longer interrupted.

The AL2109 elevator light grid is equipped with beam masking. If one of the 21 transmitters or receivers is continuously covered (for example by dirt or sticking), that beam is taken out of the evaluation after 60 seconds. It is removed from the programming and the light grid is again ready for operation. The light grid does not indicate continuous detection until 2 adjacent beams or more than half of all beams fail. This state is indicated by the red LED, which in this case flashes.

Date of issue: 06/19/2007

Subject to reasonable modifications due to technical advances.

Copyright Pepperl+Fuchs, Printed in Germany




Features

- Automatic crossing of beams
- High resolution
- 7-segment display for status and service functions
- Integrated control and power supply unit (12 V DC ... 30 V DC)
- Automatic adaptation of operation mode (1;3 or 5-fold chipping)
- Various possibilities for mounting (lateral or at the rear over the complete length)
- Mirroring proof
- Profile width 12 mm and 16 mm

Technical data

		AL2012-P-1650/49/76a	AL2016-P-1650/49/76a	AL4012-P-1650/49/76a	AL4016-P-1650/49/76a
Effective detection range	0 ... 4000 mm	◆	◆	◆	◆
Threshold detection range	5600 mm	◆	◆	◆	◆
Light source	IREL	◆	◆	◆	◆
Approvals	CE	◆	◆	◆	◆
Field height	1605 mm	◆	◆		
	1650 mm			◆	◆
Chipping	automatically 1X/5X (depending on distance between transmitter/receiver)	◆	◆	◆	◆
Tuning-out of beam	Defective beams are faded out after 60 s. Deactivation of the light grid upon failure of 2 adjacent beams or more than 50 % of all beams	◆	◆	◆	◆
Beam spacing	lower range: 20 mm upper range: 44 mm			◆	◆
	lower range: 40 mm upper range: 88 mm	◆	◆		
Number of beams	20 ... 94 (dynamic)	◆	◆		
	40 ... 194 (dynamically)			◆	◆
Light type	infrared, 940 nm	◆	◆	◆	◆
Angle of divergence	Emitter: > 20 °, Receiver: > 10 °	◆	◆	◆	◆
Ambient light limit	16000 Lux	◆	◆	◆	◆
Function display	7-segment display in receiver display function can be activated: switching status, self test and alignment aid	◆	◆	◆	◆
Operating voltage	12 ... 30 V DC	◆	◆	◆	◆
Ripple	10 %	◆	◆	◆	◆
No-load supply current	< 150 mA	◆	◆	◆	◆
Switching type	Light/dark ON selectable programmable	◆	◆	◆	◆
Signal output	1 PNP and 1 NPN, short-circuit proof	◆	◆	◆	◆
Switching voltage	max. 30 V DC	◆	◆	◆	◆
Switching current	200 mA	◆	◆	◆	◆
Switching frequency	> 1 Hz	◆	◆	◆	◆
Response time	< 220 ms	◆	◆	◆	◆
Standards	EN 12015, EN 12016	◆	◆	◆	◆
Ambient temperature	-10 ... 60 °C (263 ... 333 K)	◆	◆	◆	◆
Storage temperature	-20 ... 75 °C (253 ... 348 K)	◆	◆	◆	◆
Protection degree	IP65	◆	◆	◆	◆
Connection	5 m fixed cable (appropriate for conveyor chains, according to UL E140404, 600 V rated insulation voltage, 90° C)	◆	◆	◆	◆
Housing	aluminium	◆	◆	◆	◆
Optical face	plastic	◆	◆	◆	◆
Mass	2000 g (device)	◆	◆	◆	◆


Dimensions

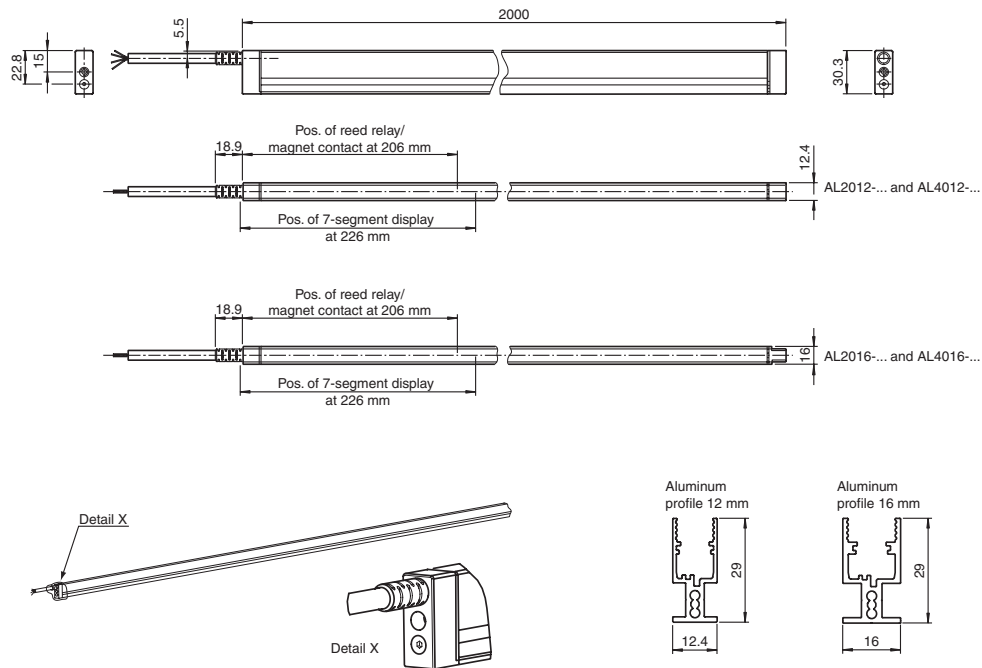


Electrical connection

Connection type


Option /49/76a
Receiver









Emitter



Don't leave test
input floating!




Description



Subject to reasonable modifications due to technical advances.

Copyright Pepperl+Fuchs, Printed in Germany




Features

- Retroreflective sensor for single-beam closing edge protection
- Sturdy and compact design
- Optimal price/power ratio
- Various possibilities for mounting

Technical data




		RL91-54-RT/25/38a/73c	RL91-54-RT/25/49/115	RL91-54-RT/38a/59/115	RL91-54-RT/38a/59/73c	RL91-54-RT/49/59/115	RL91-54-RT/49/59/73c
Effective detection range	0 ... 4 m	◆	◆	◆	◆	◆	◆
Reflector distance	0.2 ... 4000 mm	◆	◆	◆	◆	◆	◆
Threshold detection range	8 m (with H85 reflector)	◆	◆	◆	◆	◆	◆
Light source	LED	◆	◆	◆	◆	◆	◆
Approvals	CE	◆	◆	◆	◆	◆	◆
USA	cULus	◆	◆	◆	◆	◆	◆
Kanada	cULus	◆	◆	◆	◆	◆	◆
Light type	red, modulated light	◆	◆	◆	◆	◆	◆
Diameter of the light spot	approx. 160 mm at a distance of 4000 mm	◆	◆	◆	◆	◆	◆
Angle of divergence	approx. 2.5 °	◆	◆	◆	◆	◆	◆
Ambient light limit	90000 Lux	◆	◆	◆	◆	◆	◆
Function display	LED red, flashes when falling short of the stability control	◆	◆	◆	◆	◆	◆
Operating voltage	12 ... 30 V DC	◆	◆	◆	◆	◆	◆
	12 ... 30 V DC / 18 ... 28 V AC	◆	◆	◆	◆	◆	◆
No-load supply current	< 100 mA	◆	◆	◆	◆	◆	◆
Switching type	dark ON	◆	◆	◆	◆	◆	◆
	light ON	◆	◆	◆	◆	◆	◆
Signal output	Weak current relay, 1 NC	◆	◆	◆	◆	◆	◆
	Weak current relay, 1 alternator	◆	◆	◆	◆	◆	◆
	1 npn, 1 pnp synchronised-switching, short-circuit proof, protected against reverse polarity	◆	◆	◆	◆	◆	◆
Switching voltage	max. 125 V AC	◆	◆	◆	◆	◆	◆
	max. 30 V DC	◆	◆	◆	◆	◆	◆
Switching current	1 A / 24 V DC, 0.5 A / 110 V AC	◆	◆	◆	◆	◆	◆
	200 mA	◆	◆	◆	◆	◆	◆
Switching frequency	25 Hz	◆	◆	◆	◆	◆	◆
Response time	20 ms	◆	◆	◆	◆	◆	◆
Standards	EN 60947-5-2	◆	◆	◆	◆	◆	◆
Ambient temperature	-20 ... 55 °C (253 ... 328 K)	◆	◆	◆	◆	◆	◆
Storage temperature	-20 ... 75 °C (253 ... 348 K)	◆	◆	◆	◆	◆	◆
Protection degree	IP65	◆	◆	◆	◆	◆	◆
Connection	M12 connector, 4-pin	◆	◆	◆	◆	◆	◆
	5 m fixed cable	◆	◆	◆	◆	◆	◆
Housing	Luran	◆	◆	◆	◆	◆	◆
Optical face	glass	◆	◆	◆	◆	◆	◆
Mass	100 g	◆	◆	◆	◆	◆	◆

Dimensions

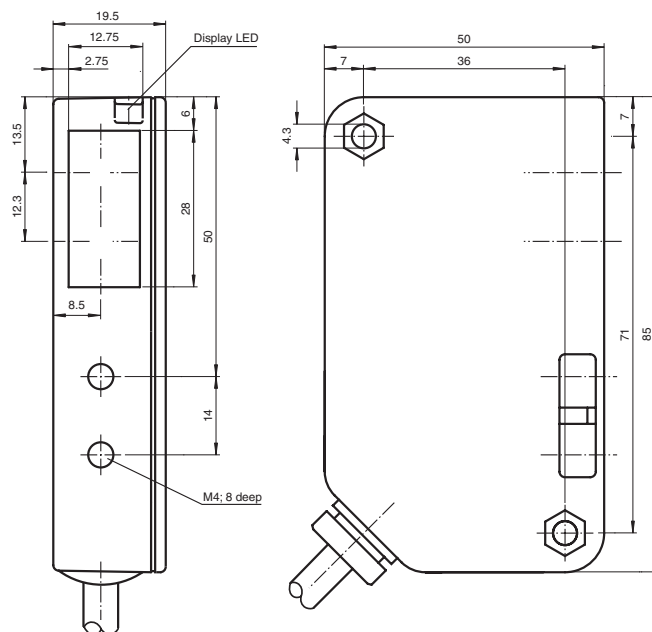

Electrical connection


Connection type

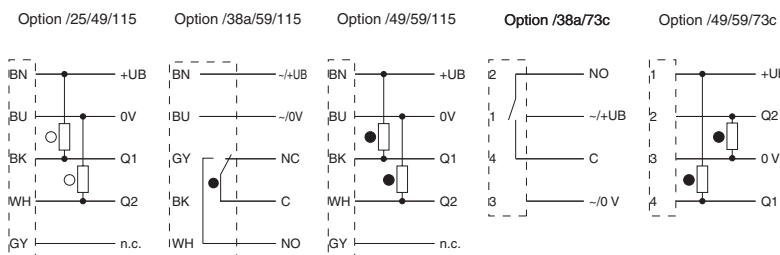

Diagrams

Characteristic response curve

RL(K)91-54

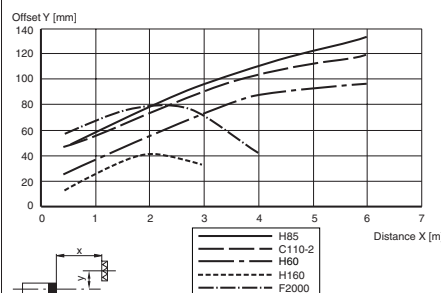

Relative received light strength

Reflector type:


H85 (80 mm x 80 mm)

C110_2 (a = 84 mm)


H60 (60 mm x 40 mm)


F2000 (Foil, 100 mm x 100 mm)

H160 (60 mm x 18 mm)

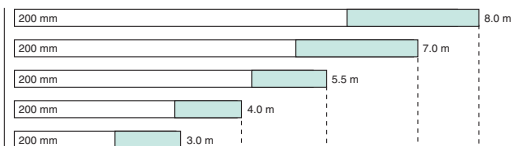

Stability control

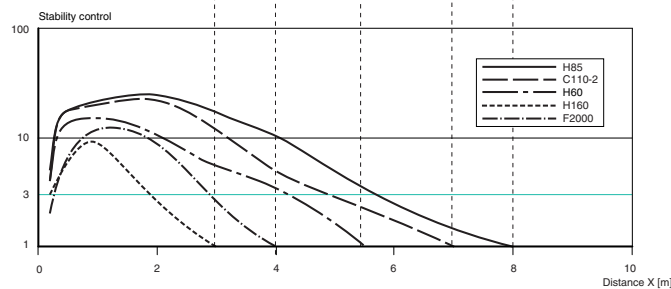



Features

- Retroreflective sensor for single-beam closing edge protection
- Sturdy and compact design
- Optimal price/power ratio
- Various possibilities for mounting


Technical data

Effective detection range	0 ... 4 m	◆
Reflector distance	0.2 ... 4000 mm	◆
Threshold detection range	7 m (with H85 reflector)	◆
Light source	LED	◆
Approvals	CE	◆
USA	cULus	◆
Kanada	cULus	◆
Light type	red, modulated light	◆
Diameter of the light spot	approx. 160 mm at a distance of 4000 mm	◆
Angle of divergence	approx. 2.5 °	◆
Ambient light limit	90000 Lux	◆
Function display	LED red, flashes when falling short of the stability control	◆
Operating voltage	96 ... 264 V AC	◆
Power consumption	12 VA	◆
Switching type	dark ON	◆
Signal output	Weak current relay, 1 alternator	◆
Switching voltage	max. 240 V AC	◆
Switching current	2.5 A / 240 V AC	◆
Switching frequency	25 Hz	◆
Response time	20 ms	◆
Standards	EN 60947-5-2	◆
Ambient temperature	-20 ... 55 °C (253 ... 328 K)	◆
Storage temperature	-20 ... 75 °C (253 ... 348 K)	◆
Protection degree	IP65	◆
Connection	5 m fixed cable	◆
Housing	Luran	◆
Optical face	glass	◆
Mass	100 g	◆

RLK91-54-RT/31/59/115


Date of issue: 06/19/2007

Dimensions

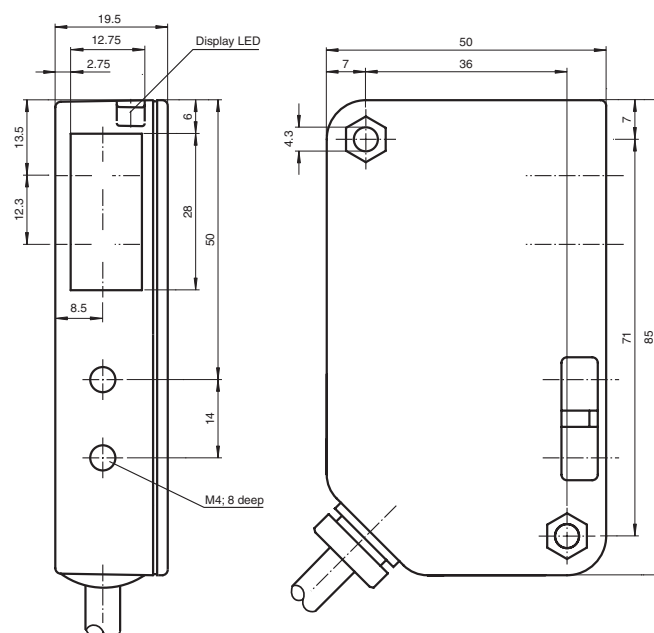


Electrical connection

Option /31/59/115





Connection type



Option 115
fixed cable

Diagrams

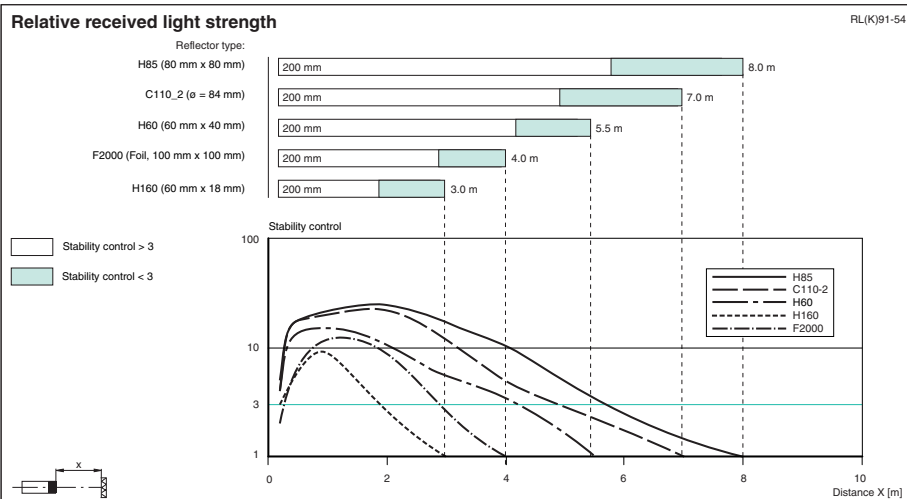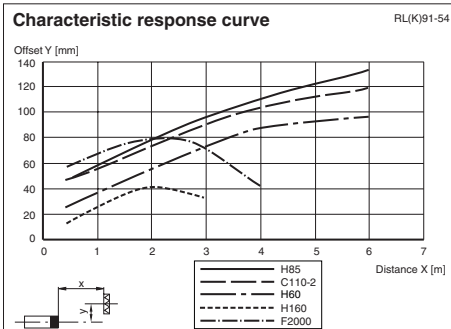

Subject to reasonable modifications due to technical advances.

Copyright Pepperl+Fuchs, Printed in Germany

Pepper+Fuchs Group • Tel.: Germany +49 621 776-0 • USA +1 330 4253555 • Singapore +65 67799091 • Internet <http://www.pepper-fuchs.com>
 Courtesy of Steven Engineering, Inc. • 230 Ryan Way, South San Francisco, CA 94080-6370 • General Inquiries: (800) 670-4183 • www.stevenengineering.com


Sensors for automatic doors, incl buses and trains

Sensors for industrial gates, fire protection light barriers

Sensors for elevators

Accessories

Date of issue: 06/19/2007




Features

- Retroreflective sensor for single-beam closing edge protection
- Sturdy and compact design
- Infrared light
- Optimal price/power ratio
- Various possibilities for mounting

Technical data

		RL91-6-IR/25/38a/115	RL91-6-IR/25/49/115	RL91-6-IR/38a/59/115	RL91-6-IR/38a/59/73c	RL91-6-IR/49/59/115	RL91-6-IR/49/59/73c
Effective detection range	0 ... 6 m	◆	◆	◆	◆	◆	◆
Reflector distance	0 ... 6 m	◆	◆	◆	◆	◆	◆
Threshold detection range	9 m (with H85 reflector)	◆	◆	◆	◆	◆	◆
Light source	LED	◆	◆	◆	◆	◆	◆
Approvals	CE	◆	◆	◆	◆	◆	◆
USA	cULus	◆	◆	◆	◆	◆	◆
Canada	cULus	◆	◆	◆	◆	◆	◆
Light type	infrared, modulated light	◆	◆	◆	◆	◆	◆
Diameter of the light spot	approx. 230 mm at a distance of 6000 mm	◆	◆	◆	◆	◆	◆
Angle of divergence	approx. 2.5 °	◆	◆	◆	◆	◆	◆
Ambient light limit	90000 Lux	◆	◆	◆	◆	◆	◆
Function display	LED red, flashes when falling short of the stability control	◆	◆	◆	◆	◆	◆
Operating voltage	12 ... 30 V DC		◆			◆	◆
	12 ... 30 V DC / 18 ... 28 V AC			◆			◆
No-load supply current	< 100 mA	◆	◆	◆	◆	◆	◆
Switching type	dark ON			◆	◆	◆	◆
	light ON	◆	◆				
Signal output	Weak current relay, 1 NC				◆		
	Weak current relay, 1 alternator	◆		◆			
	1 npn, 1 pnp synchronised-switching, short-circuit proof, protected against reverse polarity		◆			◆	◆
Switching voltage	max. 125 V AC	◆		◆	◆		
	max. 30 V DC		◆			◆	◆
Switching current	1 A / 24 V DC, 0.5 A / 110 V AC	◆		◆	◆		
	200 mA		◆			◆	◆
Switching frequency	25 Hz	◆	◆	◆	◆	◆	◆
Response time	20 ms	◆	◆	◆	◆	◆	◆
Standards	EN 60947-5-2	◆	◆	◆	◆	◆	◆
Ambient temperature	-20 ... 55 °C (253 ... 328 K)	◆	◆	◆	◆	◆	◆
Storage temperature	-20 ... 75 °C (253 ... 348 K)	◆	◆	◆	◆	◆	◆
Protection degree	IP65	◆	◆	◆	◆	◆	◆
Connection	M12 connector, 4-pin				◆		◆
	5 m fixed cable	◆	◆	◆		◆	
Housing	Luran	◆	◆	◆	◆	◆	◆
Optical face	Luran	◆	◆	◆	◆	◆	◆
Mass	100 g	◆	◆	◆	◆	◆	◆


Dimensions

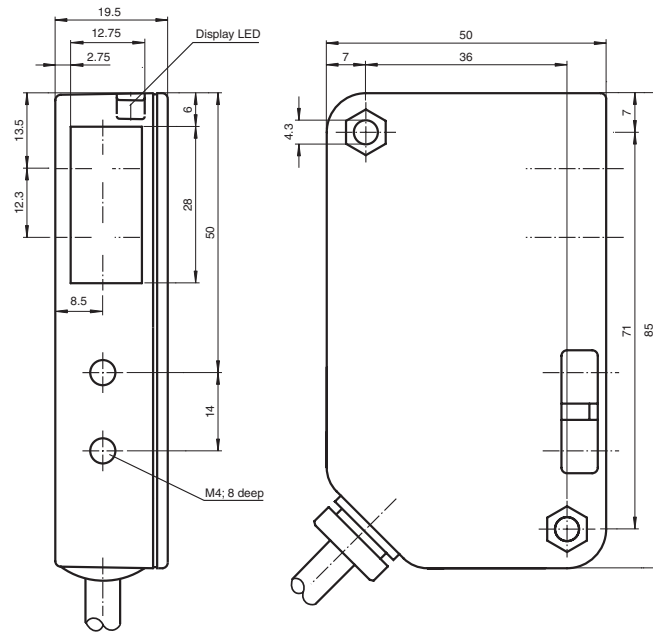


Electrical connection

Connection type


Option /25/49/115




Option /38a/59/115




Option /25/38a/115






Option /49/59/115



Option /38a/73c




Option /49/59/73c



Diagrams


Characteristic response curve

RL(K)91-6

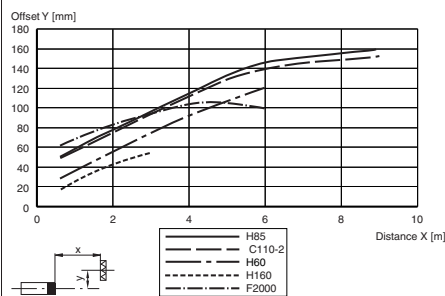

Relative received light strength


RL(K)91-6

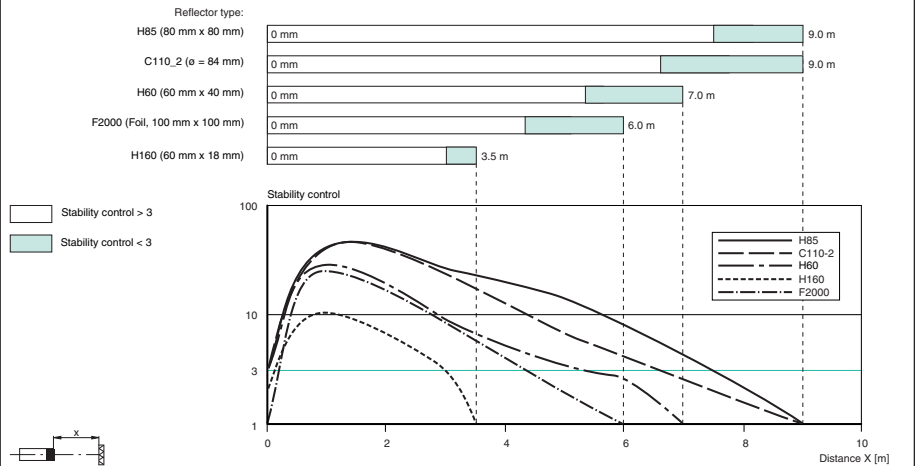

Date of issue: 06/19/2007

Subject to reasonable modifications due to technical advances.

Copyright Pepperl+Fuchs, Printed in Germany




Features

- Retroreflective sensor for single-beam closing edge protection
- Sturdy and compact design
- Infrared light
- Optimal price/power ratio
- Various possibilities for mounting

Technical data

		RLK91-6-IR/25/31/115	RLK91-6-IR/31/59/115
Effective detection range	0 ... 6 m	◆	◆
Reflector distance	0 ... 6 m	◆	◆
Threshold detection range	9 m (with H85 reflector)	◆	◆
Light source	LED	◆	◆
Approvals	CE	◆	◆
USA	cULus	◆	◆
Canada	cULus	◆	◆
Light type	infrared, modulated light	◆	◆
Diameter of the light spot	approx. 230 mm at a distance of 6000 mm	◆	◆
Angle of divergence	approx. 2.5 °	◆	◆
Ambient light limit	90000 Lux	◆	◆
Function display	LED red, flashes when falling short of the stability control	◆	◆
Operating voltage	96 ... 264 V AC	◆	◆
Power consumption	12 VA	◆	◆
Switching type	dark ON	◆	◆
	light ON	◆	◆
Signal output	Weak current relay, 1 alternator	◆	◆
Switching voltage	max. 240 V AC	◆	◆
Switching current	2.5 A / 240 V AC	◆	◆
Switching frequency	25 Hz	◆	◆
Response time	20 ms	◆	◆
Standards	EN 60947-5-2	◆	◆
Ambient temperature	-20 ... 55 °C (253 ... 328 K)	◆	◆
Storage temperature	-20 ... 75 °C (253 ... 348 K)	◆	◆
Protection degree	IP65	◆	◆
Connection	5 m fixed cable	◆	◆
Housing	Luran	◆	◆
Optical face	Luran	◆	◆
Mass	100 g	◆	◆

Dimensions


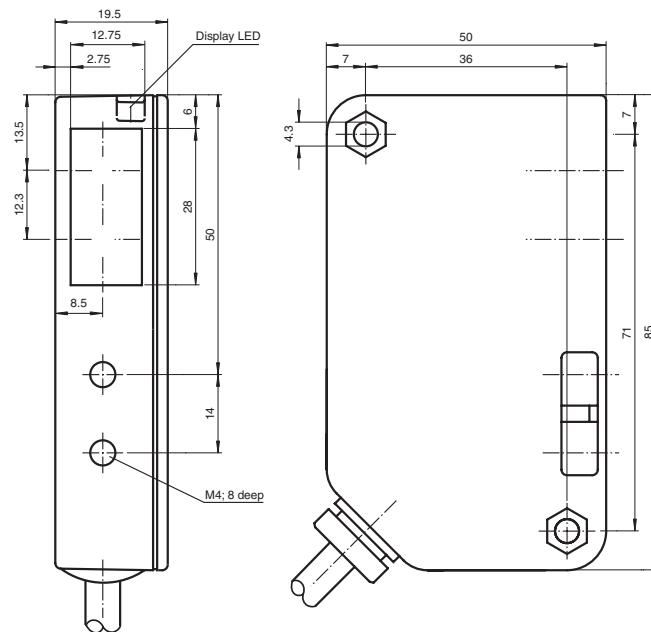


Electrical connection

Connection type

Option /25/31/115


Option /31/59/115



Diagrams


Characteristic response curve

RL(K)91-6

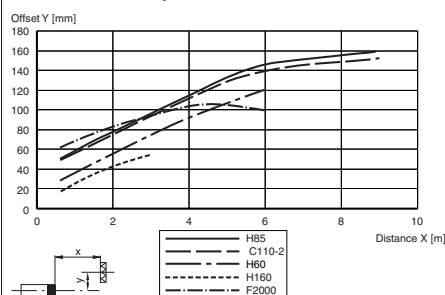

Relative received light strength

RL(K)91-6

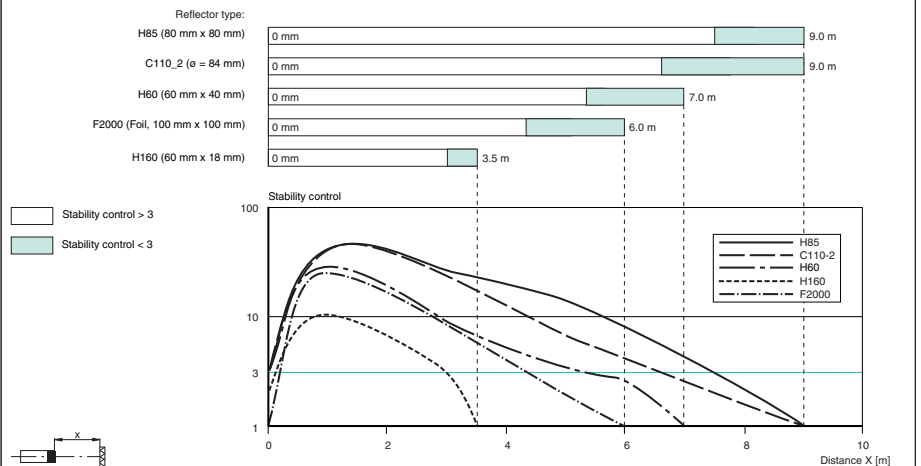Sensors for automatic doors,
incl buses and trainsSensors for industrial gates,
fire protection light barriers


Sensors for elevators

Accessories

Date of issue: 06/19/2007

Subject to reasonable modifications due to technical advances.

Copyright Pepperl+Fuchs, Printed in Germany



Features


- High operating distance
- Background suppression
- Protection degree IP65

Technical data

		FLT-8-H-2800-300/120a	FLT-8-H-2800-300/25/31	FLT-8-H-2800-500/120a	FLT-8-H-2800-500/59/101	FLT-8-H-2800-500/59/31	FLT-8-H-2800-50/120a	FLT-8-H-2800-50/25/31
Detection field	300 mm x 500 mm at 2000 mm sensor range	◆	◆					
	50 mm x 500 mm at 2000 mm sensor range						◆	◆
	500 mm x 500 mm at 2000 mm sensor range			◆	◆	◆		
Detection range min.	100 ... 1200 mm	◆	◆	◆	◆	◆	◆	◆
Detection range max.	100 ... 2800 mm	◆	◆	◆	◆	◆	◆	◆
Light source	3 x IRED						◆	◆
	4 x IRED	◆	◆	◆	◆	◆		
Light spot representation	43 mm x 43 mm at 2000 mm	◆	◆	◆	◆	◆	◆	◆
Marking	CE	◆	◆	◆	◆	◆	◆	◆
Operating mode	Background suppression	◆	◆	◆	◆	◆	◆	◆
Light type	infrared, modulated light	◆	◆	◆	◆	◆	◆	◆
Function display	LED red	◆	◆	◆	◆	◆	◆	◆
Operating elements	sensing range adjuster	◆	◆	◆	◆	◆	◆	◆
Operating voltage	15 ... 48 V AC/DC		◆				◆	◆
	15 ... 48 V DC	◆		◆	◆		◆	
No-load supply current	100 mA	◆	◆	◆	◆	◆	◆	◆
Power consumption	2.5 W	◆	◆	◆	◆	◆	◆	◆
Switching type	dark ON				◆	◆		
	light/dark switching	◆	◆	◆			◆	
	light ON		◆					◆
Signal output	Relay, 1 alternator		◆			◆		◆
	1 pnp and 1 npn short-circuit proof, open collector, synchronized-switching				◆			
	2 pnp, antivalent, short-circuit proof, open collectors	◆		◆			◆	
Switching voltage	≤ 250 V AC/DC		◆			◆		◆
	48 V DC	◆		◆	◆		◆	
Switching current	≤ 2 A		◆			◆		◆
	200 mA	◆		◆	◆		◆	
Response time	100 ms	◆	◆	◆	◆	◆	◆	◆
Standards	EN 60947-5-2	◆	◆	◆	◆	◆	◆	◆
Standards 2	EN 61000-6-2 without EN 61000-4-5, EN 61000-4-11	◆	◆	◆	◆	◆	◆	◆
Standards 3	EN 61000-6-3	◆	◆	◆	◆	◆	◆	◆
Ambient temperature	-20 ... 60 °C (253 ... 333 K)	◆	◆	◆	◆	◆	◆	◆
Storage temperature	-20 ... 75 °C (253 ... 348 K)	◆	◆	◆	◆	◆	◆	◆
Mounting height	max. 2800	◆	◆	◆	◆	◆	◆	◆
Protection degree	IP65	◆	◆	◆	◆	◆	◆	◆
Connection	Connector, with 2 m cable connector	◆	◆	◆	◆	◆	◆	◆
Housing	Makrolon GV30 black	◆	◆	◆	◆	◆	◆	◆
Optical face	glass, red	◆	◆	◆	◆	◆	◆	◆
Mass	320 g	◆	◆	◆	◆	◆	◆	◆



Date of issue: 06/19/2007

Dimensions

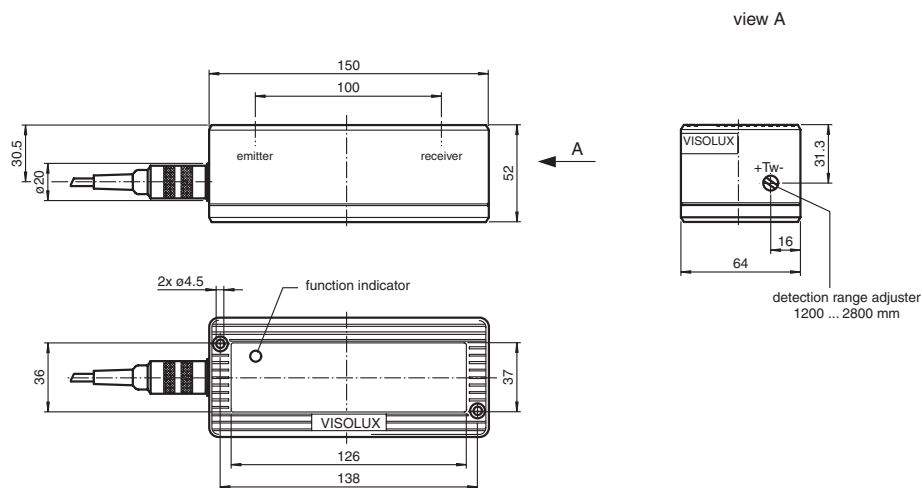

Electrical connection


Connection type

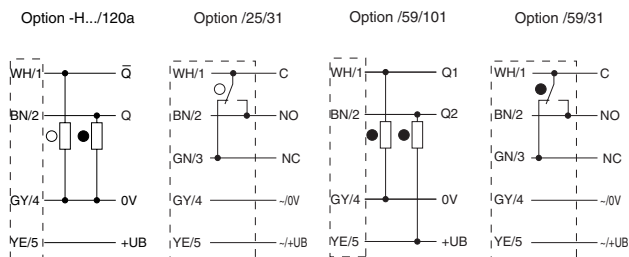

plug M12, 5 pin

Diagrams


Size of detection field
FLT...-50

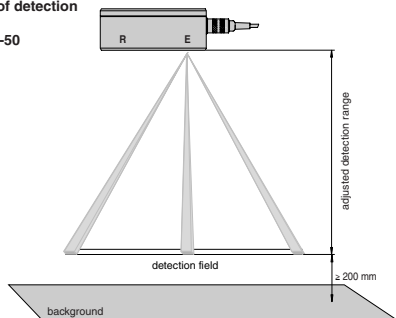

Detection field size versus adjusted detection range:

detect. field	detection field size	spot size
1500 mm	380 mm x 38 mm	30 mm x 30 mm
1800 mm	450 mm x 50 mm	35 mm x 35 mm
2000 mm	500 mm x 50 mm	43 mm x 43 mm
2500 mm	610 mm x 61 mm	57 mm x 57 mm
2800 mm	685 mm x 68 mm	64 mm x 64 mm


Size of detection field
FLT...300

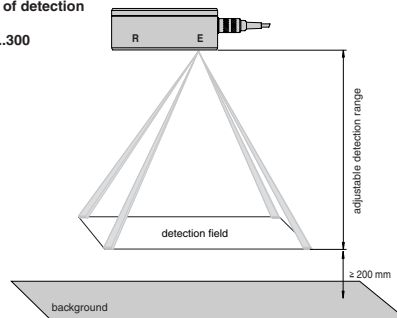

Detection field size versus adjusted detection range:

detect. range	detection field size	spot size
1500 mm	380 mm x 220 mm	30 mm x 30 mm
1800 mm	450 mm x 270 mm	35 mm x 35 mm
2000 mm	500 mm x 300 mm	43 mm x 43 mm
2500 mm	610 mm x 370 mm	57 mm x 57 mm
2800 mm	685 mm x 415 mm	64 mm x 64 mm

Size of detection field
FLT...-500

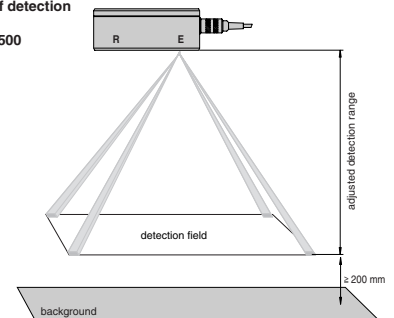


Detection field size versus adjusted detection range:

detect. field	detection field size	spot size
1500 mm	380 mm x 380 mm	30 mm x 30 mm
1800 mm	450 mm x 450 mm	35 mm x 35 mm
2000 mm	500 mm x 500 mm	43 mm x 43 mm
2500 mm	610 mm x 610 mm	57 mm x 57 mm
2800 mm	685 mm x 685 mm	64 mm x 64 mm

Date of issue: 06/19/2007

Subject to reasonable modifications due to technical advances.

Copyright Pepperl+Fuchs, Printed in Germany



Features


- High operating distance
- Possible detection range down to 0 m
- Background evaluation
- Reliable detection even of difficult objects by means of background evaluation
- Protection degree IP65

Technical data

		FLT-8-HW-2800-300/25/31	FLT-8-HW-2800-50/25/31	FLT-8-HW-2800-50/31/59	FLT-8-HW-2800-500/25/31	FLT-8-HW-2800-500/59/101
Detection field	300 mm x 500 mm at 2000 mm sensor range	◆				
	50 mm x 500 mm at 2000 mm sensor range		◆	◆		
	500 mm x 500 mm at 2000 mm sensor range				◆	◆
Detection range min.	0 ... 1200 mm	◆	◆	◆	◆	◆
Detection range max.	0 ... 2800 mm	◆	◆	◆	◆	◆
Light source	3 x IRED		◆	◆		
	4 IRED	◆			◆	◆
Light spot representation	43 mm x 43 mm at 2000 mm	◆	◆	◆	◆	◆
Marking	CE	◆	◆	◆	◆	◆
Operating mode	Background evaluation	◆	◆	◆	◆	◆
Light type	infrared, modulated light	◆	◆	◆	◆	◆
Function display	LED red	◆	◆	◆	◆	◆
Operating elements	sensing range adjuster	◆	◆	◆	◆	◆
Operating voltage	15 ... 48 V AC/DC	◆	◆	◆	◆	
	15 ... 48 V DC					◆
No-load supply current	100 mA	◆	◆	◆	◆	◆
Power consumption	2.5 W	◆	◆	◆	◆	◆
Switching type	dark ON			◆		◆
	light ON	◆	◆		◆	
Signal output	Relay, 1 alternator	◆	◆	◆	◆	
	1 pnp and 1 npn short-circuit proof, open collector, synchronized-switching					◆
Switching voltage	≤ 250 V AC/DC	◆	◆	◆	◆	
	48 V DC					◆
Switching current	≤ 2 A	◆	◆	◆	◆	
	200 mA					◆
Response time	100 ms	◆	◆	◆	◆	◆
Standards	EN 60947-5-2	◆	◆	◆	◆	◆
Standards 2	EN 61000-6-2 without EN 61000-4-5, EN 61000-4-11	◆	◆	◆	◆	◆
Standards 3	EN 61000-6-3	◆	◆	◆	◆	◆
Ambient temperature	-20 ... 60 °C (253 ... 333 K)	◆	◆	◆	◆	◆
Storage temperature	-20 ... 75 °C (253 ... 348 K)	◆	◆	◆	◆	◆
Mounting height	max. 2800	◆	◆	◆	◆	◆
Protection degree	IP65	◆	◆	◆	◆	◆
Connection	Connector, with 2 m cable connector	◆	◆	◆	◆	◆
Housing	Makrolon GV30 black	◆	◆	◆	◆	◆
Optical face	glass, red	◆	◆	◆	◆	◆
Mass	320 g	◆	◆	◆	◆	◆

Date of issue: 06/19/2007

Dimensions

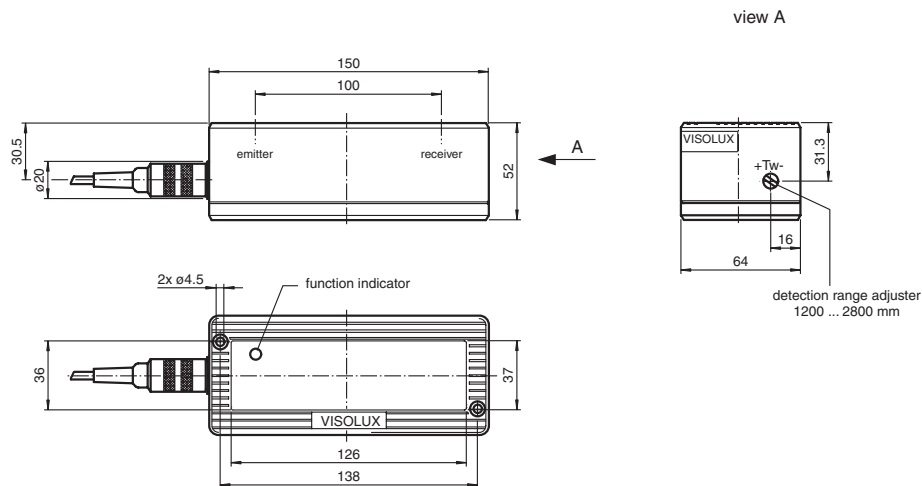



Electrical connection

Connection type

Option /25/31


Option /59/101

Option /59/31

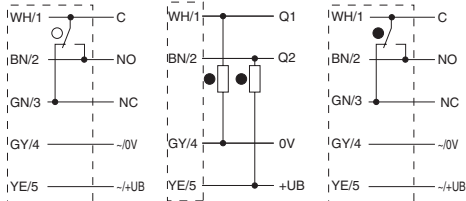


plug M12, 5 pin

Diagrams

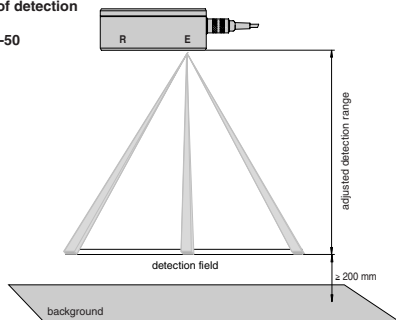Size of detection field
FLT...-50


Detection field size versus adjusted detection range:

detect. field	detection field size	spot size
1500 mm	380 mm x 38 mm	30 mm x 30 mm
1800 mm	450 mm x 50 mm	35 mm x 35 mm
2000 mm	500 mm x 50 mm	43 mm x 43 mm
2500 mm	610 mm x 61 mm	57 mm x 57 mm
2800 mm	685 mm x 68 mm	64 mm x 64 mm

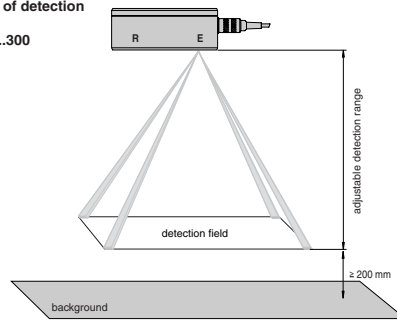Size of detection field
FLT...300

Detection field size versus adjusted detection range:

detect. range	detection field size	spot size
1500 mm	380 mm x 220 mm	30 mm x 30 mm
1800 mm	450 mm x 270 mm	35 mm x 35 mm
2000 mm	500 mm x 300 mm	43 mm x 43 mm
2500 mm	610 mm x 370 mm	57 mm x 57 mm
2800 mm	685 mm x 415 mm	64 mm x 64 mm

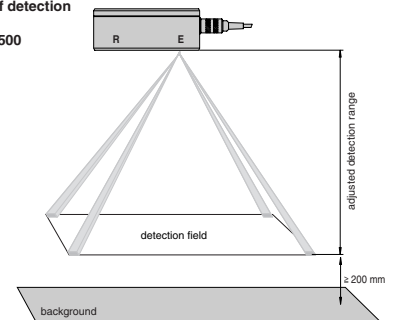Size of detection field
FLT...-500


Detection field size versus adjusted detection range:

detect. field	detection field size	spot size
1500 mm	380 mm x 380 mm	30 mm x 30 mm
1800 mm	450 mm x 450 mm	35 mm x 35 mm
2000 mm	500 mm x 500 mm	43 mm x 43 mm
2500 mm	610 mm x 610 mm	57 mm x 57 mm
2800 mm	685 mm x 685 mm	64 mm x 64 mm

Date of issue: 06/19/2007

Subject to reasonable modifications due to technical advances.

Copyright Pepperl+Fuchs, Printed in Germany



Features


- Can be aligned using an integrated pilot laser
- SSI interface
- Adjustable switch outputs
- Not sensitive to ambient light
- Distance measurement using reflector
VDM70-250-R/20/87/160
- Distance measurement using object
VDM70-10-L/87/122/160
- Analogue output 4 mA ... 20 mA
VDM70-10-L/87/122/160

Technical data

		VDM70-10-L/87/122/160	VDM70-250-R/20/87/160
Light source	laser diode	◆	◆
Approvals	CE, cULus	◆	◆
Laser class	1 EN 60825-1	◆	◆
Alignment aid	adjustment laser, Laser class 2	◆	◆
Linearity error	+/- 3 mm	◆	◆
	+/- 8 mm	◆	◆
Measurement range	0.5 ... 10 m by 90 % reflection (white)	◆	◆
	0.5 ... 250 m on reflector	◆	◆
Reference target	Kodak white (90%)	◆	◆
	OFR100/100	◆	◆
Light type	IR-laser 900 nm	◆	◆
	adjustment laser red light 650 nm	◆	◆
Diameter of the light spot	20 mm x 20 mm at a distance of 10 m	◆	◆
	3 mm x 10 mm at a distance of 4 m	◆	◆
Resolution	0.1 mm or 0.125 mm	◆	◆
Hysteresis	min. 10 mm (adjustable)	◆	◆
Temperature influence	< ± 5 mm absolute	◆	◆
Operating display	LED green	◆	◆
Function display	LED yellow: switching state, LED orange: error message	◆	◆
Operating elements	Keypad (3 membrane keys) for parameter settings on the LCD display	◆	◆
Operating voltage	18 ... 30 V DC	◆	◆
Protection class	II	◆	◆
Ripple	10 % within the supply tolerance	◆	◆
No-load supply current	190 mA	◆	◆
Interfaces	RS 422, SSI	◆	◆
Signal output	2 pnp, short-circuit proof, protected against reverse polarity	◆	◆
Switching current	100 mA	◆	◆
Measurement output	1 analogue output 4 ... 20 mA, short-circuit/overload protected	◆	◆
Response time	12 ms	◆	◆
Repeat accuracy	± 2 mm	◆	◆
	± 4 mm	◆	◆
Other outputs	Service output, plausibility output, PNP, short-circuit proof 50 mA	◆	◆
Standards	EN 60947-5-2	◆	◆
Ambient temperature	-10 ... 50 °C (263 ... 323 K)	◆	◆
Storage temperature	-30 ... 75 °C (243 ... 348 K)	◆	◆
Protection degree	IP67	◆	◆
Connection	with 12-pin, M16 connector	◆	◆
Housing	ABS	◆	◆
Optical face	PMMA	◆	◆
Mass	230 g	◆	◆

Date of issue: 06/19/2007


Dimensions

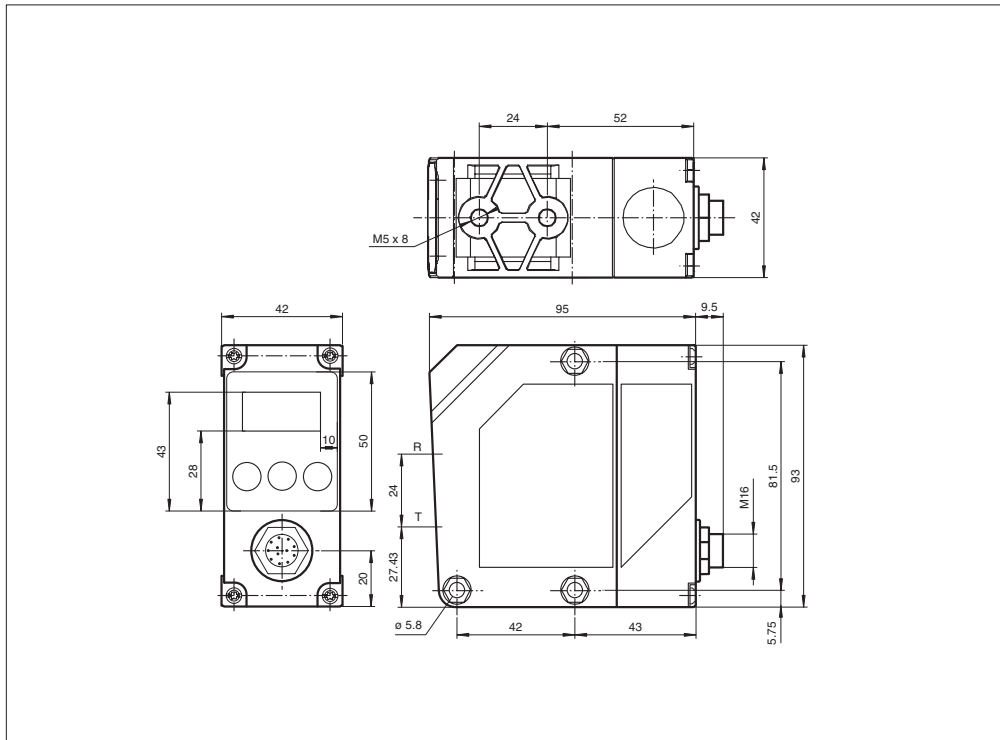



Electrical connection

Connection type

VDM70-10-L/87/122/160

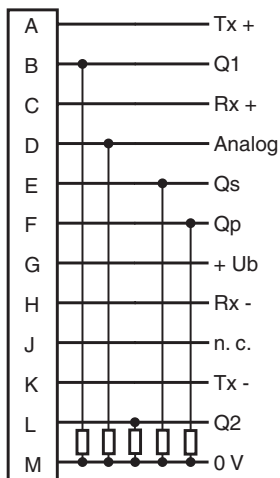


VDM70-250-R/20/87/160

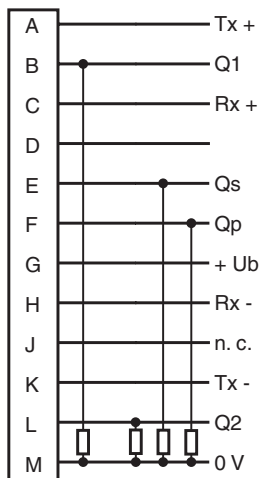


Diagrams


Light spot representation

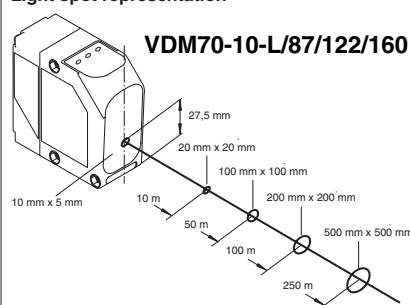

Light spot representation

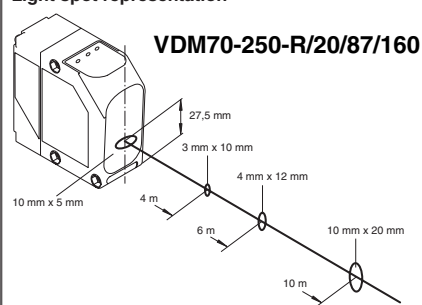

Measuring range

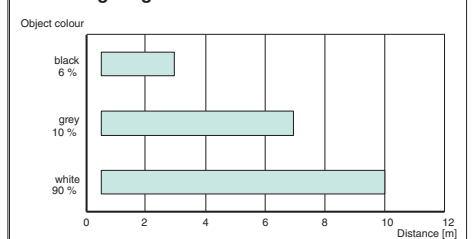

Date of issue: 06/19/2007

Subject to reasonable modifications due to technical advances.

Copyright Pepperl+Fuchs, Printed in Germany



Sensors for automatic doors,
incl buses and trains

Sensors for industrial gates,
fire protection light barriers

Sensors for elevators

Accessories

Date of issue 06/20/2007



<u>Contents</u>	<u>Page</u>
Cables and sockets	94
Reflectors	97
Installation aids	99
Alignment aids	103
Special accessories for sensors in the Topscan series	104
Special accessories for light grids of series AL....	106

Sensors for automatic doors,
incl buses and trains

Sensors for industrial gates,
fire protection light barriers

Sensors for elevators

Accessories

Date of issue 06/20/2007

Sockets for plastic connectors Ø 6.5 mm

Appropriate for sensors in the ML29 line with connection option /143				
Cable sheath	Length ¹⁾	Number of strands	Ø (mm ²)	Straight form
PVC, gray	3 m	4	0,25	ML29 connection socket 3m 4-pin
	6 m	4	0,25	ML29 connection socket 6m 4-pin

¹⁾ other lengths on request

M12 cable sockets

					
Cable sheath	Length ¹⁾	Number of strands	Ø (mm ²)	Straight shape	Angled shape
PVC	2 m	4	0,34	V1-G-2M-PVC	V1-W-2M-PVC
	5 m	4	0,34	V1-G-5M-PVC	V1-W-5M-PVC
	2 m	5	0,34	V15-G-2M-PVC	V15-W-2M-PVC
	5 m	5	0,34	V15-G-5M-PVC	V15-W-5M-PVC
PUR	2 m	4	0,34	V1-G-2M-PUR	V1-W-2M-PUR
	5 m	4	0,34	V1-G-5M-PUR	V1-W-5M-PUR
	2 m	5	0,34	V15-G-2M-PUR	V15-W-2M-PUR
	5 m	5	0,34	V15-G-5M-PUR	V15-W-5M-PUR

¹⁾ other lengths on request

Model key for cable sockets

V15-W-2M-PVC	— Cable material	— PVC — PUR
	— Cable length	— 2 m — 5 m — other lengths on request
	— Cable outlet	— W angled — G straight
	— Connection method	— V15 M12 x 1. 5-pin, DC

Illustration	Description	Part Number	Series													
			MLV12	RLK29	RL91	RLK91	31 series	AIR30	LT	FLT	Proscan	Topscan	TOPSCAN-S	RMS	AL21	AL20/40
	Rectangular reflector	H50 REFLECTOR		●	●	●										
	Rectangular reflector	H60 REFLECTOR	●	●	●	●										
	Rectangular reflector	H85 REFLECTOR		●	●	●										
	Rectangular reflector	H160 REFLECTOR		●	●	●										
	Rectangular reflector	H180 REFLECTOR		●	●	●										
	Round reflector	C110-2 REFLECTOR		●	●	●										
	Reflector foil	OFR-100/100		●	●	●										
	Installation aid	Reflector Weather Cap	●	●	●	●										
	Installation aid	OMH-MLV12-HWG	●													
	Installation aid	OMH-MLV12-HWK	●													
	Installation aid	OMH-K01	●													
	Installation aid	OMH-K02	●													
	Installation aid	OMH-21		●												
	Installation aid	OMH-RLK29		●												
	Installation aid	OMH-RLK29-HW		●												
	Installation aid	OMH-91			●											
	Installation aid	OMH-RL31-01 OMH-RL31-02 OMH-RL31-03				●										

Sensors for automatic doors,
incl buses and trainsSensors for industrial gates,
fire protection light barriers


Sensors for elevators

Accessories

Date of issue 06/20/2007

Subject to reasonable modifications due to technical advances.

Copyright Pepperl+Fuchs, Printed in Germany


Illustration	Description	Part Number	Series											
			MLV12	RLK29	RL91 RLK91	31 series	AIR30	LT FLT	Proscan	Topscan	TOPSCAN-S	RMS	AL21	AL20/40
	Installation aid	AIR30 mounting cap					●							
	Installation aid	UP mounting frame					●		●					
	Installation aid	Mounting plate LT Mounting plate FLT						●						
	Alignment aid	FLT-50-AR FLT-300-AR FLT-500-AR						●						
	Sensor module	AIR16								●				
	Spare part	AIR16 bearing block								●				
	Ribbon cable	Intermediate cable WK AIR16 200 mm/300 mm/700 mm								●				
	Installation aid	RMS Weather cap										●		
	Remote control	RMS Remote Control										●		
	Installation aid	Mounting Set AL2109 back board											●	
	Installation aid	Mounting Set AL2109 lateral											●	
	Installation aid	Mounting Set AL2109 extension											●	
	Installation aid	Cover trunnion												●
	Spare part	TopScan S Profile TopScan S Cover									●			
	Spare part	TopScan S Cap Set TopScan S Gasket IP54									●			
	Spare part	AIR16-S Holder Set ZWKAIR16-S-TOPSCAN 160mm ZWKAIR16-S-TOPSCAN 240mm									●			

Model number**REFLEKTOR H50**

Reflector, rectangular 50.9 mm x 50.9 mm, mounting holes, fixing strap

**Technical data**


General specifications	
Construction type	rectangular
Ambient conditions	
Ambient temperature	-20 ... 85 °C (253 ... 358 K)
Mechanical specifications	
Material	PMMA/ABS
Dimensions	50.9 mm x 50.9 mm x 8.5 mm
Mounting	mounting holes

Dimensions**Model number****REFLEKTOR H60**

Reflector, rectangular 40.5 mm x 60 mm, mounting holes

**Technical data**


General specifications	
Construction type	rectangular
Ambient conditions	
Ambient temperature	-20 ... 85 °C (253 ... 358 K)
Mechanical specifications	
Material	PMMA/ABS
Dimensions	60 mm x 40.5 mm x 7.5 mm
Mounting	mounting holes

Dimensions**Model number****REFLEKTOR H85-2**

Reflector, rectangular 84.5 mm x 84.5 mm, mounting holes

**Technical data**


General specifications	
Construction type	rectangular
Ambient conditions	
Ambient temperature	-20 ... 85 °C (253 ... 358 K)
Mechanical specifications	
Material	PMMA/ABS
Dimensions	84.5 mm x 84.5 mm x 8.7 mm
Mounting	mounting holes

Dimensions**Model number****REFLEKTOR H180**

Reflector, rectangular 180 mm x 40 mm, mounting holes

**Technical data**

General specifications	
Construction type	rectangular
Ambient conditions	
Ambient temperature	-20 ... 85 °C (253 ... 358 K)
Mechanical specifications	
Material	PMMA/ABS
Dimensions	180 mm x 40 mm x 7.4 mm
Mounting	mounting holes

Dimensions

Date of issue: 06/19/2007

Subject to reasonable modifications due to technical advances.

Copyright Pepperl+Fuchs, Printed in Germany

Model number

REFLEKTOR C110-2


Reflector, round $\varnothing$ 84 mm, central mounting hole



Technical data

General specifications	
Construction type	circular
Ambient conditions	
Ambient temperature	-20 ... 85 °C (253 ... 358 K)
Mechanical specifications	
Material	PMMA/ABS
Dimensions	Diameter: 84 mm
Mounting	mounting hole

Dimensions



Model number

REFLEKTOR H160


Reflector, rectangular 60 mm x 18 mm, mounting holes



Technical data

General specifications	
Construction type	rectangular
Ambient conditions	
Ambient temperature	-20 ... 85 °C (253 ... 358 K)
Mechanical specifications	
Material	PMMA/ABS
Dimensions	60 mm x 18 mm x 8.3 mm
Mounting	mounting holes


Dimensions



Model number

OFR-100/100


Reflective tape 100 mm x 100 mm



Technical data

General specifications	
Construction type	rectangular
Ambient conditions	
Ambient temperature	-20 ... 85 °C (253 ... 358 K)
Mechanical specifications	
Material	IRF6000
Dimensions	100 mm x 100 mm
Mounting	self-adhesive

Dimensions



Model number

Reflector Weather Cap

Weather hood for series refector




Technical data

Mechanical specifications	
Material	plastic
Mass	approx. 60 g
Mounting	Mounting accessories included
Suitable series	
Series	C110-2, H50

Suitable reflector C110-2 or H50 to be ordered separately!

Dimensions



Mounting bracket



Material	Steel, powder coated
Mass	approx. 175 g
Mounting	Mounting accessories included
Suitable series	
Series	RL23 RL28 RL29

Mounting bracket



Material	Metal sheet (steel), black coated
Mass	approx. 70 g
Mounting	Mounting accessories included
Suitable series	
Series	RL91

[illegible]

Fixation clamp for sensors with dove tail



Material	anodised aluminium
Mass	approx. 10 g
Suitable series	
Series	MLV12

Fixation clamp for sensors with dove tail



Material	anodised aluminium
Mass	approx. 5 g
Suitable series	
Series	MLV12


Accessories

Model number**OMH-RL31-01**

Mounting bracket

**Technical data****Mechanical specifications**


Material	Metal sheet (steel), zinc plated
Suitable series	
Series	Series 31

Dimensions**Model number****OMH-RL31-02**

Mounting bracket

**Technical data****Mechanical specifications**


Material	Metal sheet (steel), zinc plated
Suitable series	
Series	Series 31

Dimensions**Model number****OMH-RL31-03**

Mounting bracket

**Technical data****Mechanical specifications**

Material	Metal sheet (steel), zinc plated
Suitable series	
Series	Series 31

Dimensions

Mounting bracket for series MLV12 sensors




Technical data

Mechanical specifications

Material	Metal sheet (steel), nickel-plated
Mass	approx. 15 g
Suitable series	
Series	MLV12

Dimensions

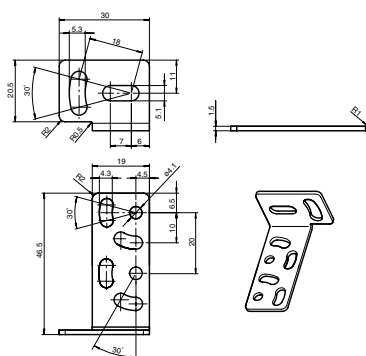

Model number

OMH-MLV12-HWK

Mounting bracket for series MLV12 sensors




Technical data

Mechanical specifications

Material	Metal sheet (steel), nickel-plated
Mass	approx. 10 g
Suitable series	
Series	MLV12

Dimensions



Model number

OMH-RLK29

Mounting bracket




Technical data

Mechanical specifications

Material	Stainless steel
Mass	approx. 85 g
Suitable series	
Series	RLK28 RLK29

Dimensions



Model number

OMH-RLK29-HW

Mounting bracket for rear wall mounting




Technical data

Mechanical specifications

Material	Stainless steel
Mass	approx. 150 g
Dimensions	136 mm x 52 mm x 3 mm
Suitable series	
Series	RL23 RL28 RL29 RL32

Dimensions

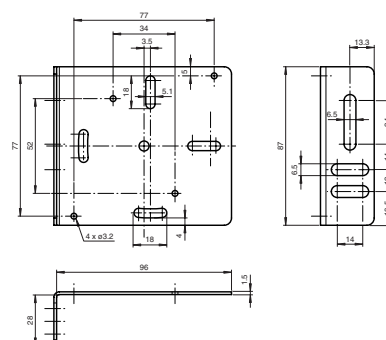

Sensors for automatic doors, incl buses and trains

Sensors for industrial gates, fire protection light barriers

Sensors for elevators

Accessories

Model number**RMS Weather cap**


Weather hood for series RMS

**Technical data****Mechanical specifications**

Material	plastic
Mounting	Mounting accessories included

Suitable series

Series	RMS
--------	-----

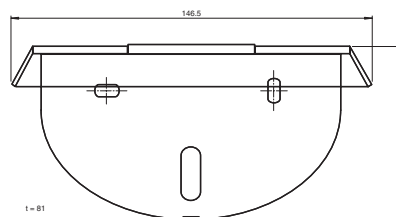Dimensions**Model number****RMS Remote control**

infrared remote control for series RMS

**Technical data****General specifications**

Light type	Infrared
------------	----------

Electrical specifications

Operating voltage	2x 1,5 V, ALKALINE LR6 / AA included with delivery
-------------------	--

Ambient conditions


Ambient temperature	-20 ... 60 °C (253 ... 333 K)
---------------------	-------------------------------

Mechanical specifications

Protection degree	IP54
Material	ABS, black
Mass	100 g
Dimensions	140 mm x 63 mm x 31 mm

Suitable series

Series	RMS
--------	-----

Dimensions**Model number****TopScan-S Test Kit**


Adjustment accessories TopScan-S

**Technical data****Mechanical specifications**

Material	Board
Mass	approx. 315 g

Suitable series

Series	TOPSCAN-S
--------	-----------

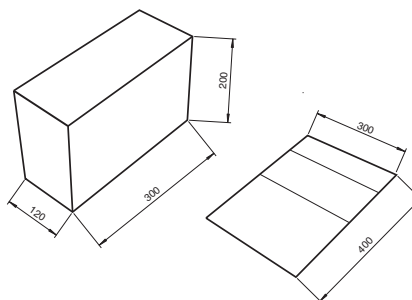Dimensions**Model number****TopScan-S Gasket IP54**

Housing seal TopScan-S

**Technical data****Ambient conditions**


Ambient temperature	-10 ... 50 °C (263 ... 323 K)
---------------------	-------------------------------

Mechanical specifications

Material	Rubber seal
Mass	approx. 4 g

Suitable series

Series	TOPSCAN-S
--------	-----------


Dimensions

Model number**OMH-VDM35**

Mounting bracket

**Technical data****Mechanical specifications**

Material	Metal sheet (steel), zinc plated
Mounting	Mounting accessories included
Suitable series	
Series	VDM35 , VDM70

Dimensions**Model number****OMH-VDM35-01**


Adjustment set series VDM35

**Technical data****General specifications**

Accessories provided	Mounting bracket not included
----------------------	-------------------------------

Mechanical specifications

Material	aluminium, black anodised
Mounting	Mounting accessories included
Suitable series	
Series	VDM35 , VDM70

Dimensions**Model number****VDM35-AR**

alignment aid for series VDM35

**Technical data****General specifications**

Light type	Red light, 650 nm
------------	-------------------

Electrical specifications

Operating voltage	3 V DC battery: 2 AAA-size batteries
-------------------	---

Ambient conditions


Operating temperature	0 ... 40 °C (273 ... 313 K)
Storage temperature	-40 ... 85 °C (233 ... 358 K)

Mechanical specifications

Protection degree	IP20
Material	aluminium
Housing	PA 6
Mass	250 g
Dimensions	

Suitable series

Series	VDM35 , VDM70
--------	---------------

DimensionsSensors for automatic doors,
incl buses and trainsSensors for industrial gates,
fire protection light barriers

Sensors for elevators


Accessories

Model number**TopScan-S Profile L1400**

Housing profile TopScan-S

**Technical data**


Ambient conditions	
Ambient temperature	-10 ... 50 °C (263 ... 323 K)
Mechanical specifications	
Material	aluminium
Suitable series	
Series	TOPSCAN-S

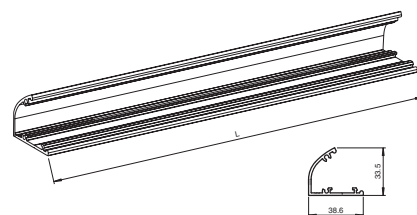Dimensions**Model number****TopScan-S Cover L1400**

Housing cover TopScan-S

**Technical data**


Ambient conditions	
Ambient temperature	-10 ... 50 °C (263 ... 323 K)
Mechanical specifications	
Material	Polyamide (PA)
Suitable series	
Series	TOPSCAN-S

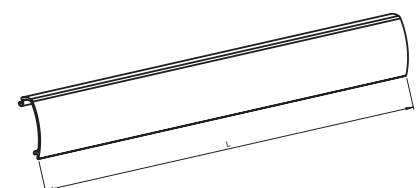Dimensions**Model number****AIR16-S Holder Set**

Bearing block for AIR16-S sensor module for installation in TopScan-S profile section

**Technical data**


Mechanical specifications	
Material	aluminium
Mass	approx. 6 g
Mounting	Mounting accessories included
Suitable series	
Series	TOPSCAN-S

Dimensions**Model number****ZWKAIR16-S-TOPSCAN 160mm
ZWKAIR16-S-TOPSCAN 240mm**

Flat cable for connection of sensor module AIR16-S


**Technical data**

Mechanical specifications	
Cable	
Length L	160 mm 240 mm
Suitable series	
Series	TOPSCAN-S


Dimensions

Model number**AIR16**


Replacement/extension sensor module

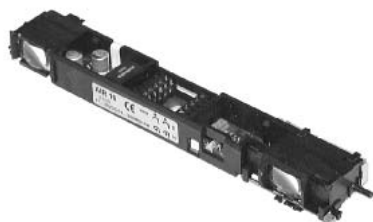**Technical data**


Electrical specifications	
Operating voltage	17 ... 30 V DC , 18 ... 28 V AC
Ambient conditions	
Ambient temperature	-20 ... 60 °C (253 ... 333 K)
Suitable series	
Series	TOPSCAN

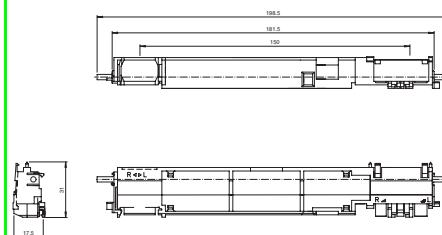Dimensions**Model number****LAGERBOCK AIR16**

Pedestal for the sensor module AIR16

**Technical data**

Mechanical specifications	
Material	plastic
Mass	approx. 5 g
Suitable series	
Series	TOPSCAN


Dimensions**Model number**

Zwischenkabel ZWK AIR16 200mm
Zwischenkabel ZWK AIR16 300mm
Zwischenkabel ZWK AIR16 700mm

Flat cable for connection of replacement/extension sensor module AIR16

**Technical data**

Mechanical specifications	
Cable	
Length L	200 mm
Suitable series	
Series	TOPSCAN

DimensionsSensors for automatic doors,
incl buses and trainsSensors for industrial gates,
fire protection light barriers

Sensors for elevators


Accessories

Model number**Mounting Set AL2109 back board**

Mounting aid

**Technical data****Mechanical specifications**


Mass	approx. 30 g
Suitable series	
Series	AL21

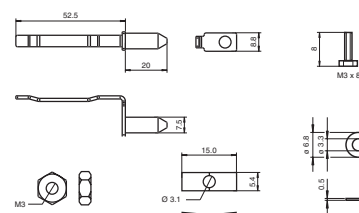Dimensions**Model number****Mounting Set AL2109 lateral**

Mounting aid

**Technical data****Mechanical specifications**


Mass	approx. 12 g
Suitable series	
Series	AL21

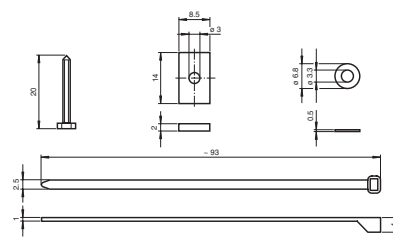Dimensions**Model number****Mounting Set AL2109 extension**

Mounting aid

**Technical data****Mechanical specifications**

Length of housing L	600 mm
Material	Aluminium housing
Mass	approx. 400 g
Mounting	Mounting accessories included
Suitable series	
Series	AL21

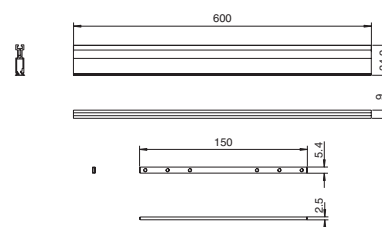Dimensions

Mounting plate for sensors in the LT and FLT series




Technical data

Mechanical specifications

Material	plastic
Mass	approx. 155 g
Suitable series	
Series	LT . LTK

Dimensions

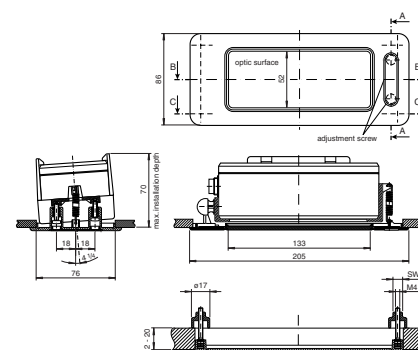

Sensors for automatic doors, incl buses and trains

Model number

Montageplatte FLT

Mounting plate for sensors in the FLT-8 series




Technical data

Mechanical specifications

Mechanical specifications	
Material	plastic
Mass	approx. 155 g
Suitable series	
Series	FLT-8

Dimensions

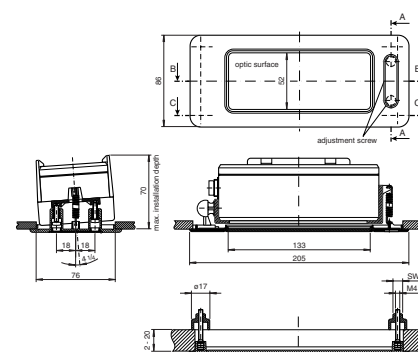

Sensors for industrial gates, fire protection light barriers

Model number

UP-Einbaurahmen

Mounting frame for sensors in the AIR30 and PROSCAN series




Technical data

Mechanical specifications

Material	plastic
Mass	approx. 15 g
Suitable series	
Series	AIR30 Proscan

Dimensions



Sensors for elevators

Model number

Deckel-Zapfen

Mounting pivot for light grid AL20/AL40




Technical data

Mechanical specifications

Material	brass
Mass	approx. 9 g
Suitable series	
Series TTA	AL20 AL40

Dimensions



Accessories

Date of issue: 06/19/2007

Subject to reasonable modifications due to technical advances.

Copyright Pepperl+Fuchs, Printed in Germany

Pepperl+Fuchs Group • Tel.: Germany +49 621 776-0 • USA +1 330 4253555 • Singapore +65 67799091 • Internet <http://www.pepperl-fuchs.com>
Steven Engineering, Inc. • 230 Ryan Way, South San Francisco, CA 94080-6370 • General Inquiries: (800) 670-4183 • www.steven.com


Model number

FLT-50-AR
FLT-300-AR
FLT-500-AR

alignment aid for FLT...-300

**Technical data**

General specifications	
Light type	Red light
Ambient conditions	
Ambient temperature	-20 ... 60 °C (253 ... 333 K)
Storage temperature	-20 ... 75 °C (253 ... 348 K)
Mechanical specifications	
Protection degree	IP65
Material	
Housing	Makrolon GV30 black
Optical face	glass, red
Suitable series	
Series	FLT

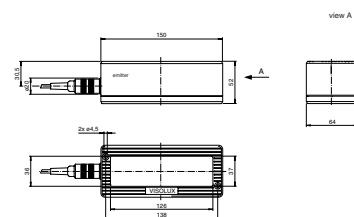
Dimensions**Model number**

EINBAUDECKEL AIR30

Flush-mounted cover for AIR30 series sensors

**Technical data**

Mechanical specifications	
Material	plastic
Mass	approx. 16 g
Suitable series	
Series	AIR30

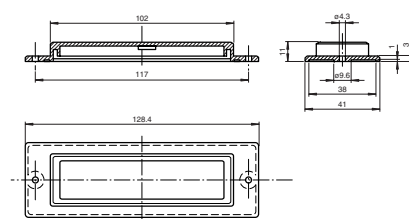
Dimensions**Model number**

ML29 Front Plate

Front plate for thru-beam sensors in series ML29

**Technical data**

Ambient conditions	
Ambient temperature	-20 ... 85 °C (253 ... 358 K)
Mechanical specifications	
Material	Makrolon (IR permeable)
Mass	approx. 11 g
Suitable series	
Series	ML29

Dimensions

Device options


For the best possible fit to your application, our products are available in both their series designs and in different electrical variants with different connection systems, and with other useful options.

In the following table, you will find a listing of the options offered for special products. These device options are attached to the device's model number as numeric codes with a forward slash(/) in ascending order (e.g. -AL2016-P-1650/49/76a).

Option	Description	Output	Input	Operating mode	Connection
/25	Light-On switching			◆	
/31	Relay output	◆			
/32	1 PNP output, short-circuit protected, open collector, 0.2 A/30 V DC	◆			
/38a	Low-current relay output, 1 switcher (1 A/55 V AC/24 V DC)	◆			
/47	2 PNP outputs, short-circuit protected, antivalent, open collectors, 0.2 A/30 V DC	◆			
/49	1 PNP and 1 NPN output, short-circuit protected, open collectors, direct current, 0.2 A/30 V DC	◆			
/59	Dark-On switching			◆	
/73	Plastic connector M12 x 1, 4-pin				◆
/76a	Sensor with input for transmitter suppression ($V_e = +24$ V DC)		◆		
/95	Metal connector M8 x 1, 4-pin				◆
/101	1 PNP and 1 NPN output, short-circuit protected, open collectors, direct current, 0.2 A/48 V DC	◆			
/102	1 NPN output, short-circuit protected, open collector, 0.1 A/30 V DC	◆			
/103	1 PNP output, short-circuit protected, open collector, 0.1 A/30 V DC	◆			
/105	M12 plastic plug, 5-pin, without cable				◆
/115	Fixed cable				◆
/115a	Fixed cable with M8 connector				◆
/115b	Fixed cable with M12 connector				◆
/116	Terminal space				◆
/120a	2 PNP outputs, short-circuit protected, antivalent, open collectors, 0.2 A/48 V DC	◆			
/124	M12 metallic plug, 5-pin, pin layout on Euro standard				◆
/143	M8 plastic plug connector, 4-pin				◆

Example:

ML29-P/59/103/115

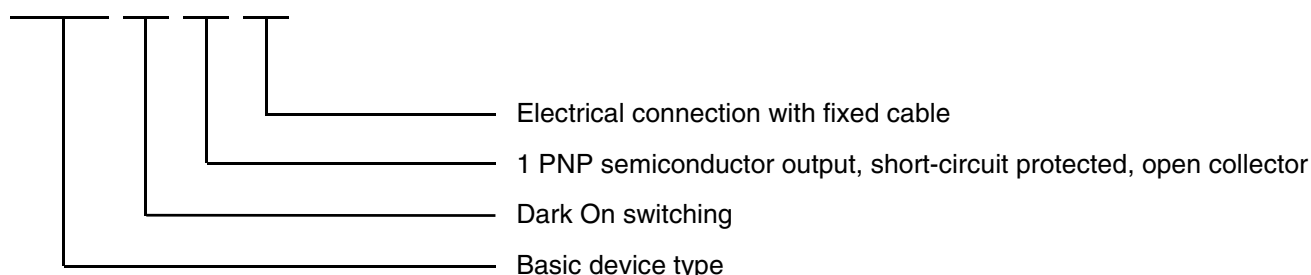

Date of issue 06/20/2007

Zentrale weltweit
Worldwide Head Office
 Pepperl+Fuchs GmbH
 Königsberger Allee 87
 68307 MANNHEIM
 Telephone +49-621-776-0
 Telefax +49-621-776-1000
 info@de.pepperl-fuchs.com



Austria
 Pepperl+Fuchs GmbH
 Industriestraße B 13
 2345 BRUNN/GEB.
 Telephone +43-2236-33441
 Telefax +43-2236-31682
 info@at.pepperl-fuchs.com

Bahrain
 Texas Technical Services
 (FA + PA Representation)
 # 1273 Road 422
 SALMABAD 704
 Telephone +973-17789555
 Telefax +973-17789666
 textech@batelco.com.bh

Baltic States
 ELEKOMS Ltd.
 (PA Distributor)
 Turaidas Str. 10
 LV-1012 RIGA, Latvija
 Telephone +371-7336444
 Telefax +371-7336448
 elokoms@apollo.lv

Belgium
 Pepperl+Fuchs N.V.
 Metropoolstraat 11
 2900 SCHOTEN
 Telephone +32-3-6442500
 Telefax +32-3-6442441
 sales@be.pepperl-fuchs.com

Bulgaria
 Process Control
 (PA Distributor)
 Tzarichina Str. 1
 1505 SOFIA
 Telephone +359-2-703549
 Telefax +359-2-703549
 processcontrol@bulmail.net

Croatia
 EL-PRO D.O.O.
 (FA + PA Distributor)
 Fallerovo Setaliste 22
 10000 ZAGREB
 Telephone +385-1-3680047
 Telefax +385-1-3667428
 el-pro@zg.htnet.hr

Czech Republic
 Pepperl+Fuchs s.r.o.
 Sokolovská 79
 18600 PRAG 8
 Telephone +420-221115-540
 Telefax +420-221115-550
 info@cz.pepperl-fuchs.com

Denmark
 Pepperl+Fuchs A/S
 Stamholmen 173
 2650 HVIDOVRE
 Telephone +45-70104210
 Telefax +45-70104211
 info@dk.pepperl-fuchs.com

Egypt
 Pepperl+Fuchs Egypt (LLC)
 (FA + PA Office)
 9 Abdel Hamied Lotfy Street, Zone 8
 Nasr City
 CAIRO
 Telephone +20-2-2721097
 Telefax +20-2-2756096
 mesmat@eg.pepperl-fuchs.com

Finland
 SensoNor Oy
 Kartanontie 20
 00330 HELSINKI
 Telephone +358-9-4777200
 Telefax +358-9-47772020
 joel.patriikka@sensonor.fi

France
 Pepperl+Fuchs SARL
 12 Avenue des Tropiques
 91955 COURTABOEUF CEDEX
 Telephone +33-1-60921313
 Telefax +33-1-60921325
 commercial@fr.pepperl-fuchs.com

Germany
 Pepperl+Fuchs Drehgeber GmbH
 Föhrenstraße 33
 78532 TUTTLINGEN
 Telephone +49-7461-9298-0
 Telefax +49-7461-9298-22
 info@de.pepperl-fuchs.com

Pepperl+Fuchs EXTEC GmbH
 Schorndorfer Straße 55
 73730 ESSLINGEN
 Telephone +49-711-315455-0
 Telefax +49-711-315455-29
 info@extec.de

Omnitron AG
 Aktiengesellschaft für
 optoelektronische Geräte
 Im Leuschnerpark 4
 64347 GRIESHEIM
 Telephone +49-6155-8740-0
 Telefax +49-6155-8740-12
 info@de.pepperl-fuchs.com

Pepperl+Fuchs GmbH
 Werk Berlin
 Kitzingstraße 25-27
 12277 Berlin/Germany
 Telephone: +49 30 616 72-0
 Telefax: +49 30 616 72-468
 info@de.pepperl-fuchs.com

Great Britain
 Pepperl+Fuchs GB Ltd.
 (FA + PA Distributor)
 77 Ripponden Road
 OLDHAM OL1 4EL, Lancashire
 Telephone +44-161-6336431
 Telefax +44-161-6246537
 sales@gb.pepperl-fuchs.com

Greece
 Uteco A.B.E.E.
 5, Mavrogenous Street
 18542 PIRAEUS
 Telephone +30-211-1206-900
 Telefax +30-211-1206-999
 uteco@uteco.gr

Hungary
 Pepperl+Fuchs Kft.
 (FA)
 Kistó Utca 16-18
 8200 VESZPRÉM
 Telephone +36-88-590100
 Telefax +36-88-560473
 info@hu.pepperl-fuchs.com

Iceland
 Tölvusalan ehf.
 Suourlandsbraut 20
 P.O. Box 8960
 128 REYKJAVIK
 Telephone +354-5-500450
 Telephone +354-5-500454
 Telefax +354-5-500402

Iran
 Farayand Pas
 (PA Representation)
 Flats 5 & 6, 2nd Floor,
 Ferdose Build, No. 156
 Mollasadra Ave., Vanak Sq.
 14359114981 TEHRAN
 Telephone +9821-8806-7866
 Telefax +9821-8806-5190
 rvali@ae.pepperl-fuchs.com

Pars Equipment Co.
(FA Representation)
Unit # 21, No. 35, Zomorod Tower,
Goinabi Street Shariati Ave,
P.O. Box # 16315-137
TEHRAN
Telephone +98-21-2288-7425
Telefax +98-21-2288-87428
galireza@ae.pepperl-fuchs.com

Ireland

Unit 1
Barryscourt Business Park
Carrigtwohill Co Cork
Telephone +353-21-4883798
Telefax +353-21-48830632

Israel

Kama Ltd.
(FA + PA Distributor)
20 Hametsuda St.
58190 AZOR
Telephone +972-3-5567747
Telefax +972-3-5567548
Kama@netvision.net.il

Italy

Pepperl+Fuchs ELCON SRL
Via delle Arti e Mestieri, 4
20050 SULBIATE (Milano)
Telephone +39-039-62921
Telefax +39-039-6292240
info@it.pepperl-fuchs.com

Kenya

Shankan Enterprises Ltd.
P.O. Box 44432
NAIROBI
Telephone +254-2-440093
Telefax +254-2-441820
dks@kenyaonline.com

Kuwait

Almeer Technical Services
Co. W.L.L.
(FA + PA Representation)
P.O. Box 9240
61003 AHMDAI
Telephone +965-320-2254
Telefax +965-398-0682
senthilm@almeer.com

Netherlands

Pepperl+Fuchs B.V.
Pettelaarpark 104
5216 PR's-HERTOGENBOSCH
Telephone +31-73-7507107
Telefax +31-73-6444749
sales@nl.pepperl-fuchs.com

Norway

Pepperl+Fuchs A/S
Postboks 96
Floodmyrveien 24
3901 PORSGRUNN
Telephone +47-35-573800
Telefax +47-35-573849
info@no.pepperl-fuchs.com

Oman

Riyam Engineering & Services L.L.C
(FA + PA Representation)
P.O. Box: 1931
112 RUWI
Telephone +968-24-594960
Telefax +968-24-595536
riyam@omantel.net.om

Pakistan

Techno-Commercial
Engineers-Representations
18-24, Farid Plaza - Shadman 65
G.P.O. Box 937
54000 LAHORE
Telephone +92-42-7584390
Telefax +92-42-7581771
eswaat@brain.net.pk

Tariq Electric House
1, Wahab Arcade, Near Denso Hall
M. A. Jinnah Road
74200 KARACHI
Telephone +92-21-2628409
Telefax +92-21-2624460
teh@super.net.pk

Poland

INTEX Sp.zo.o.
(PA Distributor)
ul. W. Pola 16
44-100 GLIWICE
Telephone +48-32-2307516
Telefax +48-32-2307517
intex@intex.com.pl

Portugal

Pepperl+Fuchs, S.A.
Txori-Erri Etorbidea, 46
Polígono Izarza
E-48150 SONDIKA (Vizcaya) (Spain)
Telephone +34-94-4535020
Telefax +34-94-4535180
sov@es.pepperl-fuchs.com

Qatar

Doha Petroleum Construction
Co. Ltd. (DOPET)
(FA + PA Representation)
P.O. Box 1744
DOHA
Telephone +974-4600350
Telefax +974-4606347
bhargav@dopet.com

Romania

Syscom 18 Srl.
(FA + PA Distributor)
Calea Plevnei 139B, Sector 6
060011 BUCHAREST
Telephone +40-21-3102678
Telefax +40-21-3169176
syscom@syscom18.com

Russia

Pepperl+Fuchs Russia
(FA + PA Office)
Ul. 4-aya Magistralnaya, 11
Bld. 1, 8 Floor
123007 MOSCOW
Telephone +7-495-9958842
Telefax +7-495-2595872
info@pepperl-fuchs.ru

Prosoft Ltd.
(FA + PA Distributor)
108 Profsoynaya Str.
119313 MOSCOW
Telephone +7-495-2340636
Telefax +7-495-9783934
root@prosoft.ru

Saudi Arabia

GAS Arabian Services Est.
(FA + PA Representation)
P.O. Box 10487
31961 AL-JUBAIL
Telephone +966-3-3472696
Telefax +966-3-3473480

Slovakia

Pepperl+Fuchs s.r.o.
Sokolovská 79
18600 PRAG 8
(Czech Republic)
Telephone +420-221115-540
Telefax +420-221115-550
info@cz.pepperl-fuchs.com

South Africa

P & F Products cc
P.O. Box 2809
60, Fourth Ave.
EDENVALE 1610
Telephone +27-11-6098188
Telefax +27-11-4522026
info@pandf.co.za

Spain

Pepperl+Fuchs, S.A.
Head Office
Txori-Erri Etorbidea, 46
Polígono Izarza
48150 SONDIKA (Vizcaya)
Telephone +34-94-4535020
Telefax +34-94-4535180
sov@es.pepperl-fuchs.com



Sweden

Pepperl+Fuchs AB
Bultgatan 40 b
442 40 KUNGÄLV
Telephone +46-303-246070
Telefax +46-303-246089
info@se.pepperl-fuchs.com

Switzerland

Pepperl+Fuchs AG
Sägeweg 7
2557 STUDEN/BE
Telephone +41-32-3747676
Telefax +41-32-3747678
info@ch.pepperl-fuchs.com

Turkey

Net Muhendislik A.S.
(FA Representation)
Perpa Ticaret Merkezi A
Blok kat: 5 No: 174/176
Okmeydani ISTANBUL
Telephone +90-212-2109354
Telefax +90-212-2109359
info@netmuh.com.tr

STOKS Ltd.
(PA Representation)
Zümrütevler Mah. Visne Sokak No. 5
Maltepe
34852 ISTANBUL
Telephone +90-216-4417009
Telefax +90-216-4591290

United Arab Emirates

Pepperl+Fuchs (M.E.) FZE
P.O. Box 61398
CA-1, Near Round About 8
Jebel Ali Free Zone
DUBAI
Telephone +971-4-8838378
Telefax +971-4-8838627
info@ae.pepperl-fuchs.com


United Eastern Group
(FA + PA Representation)
P.O. Box 7615
ABU DHABI
Telephone +971-2-6272737
Telefax +971-2-6270048
kanone@ueg.co.ae

Nils & Abbas Trading Co. L.L.C.
P.O. Box 26564
DUBAI
Telephone +971-4-3390044
Telefax +971-4-3388732
jens@nilsabbas.com

Zentrale USA

USA Head Office

Pepperl+Fuchs Inc.
1600 Enterprise Parkway
TWINSBURG OHIO, 44087
Telephone +1-330-4253555
Telefax +1-330-4254607
sales@us.pepperl-fuchs.com

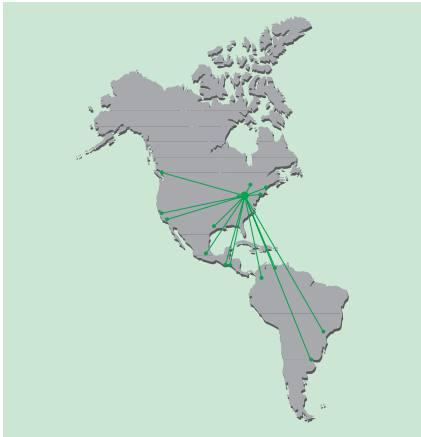

Anguilla

Address see
USA Head Office
Pepperl+Fuchs Inc.

Antigua

Address see
USA Head Office
Pepperl+Fuchs Inc.

Argentina

Bruno Schillig S.A.
Arenales (Dip. Ortiz) 4030
1602 Florida,
BUENOS AIRES
Telephone +54-11-47301100
Telefax +54-11-47617244
schillig@schillig.com.ar

Aruba

Address see
USA Head Office
Pepperl+Fuchs Inc.

Bahamas

Address see
USA Head Office
Pepperl+Fuchs Inc.

Barbados

Address see
USA Head Office
Pepperl+Fuchs Inc.

Belize

Adresse see
USA Head Office
Pepperl+Fuchs Inc.

Bermuda

Address see
USA Head Office
Pepperl+Fuchs Inc.

Bolivia

Hiller Electric SA
Av. El Trompillo 573
Casilla 370
SANTA CRUZ
Telephone +591-3-3524484
Telefax +591-3-3526404
mail@hillerelectric.com.bo

Brazil

Pepperl+Fuchs Ltda.
Rua Agostino Pelosini, 73/81
Vila Olga
CEP 09720-220 SAO BERNARDO
DO CAMPO
Telephone +55-11-43399935
Telefax +55-11-43387547
vendas@br.pepperl-fuchs.com

British Virgin Islands

Address see
USA Head Office
Pepperl+Fuchs Inc.

Canada

Address see
USA Head Office
Pepperl+Fuchs Inc.

Cayman Islands

Address see
USA Head Office
Pepperl+Fuchs Inc.

Chile

Desimat Ingenieria Ltda.
(FA Representation)
Rut.: 78.131.420-K
Av. Puerto Vespucio 9670
Loteo Industrial Puerto Santiago
PUDAHUEL-SANTIAGO
Telephone +56-2-7470152
Telefax +56-2-7470153
importaciones@desimat.cl

INECO Ltda.

Avda Ejercito 16, Piso 4
6510449 SANTIAGO DE CHILE
Telephone +56-2-4638600
Telefax +56-2-4411023
industrial@ineco.cl

Colombia

Instrumentos & Controles
(PA Representation)
Calle 39 No. 22 - 45
BOGOTA, D.C.
Telephone +57-1-2088080
Telefax +57-1-2088060
cgomez@iyca.com.co

Sensortec

(FA + PA Distributor)
Calle 95
#9A-08
BOGOTA, D.C.
Telephone +57-14007018
Telefax +57-14006945

Alfatecnica Export

(FA + PA Distributor)
Calle 95
#9A-08
BOGOTA, D.C.
Telephone +57-14007018
Telefax +57-14006945

H & D Export

(FA + PA Distributor)
Calle 95
#9A-08
BOGOTA, D.C.
Telephone +57-14007018
Telefax +57-14006945

Costa Rica

Elvatron S.A.
(PA Representation)
400 Metros Norte de la Agencia
del Banco de Costa Rica
La Uruca SAN JOSE
Telephone +506-2961060
Telefax +506-2190298
elkin.suarez@elvatron.com

Euro-Tec S.A.

(PA Distributor)
Apartado Postal 477-1250
SAN JOSE
Telephone +506-3847869
Telefax +506-2961542
eurotec@sol.racsa.co.cr

Cuba

Address see
USA Head Office
Pepperl+Fuchs Inc.

Dominica

Address see
USA Head Office
Pepperl+Fuchs Inc.

Dominican Republic

Garlas Controls
(FA Distributor)
Euclides Morillo No. 55 Aroyo Hondo
SANTO DOMINGO
Telephone +1-809-5633226
Telefax +1-809-5633498
garlas.control@codetel.net.do

P.A.S. Technologies
(PA Representation)
9 West, Pedro Arzuaga St.
00987 CAROLINA (Puerto Rico)
Telephone +1-787-752-2370
Telefax +1-787-768-3260
sale dpt@pastechologies.com

Ecuador

Sistemas y Equipos Industriales S.A.
(PA Representation)
Checoslovaquia E10-53 y Av. 6 de
Diciembre
QUITO
Telephone +593-2-2268661
Telefax +593-2-2242802
ines.jurado@sein.com.ec

Soltec
(FA + PA Distributor)
Av. Napo. Mult. Luluncoto
Bloque Illiniza A, Dept. 102
QUITO
Telephone +593-02-2607096
Telefax +593-02-2323718
soltec@cosinet.net

Sistemas y Equipos Industriales S.A.
(PA Representation)
Rumipamba E2-64 y Av. República
Ed. Alex. Ofic. 202
QUITO
Telephone +593-22459859
Telefax +593-22444278

El Salvador

Proyect Asesoria Industrial
S.A. de C.V.
(FA + PA Distributor)
Av. Los Diplomáticos 1318
Barrio San Jacinto
SAN SALVADOR
Telephone +503-2802221
Telefax +503-2701731
ElSalvador@GrupoProyect.com

Elvatron S.A.
(PA Representation)
400 Metros Norte de la Agencia
del Banco de Costa Rica, La Uruca
SAN JOSE (Costa Rica)
Telephone +506-2961060
Telefax +506-2190298
elkin.suarez@elvatron.com

Grenada

Address see
USA Head Office
Pepperl+Fuchs Inc.

Guatemala

Proyect Asesoria Industrial
S.A. de C.V.
(FA + PA Distributor)
43 Calle A 5-01 Zona 12
Col. Monte Maria II
GUATEMALA
Telephone +502-4794120
Telefax +502-4791430
guatemala@grupoproject.com

Prysa
(FA + PA Distributor)
Edificio Condominio Medico,
Primer Nivel, Oficina C-1
SANTA CATARINA PINULA
Telephone +502-2332-5804
Telefax +502-2362-6904
alvaro.monzon@prysaguatemala.com

Equipos y Servicios Industriales S.A.
(PA Representation)
20 Calle 9-63 Z. 11
MARISCAL
Telephone +502-4424606
Telefax +502-4424605
jorge.munoz@esinsa.com

ENERSYS Co. (FA Distributor)
5 Calle 35-01 Zona 11
Utatlán 2,
GUATEMALA
Telephone +502-2-4394622
Telefax +502-2-4346876
enersys@guate.net.gt

Haiti

Address see
USA Head Office
Pepperl+Fuchs Inc.

Honduras

Proyect Asesoria Industrial
S.A. de C.V.
(PA Distributor)
43 Calle A 5-01 Zona 12
Col. Monte Maria II
GUATEMALA
Telephone +502-4794120
Telefax +502-4791430
proyect@navegante.com.sv

Cilasa
(FA Distributor)
Barrio los andes entre 14 y 15
avenida 7, calle A, contiguo a
PecosBill
SAN PEDRO ZULA
Telephone +504-5571146
Telefax +504-5571149
remorale@mayanet.hn

Inelsa
(FA Distributor)
Colonia San Carlos de Sula
Casa #18 Bloque 33
SAN PEDRO ZULA
Telephone +504-5540988
mianzel@sulanet.net

Equipos y Servicios Industriales S.A.
(PA Representation)
20 Calle 9-63 Z. 11
MARISCAL (Guatemala)
Telephone +502-4424606
Telefax +502-4424605
jorge.munoz@esinsa.com

Jamaica

Address see
USA Head Office
Pepperl+Fuchs Inc.

Martinique

Address see
USA Head Office
Pepperl+Fuchs Inc.

Mexiko

Pepperl+Fuchs México, S.A. de C.V.
(Head Quarter)
Blvd. Xola 613, Ph-4
Col. Del Valle
03100 MEXICO D.F.
Telephone +52-55-56391951
Telefax +52-55-56398865
pfmexico@mx.pepperl-fuchs.com

Montserrat

Address see
USA Head Office
Pepperl+Fuchs Inc.

Nicaragua

Equipos y Servicios Industriales S.A.
(PA Representation)
20 Calle 9-63 Z. 11
MARISCAL (Guatemala)
Telephone +502-4424606
Telefax +502-4424605
jorge.munoz@esinsa.com

Panama

Doger Technology Development S.A.
(FA Distributor)
Cuidad del Saber, Clayton, Ancon
Building 215, Office #218
P.O. Box 0843-2807
BALBOA-ANCON
Telephone +507- 317-1989
Telefax +507-317-1990
ronaldhernandez@doger.com

Peru

Desimat Peru S.A.
(FA Representation)
Av. Enrique Salazar Barreto 280
LIMA
Telephone +51-1-2731892
Telefax +51-1-2720054
ventasperu1@desimat.cl

Puerto Rico

Hi-Tech Products
(FA Distributor)
Ave Sanchez Osorio #2
00983 CAROLINA
Telephone +1-787-2571707
Telefax +1-787-2761888
hi-tech@hi-techproducts.com

P.A.S. Technologies
(PA Representation)
#9 West, Pedro Arzuaga St.
00985 CAROLINA
Telephone +1-787-752-2370
Telefax +1-787-768-3260
sale_dpt@pastechologies.com

St. Kitts & Navis

Address see
USA Head Office
Pepperl+Fuchs Inc.

St. Lucia

Address see
USA Head Office
Pepperl+Fuchs Inc.

St. Martin

Address see
USA Head Office
Pepperl+Fuchs Inc.

St. Vincent

Address see
USA Head Office
Pepperl+Fuchs Inc.

Trinidad & Tobago

Industrial System & Controls
(FA Distributor)
Isaac Street
COUVA
Telephone +1-868-6368704
Telefax +1-868-6360948
fidel.ramquar@iscl.co.tt

Plant Solutions Limited
(PA Representation)
#1265 Batchiya Village,
S.S. Erin Road
PENAL
Telephone +1-868-6472182
Telefax +1-868-6475974
plantsol@tsst.net.tt

Turks & Caicos

Address see
USA Head Office
Pepperl+Fuchs Inc.

Venezuela

Empresas Norte-Sur C. A.
Innovantis Technologies
(PA Representation)
Ave. Rio Caura Torre Humbolt
Of. 12-12, Prados del Este
CARACAS
Telephone +58-212-9750355
Telefax +58-212-9750082
ruben.fabbro@innovantis.biz

GPM Instrumentación
(FA Distributor)
Urbanización Unare II Paseo
Caroni Torre INCA, Piso 2 Off 3
PUERTO ORDAZ
Telephone +58-286-9524884
Telefax +58-286-9524796
gpmis@telcel.net.ve

Suplidora Instrumatic C.A.
(FA Representation)
Urb Industrial Carabobo
Avenida Norte 17-18 #86-41
VALENCIA
Telephone +58-241-8327311
Telefax +58-241-8329819


Virgin Islands

P.A.S. Technologies
(PA Representation)
9 West, Pedro Arzuaga St.
00985 CAROLINA (Puerto Rico)
Telephone +1-787-752-2370
Telefax +1-787-768-3260
sale_dpt@pastechologies.com

Zentrale Asien

Asia Pacific Head Office

Pepperl+Fuchs PTE Ltd.
P+F Building
18 Ayer Rajah Crescent
139942 SINGAPORE
Company registration no.
199003130E
Telephone +65-67799091
Telefax +65-68731637
sales@sg.pepperl-fuchs.com

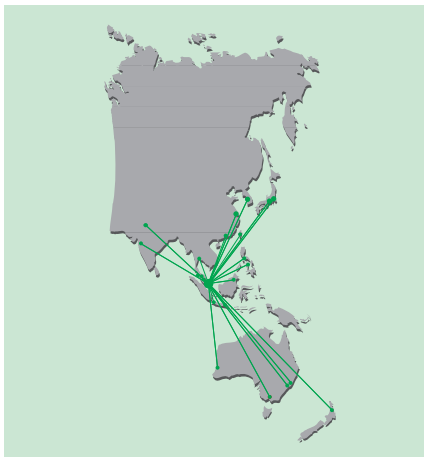

Australia

Pepperl+Fuchs Australia Pty Ltd.
Unit 7/72-74 Chifley Drive
PRESTON, VICTORIA 3072
Telephone +61-3-94958600
Telefax +61-3-94846366
sales@au.pepperl-fuchs.com

Brunai

Joffren Omar Co. Sdn Bhd
(PA Representation)
Lot No 23, G-25 Area, Simpang 81-4
P.O. Box 104
Seria 7001, Negara Brunei
Darussalam
Telephone +673 3 223-863
Telefax +673 3 223-309
josks@pso.brunet.bn

China

Pepperl+Fuchs Automation Co. Ltd.
Shanghai (FA Head Office)
No. 219 Jiang Chang 3 Road
Shibei Industrial Park
SHANGHAI, 200436
Telephone +86-21-66303939
Telefax +86-21-66300883
info@cn.pepperl-fuchs.com

Pepperl+Fuchs Beijing Rep. Office
(PA Head Office)
Prime Tower, Room 2007
No. 22 Chao Yang Men Wai Street
BEIJING 100020
Telephone +86-10-65885143
Telefax +86-10-65885144
pf-china@public3.bta.net.cn

Pepperl+Fuchs Pte. Ltd.
Shanghai Representative Office
(PA Rep. Office)
Room 302, No. 555 West Nanjing
Road
SHANGHAI, 200041
Telephone +86-21-62534920
Telefax +86-21-62539435
info@cn.pepperl-fuchs.com

Pepperl+Fuchs Automation Co. Ltd.
Guangzhou Office of Shanghai
(PA & FA Office)
Room 2809, Floor 28
Middle Dongfeng Road
GUANGZHOU, 510030
Telephone +86-20-83373159
Telefax +86-20-83374123
info@cn.pepperl-fuchs.com

HongKong

Unicorn International Trading Co.
(FA + PA Representation)
Room 1208 Shui On Centre
6 - 8 Harbour Road
Wanchai
Hong Kong
Telephone +852-2528-3558
Telefax +852-2528-9371
fooberhk@netvigator.com

India

Pepperl+Fuchs (India) Pvt. Ltd.
(Head Office)
Plot No. 10, 3rd Main, 1st Stage
Peenya Industrial Estate
BANGALORE 560058
Telephone +91-80-28378030
Telefax +91-80-28378031
info@in.pepperl-fuchs.com

Pepperl+Fuchs (India) Pvt. Ltd.
(Regional Sales Office - North)
305, Ansal Chamber II
6, Bhikaji Cama Place
NEW DELHI 110066
Telephone +91-11-26170207
Telefax +91-11-26166291
nro@in.pepperl-fuchs.com

Pepperl+Fuchs (India) Pvt. Ltd.
(Vadodara Area Sales Office)
UG28 Upper Ground Floor
"Concorde" R.C. Dutt Road
Opp. Alkapuri Petrol Pump,
Alkapuri Vadodara
GUJARAT 390005
Telephone +91-26-55522516
Telefax +91-26-55522516
vadodara@in.pepperl-fuchs.com

Pepperl+Fuchs (India) Pvt. Ltd.
(Pune Area Sales Office)
Roof & Services, Ground Floor
Veer Savarkar Udyog Bhavan
Shivaji Nagar, Maharashtra
PUNE 411005
Telephone +91-20-25538658
Telefax +91-20-25538757
pune@in.pepperl-fuchs.com

Pepperl+Fuchs (India) Pvt. Ltd.
(Regional Sales Office - South)
(Karnataka & Andhra Pradesh)
C-328, 3rd Main, 1st Stage,
Peenya Industrial Estate
BANGALORE 560058
Telephone +91-80-28371225
Telefax +91-80-28378031
info@in.pepperl-fuchs.com

Pepperl+Fuchs (India) Pvt. Ltd.
(Regional Sales Office - South)
(Tamilnadu & Kerala)
No. 4, First Floor, X 70,
Sindur Shopping Complex,
2nd Avenue, Anna Nagar
CHENNAI 600040
Telephone +91-44-26212265
Telefax +91-44-26190129
cro@in.pepperl-fuchs.com

Pepperl+Fuchs (India) Pvt. Ltd.
(Regional Sales Office - East)
Room No. 221, II Floor "LORDS"
7/1, Lord Sinha Road
KOLKATA 700071
Telephone +91-33-22828539
Telefax +91-33-22828777
ero@in.pepperl-fuchs.com

Pepperl+Fuchs (India) Pvt. Ltd.
(Regional Sales Office - West)
No. 401, A-Wing, Subham Ctr. 1, 4th
fl.
Cardinal Gracias Road, Chakala
Andheri (East)
MUMBAI - 400099
Telephone +91-22-28231946
Telefax +91-22-28231947
wro@in.pepperl-fuchs.com

Pepperl+Fuchs India Pvt. Ltd.
(Hyderabad Area Sales Office)
Hi Tech Business Centre, 4th Floor,
Topaz Bldg.
Amrutha Hills, Punjagutta
HYDERABAD 500082
Telephone +91-40-23407053
Telefax +91-40-23407093
hyderabad@in.pepperl-fuchs.com

Pepperl+Fuchs (India) Pvt. Ltd.
(Coimbatore Area Sales Office)
43A, 1st Floor
7th Street, K. K. Pudur, Tamilnadu
COIMBATORE 641038
Telephone +91-42-22450727
Telefax +91-42-22450727
coimbatore@in.pepperl-fuchs.com

Pepperl + Fuchs (India) Pvt. Ltd.
(Jamshedpur Resident Office)
FA/23, Sindhu Block, Siroman Nagar
Binda Apartment, Dimna Road,
Mango
Jharkhand JAMSHEDPUR 830018
Telephone +91-65-72363146
Telefax +91-65-72363146
jamshedpur@in.pepperl-fuchs.com

Indonesia

PT Himalaya Everest Jaya
(FA Representation)
Jalan Daan Mogot Km. 10,
No. 151 Pesing Poglar
11710 JAKARTA Barat
Telephone +62-21-5448956
Telefax +62-21-6194658
himalaya@indosat.net.id

PT Binakarya Sentosaprima
(PA Representation)
Citra Garden 1 Blok C-2/24
11840 JAKARTA
Telephone +62-21-5451136
Telefax +61-21-5403647
ptbina@cbn.net.id

PT. Pepperl and Fuchs Bintan
SD 56, 57 Lobam
Bintan Industrial Estate
PULAU BINTAN, RIAU
Telephone +62-770-696675
Telefax +62-770-696677

Japan

Pepperl+Fuchs K.K.
German Industry Center 401
18-2 Hakusan 1-Chome, Midori-Ku
226-0006 YOKOHAMA
Telephone +81-45-9397802
Telefax +81-45-9397804
sales@jp.pepperl-fuchs.com

Korea

Pepperl+Fuchs Korea Ltd.
Bum-Yang Bang-Bae Bldg.
5th Floor, #811-6, Bang Bae-dong
Seo Cho-Ku
137060 SEOUL
Telephone +82-2-34819494
Telefax +82-2-34819495
info@kr.pepperl-fuchs.com

Malaysia

Industrial Automation (M) Sdn Bhd
(FA Representation)
30-3 & 30-4, Jalan Loke Yew
55200 KUALA LUMPUR
Telephone +60-3-9221-0511
Telefax +60-3-9221-2330
iakl@tm.net.my

INEAX Process Sdn Bhd
(PA Representation)
33-A, Jalan Anggerik Vanilla AB31/
AB
Kota kemuning
40460 SHAH ALAM, SELANGOR
DARUL EHSAN
Telephone +60-3-5121-5515
Telefax +60-3-5121-6652
sales@ineax.com

New Zealand

Unilink Automation Ltd.
(FA Representation)
PO Box 300785, Albany
10E Vega Place, Mairangi Bay
1330 AUCKLAND
Telephone +64-9-4760286
Telefax +64-9-4760267
sales@unilink.co.nz

Custom Control Ltd.
(PA Representation)
16 Mahunga Drive, Mangere Bridge
Private Bag 92 902
ONEHUNGA, AUCKLAND 6
Telephone +64-9-634-1391
Telefax +64-9-636-5976
jneville@customcontrols.co.nz

Philippines

Multiplex Instrumentation & Control
Equipment Services
(PA Representation)
3378 A Ibarra Street
PALANAN MAKATI CITY
Telephone +63-2-550-1473
Telefax +63-2-550-1475
multiplexphil@yahoo.com

Process Innovations, Inc.
(FA Representation for Luzon)
W-11 Guadalupe Arcadia Square
J. P. Rizal Ext.
CEMBO MAKATI CITY
Telephone +63-2-8826411
Telefax +63-2-8826357
pi-filters@surfshop.net.ph

Sri Lanka

Nikini Automation Systems (Pvt) Ltd.
(FA Representation)
247/249 High Level Road
COLOMBO 5
Telephone +94-1-826-894
Telefax +94-1-826-252
sales@nikiniautomation.com

Taiwan

Kawa Kami Enterprise Corp.
(FA Representation)
1F, No. 41, Lane 76,
Jui Kuang Road, Neihs District Taipei
114 Taiwan Republic of China
Telephone +886-2-2792-0078
Telefax +886-2-8791-7969
kawa.kami@msa.hinet.net

Globe Royal Cavalier Corporation
(PA Representation)
6th Floor, 23 Jen Ai Road
Sec. 3 Tapei
10627 Taiwan Republic of China
Telephone +886-2-2771-8246
Telefax +886-2-2751-9032
grcc@ms19.hinet.net

Shining World Co., Ltd.
(PA Representation)
5F, No. 89, Li Te Street
Jung He City, Taipei,
TAIWAN REPUBLIC OF CHINA
Telephone +886-2-226-9168
Telefax +886-2-228-7689
shining.crh@mas.hinet.net

Thailand

Industrial Electrical Co., Ltd.
(FA Representation)
85/3 Soi Sot Phin San
Rang Nam Road
10400 Rajthevee, BANGKOK
Telephone +66-2-642-7887
Telefax +66-2-642-4249
iecl@ie.co.th

Delta Elmech Co., Ltd.
(PA Representation)
72 Soi Pattanakarn 53,
(Muangthong 2/3)
Pattanakarn Road
10250 Suanluang BANGKOK
Telephone +66-2-322-5423
Telefax +66-2-322-1762
deltabkk@deltaelmech.co.th

Vietnam

Provina Technology Co. Ltd.
(FA Representation)
148B Nam Ky Khoi Nghia
Q1 TP
HO CHI MINH CITY
Telephone +84-8-8298901
Telefax +84-8-8295486
provina@hcm.vnn.vn

Van Tuong Company Limited
(Vatusys)
(PA Representation)
90 C Vo Thi Sau Road
District 1
HO CHI MINH CITY
Telephone +84 8 8203220
Telefax +84 8 8203176
vatusys@hcm.vnn.vn



AIR 16-S MASTER	30	LTK2-8-HS-6000/31/115	64
AIR 16-S SLAVE	30	ML29 Front Plate	108
AIR16	105	ML29-2P/25/103/143	38
AIR16-S Holder Set	104	ML29-P/25/102/115	40
AIR30-8-H-2500/32/76a	36	ML29-P/25/102/143	40
AIR30-8-H-2500/38a	36	ML29-P/25/103/115	40
AIR30-8-HW-2500/32/76a	36	ML29-P/25/103/143	40
AIR30-8-HW-2500/38a/76a	36	ML29-P/59/102/115	42
AL2012-P-1650/49/76a	76	ML29-P/59/102/143	42
AL2016-P-1650/49/76a	76	ML29-P/59/103/115	42
AL2109-P-1820/40b/49/143	74	ML29-P/59/103/143	42
AL4012-P-1650/49/76a	76	ML29T-P/32/59/115 100mm	44
AL4016-P-1650/49/76a	76	MLV12-54-2563/49/124	70
Deckel-Zapfen	107	Montageplatte FLT	107
EINBAUDECKEL AIR30	108	Montageplatte LT	107
FLT-300-AR	108	Mounting Set AL2109 back board	106
FLT-500-AR	108	Mounting Set AL2109 extension	106
FLT-50-AR	108	Mounting Set AL2109 lateral	106
FLT-8-H-2800-300/120a	86	OFR-100/100	98
FLT-8-H-2800-300/25/31	86	OMH-21	99
FLT-8-H-2800-50/120a	86	OMH-91	99
FLT-8-H-2800-50/25/31	86	OMH-K01	99
FLT-8-H-2800-500/120a	86	OMH-K02	99
FLT-8-H-2800-500/59/101	86	OMH-MLV12-HWG	101
FLT-8-H-2800-500/59/31	86	OMH-MLV12-HWK	101
FLT-8-HW-2800-300/25/31	88	OMH-RL31-01	100
FLT-8-HW-2800-50/25/31	88	OMH-RL31-02	100
FLT-8-HW-2800-50/31/59	88	OMH-RL31-03	100
FLT-8-HW-2800-500/25/31	88	OMH-RLK29	101
FLT-8-HW-2800-500/59/101	88	OMH-RLK29-HW	101
FLT-8-HW-2800-CLS	46	OMH-VDM35	103
FLT-D/38a sw	24	OMH-VDM35-01	103
LA31/LK31/25/31/115 SET	56	PIR20/31 sw	26
LAGERBOCK AIR16	105	PROSCAN/32	22
LC10-1-D 115 VAC	66	PROSCAN/38a	22
LC10-1-D 230 VAC	66	PROSCAN-T/32/76a	22
LC10-1-D 24 VAC	66	Reflector Weather Cap	98
LC10-1-D 24 VDC	66	REFLEKTOR C110-2	98
LC10-2-D 115 VAC	68	REFLEKTOR H160	98
LC10-2-D 230 VAC	68	REFLEKTOR H180	97
LC10-2-D 24 VAC	68	REFLEKTOR H50	97
LC10-2-D 24VDC	68	REFLEKTOR H60	97
LT2-8-HS-2000/47/105	60	REFLEKTOR H85-2	97
LT2-8-HS-2000/47/115	60	RL91-54-RT/25/38a/73c	78
LT2-8-HS-2000/49/105	60	RL91-54-RT/25/49/115	78
LT2-8-HS-2000/49/115	60	RL91-54-RT/38a/59/115	78
LT2-8-HS-6000/47/105	62	RL91-54-RT/38a/59/73c	78
LT2-8-HS-6000/47/115	62	RL91-54-RT/49/59/115	78
LT2-8-HS-6000/49/105	62	RL91-54-RT/49/59/73c	78
LT2-8-HS-6000/49/115	62	RL91-6-IR/25/38a/115	82
LTK2-8-HS-2000/31/105	64	RL91-6-IR/25/49/115	82
LTK2-8-HS-2000/31/115	64	RL91-6-IR/38a/59/115	82
LTK2-8-HS-6000/31/105	64	RL91-6-IR/38a/59/73c	82

Date of issue 06/20/2007

RL91-6-IR/49/59/115	82	TOPSCAN2-8-HS-2500-1/L900/38a	32
RL91-6-IR/49/59/73c	82	TOPSCAN2-8-HS-2500-2/L750/38a	34
RLK29-55/25/116	50	TOPSCAN2-8-HS-2500-3/L1200/38a	34
RLK29-55/25/116-Set	50	TOPSCAN2-8-HS-2500-3/L1350/38a	34
RLK29-55/59/116	52	TOPSCAN2-8-HS-2500-3/L900/38a	34
RLK29-55/59/116-Set	52	TopScan-S Cover L1400	104
RLK31-54/25/31/115 SET	54	TopScan-S Gasket IP54	102
RLK91-54-RT/31/59/115	80	TopScan-S Profile L1400	104
RLK91-6-IR/25/31/115	84	TopScan-S Test Kit	102
RLK91-6-IR/31/59/115	84	TopScan-S-M/L310	28
RMS Remote control	102	TopScan-S-M2S/L750	28
RMS Weather cap	102	TopScan-S-M3S/L900	28
RMS-D	18	TopScan-S-M5S/L1400	28
RMS-D-RC	18	UP-Einbaurahmen	107
RMS-G-RC	58	VDM35-AR	103
RMS-M	16	VDM70-10-L/87/122/160	90
RMS-M-RC	16	VDM70-250-R/20/87/160	90
RMS-S	20	Zwischenkabel ZWK AIR16 200mm	105
RMS-S-FRW	20	Zwischenkabel ZWK AIR16 300mm	105
TOPSCAN2-8-HS-2500-1/L1000/38a	32	Zwischenkabel ZWK AIR16 700mm	105
TOPSCAN2-8-HS-2500-1/L330/38a	32	ZWKAIR16-S-TOPSCAN 160mm	104
TOPSCAN2-8-HS-2500-1/L750/38a	32	ZWKAIR16-S-TOPSCAN 240mm	104

FACTORY AUTOMATION – SENSING YOUR NEEDS



Pepperl+Fuchs sets the standard in quality and innovative technology for the world of automation. Our expertise, dedication, and heritage of innovation have driven us to develop the largest and most versatile line of industrial sensor technologies and interface components in the world. With our global presence, reliable service, and flexible production facilities, Pepperl+Fuchs delivers complete solutions for your automation requirements – wherever you need us.



Contact

Pepperl+Fuchs GmbH
Königsberger Allee 87
68307 Mannheim · Germany
Tel. +49 621 776-4411 · Fax +49 621 776-27-4411
E-mail: fa-info@de.pepperl-fuchs.com

Worldwide Headquarters

Pepperl+Fuchs GmbH · Mannheim · Germany
E-mail: info@de.pepperl-fuchs.com

USA Headquarters

Pepperl+Fuchs Inc. · Twinsburg · USA
E-mail: sales@us.pepperl-fuchs.com

Asia Pacific Headquarters

Pepperl+Fuchs Pte Ltd · Singapore
Company Registration No. 199003130E
E-mail: sales@sg.pepperl-fuchs.com

www.pepperl-fuchs.com

 **PEPPERL+FUCHS**
SENSING YOUR NEEDS