

## Section 16

## NEMA and Definite Purpose Contactors and Starters



Manual Starters and Switches



Definite Purpose Contactors and Starters



NEMA Style Type S Contactors and Starters



Lighting Contactors



Combination Starters



Pump Panel



NEMA Style TeSys N Contactors and Starters

|                                                              |               |
|--------------------------------------------------------------|---------------|
| <b>Selection Information</b>                                 | <b>16-2</b>   |
| <b>Manual Starters and Switches</b>                          | <b>16-4</b>   |
| <b>TeSys™ U Motor Starters</b>                               | <b>16-12</b>  |
| <b>TeSys™ N Contactors and Starters</b>                      | <b>16-13</b>  |
| <b>Type S Full Voltage Contactors and Starters</b>           | <b>16-28</b>  |
| <b>Vacuum Contactors and Starters, Full Voltage</b>          | <b>16-43</b>  |
| <b>Type S Combination Starters</b>                           | <b>16-46</b>  |
| <b>Type S Reversing Full Voltage Contactors and Starters</b> | <b>16-60</b>  |
| <b>Reversing Vacuum Contactors, Full Voltage</b>             | <b>16-66</b>  |
| <b>Type S Reversing Combination Starters</b>                 | <b>16-67</b>  |
| <b>Lighting Contactors</b>                                   | <b>16-74</b>  |
| <b>Definite Purpose Contactors</b>                           | <b>16-89</b>  |
| <b>Definite Purpose Starters</b>                             | <b>16-92</b>  |
| <b>Well-Guard Control™ Pump Panels</b>                       | <b>16-93</b>  |
| <b>Duplex AC Motor Controllers</b>                           | <b>16-96</b>  |
| <b>Reversing Definite Purpose Contactors</b>                 | <b>16-99</b>  |
| <b>Overload Relays</b>                                       | <b>16-100</b> |
| <b>Separate Enclosures</b>                                   | <b>16-110</b> |
| <b>Factory Modifications (Forms)</b>                         | <b>16-117</b> |
| <b>Magnetic Coils</b>                                        | <b>16-122</b> |
| <b>Replacement Parts Kits</b>                                | <b>16-124</b> |
| <b>Accessories</b>                                           | <b>16-126</b> |
| <b>Thermal Units</b>                                         | <b>16-132</b> |

## Selection Information



| Class                        | 2510, 2511, 2512                                                     | T02, T36                                                                                                                     | 8502 & 8702                                                          | 8536 & 8736                                                          | 8538 & 8738                                                          |
|------------------------------|----------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------|----------------------------------------------------------------------|----------------------------------------------------------------------|
|                              |                                                                      | NEMA Style, Full Voltage Non-Reversing and Full Voltage Reversing                                                            |                                                                      |                                                                      |                                                                      |
| Type of Product              | Manual Starters and Switches, Non-Reversing, Reversing and Two Speed | TeSys™ N Contactors and Starters                                                                                             | AC Magnetic Contactors                                               | AC Magnetic Starters                                                 | Combination Magnetic Starters with Disconnect Switch                 |
| Page                         | <a href="#">page 16-4</a>                                            | <a href="#">page 16-14</a>                                                                                                   | 8502: <a href="#">page 16-29</a><br>8702: <a href="#">page 16-60</a> | 8536: <a href="#">page 16-33</a><br>8736: <a href="#">page 16-62</a> | 8538: <a href="#">page 16-47</a><br>8738: <a href="#">page 16-67</a> |
| NEMA Sizes                   | M-0<br>M-1<br>M-1P                                                   | 00–7                                                                                                                         | 00–7                                                                 | 00–7                                                                 | 8538: 0–6<br>8738: 0–5                                               |
| Load Voltage                 | Type F: 277 Vac<br>Types K & M: 600 Vac                              | 600 Vac Max.                                                                                                                 | 600 Vac Max.                                                         | 600 Vac Max.                                                         | 600 Vac Max.                                                         |
| Current Ratings (Continuous) | Type F: 16 A<br>Types K & M: 30 A                                    | 9–810 A                                                                                                                      | 9–810 A                                                              | 9–810 A                                                              | 8538: 18–540 A<br>8738: 18–270 A                                     |
| Horsepower Ratings (Maximum) | Type F: 1<br>Type K: 20<br>Type M: 10                                | 600                                                                                                                          | 0.5–600                                                              | 0.5–600                                                              | 8538: 0.5–400<br>8738: 0.5–200                                       |
| Overload Relay               | Type F: Melting Alloy<br>Type K: N/A<br>Type M: Melting Alloy        | Contactors: N/A<br>Starters: Bimetallic (Size 00-2) or Solid-State                                                           | N/A                                                                  | Melting Alloy<br>Bimetallic (Size 00–2)<br>Solid State               | Melting Alloy<br>Bimetallic (Size 0–2)<br>Solid State                |
| Enclosure Types              | 1, Flush Mount, 3R, 4, 4X, 7 & 9 and Open                            | Open                                                                                                                         | 1, 3R, 4, 4X, 12/3R, 7 & 9 and Open                                  | 1, 3R, 4, 4X, 12/3R, 7 & 9 and Open                                  | 1, 4, 4X, 12/3R                                                      |
| Approvals                    | UL File E42243 NLRV<br>UR File E42243 NLRV2<br>CSA File LR 25490     | Contactors: UL File E164862 NLDX<br>CSA LR43364 Class 3211-24<br>Starters: UL File E152395 NKJH<br>CSA LR60905 Class 3211-24 | UL File E78351 NLDX<br>CSA 60905 Class 3211-04                       | UL File E78351 NLDX<br>CSA 60905 Class 3211-04                       | UL File E152395 NKJH7<br>CSA LR584 Class 3211 04                     |

Selection Information



| Class                        | 8539 & 8739                                                   | 8903L & 8903S                                                                                                                                  | 8903<br>Combination Devices                                                                                                          | 8910, 8911, 8965                                                                                                                                                 | 8940                                                                                                        | 8941                                                                                                      |
|------------------------------|---------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|
| Type of Product              | Combination Magnetic Starters with PowerPact™ Circuit Breaker | Multipole electrically held and mechanically held contactors available in 30 A configurations to 12 poles and 800 A configurations to 3 poles. | Type S lighting contactors electrically held and mechanically held available with disconnect switches or PowerPact™ circuit breakers | Definite Purpose non-reversing contactors available as compact 1 or 2 pole to 40 A and 2 to 4 pole to 90 A. Reversing and Starter Configurations also available. | Well-Guard Control™ Pumping Plant Panels available with disconnect switches or PowerPact™ circuit breakers. | NEMA Style AC Duplex Motor Controllers available as a combination starter or without disconnecting means. |
| Page                         | 8539: page 16-51<br>8739: page 16-69                          | page 16-74                                                                                                                                     | page 16-77                                                                                                                           | 8910: page 16-89<br>8911: page 16-92<br>8965: page 16-99                                                                                                         | page 16-93<br>page 16-94                                                                                    | page 16-96                                                                                                |
| NEMA Sizes                   | 8539: 0–7<br>8739: 0–6                                        | N/A                                                                                                                                            | N/A                                                                                                                                  | N/A                                                                                                                                                              | 1–7                                                                                                         | 1–4                                                                                                       |
| Load Voltage                 | 600 Vac Max.                                                  | 600 Vac Max.                                                                                                                                   | 600 Vac Max.                                                                                                                         | 600 Vac Max.                                                                                                                                                     | 600 Vac Max.                                                                                                | 600 Vac Max.                                                                                              |
| Current Ratings (Continuous) | 8539: 18–810 A<br>8739: 18–540 A                              | 8903L to 30 A<br>8903S to 800 A                                                                                                                | 300 A (Disconnect)<br>600 A (Circuit Breaker)                                                                                        | 20–40 A (Compact)<br>20–90 A                                                                                                                                     | 27–810 A                                                                                                    | 27–135 A                                                                                                  |
| Horsepower Ratings (Maximum) | 8539: 0.5–600<br>8739: 0.5–400                                | N/A                                                                                                                                            | N/A                                                                                                                                  | 0.5–50                                                                                                                                                           | 0.5–600                                                                                                     | 0.5–100                                                                                                   |
| Overload Relay               | Melting Alloy<br>Bimetallic (Size 0–1)<br>Solid State         | N/A                                                                                                                                            | N/A                                                                                                                                  | Melting Alloy (8911)                                                                                                                                             | Melting Alloy<br>Bimetallic<br>Solid State                                                                  | Melting Alloy<br>Bimetallic<br>Solid State                                                                |
| Enclosure Types              | 1, 4, 4X, 12/3R                                               | 1, 3R, 4, 4X, 12/3R and Open                                                                                                                   | 1, 4, 4X, 12/3R                                                                                                                      | 1                                                                                                                                                                | 3R                                                                                                          | 1, 4, 4X, 12/3R and Open                                                                                  |
| Approvals                    | UL File E152395 NKJH7<br>CSA LR584<br>Class 3211 04           | UL File E78427 NRNT<br>CSA LR60905<br>Class 3231 01                                                                                            | UL File E16151 NRNT<br>cUL File E16151 NRNT                                                                                          | UL E3190 NLDX2<br>CSA LR25490<br>Class 3211 04                                                                                                                   | UL/cUL 152395 NKJH                                                                                          | UL File E152395 NKJH7                                                                                     |

## Fractional Horsepower Manual Starters with Melting Alloy Type Thermal Overload Relay

Table 16.1: Single-Unit Types—Class 2510—Rated 16 A—Thermal Units (see Thermal Unit Selection, page 16-132)


| Type of Operator                              | No. of Poles | Features                            | NEMA 1 General Purpose Enclosure Surface Mounting |           | General Purpose Flush Mounting (Without Pull Box)   |                                      |                                   | NEMA Type 4 <sup>[1]</sup> Enclosure Watertight and Dusttight | NEMA Types 3R, 7 & 9 Enclosure Hazardous Locations Div. 1 & 2 Class I Groups B, C, & D, & Class II Groups E, F, & G | Open Type                     | Number of Thermal Units Required |
|-----------------------------------------------|--------------|-------------------------------------|---------------------------------------------------|-----------|-----------------------------------------------------|--------------------------------------|-----------------------------------|---------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|-------------------------------|----------------------------------|
|                                               |              |                                     | Standard                                          | Oversized | Gray Flush Plate                                    | Standard Stainless Steel Flush Plate | Jumbo Stainless Steel Flush Plate |                                                               |                                                                                                                     |                               |                                  |
|                                               |              |                                     | Type                                              | Type      | Type                                                | Type                                 | Type                              |                                                               |                                                                                                                     |                               |                                  |
| Basic Starter—Class 2510                      |              |                                     |                                                   |           |                                                     |                                      |                                   |                                                               |                                                                                                                     |                               |                                  |
| Toggle                                        | 1            | Standard                            | FG1                                               | FGJ1      | FF1                                                 | FS1                                  | —                                 | —                                                             | —                                                                                                                   | FO1                           | 1                                |
|                                               |              | With Red Pilot Light <sup>[2]</sup> | FG1P                                              | FGJ1P     | FF1P                                                | FS1P                                 | FSJ1P                             | —                                                             | —                                                                                                                   | FO1P                          | 1                                |
|                                               | 2            | Standard                            | FG2                                               | FGJ2      | FF2                                                 | FS2                                  | —                                 | —                                                             | —                                                                                                                   | FO2                           | 1                                |
|                                               |              | With Red Pilot Light <sup>[2]</sup> | FG2P                                              | FGJ2P     | FF2P                                                | FS2P                                 | FSJ2P                             | —                                                             | —                                                                                                                   | FO2P                          | 1                                |
| Key                                           | 1            | Standard                            | FG3                                               | FGJ3      | FF3                                                 | FS3                                  | —                                 | —                                                             | —                                                                                                                   | FO3                           | 1                                |
|                                               |              | With Red Pilot Light <sup>[2]</sup> | FG3P                                              | FGJ3P     | FF3P                                                | FS3P                                 | FSJ3P                             | —                                                             | —                                                                                                                   | FO3P                          | 1                                |
|                                               | 2            | Standard                            | FG4                                               | FGJ4      | FF4                                                 | FS4                                  | —                                 | —                                                             | —                                                                                                                   | FO4                           | 1                                |
|                                               |              | With Red Pilot Light <sup>[2]</sup> | FG4P                                              | FGJ4P     | FF4P                                                | FS4P                                 | FSJ4P                             | —                                                             | —                                                                                                                   | FO4P                          | 1                                |
| Starter with Handle Guard/Lock-Off—Class 2510 |              |                                     |                                                   |           |                                                     |                                      |                                   |                                                               |                                                                                                                     |                               |                                  |
| Toggle                                        | 1            | Standard                            | FG5                                               | FGJ5      | Order basic starter plus separate handle guard kit. |                                      |                                   | FW1                                                           | FR1                                                                                                                 | <sup>[3]</sup> <sup>[4]</sup> | 1                                |
|                                               |              | With Red Pilot Light <sup>[2]</sup> | FG5P                                              | FGJ5P     |                                                     |                                      |                                   | FW1P                                                          | —                                                                                                                   | <sup>[3]</sup> <sup>[4]</sup> | 1                                |
|                                               | 2            | Standard                            | FG6                                               | FGJ6      |                                                     |                                      |                                   | FW2                                                           | FR2                                                                                                                 | <sup>[3]</sup> <sup>[4]</sup> | 1                                |
|                                               |              | With Red Pilot Light <sup>[2]</sup> | FG6P                                              | FGJ6P     |                                                     |                                      |                                   | FW2P                                                          | —                                                                                                                   | <sup>[3]</sup> <sup>[4]</sup> | 1                                |

Table 16.2: Duplex Units—Class 2510

| Type of Operator                                                    | No. of Poles                | Features                           | NEMA 1 General Purpose Enclosure Surface Mounting | General Purpose Flush Mounting (Without Pull Box) |                                                         |                                | Number of Thermal Units Required |
|---------------------------------------------------------------------|-----------------------------|------------------------------------|---------------------------------------------------|---------------------------------------------------|---------------------------------------------------------|--------------------------------|----------------------------------|
|                                                                     |                             |                                    | Type                                              | Gray Flush Plate for Wall or Cavity Mounting      | Stainless Steel Flush Plate for Wall or Cavity Mounting | Replacement Starter Class 2510 |                                  |
| Type                                                                |                             |                                    |                                                   |                                                   |                                                         |                                |                                  |
| One Starter in Duplex Enclosure—Class 2510                          |                             |                                    |                                                   |                                                   |                                                         |                                |                                  |
| Toggle                                                              | 2                           | Standard                           | FG02                                              | —                                                 | —                                                       | —                              | 1                                |
|                                                                     |                             | With Red Pilot Light [2]           | FG02P                                             | —                                                 | —                                                       | —                              |                                  |
| Key                                                                 | 2                           | With Red Pilot Light [2]           | FG04P                                             | —                                                 | —                                                       | —                              | 1                                |
| Two Starters in One Enclosure—Class 2510                            |                             |                                    |                                                   |                                                   |                                                         |                                |                                  |
| Toggle                                                              | 2 Each Str.                 | Standard                           | FG22                                              | FF22                                              | —                                                       | —                              | 2                                |
|                                                                     |                             | With Red Pilot Light on Each[2]    | FG22P                                             | FF22P                                             | FS22P                                                   | —                              |                                  |
| Key                                                                 | 2 Each Str.                 | With Red Pilot Light on Each[2]    | FG44P                                             | FF44P                                             | FS44P                                                   | —                              | 2                                |
| Starter and Auto-Off-Hand SPDT Selector Switch (AC Only)—Class 2510 |                             |                                    |                                                   |                                                   |                                                         |                                |                                  |
| Toggle                                                              | 1                           | Standard                           | FG71                                              | FF71                                              | —                                                       | —                              | 1                                |
|                                                                     |                             | With Red Pilot Light [2]           | FG71P                                             | FF71P                                             | FS71P                                                   | —                              |                                  |
|                                                                     | 2                           | Standard                           | FG72                                              | FF72                                              | —                                                       | —                              | 1                                |
|                                                                     |                             | With Red Pilot Light[2]            | FG72P                                             | FF72P                                             | FS72P                                                   | —                              |                                  |
| Key                                                                 | 2                           | With Red Pilot Light[2]            | FG74P                                             | FF74P                                             | FS74P                                                   | —                              | 1                                |
| Two Speed Starters (AC Only)—Class 2512                             |                             |                                    |                                                   |                                                   |                                                         | Replacement Starter—Class 2510 |                                  |
| Toggle                                                              | 1                           | With Mechanical Interlock:         |                                                   |                                                   |                                                         |                                | 2                                |
|                                                                     |                             | Standard                           | FG11                                              | FF11                                              | —                                                       | FO1T                           |                                  |
|                                                                     |                             | With 2 Red Pilot Lights [2]        | FG11P                                             | FF11P                                             | —                                                       | FO1PT                          |                                  |
|                                                                     |                             | With High-Off-Low Selector Switch: |                                                   |                                                   |                                                         |                                |                                  |
|                                                                     | With 2 Red Pilot Lights [2] | —                                  | —                                                 | FS101P                                            | FO1PT                                                   |                                |                                  |
|                                                                     | 2                           | With Mechanical Interlock:         |                                                   |                                                   |                                                         |                                | 2                                |
|                                                                     |                             | Standard                           | FG22                                              | FF22                                              | —                                                       | FO2T                           |                                  |
|                                                                     |                             | With 2 Red Pilot Lights [2]        | FG22P                                             | FF22P                                             | —                                                       | FO2PT                          |                                  |
|                                                                     |                             | With High-Off-Low Selector Switch: |                                                   |                                                   |                                                         |                                |                                  |
|                                                                     | With 2 Red Pilot Lights [2] | —                                  | —                                                 | FS202P                                            | FO2PT                                                   |                                |                                  |



Type FG2P



Type FO2

Table 16.3: Horsepower Ratings, Type F (continuous current rating: 16 A)

| Volts | Maximum Horsepower |        |                |
|-------|--------------------|--------|----------------|
|       | AC Single Phase    |        | DC 2-Pole Only |
|       | 1-Pole             | 2-Pole |                |
| 115   | 1                  | 1      | 3/4            |
| 230   | 1                  | 2      | 3/4            |
| 277   | 1                  | 1      | —              |

Table 16.4: Approvals—2510 Type F and K

| Agency | Enclosed                                    | Open                                             |
|--------|---------------------------------------------|--------------------------------------------------|
| UL     | UL Listed File: E42243, CCN: NLRV           | UL Component Recognized File: E42243, CCN: NLRV2 |
| CSA    | CSA Certified File: LR25490, Class: 3211-05 |                                                  |

Table 16.5: How to Order

| To Order Specify: | Catalog Number |      |
|-------------------|----------------|------|
| • Class Number    | Class          | Type |
| • Type Number     | 2510           | FG1  |

[1] Furnished with one 3/4" pipe tap in the bottom (reversible for top feed). For a 3/4" pipe tap in the top and bottom, add the suffix H to the Type.

[2] For a green pilot light, add the letter G to the catalog number (i.e. 2510FG2PG).

[3] For a replacement starter, order the Open type above.

[4] When replacing a starter equipped with a pilot light in NEMA 4 enclosure, retain the pilot light mounting bracket from the original device.



## Manual Switches, Type K

**Table 16.6: Non-Reversing—Class 2510**

| Operator Style | No. of Poles | Features                        | NEMA 1 General Purpose Enclosure Surface Mounting |           | General Purpose Flush Mounting (Without Pull Box) |                                      |                                   | NEMA 4 Enclosure <sup>[5]</sup> Watertight and Dusttight | NEMA 3R, 7 & 9 Enclosures <sup>[5]</sup> Hazardous Locations Div. 1 & 2 Class I Groups B, C, & D, & Class II Groups E, F, and G | Open Style          |
|----------------|--------------|---------------------------------|---------------------------------------------------|-----------|---------------------------------------------------|--------------------------------------|-----------------------------------|----------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|---------------------|
|                |              |                                 | Standard                                          | Oversized | Gray Flush Plate                                  | Standard Stainless Steel Flush Plate | Jumbo Stainless Steel Flush Plate |                                                          |                                                                                                                                 |                     |
|                |              |                                 | Type                                              | Type      | Type                                              | Type                                 | Type                              | Type                                                     | Type                                                                                                                            | Type                |
| Toggle         | 2            | Standard                        | KG1                                               | KGJ1      | KF1                                               | KS1                                  | —                                 | KW1                                                      | KR1                                                                                                                             | KO1                 |
|                |              | With Pilot Light <sup>[6]</sup> | KG1A                                              | KGJ1A     | KF1A                                              | KS1A                                 | KSJ1A                             | KW1A                                                     | —                                                                                                                               | KO1A <sup>[7]</sup> |
|                |              | 115 Vac                         | KG1B                                              | KGJ1B     | KF1B                                              | KS1B                                 | KSJ1B                             | KW1B                                                     | —                                                                                                                               | KO1B <sup>[7]</sup> |
|                | 3            | Standard                        | KG2                                               | KGJ2      | KF2                                               | KS2                                  | —                                 | KW2                                                      | KR2                                                                                                                             | KO2                 |
|                |              | With Pilot Light <sup>[6]</sup> | KG2B                                              | KGJ2B     | KF2B                                              | KS2B                                 | KSJ2B                             | KW2B                                                     | —                                                                                                                               | KO2B <sup>[7]</sup> |
|                |              | 208–277 Vac                     | KG2C                                              | KGJ2C     | KF2C                                              | KS2C                                 | KSJ2C                             | KW2C                                                     | —                                                                                                                               | KO2C <sup>[7]</sup> |
|                | 2            | Standard                        | KG5                                               | KGJ5      | —                                                 | —                                    | —                                 | KW5                                                      | —                                                                                                                               | KO5                 |
|                |              | With Pilot Light <sup>[6]</sup> | KG5A                                              | —         | —                                                 | —                                    | —                                 | KW5A                                                     | —                                                                                                                               | KO5A <sup>[7]</sup> |
|                |              | 115 Vac                         | KG5B                                              | —         | —                                                 | —                                    | —                                 | KW5B                                                     | —                                                                                                                               | KO5B <sup>[7]</sup> |
|                | 3            | Standard                        | KG6                                               | KGJ6      | —                                                 | —                                    | —                                 | KW6                                                      | —                                                                                                                               | KO6                 |
|                |              | With Pilot Light <sup>[6]</sup> | KG6B                                              | —         | —                                                 | —                                    | —                                 | KW6B                                                     | —                                                                                                                               | KO6B <sup>[7]</sup> |
|                |              | 208–277 Vac                     | KG6C                                              | —         | —                                                 | —                                    | —                                 | KW6C                                                     | —                                                                                                                               | KO6C <sup>[7]</sup> |
| Key            | 2            | Standard                        | KG3                                               | KGJ3      | KF3                                               | KS3                                  | —                                 | —                                                        | —                                                                                                                               | KO3                 |
|                |              | With Pilot Light <sup>[6]</sup> | KG3A                                              | KGJ3A     | KF3A                                              | KS3A                                 | KSJ3A                             | —                                                        | —                                                                                                                               | KO3A                |
|                |              | 115 Vac                         | KG3B                                              | KGJ3B     | KF3B                                              | KS3B                                 | KSJ3B                             | —                                                        | —                                                                                                                               | KO3B                |
|                | 3            | Standard                        | KG4                                               | KGJ4      | KF4                                               | KS4                                  | —                                 | —                                                        | —                                                                                                                               | KO4                 |
|                |              | With Pilot Light <sup>[6]</sup> | KG4B                                              | KGJ4B     | KF4B                                              | KS4B                                 | KSJ4B                             | —                                                        | —                                                                                                                               | KO4B                |
|                |              | 208–277 Vac                     | KG4C                                              | KGJ4C     | KF4C                                              | KS4C                                 | KSJ4C                             | —                                                        | —                                                                                                                               | KO4C                |

**Table 16.7: Reversing—Class 2511**

| Operator Style | No. of Poles | Suitable for Motor Types                                        | Features (Including Mechanical Interlock) | NEMA 1 General Purpose Enclosure Surface Mounting | With Flush Plate for Cavity Mounting (Without Pull Box) | Replacement Switch Class 2510 |
|----------------|--------------|-----------------------------------------------------------------|-------------------------------------------|---------------------------------------------------|---------------------------------------------------------|-------------------------------|
|                |              |                                                                 |                                           | Type                                              | Type                                                    | Type                          |
| Toggle         | 2            | 1 Ø 3-Lead Repulsion-Induction                                  | Standard                                  | KG11                                              | KF11                                                    | KO1T                          |
|                |              |                                                                 | With Pilot Light <sup>[6]</sup>           | KG11A                                             | KF11A                                                   | KO1AT                         |
|                |              |                                                                 | 115 Vac                                   | KG11B                                             | KF11B                                                   | KO1BT                         |
|                | 3            | 3 Ø; Also 1 Ø Capacitor, Split Ø, or 4-Lead Repulsion-Induction | Standard                                  | KG22                                              | KF22                                                    | KO2T                          |
|                |              |                                                                 | With Pilot Light <sup>[6]</sup>           | KG22A                                             | KF22A                                                   | KO2AT                         |
|                |              |                                                                 | 110–120 Vac                               | KG22B                                             | KF22B                                                   | KO2BT                         |
|                |              |                                                                 | 208–220 Vac                               | KG22C                                             | KF22C                                                   | KO2CT                         |
|                |              |                                                                 | 440–600 Vac                               | KG22C                                             | KF22C                                                   | KO2CT                         |
|                |              |                                                                 | Standard                                  | KG22C                                             | KF22C                                                   | KO2CT                         |

**Table 16.8: Two Speed—Class 2512**

| Operator Style | No. of Poles | Suitable for Motor Types             | Features (Including Mechanical Interlock) | NEMA 1 General Purpose Enclosure Surface Mounting | With Flush Plate for Cavity Mounting (Without Pull Box) | Replacement Switch Class 2510 |
|----------------|--------------|--------------------------------------|-------------------------------------------|---------------------------------------------------|---------------------------------------------------------|-------------------------------|
|                |              |                                      |                                           | Type                                              | Type                                                    | Type                          |
| Toggle         | 2            | 1 Ø Two Winding (3-Lead)             | Standard                                  | KG11                                              | KF11                                                    | KO1T                          |
|                |              |                                      | With 2 Pilot Lights <sup>[6]</sup>        | KG11A                                             | KF11A                                                   | KO1AT                         |
|                |              |                                      | 115 Vac                                   | KG11B                                             | KF11B                                                   | KO1BT                         |
|                | 3            | 3 Ø Separate Winding (Wye-Connected) | Standard                                  | KG22                                              | KF22                                                    | KO2T                          |
|                |              |                                      | With 2 Pilot Lights <sup>[6]</sup>        | KG22B                                             | KF22B                                                   | KO2BT                         |
|                |              |                                      | 208–240 Vac                               | KG22C                                             | KF22C                                                   | KO2CT                         |

**Table 16.9: Class 2511 and 2512 Horsepower Ratings Type K**

| Device                    | No. of Poles | Motor Type AC                    | Maximum Hp              |       |           | Maximum DC Hp (breaking 2 poles) |       |       |                        |  |
|---------------------------|--------------|----------------------------------|-------------------------|-------|-----------|----------------------------------|-------|-------|------------------------|--|
|                           |              |                                  | 115 V                   | 230 V | 460–575 V | 90 V                             | 115 V | 230 V |                        |  |
| Class 2511                | 2            | 1 Ø                              | 2                       | 2     | 3         | 1                                | 2     | 1-1/2 |                        |  |
|                           | 3            | 3Ø                               | 2                       | 7-1/2 | 10        |                                  |       |       |                        |  |
|                           | 2            | 1 Ø                              | 2                       | 2     | 3         |                                  |       |       |                        |  |
| Class 2512                | 3            | 3 Ø, Constant or Variable Torque | 2                       | 7-1/2 | 10        |                                  |       |       |                        |  |
|                           | 3            | 3 Ø, Constant Hp                 | 2                       | 7-1/2 | 10        |                                  |       |       |                        |  |
| Continuous current rating |              |                                  | 30 A at 600 Vac maximum |       |           |                                  |       |       | 30 A at 24 Vdc maximum |  |

**Table 16.10: Class 2510 Horsepower Ratings**

| Class<br>2510             | No. of<br>Poles | Motor<br>Type AC | Maximum Hp              |          |          |          | Maximum DC Hp<br>(breaking 2 poles) |       |       |
|---------------------------|-----------------|------------------|-------------------------|----------|----------|----------|-------------------------------------|-------|-------|
|                           |                 |                  | 115<br>V                | 230<br>V | 460<br>V | 575<br>V | 90 V                                | 115 V | 230 V |
| KO1<br>KO3                | 2               | Single Ø         | 2                       | 2        | 3        | 3        | 1                                   | 2     | 1-1/2 |
| KO2<br>KO4                | 3               | Three Ø          | 2                       | 7-1/2    | 10       | 10       |                                     |       |       |
| KO5                       | 2               | Single Ø         | 2                       | 3        | 7-1/2    | 10       |                                     |       |       |
| KO6                       | 3               | Three Ø          | 2                       | 7-1/2    | 15       | 20       |                                     |       |       |
| Continuous current rating |                 |                  | 30 A at 600 Vac maximum |          |          |          | 30 A at 24 Vdc maximum              |       |       |

**Table 16.11: How to Order**

| To Order Specify: | Catalog Number |      |
|-------------------|----------------|------|
| • Class Number    | Class          | Type |
| • Type Number     | 2510           | KO2  |

<sup>[5]</sup> Furnished with one 3/4" pipe tap in the bottom (reversible for top feed). For a 3/4" pipe tap in the top and bottom, add the suffix **H** to the Type.

<sup>[6]</sup> For a green pilot light, add the letter **G** to the catalog number (i.e. 2510FG2PG).


<sup>[7]</sup> When replacing a starter equipped with a pilot light in NEMA 4 enclosure, retain the pilot light mounting bracket from the original device.



## NEMA 3R, 7, and 9 Aluminum Enclosure for Hazardous Locations

**Table 16.14: NEMA 3R, 7, and 9 Aluminum Enclosure for Hazardous Locations**

| Device                | Class | Type   |
|-----------------------|-------|--------|
| Fractional Hp Starter | 2510  | FR1, 2 |
| Motor Starting Switch | 2510  | KR1, 2 |

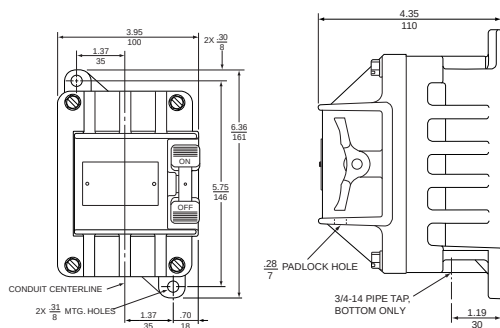

## Dimensions for Duplex Devices


**NOTE:** These dimensions are for reference only. If you need precise measurements, contact the Customer Care Center at 1-888-778-2733.

**Table 16.15: NEMA 1 General Purpose Surface Mount Enclosure for Duplex Devices**

| Device                                             | Type of Operator | Class | Type                              |
|----------------------------------------------------|------------------|-------|-----------------------------------|
| One Starter                                        | Toggle           | 2510  | FGO2, 02P                         |
|                                                    | Key              | 2510  | FGO4P                             |
| Two Starters                                       | Toggle           | 2510  | FG22, 22P                         |
|                                                    | Key              | 2510  | FG44P                             |
| One Starter and One Selector Switch <sup>[8]</sup> | Toggle           | 2510  | FG71, 71P, 72, 72P                |
|                                                    | Key              | 2510  | FG74P                             |
| Reversing Switch <sup>[9]</sup>                    | Toggle           | 2511  | KG11, 11A, 11B, 22, 22A, 22B, 22C |
| Two-Speed Starter                                  | Toggle           | 2512  | FG11, 11P, 22, 22P                |
| Two-Speed Switch                                   | Toggle           | 2512  | KG11, 11A, 11B, 22, 22B, 22C      |

**Table 16.16: General Purpose Flush Mounting Plate for Duplex Devices**

| Device                                              | Type of Operator | Class | Type                                  | Dimensions <sup>[10]</sup> |      |      |      |
|-----------------------------------------------------|------------------|-------|---------------------------------------|----------------------------|------|------|------|
|                                                     |                  |       |                                       | A                          | B    | C    | D    |
| Two Starters                                        | Toggle           | 2510  | FF22, 22P                             | 5.25                       | 3.75 | 5.25 | 1.44 |
|                                                     |                  |       | FS22P                                 | 4.56                       | 3.5  | 4.5  | 1.44 |
|                                                     | Key              | 2510  | FF44P                                 | 5.25                       | 3.75 | 5.25 | 1.44 |
|                                                     |                  |       | FS44P                                 | 4.56                       | 3.5  | 4.5  | 1.44 |
| One Starter and One Selector Switch <sup>[11]</sup> | Toggle           | 2510  | FF71, 71P, 72, 72P                    | 5.25                       | 0.75 | 5.25 | 2    |
|                                                     |                  |       | FS71P, 72P                            | 4.56                       | 3.5  | 4.5  | 2    |
|                                                     | Key              | 2510  | FF74P                                 | 5.25                       | 3.75 | 5.25 | 2    |
|                                                     |                  |       | FS74P                                 | 4.56                       | 3.5  | 4.5  | 2    |
| Reversing Switch                                    | Toggle           | 2511  | KF11, 11A, 11B, KF22, 22A, KF22B, 22C | 5.25                       | 3.75 | 5.25 | 1.75 |
| Two-Speed Starter                                   | Toggle           | 2512  | FF11, 11P, 22, 22P                    | 5.25                       | 3.75 | 5.25 | 1.44 |
| Two-Speed Switch                                    | Toggle           | 2512  | KF11, 11A, 11B, KF22, 22B, 22C        | 5.25                       | 3.75 | 5.25 | 1.75 |

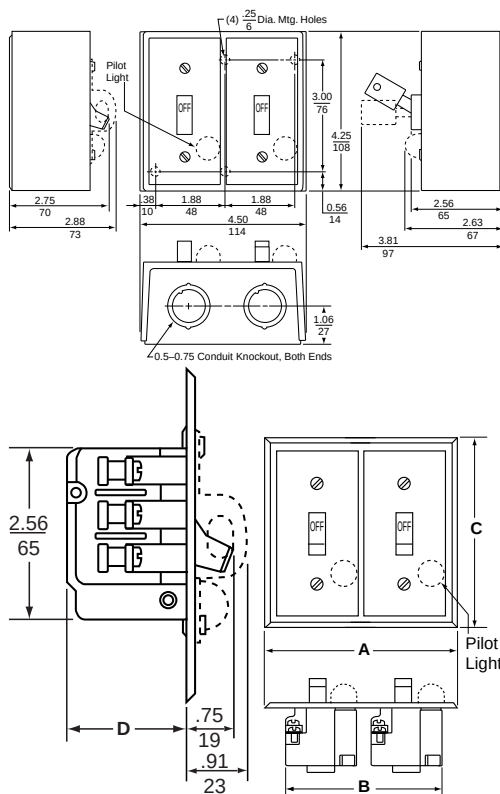

<sup>[8]</sup> Selector switch is on the left and increases the overall depth to 3.5 in.

<sup>[9]</sup> Only one pilot light (located on right) is used on Class 2511 switches.

<sup>[10]</sup> Dimensions include factory wired power connections.

<sup>[11]</sup> Selector Switch is on left, extends 1-5/8" from mounting surface.

## Integral Horsepower



Types M and T integral horsepower manual starters provide convenient On-Off operation of small single phase, polyphase or DC motors. Typical applications include small machine tools, pumps, fans and conveyors.

- Push button (M) or toggle (T) operators
- Reliable overload protection
- Pilot light and auxiliary contact available

Table 16.17: Integral Horsepower Manual Starters (see [Thermal Unit Selection, page 16-132](#))

| Non-Reversing, Class 2510, Max. Voltage: 600 Vac |           |                    |                      |              |                         |                 |                                                                      |                                                                                   |                                                                                 |                                                          |                      |                 |
|--------------------------------------------------|-----------|--------------------|----------------------|--------------|-------------------------|-----------------|----------------------------------------------------------------------|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------|----------------------------------------------------------|----------------------|-----------------|
| No. of Poles                                     | NEMA Size | Ratings            |                      |              | NEMA 1 Surface Mounting |                 | NEMA 4/4X Watertight and Dusttight Enclosure Brushed Stainless Steel | NEMA 4/4X Watertight, Dusttight and Corrosion-Resistant Glass-Polyester Enclosure | NEMA 7 & 9 For Hazardous Locations Class I—Groups C, D Class II—Groups E, F & G | NEMA 12 Dusttight and Driptight Industrial Use Enclosure | Open Type            |                 |
|                                                  |           | Motor Voltage      | Max. Hp              |              | Square P.B. Operator    | Toggle Operator |                                                                      |                                                                                   |                                                                                 |                                                          | Square P.B. Operator | Toggle Operator |
|                                                  |           |                    | Poly-Phase           | Single Phase |                         |                 |                                                                      |                                                                                   |                                                                                 |                                                          |                      |                 |
| 2-Pole                                           | M-0       | 115<br>230         | —                    | 1<br>2       | MBG1                    | TBG1            | MBW11 [13]                                                           | MBW1 [13]                                                                         | MBR1 [13]                                                                       | MBA1 [13]                                                | MBO1                 | TBO1            |
|                                                  | M-1       | 115<br>230         | —                    | 2<br>3       | MCG1                    | TCG1            | MCW11                                                                | MCW1                                                                              | MCR1                                                                            | MCA1                                                     | MCO1                 | TCO1            |
|                                                  | M-1P      | 115<br>230         | —                    | 3<br>5       | MCG2                    | TCG2            | MCW12                                                                | MCW2                                                                              | MCR2                                                                            | MCA2                                                     | MCO2                 | TCO2            |
| 3-Pole                                           | M-0       | 200-230<br>380-575 | —<br>3<br>5          | —<br>—       | MBG2                    | TBG2            | MBW12 [13]                                                           | MBW2 [13]                                                                         | MBR2 [13]                                                                       | MBA2 [13]                                                | MBO2                 | TBO2            |
|                                                  | M-1       | 200-230<br>380-575 | —<br>7.5<br>10       | —<br>—       | MCG3                    | TCG3            | MCW13                                                                | MCW3                                                                              | MCR3                                                                            | MCA3                                                     | MCO3                 | TCO3            |
| DC 2-Pole                                        | M-0       | 115<br>230         | 1 hp DC<br>1.5 hp DC |              | MBG4                    | TBG4            | MBW14                                                                | MBW4                                                                              | —                                                                               | MBA4                                                     | MBO4                 | TBO4            |
|                                                  | M-1       | 115<br>230         | 1.5 hp DC<br>2 hp DC |              | MCG5                    | TCG5            | MCW15                                                                | MCW5                                                                              | MCR5                                                                            | MCA5                                                     | MCO5                 | TCO5            |



All Except NEMA 7 and 9  
File E42243  
CCN NLRV  
NEMA 7 and 9 Only  
File E58760  
CCN NPXZ



All Except NEMA 7 and 9  
File LR60905  
Class 3211-05  
NEMA 7 and 9 Only  
File LR26817  
Class 3218-04

Table 16.18: How to Order

| To Order Specify: | Catalog Number |      |
|-------------------|----------------|------|
|                   | Class          | Type |
| • Class Number    | 2510           | MCA1 |
| • Type Number     |                |      |

[12] NEMA 7 & 9 enclosures are cast iron. NEMA 7 & 9 cast aluminum enclosures are also available; to order, replace the **R** in the catalog number with a **T**. For additional information, contact the Customer Care Center.

[13] Approved for group motor installations per NEC 430-53(c).

## Reversing and Two Speed

Class 2511 reversing and Class 2512 two-speed manual starters consist of two mechanically interlocked Class 2510 Types M or T manual starters.

Table 16.19: Reversing Class 2511

| Class | Description | Number of Poles | NEMA Size | Ratings       |            | NEMA 1 Surface Mounting |                 | Open Type            |                 |
|-------|-------------|-----------------|-----------|---------------|------------|-------------------------|-----------------|----------------------|-----------------|
|       |             |                 |           | Motor Voltage | Maximum Hp | Square P.B. Operator    | Toggle Operator | Square P.B. Operator | Toggle Operator |
| 2511  | Standard    | 3-Pole          | M-0       | 200-230       | 3          | MBG1                    | TBG1            | MBO1                 | TBO1            |
|       |             |                 |           | 380-575       | 5          |                         |                 |                      |                 |
|       |             |                 | M-1       | 200-230       | 7-1/2      | MCG1                    | TCG1            | MCO1                 | TCO1            |
|       |             |                 |           | 380-575       | 10         |                         |                 |                      |                 |

Table 16.20: Two Speed, Class 2512 (Wye-Connected Separate Winding Motors Only)

| Class | Description | Number of Poles | NEMA Size | Ratings       |             |                                    | NEMA 1 Surface Mounting |                 | Open Type            |                 |
|-------|-------------|-----------------|-----------|---------------|-------------|------------------------------------|-------------------------|-----------------|----------------------|-----------------|
|       |             |                 |           | Motor Voltage | Constant Hp | Constant Torque or Variable Torque | Square P.B. Operator    | Toggle Operator | Square P.B. Operator | Toggle Operator |
| 2512  | Standard    | 3-Pole          | M-0       | 200-230       | 2           | 3                                  | MBG1                    | TBG1            | MBO1                 | TBO1            |
|       |             |                 |           | 380-575       | 3           | 5                                  |                         |                 |                      |                 |
|       |             |                 | M-1       | 200-230       | 5           | 7-1/2                              | MCG1                    | TCG1            | MCO1                 | TCO1            |
|       |             |                 |           | 380-575       | 7-1/2       | 10                                 |                         |                 |                      |                 |

## Thermal Units

Starters will not operate without properly installed thermal units and device reset. Thermal unit must be installed so that markings face the front of starter.

## Application Data

**Size**—Available in NEMA Sizes M-0, M-1, and M-1P.

**Poles**—Two poles single phase; three poles polyphase; 2 poles DC.

**Voltage**—600 Vac max.; 250 Vdc max.

**Overload Relays**—Melting alloy thermal overload relays have provisions for one Type B thermal unit for single phase starters and three Type B thermal units for three phase starters. **All thermal units must be installed and the device reset before the starter contacts will operate.** After overload relays have tripped, allow one or two minutes for the alloy to solidify before resetting.

**Operator**—Available with a push button or toggle operator in open and NEMA 1 versions. NEMA 4/4X (stainless) and 12 versions utilize a direct acting push button only. NEMA 4/4X (polyester) and 7/9 versions utilize an external toggle to actuate a push button device inside.

## Maintenance of Equipment

For proper performance, all equipment should be periodically inspected and maintained. Replacement contacts and interlocks are available in kit form to facilitate servicing and stocking. In addition, the service bulletin contains an exploded view of the device with components clearly marked for easy identification by description and part number.

**Mechanism Lock Off**—Both open devices and starters in NEMA 1 surface and flush mounting, and NEMA 4, 4X, 7 & 9, and 12 enclosures can be locked in the Off or Stop position.

The NEMA 1 surface mounting, 4, 4X, 7 & 9, and 12 enclosures can also be locked closed to prevent unauthorized entry.

Table 16.21: Terminal information and Replacement Contact Kits

| NEMA Size | Power Terminals |                                                     | Auxiliary Interlock Terminals |                                                     | Number of Poles | Service Bulletin | Replacement Contact Kit |      |
|-----------|-----------------|-----------------------------------------------------|-------------------------------|-----------------------------------------------------|-----------------|------------------|-------------------------|------|
|           | Type of Lug     | Wire Size (Solid or Stranded Copper Wire) Min.-Max. | Type of Lug                   | Wire Size (Solid or Stranded Copper Wire) Min.-Max. |                 |                  | Class                   | Type |
| M-0       | Pressure Wire   | 14–8                                                | Pressure Wire                 | 16–12                                               | 2 or 3          | 312AS            | 9998                    | ML1  |
| M-1       | Pressure Wire   | 14–8                                                | Pressure Wire                 | 16–12                                               | 2 or 3          | 312AS            | 9998                    | ML2  |
| M-1P      | Box Lug         | 14–6                                                | Pressure Wire                 | 16–12                                               | 2               | 312AS            | 9998                    | ML2  |

## Accessories and Modification Kits

**One auxiliary contact**, either N.O. or N.C. can easily be added internally to any open or enclosed Type M or T manual starter. It occupies the space provided in either the upper right hand or left hand corners of the device. These contacts are for AC loads only. For electrical ratings, refer to page 16-127, Class 9999 Types SX11 or SX12.

A unique red **pilot light** assembly that clips into place is available **factory installed** on NEMA 1, 4, 4X, 12 and flush enclosures or as a **field modification kit** on the NEMA 1 surface or flush mounting enclosures. See page 16-11. The color cap assembly snaps into a knockout in the enclosure cover on the NEMA 1 enclosures. Pilot light kits are available for use on Various voltages (110-600 V). Pilot light assemblies are not available for NEMA 7 and 9 enclosures.



Class 2510, 2511, 2512 / Refer to Catalog 2510CT9701

## Approximate Dimensions




**NEMA 1**  
General Purpose Surface Mounting



**NEMA 12**  
Dusttight and Driptight  
Industrial Use



**NEMA 4/4X**  
Watertight and Dusttight  
Stainless Steel




**Class 2510 Type M**  
Sizes M-0, M-1 and M-1P, Open Style  
Approximate Shipping Weight: 3 lb




**NEMA 4/4X**  
Watertight, Dusttight  
and Corrosion Resistant  
Glass Polyester




**NEMA 7 & 9**  
Hazardous Locations  
Cast Iron

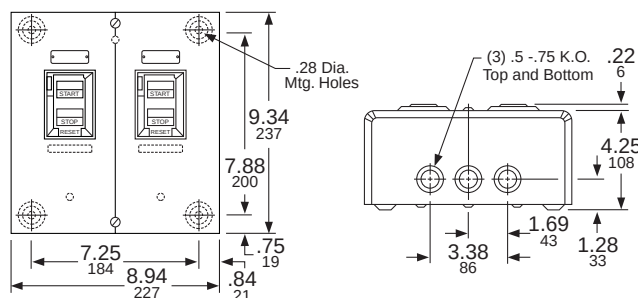


**Classes 2511, 2512, Types M & T**  
Sizes M-0 and M-1 NEMA 1  
General Purpose Enclosure  
Approximate Shipping Weight: 9 lb

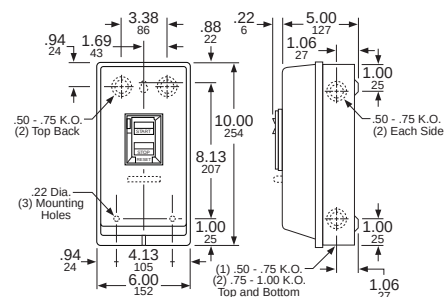


**Class 2510 Type M & T Size M-1P**  
NEMA 1 General Purpose Enclosure  
Approximate Shipping Weight: 5 lb

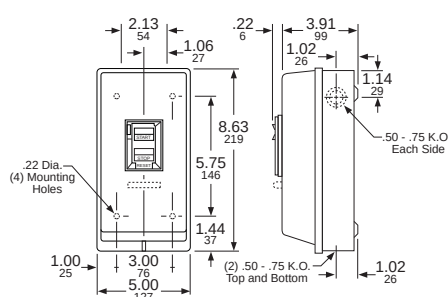


**Class 2510 Types M & T Sizes M-0 and M-1**  
NEMA 1 General Purpose Enclosure  
Approximate Shipping Weight: 5 lb

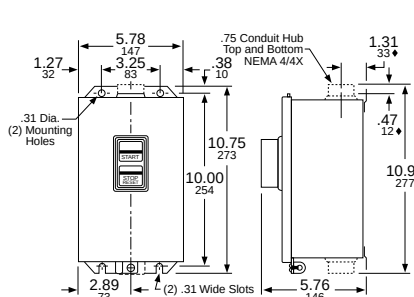


**Class 2510 Type M Sizes M-0, M-1 and M-1P**  
NEMA 4/4X Watertight Stainless Steel Enclosure  
NEMA 12 Dusttight Industrial Use Enclosure  
Approximate Shipping Weight: 9 lb

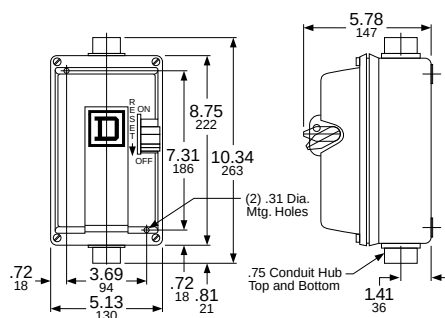

**Class 2510 Type M Size M-0 (AC-DC)**  
and Size M-1 (DC) NEMA 4/4X  
Watertight Corrosion-Resistant  
Glass Polyester Enclosure  
Approximate Shipping Weight—6 lb

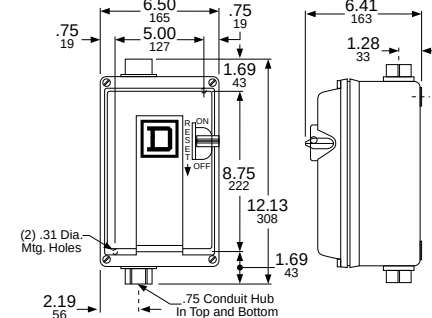

**Class 2510 Type M Sizes M-1 and M-1P (AC)**  
NEMA 4/4X Watertight Corrosion-Resistant  
Glass Polyester Enclosure  
Approximate Shipping Weight—6 lb

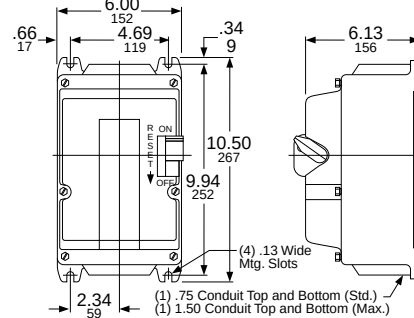

**Class 2510 Type M Sizes M-0, M-1 and M-1P**  
NEMA 7 & 9 Hazardous Location  
Cast Iron Enclosure  
Approximate Shipping Weight—18 lb

**Table 16.22: P11 Pilot Light Voltage Codes**

| Voltage   | Code |
|-----------|------|
| 120 V     | V02  |
| 200/208 V | V08  |
| 230 V     | V03  |
| 460 V     | V06  |
| 575 V     | V07  |

**Table 16.24: Accessories—Class 2510 Types F and K**

| Description                                  | Class & Type |
|----------------------------------------------|--------------|
| Handle Guard Kit with Padlock Provision [18] | 2510FL1      |
| Emergency Off Actuator                       | 2510PB1      |
| Additional Key for Key Operated Devices      | 2510FK1      |

**Table 16.26: Replacement Nameplates—Class 2510 Types F and K**

| Description                                                                      | Application                                                                                    | Nameplate Marking                             | Nameplate Type Number—Class 2510 |                  |                                                |                  |
|----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|-----------------------------------------------|----------------------------------|------------------|------------------------------------------------|------------------|
|                                                                                  |                                                                                                |                                               | For Type K Switch                |                  | For Type F Starter (includes Reset Indication) |                  |
|                                                                                  |                                                                                                |                                               | Without Pilot Light              | With Pilot Light | Without Pilot Light                            | With Pilot Light |
| 1-3/4" x 2-13/16" Nameplate with Embossed Mounting Holes for #6 Oval Head Screws | Standard commercial switch box cover or flush plate, including Square D stainless steel plates | (Blank)                                       | FN1                              | —                | FN2                                            | —                |
|                                                                                  |                                                                                                | (Special marking—specify the marking desired) | FN5                              | —                | FN6                                            | —                |
| 1-29/32" x 3-27/32" Flat Nameplate with Mounting Holes for #6 Pan Head Screws    | Square D NEMA 1 surface mounted enclosure or gray flush plate                                  | (Blank)                                       | FN10                             | FN20             | FN30                                           | FN40             |
|                                                                                  |                                                                                                | High                                          | FN11                             | FN21             | FN31                                           | FN41             |
|                                                                                  |                                                                                                | Low                                           | FN12                             | FN22             | FN32                                           | FN42             |
|                                                                                  |                                                                                                | Forward                                       | FN13                             | —                | —                                              | —                |
|                                                                                  |                                                                                                | Reverse                                       | FN14                             | FN24             | —                                              | —                |
|                                                                                  |                                                                                                | (Special marking—specify the marking desired) | FN15                             | FN25             | FN35                                           | FN45             |

## Accessories, Modifications, and Replacement Parts

**Table 16.23: Modifications (Types M & T only)**

| Description             | Factory Modifications (Forms) | Field Modification Kits, Class & Type                             |
|-------------------------|-------------------------------|-------------------------------------------------------------------|
| Red Pilot Light [14]    | P11[15]                       | 9999MP1 (110–120 V)<br>9999MP2 (208–240 V)<br>9999MP3 (440–600 V) |
| Auxiliary Contacts [16] | X1 (1 N.O.)                   | 9999SX11 (N.O.)                                                   |
|                         | X2 (1 N.C.)                   | 9999SX12 (N.C.)                                                   |
| Jumper Straps [17]      | N/A                           | 9998SO31                                                          |
| Contactor only          | Y76                           | N/A                                                               |

**Table 16.25: Pilot Light Kits—Class 2510 Types F and K**

| Application          | Voltage        | Red Pilot Light | Green Pilot Light |
|----------------------|----------------|-----------------|-------------------|
|                      |                | Class & Type    | Class & Type      |
| Type KF, KG, KW [19] | 110–120 Vac    | 9999PL11        | 9999PL11G         |
|                      | 208–277 Vac    | 9999PL12        | 9999PL12G         |
|                      | 440–600 Vac    | 9999PL13        | 9999PL13G         |
| Type FF, FG, FW [19] | 115–240 Vac/dc | 9999PL10        | 9999PL10G         |

## Contact Kits

See page 16-124 for Class 9998 Replacement Contact Kits.

**Table 16.27: Replacement Part Kits**

| Enclosure               | Product Description        | Kit Catalog No. |
|-------------------------|----------------------------|-----------------|
| Replacement Toggle Kits |                            |                 |
| NEMA 4                  | Type FW and KW             | 9998HW1         |
| NEMA 7 & 9              | Type FR and KR             | 9998HR2         |
| Replacement Handle Kits |                            |                 |
| NEMA 12                 | Type MBA, MCA (Ser. A & B) | 9998HWA1        |
|                         | Type MBA, MCA (Ser. C)     | 31085-381-50    |
| NEMA 4/4X (Stainless)   | Type MBW, MCW (Ser. A & B) | 9998HWA1        |
|                         | Type MBW, MCW (Ser. C)     | 31085-381-50    |
| NEMA 4/4X (Polyester)   | Type MBW (Size 0)          | 9998HWA1        |
|                         | Type MCW (Size 1)          | 9998HR3         |
| NEMA 7 and 9            | Type MBR, MCR              | 9998HR3         |
| Description             |                            | Kit Catalog No. |
| Internal Lever          |                            | 9998IL1         |

**Table 16.28: How to Order**

| To Order Specify: | Catalog Number |      |
|-------------------|----------------|------|
| • Class Number    | Class          | Type |
| • Type Number     | 9991           | KE1  |

**Table 16.29: Enclosures**

| For use with Class 2510 Type                                                                         | Enclosure                                                    | Catalog No. |
|------------------------------------------------------------------------------------------------------|--------------------------------------------------------------|-------------|
| F and K                                                                                              | NEMA 1 Standard                                              | 9991EN1     |
| M: Sizes M-0 & M-1                                                                                   |                                                              | 9991MG1     |
| M: Size M-1P                                                                                         |                                                              | 9991MG2     |
| MBO and MCO                                                                                          | NEMA 1 Flush Mount (with pull box and plaster adjustment)    | 9991MF1     |
|                                                                                                      | NEMA 1 Flush Mount (without pullbox but with mounting strap) | 9991MF2     |
|                                                                                                      | NEMA 4X (Polyester)                                          | 9991MW1     |
|                                                                                                      | NEMA 4 (Stainless Steel)                                     | 9991MW11    |
| FO1, FO1P, FO2, FO2P, FO3, FO3P, FO4, FO4P                                                           | NEMA 1 Oversized                                             | 9991FE1     |
| KO1, KO1A, KO1B, KO2, KO2B, KO2C, KO3, KO3A, KO3B, KO4, KO4B, KO4C, KO5, KO5A, KO5B, KO6, KO6B, KO6C | NEMA 1 Oversized                                             | 9991KE1     |
|                                                                                                      | NEMA 1 Jumbo                                                 | 9991KE2     |
|                                                                                                      | NEMA 3R                                                      | 9991KE3     |

[14] May only be field-added to NEMA 1 enclosures. For green pilot light, order 9999SPG1 additionally.

[15] Form P11 pilot lights require a voltage code. Refer to Table 16.22. Catalog number example: 2510MBG1V02P11.

[16] For proper operation, only one auxiliary contact kit per device may be added.

[17] Used to control a single phase motor utilizing a three phase starter.

[18] Standard on Type K devices.

[19] The lens cannot be replaced. The pilot light kits for NEMA 4 enclosed units are for replacement only.

For detailed information about TeSys U, visit [www.schneider-electric.com/us](http://www.schneider-electric.com/us).



Power Base

## TeSys U Selection

The NEMA style TeSys U motor starter is an integrated product—simple to choose and to install—consisting of a control unit snapped into a power base. TeSys U can be configured to fit specific applications as well. The NEMA style TeSys U starter uses the same optional accessories—reverser, current limiter, predictive maintenance options, and communication options—as the IEC TeSys U.

### Selecting a NEMA TeSys U Motor Starter in Three Steps



**Table 16.30: Step 1. Select Power Base**

| Control Connection      | NEMA Size | Max. hp, Three Phase |           |       |           | Max. hp, Single Phase |       | Power Bases |
|-------------------------|-----------|----------------------|-----------|-------|-----------|-----------------------|-------|-------------|
|                         |           | 200/208 V            | 220/240 V | 460 V | 575/600 V | 120 V                 | 240 V |             |
| With screw terminations | 1         | 7.5                  | 7.5       | 10    | 10        | 2                     | 3     | LUB32NR     |

**Table 16.31: Voltage Codes**

| Volts    | 24    | 48–72 | 110–240 |
|----------|-------|-------|---------|
| DC       | BL[1] | —     | —       |
| AC       | B     | —     | —       |
| DC or AC | —     | ES[2] | FU      |

**Table 16.32: Step 2. Select Control Unit [3]**

| Setting Range A | Standard 3-phase Class 10 trip [4] | Advanced 3-Phase Class 10 trip [4] | Advanced Single-Phase Class 10 trip [4] | Advanced 3-Phase Class 20 trip [4] |
|-----------------|------------------------------------|------------------------------------|-----------------------------------------|------------------------------------|
| 0.15–0.6        | LUCAX6**                           | LUCBX6**                           | LUCCX6**                                | LUCDX6**                           |
| 0.3–1.4         | LUCA1X**                           | LUCB1X**                           | LUCC1X**                                | LUCD1X**                           |
| 1.25–5.0        | LUCA05**                           | LUCB05**                           | LUCC05**                                | LUCD05**                           |
| 3–12            | LUCA12**                           | LUCB12**                           | LUCC12**                                | LUCD12**                           |
| 4.5–18          | LUCA18**                           | LUCB18**                           | LUCC18**                                | LUCD18**                           |
| 8–32            | LUCA32**                           | LUCB32**                           | LUCC32**                                | LUCD32**                           |

**Table 16.33: Step 3. Select Auxiliary Contacts (optional)**

| Auxiliary Contact Blocks |                   |                       |                                 |       |     |                    |                              |                                       |                |
|--------------------------|-------------------|-----------------------|---------------------------------|-------|-----|--------------------|------------------------------|---------------------------------------|----------------|
| Terminals                | Contact Indicates | Normal Contact Status | Contact State for Each Mode [5] |       |     |                    |                              |                                       | Catalog Number |
|                          |                   |                       | Off                             | Ready | Run | Short Circuit Trip | Overload Trip (Manual Reset) | Overload Trip (Remote/Auto Reset) [5] |                |
| Screw                    | Ready condition   | N.O.                  | O                               | I     | I   | O                  | O                            | I                                     | LUA1C11        |
|                          | Fault condition   | N.C.                  | I                               | I     | I   | O                  | O                            | I                                     |                |
| Screw                    | Ready condition   | N.O.                  | O                               | I     | I   | O                  | O                            | I                                     | LUA1C20        |
|                          | Fault condition   | N.O.                  | O                               | O     | O   | I                  | I                            | O                                     |                |

**Table 16.34: TeSys U Auxiliary Contact Function Modules**

| Terminals | Contact Indicates | Normal Contact Status | Catalog Number |
|-----------|-------------------|-----------------------|----------------|
| Screw     | Power pole status | 2 N.O.                | LUFN20         |
| Screw     | Power pole status | 1 N.O. and 1 N.C.     | LUFN11         |
| Screw     | Power pole status | 2 N.C.                | LUFN02         |

**Table 16.35: TeSys U Accessories**

| Accessories for LUB32NR     | Quick Description                                                            | For details and selection, see pages: |
|-----------------------------|------------------------------------------------------------------------------|---------------------------------------|
| Current limiter             | Increases the breaking capacity to 130kA @ 460 V                             | 18-25                                 |
| Reverser                    | Stacked or side mounted (LU6MB0** [4] only)                                  | 18-25                                 |
| Line phase barrier          | Required for use as a self-protected combination starter (UL508 Type E)      | 18-25                                 |
| Multifunction control unit  | Has functions for monitoring and predictive maintenance                      | 18-25                                 |
| Function modules            | Fault differentiation, thermal overload, motor load indication               | 18-25                                 |
| Communication modules       | Integrates into existing networks, major protocols available                 | 18-26                                 |
| Soft starter + TeSys U      | Use Altistart U01Soft Starter with TeSys U                                   | 18-42                                 |
| Power bus bars              | TeSys U cabling accessory                                                    | 18-26                                 |
| Control circuit accessories | Control circuit contact block, external handles, and control circuit filters | 18-26                                 |

Accessories and Dimensions: See Section 18.



E164862  
CCN NLDX



LR43364  
Class 3211 08



[1] DC voltage with range of 0.90 to 1.10 of nominal.

[2] 48–72 Vdc; 48 Vac.

[3] The control unit contains solid-state overload relay and control power source for TeSys U. For more details on the different control units, their functions, and placement on the power base see Section 18.

[4] Complete the catalog number by adding the appropriate voltage code from Table 16.31. For example: LUCAX6FU.

[5] I = closed contact; O = open contact.

[6] Requires a multifunction or advanced control unit, plus fault differentiation module LUFDDA10.

## Interpreting the Catalog Number

**Table 16.36: TeSys N Catalog Numbering System**

|                                                                                                                                                | T | 02 | C | N | 1 | 3 | G7 |                                                                                                                                                                                                                  |
|------------------------------------------------------------------------------------------------------------------------------------------------|---|----|---|---|---|---|----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Product Family</b><br>T: TeSys N                                                                                                            |   |    |   |   |   |   |    | <b>Voltage Code</b><br>B7: 24 Vac, 50/60 Hz<br>BD: 24 Vdc<br>G7: 120 Vac, 50/60 Hz<br>LE7: 208 Vac, 50/60 Hz<br>U7: 240 Vac, 50/60 Hz<br>T7: 480 Vac, 50/60 Hz                                                   |
| <b>Device Type</b><br>02: Contactor, page 16-14<br>36: Starter, page 16-16                                                                     |   |    |   |   |   |   |    | <b>Numerals</b><br>Used to define specific, physical arrangements such as number of poles for devices type T02 or protection type for devices type T36. Consult the Digest listings for specific device numbers. |
| <b>NEMA Size</b><br>A: Size 00<br>B: Size 0<br>C: Size 1<br>D: Size 2<br>E: Size 3<br>F: Size 4<br>G: Size 5<br>H: Size 6 [1]<br>J: Size 7 [1] |   |    |   |   |   |   |    | <b>Direction</b><br>1: Non-reversing<br>2: Reversing                                                                                                                                                             |
|                                                                                                                                                |   |    |   |   |   |   |    | <b>Enclosure Type</b><br>N: No enclosure                                                                                                                                                                         |

[1] Not available for reversing Type T36 devices.

New!

**TeSys N Non-Reversing Contactors**

TeSys N contactors are used to switch heating loads, capacitors, transformers and electric motors where overload protection is provided separately. TeSys N contactors are available in NEMA Sizes 00–7. Target market segments include hospitals; retail; food and beverage; marine; oil and gas; and mining, metals, and minerals.

**Table 16.37: TeSys N Non-Reversing Contactors, 3-Pole Polyphase, 600 Vac Max.**  
(replace ●● with the coil voltage code)

| NEMA Size | Continuous Current Rating (A) | Motor Voltage | Max HP | Open            |
|-----------|-------------------------------|---------------|--------|-----------------|
|           |                               |               |        | Catalog No. [2] |
| 00        | 9                             | 200           | 1.5    | T02AN13●●       |
|           |                               | 230           | 1.5    |                 |
|           |                               | 460           | 2      |                 |
|           |                               | 575           | 2      |                 |
| 0         | 18                            | 200           | 3      | T02BN13●●       |
|           |                               | 230           | 3      |                 |
|           |                               | 460           | 5      |                 |
|           |                               | 575           | 5      |                 |
| 1         | 27                            | 200           | 7.5    | T02CN13●●       |
|           |                               | 230           | 7.5    |                 |
|           |                               | 460           | 10     |                 |
|           |                               | 575           | 10     |                 |
| 2         | 45                            | 200           | 10     | T02DN13●●       |
|           |                               | 230           | 15     |                 |
|           |                               | 460           | 25     |                 |
|           |                               | 575           | 25     |                 |
| 3         | 90                            | 200           | 25     | T02EN13●●[3]    |
|           |                               | 230           | 30     |                 |
|           |                               | 460           | 50     |                 |
|           |                               | 575           | 50     |                 |
| 4         | 135                           | 200           | 40     | T02FN13●●[3]    |
|           |                               | 230           | 50     |                 |
|           |                               | 460           | 100    |                 |
|           |                               | 575           | 100    |                 |
| 5         | 270                           | 200           | 75     | T02GN13●●[3]    |
|           |                               | 230           | 100    |                 |
|           |                               | 460           | 200    |                 |
|           |                               | 575           | 200    |                 |
| 6         | 540                           | 200           | 150    | T02HN13●●[3]    |
|           |                               | 230           | 200    |                 |
|           |                               | 460           | 400    |                 |
|           |                               | 575           | 400    |                 |
| 7         | 810                           | 200           | —      | T02JN13●●[3]    |
|           |                               | 230           | 300    |                 |
|           |                               | 460           | 600    |                 |
|           |                               | 575           | 600    |                 |

**Table 16.38: TeSys N Non-Reversing Contactors, 3-Pole Single Phase, 600 Vac Max.**

(replace ●● with the coil voltage code)

| NEMA Size | Continuous Current Rating (A) | Motor Voltage | Max HP | Open           |
|-----------|-------------------------------|---------------|--------|----------------|
|           |                               |               |        | Catalog Number |
| 00        | 9                             | 115           | 1/3    | T02AN13●●      |
|           |                               | 230           | 1      |                |
| 0         | 18                            | 115           | 1      | T02BN13●●      |
|           |                               | 230           | 2      |                |
| 1         | 27                            | 115           | 2      | T02CN13●●      |
|           |                               | 230           | 3      |                |
| 2         | 45                            | 115           | 3      | T02DN13●●      |
|           |                               | 230           | 7.5    |                |

**Table 16.39: TeSys N Coil Voltage Codes**

| Voltage | Voltage Code by NEMA Size |        |        |        |        |        |        |        |        |
|---------|---------------------------|--------|--------|--------|--------|--------|--------|--------|--------|
|         | Size 00                   | Size 0 | Size 1 | Size 2 | Size 3 | Size 4 | Size 5 | Size 6 | Size 7 |
| 24 Vac  | B7                        | B7     | B7     | B7     | B6     | B6     | n/a    |        |        |
| 24 Vdc  | BD                        | BD     | BD     | BD     | BD     | BD     | n/a    |        |        |
| 120 Vac | G7                        | G7     | G7     | G7     | G7     | G7     | G7     | F7     | F7     |
| 208 Vac | LE7                       | LE7    | LE7    | LE7    | L7     | L7     | L7     | L7     | L7     |
| 240 Vac | U7                        | U7     | U7     | U7     | U7     | U7     | U7     | U7     | U7     |
| 480 Vac | T7                        | T7     | T7     | T7     | S7     | S7     | S7     | N7     | N7     |

Dimensions: [page 16-23 to page 16-27](#)Accessories: [page 16-18 to page 16-21](#)Replacement Parts: [page 16-22](#)Lugs: [page 16-21](#)

TeSys N non-reversing contactor, Size 1



TeSys N non-reversing contactor, Size 3

[2] Replace the bullets (●●) in the catalog number with the coil voltage code. Refer to voltage codes shown in [Table 16.39](#).  
 [3] Order lugs separately. See . The mounting hardware (screws, washers, and nuts) comes with the contactors, not the lugs. Starters Sizes 3–7 come with lugs.

*New!*

## TeSys N Reversing Contactors

TeSys N reversing contactors are used for starting, stopping and reversing AC motors where overload protection is provided separately. TeSys N reversing contactors are mechanically and electrically interlocked and are available in NEMA Sizes 00–7. Target market segments include hospitals; retail; food and beverage; marine; oil and gas; and mining, metals, and minerals.



TeSys N reversing contactor, Size 00



TeSys N reversing contactor, Size 4

**Table 16.40: TeSys N Reversing Contactors, 3-Pole Polyphase, 600 Vac Max.**  
(replace ●● with the coil voltage code)

| NEMA Size | Continuous Current Rating (A) | Motor Voltage | Max HP | Open            |
|-----------|-------------------------------|---------------|--------|-----------------|
|           |                               |               |        | Catalog No. [4] |
| 00        | 9                             | 200           | 1.5    | T02AN23●●       |
|           |                               | 230           | 1.5    |                 |
|           |                               | 460           | 2      |                 |
|           |                               | 575           | 2      |                 |
| 0         | 18                            | 200           | 3      | T02BN23●●       |
|           |                               | 230           | 3      |                 |
|           |                               | 460           | 5      |                 |
|           |                               | 575           | 5      |                 |
| 1         | 27                            | 200           | 7.5    | T02CN23●●       |
|           |                               | 230           | 7.5    |                 |
|           |                               | 460           | 10     |                 |
|           |                               | 575           | 10     |                 |
| 2         | 45                            | 200           | 10     | T02DN23●●       |
|           |                               | 230           | 15     |                 |
|           |                               | 460           | 25     |                 |
|           |                               | 575           | 25     |                 |
| 3         | 90                            | 200           | 25     | T02EN23●●[5]    |
|           |                               | 230           | 30     |                 |
|           |                               | 460           | 50     |                 |
|           |                               | 575           | 50     |                 |
| 4         | 135                           | 200           | 40     | T02FN23●●[5]    |
|           |                               | 230           | 50     |                 |
|           |                               | 460           | 100    |                 |
|           |                               | 575           | 100    |                 |
| 5         | 270                           | 200           | 75     | T02GN23●●[5]    |
|           |                               | 230           | 100    |                 |
|           |                               | 460           | 200    |                 |
|           |                               | 575           | 200    |                 |
| 6         | 540                           | 200           | 150    | T02HN23●●[5]    |
|           |                               | 230           | 200    |                 |
|           |                               | 460           | 400    |                 |
|           |                               | 575           | 400    |                 |
| 7         | 810                           | 200           | —      | T02JN23●●[5]    |
|           |                               | 230           | 300    |                 |
|           |                               | 460           | 600    |                 |
|           |                               | 575           | 600    |                 |

**Table 16.41: TeSys N Reversing Contactors, 3-Pole Single Phase, 600 Vac Max.**  
(replace ●● with the coil voltage code)

| NEMA Size | Continuous Current Rating (A) | Motor Voltage | Max HP | Open            |
|-----------|-------------------------------|---------------|--------|-----------------|
|           |                               |               |        | Catalog No. [4] |
| 00        | 9                             | 115           | 1/3    | T02AN23●●       |
|           |                               | 230           | 1      |                 |
| 0         | 18                            | 115           | 1      | T02BN23●●       |
|           |                               | 230           | 2      |                 |
| 1         | 27                            | 115           | 2      | T02CN23●●       |
|           |                               | 230           | 3      |                 |
| 2         | 45                            | 115           | 3      | T02DN23●●       |
|           |                               | 230           | 7.5    |                 |

**Table 16.42: TeSys N Coil Voltage Codes**

| Voltage | Voltage Code by NEMA Size |        |        |        |        |        |        |        |        |
|---------|---------------------------|--------|--------|--------|--------|--------|--------|--------|--------|
|         | Size 00                   | Size 0 | Size 1 | Size 2 | Size 3 | Size 4 | Size 5 | Size 6 | Size 7 |
| 24 Vac  | B7                        | B7     | B7     | B7     | B6     | B6     |        | n/a    |        |
| 24 Vdc  | BD                        | BD     | BD     | BD     | BD     | BD     |        | n/a    |        |
| 120 Vac | G7                        | G7     | G7     | G7     | G7     | G7     | G7     | F7     | F7     |
| 208 Vac | LE7                       | LE7    | LE7    | LE7    | L7     | L7     | L7     | L7     | L7     |
| 240 Vac | U7                        | U7     | U7     | U7     | U7     | U7     | U7     | U7     | U7     |
| 480 Vac | T7                        | T7     | T7     | T7     | S7     | S7     | S7     | N7     | N7     |

Dimensions: [page 16-23](#) to [page 16-27](#)  
Accessories: [page 16-18](#) to [page 16-21](#)  
Replacement Parts: [page 16-22](#)  
Lugs: [page 16-21](#)

[4] Replace the bullets (●●) in the catalog number with the coil voltage code. Refer to the voltage codes shown in [Table 16.42](#).  
[5] Order lugs separately. See . The mounting hardware (screws, washers, and nuts) comes with the contactors, not the lugs. Starters Sizes 3–7 come with lugs.



New!

**TeSys N Non-Reversing Starters**

TeSys N starters are used for full-voltage starting and stopping of AC squirrel-cage motors. Starters are available in NEMA Sizes 00–7 and come standard with Motor Logic Class 10/20 selectable solid-state overload relays. Starters with bimetal overload protection can be assembled from TeSys N contactors and TeSys D overload relays.

**Table 16.43: 3-Pole Polyphase, 600 Vac Max. (replace ●● with the coil voltage code)**

| NEMA Size | Continuous Current Rating (A) | Motor Voltage | Max HP | Open            |
|-----------|-------------------------------|---------------|--------|-----------------|
|           |                               |               |        | Catalog No. [6] |
| 00        | 9                             | 200           | 1.5    | T36AN13●●       |
|           |                               | 230           | 1.5    |                 |
|           |                               | 460           | 2      |                 |
|           |                               | 575           | 2      |                 |
| 0         | 18                            | 200           | 3      | T36BN13●●       |
|           |                               | 230           | 3      |                 |
|           |                               | 460           | 5      |                 |
|           |                               | 575           | 5      |                 |
| 1 [7]     | 27                            | 200           | 7.5    | T36CN13●●       |
|           |                               | 230           | 7.5    |                 |
|           |                               | 460           | 10     |                 |
|           |                               | 575           | 10     |                 |
| 2         | 45                            | 200           | 10     | T36DN13●●       |
|           |                               | 230           | 15     |                 |
|           |                               | 460           | 25     |                 |
|           |                               | 575           | 25     |                 |
| 3         | 90                            | 200           | 25     | T36EN13●●       |
|           |                               | 230           | 30     |                 |
|           |                               | 460           | 50     |                 |
|           |                               | 575           | 50     |                 |
| 4         | 135                           | 200           | 40     | T36FN13●●       |
|           |                               | 230           | 50     |                 |
|           |                               | 460           | 100    |                 |
|           |                               | 575           | 100    |                 |
| 5         | 270                           | 200           | 75     | T36GN13●●       |
|           |                               | 230           | 100    |                 |
|           |                               | 460           | 200    |                 |
|           |                               | 575           | 200    |                 |
| 6         | 540                           | 200           | 150    | T36HN13●●       |
|           |                               | 230           | 200    |                 |
|           |                               | 460           | 400    |                 |
|           |                               | 575           | 400    |                 |
| 7         | 810                           | 200           | —      | T36JN13●●       |
|           |                               | 230           | 300    |                 |
|           |                               | 460           | 600    |                 |
|           |                               | 575           | 600    |                 |


TeSys N non-reversing starter, Size 1




TeSys N Size 1 Contactor + TeSys LRD Bimetallic Overload Relay



TeSys N non-reversing starter, Size 3



TeSys N Size 1 Contactor + TeSys LR9D Electronic Overload Relay



For more information on TeSys D relays, see Section 18.

Dimensions: [page 16-23](#)

TeSys N Accessories: [pages 16-18](#)

**Table 16.44: TeSys N Coil Voltage Codes**

| Voltage     | Voltage Code by NEMA Size |        |        |        |        |        |        |        |        |
|-------------|---------------------------|--------|--------|--------|--------|--------|--------|--------|--------|
|             | Size 00                   | Size 0 | Size 1 | Size 2 | Size 3 | Size 4 | Size 5 | Size 6 | Size 7 |
| 24 Vac [8]  | B7                        | B7     | B7     | B7     | B6     | B6     | —      | —      | —      |
| 24 Vdc [9]  | BD                        | BD     | BD     | BD     | BD     | BD     | —      | —      | —      |
| 120 Vac [8] | G7                        | G7     | G7     | G7     | G7     | G7     | G7     | F7     | F7     |
| 208 Vac     | LE7                       | LE7    | LE7    | LE7    | L7     | L7     | L7     | L7     | L7     |
| 240 Vac     | U7                        | U7     | U7     | U7     | U7     | U7     | U7     | U7     | U7     |
| 480 Vac     | T7                        | T7     | T7     | T7     | S7     | S7     | S7     | N7     | N7     |

**Table 16.45: TeSys LR9D Electronic Overload Relays**

| Current Setting Range (A) | For Direct Mounting to TeSys N Contactors | Class 5/10/20/30 Selectable |
|---------------------------|-------------------------------------------|-----------------------------|
| 0.1–0.5                   | Size 00–1                                 | LR9D01                      |
| 0.4–2.0                   |                                           | LR9D02                      |
| 1.6–8.0                   |                                           | LR9D08                      |
| 6.4–32                    |                                           | LR9D32                      |

**Table 16.46: TeSys D Overload Relays—Ambient Compensated, Bimetallic, Direct Mounting**

| Current Setting Range (A) | For Direct Mounting to TeSys N Contactors | Class 10 with Single-Phase Sensitivity | Class 10 without Single-Phase Sensitivity | Class 20 with Single-Phase Sensitivity | Class 20 without Single-Phase Sensitivity |
|---------------------------|-------------------------------------------|----------------------------------------|-------------------------------------------|----------------------------------------|-------------------------------------------|
| 0.10–0.16                 | Size 00–1                                 | LRD01                                  | LR3D01                                    | —                                      | —                                         |
| 0.16–0.25                 | Size 00–1                                 | LRD02                                  | LR3D02                                    | —                                      | —                                         |
| 0.25–0.40                 | Size 00–1                                 | LRD03                                  | LR3D03                                    | —                                      | —                                         |
| 0.40–0.63                 | Size 00–1                                 | LRD04                                  | LR3D04                                    | LRD04L                                 | LR3D04L                                   |
| 0.63–1                    | Size 00–1                                 | LRD05                                  | LR3D05                                    | LRD05L                                 | LR3D05L                                   |
| 1–1.6                     | Size 00–1                                 | LRD06                                  | LR3D06                                    | LRD06L                                 | LR3D06L                                   |
| 1.6–2.5                   | Size 00–1                                 | LRD07                                  | LR3D07                                    | LRD07L                                 | LR3D07L                                   |
| 2.5–4                     | Size 00–1                                 | LRD08                                  | LR3D08                                    | LRD08L                                 | LR3D08L                                   |
| 4–6                       | Size 00–1                                 | LRD10                                  | LR3D10                                    | LRD10L                                 | LR3D10L                                   |
| 5.5–8                     | Size 00–1                                 | LRD12                                  | LR3D12                                    | LRD12L                                 | LR3D12L                                   |
| 7–10                      | Size 00–1                                 | LRD14                                  | LR3D14                                    | LRD14L                                 | LR3D14L                                   |
| 9–13                      | Size 0–1                                  | LRD16                                  | LR3D16                                    | LRD16L                                 | LR3D16L                                   |
| 12–18                     | Size 0–1                                  | LRD21                                  | LR3D21                                    | LRD21L                                 | LR3D21L                                   |
| 16–24                     | Size 0–1                                  | LRD22                                  | LR3D22                                    | —                                      | —                                         |
| 17–24                     | Size 0–1                                  | —                                      | —                                         | LRD22L                                 | LR3D22L                                   |
| 23–32                     | Size 1                                    | LRD32                                  | LR3D32                                    | LRD32L                                 | LR3D32L                                   |
| 9–13                      | Size 2                                    | LRD313                                 | LR3D313                                   | LRD313L                                | —                                         |
| 12–18                     | Size 2                                    | LRD318                                 | LR3D318                                   | LRD318L                                | —                                         |
| 16–25                     | Size 2                                    | LRD325                                 | LR3D325                                   | LRD325L                                | —                                         |
| 23–32                     | Size 2                                    | LRD332                                 | LR3D332                                   | LRD332L                                | —                                         |
| 30–40                     | Size 2                                    | LRD340                                 | LR3D340                                   | LRD340L                                | —                                         |
| 37–50                     | Size 2                                    | LRD350                                 | LR3D350                                   | LRD350L                                | —                                         |

[6] Replace the bullets (●●) in the catalog number with the coil voltage code. Refer to the coil voltage codes shown in [Table 16.44](#).

[7] Special size combinations of the contactor and Motor Logic overload relay are available. Add **0** to the catalog number before the coil voltage for a Size 0 overload relay (6–18 A); **9** for a Size 00C (3–9 A); and **8** for a Size 00B (1.5–4.5 A)—for example, T36CN130G7.

[8] The 24 and 120 Vac coils are available with optional separate control; add **Form S** to the catalog number (for example, T36AN13B7S).

[9] The 24 Vdc coil requires separate control; add **Form S** to the catalog number (for example, T36AN13BDS).

*New!*

## TeSys N Reversing Starters

TeSys N reversing starters are used for full-voltage starting, stopping, and reversing of AC squirrel cage motors. Reversing starters are mechanically and electrically interlocked and are available in NEMA Sizes 00 through 5. Starters come with Motor Logic Class 10/20 selectable solid-state overload relays as standard. Reversing starters with bimetal overload protection can be assembled from TeSys N reversing contactors and TeSys D overload relays. For more information on TeSys D overload relays, see Section 18.

**Table 16.47: TeSys N Reversing Starters, 3-Pole Polyphase, 600 Vac Max.**  
(replace ●● with the coil voltage code)

| NEMA Size | Continuous Current Rating (A) | Motor Voltage | Max HP | Open Catalog No. [10] |
|-----------|-------------------------------|---------------|--------|-----------------------|
| 00        | 9                             | 200           | 1.5    | T36AN23●●             |
|           |                               | 230           | 1.5    |                       |
|           |                               | 460           | 2      |                       |
|           |                               | 575           | 2      |                       |
| 0         | 18                            | 200           | 3      | T36BN23●●             |
|           |                               | 230           | 3      |                       |
|           |                               | 460           | 5      |                       |
|           |                               | 575           | 5      |                       |
| 1[11]     | 27                            | 200           | 7.5    | T36CN23●●             |
|           |                               | 230           | 7.5    |                       |
|           |                               | 460           | 10     |                       |
|           |                               | 575           | 10     |                       |
| 2         | 45                            | 200           | 10     | T36DN23●●             |
|           |                               | 230           | 15     |                       |
|           |                               | 460           | 25     |                       |
|           |                               | 575           | 25     |                       |
| 3         | 90                            | 200           | 25     | T36EN23●●             |
|           |                               | 230           | 30     |                       |
|           |                               | 460           | 50     |                       |
|           |                               | 575           | 50     |                       |
| 4         | 135                           | 200           | 40     | T36FN23●●             |
|           |                               | 230           | 50     |                       |
|           |                               | 460           | 100    |                       |
|           |                               | 575           | 100    |                       |
| 5         | 270                           | 200           | 75     | T36GN23●●             |
|           |                               | 230           | 100    |                       |
|           |                               | 460           | 200    |                       |
|           |                               | 575           | 200    |                       |

**Table 16.48: TeSys N Coil Voltage Codes**

| Voltage     | Voltage Code by NEMA Size |        |        |        |        |        |        |
|-------------|---------------------------|--------|--------|--------|--------|--------|--------|
|             | Size 00                   | Size 0 | Size 1 | Size 2 | Size 3 | Size 4 | Size 5 |
| 24 Vac[12]  | B7                        | B7     | B7     | B7     | B6     | B6     | n/a    |
| 24 Vdc [13] | BD                        | BD     | BD     | BD     | BD     | BD     | n/a    |
| 120 Vac[12] | G7                        | G7     | G7     | G7     | G7     | G7     | G7     |
| 208 Vac     | LE7                       | LE7    | LE7    | LE7    | L7     | L7     | L7     |
| 240 Vac     | U7                        | U7     | U7     | U7     | U7     | U7     | U7     |
| 480 Vac     | T7                        | T7     | T7     | T7     | S7     | S7     | S7     |



TeSys N reversing starter, Size 00



TeSys N reversing starter, Size 4



E164862  
CCN NLDX



LR43364  
Class 3211 04

Dimensions: [page 16-23 to page 16-27](#)  
Accessories: [page 16-18 to page 16-21](#)  
Replacement Parts: [page 16-22](#)  
Lugs: [page 16-21](#)

[10] Replace the bullets (●●) in the catalog number with the coil voltage code. Refer to the coil voltage codes shown in [Table 16.48](#).

[11] Special size combinations of the contactor and Motor Logic overload relay are available. Add **0** to the catalog number before the coil voltage for Size 0 overload relays (6–18 A); **9** for Size 00C (3–9 A); and **8** for Size 00B (1.5–4.5 A)—for example, T36CN230G7.

[12] The 24 and 120 Vac coils are available with optional separate control; add **Form S** to the catalog number (for example, T36AN13B7S).

[13] The 24 Vdc coil requires separate control; add **Form S** to the catalog number (for example, T36AN23BDS).



Front Mounted Auxiliary Blocks

**Auxiliary Contacts, Time Delay, Mechanical Latch****Table 16.49: Standard, Instantaneous Auxiliary Contact Blocks**

| Snap-On Mounting                                         | Number of Contacts | Composition       |                   | Catalog Number         |
|----------------------------------------------------------|--------------------|-------------------|-------------------|------------------------|
|                                                          |                    | N.O.              | N.C.              |                        |
| To front of Size 00–2<br>or<br>To right side of Size 3–7 | 4                  | 2                 | 2                 | LADN22 <sup>[14]</sup> |
|                                                          |                    | 1                 | 3                 | LADN13 <sup>[14]</sup> |
|                                                          |                    | 4                 | 0                 | LADN40 <sup>[14]</sup> |
|                                                          |                    | 0                 | 4                 | LADN04 <sup>[14]</sup> |
|                                                          |                    | 3                 | 1                 | LADN31 <sup>[14]</sup> |
|                                                          | 2                  | 2 <sup>[15]</sup> | 2 <sup>[15]</sup> | LADC22 <sup>[15]</sup> |
|                                                          |                    | 1                 | 1                 | LADN11 <sup>[14]</sup> |
|                                                          |                    | 2                 | 0                 | LADN20 <sup>[14]</sup> |
| To left side of Size 3–7                                 | 1                  | 0                 | 2                 | LADN02 <sup>[14]</sup> |
|                                                          |                    | 1                 | 0                 | LADN10                 |
| To side of Size 00–2                                     | 2                  | 0                 | 1                 | LADN01                 |
|                                                          |                    | 1                 | 1                 | LADN11 <sup>[16]</sup> |
|                                                          |                    | 2                 | 0                 | LADN20 <sup>[16]</sup> |

**Table 16.50: Instantaneous Blocks with Dust-Tight Auxiliary Contacts (IP54) NEMA 12**

| Snap-On Mounting                                         | Standard Contacts |      | Dust-Tight Contacts |      | Catalog Number          |
|----------------------------------------------------------|-------------------|------|---------------------|------|-------------------------|
|                                                          | N.O.              | N.C. | N.O.                | N.C. |                         |
| To front of Size 00–2<br>or<br>To right side of Size 3–7 | —                 | —    | 2                   | —    | LA1DX20                 |
|                                                          | 2                 | —    | 2                   | —    | LA1DZ40                 |
|                                                          | 1                 | 1    | 2                   | —    | LA1DZ31                 |
|                                                          | —                 | —    | 2                   | —    | LA1DY20 <sup>[17]</sup> |

**Table 16.51: Pneumatic Time Delay Contact Blocks**

| Snap-On Mounting                                         | Time Delay Contacts |      | Type                           | Range of Time Delay        | Catalog Number <sup>[18]</sup> |
|----------------------------------------------------------|---------------------|------|--------------------------------|----------------------------|--------------------------------|
|                                                          | N.O.                | N.C. |                                |                            |                                |
| To front of Size 00–2<br>or<br>To right side of Size 3–7 | 1                   | 1    | On energization (on delay)     | 0.1 to 3 s <sup>[19]</sup> | LADT0                          |
|                                                          |                     |      |                                | 0.1 to 30 s                | LADT2                          |
|                                                          |                     |      |                                | 10 to 180 s                | LADT4                          |
|                                                          |                     |      |                                | 1 to 30 s <sup>[20]</sup>  | LADS2                          |
|                                                          | 1                   | 1    | On de-energization (off-delay) | 0.1 to 3 s <sup>[19]</sup> | LADR0                          |
|                                                          |                     |      |                                | 0.1 to 30 s                | LADR2                          |
|                                                          |                     |      |                                | 10 to 180 s                | LADR4                          |
|                                                          |                     |      |                                |                            |                                |

**Table 16.52: Mechanical Latch Blocks with Manual or Electrical Unlatch**

| Front snap-on mounting onto | Application                                  | Catalog Number              |
|-----------------------------|----------------------------------------------|-----------------------------|
| Size 00–2                   | For silent operation and energy conservation | LAD6K10 <sup>[21][22]</sup> |

**Table 16.53: Coil Voltage Codes for LA6DK Mechanical Latch Blocks**

| Volts                    | 24 | 120 | 208 | 240 | 480 |
|--------------------------|----|-----|-----|-----|-----|
| AC or DC <sup>[23]</sup> | B  | F   | L   | M   | R   |

<sup>[14]</sup> For spring terminal versions of these blocks, add a **3** to the end of the catalog number (for example, LADN223). For slip-on versions, add **9** to the end of the catalog number (for example, LADN229).

<sup>[15]</sup> Including 1 N.O. + 1 N.C. make-before-break overlapping contacts.

<sup>[16]</sup> 1 block may be added to the left side of Size 00–1, AC coils only; only 1 block may be added to either side of the Size 2 contactor, AC coil only. Cannot be installed on Size 00–2 contactors with DC coils.

<sup>[17]</sup> Device comes with 4 ground terminal points.

<sup>[18]</sup> For spring terminal versions of these blocks, add a **3** to the end of the catalog number (for example, LADT23). There is no charge for this modification.

<sup>[19]</sup> Scale range is expanded between 0.1 and 0.6 seconds on the dial for more accurate settings at the lower end of the range.

<sup>[20]</sup> Switching time between the opening of the N.C. contact and the closing of the N.O. contact: 40 ms ± 15 ms.

<sup>[21]</sup> Complete the catalog number by adding the coil voltage code (for example, LAD6K10F).

<sup>[22]</sup> Does not include internal coil clearing contact.

<sup>[23]</sup> DC available at 24 V only.

**TeSys™ N Reversing Contactors: Field Assembly**

**Table 16.54: Contactors**

| For assembly of reversing contactors comprising two identical, horizontally mounted contactors without common baseplate: | Mechanical interlock         |                                                           | Set of power connections               |
|--------------------------------------------------------------------------------------------------------------------------|------------------------------|-----------------------------------------------------------|----------------------------------------|
|                                                                                                                          | Without electrical interlock | With incorporated electrical interlock (2 N. C. contacts) | Reversing contactors for motor control |
|                                                                                                                          |                              |                                                           |                                        |
|                                                                                                                          | Catalog Number               | Catalog Number                                            | Catalog Number                         |
| Size 00-1                                                                                                                | <a href="#">LAD9R1 [24]</a>  | <a href="#">LAD9R1V [24]</a>                              | Included with kit                      |
|                                                                                                                          |                              |                                                           |                                        |
|                                                                                                                          | Catalog Number               | Catalog Number                                            | Catalog Number                         |
| LC1D40A, D50A, D65A                                                                                                      | <a href="#">LAD4CM</a>       | —                                                         | <a href="#">LA9D65A69</a>              |
|                                                                                                                          | <a href="#">LAD9R3 [25]</a>  | —                                                         | —                                      |
|                                                                                                                          |                              |                                                           |                                        |
| Reversing contactors comprising two identical, horizontally mounted contactors                                           |                              |                                                           |                                        |
|                                                                                                                          | Catalog Number               | Catalog Number                                            | Catalog Number                         |
| Size 3                                                                                                                   | <a href="#">LA9FF970</a>     | —                                                         | <a href="#">LA9FF976</a>               |
| Size 4                                                                                                                   | <a href="#">LA9FF970</a>     | —                                                         | <a href="#">LA9F15076</a>              |
| Size 5                                                                                                                   | <a href="#">LA9FJ970</a>     | —                                                         | <a href="#">LA9FJ976</a>               |
| Size 6                                                                                                                   | <a href="#">LA9FJ970</a>     | —                                                         | <a href="#">LA9FK976</a>               |
| Size 7                                                                                                                   | <a href="#">LA9FL970</a>     | —                                                         | <a href="#">LA9FL976</a>               |
|                                                                                                                          |                              |                                                           |                                        |
|                                                                                                                          |                              |                                                           |                                        |

[24] Kit including mechanical interlock and wiring.  
[25] Kit combines both LAD4CM and LA9D65A69



LA4DA1U

## Coil Suppressors and Cabling Accessories

### RC Coil Suppressor

- Transient voltage limited to 300% of nominal voltage, maximum.
- Oscillating frequency is limited to 400 Hz maximum. Slight increase in drop-out time (1.2 to 2 times normal).

**Table 16.55: Resistor/Capacitor Circuit (RC) for Reduction of Electrical Noise in AC Contactor Coils**

| Installed by                                                                   | Mounting on | Operating Voltage<br>50/60 Hz | Catalog Number |
|--------------------------------------------------------------------------------|-------------|-------------------------------|----------------|
| Snapping into the cavity on the right side without tools [26]                  | Size 00–1   | 24 V                          | LAD4RCE        |
|                                                                                |             | 120 V                         | LAD4RCG        |
|                                                                                |             | 120–240 V                     | LAD4RCU        |
| Snap-on mounting, and connection without tools to the contactor coil terminals | Size 2      | 24 V                          | LAD4RC3E       |
|                                                                                |             | 120 V                         | LAD4RC3G       |
|                                                                                |             | 120–240 V                     | LAD4RC3U       |

### Varistor Coil Suppressor

- Transient voltage value limited to 200% of nominal voltage, maximum.
- Maximum reduction of transient voltage peaks. Slight increase in drop-out time (1.1 to 1.5 times normal).

**Table 16.56: Varistor (Peak Limiting) for Reduction of Electrical Noise in AC Contactor Coils**

| Installed by                                                                   | Mounting on | Operating Voltage<br>50/60 Hz | Catalog Number |
|--------------------------------------------------------------------------------|-------------|-------------------------------|----------------|
| Snapping into the cavity on the right side without tools [26]                  | Size 00–1   | 24 V                          | LAD4VE         |
|                                                                                |             | 120 V                         | LAD4VG         |
|                                                                                |             | 120–240 V                     | LAD4VU         |
| Snap-on mounting, and connection without tools to the contactor coil terminals | Size 2      | 24 V                          | LAD4V3E        |
|                                                                                |             | 120 V                         | LAD4V3G        |
|                                                                                |             | 120–240 V                     | LAD4V3U        |

### Diode Coil Suppressor


- No overvoltage or oscillating frequency.
- Polarized component. Increased drop-out time (6–10 times normal).

**Table 16.57: Diode for Reduction of Electrical Noise in DC Contactor Coils**

| Installed on the upper part by                                            | Mounting on | Operating Voltage, DC | Catalog Number |
|---------------------------------------------------------------------------|-------------|-----------------------|----------------|
| Snap-on mounting and connection w/o tools to the contactor coil terminals | Size 00–1   | 24 Vdc                | LAD4DDL        |
| Clip-on front mounting                                                    | Size 2      | 24 Vdc                | LAD4D3U        |



LAD4T3B



LAD4BB••

### Bidirectional Diode Coil Suppressor

- Protection provided by limiting the transient voltage to 2 Uc max.
- Maximum reduction of transient voltage peaks.

**Table 16.58: Bidirectional Peak Limiting Diode**

| Installed by                                                                             | Mounting on    | Operating Voltage<br>50/60 Hz and DC | Catalog Number |
|------------------------------------------------------------------------------------------|----------------|--------------------------------------|----------------|
| Snapping into the cavity on the right side of the contactor [26]                         | Size 00–1 [27] | 24 (AC only)                         | LAD4TB         |
| Clip-on front mounting and connection without tools to the contactor coil terminals [27] | Size 2         | 24 V                                 | LAD4T3B        |
|                                                                                          |                | 120 V                                | LAD4T3G        |
|                                                                                          |                | 208–240 V                            | LAD4T3U        |

## TeSys N Cabling Accessories

**Table 16.59: Cabling Accessories**

| Usage                                                                                 | Mounting on        | Operating Voltage<br>50/60 Hz    | Catalog Number |
|---------------------------------------------------------------------------------------|--------------------|----------------------------------|----------------|
| For adapting existing wiring to a new product or for use with top-mounting accessory. | Size 00–1, AC only | Without coil suppression         | LAD4BB         |
|                                                                                       |                    | With coil suppression (varistor) | 24 V           |
|                                                                                       |                    | 120 V                            | LAD4BBVE       |
| For adapting existing wiring to a new product or for use with top-mounting accessory  | Size 2, AC only    | 120–240 V                        | LAD4BBVG       |
|                                                                                       |                    | —                                | LAD4BBVU       |
|                                                                                       |                    | —                                | LAD4BB3        |

[26] Installing the suppressor into the cavity makes the electrical connection. The overall width of the contactor remains the same.

[27] For Size 00–2 with DC coils, 3-pole contactors are fitted with built-in bidirectional diode suppression as standard.

## Electronic Timers and Interface Modules

The following accessories require use of cabling accessories (LAD4BB●●) for proper mounting. See [page 16-20](#) for illustration.

The solid-state **Electronic Serial Timer Modules** in [Table 16.60](#) delay the energizing of the contactor coil, and feature built-in varistor surge suppression.

**Table 16.60: Electronic Serial Timer Modules**

| Type     | Operational Voltage<br>24–250 Vac | Time Delay | Catalog Number |
|----------|-----------------------------------|------------|----------------|
| On-delay | Size 00–2                         | 0.1–2 s    | LA4DT0U        |
|          |                                   | 1.5–30 s   | LA4DT2U        |
|          |                                   | 25–500 s   | LA4DT4U        |

The **Interface Modules** in [Table 16.61](#) allow the contactor coils to be energized from low voltage and low current level signals. They come in mechanical relay and solid-state versions. The relay plus manual operation versions include a lever for manually turning the contactor on and off. When a module receives a low-level signal, it allows the separate-sourced control voltage to flow to the contactor coil. It saves space and wiring time compared to conventional interposing relays.

**Table 16.61: Interface Modules** [\[28\]](#)

| Interface Type                 | Operational Voltage<br>24–250 Vac | Input Voltage | Catalog Number |
|--------------------------------|-----------------------------------|---------------|----------------|
| Relay                          | Size 00–2                         | 24 Vdc        | LA4DFB         |
| Relay Plus<br>Manual Operation | Size 00–2                         | 24 Vdc        | LA4DLB         |
| Solid State                    | Size 00–2                         | 24 Vdc        | LA4DWB         |

**Table 16.62: Lugs and Lug Kits** [\[29\]](#)

| TeSys N<br>Contactor | Lugs                              |                                   | Lug Kits <a href="#">[30]</a> | Cable size AWG<br>range |
|----------------------|-----------------------------------|-----------------------------------|-------------------------------|-------------------------|
|                      | Line Size                         | Load Side                         |                               |                         |
| Size 3               | 3 each DZ2FF1                     | 3 each DZ2FF1                     | DZ2FF6                        | 14 to 2/0               |
| Size 4               | 3 each DZ2FG1                     | 3 each DZ2FG1                     | DZ2FG6                        | 6 to 3/0                |
| Size 5               | 3 each DZ2FJ1                     | 3 each DZ2FJ1                     | DZ2FJ6                        | 4 to 500 MCM            |
| Size 6               | 3 each DZ2FK1                     | 3 each DZ2FK1                     | DZ2FK6                        | 2 x 2 to 600 MCM        |
| Size 7               | 1 each DZ2FL1<br>DZ2FL2<br>DZ2FL3 | 1 each DZ2FL1<br>DZ2FL2<br>DZ2FL3 | DZ2FL6                        | 3 x 2 to 600 MCM        |

**Table 16.63: TeSys Safety-Chain Identification System**

| Description                                  | Compatibility | Package Qty | Catalog Number |
|----------------------------------------------|---------------|-------------|----------------|
| Red retrofit contactor safety cover          | Size 00–2     | 10          | LAD9ET1S       |
| Red auxiliary contact block, 2 N.O. + 2 N.C. | Size 00–2     | 1           | LADN22S        |



LA4DFB



LAD9ET1S



LADN22S

[\[28\]](#) Adapter required. See [Table 16.59](#).

[\[29\]](#) The mounting hardware (screws, washers, and nuts) comes with the contactors, not the lugs. Starters Sizes 3–7 come with lugs.

[\[30\]](#) Lug kits include 6 lugs.



## Replacement Contacts and Coils

Table 16.64: Replacement Contact Sets [31]

| For use on contactors | Number of Poles | Catalog Number |
|-----------------------|-----------------|----------------|
| Size 3–4              | 3 poles         | LA5FF431       |
| Size 5                | 3 poles         | LA5F400803     |
| Size 6                | 3 poles         | LA5F500803     |
| Size 7                | 3 poles         | LA5F630803     |

## TeSys N Magnet Coils

Table 16.65: Size 00–1 AC Coils

| Rated Nominal Voltage                                                          | Catalog Number 50/60 Hz                                |
|--------------------------------------------------------------------------------|--------------------------------------------------------|
| 24                                                                             | LXD1B7                                                 |
| 32                                                                             | LXD1C7                                                 |
| 36                                                                             | LXD1CC7                                                |
| 42                                                                             | LXD1D7                                                 |
| 48                                                                             | LXD1E7                                                 |
| 60                                                                             | LXD1EE7                                                |
| 100                                                                            | LXD1K7                                                 |
| 110                                                                            | LXD1F7                                                 |
| 115                                                                            | LXD1FE7                                                |
| 120                                                                            | LXD1G7                                                 |
| 127                                                                            | LXD1FC7                                                |
| 200                                                                            | LXD1L7                                                 |
| 208                                                                            | LXD1LE7                                                |
| 220/230                                                                        | LXD1M7                                                 |
| 230                                                                            | LXD1P7                                                 |
| 230/240                                                                        | LXD1U7                                                 |
| 277                                                                            | LXD1W7                                                 |
| 380/400                                                                        | LXD1Q7                                                 |
| 400                                                                            | LXD1V7                                                 |
| 415                                                                            | LXD1N7                                                 |
| 440                                                                            | LXD1R7                                                 |
| 480                                                                            | LXD1T7                                                 |
| 575                                                                            | LXD1SC7                                                |
| 600                                                                            | LXD1X7                                                 |
| Specifications                                                                 | 50/60 Hz                                               |
| Average consumption<br>- Inrush (inductance 0.75)<br>- Sealed (inductance 0.3) | 70 VA<br>7 VA                                          |
| Operating range @ 60 °C                                                        | 50 Hz: 80–110% of nominal<br>60 Hz: 85–110% of nominal |

Table 16.66: Size 2 AC Coils

| Rated Nominal Voltage V                                                        | Catalog Number 50/60 Hz                              |
|--------------------------------------------------------------------------------|------------------------------------------------------|
| 24                                                                             | LXD3B7                                               |
| 32                                                                             | LXD3C7                                               |
| 42                                                                             | LXD3D7                                               |
| 48                                                                             | LXD3E7                                               |
| 100                                                                            | LXD3K7                                               |
| 110                                                                            | LXD3F7                                               |
| 115                                                                            | LXD3FE7                                              |
| 120                                                                            | LXD3G7                                               |
| 127                                                                            | LXD3FC7                                              |
| 200                                                                            | LXD3L7                                               |
| 208                                                                            | LXD3LE7                                              |
| 220                                                                            | LXD3M7                                               |
| 230                                                                            | LXD3P7                                               |
| 240                                                                            | LXD3U7                                               |
| 277                                                                            | LXD3W7                                               |
| 380                                                                            | LXD3Q7                                               |
| 400                                                                            | LXD3V7                                               |
| 415                                                                            | LXD3N7                                               |
| 440                                                                            | LXD3R7                                               |
| 480                                                                            | LXD3T7                                               |
| 500                                                                            | LXD3S7                                               |
| 575                                                                            | LXD3SC7                                              |
| 600                                                                            | LXD3X7                                               |
| Specification                                                                  | 50/60 Hz                                             |
| Average consumption:<br>- Inrush (inductance 0.3)<br>- Sealed (inductance 0.3) | 140 VA (inductance: 0.9)<br>7.5 VA (inductance: 0.9) |
| Operating range at $\theta < 55\text{ °C} / 131\text{ °F}$                     | 80–115% of nominal voltage                           |

Table 16.67: Size 3–7 AC Coils

| Contactor Size | Hz     | Catalog Number | Catalog Number Suffix [32] |      |       |       |       |       |       |       |       |       |       |       |        |
|----------------|--------|----------------|----------------------------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------|
|                |        |                | 24 V                       | 48 V | 110 V | 120 V | 208 V | 220 V | 240 V | 277 V | 380 V | 415 V | 440 V | 480 V | 600 V  |
| Size 3–4       | 40–400 | LX9FF●         | — [33]                     | 048  | 110   | 127   | 200   | 220   | 240   | 280   | 380   | 415   | 415   | 500   | — [33] |
| Size 5         | 40–400 | LX1FH●         | 0242                       | 0482 | 1102  | 1272  | 2002  | 2202  | 2402  | 2772  | 3802  | 415   | 4402  | 5002  | 6002   |
| Size 6 [34]    | 40–400 | LX1FK●         | —                          | 048  | 110   | 110   | 200   | 220   | 240   | 280   | 380   | 415   | 415   | 415   | 600    |
| Size 7 [34]    | 40–400 | LX1FL●         | —                          | 048  | 110   | 110   | 200   | 220   | 240   | 260   | 380   | 415   | 415   | 415   | 600    |

Table 16.68: Size 3–4 DC Coils

| Device Type | Catalog Number | Catalog Number Suffix [35] |      |      |      |      |       |       |       |       |       |
|-------------|----------------|----------------------------|------|------|------|------|-------|-------|-------|-------|-------|
|             |                | 24 V                       | 36 V | 48 V | 60 V | 72 V | 110 V | 125 V | 220 V | 250 V | 440 V |
| Size 3–4    | LX4FF●         | 024                        | 035  | 048  | 060  | 070  | 110   | 125   | 220   | 250   | 440   |

[31] Provided per pole: 2 fixed contacts, 1 movable contact, 2 deflectors, 1 backplate, and the mounting screws and washers.

[32] Complete the catalog number by adding the suffix (for example, LX9FF020).

[33] LX1FF020 and LC1FF475 coils will be available for replacement only.

[34] The 600 V coils for Sizes 6 and 7 do not include an auxiliary contact for holding circuits. If required, select the appropriate contacts from page 16-18.

[35] Complete the catalog number by adding the suffix (for example, LX4FF024).



## TeSys™ N Reversing Contactors

Table 16.72: TeSys N Size 00–1, Reversing Contactors [37]

| Dimensional Diagram | Dimension                                   | Dimensions |    |         |     |
|---------------------|---------------------------------------------|------------|----|---------|-----|
|                     |                                             | AC Coil    |    | DC Coil |     |
|                     |                                             | in.        | mm | in.     | mm  |
|                     | <b>a:</b> Without side-mount accessories    | 3.54       | 90 | 3.54    | 90  |
|                     | <b>b:</b> Contactor base                    | 3.35       | 85 | 3.35    | 85  |
|                     | <b>c:</b> With cover, without add-on blocks | 3.62       | 92 | 3.98    | 101 |
|                     | <b>e1</b>                                   | 0.35       | 9  | 0.35    | 9   |
|                     | <b>e2</b>                                   | 0.20       | 5  | 0.20    | 5   |
|                     | <b>G:</b> Mounting holes                    | 3.15       | 80 | 3.15    | 80  |

Table 16.73: TeSys N Size 2, Reversing Contactors [37]

| Dimensional Diagram | Description                             | Dimensions      |       |
|---------------------|-----------------------------------------|-----------------|-------|
|                     |                                         | AC and DC Coils |       |
|                     |                                         | in.             | mm    |
|                     | Width                                   | 4.69            | 119   |
|                     | Height                                  | 4.80            | 122   |
|                     | Depth with cover, without add-on blocks | 4.72            | 120   |
|                     | Load side mounting hole width           | 2.52            | 64    |
|                     | Line side mounting hole width           | 3.40            | 101.5 |
|                     | Mounting hole height                    | 5.04            | 128   |

Table 16.74: TeSys N Size 3–7, Reversing Contactors


| Dimensional Diagram | Dimension | Dimensions |       |         |       |         |       |         |       |         |       |
|---------------------|-----------|------------|-------|---------|-------|---------|-------|---------|-------|---------|-------|
|                     |           | T02EN23    |       | T02FN23 |       | T02GN23 |       | T02HN23 |       | T02JN23 |       |
|                     |           | in.        | mm    | in.     | mm    | in.     | mm    | in.     | mm    | in.     | mm    |
|                     | D         | 0.38       | 9.7   | 0.38    | 9.7   | 0.56    | 14.2  | 0.56    | 14.2  | 0.56    | 14.2  |
|                     | H         | 7.96       | 202.2 | 7.96    | 202.2 | 15.27   | 387.9 | 15.27   | 387.9 | 22.25   | 565.2 |
|                     | L         | 11.75      | 298.5 | 11.75   | 298.5 | 18      | 457.2 | 18      | 457.2 | 30      | 762.0 |
|                     | M         | 7          | 177.8 | 7       | 177.8 | 14      | 355.6 | 14      | 355.6 | 19.75   | 501.7 |
|                     | N         | 0.49       | 12.5  | 0.49    | 12.5  | 0.62    | 15.8  | 0.62    | 15.8  | 1.25    | 31.8  |
|                     | R         | 0.49       | 12.5  | 0.49    | 12.5  | 0.62    | 15.8  | 0.62    | 15.8  | 0.69    | 17.5  |
|                     | W         | 12.71      | 322.8 | 12.71   | 322.8 | 19.27   | 489.5 | 19.27   | 489.5 | 31.38   | 797.0 |
|                     | X         | 5.16       | 131.0 | 5.16    | 131.0 | 5.79    | 147.0 | 5.91    | 150.0 | 7.13    | 181.0 |
|                     | q         |            |       |         |       |         |       |         |       |         |       |
|                     | M         |            |       |         |       |         |       |         |       |         |       |
|                     | N         |            |       |         |       |         |       |         |       |         |       |

[37] DIN rail and panel mountable.


**TeSys N Starters, Size 00–2**

**Table 16.75: TeSys N Size 00–2 Dimensions**


**Non-reversing**  
T36AN13 / T36BN13 / T36CN13 / T36DN13

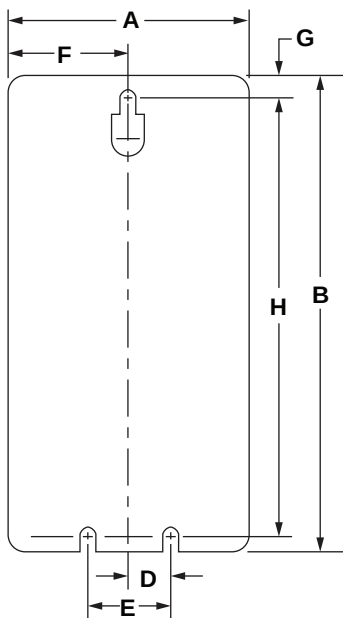

**Reversing**  
T36AN23 / T36BN23 / T36CN23 / T36DN23

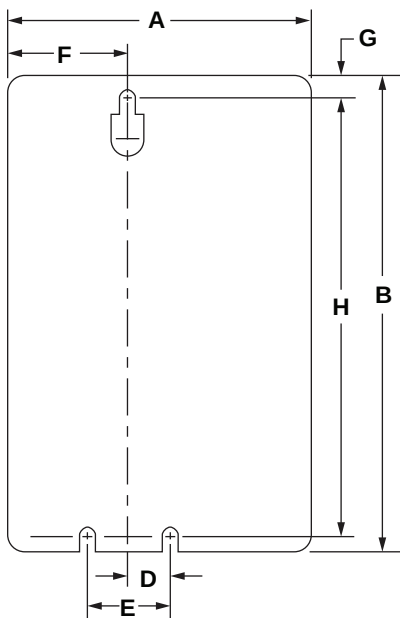

**Depth**

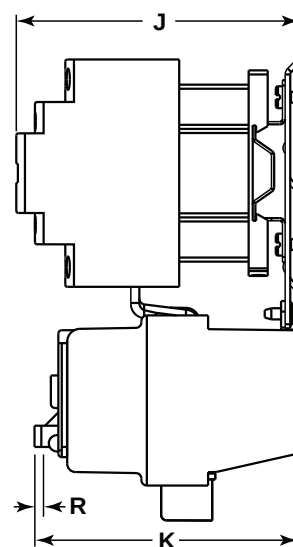

**Table 16.76: TeSys N Size 00–2, Non-Reversing and Reversing Starters**

| Dimension   | Non-Reversing      |       |                   |       |                   |       |                   |       | Reversing          |       |                   |       |                   |       |                   |       |
|-------------|--------------------|-------|-------------------|-------|-------------------|-------|-------------------|-------|--------------------|-------|-------------------|-------|-------------------|-------|-------------------|-------|
|             | Size 00<br>T36AN13 |       | Size 0<br>T36BN13 |       | Size 1<br>T36CN13 |       | Size 2<br>T36DN13 |       | Size 00<br>T36AN23 |       | Size 0<br>T36BN23 |       | Size 1<br>T36CN23 |       | Size 2<br>T36DN23 |       |
|             | in.                | mm    | in.               | mm    | in.               | mm    | in.               | mm    | in.                | mm    | in.               | mm    | in.               | mm    | in.               | mm    |
| A           | 3.19               | 81.0  | 3.19              | 81.0  | 3.19              | 81.0  | 3.19              | 81.0  | 43.9               | 111.5 | 43.9              | 111.5 | 43.9              | 111.5 | 5.19              | 131.8 |
| B           | 6.64               | 168.7 | 6.64              | 168.7 | 6.64              | 168.7 | 8.61              | 218.7 | 6.64               | 168.7 | 6.64              | 168.7 | 6.64              | 168.7 | 8.61              | 218.7 |
| D           | 0.5                | 12.7  | 0.5               | 12.7  | 0.5               | 12.7  | 0.5               | 12.7  | 0.5                | 12.7  | 0.5               | 12.7  | 0.5               | 12.7  | 0.5               | 12.7  |
| E           | 1.0                | 25.4  | 1.0               | 25.4  | 1.0               | 25.4  | 1.0               | 25.4  | 1.0                | 25.4  | 1.0               | 25.4  | 1.0               | 25.4  | 1.0               | 25.4  |
| F           | 1.59               | 40.5  | 1.59              | 40.5  | 1.59              | 40.5  | 1.59              | 40.5  | 1.59               | 40.5  | 1.59              | 40.5  | 1.59              | 40.5  | 1.59              | 40.5  |
| G           | 0.20               | 5.2   | 0.20              | 5.2   | 0.20              | 5.2   | 0.20              | 5.2   | 0.20               | 5.2   | 0.20              | 5.2   | 0.20              | 5.2   | 0.20              | 5.2   |
| H           | 6.16               | 156.5 | 6.16              | 156.5 | 6.16              | 156.5 | 8.22              | 208.8 | 6.16               | 156.5 | 6.16              | 156.5 | 6.16              | 156.5 | 8.22              | 208.8 |
| J (AC Coil) | 4.17               | 105.9 | 4.17              | 105.9 | 4.17              | 105.9 | 4.94              | 125.4 | 4.17               | 105.9 | 4.17              | 105.9 | 4.17              | 104.9 | 4.94              | 125.4 |
| J (DC Coil) | 4.52               | 114.9 | 4.52              | 114.9 | 4.52              | 114.9 |                   |       | 4.52               | 114.9 | 4.52              | 114.9 | 4.52              | 114.9 |                   |       |
| K           | 3.90               | 99.0  | 3.90              | 99.0  | 3.90              | 99.0  | 3.90              | 99.0  | 3.90               | 99.0  | 3.90              | 99.0  | 3.90              | 99.0  | 3.90              | 99.0  |
| R[38]       | 0.24               | 6.1   | 0.24              | 6.1   | 0.24              | 6.1   | 0.24              | 6.1   | 0.24               | 6.1   | 0.24              | 6.1   | 0.24              | 6.1   | 0.24              | 6.1   |

[38] Reset travel.

## TeSys N Starters, Size 3–4

Table 16.77: TeSys N Size 3–4 Dimensions

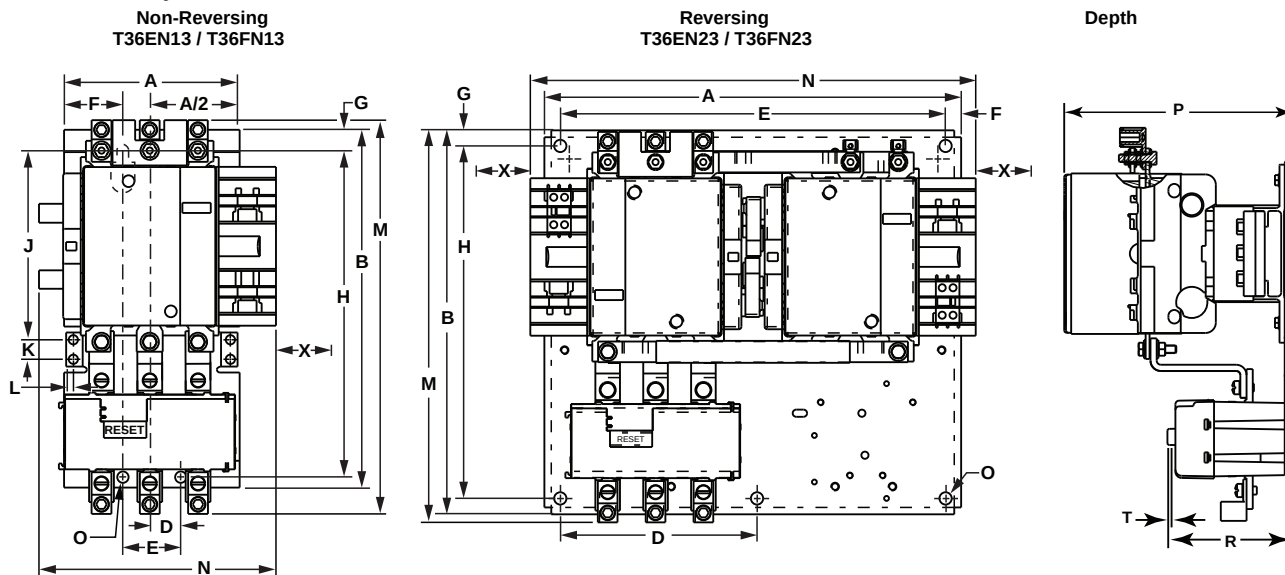


Table 16.78: TeSys N Size 3–4, Non-Reversing and Reversing Starters


| Dimension         | Non-Reversing     |       |                   |       | Reversing         |       |                   |       |
|-------------------|-------------------|-------|-------------------|-------|-------------------|-------|-------------------|-------|
|                   | Size 3<br>T36EN13 |       | Size 4<br>T36FN13 |       | Size 3<br>T36EN23 |       | Size 4<br>T36FN23 |       |
|                   | in.               | mm    | in.               | mm    | in.               | mm    | in.               | mm    |
| A                 | 5.31              | 134.9 | 5.31              | 134.9 | 12.71             | 322.8 | 12.71             | 322.8 |
| B                 | 10.82             | 274.8 | 10.82             | 274.8 | 11.71             | 297.4 | 11.71             | 297.4 |
| D                 | 0.88              | 22.4  | 0.88              | 22.4  | 6.0               | 152.4 | 6.0               | 152.4 |
| E                 | 1.75              | 44.5  | 1.75              | 44.5  | 11.75             | 298.5 | 11.75             | 298.5 |
| F                 | 1.78              | 45.0  | 1.78              | 45.0  | 0.48              | 12.2  | 0.48              | 12.2  |
| G                 | 0.32              | 8.1   | 0.32              | 8.1   | 0.48              | 12.2  | 0.48              | 12.2  |
| H                 | 10.19             | 258.8 | 10.19             | 258.8 | 10.75             | 273.1 | 10.75             | 273.1 |
| J                 | 6.03              | 153.2 | 6.03              | 153.2 | —                 | —     | —                 | —     |
| K                 | 0.59              | 15.0  | 0.59              | 15.0  | —                 | —     | —                 | —     |
| L                 | 0.22              | 5.6   | 0.22              | 5.6   | —                 | —     | —                 | —     |
| M                 | 11.91             | 302.4 | 11.91             | 302.4 | 11.96             | 303.8 | 11.96             | 303.8 |
| N                 | 6.57              | 166.8 | 6.57              | 166.8 | 13.58             | 344.9 | 13.58             | 344.9 |
| O                 | 0.375             | 9.5   | 0.375             | 9.5   | 0.375             | 9.5   | 0.375             | 9.5   |
| P                 | 6.96              | 176.7 | 6.96              | 176.7 | 7.18              | 182.4 | 7.18              | 182.4 |
| R                 | 3.8               | 97    | 3.8               | 97    | 3.8               | 97    | 3.8               | 97    |
| T <sup>[39]</sup> | 0.24              | 6.1   | 0.24              | 6.1   | 0.24              | 6.1   | 0.24              | 6.1   |
| X <sup>[40]</sup> | 5.16              | 131.0 | 5.16              | 131.0 | 5.16              | 131.0 | 5.16              | 131.0 |

[39] Reset travel.

[40] Minimum distance for coil removal.

**TeSys N Starters, Size 5–7**

**Table 16.79: TeSys N Size 5–7 Dimensions**

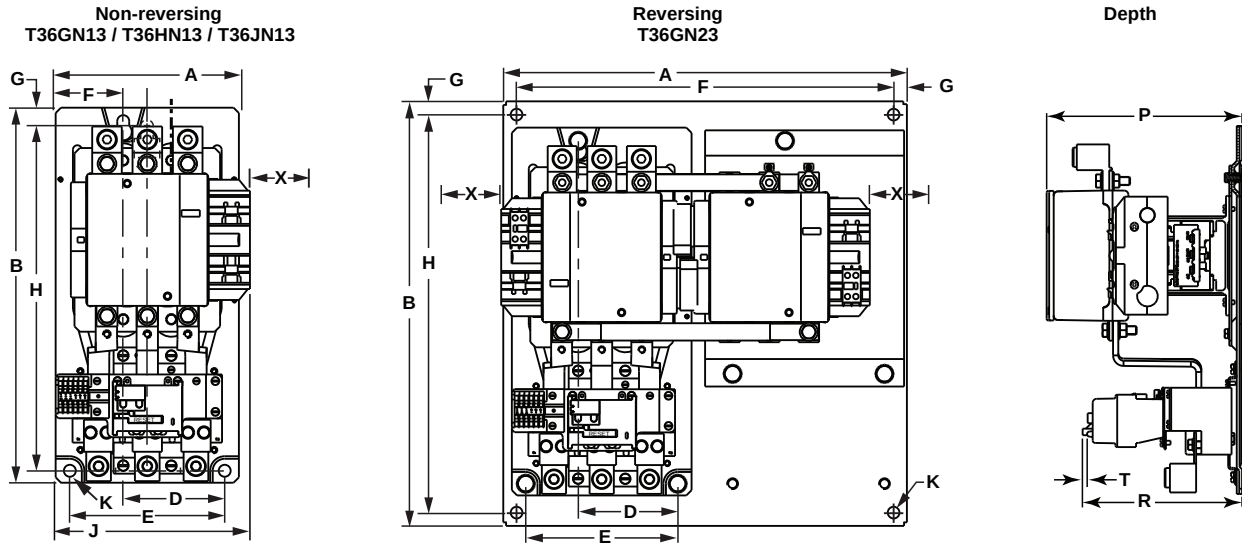

**Table 16.80: TeSys N Size 5–7, Non-Reversing and Reversing Starters**

| Dimension         | Non-Reversing     |       |                   |       |                   |       | Reversing         |       |
|-------------------|-------------------|-------|-------------------|-------|-------------------|-------|-------------------|-------|
|                   | Size 5<br>T36GN13 |       | Size 6<br>T36HN13 |       | Size 7<br>T36JN13 |       | Size 5<br>T36GN23 |       |
|                   | in.               | mm    | in.               | mm    | in.               | mm    | in.               | mm    |
| A                 | 8.58              | 217.9 | 8.58              | 217.9 | 8.58              | 217.9 | 19.3              | 489.4 |
| B                 | 17.56             | 446.0 | 19.75             | 501.7 | 23.58             | 598.9 | 20.3              | 514.8 |
| D                 | 4.75              | 120.7 | 4.75              | 120.7 | 4.75              | 120.7 | 4.75              | 120.7 |
| E                 | 7.25              | 184.2 | 7.25              | 184.2 | 7.25              | 184.2 | 7.25              | 184.2 |
| F                 | 3.17              | 80.4  | 3.17              | 80.4  | 3.17              | 80.4  | 18.0              | 457.2 |
| G                 | 0.63              | 16.0  | 0.63              | 16.0  | 0.63              | 16.0  | 0.63              | 16.1  |
| H                 | 16.37             | 415.8 | 18.56             | 463.6 | 22.38             | 565.9 | 19.0              | 482.6 |
| J                 | 9.91              | 251.6 | 9.91              | 251.6 | 9.91              | 251.6 | —                 | —     |
| K                 | 0.56              | 14.2  | 0.56              | 14.2  | 0.56              | 14.2  | 0.56              | 14.2  |
| P                 | 9.32              | 236.8 | 9.32              | 236.8 | 9.32              | 236.8 | 9.95              | 252.7 |
| R                 | 7.38              | 187.0 | 9.16              | 232.7 | 8.07              | 205.0 | 7.38              | 187.0 |
| T <sup>[41]</sup> | 0.24              | 6.1   | 0.24              | 6.1   | 0.24              | 6.1   | 0.24              | 6.1   |
| X <sup>[41]</sup> | 5.79              | 147.1 | 5.91              | 150.1 | 7.13              | 181.1 | 5.79              | 147.1 |

[41] Minimum distance for coil removal.



## Catalog Numbering

## Class 8536

## Type S C G 3 V02

## Form S

## General Classification

|      |                                                      |
|------|------------------------------------------------------|
| 8502 | Contactors                                           |
| 8536 | Starter                                              |
| 8538 | Combination Starter with Disconnect Switch           |
| 8539 | Combination Starter with Circuit Breaker             |
| 8702 | Reversing Contactor                                  |
| 8736 | Reversing Starter                                    |
| 8738 | Reversing Combination Starter with Disconnect Switch |
| 8739 | Reversing Combination Starter with Circuit Breaker   |
| 8810 | Two Speed Starter ▲                                  |
| 8903 | Type S Lighting Contactors ▲                         |
| 8940 | Pumping Plant Panel ▲                                |
| 8941 | Duplex Controller ▲                                  |

▲Consult the Table of Contents for page numbers.

## Design

Type S NEMA Contactors and Starters

| NEMA Size |         | Rating (8903 only) |       |
|-----------|---------|--------------------|-------|
| A         | Size 00 |                    |       |
| B         | Size 0  | M                  | 30 A  |
| C         | Size 1  | P                  | 60 A  |
| D         | Size 2  | Q                  | 100 A |
| E         | Size 3  | V                  | 200 A |
| F         | Size 4  | X                  | 300 A |
| G         | Size 5  | Y                  | 400 A |
| H         | Size 6  | Z                  | 600 A |
| J         | Size 7  | J                  | 800 A |

## Enclosure

|   |                                              |
|---|----------------------------------------------|
| A | NEMA 12 Industrial Use                       |
| F | NEMA 1 Flush Mounting General Purpose        |
| G | NEMA 1 General Purpose Surface Mounting      |
| H | NEMA 3R Rainproof                            |
| O | Open Style Device (no enclosure)             |
| R | NEMA 7 & 9 Hazardous Environments, Spin Top™ |
| T | NEMA 7 & 9 Hazardous Environments, Bolted    |
| W | NEMA 4 Watertight, 4X Corrosion Resistant    |

## Numerals

Used to designate specific physical arrangements, such as the number of poles, fuse clip size, etc.; but the numbering varies with the Class of the equipment. Consult the Digest listings for the specific device numbers.

## Voltage Code

AC operated devices without control transformer

| Code | Voltage/Frequency |
|------|-------------------|
| V01  | 24/60             |
| V02  | 120/60 or 110/50  |
| V06  | 480/60 or 440/50  |
| V07  | 600/60 or 550/50  |
| V08  | 208/60            |

V81: 480 V Primary, 120 V Secondary for units using a fused transformer control circuit (Form F4T)

This is only a partial listing. Consult the Digest page for each product for more options.

## Common Forms (factory modifications)

|      |                                                               |
|------|---------------------------------------------------------------|
| A    | Start-Stop pushbuttons in the enclosure cover                 |
| C    | Hand-Off-Auto selector switch in the enclosure cover          |
| E    | Bimetallic overload relays                                    |
| F4T  | Fused transformer control circuit (primary fuses only)        |
| FF4T | Fused transformer control circuit (primary & secondary fuses) |
| H    | Solid-state overload relay (SSOLR)                            |
| P1   | Red ON pilot light in the enclosure cover                     |
| P2   | Green OFF pilot light in the enclosure cover                  |
| S    | Separate control circuit                                      |
| X01  | One normally closed auxiliary contact N.C.                    |
| X10  | One normally open auxiliary contact N.O.                      |

Consult "Factory Modifications (Forms)" for additional Form designations. When more than one Form is applied to a single device, arrange the Forms in alphanumeric order.

Table 16.81: How to Order

| To Order Specify:                                                                                                                           | Catalog Number |       |              |           |
|---------------------------------------------------------------------------------------------------------------------------------------------|----------------|-------|--------------|-----------|
|                                                                                                                                             | Class          | Type  | Voltage Code | Form(s)   |
| <ul style="list-style-type: none"> <li>Class Number</li> <li>Type Number</li> <li>Voltage Code</li> <li>Form(s): see page 16-117</li> </ul> | 8539           | SCG44 | V06          | AH30P1X11 |

**Description:** NEMA Size 1 (10 hp) electronic motor circuit protector (MCP) combo starter in a NEMA 1 enclosure with a 480 V coil, start/stop push button (A), trip-class selectable SSOLR (H30), red pilot light (P1), and 1 N.O. and 1 N.C. auxiliary contact (X11).

**IMPORTANT:** This information is intended for general interpretation of the catalog numbers. Do not use it to create catalog numbers for this product line.

For more ordering information, refer to the Product Selector at [www.schneider-electric.com/us/](http://www.schneider-electric.com/us/).

**NOTE:** The terms *Class*, *Type*, and *Form* do not appear in the catalog number.

Devices are wired from the factory according to customer preference as follows:

- Common control
- Separate control (Form S)
- Control power transformer (CPT)

**NOTE:** TeSys T devices are unwired.



Type SCO2  
Size 1, 3-Pole Contactor

## General Information

Class 8502 Type S magnetic contactors are used to switch heating loads, capacitors, transformers, and electric motors where overload protection is provided separately. Class 8502 contactors are available in NEMA Sizes 00–7. Type S contactors are designed for operation up to 600 Vac, 50–60 Hz.

**NOTE:** In Table 16.82, replace ●●● with the voltage code shown in Table 16.83.

**Table 16.82: 3-Pole Polyphase—600 Vac Maximum—50–60 Hz**

| NEMA Size | Continuous Current Ratings | Motor Voltage            | Max. Hp                  | Open Type | NEMA 1 General Purpose Enclosure | NEMA 4 & 4X Watertight, Dusttight Brushed Stainless Steel Enclosure (Size 0-5) [1] |
|-----------|----------------------------|--------------------------|--------------------------|-----------|----------------------------------|------------------------------------------------------------------------------------|
|           |                            |                          |                          | Type      | Type                             | Type                                                                               |
| 00        | 9                          | 200<br>230<br>460<br>575 | 1.5<br>1.5<br>2<br>2     | SAO12●●●  | SAG12●●●                         | Use Size 0                                                                         |
| 0         | 18                         | 200<br>230<br>460<br>575 | 3<br>3<br>5<br>5         | SBO2●●●   | SBG2●●●                          | SBW12●●●                                                                           |
| 1         | 27                         | 200<br>230<br>460<br>575 | 7.5<br>7.5<br>10<br>10   | SCO2●●●   | SCG2●●●                          | SCW12●●●                                                                           |
| 2         | 45                         | 200<br>230<br>460<br>575 | 10<br>15<br>25<br>25     | SDO2●●●   | SDG2●●●                          | SDW12●●●                                                                           |
| 3         | 90                         | 200<br>230<br>460<br>575 | 25<br>30<br>50<br>50     | SEO2●●●   | SEG2●●●                          | SEW12●●●                                                                           |
| 4         | 135                        | 200<br>230<br>460<br>575 | 40<br>50<br>100<br>100   | SFO2●●●   | SFG2●●●                          | SFW12●●●                                                                           |
| 5         | 270                        | 200<br>230<br>460<br>575 | 75<br>100<br>200<br>200  | SGO2●●●   | SGG2●●●                          | SGW12●●●                                                                           |
| 6         | 540                        | 200<br>230<br>460<br>575 | 150<br>200<br>400<br>400 | SHO2●●●   | SHG2●●●                          | SHW2●●●                                                                            |
| 7         | 810                        | 200<br>230<br>460<br>575 | —<br>300<br>600<br>600   | SJO2●●●   | SJG2●●●                          | SJW2●●●                                                                            |

**Table 16.83: Coil Voltage Codes**

| Voltage |         | Code |
|---------|---------|------|
| 60 Hz   | 50 Hz   |      |
| 24 [2]  | —       | V01  |
| 120 [3] | 110     | V02  |
| 208     | —       | V08  |
| 240     | 220     | V03  |
| 277     | —       | V04  |
| 480     | 440     | V06  |
| 600     | 550     | V07  |
| Specify | Specify | V99  |

**NOTE:** For voltage codes used with control transformers, see .  
Form S (separate control) is used when a separate source of power is available for the control (coil) voltage. Available at no charge.

Dimensions: [page 16-39](#)

Factory Modifications (Forms) [page 16-117](#)

Separate Enclosures (Class 9991): [page 16-110](#)

Replacement Parts (Class 9998): [page 16-122](#)

Type S Accessories (Class 9999): [page 16-125](#)

For How to Order Information, see [page 16-28](#).

[1] Size 6 and 7 are NEMA 4 only, painted sheet steel enclosures.

[2] 24 V coils are not available on Sizes 4–7. On Sizes 00–3, where 24 V coils are available, **Form S** (separate control) must be specified (for example, order as 8502SBO2V01S).

[3] 120 V polyphase contactors are wired for separate control. **Form S** must be specified (i.e., order as 8502SCO2V02S).

## 3-Pole Polyphase—NEMA 4X, 7 &amp; 9, and 12/3R

NOTE: In Table 16.84, replace ●●● with the voltage code shown in Table 16.83.

For information on field modification of NEMA 12 enclosures, see page 16-112.

Table 16.84: 3-Pole Polyphase—600 Vac Maximum—50–60 Hz

| NEMA Size | Continuous Current Ratings | Motor Voltage            | Max. Hp                    | NEMA 4X Watertight, Dusttight, Corrosion-Resistant Glass-Polyester Enclosure | NEMA 7 & 9 Hazardous Locations Div. 1 & 2 Class I, Groups C & D Class II, Groups E, F, & G |               |                  | NEMA 12/3R [4] Dusttight & Driptight Industrial Use Enclosure |                |
|-----------|----------------------------|--------------------------|----------------------------|------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|---------------|------------------|---------------------------------------------------------------|----------------|
|           |                            |                          |                            |                                                                              | Type                                                                                       | Bolted Type   |                  |                                                               | Spin Top™ Type |
|           |                            |                          |                            |                                                                              |                                                                                            | Cast Iron [5] | Cast Aluminum[6] |                                                               |                |
| 00        | 9                          | 200<br>230<br>460<br>575 | 1-1/2<br>1-1/2<br>2<br>2   | Use Size 0                                                                   | Use Size 0                                                                                 | Use Size 0    | Use Size 0       | Use Size 0                                                    |                |
| 0         | 18                         | 200<br>230<br>460<br>575 | 3<br>3<br>5<br>5           | SBW22●●●                                                                     | SBT2●●●                                                                                    | SBT42●●●      | SBR2●●●          | SBA2●●●                                                       |                |
| 1         | 27                         | 200<br>230<br>460<br>575 | 7-1/2<br>7-1/2<br>10<br>10 | SCW22●●●                                                                     | SCT2●●●                                                                                    | SCT42●●●      | SCR2●●●          | SCA2●●●                                                       |                |
| 2         | 45                         | 200<br>230<br>460<br>575 | 10<br>15<br>25<br>25       | SDW22●●●                                                                     | SDT2●●●                                                                                    | SDT42●●●      | SDR2●●●          | SDA2●●●                                                       |                |
| 3         | 90                         | 200<br>230<br>460<br>575 | 25<br>30<br>50<br>50       | SEW22●●●                                                                     | —                                                                                          | SET42●●●      | SER2●●●          | SEA2●●●                                                       |                |
| 4         | 135                        | 200<br>230<br>460<br>575 | 40<br>50<br>100<br>100     | SFW22●●●                                                                     | —                                                                                          | SFT42●●●      | SFR2●●●          | SFA2●●●                                                       |                |
| 5         | 270                        | 200<br>230<br>460<br>575 | 75<br>100<br>200<br>200    | —                                                                            | —                                                                                          | —             | —                | SGA2●●●                                                       |                |
| 6         | 540                        | 200<br>230<br>460<br>575 | 150<br>200<br>400<br>400   | —                                                                            | —                                                                                          | —             | —                | SHA2●●●                                                       |                |
| 7         | 810                        | 200<br>230<br>460<br>575 | —<br>300<br>600<br>600     | —                                                                            | —                                                                                          | —             | —                | SJA2●●●                                                       |                |

## Auxiliary Units

Auxiliary contacts and power poles can be added in the factory or the field on all Type S starters and contactors. Table 16.85 shows the maximum number of auxiliary units, in addition to the holding circuit contact, that can be added to a given size starter or contactor. In addition, it is possible to add a second internal contact on NEMA Size 0, 1, and 2 contactors and starters.

Table 16.85: Auxiliary Units—Class 8502 and 8536

| NEMA Size | Type  | No. of Poles—Basic Contactor | Maximum Number of External Auxiliary Units (in addition to holding circuit contact)                                             |
|-----------|-------|------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| 00        | SA    | 2–3                          | 4 single-circuit auxiliary contacts (N.O. or N.C.) if second internal auxiliary contact is not used.                            |
| 0–2       | SB–SD | 1–3                          | 4 single-circuit auxiliary contacts (N.O. or N.C.) [7]                                                                          |
|           |       | 4–5                          | 2 single-circuit auxiliary contacts (N.O. or N.C.) plus 1 power pole adder (1 or 2 poles, N.O. or N.C.)                         |
| 3–4       | SE–SF | 2–5                          | 3 single-circuit auxiliary contacts (N.O. or N.C.)                                                                              |
| 5         | SG    | 2–3                          | 2 single-circuit auxiliary contacts (N.O. or N.C.) plus 1 NEMA Size 0–1 or Size 2 power pole adder (1 or 2 poles, N.O. or N.C.) |
| 6–7       | SH–SJ | 2–3                          | 3 single-circuit auxiliary contacts (N.O. or N.C.)                                                                              |
|           |       |                              | 2 single-circuit auxiliary contacts (N.O. or N.C.) plus 1 NEMA Size 0–1 or Size 2 power pole adder (1 or 2 poles, N.O. or N.C.) |

Dimensions page 16-39

Factory Modifications (Forms) page 16-117

Separate Enclosures (Class 9991) page 16-110

Replacement Parts (Class 9998) page 16-92

Type S Accessories (Class 9999) page 16-125

For How to Order Information, see page 16-28.

[4] NEMA 12 enclosures can be field modified for outdoor non-corrosive and non-service entrance rated applications.

[5] Limited to one pilot light, and a selector switch or Start-Stop push button.

[6] NEMA 7 and 9 bolted cast aluminum are not UL listed.

[7] When adding 4 external auxiliary contacts to one Size 0 or 1 contactor, remove one of the return springs.

**Single-Phase, 4- and 5-Pole Polyphase—  
Open Style or NEMA 1, 4 & 4X Enclosures**

NOTE: In Table 16.86, replace ●●● with the voltage code shown in Table 16.83.

**Table 16.86: 600 Vac Maximum—50–60 Hz**

| NEMA Size           | Continuous Current Ratings | Motor Voltage            | Max. Hp                    | Open Type | NEMA 1 General Purpose Enclosure | NEMA 4 & 4X –Watertight, Dusttight, Brushed Stainless Steel Enclosure (Size 0-5)[8] |
|---------------------|----------------------------|--------------------------|----------------------------|-----------|----------------------------------|-------------------------------------------------------------------------------------|
|                     |                            |                          |                            | Type      | Type                             | Type                                                                                |
| 1-Pole Single Phase |                            |                          |                            |           |                                  |                                                                                     |
| 0                   | 18                         | 115<br>230               | 1<br>2                     | SBO5●●●   | SBG5●●●                          | SBW15●●●                                                                            |
| 1                   | 27                         | 115<br>230               | 2<br>3                     | SCO5●●●   | SCG5●●●                          | SCW15●●●                                                                            |
| 2-Pole Single Phase |                            |                          |                            |           |                                  |                                                                                     |
| 00                  | 9                          | 115<br>230               | 1/3<br>1                   | SAO11●●●  | SAG11●●●                         | Use Size 0                                                                          |
| 0                   | 18                         | 115<br>230               | 1<br>2                     | SBO1●●●   | SBG1●●●                          | SBW11●●●                                                                            |
| 1                   | 27                         | 115<br>230               | 2<br>3                     | SCO1●●●   | SCG1●●●                          | SCW11●●●                                                                            |
| 2                   | 45                         | 115<br>230               | 3<br>7-1/2                 | SDO1●●●   | SDG1●●●                          | SDW11●●●                                                                            |
| 3                   | 90                         | —                        | —                          | SEO1●●●   | SEG1●●●                          | SEW11●●●                                                                            |
| 4                   | 135                        | —                        | —                          | SFO1●●●   | SFG1●●●                          | SFW11●●●                                                                            |
| 5                   | 270                        | —                        | —                          | SGO1●●●   | SGG1●●●                          | SGW11●●●                                                                            |
| 6                   | 540                        | —                        | —                          | SHO1●●●   | SHG1●●●                          | SHW11●●●                                                                            |
| 7                   | 810                        | —                        | —                          | SJO1●●●   | SJG1●●●                          | SJW11●●●                                                                            |
| 4-Pole Polyphase    |                            |                          |                            |           |                                  |                                                                                     |
| 0                   | 18                         | 200<br>230<br>460<br>575 | 3<br>3<br>5<br>5           | SBO3●●●   | SBG3●●●                          | SBW13●●●                                                                            |
| 1                   | 27                         | 200<br>230<br>460<br>575 | 7-1/2<br>7-1/2<br>10<br>10 | SCO3●●●   | SCG3●●●                          | SCW13●●●                                                                            |
| 2                   | 45                         | 200<br>230<br>460<br>575 | 10<br>15<br>25<br>25       | SDO3●●●   | SDG3●●●                          | SDW13●●●                                                                            |
| 3                   | 90                         | 200<br>230<br>460<br>575 | 25<br>30<br>50<br>50       | SEO3●●●   | SEG3●●●                          | SEW13●●●                                                                            |
| 4                   | 135                        | 200<br>230<br>460<br>575 | 40<br>50<br>100<br>100     | SFO3●●●   | SFG3●●●                          | SFW13●●●                                                                            |
| 5-Pole Polyphase    |                            |                          |                            |           |                                  |                                                                                     |
| 0                   | 18                         | 200<br>230<br>460<br>575 | 3<br>3<br>5<br>5           | SBO4●●●   | SBG4●●●                          | SBW14●●●                                                                            |
| 1                   | 27                         | 200<br>230<br>460<br>575 | 7-1/2<br>7-1/2<br>10<br>10 | SCO4●●●   | SCG4●●●                          | SCW14●●●                                                                            |
| 2                   | 45                         | 200<br>230<br>460<br>575 | 10<br>15<br>25<br>25       | SDO4●●●   | SDG4●●●                          | SDW14●●●                                                                            |
| 3                   | 90                         | 200<br>230<br>460<br>575 | 25<br>30<br>50<br>50       | SEO4●●●   | SEG4●●●                          | SEW14●●●                                                                            |
| 4                   | 135                        | 200<br>230<br>460<br>575 | 40<br>50<br>100<br>100     | SFO4●●●   | SFG4●●●                          | SFW14●●●                                                                            |

Dimensions: [page 16-39](#)  
Factory Modifications (Forms): [page 16-117](#)  
Separate Enclosures (Class 9991): [page 16-110](#)  
Replacement Parts (Class 9998): [page 16-92](#)  
Type S Accessories (Class 9999): [page 16-125](#)  
For How to Order Information, see [page 16-28](#).

[8] Size 6 and 7 are NEMA 4 only, painted sheet steel enclosures.

## Single-Phase and 4- and 5-Pole Polyphase— NEMA 4X, 7 & 9, and 12/3R Enclosures

NOTE: In Table 16.87, replace ●●● with the voltage code shown in Table 16.83.

For information on field modification of NEMA 12 enclosures, see page 16-112.

Table 16.87: 600 Vac Maximum—50–60 Hz

| NEMA<br>Size        | Continuous<br>Current<br>Ratings | Motor<br>Voltage         | Max.<br>Hp                 | NEMA 4X<br>Watertight, Dusttight<br>Corrosion-Resistant<br>Glass-Polyester Enclosure | NEMA 7 & 9, Div. 1 & 2<br>Hazardous Locations<br>Class I, Groups C & D<br>Class II, Groups E, F & G |                                                               | NEMA 12/3R [9]<br>Dusttight & Driptight<br>Industrial Use Enclosure |            |
|---------------------|----------------------------------|--------------------------|----------------------------|--------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|---------------------------------------------------------------|---------------------------------------------------------------------|------------|
|                     |                                  |                          |                            |                                                                                      | Bolted Type                                                                                         |                                                               | Spin Top™<br>Type                                                   | Type       |
|                     |                                  |                          |                            |                                                                                      | Cast Iron [10]                                                                                      | Cast Aluminum[11]                                             |                                                                     |            |
| 1-Pole Single Phase |                                  |                          |                            |                                                                                      |                                                                                                     |                                                               |                                                                     |            |
| 0                   | 18                               | 115<br>230               | 1<br>2                     | —<br>—                                                                               | SBT5●●●                                                                                             | SBT45●●●                                                      | SBR5●●●                                                             | SBA5●●●    |
| 1                   | 27                               | 115<br>230               | 2<br>3                     | —<br>—                                                                               | SCT5●●●                                                                                             | SCT45●●●                                                      | SCR5●●●                                                             | SCA5●●●    |
| 2-Pole Single Phase |                                  |                          |                            |                                                                                      |                                                                                                     |                                                               |                                                                     |            |
| 00                  | 9                                | 115<br>230               | 1/3<br>1                   | Use Size 0                                                                           | Use Size 0                                                                                          |                                                               | Use Size 0                                                          | Use Size 0 |
| 0                   | 18                               | 115<br>230               | 1<br>2                     | SBW21●●●                                                                             | SBT1●●●                                                                                             | SBT41●●●                                                      | SBR1●●●                                                             | SBA1●●●    |
| 1                   | 27                               | 115<br>230               | 2<br>3                     | SCW21●●●                                                                             | SCT1●●●                                                                                             | SCT41●●●                                                      | SCR1●●●                                                             | SCA1●●●    |
| 2                   | 45                               | 115<br>230               | 3<br>7-1/2                 | SDW21●●●                                                                             | SDT1●●●                                                                                             | SDT41●●●                                                      | SDR1●●●                                                             | SDA1●●●    |
| 3                   | 90                               | —                        | —                          | Consult the Customer Care<br>Center at 1-888-778-2733.                               | —                                                                                                   | SET41●●●                                                      | SER1●●●                                                             | SEA1●●●    |
| 4                   | 135                              | —                        | —                          |                                                                                      | —                                                                                                   | SFT41●●●                                                      | SFR1●●●                                                             | SFA1●●●    |
| 5                   | 270                              | —                        | —                          |                                                                                      | —                                                                                                   | —                                                             | —                                                                   | SGA1●●●    |
| 6                   | 540                              | —                        | —                          |                                                                                      | —                                                                                                   | —                                                             | —                                                                   | SHA1●●●    |
| 7                   | 810                              | —                        | —                          | —                                                                                    | —                                                                                                   | —                                                             | —                                                                   | SJA1●●●    |
| 4-Pole Polyphase    |                                  |                          |                            |                                                                                      |                                                                                                     |                                                               |                                                                     |            |
| 0                   | 18                               | 200<br>230<br>460<br>575 | 3<br>3<br>5<br>5           | SBW23●●●                                                                             | SBT3●●●                                                                                             | Consult the<br>Customer Care<br>Center at 1-888-<br>778-2733. | SBR3●●●                                                             | SBA3●●●    |
| 1                   | 27                               | 200<br>230<br>460<br>575 | 7-1/2<br>7-1/2<br>10<br>19 | SCW23●●●                                                                             | SCT3●●●                                                                                             |                                                               | SCR3●●●                                                             | SCA3●●●    |
| 2                   | 45                               | 200<br>230<br>460<br>575 | 10<br>15<br>25<br>25       | SDW23●●●                                                                             | SDT3●●●                                                                                             |                                                               | SDR3●●●                                                             | SDA3●●●    |
| 3                   | 90                               | 200<br>230<br>460<br>575 | 25<br>30<br>50<br>50       | Consult the Customer Care Center at 1-888-<br>778-2733.                              |                                                                                                     |                                                               | SER3●●●                                                             | SEA3●●●    |
| 4                   | 135                              | 200<br>230<br>460<br>575 | 40<br>50<br>100<br>100     |                                                                                      |                                                                                                     |                                                               | SFR3●●●                                                             | SFA3●●●    |
| 5-Pole Polyphase    |                                  |                          |                            |                                                                                      |                                                                                                     |                                                               |                                                                     |            |
| 0                   | 18                               | 200<br>230<br>460<br>575 | 3<br>3<br>5<br>5           | Consult the Customer Care<br>Center at 1-888-778-2733.                               | —                                                                                                   | —                                                             | —                                                                   | SBA4●●●    |
| 1                   | 27                               | 200<br>230<br>460<br>575 | 7-1/2<br>7-1/2<br>10<br>10 |                                                                                      | —                                                                                                   | —                                                             | —                                                                   | SCA4●●●    |
| 2                   | 45                               | 200<br>230<br>460<br>575 | 10<br>15<br>25<br>25       |                                                                                      | —                                                                                                   | —                                                             | —                                                                   | SDA4●●●    |
| 3                   | 90                               | 200<br>230<br>460<br>575 | 25<br>30<br>50<br>50       |                                                                                      | —                                                                                                   | —                                                             | —                                                                   | SEA4●●●    |
| 4                   | 135                              | 200<br>230<br>460<br>575 | 40<br>50<br>100<br>100     |                                                                                      | —                                                                                                   | —                                                             | —                                                                   | SFA4●●●    |

Coil voltage codes and page number reference for additional information are shown on page 16-29.

For How to Order Information, see page 16-28.

[9] NEMA 12 enclosures can be field modified for outdoor non-corrosive and non-service entrance rated applications.

[10] Limited to one pilot light, and a selector switch or Start-Stop push button.

[11] NEMA 7 and 9 bolted cast aluminum are not UL listed.



Type SCO3...H30  
Size 1, Three-Pole Starter with Motor Logic™ SSOLR



Schneider Electric offers express shipping for factory modified NEMA Type 1 and Type 12/3R Enclosed Starters. When you need them fast, our Laser™ Delivery program is the answer to getting your product when you need it most. Ask for Laser™ Delivery, then select the product and the modifications you need when you place your order. It's as easy as that!

## General Information

Type S magnetic starters are used for full-voltage starting and stopping of AC squirrel cage motors. Motor overload protection for three-phase starter applications can be provided through one of four options, as follows:

- **Solid-State Overload Relay Protection (Motor Logic™ SSOLR)**  
These ambient insensitive overload relays are available on Sizes 00 through 6 and standard on size 7. They provide phase loss and phase unbalance protection. To order, add Form **H30** (for selectable trip class 10 or 20 protection). For more information about Motor Logic SSOLRs, see [page 16-101](#) and [page 16-119](#). (Catalog no. example: 8536SCO3V06H30)
- **Adapted Bimetallic or Solid-State Overload Relay (NEMA Sizes 00–1)**  
The Adapted Bimetallic or Solid-State relay option includes a specially designed adapter that attaches with bus bars to the Type S NEMA contactor. This adapter allows direct mounting of the IEC Style bimetallic (LRD or LR3D) or solid-state (LR9D) overload relay. To order this starter configuration, add **Form E** (adapter only) to the standard catalog number. The LRD, LR3D, or LR9D overload relay must be purchased separately, based on the FLA of the motor, and installed in the field to properly operate the starter. For the Adapted Bimetallic device only, if the FLA is known at the time of purchase, you can order the starter with the overload relay installed. For more information and a list of options, see [Adapted Bimetallic Overload Relay Forms, page 16-119](#). (Catalog no. example: 8536SCO3V06E—without overload relay).
- **TeSys T Motor Management System (NEMA Sizes 1–6)**  
TeSys T is a flexible system that integrates seamlessly into your automation system through five major communication protocols. TeSys T can predict what will happen in the process, as it accurately monitors current, voltage, and power over a wide range. For additional information about TeSys T Motor Management System, see [page 16-103](#) and [page 16-120](#). NOTE: The full catalog number contains a four-character Form number (for example, 8536SCO3V06H616).
- **Melting Alloy Type Thermal Overload Relays (NEMA Sizes 00–6)**  
Melting alloy type thermal overload relays utilize the use of replaceable thermal units. These thermal units must be ordered separately and installed to operate the starter. Thermal unit selection begins on [page 16-132](#). The catalog number includes no Form number (for example, 8536SCO3V06).

## 3-Pole Polyphase—NEMA 1, 4 & 4X

NOTE: In [Table 16.88](#), replace ●●● with the voltage code shown in .

**Table 16.88: 3-Pole Polyphase—600 Vac Maximum—50–60 Hz, with Motor Logic SSOLR<sup>[12]</sup>**

| NEMA Size | Continuous Current Ratings | Motor Voltage            | Max. Hp                  | Open Type                   | NEMA 1 General Purpose Enclosure | NEMA 4 & 4X Watertight, Dusttight Brushed Stainless Steel Enclosure (Size 0-5) <sup>[13]</sup> | NEMA 4X Watertight, Dusttight, Corrosion-Resistant Glass-Polyester Enclosure |
|-----------|----------------------------|--------------------------|--------------------------|-----------------------------|----------------------------------|------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------|
|           |                            |                          |                          | Type                        | Type                             | Type                                                                                           | Type                                                                         |
| 00        | 9                          | 200<br>230<br>460<br>575 | 1.5<br>1.5<br>2<br>2     | SAO12●●●H30 <sup>[14]</sup> | SAG12●●●H30 <sup>[14]</sup>      | Use Size 0                                                                                     | Use Size 0                                                                   |
| 0         | 18                         | 200<br>230<br>460<br>575 | 3<br>3<br>5<br>5         | SBO2●●●H30 <sup>[14]</sup>  | SBG2●●●H30 <sup>[14]</sup>       | SBW12●●●H30 <sup>[14]</sup>                                                                    | SBW22●●●H30 <sup>[14]</sup>                                                  |
| 1         | 27                         | 200<br>230<br>460<br>575 | 7.5<br>7.5<br>10<br>10   | SCO3●●●H30 <sup>[14]</sup>  | SCG3●●●H30 <sup>[14]</sup>       | SCW13●●●H30 <sup>[14]</sup>                                                                    | SCW23●●●H30 <sup>[14]</sup>                                                  |
| 2         | 45                         | 200<br>230<br>460<br>575 | 10<br>15<br>25<br>25     | SDO1●●●H30 <sup>[14]</sup>  | SDG1●●●H30 <sup>[14]</sup>       | SDW11●●●H30 <sup>[14]</sup>                                                                    | SDW21●●●H30 <sup>[14]</sup>                                                  |
| 3         | 90                         | 200<br>230<br>460<br>575 | 25<br>30<br>50<br>50     | SEO1●●●H30                  | SEG1●●●H30                       | SEW11●●●H30                                                                                    | SEW21●●●H30                                                                  |
| 4         | 135                        | 200<br>230<br>460<br>575 | 40<br>50<br>100<br>100   | SFO1●●●H30                  | SFG1●●●H30                       | SFW11●●●H30                                                                                    | SFW21●●●H30                                                                  |
| 5         | 270                        | 200<br>230<br>460<br>575 | 75<br>100<br>200<br>200  | SGO1●●●H30                  | SGG1●●●H30                       | SGW11●●●H30                                                                                    | —                                                                            |
| 6         | 540                        | 200<br>230<br>460<br>575 | 150<br>200<br>400<br>400 | SHO2●●●H30                  | SHG2●●●H30                       | SHW2●●●H30                                                                                     | —                                                                            |
| 7         | 810                        | 200<br>230<br>460<br>575 | 300<br>600<br>600<br>600 | SJO2●●●H30                  | SJG2●●●H30                       | SJW2●●●H30                                                                                     | —                                                                            |

<sup>[12]</sup> To order melting alloy overload relay, remove form "H30" from part number.

<sup>[13]</sup> Size 6 and 7 are NEMA 4 only, painted sheet steel enclosures.

<sup>[14]</sup> **Form H30**, with the possibility of a fourth character to select a lower FLA range (for example, **H308**). See "Solid-State Overload Relay Forms" on [page 16-119](#)

## 3-Pole Polyphase—NEMA 7 &amp; 9 and 12/3R

**NOTE:** In Table 16.89, replace ●●● with the voltage code shown in .

For information on field modification of NEMA 12 enclosures, see page 16-112.

For Form H30• (special lower-FLA factory-assembled starter combinations with Motor Logic SSOLR protection), see Solid-State Overload Relay Forms, page 16-119.

Table 16.89: 3-Pole Polyphase—600 Vac Maximum—50–60 Hz<sup>[15]</sup>

| NEMA Size | Continuous Current Ratings | Motor Voltage            | Max. Hp                  | NEMA 7 & 9<br>For Hazardous Locations Div. 1 & 2<br>Class I—Groups C, D<br>Class II—Groups E, F, & G |                    |                 | NEMA 12/3R [16]<br>Dusttight & Driptight<br>Industrial Use Enclosure |
|-----------|----------------------------|--------------------------|--------------------------|------------------------------------------------------------------------------------------------------|--------------------|-----------------|----------------------------------------------------------------------|
|           |                            |                          |                          | Bolted Type                                                                                          |                    | Spin Top™ Type  | Type                                                                 |
|           |                            |                          |                          | Cast Iron [17]                                                                                       | Cast Aluminum [18] |                 |                                                                      |
| 00        | 9                          | 200<br>230<br>460<br>575 | 1.5<br>1.5<br>2<br>2     | Use Size 0                                                                                           |                    | Use Size 0      | Use Size 0                                                           |
| 0         | 18                         | 200<br>230<br>460<br>575 | 3<br>3<br>5<br>5         | SBT2●●●H30 [19]                                                                                      | SBT42●●●H30 [19]   | SBR2●●●H30 [19] | SBA2●●●H30 [19]                                                      |
| 1         | 27                         | 200<br>230<br>460<br>575 | 7.5<br>7.5<br>10<br>10   | SCT3●●●H30 [19]                                                                                      | SCT43●●●H30 [19]   | SCR3●●●H30 [19] | SCA3●●●H30 [19]                                                      |
| 2         | 45                         | 200<br>230<br>460<br>575 | 10<br>15<br>25<br>25     | SDT1●●●H30 [19]                                                                                      | SDT41●●●H30 [19]   | SDR1●●●H30 [19] | SDA1●●●H30 [19]                                                      |
| 3         | 90                         | 200<br>230<br>460<br>575 | 25<br>30<br>50<br>50     | —                                                                                                    | SET43●●●H30        | SER3●●●H30      | SEA1●●●H30                                                           |
| 4         | 135                        | 200<br>230<br>460<br>575 | 40<br>50<br>100<br>100   | —                                                                                                    | SFT41●●●H30        | SFR1●●●H30      | SFA1●●●H30                                                           |
| 5         | 270                        | 200<br>230<br>460<br>575 | 75<br>100<br>200<br>200  | —                                                                                                    | —                  | —               | SGA1●●●H30                                                           |
| 6         | 540                        | 200<br>230<br>460<br>575 | 150<br>200<br>400<br>400 | —                                                                                                    | —                  | —               | SHA2●●●H30                                                           |
| 7         | 810                        | 200<br>230<br>460<br>575 | —<br>300<br>600<br>600   | —                                                                                                    | —                  | —               | SJA2●●●H30                                                           |



Schneider Electric offers express shipping for factory modified NEMA Type 1 and Type 12/3R Enclosed Starters. When you need them fast, our Laser™ Delivery program is the answer to getting your product when you need it most. Ask for Laser™ Delivery, then select the product and the modifications you need when you place your order. It's as easy as that!

Table 16.90: Coil Voltage Codes

| Voltage             |         | Code |
|---------------------|---------|------|
| 60 Hz               | 50 Hz   |      |
| 24 <sup>[20]</sup>  | —       | V01  |
| 120 <sup>[21]</sup> | 110     | V02  |
| 208                 | —       | V08  |
| 240                 | 220     | V03  |
| 277                 | —       | V04  |
| 480                 | 440     | V06  |
| 600                 | 550     | V07  |
| Specify             | Specify | V99  |

**NOTE:** For voltage codes used with control transformers, see page 16-118.

Form S (separate control) is used when a separate source of power is available for the control (coil) voltage.

Dimensions: page 16-39

Factory Modifications (Forms): page 16-117

Separate Enclosures (Class 9991): page 16-110

Replacement Parts (Class 9998): page 16-122

Type S Accessories (Class 9999): page 16-125

For How to Order Information, see page 16-28.

<sup>[15]</sup> To order melting alloy overload relay, remove form "H30" from part number.

<sup>[16]</sup> NEMA 12 enclosures can be field modified for outdoor non-corrosive and non-service entrance rated applications.

<sup>[17]</sup> Limited to one pilot light, and a selector switch or Start-Stop push button.

<sup>[18]</sup> NEMA 7 and 9 bolted cast aluminum are not UL listed.

<sup>[19]</sup> Form H30, with the possibility of a fourth character to select a lower FLA range (for example, H308). See "Solid-State Overload Relay Forms" on page 16-119.

<sup>[20]</sup> 24 V coils are not available on Sizes 4–7. On Sizes 00–3, where 24 V coils are available, Form S (separate control) must be specified (i.e., order as 8536SB02V01S).

<sup>[21]</sup> 120 V Polyphase contactors are wired for separate control. Form S (separate control) must be specified (i.e., order as 8536SCO2V02S).



## 2-Pole Single Phase—Open or NEMA 1, 4, and 4X

**NOTE:** In Table 16.91, replace ●●● with the voltage code shown in .

For melting alloy thermal units, see page 16-132.

**Table 16.91: 2-Pole Single Phase—600 Vac Maximum—50–60 Hz (require 1 melting alloy thermal unit)**

| NEMA Size | Continuous Current Ratings | Motor Voltage | Max. Hp    | Open Type | NEMA 1 General Purpose Enclosure | NEMA 4 & 4X Watertight, Dusttight Brushed Stainless Steel Enclosure | NEMA 4X Watertight, Dusttight, Corrosion-Resistant Glass-Polyester Enclosure |
|-----------|----------------------------|---------------|------------|-----------|----------------------------------|---------------------------------------------------------------------|------------------------------------------------------------------------------|
|           |                            |               |            | Type      | Type                             | Type                                                                | Type                                                                         |
| 00        | 9                          | 115<br>230    | 1/3<br>1   | SAO11●●●  | SAG11●●●                         | Use Size 0                                                          | Use Size 0                                                                   |
| 0         | 18                         | 115<br>230    | 1<br>2     | SBO1●●●   | SBG1●●●                          | SBW11●●●                                                            | SBW21●●●                                                                     |
| 1         | 27                         | 115<br>230    | 2<br>3     | SCO1●●●   | SCG1●●●                          | SCW11●●●                                                            | SCW21●●●                                                                     |
| 1P        | 36                         | 115<br>230    | 3<br>5     | SCO2●●●   | SCG2●●●                          | SCW12●●●                                                            | SCW22●●●                                                                     |
| 2         | 45                         | 115<br>230    | 3<br>7-1/2 | SDO6●●●   | SDG6●●●                          | SDW16●●●                                                            | SDW26●●●                                                                     |

## 4-Pole, 2-Phase—Open and NEMA 1, 4, and 4X

**NOTE:** In Table 16.92, replace ●●● with the voltage code shown in .

For melting alloy thermal units, see page 16-132.

**Table 16.92: 4-Pole, 2-Phase—600 Vac Maximum—50–60 Hz (require 2 melting alloy thermal units)**

| NEMA Size | Continuous Current Ratings | Motor Voltage            | Max. Hp                    | Open Type | NEMA 1 General Purpose Enclosure | NEMA 4 & 4X Watertight, Dusttight Brushed Stainless Steel Enclosure | NEMA 4X Watertight, Dusttight, Corrosion-Resistant Glass-Polyester Enclosure |
|-----------|----------------------------|--------------------------|----------------------------|-----------|----------------------------------|---------------------------------------------------------------------|------------------------------------------------------------------------------|
|           |                            |                          |                            | Type      | Type                             | Type                                                                | Type                                                                         |
| 0         | 18                         | 200<br>230<br>460<br>575 | 3<br>3<br>5<br>5           | SBO3●●●   | SBG3●●●                          | SBW13●●●                                                            | SBW23●●●                                                                     |
| 1         | 27                         | 200<br>230<br>460<br>575 | 7-1/2<br>7-1/2<br>10<br>10 | SCO4●●●   | SCG4●●●                          | SCW14●●●                                                            | SCW24●●●                                                                     |
| 2         | 45                         | 200<br>230<br>460<br>575 | 10<br>15<br>25<br>25       | SDO2●●●   | SDG2●●●                          | SDW12●●●                                                            | SDW22●●●                                                                     |
| 3         | 90                         | 200<br>230<br>460<br>575 | 25<br>30<br>50<br>50       | SEO2●●●   | SEG2●●●                          | SEW12●●●                                                            | Consult the Customer Care Center at (1-888-778-2733)                         |
| 4         | 135                        | 200<br>230<br>460<br>575 | 40<br>50<br>100<br>100     | SFO2●●●   | SFG2●●●                          | SFW12●●●                                                            |                                                                              |

**Table 16.93: Coil Voltage Codes**

| Voltage  |         | Code |
|----------|---------|------|
| 60 Hz    | 50 Hz   |      |
| 24 [22]  | —       | V01  |
| 120 [23] | 110     | V02  |
| 208      | —       | V08  |
| 240      | 220     | V03  |
| 277      | —       | V04  |
| 480      | 440     | V06  |
| 600      | 550     | V07  |
| Specify  | Specify | V99  |

**NOTE:** For voltage codes used with control transformers, see page 16-118.

Form S (separate control) is used when a separate source of power is available for the control (coil) voltage. Form S is provided at no charge.

Dimensions: page 16-39

Factory Modifications (Forms): page 16-117

Separate Enclosures (Class 9991): page 16-110

Replacement Parts (Class 9998): page 16-122

Type S Accessories (Class 9999) page 16-125

For How to Order Information, see page 16-28.

[22] 24 V coils are not available on Sizes 4–7. On sizes 00–3, where 24 V coils are available, **Form S** (separate control) must be specified (i.e., order as 8536SBO2V01S).

[23] 120 V polyphase starters are wired for separate control. **Form S** (separate control) must be specified (for example, order as 8536SCO2V02S).

**2-Pole Single Phase—NEMA 7 & 9 and 12/3R**

NOTE: In Table 16.94, replace ●●● with the voltage code shown in .

For melting alloy thermal units, see page 16-132.

For information on field modification of NEMA 12 enclosures, see page 16-112.

**Table 16.94: 2-Pole Single Phase—600 Vac Maximum—50–60 Hz (require 1 melting alloy thermal unit)**

| NEMA Size | Continuous Current Ratings | Motor Voltage | Max. Hp    | NEMA 7 & 9<br>Hazardous Locations, Div. 1 & 2<br>Class I, Groups C & D<br>Class II, Groups E, F, & G |                    |                   | NEMA 12/3R [24]<br>Dusttight & Driptight<br>Industrial Use<br>Enclosure |
|-----------|----------------------------|---------------|------------|------------------------------------------------------------------------------------------------------|--------------------|-------------------|-------------------------------------------------------------------------|
|           |                            |               |            | Bolted Type                                                                                          |                    | Spin Top™<br>Type | Type                                                                    |
|           |                            |               |            | Cast Iron [25]                                                                                       | Cast Aluminum [26] |                   |                                                                         |
| 00        | 9                          | 115<br>230    | 1/3<br>1   | Use Size 0                                                                                           |                    | Use Size 0        | Use Size 0                                                              |
| 0         | 18                         | 115<br>230    | 1<br>2     | SBT1●●●                                                                                              | SBT41              | SBR1●●●           | SBA1●●●                                                                 |
| 1         | 27                         | 115<br>230    | 2<br>3     | SCT1●●●                                                                                              | SCT41              | SCR1●●●           | SCA1●●●                                                                 |
| 1P        | 36                         | 115<br>230    | 3<br>5     | SCT2●●●                                                                                              | SCT42              | SCR2●●●           | SCA2●●●                                                                 |
| 2         | 45                         | 115<br>230    | 3<br>7-1/2 | SDT6●●●                                                                                              | SDT46              | SDR6●●●           | SDA6●●●                                                                 |

**4-Pole, 2-Phase—NEMA 7 & 9 and 12/3R**

NOTE: In Table 16.95, replace ●●● with the voltage code shown in .

For melting alloy thermal units, see page 16-132.

For information on field modification of NEMA 12 enclosures, see page 16-112.

**Table 16.95: 4-Pole 2-Phase—600 Vac Maximum—50–60 Hz (require 2 melting alloy thermal units)**

| NEMA Size | Continuous Current Ratings | Motor Voltage            | Max. Hp                    | Coil Voltage             | NEMA 7 & 9<br>Hazardous Locations<br>Class I, Groups C & D<br>Class II, Groups E, F, & G |                                                          |                   | NEMA 12/3R [24]<br>Dusttight & Driptight<br>Industrial Use<br>Enclosure |
|-----------|----------------------------|--------------------------|----------------------------|--------------------------|------------------------------------------------------------------------------------------|----------------------------------------------------------|-------------------|-------------------------------------------------------------------------|
|           |                            |                          |                            |                          | Bolted Type                                                                              |                                                          | Spin Top™<br>Type | Type                                                                    |
|           |                            |                          |                            |                          | Cast Iron [25]                                                                           | Cast Aluminum                                            |                   |                                                                         |
| 0         | 18                         | 200<br>230<br>460<br>575 | 3<br>3<br>5<br>5           | 208<br>240<br>480<br>600 | SBT3●●●                                                                                  | Consult the Customer<br>Care Center at<br>1-888-778-2733 | SBR3●●●           | SBA3●●●                                                                 |
| 1         | 27                         | 200<br>230<br>460<br>575 | 7-1/2<br>7-1/2<br>10<br>10 | 208<br>240<br>480<br>600 | SCT4●●●                                                                                  |                                                          | SCR4●●●           | SCA4●●●                                                                 |
| 2         | 45                         | 200<br>230<br>460<br>575 | 10<br>15<br>25<br>25       | 208<br>240<br>480<br>600 | SDT2●●●                                                                                  |                                                          | SDR2●●●           | SDA2●●●                                                                 |
| 3         | 90                         | 200<br>230<br>460<br>575 | 25<br>30<br>50<br>50       | 208<br>240<br>480<br>600 | Consult the Customer<br>Care Center at<br>1-888-778-2733                                 |                                                          | SER2●●●           | SEA2●●●                                                                 |
| 4         | 135                        | 200<br>230<br>460<br>575 | 40<br>50<br>100<br>100     | 208<br>240<br>480<br>600 |                                                                                          |                                                          | —                 | SFA2●●●                                                                 |

Dimensions: page 16-39

Factory Modifications (Forms): page 16-117

Separate Enclosures (Class 9991): page 16-110

Replacement Parts (Class 9998): page 16-122

Type S Accessories (Class 9999): page 16-125

For How to Order Information, see page 16-28.

[24] NEMA 12 enclosures can be field modified for outdoor non-corrosive and non-service entrance rated applications.

[25] Limited to one pilot light, and a selector switch or Start-Stop push button.

[26] NEMA 7 and 9 bolted cast aluminum are not UL listed.



### Types SB–SD With Auxiliary Load Terminals

Capacitors are sometimes used in motor branch circuits to improve power factor. The Size 0–2 Type SB–SD starters listed in Table 16.96 include three auxiliary terminals to allow easy connection of power factor correction capacitors. When capacitors are connected using these terminals, no adjustment to the selection of thermal units is necessary. The auxiliary terminals accept 12–16 AWG solid or stranded wire. NEMA Size 3 and 4 starters have provisions for auxiliary connections. User must supply lugs as necessary.

The Type S starters with auxiliary load terminals may also be used to control two motors simultaneously from a single starter. However, this application is tightly restricted by Section 430-53 of the National Electrical Code. Refer to the NEC for restrictions regarding overload protection, size of controller and motor branch circuit protection.

**NOTE:** In Table 16.96, replace ●●● with the voltage code shown in .

For melting alloy thermal units, see page 16-132.

**Table 16.96: 3-Pole Polyphase—600 Vac Maximum—50–60 Hz (devices require 3 melting alloy thermal units)**

| NEMA Size | Motor Voltage | Max. Hp | Open Style Type |
|-----------|---------------|---------|-----------------|
| 0         | 200           | 3       | SBTO2●●●        |
|           | 230           | 3       |                 |
|           | 460           | 5       |                 |
|           | 575           | 5       |                 |
| 1         | 200           | 7-1/2   | SCTO3●●●        |
|           | 230           | 7-1/2   |                 |
|           | 460           | 10      |                 |
|           | 575           | 10      |                 |
| 2         | 200           | 10      | SDTO1●●●        |
|           | 230           | 15      |                 |
|           | 460           | 25      |                 |
|           | 575           | 25      |                 |

### Extra Capacity Single Phase Starters (Not NEMA Style)

**NOTE:** In Table 16.97, replace ●●● with the voltage code shown in .

For melting alloy thermal units, see page 16-132.

For information on field modification of NEMA 12 enclosures, see page 16-112.

**Table 16.97: 2-Pole Single Phase—250 Vac Maximum—50–60 Hz (require 1 melting alloy thermal unit)**

| Motor Voltage | Max. Hp     | Open Style   | NEMA 1 General Purpose Enclosure | NEMA 3R Rainproof, Sleet Resistant, Outdoor Use Enclosure | NEMA 4 & 4X Watertight, Dusttight Brushed Stainless Steel Enclosure | NEMA 4X Watertight Corrosion Resistant Glass-Polyester Enclosure | NEMA 12/3R [27] Dusttight and Driptight Industrial Use Enclosure |
|---------------|-------------|--------------|----------------------------------|-----------------------------------------------------------|---------------------------------------------------------------------|------------------------------------------------------------------|------------------------------------------------------------------|
|               |             | Type         | Type                             | Type                                                      | Type                                                                | Type                                                             | Type                                                             |
| 115<br>230    | 5<br>10     | SDO8●●● [28] | —                                | SDH8●●● [28]                                              | —                                                                   | —                                                                | —                                                                |
| 115<br>230    | 7-1/2<br>15 | SEO6●●●      | SEG6●●●                          | SEH6●●●                                                   | SEW16●●●                                                            | SEW26●●●                                                         | SEA6●●●                                                          |

**Table 16.98: Coil Voltage Codes**

| Voltage  |         | Code |
|----------|---------|------|
| 60 Hz    | 50 Hz   |      |
| 24 [29]  | —       | V01  |
| 120 [30] | 110     | V02  |
| 208      | —       | V08  |
| 240      | 220     | V03  |
| 277      | —       | V04  |
| 480      | 440     | V06  |
| 600      | 550     | V07  |
| Specify  | Specify | V99  |

**NOTE:** For voltage codes used with control transformers, see page 16-118. Form S (separate control) is used when a separate source of power is available for the control (coil) voltage. Form S is supplied at no charge.

Dimensions: page 16-39

Factory Modifications (Forms): page 16-117

Separate Enclosures (Class 9991): page 16-110

Replacement Parts (Class 9998): page 16-122

Type S Accessories (Class 9999): page 16-125

For How to Order Information, see page 16-28.

[27] NEMA 12 enclosures can be field modified for outdoor non-corrosive and non-service entrance rated applications.

[28] Uses a Size 3 overload relay.

[29] 24 V coils are not available on Sizes 4–7. On Sizes 00–3, where 24 V coils are available, Form S (separate control) must be specified.

[30] 120 Volt Polyphase starters are wired for separate control and must be ordered with Form S (i.e., 8536SCO2V02S).

## Application Data for Selection

Table 16.99: Application Data per NEMA Standards ICS-1 and ICS-2

| NEMA Size | Load Voltage | Max. Hp Rating: Nonplugging and Nonjogging Duty |            | Max. Hp Rating: Plugging and Jogging Duty [31] |            | Continuous Current Rating (A) 600 V Max. | Service-Limit Current Rating (A) [32] | Tungsten and Infrared Lamp Load (A), 250 V Max. [33] | Resistance Heating Loads (KW) other than Infrared Lamp Loads [34] |                                                   | KVA Rating for Switching Transformer Primaries at 50 or 60 Cycles |      |     |     | 3 Ø Rating for Switching Capacitors [35] |
|-----------|--------------|-------------------------------------------------|------------|------------------------------------------------|------------|------------------------------------------|---------------------------------------|------------------------------------------------------|-------------------------------------------------------------------|---------------------------------------------------|-------------------------------------------------------------------|------|-----|-----|------------------------------------------|
|           |              | Single Phase                                    | Poly-phase | Single Phase                                   | Poly-phase |                                          |                                       |                                                      | Inrush Currents (Worst Case Peak)                                 |                                                   |                                                                   |      |     |     |                                          |
|           |              |                                                 |            |                                                |            |                                          |                                       |                                                      | ≤20 Times Peak of Continuous Current Rating                       | >20 to 40 Times Peak of Continuous Current Rating |                                                                   |      |     |     |                                          |
|           |              |                                                 |            |                                                |            |                                          |                                       |                                                      |                                                                   |                                                   |                                                                   |      |     |     | KVAR                                     |
| 00        | 115          | 0.5                                             | —          | —                                              | —          | 9                                        | 11                                    | 5                                                    | —                                                                 | —                                                 | —                                                                 | —    | —   | —   | —                                        |
|           | 200          | —                                               | 1.5        | —                                              | —          | 9                                        | 11                                    | 5                                                    | —                                                                 | —                                                 | —                                                                 | —    | —   | —   | —                                        |
|           | 230          | 1                                               | 1.5        | —                                              | —          | 9                                        | 11                                    | 5                                                    | —                                                                 | —                                                 | —                                                                 | —    | —   | —   | —                                        |
|           | 380          | —                                               | 1.5        | —                                              | —          | 9                                        | 11                                    | —                                                    | —                                                                 | —                                                 | —                                                                 | —    | —   | —   | —                                        |
|           | 460          | —                                               | 2          | —                                              | —          | 9                                        | 11                                    | —                                                    | —                                                                 | —                                                 | —                                                                 | —    | —   | —   | —                                        |
| 0         | 575          | —                                               | 2          | —                                              | —          | 9                                        | 11                                    | —                                                    | —                                                                 | —                                                 | —                                                                 | —    | —   | —   | —                                        |
|           | 115          | 1                                               | —          | 0.5                                            | —          | 18                                       | 21                                    | 10                                                   | —                                                                 | —                                                 | 0.6                                                               | —    | 0.3 | —   | —                                        |
|           | 200          | —                                               | 3          | —                                              | 1.5        | 18                                       | 21                                    | 10                                                   | —                                                                 | —                                                 | 1.2                                                               | 1.8  | 0.6 | 0.9 | —                                        |
|           | 230          | 2                                               | 3          | 1                                              | 1.5        | 18                                       | 21                                    | —                                                    | —                                                                 | —                                                 | —                                                                 | 2.1  | —   | 1.0 | —                                        |
|           | 380          | —                                               | 5          | —                                              | 1.5        | 18                                       | 21                                    | —                                                    | —                                                                 | —                                                 | —                                                                 | —    | —   | —   | —                                        |
| 1         | 460          | —                                               | 5          | —                                              | 2          | 18                                       | 21                                    | —                                                    | —                                                                 | —                                                 | 2.4                                                               | 4.2  | 1.2 | 2.1 | —                                        |
|           | 575          | —                                               | 5          | —                                              | 2          | 18                                       | 21                                    | —                                                    | —                                                                 | —                                                 | 3.0                                                               | 5.2  | 1.5 | 2.6 | —                                        |
|           | 115          | 2                                               | —          | 1                                              | —          | 27                                       | 32                                    | 15                                                   | 3                                                                 | 5                                                 | 1.2                                                               | —    | 0.6 | —   | —                                        |
|           | 200          | —                                               | 7.5        | —                                              | 3          | 27                                       | 32                                    | 15                                                   | —                                                                 | 9.1                                               | —                                                                 | 3.6  | —   | 1.8 | —                                        |
|           | 230          | 3                                               | 7.5        | 2                                              | 3          | 27                                       | 32                                    | 15                                                   | 6                                                                 | 10                                                | 2.4                                                               | 4.3  | 1.2 | 2.1 | —                                        |
| 1P        | 380          | —                                               | 10         | —                                              | 5          | 27                                       | 32                                    | —                                                    | —                                                                 | 16.5                                              | —                                                                 | —    | —   | —   | —                                        |
|           | 460          | —                                               | 10         | —                                              | 5          | 27                                       | 32                                    | —                                                    | 12                                                                | 20                                                | 4.9                                                               | 8.5  | 2.5 | 4.3 | —                                        |
|           | 575          | —                                               | 10         | —                                              | 5          | 27                                       | 32                                    | —                                                    | 15                                                                | 25                                                | 6.2                                                               | 11.0 | 3.1 | 5.3 | —                                        |
|           | 115          | 3                                               | —          | 1.5                                            | —          | 36                                       | 42                                    | 24                                                   | —                                                                 | —                                                 | —                                                                 | —    | —   | —   | —                                        |
|           | 230          | 5                                               | —          | 3                                              | —          | 36                                       | 42                                    | 24                                                   | —                                                                 | —                                                 | —                                                                 | —    | —   | —   | —                                        |
| 2         | 115          | 3                                               | —          | 2                                              | —          | 45                                       | 52                                    | 30                                                   | 5                                                                 | 8.5                                               | 2.1                                                               | —    | 1.0 | —   | —                                        |
|           | 200          | —                                               | 10         | —                                              | 7.5        | 45                                       | 52                                    | 30                                                   | —                                                                 | 15.4                                              | —                                                                 | 6.3  | —   | 3.1 | —                                        |
|           | 230          | 7.5                                             | 15         | 5                                              | 10         | 45                                       | 52                                    | 30                                                   | 10                                                                | 17                                                | 4.1                                                               | 7.2  | 2.1 | 3.6 | 8                                        |
|           | 380          | —                                               | 25         | —                                              | 15         | 45                                       | 52                                    | —                                                    | —                                                                 | 28                                                | —                                                                 | —    | —   | —   | —                                        |
|           | 460          | —                                               | 25         | —                                              | 15         | 45                                       | 52                                    | —                                                    | 20                                                                | 34                                                | 8.3                                                               | 14   | 4.2 | 7.2 | 16                                       |
| 3         | 575          | —                                               | 25         | —                                              | 15         | 45                                       | 52                                    | —                                                    | 25                                                                | 43                                                | 10.0                                                              | 18   | 5.2 | 8.9 | 20                                       |
|           | 115          | —                                               | —          | —                                              | —          | 90                                       | 104                                   | 60                                                   | 10                                                                | 17                                                | 4.1                                                               | —    | 2.0 | —   | —                                        |
|           | 200          | —                                               | 25         | —                                              | 15         | 90                                       | 104                                   | 60                                                   | —                                                                 | 31                                                | —                                                                 | 12   | —   | 6.1 | —                                        |
|           | 230          | —                                               | 30         | —                                              | 20         | 90                                       | 104                                   | 60                                                   | 20                                                                | 34                                                | 8.1                                                               | 14   | 4.1 | 7.0 | 27                                       |
|           | 380          | —                                               | 50         | —                                              | 30         | 90                                       | 104                                   | —                                                    | —                                                                 | 56                                                | —                                                                 | —    | —   | —   | —                                        |
| 4         | 460          | —                                               | 50         | —                                              | 30         | 90                                       | 104                                   | —                                                    | 40                                                                | 68                                                | 16                                                                | 28   | 8.1 | 14  | 53                                       |
|           | 575          | —                                               | 50         | —                                              | 30         | 90                                       | 104                                   | —                                                    | 50                                                                | 86                                                | 20                                                                | 35   | 10  | 18  | 67                                       |
|           | 200          | —                                               | 40         | —                                              | 25         | 135                                      | 156                                   | 120                                                  | —                                                                 | 45                                                | —                                                                 | 20   | —   | 10  | —                                        |
|           | 230          | —                                               | 50         | —                                              | 30         | 135                                      | 156                                   | 120                                                  | 30                                                                | 52                                                | 14                                                                | 23   | 6.8 | 12  | 40                                       |
|           | 380          | —                                               | 75         | —                                              | 50         | 135                                      | 156                                   | —                                                    | —                                                                 | 86.7                                              | —                                                                 | —    | —   | —   | —                                        |
| 5 [36]    | 460          | —                                               | 100        | —                                              | 60         | 135                                      | 156                                   | —                                                    | 60                                                                | 105                                               | 27                                                                | 47   | 14  | 23  | 80                                       |
|           | 575          | —                                               | 100        | —                                              | 60         | 135                                      | 156                                   | —                                                    | 75                                                                | 130                                               | 34                                                                | 59   | 17  | 29  | 100                                      |
|           | 200          | —                                               | 75         | —                                              | 60         | 270                                      | 311                                   | 240                                                  | —                                                                 | 91                                                | —                                                                 | 41   | —   | 20  | —                                        |
|           | 230          | —                                               | 100        | —                                              | 75         | 270                                      | 311                                   | 240                                                  | 60                                                                | 105                                               | 27                                                                | 47   | 14  | 24  | 80                                       |
|           | 380          | —                                               | 150        | —                                              | 125        | 270                                      | 311                                   | —                                                    | —                                                                 | 173                                               | —                                                                 | —    | —   | —   | —                                        |
| 6 [36]    | 460          | —                                               | 200        | —                                              | 150        | 270                                      | 311                                   | —                                                    | 120                                                               | 210                                               | 54                                                                | 94   | 27  | 47  | 160                                      |
|           | 575          | —                                               | 200        | —                                              | 150        | 270                                      | 311                                   | —                                                    | 150                                                               | 260                                               | 68                                                                | 117  | 34  | 59  | 200                                      |
|           | 200          | —                                               | 150        | —                                              | 125        | 540                                      | 621                                   | 480                                                  | —                                                                 | 182                                               | —                                                                 | 81   | —   | 41  | —                                        |
|           | 230          | —                                               | 200        | —                                              | 150        | 540                                      | 621                                   | 480                                                  | 120                                                               | 210                                               | 54                                                                | 94   | 27  | 47  | 160                                      |
|           | 380          | —                                               | 300        | —                                              | 250        | 540                                      | 621                                   | —                                                    | —                                                                 | 342                                               | —                                                                 | —    | —   | —   | —                                        |
| 7 [36]    | 460          | —                                               | 400        | —                                              | 300        | 540                                      | 621                                   | —                                                    | 240                                                               | 415                                               | 108                                                               | 188  | 54  | 94  | 320                                      |
|           | 575          | —                                               | 400        | —                                              | 300        | 540                                      | 621                                   | —                                                    | 300                                                               | 515                                               | 135                                                               | 234  | 68  | 117 | 400                                      |
|           | 230          | —                                               | 300        | —                                              | —          | 810                                      | 932                                   | —                                                    | 180                                                               | 315                                               | —                                                                 | —    | —   | —   | 240                                      |
|           | 460          | —                                               | 600        | —                                              | —          | 810                                      | 932                                   | —                                                    | 360                                                               | 625                                               | —                                                                 | —    | —   | —   | 480                                      |
|           | 575          | —                                               | 600        | —                                              | —          | 810                                      | 932                                   | —                                                    | 450                                                               | 775                                               | —                                                                 | —    | —   | —   | 600                                      |

Table 16.100: Maximum Allowable Motor Code Letter

| Motor Hp Rating | Maximum Allowable Motor Code Letter |
|-----------------|-------------------------------------|
| 1.5–2           | L                                   |
| 3–5             | K                                   |
| 7.5 and above   | H                                   |

The motor ratings in Table 16.99 are NEMA standard ratings and apply only when the code letter of the motor is the same as or occurs earlier in the alphabet than what is shown in Table 16.100. Motors with code letters occurring later in the alphabet may require a larger controller. Consult the Customer Care Center at 1-888-778-2733.

The ratings for capacitor switching in Table 16.99 assume the following maximum available fault currents (rms symmetrical amperes):

- NEMA Size 00–3: 5,000 A
- NEMA Size 4–5: 10,000 A
- NEMA Size 6: 18,000 A
- NEMA Size 7: 30,000 A

If the available fault current is greater than these values, connect sufficient impedance in series.

Refer to the instruction material for the actual tested SCCR values.

**NOTE:** Tables and footnotes are taken from NEMA Standards.

[31] Ratings shown are for applications requiring repeated interruptions of stalled motor current or repeated closing of high transient currents encountered in rapid motor reversal, involving more than five openings or closings per minute and more than ten in a ten-minute period, such as plug-stop, plug-reverse or jogging duty. Ratings apply to single speed and multi-speed controllers.

[32] Per NEMA Standards paragraph ICS 2-321.20, the service-limit current represents the maximum rms current, in Amperes, which the controller may be expected to carry for protracted periods in normal service. At service-limit current ratings, temperature rises may exceed those obtained by testing the controller at its continuous current rating. The ultimate trip current of over-current (overload) relays or other motor protective devices shall not exceed the service-limit current ratings of the controller.

[33] **Fluorescent Lamp Loads—300 V and Less**—The characteristics of fluorescent lamps are such that it is not necessary to derate Class 8502 contactors below their normal continuous current rating. Class 8903 contactors may also be used with fluorescent lamp loads. For controlling tungsten and infrared lamp loads, and resistance heating loads, Class 8903 AC lighting contactors are recommended. These contactors are specifically designed for such loads and are applied at their full rating as listed in the Class 8903 (lighting contactors) section.

[34] Ratings apply to contactors which are employed to switch the load at the utilization voltage of the heat producing element with a duty which requires continuous operation of not more than five openings per minute. Class 8903 Types L and S lighting contactors are rated for resistance heating loads.

[35] When discharged, a capacitor has essentially zero impedance. For repetitive switching by a contactor, sufficient impedance should be connected in series to limit inrush current to not more than 6 times the contactor rated continuous current. In many installations, the impedance of connecting conductors may be sufficient for this purpose. When switching to connect additional banks, the banks already on the line may be charged and can supply additional available short-circuit current which should be considered when selecting the impedance to limit the current.

[36] For NEMA Size 6 and 7, the operation rate is as follows: Continuous operation rate is 3 operations per minute maximum; Jogging or Plugging Duty operation rate is 15 operations per minute for a maximum of three minutes.

## Dimensions for Open Type and NEMA 1 Enclosures

**NOTE:** These dimensions are for reference only. If you need precise measurements, contact the Customer Care Center at 1-888-778-2733.

**Table 16.101: Dimensions for Class 8502 Open Type**


| NEMA Size | Type | No. of Poles | Fig. No. | Dimensions, in. (Refer to Figure 1) |       |       |       |       |       |       |       |       | Wt (lb) |
|-----------|------|--------------|----------|-------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|---------|
|           |      |              |          | A in.                               | B in. | C in. | D in. | E in. | F in. | G in. | H in. | I in. |         |
| 00        | SAO  | 2-3          | 1        | 3.22                                | 4.34  | 4.22  | 1.63  | 1.63  | 0.22  | 3.94  | —     | —     | 4       |
| 0         | SBO  | 1-3          | 1        | 3.22                                | 4.34  | 4.22  | 1.63  | 1.63  | 0.22  | 3.94  | —     | —     | 4       |
| 1         | SCO  | 4-5          | 1        | 4.25                                | 4.34  | 4.22  | 1.63  | 2.63  | 0.22  | 3.94  | —     | —     | 4.5     |
| 2         | SDO  | 2-3          | 1        | 4.31                                | 5.13  | 4.94  | 2.16  | 2.16  | 0.22  | 4.59  | 0.53  | 1.06  | 6.75    |
|           |      | 4-5          | 1        | 5.63                                | 5.13  | 4.94  | 2.16  | 3.47  | 0.22  | 4.59  | 0.53  | 1.06  | 8.25    |
| 3         | SEO  | 2-3          | 1        | 5.47                                | 7.09  | 6.5   | 1.88  | 3.53  | 0.31  | 6.03  | 3.25  | 4.75  | 14      |
|           |      | 4-5          | 1        | 9.75                                | 7.88  | 6.5   | 3.94  | 5.81  | 0.31  | 7     | 4.53  | 9.06  | 22      |
| 4         | SFO  | 2-3          | 1        | 6                                   | 8.19  | 6.5   | 2.06  | 3.94  | 0.31  | 7     | 3.59  | 5.31  | 18      |
|           |      | 4-5          | 1        | 9.75                                | 8.19  | 6.5   | 3.94  | 5.81  | 0.31  | 7     | 4.53  | 9.06  | 22      |
| 5         | SGO  | 2-3          | 1        | 8.67                                | 12.31 | 8.75  | 3.25  | 5.81  | 0.63  | 11.13 | 4.75  | 7.25  | 45      |
| 6         | SHO  | 2-3          | 1        | 10.55                               | 28.06 | 9     | 3.53  | 7.03  | 5.06  | 18.56 | 4.75  | 7.25  | 80      |
| 7         | SJO  | 2-3          | 1        | 10.55                               | 37.25 | 10.88 | 3.53  | 7.03  | 7.22  | 22.38 | 4.75  | 7.25  | 135     |

**Table 16.102: Dimensions for 8536 Open Type**


| NEMA Size    | Type       | No. of Poles | Fig. No. | Dimensions, in. (Refer to Figure 2) |       |       |       |       |       |       |       |       | Wt (lb) |
|--------------|------------|--------------|----------|-------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|---------|
|              |            |              |          | A in.                               | B in. | C in. | D in. | E in. | F in. | G in. | H in. | I in. |         |
| 00, 0, 1, 1P | SAO<br>SCO | 2-3          | 2        | 3.5                                 | 6.77  | 4.22  | 0.5   | 1     | 1.61  | 0.2   | 6.25  | 3.97  | 5       |
| 0, 1         | SBO<br>SCO | 4            | 2        | 4.53                                | 6.77  | 4.22  | 0.5   | 1     | 2.67  | 0.2   | 6.25  | 3.97  | 5.5     |
| 2            | SDO        | 2-3          | 2        | 4.31                                | 7.81  | 4.94  | 0.5   | 1     | 2.16  | 0.2   | 7.34  | 4.06  | 7.75    |
|              |            | 4            | 2        | 5.63                                | 7.81  | 4.94  | 0.5   | 1     | 3.47  | 0.2   | 7.34  | 4.06  | 9.25    |
| 3            | SEO        | 2-3          | 2        | 5.47                                | 11.09 | 6.5   | 0.88  | 1.75  | 3.59  | 0.31  | 10.19 | 5.75  | 17      |
|              |            | 4            | 2        | 9.75                                | 12.13 | 6.5   | 1.81  | 1.75  | 5.81  | 0.31  | 11.19 | 5.75  | 25      |
| 4            | SFO        | 3            | 2        | 6                                   | 12.88 | 6.5   | 1.81  | 1.75  | 3.94  | 0.31  | 11.19 | 5.75  | 22      |
|              |            | 4            | 2        | 9.75                                | 12.88 | 6.5   | 1.81  | 1.75  | 5.91  | 0.31  | 11.19 | 5.75  | 25      |
| 5            | SGO        | 3            | 2        | 8.56                                | 17.56 | 8.75  | 4.75  | 7.25  | 5.38  | 0.63  | 16.38 | 6     | 62      |
| 6            | SHO        | 3            | 2        | 12.34                               | 28.06 | 9     | 4.75  | 7.25  | 5.78  | 5.06  | 18.56 | 8.69  | 85      |
| 7            | SJO        | 3            | 2        | 12.34                               | 37.25 | 10.88 | 4.75  | 7.25  | 5.78  | 7.22  | 22.38 | 9     | 140     |

**Table 16.103: Dimensions for NEMA 1 General Purpose Enclosure**


| NEMA Size | Type | No. of Poles | Fig. No. | Dimensions, in. |       |       |       |      |      |       |       |      |      |      |      |      |
|-----------|------|--------------|----------|-----------------|-------|-------|-------|------|------|-------|-------|------|------|------|------|------|
|           |      |              |          | A               | B     | C     |       | D    | E    | F     | G     | H    | I    | J    | K    | L    |
|           |      |              |          |                 |       | 8502  | 8536  |      |      |       |       |      |      |      |      |      |
| 00        | SAG  | All          | 3        | 6               | 10    | 5.28  | 5.56  | 3    | 0.88 | 8.13  | 1     | 0.94 | 4.13 | 5    | —    | —    |
| 0         | SBG  | All          | 3        | 6               | 10    | 5.28  | 5.56  | 3    | 0.88 | 8.13  | 1     | 0.94 | 4.13 | 5    | —    | —    |
| 1         | SCG  | All          | 3        | 6               | 10    | 5.28  | 5.56  | 3    | 0.88 | 8.13  | 1     | 0.94 | 4.13 | 5    | —    | —    |
| 2         | SDG  | All          | 3        | 7.81            | 12.69 | 6.03  | 6.31  | —    | 1.09 | 10.5  | 1.09  | 1.09 | 5.63 | 5.75 | 1.09 | 5.63 |
| 3         | SEG  | All          | 3        | 11.44           | 21.81 | 8     | 8.38  | —    | 1.53 | 18.75 | 1.53  | 1.53 | 8.38 | 7.75 | 1.53 | 8.38 |
| 4         | SFG  | All          | 5        | 11.25           | 25.16 | 9     | 9     | 8.59 | 1.25 | 1.25  | 22.31 | 1.44 | 0.44 | —    | —    | —    |
| 5         | SGG  | All          | 5        | 17.22           | 44.22 | 12.81 | 12.94 | 13   | 2.13 | 2.13  | 40    | 2.13 | 0.56 | —    | —    | —    |
| 6         | SHG  | All          | 4        | 65.75           | 20.22 | 13.13 | 13.13 | —    | 11   | 64.5  | 2.31  | 5.5  | —    | —    | —    | —    |
| 7         | SJG  | All          | 4        | 93              | 34.5  | 23.5  | 23.5  | —    | —    | —     | —     | —    | —    | —    | —    | —    |




**Figure 1**  
**Class 8502**




**Figure 2**  
**Class 8536**



**Figure 3**



**Figure 4**



**Figure 5**

## Dimensions for NEMA 4 and 4X Enclosures

For the dimensions in Table 16.104 and Table 16.105, see Figure 6.

Table 16.104: NEMA 4 and 4X—Stainless Steel Watertight Enclosure

| NEMA Size | Class       | Type | No. of Poles | Dimensions, in. |       |       |      |      |      |      |      |       |      |      |      | Hub Dia.       |                 |
|-----------|-------------|------|--------------|-----------------|-------|-------|------|------|------|------|------|-------|------|------|------|----------------|-----------------|
|           |             |      |              | A               | B     | C     | D    | E    | F    | G    | H    | I     | J    | K    | L    | Bot. Only<br>W | Top & Bot.<br>X |
| 0 and 1   | 8502        | SBW  | All          | 6.38            | 7.13  | 13.19 | 1.56 | 3.25 | 12   | 0.59 | 1.19 | 11.78 | 1.63 | 2.31 | 0.31 | 3/4"           | 1"              |
|           |             | SCW  |              | 6.38            | 7.81  | 13.19 | 1.56 | 3.25 | 12   | 0.59 | 1.88 | 11.78 | 1.63 | 2.31 | 0.31 |                |                 |
| 2         | 8502        | SDW  | All          | 8.13            | 7.88  | 16.19 | 1.56 | 5    | 15   | 1.09 | 1.94 | 14.75 | 2    | 2.63 | 0.31 | 3/4"           | 1-1/2"          |
|           |             | SCW  |              | 8.13            | 8.56  | 16.19 | 1.56 | 5    | 15   | 1.09 | 2.88 | 14.75 | 2    | 2.63 | 0.31 |                |                 |
| 3 and 4   | 8502        | SEW  | All          | 18.16           | 8.75  | 32.22 | 3.08 | 12   | 30.5 | 0.88 | 3.69 | 26.72 | 2.56 | 3.19 | 0.44 | 3/4"           | 2-1/2"          |
|           |             | SFW  |              | 18.16           | 9.56  | 32.22 | 3.08 | 12   | 30.5 | 0.88 | 4.5  | 26.72 | 2.56 | 3.19 | 0.44 |                |                 |
| 5         | 8502 & 8536 | SGW  | All          | 17.22           | 12.63 | 47.22 | 4.13 | 9    | 46   | 0.63 | 4.59 | 28.31 | 3.13 | 5.75 | 0.56 | 3/4"           | 3-1/2"          |
| 6 [37]    | 8502 & 8536 | SHW  | All          | 20.22           | 12.13 | 65.22 | 4.13 | 12   | 64   | 0.63 | 4.59 | 30.81 | 2.69 | 4.5  | 0.56 | 3/4"           | (2) 3"          |
| 7 [37]    | 8502 & 8536 | SJW  | All          | 34.5            | 23.5  | 101   |      |      |      |      |      |       |      |      |      |                |                 |

Floor Mounting

Table 16.105: NEMA 4 and 4X—Stainless Steel Watertight Enclosure with Form FF4T

| NEMA Size | Class       | Type | No. of Poles | Dimensions, in.                                           |      |       |      |      |      |      |      |       |      |      |      |
|-----------|-------------|------|--------------|-----------------------------------------------------------|------|-------|------|------|------|------|------|-------|------|------|------|
|           |             |      |              | A                                                         | B    | C     | D    | E    | F    | G    | H    | I     | J    | K    | L    |
| 0 and 1   | 8502        | SBW  | All          | 12.63                                                     | 7.13 | 14.69 | 2.56 | 7.5  | 13.5 | 0.59 | 3.19 | 18.81 | 1.66 | 2.31 | 0.31 |
|           |             | SCW  |              | 12.63                                                     | 7.81 | 14.69 | 2.56 | 7.5  | 13.5 | 0.59 | 3.88 | 18.41 | 1.66 | 2.31 | 0.31 |
|           | 8536        | SBW  | All          | 12.63                                                     | 7.81 | 14.69 | 2.56 | 7.5  | 13.5 | 0.59 | 3.88 | 18.41 | 1.66 | 2.31 | 0.31 |
|           |             | SCW  |              | 12.63                                                     | 7.81 | 14.69 | 2.56 | 7.5  | 13.5 | 0.59 | 3.88 | 18.41 | 1.66 | 2.31 | 0.31 |
| 2         | 8502        | SDW  | All          | 14.88                                                     | 7.56 | 16.31 | 2.56 | 9.75 | 15   | 0.66 | 3.19 | 20.88 | 2    | 2.63 | 0.31 |
|           | 8536        | SDW  | All          | 14.88                                                     | 8.25 | 16.31 | 2.56 | 9.75 | 15   | 0.66 | 3.88 | 20.88 | 2    | 2.63 | 0.31 |
| 3 and 4   | 8502        | SEW  | 2-3          | Same as Standard NEMA 4 dimensions, see above.            |      |       |      |      |      |      |      |       |      |      |      |
|           |             | SFW  | 2-3          | Same as Standard NEMA 4 dimensions, see above.            |      |       |      |      |      |      |      |       |      |      |      |
|           | 8536        | SEW  | 2-3          | Same as Standard NEMA 4 dimensions, see above.            |      |       |      |      |      |      |      |       |      |      |      |
|           |             | SFW  | 2-3          | Same as Standard NEMA 4 dimensions, see above.            |      |       |      |      |      |      |      |       |      |      |      |
| 5         | 8502 & 8536 | SGW  | All          | Same as Standard NEMA 4 dimensions, see above.            |      |       |      |      |      |      |      |       |      |      |      |
| 6 [37]    | 8502 & 8536 | SHW  | All          | Form FF4T is supplied as standard. Refer to Table 16.321. |      |       |      |      |      |      |      |       |      |      |      |
| 7 [37]    | 8502 & 8536 | SJW  | All          | Form FF4T is supplied as standard. Refer to Table 16.321. |      |       |      |      |      |      |      |       |      |      |      |

For the dimensions in Table 16.106, see Figure 7.

Table 16.106: NEMA 4X—Watertight and Corrosion Resistant Glass Polyester Enclosures, Sizes 00–2, without Form FF4T

| Size | Type | No. of Poles | Dimensions, in. |      |       |      |   |      |      |      |       |      |      |      | Hub            |                 | Weight (lb) |
|------|------|--------------|-----------------|------|-------|------|---|------|------|------|-------|------|------|------|----------------|-----------------|-------------|
|      |      |              | A               | B    | C     | D    | E | F    | G    | H    | I     | J    | K    | L    | Bot. Only<br>W | Top & Bot.<br>X |             |
| 0, 1 | SBW  | All          | 6.5             | 6.44 | 12.13 | 0.75 | 5 | 8.75 | 1.69 | 3.34 | 10.06 | 1.31 | 2.13 | 0.31 | 0.75           | 1               | 17          |
|      | SCW  |              | 6.5             | 6.44 | 12.13 | 0.75 | 5 | 8.75 | 1.69 | 3.34 | 10.06 | 1.31 | 2.13 | 0.31 | 0.75           | 1               | 17          |
| 2    | SDW  | All          | 8.5             | 7.06 | 13.88 | 0.75 | 7 | 10.5 | 1.69 | 3.91 | 11.94 | 1.63 | 2.38 | 0.31 | 0.75           | 1.5             | 22          |

For the dimensions in Table 16.107, see Figure 8.

Table 16.107: NEMA 4X—Watertight and Corrosion Resistant Glass Polyester Enclosures

| NEMA Size          | Type | No. of Poles | Dimensions, in. |       |       |       |       |
|--------------------|------|--------------|-----------------|-------|-------|-------|-------|
|                    |      |              | A               | B     | C     | E     | F     |
| 0–2 with Form FF4T | SBW  | All          | 16.88           | 9.78  | 22.75 | 10.13 | 21.5  |
|                    | SCW  |              | 16.88           | 9.78  | 22.75 | 10.13 | 21.5  |
|                    | SDW  |              | 16.88           | 9.78  | 22.75 | 10.13 | 21.5  |
| 3–4                | SEW  | All          | 25.81           | 11.94 | 33.5  | 18.5  | 32.25 |
|                    | SFW  |              | 25.81           | 11.94 | 33.5  | 18.5  | 32.25 |

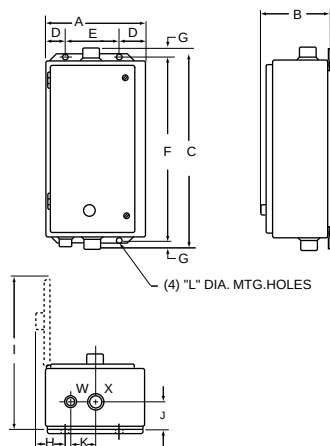
**NOTE:** Devices with Form FF4T may use a larger enclosure. Consult the Customer Care Center at 1-888-778-2733 for dimensions.

Figure 6: NEMA 4 and 4X—Stainless Steel Watertight Enclosure

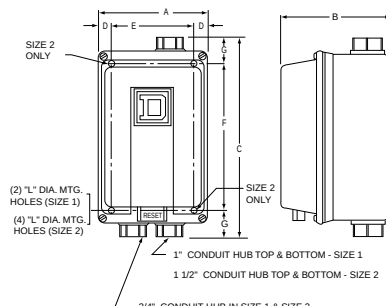
**NOTE:** These dimensions are for reference only. If you need precise measurements, contact the Customer Care Center at 1-888-778-2733.

Figure 7: NEMA 4X—Watertight and Corrosion Resistant Glass Polyester Enclosures, Sizes 0–2, without Form FF4T

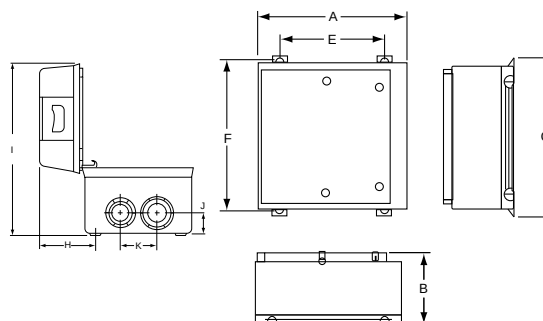



Figure 8: NEMA 4X—Watertight and Corrosion Resistant Glass Polyester Enclosures

[37] Size 6 and 7 are NEMA 4 painted sheet steel enclosures.


## NEMA 7 and 9 Enclosures

**NOTE:** These dimensions are for reference only. If you need precise measurements, contact the Customer Care Center at 1-888-778-2733.


**Table 16.108: NEMA 7 and 9 Enclosures**

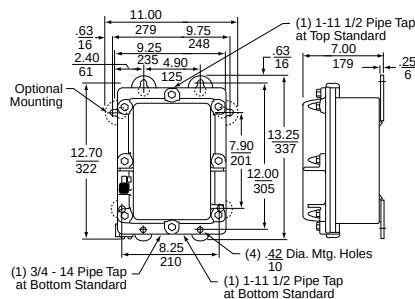


**Bolted Cover, Cast Iron Enclosure, NEMA Size 0 and 1 (weight: 59 lb)**

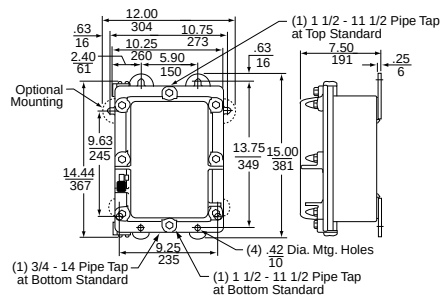

**Bolted Cover, Cast Iron Enclosure, NEMA Size 2 (weight: 75 lb)**

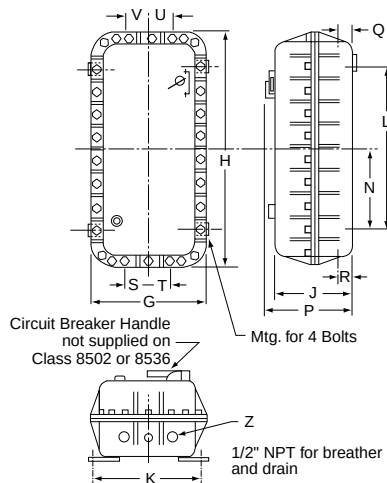

**Bolted Cover, Cast Aluminum Enclosure**

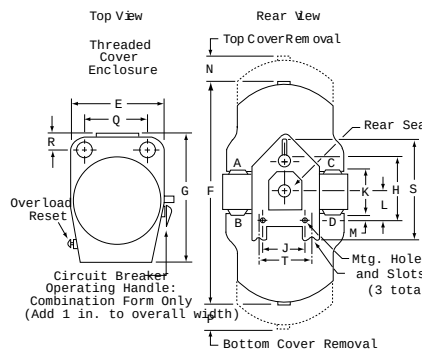

**Spin Top™ Enclosure**

**Table 16.109: NEMA 7 and 9—Bolted Cover, Cast Aluminum Dimensions**

| NEMA Size | Type    | Dimensions, in. |       |     |       |       |      |       |      |            | Z Dia. | Wt. (lb) |
|-----------|---------|-----------------|-------|-----|-------|-------|------|-------|------|------------|--------|----------|
|           |         | G               | H     | J   | K     | L     | N    | P     | Q, R | S, T, U, V |        |          |
| 0-1       | SBT     | 14.25           | 17.25 | 9.5 | 12.25 | 8.88  | 4.5  | 11    | 2.38 | 3.13       | 1.5    | 75       |
| 2         | SCT     | 13.63           | 27.63 | 9.5 | 12.25 | 19.25 | 9.63 | 11    | 2.38 | 3.13       | 1.5    | 115      |
| 3-4       | SET SFT | 18.13           | 31.63 | 10  | 16.25 | 19.25 | 9.63 | 12.63 | 2.38 | 3.75       | 2.5    | 180      |

**Table 16.110: NEMA 7 and 9—Spin Top™ Enclosure Dimensions**

| Conduit Sizes<br>Loc. A, B, C & D |      |      | Dimensions, in. |      |       |   |      |      |      |      |      |    |      |      |   |   | Wt.<br>(lb) |
|-----------------------------------|------|------|-----------------|------|-------|---|------|------|------|------|------|----|------|------|---|---|-------------|
| NEMA<br>Size                      | Std. | Type | E               | F    | G     | H | J    | K    | L    | M    | N    | P  | Q    | R    | S | T |             |
| 0-1                               | 1.25 | SBR  | 10.63           | 26   | 15.25 | 8 | 4.75 | 5.38 | 3.75 | 1.06 | 7.5  | 11 | 7.31 | 2.06 | — | — | 70          |
| 2                                 | 1.5  | SCR  | 13.88           | 30.5 | 19.25 | 8 | 4.75 | 5.25 | 3.75 | 1.06 | 7    | 18 | 9.38 | 2.75 | — | — | 100         |
| 3-4                               | 2.5  | SER  |                 |      |       |   |      |      |      |      |      |    |      |      |   |   |             |
| SFR                               |      |      | 13.38           | 39.5 | 20.25 | 8 | 4.75 | 7.5  | 3.75 | —    | 7.75 | 23 | 8.63 | 3    | — | — | 165<br>195  |



## Dimensions for NEMA 12/3R Enclosures

**NOTE:** These dimensions are for reference only. If you need precise measurements, contact the Customer Care Center at 1-888-778-2733.

Table 16.111: NEMA 12/3R—Dusttight Enclosure

| NEMA Size | Type | No. of Poles | Dimensions, in. |       |       |                |      |      |      |      |       |      | Weight (lb) |            |
|-----------|------|--------------|-----------------|-------|-------|----------------|------|------|------|------|-------|------|-------------|------------|
|           |      |              | A               | B     | C     | D              | E    | F    | G    | H    | I     | J    | Class 8502  | Class 8536 |
| 0         | SBA  | All          | 6.38            | 8.53  | 12.75 | 1.56           | 3.25 | 12   | 0.38 | 3.56 | 12.25 | 0.31 | 15          | 16         |
| 1         | SCA  | All          | 8.13            | 9.28  | 16    | 1.56           | 5    | 15   | 0.5  | 3.56 | 15.38 | 0.31 | 22          | 23         |
| 2         | SDA  | All          | 18.16           | 9.56  | 31.5  | 3.08           | 12   | 30.5 | 0.5  | 4.5  | 26.72 | 0.44 | 65          | 68         |
| 3         | SEA  | All          | 17.22           | 13.44 | 47    | 4.13           | 9    | 46   | 0.5  | 5.41 | 28.31 | 0.56 | 160         | 177        |
| 4         | SFA  | All          | 20.22           | 13    | 65    | 4.13           | 12   | 64   | 0.5  | 6.44 | 30.88 | 0.69 | 228         | 233        |
| 5         | SGA  | All          | 34.5            | 23.5  | 93    | Floor Mounting |      |      |      |      |       |      | —           | —          |

Table 16.112: NEMA 12/3R—Dusttight Enclosure With Form FF4T

| NEMA Size | Type | No. of Poles | Dimensions, in.                                                  |      |      |      |      |       |      |      |       |      |
|-----------|------|--------------|------------------------------------------------------------------|------|------|------|------|-------|------|------|-------|------|
|           |      |              | A                                                                | B    | C    | D    | E    | F     | G    | H    | I     | J    |
| 0         | SBA  | All          | 11.88                                                            | 8    | 13.5 | 2.81 | 6.75 | 12.75 | 0.38 | 3.91 | 18.38 | 0.31 |
| 1         | SCA  | All          |                                                                  |      |      |      |      |       |      |      |       |      |
| 2         | SDA  | All          | 14.88                                                            | 8.13 | 16   | 2.56 | 9.75 | 15    | 0.38 | 3.66 | 21.5  | 0.31 |
| 3         | SEA  | 2–3          | Same as Standard NEMA 12 dimensions, see above.                  |      |      |      |      |       |      |      |       |      |
| 4         | SFA  | 2–3          |                                                                  |      |      |      |      |       |      |      |       |      |
| 5         | SGA  | All          | Same as Standard NEMA 12 dimensions, see above.                  |      |      |      |      |       |      |      |       |      |
| 6         | SHA  | All          |                                                                  |      |      |      |      |       |      |      |       |      |
| 7         | SJA  | All          | Form FF4T comes standard. Refer to <a href="#">page 16-118</a> . |      |      |      |      |       |      |      |       |      |

Table 16.113: NEMA 3R—Rainproof and Sleet Resistant Enclosures

| Size | Type       | No. of Poles | Dimensions, in. |       |      |      |      |    |      |      |      |      |      |       |      |      |      |      |      |                          | K.O. X          | K.O. Y |
|------|------------|--------------|-----------------|-------|------|------|------|----|------|------|------|------|------|-------|------|------|------|------|------|--------------------------|-----------------|--------|
|      |            |              | A               | B     | C    | D1   | D2   | E  | F    | G1   | G2   | H1   | H2   | J     | K    | L    | M    | N    | P    |                          |                 |        |
| 0, 1 | SBH<br>SCH | All          | 8.84            | 12.28 | 7.13 | 1.38 | 1.44 | 6  | 7.5  | 2.59 | 2.19 | 2.06 | 2.63 | 14.28 | 1.38 | 1.38 | 1.88 | 4.38 | 1.84 | 1/2<br>3/4<br>1          | 1/2<br>3/4<br>1 |        |
| 2    | SDH        | All          | 9.84            | 16.28 | 8.63 | 1.38 | 1.44 | 7  | 11.5 | 2.59 | 2.19 | 2.06 | 2.63 | 16.78 | 1.31 | 1.75 | 2.13 | 4.88 | 1.84 | 1<br>1-1/4<br>1-1/2      | 1/2<br>3/4      |        |
| 3    | SEH        | All          | 12.84           | 25.28 | 8.63 | 1.38 | 1.44 | 10 | 20.5 | 2.59 | 2.19 | 2.06 | 2.63 | 19.78 | 1.31 | 1.94 | 2.44 | 6.38 | 1.84 | 1<br>1-1/4<br>2<br>2-1/2 | 1/2<br>3/4      |        |
| 4    | SFH        | All          | 12.84           | 40.28 | 9.13 | 1.38 | 1.44 | 10 | 35.5 | 2.59 | 2.19 | 2.06 | 2.63 | 20.28 | 1.31 | 2.31 | 2.69 | 6.38 | 1.84 | 1<br>1-1/4<br>2<br>2-1/2 | 1/2<br>3/4      |        |

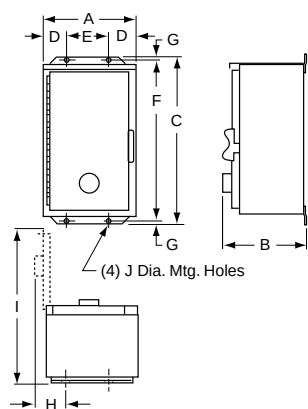


Figure 16.1: NEMA 12/3R

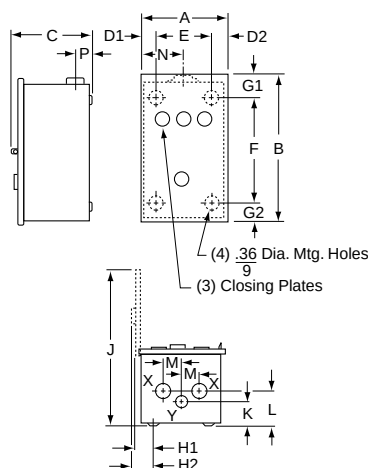


Figure 16.2: NEMA 3R



Class 8502 Type WH

### General Information

Class 8502 Type W non-reversing vacuum contactors used to switch capacitors, transformers and electric motors where overload protection is separately provided. Type W vacuum contactors are designed for operation at 600 Volts, 50/60 Hz. (See page 16-66 for Class 8702 Reversing Vacuum Contactors.)

**NOTE:** In Table 16.114, replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard coil voltage codes listed in Table 16.117.

**Table 16.114: Class 8502—Full Voltage, 3-Pole Vacuum Contactors**

| NEMA Size | Enclosed Ampere Rating | Locked Rotor Current (A) | Motor Voltage | Max. Hp | Open Style Type |
|-----------|------------------------|--------------------------|---------------|---------|-----------------|
| 4         | 135                    | 1080                     | 200           | 40      | WFO3●●●         |
|           |                        |                          | 230           | 50      |                 |
|           |                        |                          | 460           | 100     |                 |
|           |                        |                          | 575           | 100     |                 |
| 5         | 270                    | 2160                     | 200           | 75      | WGO3●●●         |
|           |                        |                          | 230           | 100     |                 |
|           |                        |                          | 460           | 200     |                 |
|           |                        |                          | 575           | 200     |                 |
| 6         | 540                    | 4320                     | 200           | 150     | WHO3●●●         |
|           |                        |                          | 230           | 200     |                 |
|           |                        |                          | 460           | 400     |                 |
|           |                        |                          | 575           | 400     |                 |

**Table 16.115: Class 9998—Replacement Coils for Class 8502 and 8702 Vacuum Contactors (Includes Rectifier)**

| Size | Type | Poles | Class and Type | Suffix Number<br>(Complete Coil Number Consists of Class and Type Followed by Suffix Number) |                |                |                |
|------|------|-------|----------------|----------------------------------------------------------------------------------------------|----------------|----------------|----------------|
|      |      |       |                | 120 V<br>110 V                                                                               | 240 V<br>220 V | 480 V<br>440 V | 600 V<br>550 V |
| 4    | WF   | 3     | 9998WF         | 120                                                                                          | 240            | 480            | 600            |
| 5    | WG   | 3     | 9998WG         |                                                                                              |                |                |                |
| 6    | WH   | 3     | 9998WH         |                                                                                              |                |                |                |


**Table 16.116: Class 9999—Vacuum Contactor Kits**

| Kit Description                                                                                                | For Use With |          | Class 9999 Type |
|----------------------------------------------------------------------------------------------------------------|--------------|----------|-----------------|
|                                                                                                                | Type         | Size     |                 |
| Auxiliary Contacts, Non-Convertible<br>1-N.O. & 1-N.C. Isolated Contacts                                       | WF-WG<br>WH  | 4-5<br>6 | WX11            |
| Coil Circuit Auxiliary Contacts<br>1-N.O. & 1-N.C. Isolated Contacts, Delayed Break<br>1-N.C. Isolated Contact | WF<br>WG-WH  | 4<br>5-6 | WCX11<br>WLX01  |
|                                                                                                                | WG<br>WH     | 5<br>6   | LUW5<br>LUW6    |

**Table 16.117: Coil Voltage Codes**

| Volts | 110 | 120 | 220 | 240 | 440 | 480 | 550 | 600 |
|-------|-----|-----|-----|-----|-----|-----|-----|-----|
| 50 Hz | V02 | —   | V03 | —   | V06 | —   | V07 | —   |
| 60 Hz | —   | V02 | —   | V03 | —   | V06 | —   | V07 |



**Table 16.118: Dimensions, Class 8502**

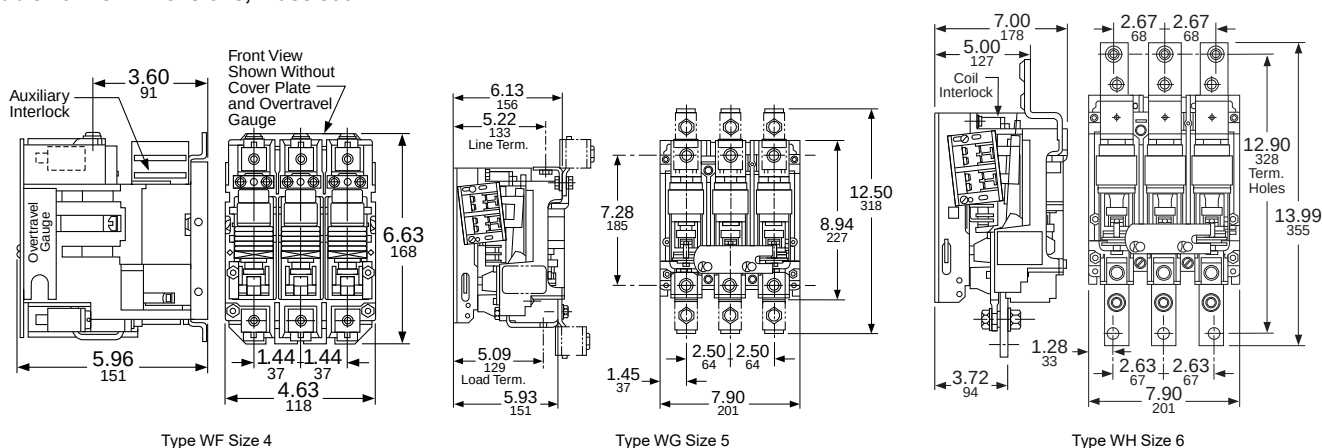

For How to Order Information, see page 16-28.




Class 8502 Type VF

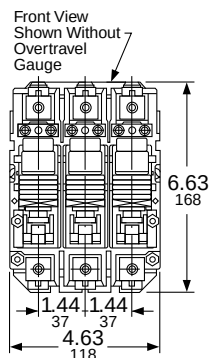


Dimensions for Class 8502 Type VF Size 4

For How to Order Information, see page 16-28.

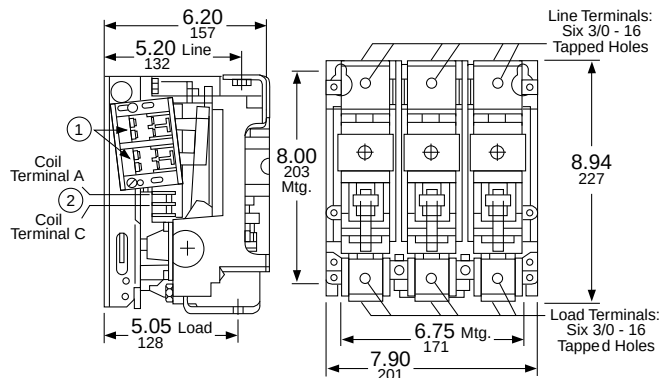

- Two dual circuit auxiliary contacts can be located on both sides of contactor.
- Coil Terminals B and D located on opposite side of contactor.

Dimensions for Class 8502 Type VG Size 5

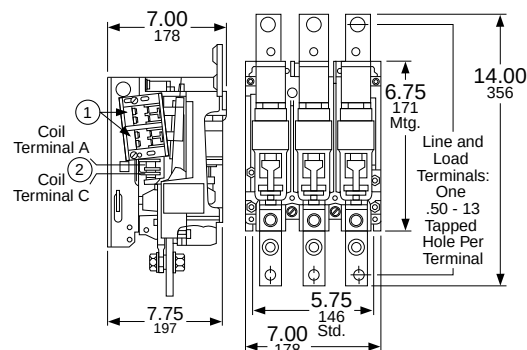

- Two dual circuit auxiliary contacts can be located on both sides of contactor.
- Coil terminals B and D located on opposite side of contactor.

Dimensions for Class 8502 Type VH Size 6

## General Information—Type V Vacuum Contactors

The Class 8502 Type V vacuum contactor is a three-pole device rated 1500 V that meets UL508 (1.5 kV) and CSA. Vacuum technology offers long life and low maintenance in a compact, lightweight design. The contactor is suitable for contaminated atmospheres because the main contacts are sealed in vacuum bottles. Also, since gravity is not used to assist contactor operation, the Class 8502 contactor can be mounted in any plane without special modifications. Type V vacuum contactors are designed for the control of inductive or non-inductive loads at voltages from 200–1500 Vac.

**NOTE:** In Table 16.119, replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard coil voltage codes listed in Table 16.122.

Table 16.119: Class 8502—Full Voltage 3 Pole Vacuum Contactors

| NEMA Size | Enclosed Ampere Rating | Locked Rotor Current (A) | Motor Voltage | Max. Hp | Open Style Type |
|-----------|------------------------|--------------------------|---------------|---------|-----------------|
| 4         | 160                    | 1080                     | 200           | 50      | VFO3●●●         |
|           |                        |                          | 230           | 60      |                 |
|           |                        |                          | 460           | 125     |                 |
|           |                        |                          | 575           | 150     |                 |
|           |                        |                          | 800           | 200     |                 |
|           |                        |                          | 1000          | 250     |                 |
| 5         | 320                    | 2160                     | 1500          | 400     | VGO3●●●         |
|           |                        |                          | 200           | 100     |                 |
|           |                        |                          | 230           | 125     |                 |
|           |                        |                          | 460           | 250     |                 |
|           |                        |                          | 575           | 300     |                 |
|           |                        |                          | 800           | 400     |                 |
| 6         | 540                    | 4320                     | 1000          | —       | VHO3●●●         |
|           |                        |                          | 1500          | 800     |                 |
|           |                        |                          | 200           | 150     |                 |
|           |                        |                          | 230           | 200     |                 |
|           |                        |                          | 460           | 400     |                 |
|           |                        |                          | 575           | 400     |                 |
|           |                        |                          | 800           | —       |                 |
|           |                        |                          | 1000          | —       |                 |
|           |                        |                          | 1500          | 1300    |                 |

Table 16.120: Class 9998—Replacement Coils for Class 8502/8702 (contains rectifier)

| Size | Type | Poles | Class and Type | Suffix<br>(the complete coil number consists of the Class, Type, and suffix) |           |           |           |
|------|------|-------|----------------|------------------------------------------------------------------------------|-----------|-----------|-----------|
|      |      |       |                | 110/120 V                                                                    | 220/240 V | 440/480 V | 550/600 V |
| 4    | VF   | 3     | 9998WVF        | 120                                                                          | 240       | 480       | 600       |
| 5    | VG   | 3     | 9998WVG        | 120                                                                          | 240       | 480       | 600       |
| 6    | VH   | 3     | 9998WH         | 120                                                                          | 240       | 480       | 600       |

Table 16.121: Class 9999—Vacuum Starter Kits

| For Use With Type | Size     | Kit Description                                                                                                | Class 9999 Type |
|-------------------|----------|----------------------------------------------------------------------------------------------------------------|-----------------|
| VF–VG<br>VH       | 4–5<br>6 | Auxiliary Contacts, Non-Convertible<br>1 N.O. & 1 N.C. Isolated Contacts                                       | WX11            |
| VF<br>VG–VH       | 4<br>5–6 | Coil Circuit Auxiliary Contacts<br>1 N.O. & 1 N.C. Isolated Contacts, Delayed Break<br>1 N.C. Isolated Contact | WCX11<br>WLX01  |
| VG<br>VH          | 5<br>6   | Lug Kits, 6 lugs included                                                                                      | LWU5<br>LWU6    |

Table 16.122: Coil Voltage Codes

| Voltage | 110 | 120 | 220 | 240 | 440 | 480 | 550 | 600 |
|---------|-----|-----|-----|-----|-----|-----|-----|-----|
| 50 Hz   | V02 | —   | V03 | —   | V06 | —   | V07 | —   |
| 60 Hz   | —   | V02 | —   | V03 | —   | V06 | —   | V07 |

### General Information—Type W Vacuum Starters

Class 8536 Type W non-reversing vacuum starters are used to switch electric motors where overload protection is not separately provided.

Type W vacuum starters are designed for operation at 600 V, 50/60 Hz. Starters are available exclusively with Motor Logic™ solid-state overload relay (SSOLR), Class 10/20 selectable.

**NOTE:** In Table 16.123, replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard coil voltage codes listed in Table 16.126.

**Table 16.123: Class 8536—Full Voltage Vacuum Starters**

| NEMA Size | Enclosed Ampere Rating | Locked Rotor Current (A) | Motor Voltage | Max. Hp | Open Style |
|-----------|------------------------|--------------------------|---------------|---------|------------|
|           |                        |                          |               |         | Type       |
| 4         | 135                    | 1080                     | 200           | 40      | WFO3●●●    |
|           |                        |                          | 230           | 50      |            |
|           |                        |                          | 460           | 100     |            |
|           |                        |                          | 575           | 100     |            |
| 5         | 270                    | 2160                     | 200           | 75      | WGO3●●●    |
|           |                        |                          | 230           | 100     |            |
|           |                        |                          | 460           | 200     |            |
|           |                        |                          | 575           | 200     |            |
| 6         | 540                    | 4320                     | 200           | 150     | WHO3●●●    |
|           |                        |                          | 230           | 200     |            |
|           |                        |                          | 460           | 400     |            |
|           |                        |                          | 575           | 400     |            |

**Table 16.124: Class 9998—Replacement Coils for Class 8536 Vacuum Starters**


| Size | Type | Poles | Class and Type | Suffix Number<br>(Complete Coil Number Consists of Class and Type Followed by Suffix Number) |                |                |                |
|------|------|-------|----------------|----------------------------------------------------------------------------------------------|----------------|----------------|----------------|
|      |      |       |                | 120 V<br>110 V                                                                               | 240 V<br>220 V | 480 V<br>440 V | 600 V<br>550 V |
| 4    | WF   | All   | 9998WF         | 120                                                                                          | 240            | 480            | 600            |
| 5    | WG   | All   | 9998WG         | 120                                                                                          | 240            | 480            | 600            |
| 6    | WH   | All   | 9998WH         | 120                                                                                          | 240            | 480            | 600            |

**Table 16.125: Class 9999—Vacuum Starter Kits**


| For Use With |          | Kit Description                                                                                                | Class 9999 Type |
|--------------|----------|----------------------------------------------------------------------------------------------------------------|-----------------|
| Type         | Size     |                                                                                                                |                 |
| WF-WG<br>WH  | 4-5<br>6 | Auxiliary Contacts, Non-Convertible<br>1 N.O. & 1 N.C. Isolated Contacts                                       | WX11            |
| WF<br>WG-WH  | 4<br>5-6 | Coil Circuit Auxiliary Contacts<br>1 N.O. & 1 N.C. Isolated Contacts, Delayed Break<br>1 N.C. Isolated Contact | WCX11<br>WLX01  |
| WG           | 5        | Lug Kits<br>(6) lugs included                                                                                  | LUW5            |

**Table 16.126: Coil Voltage Codes**


| Voltage | 110 | 120 | 220 | 240 | 440 | 480 | 550 | 600 |
|---------|-----|-----|-----|-----|-----|-----|-----|-----|
| 50 Hz   | V02 | —   | V03 | —   | V06 | —   | V07 | —   |
| 60 Hz   | —   | V02 | —   | V03 | —   | V06 | —   | V07 |

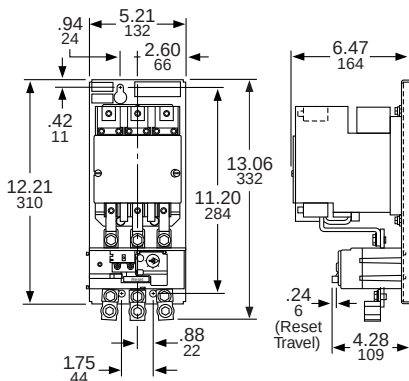

Dimensions for Class 8536 Type WF Size 4

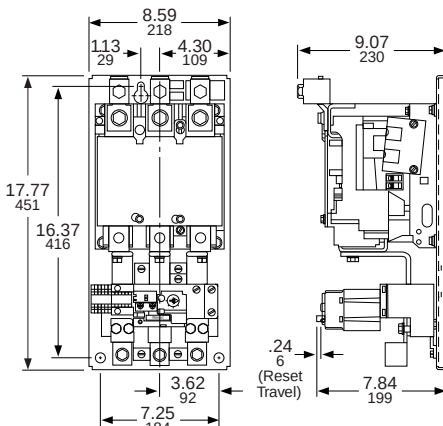

Dimensions for Class 8536 Type WG Size 5

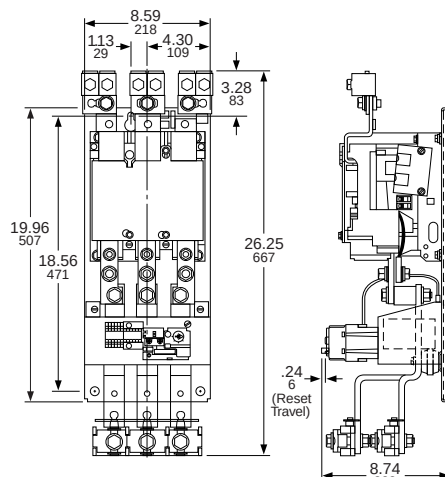

Dimensions for Class 8536 Type WH Size 6

For How to Order Information, see page 16-28



### Pre-Configured NEMA Combination Motor Starters

Save time with these simple & easy pre-configured fusible or motor circuit protector combination starters. These combination starters have the most commonly used accessories, pre-installed for quick installation. With the NEMA 12/3R enclosure, these combination starters are ready for use in most common indoor and outdoor applications. The Motor Logic electronic overload provides a wide selection range of FLA without the need for additional melting alloys.

These combination starters contain the most common features, saving you time and money:

- Fusible Disconnect (class H/K) or Motor Circuit Protector
- Ideal for indoor or outdoor applications (3R/12 enclosure)
- Trusted Square D Type S Starter with Electronic Overload
- Hand-Off-Auto with Green ON, Red OFF LED lights
- Auxiliary contacts
- SPDT Aux on disconnect

**Table 16.127: Fusible Disconnect Switch**

| Voltage (Vac) | Horsepower               | NEMA Size | Fuse Clip Size (A) | Overload Range (FLA) | Catalog No. |
|---------------|--------------------------|-----------|--------------------|----------------------|-------------|
| 208/240       | 0.75–2                   | 0 or 1    | 30                 | 3–9                  | 8538SCASP4  |
| 208/240       | 3–7.5                    | 1         | 60                 | 9–27                 | 8538SCASP5  |
| 480/600       | 5–10                     | 0 or 1    | 30                 | 6–18                 | 8538SCASP6  |
| 208/240       | 5–10 (208)<br>5–15 (240) | 1 or 2    | 60                 | 15–45                | 8538SDASP4  |
| 480/600       | 15–25                    | 2         | 60                 | 15–45                | 8538SDASP6  |

**Table 16.128: Motor Circuit Protector**

| Voltage (Vac) | Horsepower                  | NEMA Size | Fuse Clip Size (A) | Overload Range (FLA) | Catalog No. |
|---------------|-----------------------------|-----------|--------------------|----------------------|-------------|
| 240/480       | 0.75–2 (240)<br>1.5–5 (480) | 1         | 30                 | 3–9                  | 8539SCASP6  |
| 240/480       | 3–7.5 (240)<br>7.5–15 (480) | 2         | 30                 | 9–27                 | 8539SDASP5  |
| 240/480       | 5–10 (240)<br>15–25 (480)   | 2         | 50                 | 15–45                | 8539SDASP6  |

**NOTE:** For melting alloy overload relay options for the above, please consult your local Schneider Electric representative.

If 120 V is not available, add a transformer:

- 480/240 V to 120 V:  
[9070TF100D1](#)
- 208 V to 120 V:  
[9070TF100D3](#)



If Class R fuses are used, add fuse clips:

- Class R 250 V, 30 A:  
[RFBK03](#)
- Class R 250 V, 60 A:  
[RFBK06](#)
- Class R 600 V, 30 A:  
[RFBK06](#)
- Class R 600 V, 60 A:  
[RFBK06H](#)



### Fusible Disconnect Switch Type 3-Pole Polyphase—600 Vac Maximum—50–60 Hz

Class 8538 and 8539 Type S combination starters combine the requirements of motor overload and short circuit protection into one package. These starters are manufactured according to NEMA standards and are UL Listed (some Form numbers may not be listed—contact the Customer Care Center). Class 8538 and 8539 combination starters operate at 600 Vac maximum, 50–60 Hz, and can be provided with one of four overloaded relay styles (refer to [page 16-33](#)).

For Form H30\* (special lower-FLA factory-assembled starter combinations with Motor Logic SSOLR protection), see [Solid-State Overload Relay Forms](#), [page 16-119](#).

**Table 16.129: Class 8538 Fusible Full Voltage Type (Class H Fuse Clips), with Motor Logic SSOLR (replace ●●● with the voltage code)**<sup>[1]</sup>

| Ratings                                  |                      |              | Fuse<br>Clip<br>Size<br>(A) | NEMA 1<br>General Purpose<br>Enclosure | NEMA 4 & 4X<br>Watertight and<br>Dusttight<br>Enclosure<br>Stainless Steel<br>(304)<br>(Sizes 0-5)[2] | NEMA 4X<br>Watertight,<br>Dusttight and<br>Corrosion<br>Resistant Polyester<br>Enclosure | NEMA 12/3R[3]<br>Dusttight and Driptight<br>Industrial Use Enclosure |                           |
|------------------------------------------|----------------------|--------------|-----------------------------|----------------------------------------|-------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|----------------------------------------------------------------------|---------------------------|
| Motor<br>Voltage<br>(Starter<br>Voltage) | Max. Hp<br>Polyphase | NEMA<br>Size |                             |                                        |                                                                                                       |                                                                                          | With<br>External Reset                                               | Without<br>External Reset |
|                                          |                      |              |                             |                                        |                                                                                                       |                                                                                          | Type [4]                                                             | Type [4]                  |
| 200<br>(208)                             | 3                    | 0            | 30                          | SBG12●●●H30 [5]                        | SBW12●●●H30 [5]                                                                                       | SBW22●●●H30 [5]                                                                          | SBA22●●●H30 [5]                                                      | SBA12●●●H30 [5]           |
|                                          | 5                    | 1            | 30                          | SCG12●●●H30 [5]                        | SCW12●●●H30 [5]                                                                                       | SCW22●●●H30 [5]                                                                          | SCA22●●●H30 [5]                                                      | SCA12●●●H30 [5]           |
|                                          | 7-1/2                | 1            | 60                          | SCG13●●●H30 [5]                        | SCW13●●●H30 [5]                                                                                       | SCW23●●●H30 [5]                                                                          | SCA23●●●H30 [5]                                                      | SCA13●●●H30 [5]           |
|                                          | 10                   | 2            | 60                          | SDG12●●●H30 [5]                        | SDW12●●●H30 [5]                                                                                       | SDW22●●●H30 [5]                                                                          | SDA22●●●H30 [5]                                                      | SDA12●●●H30 [5]           |
|                                          | 20                   | 3            | 100                         | SEG15●●●H30                            | SEW15●●●H30                                                                                           | SEW25●●●H30                                                                              | SEA25●●●H30                                                          | SEA15●●●H30               |
|                                          | 25                   | 3            | 200                         | SEG12●●●H30                            | SEW12●●●H30                                                                                           | —                                                                                        | SEA22●●●H30                                                          | SEA12●●●H30               |
|                                          | 40                   | 4            | 200                         | SFG15●●●H30                            | SFW15●●●H30                                                                                           | —                                                                                        | SFA25●●●H30                                                          | SFA15●●●H30               |
|                                          | 75                   | 5            | 400                         | SGG15●●●H30                            | SGW15●●●H30                                                                                           | —                                                                                        | SGA25●●●H30                                                          | SGA15●●●H30               |
| 230<br>(240)                             | 150                  | 6            | 600                         | SHG13●●●H30                            | SHW13●●●H30                                                                                           | —                                                                                        | SHA23●●●H30                                                          | SHA13●●●H30               |
|                                          | 3                    | 0            | 30                          | SBG12●●●H30 [5]                        | SBW12●●●H30 [5]                                                                                       | SBW22●●●H30 [5]                                                                          | SBA22●●●H30 [5]                                                      | SBA12●●●H30 [5]           |
|                                          | 5                    | 1            | 30                          | SCG12●●●H30 [5]                        | SCW12●●●H30 [5]                                                                                       | SCW22●●●H30 [5]                                                                          | SCA22●●●H30 [5]                                                      | SCA12●●●H30 [5]           |
|                                          | 7-1/2                | 1            | 60                          | SCG13●●●H30 [5]                        | SCW13●●●H30 [5]                                                                                       | SCW23●●●H30 [5]                                                                          | SCA23●●●H30 [5]                                                      | SCA13●●●H30 [5]           |
|                                          | 15                   | 2            | 60                          | SDG12●●●H30                            | SDW12●●●H30 [5]                                                                                       | SDW22●●●H30 [5]                                                                          | SDA22●●●H30 [5]                                                      | SDA12●●●H30 [5]           |
|                                          | 25                   | 3            | 100                         | SEG15●●●H30                            | SEW15●●●H30                                                                                           | SEW25●●●H30                                                                              | SEA25●●●H30                                                          | SEA15●●●H30               |
|                                          | 30                   | 3            | 200                         | SEG12●●●H30                            | SEW12●●●H30                                                                                           | —                                                                                        | SEA22●●●H30                                                          | SEA12●●●H30               |
|                                          | 50                   | 4            | 200                         | SFG15●●●H30                            | SFW15●●●H30                                                                                           | —                                                                                        | SFA25●●●H30                                                          | SFA15●●●H30               |
| 460<br>(480)                             | 100                  | 5            | 400                         | SGG15●●●H30                            | SGW15●●●H30                                                                                           | —                                                                                        | SGA25●●●H30                                                          | SGA15●●●H30               |
|                                          | 200                  | 6            | 600                         | SHG13●●●H30                            | SHW13●●●H30                                                                                           | —                                                                                        | SHA23●●●H30                                                          | SHA13●●●H30               |
|                                          | 5                    | 0            | 30                          | SBG13●●●H30 [5]                        | SBW13●●●H30 [5]                                                                                       | SBW23●●●H30 [5]                                                                          | SBA23●●●H30 [5]                                                      | SBA13●●●H30 [5]           |
|                                          | 10                   | 1            | 30                          | SCG14●●●H30 [5]                        | SCW14●●●H30 [5]                                                                                       | SCW24●●●H30 [5]                                                                          | SCA24●●●H30 [5]                                                      | SCA14●●●H30 [5]           |
|                                          | 15                   | 2            | 30                          | SDG16●●●H301                           | SDW16●●●H301                                                                                          | SDW26●●●H301                                                                             | SDA26●●●H301                                                         | SDA16●●●H301              |
|                                          | 25                   | 2            | 60                          | SDG14●●●H30 [5]                        | SDW14●●●H30 [5]                                                                                       | SDW24●●●H30 [5]                                                                          | SDA24●●●H30 [5]                                                      | SDA14●●●H30 [5]           |
|                                          | 50                   | 3            | 100                         | SEG13●●●H30                            | SEW13●●●H30                                                                                           | SEW23●●●H30                                                                              | SEA23●●●H30                                                          | SEA13●●●H30               |
|                                          | 100                  | 4            | 200                         | SFG13●●●H30                            | SFW13●●●H30                                                                                           | —                                                                                        | SFA23●●●H30                                                          | SFA13●●●H30               |
| 575<br>(600)                             | 200                  | 5            | 400                         | SGG13●●●H30                            | SGW13●●●H30                                                                                           | —                                                                                        | SGA23●●●H30                                                          | SGA13●●●H30               |
|                                          | 400                  | 6            | 600                         | SHG12●●●H30                            | SHW12●●●H30                                                                                           | —                                                                                        | SHA22●●●H30                                                          | SHA12●●●H30               |
|                                          | 5                    | 0            | 30                          | SBG13●●●H30                            | SBW13●●●H30                                                                                           | SBW23●●●H30                                                                              | SBA23●●●H30                                                          | SBA13●●●H30               |
|                                          | 10                   | 1            | 30                          | SCG14●●●H30                            | SCW14●●●H30                                                                                           | SCW24●●●H30                                                                              | SCA24●●●H30                                                          | SCA14●●●H30               |
|                                          | 15                   | 2            | 30                          | SDG16●●●H301                           | SDW16●●●H301                                                                                          | SDW26●●●H301                                                                             | SDA26●●●H301                                                         | SDA16●●●H301              |
|                                          | 25                   | 2            | 60                          | SDG14●●●H30                            | SDW14●●●H30                                                                                           | SDW24●●●H30                                                                              | SDA24●●●H30                                                          | SDA14●●●H30               |
|                                          | 50                   | 3            | 100                         | SEG13●●●H30                            | SEW13●●●H30                                                                                           | SEW23●●●H30                                                                              | SEA23●●●H30                                                          | SEA13●●●H30               |
|                                          | 100                  | 4            | 200                         | SFG13●●●H30                            | SFW13●●●H30                                                                                           | —                                                                                        | SFA23●●●H30                                                          | SFA13●●●H30               |
|                                          | 200                  | 5            | 400                         | SGG13●●●H30                            | SGW13●●●H30                                                                                           | —                                                                                        | SGA23●●●H30                                                          | SGA13●●●H30               |
|                                          | 400                  | 6            | 600                         | SHG12●●●H30                            | SHW12●●●H30                                                                                           | —                                                                                        | SHA22●●●H30                                                          | SHA12●●●H30               |



**3or5 Days**  
Laser Delivery

Schneider Electric offers express shipping for factory modified NEMA Combo Starters. When you need them fast, our Laser™ Delivery program is the answer to getting your product when you need it most. Ask for Laser™ Delivery, then select the product and the modifications you need when you place your order. It's as easy as that!

**NOTE:** Some control transformers may require the use of oversized enclosures. Refer to .

**Table 16.130: Class 8538 Fusible Disconnect Switch Type (Class H Fuse Clips), Single Phase, <sup>[6]</sup><sup>[7]</sup> with Melting Alloy Overload Relays (see [Thermal Unit Selection](#), [page 16-132](#))**

| Motor Voltage | Max. Hp | Coil Voltage | NEMA Size | Poles | Fuse Clip Size (A) | NEMA 1 General Purpose Enclosure | NEMA 4 & 4X Watertight and Dusttight Enclosure Stainless Steel (304) | NEMA 4X Watertight, Dusttight and Corrosion Resistant Polyester Enclosure | NEMA 12/3R/3J Dusttight and Driptight Industrial Use Enclosure |                        |
|---------------|---------|--------------|-----------|-------|--------------------|----------------------------------|----------------------------------------------------------------------|---------------------------------------------------------------------------|----------------------------------------------------------------|------------------------|
|               |         |              |           |       |                    | Type                             | Type                                                                 | Type                                                                      | With External Reset                                            | Without External Reset |
| 120           | 1       | 120          | 0         | 2     | 30                 | SBG62V02                         | SBW62V02                                                             | SBW65V02                                                                  | SBA65V02                                                       | SBA62V02               |
|               | 2       |              | 1         |       | 30                 | SCG62V02                         | SCW62V02                                                             | SCW65V02                                                                  | SCA65V02                                                       | SCA62V02               |
|               | 3       |              | 2         |       | 60                 | SDG62V02                         | SDW62V02                                                             | SDW65V02                                                                  | SDA65V02                                                       | SDA62V02               |
| 240           | 2       | 240          | 0         | 2     | 30                 | SBG62V03                         | SBW62V03                                                             | SBW65V03                                                                  | SBA65V03                                                       | SBA62V03               |
|               | 3       |              | 1         |       | 30                 | SCG62V03                         | SCW62V03                                                             | SCW65V03                                                                  | SCA65V03                                                       | SCA62V03               |
|               | 7-1/2   |              | 2         |       | 60                 | SDG62V03                         | SDW62V03                                                             | SDW65V03                                                                  | SDA65V03                                                       | SDA62V03               |

For How to Order Information, see [page 16-28](#).

<sup>[1]</sup> To order melting alloy overload relay, remove form "H30" from part number.

<sup>[2]</sup> Size 6 starters are NEMA 4 painted sheet steel enclosures.

<sup>[3]</sup> NEMA 12 enclosures can be field modified for outdoor non-corrosive and non-service entrance rated applications. See [page 16-112](#) for more information.

<sup>[4]</sup> Replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard coil voltage codes shown in

<sup>[5]</sup> **Form H30**, with the possibility of a fourth character to select a lower FLA range (for example, **H308**). See "Solid-State Overload Relay Forms" on [page 16-119](#)

<sup>[6]</sup> Single-phase units require one thermal unit. They are not available with **Form H••** (solid-state overload relays).

<sup>[7]</sup> Not included in the Laser™ Delivery program.



## Non-Fusible Disconnect Switch Type

### 3-Pole Polyphase—600 Vac Maximum—50–60 Hz

For Form H30• (special lower-FLA factory-assembled starter combinations with Motor Logic SSOLR protection), see [Solid-State Overload Relay Forms](#), page 16-119.

**Table 16.131: Class 8538 Non-Fusible Full Voltage Type, Non-Reversing, with Motor Logic SSOLR (replace ●●● with the voltage code)<sup>[8]</sup>**

| Motor Voltage (Starter Voltage) | Ratings<br>Max. Hp Polyphase | NEMA Size | NEMA 1 General Purpose Enclosure | NEMA 4 & 4X Watertight and Dusttight Enclosure Stainless Steel (304) (Sizes 0–5) <sup>[9]</sup> | NEMA 4X Watertight, Dusttight and Corrosion Resistant Polyester Enclosure | NEMA 12/3R <sup>[10]</sup> Dusttight and Driptight Industrial Enclosure |                                                |
|---------------------------------|------------------------------|-----------|----------------------------------|-------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------|-------------------------------------------------------------------------|------------------------------------------------|
|                                 |                              |           | Type <sup>[11]</sup>             | Type <sup>[11]</sup>                                                                            | Type <sup>[11]</sup>                                                      | With External Reset<br>Type <sup>[11]</sup>                             | Without External Reset<br>Type <sup>[11]</sup> |
| 200 (208)                       | 3                            | 0         | SBG11●●●H30 <sup>[12]</sup>      | SBW11●●●H30 <sup>[12]</sup>                                                                     | SBW21●●●H30 <sup>[12]</sup>                                               | SBA21●●●H30 <sup>[12]</sup>                                             | SBA11●●●H30 <sup>[12]</sup>                    |
|                                 | 7-1/2                        | 1         | SCG11●●●H30 <sup>[12]</sup>      | SCW11●●●H30 <sup>[12]</sup>                                                                     | SCW21●●●H30 <sup>[12]</sup>                                               | SCA21●●●H30 <sup>[12]</sup>                                             | SCA11●●●H30 <sup>[12]</sup>                    |
|                                 | 10                           | 2         | SDG11●●●H30 <sup>[12]</sup>      | SDW11●●●H30 <sup>[12]</sup>                                                                     | SDW21●●●H30 <sup>[12]</sup>                                               | SDA21●●●H30 <sup>[12]</sup>                                             | SDA11●●●H30 <sup>[12]</sup>                    |
|                                 | 25                           | 3         | SEG11●●●H30                      | SEW11●●●H30                                                                                     | SEW21●●●H30                                                               | SEA21●●●H30                                                             | SEA11●●●H30                                    |
|                                 | 40                           | 4         | SFG11●●●H30                      | SFW11●●●H30                                                                                     | —                                                                         | SFA21●●●H30                                                             | SFA11●●●H30                                    |
|                                 | 75                           | 5         | SGG11●●●H30                      | SGW11●●●H30                                                                                     | —                                                                         | SGA21●●●H30                                                             | SGA11●●●H30                                    |
| 230 (240)                       | 150                          | 6         | SHG11●●●H30                      | SHW11●●●H30                                                                                     | —                                                                         | SHA21●●●H30                                                             | SHA11●●●H30                                    |
|                                 | 3                            | 0         | SBG11●●●H30 <sup>[12]</sup>      | SBW11●●●H30 <sup>[12]</sup>                                                                     | SBW21●●●H30 <sup>[12]</sup>                                               | SBA21●●●H30 <sup>[12]</sup>                                             | SBA11●●●H30 <sup>[12]</sup>                    |
|                                 | 7-1/2                        | 1         | SCG11●●●H30 <sup>[12]</sup>      | SCW11●●●H30 <sup>[12]</sup>                                                                     | SCW21●●●H30 <sup>[12]</sup>                                               | SCA21●●●H30 <sup>[12]</sup>                                             | SCA11●●●H30 <sup>[12]</sup>                    |
|                                 | 15                           | 2         | SDG11●●●H30 <sup>[12]</sup>      | SDW11●●●H30 <sup>[12]</sup>                                                                     | SDW21●●●H30 <sup>[12]</sup>                                               | SDA21●●●H30 <sup>[12]</sup>                                             | SDA11●●●H30 <sup>[12]</sup>                    |
|                                 | 30                           | 3         | SEG11●●●H30                      | SEW11●●●H30                                                                                     | SEW21●●●H30                                                               | SEA21●●●H30                                                             | SEA11●●●H30                                    |
|                                 | 50                           | 4         | SFG11●●●H30                      | SFW11●●●H30                                                                                     | —                                                                         | SFA21●●●H30                                                             | SFA11●●●H30                                    |
| 460 (480)                       | 100                          | 5         | SGG11●●●H30                      | SGW11●●●H30                                                                                     | —                                                                         | SGA21●●●H30                                                             | SGA11●●●H30                                    |
|                                 | 200                          | 6         | SHG11●●●H30                      | SHW11●●●H30                                                                                     | —                                                                         | SHA21●●●H30                                                             | SHA11●●●H30                                    |
|                                 | 5                            | 0         | SBG11●●●H30 <sup>[12]</sup>      | SBW11●●●H30 <sup>[12]</sup>                                                                     | SBW21●●●H30 <sup>[12]</sup>                                               | SBA21●●●H30 <sup>[12]</sup>                                             | SBA11●●●H30 <sup>[12]</sup>                    |
|                                 | 10                           | 1         | SCG11●●●H30 <sup>[12]</sup>      | SCW11●●●H30 <sup>[12]</sup>                                                                     | SCW21●●●H30 <sup>[12]</sup>                                               | SCA21●●●H30 <sup>[12]</sup>                                             | SCA11●●●H30 <sup>[12]</sup>                    |
|                                 | 25                           | 2         | SDG11●●●H30 <sup>[12]</sup>      | SDW11●●●H30 <sup>[12]</sup>                                                                     | SDW21●●●H30 <sup>[12]</sup>                                               | SDA21●●●H30 <sup>[12]</sup>                                             | SDA11●●●H30 <sup>[12]</sup>                    |
|                                 | 50                           | 3         | SEG11●●●H30                      | SEW11●●●H30                                                                                     | SEW21●●●H30                                                               | SEA21●●●H30                                                             | SEA11●●●H30                                    |
| 575 (600)                       | 100                          | 4         | SFG11●●●H30                      | SFW11●●●H30                                                                                     | —                                                                         | SFA21●●●H30                                                             | SFA11●●●H30                                    |
|                                 | 200                          | 5         | SGG11●●●H30                      | SGW11●●●H30                                                                                     | —                                                                         | SGA21●●●H30                                                             | SGA11●●●H30                                    |
|                                 | 400                          | 6         | SHG11●●●H30                      | SHW11●●●H30                                                                                     | —                                                                         | SHA21●●●H30                                                             | SHA11●●●H30                                    |
|                                 | 5                            | 0         | SBG11●●●H30                      | SBW11●●●H30                                                                                     | SBW21●●●H30                                                               | SBA21●●●H30                                                             | SBA11●●●H30                                    |
|                                 | 10                           | 1         | SCG11●●●H30                      | SCW11●●●H30                                                                                     | SCW21●●●H30                                                               | SCA21●●●H30                                                             | SCA11●●●H30                                    |
|                                 | 25                           | 2         | SDG11●●●H30                      | SDW11●●●H30                                                                                     | SDW21●●●H30                                                               | SDA21●●●H30                                                             | SDA11●●●H30                                    |

**Table 16.132: Class 8538 Non-Fusible Disconnect Switch Type, Single Phase, with Melting Alloy Overload Relay <sup>[13]</sup> <sup>[14]</sup>**  
(see [Thermal Unit Selection](#), page 16-132)

| Motor Voltage | Max. Hp | Coil Voltage | NEMA Size | Poles | NEMA 1 General Purpose Enclosure | NEMA 4 & 4X Watertight and Dusttight Enclosure Stainless Steel (304) | NEMA 4X Watertight, Dusttight and Corrosion Resistant Polyester Enclosure | NEMA 12/3R <sup>[10]</sup> Dusttight and Driptight Industrial Enclosure |                                |
|---------------|---------|--------------|-----------|-------|----------------------------------|----------------------------------------------------------------------|---------------------------------------------------------------------------|-------------------------------------------------------------------------|--------------------------------|
|               |         |              |           |       | Type                             | Type                                                                 | Type                                                                      | With External Reset<br>Type                                             | Without External Reset<br>Type |
| 120           | 1       | 120          | 0         | 2     | SBG61V02                         | SBW61V02                                                             | SBW64V02                                                                  | SBA64V02                                                                | SBA61V02                       |
|               | 2       |              | 1         |       | SCG61V02                         | SCW61V02                                                             | SCW64V02                                                                  | SCA64V02                                                                | SCA61V02                       |
|               | 3       |              | 2         |       | SDG61V02                         | SDW61V02                                                             | SDW64V02                                                                  | SDA64V02                                                                | SDA61V02                       |
| 240           | 2       | 240          | 0         | 2     | SBG61V03                         | SBW61V03                                                             | SBW64V03                                                                  | SBA64V03                                                                | SBA61V03                       |
|               | 3       |              | 1         |       | SCG61V03                         | SCW61V03                                                             | SCW64V03                                                                  | SCA64V03                                                                | SCA61V03                       |
|               | 7-1/2   |              | 2         |       | SDG61V03                         | SDW61V03                                                             | SDW64V03                                                                  | SDA64V03                                                                | SDA61V03                       |

**NOTE:** Some control transformers may require the use of oversized enclosures. Refer to .

**Table 16.133: Coil Voltage Codes**

| Voltage             |         | Code |
|---------------------|---------|------|
| 60 Hz               | 50 Hz   |      |
| 24 <sup>[15]</sup>  |         | V01  |
| 120 <sup>[16]</sup> | 110     | V02  |
| 208                 |         | V08  |
| 240                 | 220     | V03  |
| 277                 |         | V04  |
| 480                 | 440     | V06  |
| 600                 | 550     | V07  |
| Specify             | Specify | V99  |

**NOTE:** For voltage codes used with control transformers, see page . Form S (separate control) is used when a separate source of power is available for the control (coil) voltage. Form S is available at no charge.

For How to Order Information, see [page 16-28](#).



<sup>[8]</sup> To order melting alloy overload relay, remove form "H30" from part number.

<sup>[9]</sup> Size 6 starters are NEMA 4 painted sheet steel enclosures.

<sup>[10]</sup> NEMA 12 enclosures can be field modified for outdoor non-corrosive and non-service entrance rated applications. See [page 16-112](#) for more information.

<sup>[11]</sup> Replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard coil voltage codes shown in

<sup>[12]</sup> **Form H30**, with the possibility of a fourth character to select a lower FLA range (for example, **H308**). See "Solid-State Overload Relay Forms" on [page 16-119](#)

<sup>[13]</sup> Single-phase units require one thermal unit. They are not available with **Form H••** (solid-state overload relays).

<sup>[14]</sup> Not included in the Laser™ Delivery program.

<sup>[15]</sup> 24 V coils are not available on Sizes 4–7. On Sizes 00–3, where 24 V coils are available, **Form S** (separate control) must be specified (for example, order as 8538SBG11V01S).

<sup>[16]</sup> These voltage codes must include **Form S** (furnished at no charge).

When specifying **Form S**, please include the motor voltage when ordering (for example, order as 8538SCG11V02S).



# Fusible Disconnect Switch Type with Class R Fuse Clips 3-Pole Polyphase—600 Vac Maximum—50–60 Hz

For Form H30\* (special lower-FLA factory-assembled starter combinations with Motor Logic SSOLR protection), see [Solid-State Overload Relay Forms](#), page 16-119.

**Table 16.134: Class 8538 Fusible (with Class R Fuse Clips) Full Voltage Type, Non-Reversing, with Motor Logic SSOLR (100,000 AIC Rated) (replace ●●● with the voltage code)**<sup>[17]</sup>

| Ratings                         |                   |           |                    | NEMA 1 General Purpose Enclosure | NEMA 4 & 4X Watertight and Dusttight Enclosure Stainless Steel (304) (Sizes 0–5) <sup>[18]</sup> | NEMA 4 & 4X Watertight, Dusttight and Corrosion Resistant Polyester Enclosure | NEMA 12/3R <sup>[19]</sup> Dusttight and Driptight Industrial Enclosure |                             |
|---------------------------------|-------------------|-----------|--------------------|----------------------------------|--------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|-------------------------------------------------------------------------|-----------------------------|
| Motor Voltage (Starter Voltage) | Max. Hp Polyphase | NEMA Size | Fuse Clip Size (A) |                                  |                                                                                                  |                                                                               | With External Reset                                                     | Without External Reset      |
|                                 |                   |           |                    | Type <sup>[20]</sup>             | Type <sup>[20]</sup>                                                                             | Type <sup>[20]</sup>                                                          | Type <sup>[20]</sup>                                                    | Type <sup>[20]</sup>        |
| 200 (208)                       | 3                 | 0         | 30                 | SBG32●●●H30 <sup>[21]</sup>      | SBW32●●●H30 <sup>[21]</sup>                                                                      | SBW42●●●H30 <sup>[21]</sup>                                                   | SBA42●●●H30 <sup>[21]</sup>                                             | SBA32●●●H30 <sup>[21]</sup> |
|                                 | 5                 | 1         | 30                 | SCG32●●●H30 <sup>[21]</sup>      | SCW32●●●H30 <sup>[21]</sup>                                                                      | SCW42●●●H30 <sup>[21]</sup>                                                   | SCA42●●●H30 <sup>[21]</sup>                                             | SCA32●●●H30 <sup>[21]</sup> |
|                                 | 7-1/2             | 1         | 60                 | SCG33●●●H30 <sup>[21]</sup>      | SCW33●●●H30 <sup>[21]</sup>                                                                      | SCW43●●●H30 <sup>[21]</sup>                                                   | SCA43●●●H30 <sup>[21]</sup>                                             | SCA33●●●H30 <sup>[21]</sup> |
|                                 | 10                | 2         | 60                 | SDG32●●●H30 <sup>[21]</sup>      | SDW32●●●H30 <sup>[21]</sup>                                                                      | SDW42●●●H30 <sup>[21]</sup>                                                   | SDA42●●●H30 <sup>[21]</sup>                                             | SDA32●●●H30 <sup>[21]</sup> |
|                                 | 20                | 3         | 100                | SEG35●●●H30                      | SEW35●●●H30                                                                                      | SEW45●●●H30                                                                   | SEA45●●●H30                                                             | SEA35●●●H30                 |
|                                 | 25                | 3         | 200                | SEG32●●●H30                      | SEW32●●●H30                                                                                      | —                                                                             | SEA42●●●H30                                                             | SEA32●●●H30                 |
|                                 | 40                | 4         | 200                | SFG35●●●H30                      | SFW35●●●H30                                                                                      | —                                                                             | SFA45●●●H30                                                             | SFA35●●●H30                 |
|                                 | 75                | 5         | 400                | SGG35●●●H30                      | SGW35●●●H30                                                                                      | —                                                                             | SGA45●●●H30                                                             | SGA35●●●H30                 |
| 230 (240)                       | 150               | 6         | 600                | SHG33●●●H30                      | SHW33●●●H30                                                                                      | —                                                                             | SHA43●●●H30                                                             | SHA33●●●H30                 |
|                                 | 3                 | 0         | 30                 | SBG32●●●H30 <sup>[21]</sup>      | SBW32●●●H30 <sup>[21]</sup>                                                                      | SBW42●●●H30 <sup>[21]</sup>                                                   | SBA42●●●H30 <sup>[21]</sup>                                             | SBA32●●●H30 <sup>[21]</sup> |
|                                 | 5                 | 1         | 30                 | SCG32●●●H30 <sup>[21]</sup>      | SCW32●●●H30 <sup>[21]</sup>                                                                      | SCW42●●●H30 <sup>[21]</sup>                                                   | SCA42●●●H30 <sup>[21]</sup>                                             | SCA32●●●H30 <sup>[21]</sup> |
|                                 | 7-1/2             | 1         | 60                 | SCG33●●●H30 <sup>[21]</sup>      | SCW33●●●H30 <sup>[21]</sup>                                                                      | SCW43●●●H30 <sup>[21]</sup>                                                   | SCA43●●●H30 <sup>[21]</sup>                                             | SCA33●●●H30 <sup>[21]</sup> |
|                                 | 15                | 2         | 60                 | SDG32●●●H30 <sup>[21]</sup>      | SDW32●●●H30 <sup>[21]</sup>                                                                      | SDW42●●●H30 <sup>[21]</sup>                                                   | SDA42●●●H30 <sup>[21]</sup>                                             | SDA32●●●H30 <sup>[21]</sup> |
|                                 | 25                | 3         | 100                | SEG35●●●H30                      | SEW35●●●H30                                                                                      | SEW45●●●H30                                                                   | SEA45●●●H30                                                             | SEA35●●●H30                 |
|                                 | 30                | 3         | 200                | SEG32●●●H30                      | SEW32●●●H30                                                                                      | —                                                                             | SEA42●●●H30                                                             | SEA32●●●H30                 |
|                                 | 50                | 4         | 200                | SFG35●●●H30                      | SFW35●●●H30                                                                                      | —                                                                             | SFA45●●●H30                                                             | SFA35●●●H30                 |
| 460 (480)                       | 100               | 5         | 400                | SGG35●●●H30                      | SGW35●●●H30                                                                                      | —                                                                             | SGA45●●●H30                                                             | SGA35●●●H30                 |
|                                 | 200               | 6         | 600                | SHG33●●●H30                      | SHW33●●●H30                                                                                      | —                                                                             | SHA43●●●H30                                                             | SHA33●●●H30                 |
|                                 | 5                 | 0         | 30                 | SBG33●●●H30 <sup>[21]</sup>      | SBW33●●●H30 <sup>[21]</sup>                                                                      | SBW43●●●H30 <sup>[21]</sup>                                                   | SBA43●●●H30 <sup>[21]</sup>                                             | SBA33●●●H30 <sup>[21]</sup> |
|                                 | 10                | 1         | 30                 | SCG34●●●H30 <sup>[21]</sup>      | SCW34●●●H30 <sup>[21]</sup>                                                                      | SCW44●●●H30 <sup>[21]</sup>                                                   | SCA44●●●H30 <sup>[21]</sup>                                             | SCA34●●●H30 <sup>[21]</sup> |
|                                 | 15                | 2         | 30                 | SDG36●●●H301                     | SDW36●●●H301                                                                                     | SDW46●●●H301                                                                  | SDA46●●●H301                                                            | SDA36●●●H301                |
|                                 | 25                | 2         | 60                 | SDG34●●●H30 <sup>[21]</sup>      | SDW34●●●H30 <sup>[21]</sup>                                                                      | SDW44●●●H30 <sup>[21]</sup>                                                   | SDA44●●●H30 <sup>[21]</sup>                                             | SDA34●●●H30 <sup>[21]</sup> |
|                                 | 50                | 3         | 100                | SEG33●●●H30                      | SEW33●●●H30                                                                                      | SEW43●●●H30                                                                   | SEA43●●●H30                                                             | SEA33●●●H30                 |
|                                 | 100               | 4         | 200                | SFG33●●●H30                      | SFW33●●●H30                                                                                      | —                                                                             | SFA43●●●H30                                                             | SFA33●●●H30                 |
| 575 (600)                       | 200               | 5         | 400                | SGG33●●●H30                      | SGW33●●●H30                                                                                      | —                                                                             | SGA43●●●H30                                                             | SGA33●●●H30                 |
|                                 | 400               | 6         | 600                | SHG32●●●H30                      | SHW32●●●H30                                                                                      | —                                                                             | SHA42●●●H30                                                             | SHA32●●●H30                 |
|                                 | 5                 | 0         | 30                 | SBG33●●●H30 <sup>[21]</sup>      | SBW33●●●H30 <sup>[21]</sup>                                                                      | SBW43●●●H30 <sup>[21]</sup>                                                   | SBA43●●●H30 <sup>[21]</sup>                                             | SBA33●●●H30 <sup>[21]</sup> |
|                                 | 10                | 1         | 30                 | SCG34●●●H30 <sup>[21]</sup>      | SCW34●●●H30 <sup>[21]</sup>                                                                      | SCW44●●●H30 <sup>[21]</sup>                                                   | SCA44●●●H30 <sup>[21]</sup>                                             | SCA34●●●H30 <sup>[21]</sup> |
|                                 | 15                | 2         | 30                 | SDG36●●●H301                     | SDW36●●●H301                                                                                     | SDW46●●●H301                                                                  | SDA46●●●H301                                                            | SDA36●●●H301                |
|                                 | 25                | 2         | 60                 | SDG34●●●H30 <sup>[21]</sup>      | SDW34●●●H30 <sup>[21]</sup>                                                                      | SDW44●●●H30 <sup>[21]</sup>                                                   | SDA44●●●H30 <sup>[21]</sup>                                             | SDA34●●●H30 <sup>[21]</sup> |
|                                 | 50                | 3         | 100                | SEG33●●●H30                      | SEW33●●●H30                                                                                      | SEW43●●●H30                                                                   | SEA43●●●H30                                                             | SEA33●●●H30                 |
|                                 | 100               | 4         | 200                | SFG33●●●H30                      | SFW33●●●H30                                                                                      | —                                                                             | SFA43●●●H30                                                             | SFA33●●●H30                 |
| 575 (600)                       | 200               | 5         | 400                | SGG33●●●H30                      | SGW33●●●H30                                                                                      | —                                                                             | SGA43●●●H30                                                             | SGA33●●●H30                 |
|                                 | 400               | 6         | 600                | SHG32●●●H30                      | SHW32●●●H30                                                                                      | —                                                                             | SHA42●●●H30                                                             | SHA32●●●H30                 |

**NOTE:** Some control transformers may require the use of oversized enclosures. Refer to .

**Table 16.135: Class 8538 Fusible Disconnect Switch Type (Class R Fuses), Single Phase with Melting Alloy Overload Relay**<sup>[22][23]</sup> (see [Thermal Unit Selection](#), page 16-132)

| Motor Voltage | Max. Hp | Coil Voltage | NEMA Size | Poles | Fuse Clip Size (A) | NEMA 1 General Purpose Enclosure | NEMA 4 & 4X Watertight and Dusttight Enclosure Stainless Steel | NEMA 4X Watertight, Dusttight and Corrosion Resistant Polyester Enclosure | NEMA 12/3R Dusttight and Driptight Industrial Use Enclosure |                        |
|---------------|---------|--------------|-----------|-------|--------------------|----------------------------------|----------------------------------------------------------------|---------------------------------------------------------------------------|-------------------------------------------------------------|------------------------|
|               |         |              |           |       |                    | Type                             | Type                                                           | Type                                                                      | With External Reset                                         | Without External Reset |
| 120           | 1       | 120          | 0         | 2     | 30                 | SBG63V02                         | SBW63V02                                                       | SBW66V02                                                                  | SBA66V02                                                    | SBA63V02               |
|               | 2       |              | 1         |       | 30                 | SCG63V02                         | SCW63V02                                                       | SCW66V02                                                                  | SCA66V02                                                    | SCA63V02               |
|               | 3       |              | 2         |       | 60                 | SDG63V02                         | SDW63V02                                                       | SDW66V02                                                                  | SDA66V02                                                    | SDA63V02               |
| 240           | 2       | 240          | 0         | 2     | 30                 | SBG63V03                         | SBW63V03                                                       | SBW66V03                                                                  | SBA66V03                                                    | SBA63V03               |
|               | 3       |              | 1         |       | 30                 | SCG63V03                         | SCW63V03                                                       | SCW66V03                                                                  | SCA66V03                                                    | SCA63V03               |
|               | 7-1/2   |              | 2         |       | 60                 | SDG63V03                         | SDW63V03                                                       | SDW66V03                                                                  | SDA66V03                                                    | SDA63V03               |

**Table 16.136: Coil Voltage Codes**

| Voltage             |         | Code |
|---------------------|---------|------|
| 60 Hz               | 50 Hz   |      |
| 24 <sup>[24]</sup>  | —       | V01  |
| 120 <sup>[25]</sup> | 110     | V02  |
| 208                 | —       | V08  |
| 240                 | 220     | V03  |
| 277                 | —       | V04  |
| 480                 | 440     | V06  |
| 600                 | 550     | V07  |
| Specify             | Specify | V99  |

**NOTE:** For voltage codes used with control transformers, see . Form S (separate control) is used when a separate source of power is available for the control (coil) voltage. Form S is available at no charge.

For How to Order Information, see [page 16-28](#).



<sup>[17]</sup> To order melting alloy overload relay, remove form "H30" from part number.

<sup>[18]</sup> Size 6 starters are NEMA 4 painted sheet steel enclosures.

<sup>[19]</sup> NEMA 12 enclosures can be field modified for outdoor non-corrosive and non-service entrance rated applications. See [page 16-112](#) for more information.

<sup>[20]</sup> Replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard coil voltage codes shown in [Table 16.136](#).

<sup>[21]</sup> **Form H30**, with the possibility of a fourth character to select a lower FLA range (for example, **H308**). See "Solid-State Overload Relay Forms" on [page 16-119](#).

<sup>[22]</sup> Single-phase units require one thermal unit. They are not available with **Form H\*** (solid-state overload relays).

<sup>[23]</sup> Not included in the Laser™ Delivery program.

<sup>[24]</sup> 24 V coils are not available on Sizes 4–7. On Sizes 00-3, where 24 V coils are available, **Form S** (separate control) must be specified (i.e., order as 8538SBG32V01S).

<sup>[25]</sup> These voltage codes must include **Form S** (provided at no charge). When specifying **Form S**, please include the motor voltage when ordering (for example, order as 8538SCG32V02S).

## Full Voltage Type with Motor Logic Solid-State Overload Relays 3-Pole Polyphase—600 Vac Maximum—50–60 Hz

For Form H30\* (special lower-FLA factory-assembled starter combinations with Motor Logic SSOLR protection), see [Solid-State Overload Relay Forms](#), page 16-119.

**Table 16.137: Class 8538 with Oversized Enclosures (replace ●●● with the voltage code)<sup>[26]</sup>**

| Ratings                                                                                              |                      |              |                       | NEMA 1<br>General Purpose<br>Enclosure | NEMA 4 & 4X<br>Watertight and<br>Dusttight Enclosure<br>Stainless Steel (304) | NEMA 12/3R <sup>[27]</sup><br>Dusttight and Driptight<br>Industrial Use Enclosure |                           |
|------------------------------------------------------------------------------------------------------|----------------------|--------------|-----------------------|----------------------------------------|-------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|---------------------------|
| Motor Voltage<br>(Starter Voltage)                                                                   | Max. Hp<br>Polyphase | NEMA<br>Size | Fuse Clip<br>Size (A) |                                        |                                                                               | With<br>External Reset                                                            | Without<br>External Reset |
|                                                                                                      |                      |              |                       | Type [28]                              | Type [28]                                                                     | Type [28]                                                                         | Type [28]                 |
| Class 8538 Non-Fusible Disconnect Switch Type—NEMA Size 0–2 <sup>[29]</sup> [30]                     |                      |              |                       |                                        |                                                                               |                                                                                   |                           |
| 200<br>(208)                                                                                         | 3                    | 0            | N/A                   | SBG11S8●●●H30 [31]                     | SBW11S8●●●H30 [31]                                                            | SBA21S8●●●H30 [31]                                                                | SBA11S8●●●H30 [31]        |
|                                                                                                      | 7-1/2                | 1            | N/A                   | SCG11S8●●●H30 [31]                     | SCW11S8●●●H30 [31]                                                            | SCA21S8●●●H30 [31]                                                                | SCA11S8●●●H30 [31]        |
|                                                                                                      | 10                   | 2            | N/A                   | SDG11S8●●●H30 [31]                     | SDW11S8●●●H30 [31]                                                            | SDA21S8●●●H30 [31]                                                                | SDA11S8●●●H30 [31]        |
| 230<br>(240)                                                                                         | 3                    | 0            | N/A                   | SBG11S8●●●H30 [31]                     | SBW11S8●●●H30 [31]                                                            | SBA21S8●●●H30 [31]                                                                | SBA11S8●●●H30 [31]        |
|                                                                                                      | 7-1/2                | 1            | N/A                   | SCG11S8●●●H30 [31]                     | SCW11S8●●●H30 [31]                                                            | SCA21S8●●●H30 [31]                                                                | SCA11S8●●●H30 [31]        |
|                                                                                                      | 15                   | 2            | N/A                   | SDG11S8●●●H30 [31]                     | SDW11S8●●●H30 [31]                                                            | SDA21S8●●●H30 [31]                                                                | SDA11S8●●●H30 [31]        |
| 460<br>(480)                                                                                         | 5                    | 0            | N/A                   | SBG11S8●●●H30 [31]                     | SBW11S8●●●H30 [31]                                                            | SBA21S8●●●H30 [31]                                                                | SBA11S8●●●H30 [31]        |
|                                                                                                      | 10                   | 1            | N/A                   | SCG11S8●●●H30 [31]                     | SCW11S8●●●H30 [31]                                                            | SCA21S8●●●H30 [31]                                                                | SCA11S8●●●H30 [31]        |
|                                                                                                      | 25                   | 2            | N/A                   | SDG11S8●●●H30 [31]                     | SDW11S8●●●H30 [31]                                                            | SDA21S8●●●H30 [31]                                                                | SDA11S8●●●H30 [31]        |
| 575<br>(600)                                                                                         | 5                    | 0            | N/A                   | SBG11S8●●●H30 [31]                     | SBW11S8●●●H30 [31]                                                            | SBA21S8●●●H30 [31]                                                                | SBA11S8●●●H30 [31]        |
|                                                                                                      | 10                   | 1            | N/A                   | SCG11S8●●●H30 [31]                     | SCW11S8●●●H30 [31]                                                            | SCA21S8●●●H30 [31]                                                                | SCA11S8●●●H30 [31]        |
|                                                                                                      | 25                   | 2            | N/A                   | SDG11S8●●●H30 [31]                     | SDW11S8●●●H30 [31]                                                            | SDA21S8●●●H30 [31]                                                                | SDA11S8●●●H30 [31]        |
| Class 8538 Fusible Disconnect Switch Type—NEMA Size 0–2 <sup>[29]</sup> [30]                         |                      |              |                       |                                        |                                                                               |                                                                                   |                           |
| 200<br>(208)                                                                                         | 3                    | 0            | 30                    | SBG12S8●●●H30 [31]                     | SBW12S8●●●H30 [31]                                                            | SBA22S8●●●H30 [31]                                                                | SBA12S8●●●H30 [31]        |
|                                                                                                      | 5                    | 1            | 30                    | SCG12S8●●●H30 [31]                     | SCW12S8●●●H30 [31]                                                            | SCA22S8●●●H30 [31]                                                                | SCA12S8●●●H30 [31]        |
|                                                                                                      | 7-1/2                | 1            | 60                    | SCG13S8●●●H30 [31]                     | SCW13S8●●●H30 [31]                                                            | SCA23S8●●●H30 [31]                                                                | SCA13S8●●●H30 [31]        |
|                                                                                                      | 10                   | 2            | 60                    | SDG12S8●●●H30 [31]                     | SDW12S8●●●H30 [31]                                                            | SDA22S8●●●H30 [31]                                                                | SDA12S8●●●H30 [31]        |
| 230<br>(240)                                                                                         | 3                    | 0            | 30                    | SBG12S8●●●H30 [31]                     | SBW12S8●●●H30 [31]                                                            | SBA22S8●●●H30 [31]                                                                | SBA12S8●●●H30 [31]        |
|                                                                                                      | 5                    | 1            | 30                    | SCG12S8●●●H30 [31]                     | SCW12S8●●●H30 [31]                                                            | SCA22S8●●●H30 [31]                                                                | SCA12S8●●●H30 [31]        |
|                                                                                                      | 7-1/2                | 1            | 60                    | SCG13S8●●●H30 [31]                     | SCW13S8●●●H30 [31]                                                            | SCA23S8●●●H30 [31]                                                                | SCA13S8●●●H30 [31]        |
|                                                                                                      | 15                   | 2            | 60                    | SDG12S8●●●H30 [31]                     | SDW12S8●●●H30 [31]                                                            | SDA22S8●●●H30 [31]                                                                | SDA12S8●●●H30 [31]        |
| 460<br>(480)                                                                                         | 5                    | 0            | 30                    | SBG13S8●●●H30 [31]                     | SBW13S8●●●H30 [31]                                                            | SBA23S8●●●H30 [31]                                                                | SBA13S8●●●H30 [31]        |
|                                                                                                      | 10                   | 1            | 30                    | SCG14S8●●●H30 [31]                     | SCW14S8●●●H30 [31]                                                            | SCA24S8●●●H30 [31]                                                                | SCA14S8●●●H30 [31]        |
|                                                                                                      | 15                   | 2            | 30                    | SDG16S8●●●H301                         | SDW16S8●●●H301                                                                | SDA26S8●●●H301                                                                    | SDA16S8●●●H301            |
|                                                                                                      | 25                   | 2            | 60                    | SDG14S8●●●H30 [31]                     | SDW14S8●●●H30 [31]                                                            | SDA24S8●●●H30 [31]                                                                | SDA14S8●●●H30 [31]        |
| 575<br>(600)                                                                                         | 5                    | 0            | 30                    | SBG13S8●●●H30 [31]                     | SBW13S8●●●H30 [31]                                                            | SBA23S8●●●H30 [31]                                                                | SBA13S8●●●H30 [31]        |
|                                                                                                      | 10                   | 1            | 30                    | SCG14S8●●●H30 [31]                     | SCW14S8●●●H30 [31]                                                            | SCA24S8●●●H30 [31]                                                                | SCA14S8●●●H30 [31]        |
|                                                                                                      | 15                   | 2            | 30                    | SDG16S8●●●H301                         | SDW16S8●●●H301                                                                | SDA26S8●●●H301                                                                    | SDA16S8●●●H301            |
|                                                                                                      | 25                   | 2            | 60                    | SDG14S8●●●H30 [31]                     | SDW14S8●●●H30 [31]                                                            | SDA24S8●●●H30 [31]                                                                | SDA14S8●●●H30 [31]        |
| Class 8538 Fusible Disconnect Switch Type with Class R Fuse Clips—NEMA Size 0–2 <sup>[29]</sup> [30] |                      |              |                       |                                        |                                                                               |                                                                                   |                           |
| 200<br>(208)                                                                                         | 3                    | 0            | 30                    | SBG32S8●●●H30 [31]                     | SBW32S8●●●H30 [31]                                                            | SBA42S8●●●H30 [31]                                                                | SBA32S8●●●H30 [31]        |
|                                                                                                      | 5                    | 1            | 30                    | SCG32S8●●●H30 [31]                     | SCW32S8●●●H30 [31]                                                            | SCA42S8●●●H30 [31]                                                                | SCA32S8●●●H30 [31]        |
|                                                                                                      | 7-1/2                | 1            | 60                    | SCG33S8●●●H30 [31]                     | SCW33S8●●●H30 [31]                                                            | SCA43S8●●●H30 [31]                                                                | SCA33S8●●●H30 [31]        |
|                                                                                                      | 10                   | 2            | 60                    | SDG32S8●●●H30 [31]                     | SDW32S8●●●H30 [31]                                                            | SDA42S8●●●H30 [31]                                                                | SDA32S8●●●H30 [31]        |
| 230<br>(240)                                                                                         | 3                    | 0            | 30                    | SBG32S8●●●H30 [31]                     | SBW32S8●●●H30 [31]                                                            | SBA42S8●●●H30 [31]                                                                | SBA32S8●●●H30 [31]        |
|                                                                                                      | 5                    | 1            | 30                    | SCG32S8●●●H30 [31]                     | SCW32S8●●●H30 [31]                                                            | SCA42S8●●●H30 [31]                                                                | SCA32S8●●●H30 [31]        |
|                                                                                                      | 7-1/2                | 1            | 60                    | SCG33S8●●●H30 [31]                     | SCW33S8●●●H30 [31]                                                            | SCA43S8●●●H30 [31]                                                                | SCA33S8●●●H30 [31]        |
|                                                                                                      | 15                   | 2            | 60                    | SDG32S8●●●H30 [31]                     | SDW32S8●●●H30 [31]                                                            | SDA42S8●●●H30 [31]                                                                | SDA32S8●●●H30 [31]        |
| 460<br>(480)                                                                                         | 5                    | 0            | 30                    | SBG33S8●●●H30 [31]                     | SBW33S8●●●H30 [31]                                                            | SBA43S8●●●H30 [31]                                                                | SBA33S8●●●H30 [31]        |
|                                                                                                      | 10                   | 1            | 30                    | SCG34S8●●●H30 [31]                     | SCW34S8●●●H30 [31]                                                            | SCA44S8●●●H30 [31]                                                                | SCA34S8●●●H30 [31]        |
|                                                                                                      | 15                   | 2            | 30                    | SDG36S8●●●H301                         | SDW36S8●●●H301                                                                | SDA46S8●●●H301                                                                    | SDA36S8●●●H301            |
|                                                                                                      | 25                   | 2            | 60                    | SDG34S8●●●H30 [31]                     | SDW34S8●●●H30 [31]                                                            | SDA44S8●●●H30 [31]                                                                | SDA34S8●●●H30 [31]        |
| 575<br>(600)                                                                                         | 5                    | 0            | 30                    | SBG33S8●●●H30 [31]                     | SBW33S8●●●H30 [31]                                                            | SBA43S8●●●H30 [31]                                                                | SBA33S8●●●H30 [31]        |
|                                                                                                      | 10                   | 1            | 30                    | SCG34S8●●●H30 [31]                     | SCW34S8●●●H30 [31]                                                            | SCA44S8●●●H30 [31]                                                                | SCA34S8●●●H30 [31]        |
|                                                                                                      | 15                   | 2            | 30                    | SDG36S8●●●H301                         | SDW36S8●●●H301                                                                | SDA46S8●●●H301                                                                    | SDA36S8●●●H301            |
|                                                                                                      | 25                   | 2            | 60                    | SDG34S8●●●H30 [31]                     | SDW34S8●●●H30 [31]                                                            | SDA44S8●●●H30 [31]                                                                | SDA34S8●●●H30 [31]        |

**NOTE:** Some control transformers may require the use of oversized enclosures. Refer to

**Table 16.138: Coil Voltage Codes**

| Voltage             |         | Code |
|---------------------|---------|------|
| 60 Hz               | 50 Hz   |      |
| 24 <sup>[32]</sup>  | 110     | V01  |
| 120 <sup>[32]</sup> | —       | V02  |
| 208                 | —       | V08  |
| 277                 | 220     | V03  |
| 480                 | —       | V04  |
| 600                 | 440     | V06  |
| Specify             | 550     | V07  |
| Specify             | Specify | V99  |

**NOTE:** For voltage codes used with control transformers, see .

**Table 16.139: Class 8538 Fusible Disconnect Switch Type for Horizontal Mounting<sup>[30]</sup> (replace ●●● with the voltage code)<sup>[26]</sup>**

| Ratings                            |                      |              |                       | NEMA 12/3R <sup>[27]</sup> Dusttight and Driptight Industrial Use Enclosure |                        |
|------------------------------------|----------------------|--------------|-----------------------|-----------------------------------------------------------------------------|------------------------|
| Motor Voltage<br>(Starter Voltage) | Max. Hp<br>Polyphase | NEMA<br>Size | Fuse Clip<br>Size (A) | With External Reset                                                         | Without External Reset |
|                                    |                      |              |                       | Type [28]                                                                   | Type [28]              |
| 200 (208)                          | 2                    | 1            | 30                    | SCA22S1●●●H30                                                               | SCA12S1●●●H30          |
|                                    | 7-1/2                | 1            | 60                    | SCA23S1●●●H30                                                               | SCA13S1●●●H30          |
| 230 (240)                          | 2                    | 1            | 30                    | SCA22S1●●●H30                                                               | SCA12S1●●●H30          |
|                                    | 7-1/2                | 1            | 60                    | SCA23S1●●●H30                                                               | SCA13S1●●●H30          |
| 460 (480)                          | 10                   | 1            | 30                    | SCA24S1●●●H30                                                               | SCA14S1●●●H30          |
|                                    | 10                   | 1            | 30                    | SCA24S1●●●H30                                                               | SCA14S1●●●H30          |

<sup>[26]</sup> To order melting alloy overload relay, remove form "H30" from part number.

<sup>[27]</sup> NEMA 12 enclosures can be field modified for outdoor non-corrosive and non-service entrance rated applications. See page 16-112 for more information.

<sup>[28]</sup> Replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard coil voltage codes shown in Table 16.138.

<sup>[29]</sup> For Size 3–5 starters in oversized NEMA 1, 4 or 12 enclosures, contact the factory for pricing and TAG number.

<sup>[30]</sup> Not included in the Laser™ Delivery program.

<sup>[31]</sup> Form H30, with the possibility of a fourth character to select a lower FLA range (for example, H308). See "Solid-State Overload Relay Forms" on page 16-119

<sup>[32]</sup> 24 V coils are not available on Sizes 4–7. On Sizes 00–3, where 24 V coils are available, Form S (separate control) must be specified (for example, order as 8538SBG1158V01S).

<sup>[33]</sup> These voltage codes must include Form S (provided at no charge). When specifying Form S, supply motor voltage when ordering (for example, order as 8538SCG1158V02S).

For How to Order Information, see [page 16-28](#).

**Electronic Motor Circuit Protector (MCP)**  
**3-Pole Polyphase—600 Vac Maximum—50–60 Hz**

For Form H30• (special lower-FLA factory-assembled starter combinations with Motor Logic SSOLR protection), see [Solid-State Overload Relay Forms](#), [page 16-119](#).

**Table 16.140: Class 8539 Full Voltage Type, Non-Reversing, 200–240 V, with Motor Logic SSOLR**  
(replace ●●● with the voltage code)<sup>[34]</sup>

| Ratings                                  |                          |              |                                                                       | NEMA 1<br>General Purpose<br>Enclosure                                     | NEMA 4 & 4X<br>Watertight and Dusttight<br>Stainless Steel (304)<br>Enclosure (Sizes 0–5) <sup>[35]</sup> | NEMA 4 & 4X<br>Watertight, Dusttight,<br>and Corrosion Resistant<br>Polyester Enclosure | NEMA 12/3R <sup>[36]</sup><br>Dusttight and Driptight<br>Industrial Use Enclosure |                                                                            |  |
|------------------------------------------|--------------------------|--------------|-----------------------------------------------------------------------|----------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|----------------------------------------------------------------------------|--|
| Motor<br>Voltage<br>(Starter<br>Voltage) | Hp<br>Range<br>Polyphase | NEMA<br>Size | Circuit Breaker<br>(See Page 7-32<br>for Breaker<br>Adjustment Range) | Type <sup>[37]</sup>                                                       | Type <sup>[37]</sup>                                                                                      | Type <sup>[37]</sup>                                                                    | With<br>External<br>Reset<br>Type <sup>[37]</sup>                                 | Without<br>External<br>Reset<br>Type <sup>[37]</sup>                       |  |
| 200<br>(208)                             | 0.25–3                   | 0            | HLL36030M71                                                           | SBG43●●●H30 <sup>[38]</sup>                                                | SBW43●●●H30 <sup>[38]</sup>                                                                               | SBW53●●●H30 <sup>[38]</sup>                                                             | SBA53●●●H30 <sup>[38]</sup>                                                       | SBA43●●●H30 <sup>[38]</sup>                                                |  |
|                                          | 0.25–5<br>7.5            | 1            | HLL36030M71<br>HLL36050M72                                            | SCG44●●●H30 <sup>[38]</sup><br>SCG45●●●H30 <sup>[38]</sup>                 | SCW44●●●H30 <sup>[38]</sup><br>SCW45●●●H30 <sup>[38]</sup>                                                | SCW54●●●H30 <sup>[38]</sup><br>SCW55●●●H30 <sup>[38]</sup>                              | SCA54●●●H30 <sup>[38]</sup><br>SCA55●●●H30 <sup>[38]</sup>                        | SCA44●●●H30 <sup>[38]</sup><br>SCA45●●●H30 <sup>[38]</sup>                 |  |
|                                          | 1.5–5<br>7.5–10          | 2            | HLL36030M71<br>HLL36050M72                                            | SDG42●●●H301<br>SDG43●●●H30 <sup>[38]</sup>                                | SDW42●●●H301<br>SDW43●●●H30 <sup>[38]</sup>                                                               | SDW52●●●H301<br>SDW53●●●H30 <sup>[38]</sup>                                             | SDA52●●●H301<br>SDA53●●●H30 <sup>[38]</sup>                                       | SDA42●●●H301<br>SDA43●●●H30 <sup>[38]</sup>                                |  |
|                                          | 15–25                    | 3            | HLL36100M73                                                           | SEG42●●●H30                                                                | SEW42●●●H30                                                                                               | SEW52●●●H30                                                                             | SEA52●●●H30                                                                       | SEA42●●●H30                                                                |  |
|                                          | 30–40                    | 4            | JLL36250M75                                                           | SFG44●●●H30                                                                | SFW44●●●H30                                                                                               | SFW54●●●H30                                                                             | SFA54●●●H30                                                                       | SFA44●●●H30                                                                |  |
|                                          | 50–60<br>75              | 5            | JLL36250M75<br>LJL36400M36                                            | SGG44●●●H30<br>SGG45●●●H30                                                 | SGW44●●●H30<br>SGW45●●●H30                                                                                | —                                                                                       | SGA54●●●H30<br>SGA55●●●H30                                                        | SGA44●●●H30<br>SGA45●●●H30                                                 |  |
|                                          | 100                      | 6            | LJL36400M36                                                           | SHG43●●●H30                                                                | SHW43●●●H30                                                                                               | —                                                                                       | SHA53●●●H30                                                                       | SHA43●●●H30                                                                |  |
|                                          | 125–150                  |              | LJL36600M42                                                           | SHG45●●●H30                                                                | SHW45●●●H30                                                                                               | —                                                                                       | SHA55●●●H30                                                                       | SHA45●●●H30                                                                |  |
|                                          | 0.25–3                   | 0            | HLL36030M71                                                           | SBG43●●●H30 <sup>[38]</sup>                                                | SBW43●●●H30 <sup>[38]</sup>                                                                               | SBW53●●●H30 <sup>[38]</sup>                                                             | SBA53●●●H30 <sup>[38]</sup>                                                       | SBA43●●●H30 <sup>[38]</sup>                                                |  |
|                                          | 0.25–7.5                 | 1            | HLL36030M71                                                           | SCG44●●●H30<br><sup>[38]</sup>                                             | SCW44●●●H30<br><sup>[38]</sup>                                                                            | SCW54●●●H30<br><sup>[38]</sup>                                                          | SCA54●●●H30<br><sup>[38]</sup>                                                    | SCA44●●●H30<br><sup>[38]</sup>                                             |  |
| 230<br>(240)                             | 1.5–7.5<br>10<br>15      | 2            | HLL36030M71<br>HLL36050M72<br>HLL36100M73                             | SDG42●●●H301<br>SDG43●●●H30 <sup>[38]</sup><br>SDG44●●●H30 <sup>[38]</sup> | SDW42●●●H301<br>SDW43●●●H30 <sup>[38]</sup><br>SDW44●●●H30 <sup>[38]</sup>                                | SDW52●●●H301<br>SDW53●●●H30 <sup>[38]</sup><br>SDW54●●●H30 <sup>[38]</sup>              | SDA52●●●H301<br>SDA53●●●H30 <sup>[38]</sup><br>SDA54●●●H30 <sup>[38]</sup>        | SDA42●●●H301<br>SDA43●●●H30 <sup>[38]</sup><br>SDA44●●●H30 <sup>[38]</sup> |  |
|                                          | 15–30                    | 3            | HLL36100M73                                                           | SEG42●●●H30                                                                | SEW42●●●H30                                                                                               | SEW52●●●H30                                                                             | SEA52●●●H30                                                                       | SEA42●●●H30                                                                |  |
|                                          | 40–50                    | 4            | JLL36250M75                                                           | SFG44●●●H30                                                                | SFW44●●●H30                                                                                               | SFW54●●●H30                                                                             | SFA54●●●H30                                                                       | SFA44●●●H30                                                                |  |
|                                          | 60                       | 5            | JLL36250M75<br>LJL36400M36                                            | SGG44●●●H30<br>SGG46●●●H30                                                 | SGW44●●●H30<br>SGW45●●●H30                                                                                | —                                                                                       | SGA54●●●H30<br>SGA55●●●H30                                                        | SGA44●●●H30<br>SGA45●●●H30                                                 |  |
|                                          | 75–100                   |              | LJL36600M42                                                           | SHG45●●●H30                                                                | SHW45●●●H30                                                                                               | —                                                                                       | SHA55●●●H30                                                                       | SHA45●●●H30                                                                |  |
|                                          | 125–150<br>200           | 6            | PLL34080M68                                                           | SHG46●●●H30                                                                | SHW46●●●H30                                                                                               | —                                                                                       | SHA56●●●H30                                                                       | SHA46●●●H30                                                                |  |
|                                          | 250–300                  | 7            | PLL36100M69                                                           | SJG43●●●H30                                                                | SJW43●●●H30                                                                                               | —                                                                                       | SJA53●●●H30                                                                       | —                                                                          |  |

**NOTE:** Some control transformers may require the use of oversized enclosures. Refer to [Control Transformer Selection](#), [page 16-57](#).

**Table 16.141: Coil Voltage Codes**

| Voltage             |         | Code |
|---------------------|---------|------|
| 60 Hz               | 50 Hz   |      |
| 24 <sup>[39]</sup>  | —       | V01  |
| 120 <sup>[40]</sup> | 110     | V02  |
| 208                 | —       | V08  |
| 240                 | 220     | V03  |
| 277                 | —       | V04  |
| 480                 | 440     | V06  |
| 600                 | 550     | V07  |
| Specify             | Specify | V99  |

**NOTE:** For voltage codes used with control transformers, see [page 16-118](#). Form S (separate control) is used when a separate source of power is available for the control (coil) voltage. Form S is available at no charge.

Dimensions: [page 16-58](#)  
Factory Modifications (Forms): [page 16-117](#)  
Replacement Parts (Class 9998): [page 16-122](#)  
Type S Accessories (Class 9999): [page 16-125](#)

For How to Order Information, see [page 16-28](#).



NEMA Type 1 Enclosure  
with 30 mm Operators



Refer to page 16-31 for details.

<sup>[34]</sup> To order melting alloy overload relay, remove form "H30" from part number.

<sup>[35]</sup> Size 6 and 7 are NEMA 4 sheet steel enclosures.

<sup>[36]</sup> NEMA 12 enclosures can be field modified for outdoor non-corrosive and non-service entrance rated applications. See [page 16-112](#) for more information.

<sup>[37]</sup> Replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard coil voltage codes shown in [Table 16.141](#).

<sup>[38]</sup> **Form H30**, with the possibility of a fourth character to select a lower FLA range (for example, **H308**). See "Solid-State Overload Relay Forms" on [page 16-119](#).

<sup>[39]</sup> 24 V coils are not available on Sizes 4–7. On Sizes 00–3, where 24 V coils are available, **Form S** (separate control) must be specified (for example, order as 8539SBG41V01S).

<sup>[40]</sup> These voltage codes must include **Form S** (supplied at no charge). When specifying **Form S**, please supply motor voltage when ordering (for example, order as 8539SCG41V02S).

For Form H30• (special lower-FLA factory-assembled starter combinations with Motor Logic SSOLR protection), see [Solid-State Overload Relay Forms](#), page 16-119.

**Table 16.142: Class 8539 Full Voltage Type, Non-Reversing, 460–600 V, with Motor Logic SSOLR and Electronic Motor Circuit Protector (MCP) (replace ●●● with the voltage code)<sup>[41]</sup>**

| Ratings                         |                    |           |                                                              | NEMA 1 General Purpose Enclosure | NEMA 4 & 4X Watertight and Dusttight Enclosure, Stainless Steel (304) (Sizes 0–5) <sup>[42]</sup> | NEMA 4 & 4X Watertight, Dusttight, and Corrosion Resistant Polyester Enclosure | NEMA 12/3R <sup>[43]</sup> Dusttight and Driptight Industrial Use Enclosure |                                  |
|---------------------------------|--------------------|-----------|--------------------------------------------------------------|----------------------------------|---------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|-----------------------------------------------------------------------------|----------------------------------|
| Motor Voltage (Starter Voltage) | Hp Range Polyphase | NEMA Size | Circuit Breaker (See Page 7-32 for Breaker Adjustment Range) | Type [44]                        | Type [44]                                                                                         | Type [44]                                                                      | With External Reset Type [44]                                               | Without External Reset Type [44] |
| 460 (480)                       | 0.25–5             | 0         | HLL36030M71                                                  | SBG43●●●H30 [45]                 | SBW43●●●H30 [45]                                                                                  | SBW53●●●H30 [45]                                                               | SBA53●●●H30 [45]                                                            | SBA43●●●H30 [45]                 |
|                                 | 0.25–10            | 1         | HLL36030M71                                                  | SCG44●●●H30 [45]                 | SCW44●●●H30 [45]                                                                                  | SCW54●●●H30 [45]                                                               | SCA54●●●H30 [45]                                                            | SCA44●●●H30 [45]                 |
|                                 | 5–15               | 2         | HLL36030M71                                                  | SDG42●●●H301                     | SDW42●●●H301                                                                                      | SDW52●●●H301                                                                   | SDA52●●●H301                                                                | SDA42●●●H301                     |
|                                 | 20–25              |           | HLL36050M72                                                  | SDG43●●●H30                      | SDW43●●●H30 [45]                                                                                  | SDW53●●●H30 [45]                                                               | SDA53●●●H30 [45]                                                            | SDA43●●●H30 [45]                 |
|                                 | 20–25              | 3         | HLL36050M72                                                  | SEG41●●●H30                      | SEW41●●●H30                                                                                       | SEW51●●●H30                                                                    | SEA51●●●H30                                                                 | SEA41●●●H30                      |
|                                 | 30–50              |           | HLL36100M73                                                  | SEG42●●●H30                      | SEW42●●●H30                                                                                       | SEW52●●●H30                                                                    | SEA52●●●H30                                                                 | SEA42●●●H30                      |
|                                 | 60–100             | 4         | JLL36250M75                                                  | SFG44●●●H30                      | SFW44●●●H30                                                                                       | SFW54●●●H30                                                                    | SFA54●●●H30                                                                 | SFA44●●●H30                      |
|                                 | 125                | 5         | JLL36250M75                                                  | SGG44●●●H30                      | SGW44●●●H30                                                                                       | —                                                                              | SGA54●●●H30                                                                 | SGA44●●●H30                      |
|                                 | 150–200            |           | LJL36400M36                                                  | SGG45●●●H30                      | SGW45●●●H30                                                                                       | —                                                                              | SGA55●●●H30                                                                 | SGA45●●●H30                      |
|                                 | 250–350            | 6         | LJL36600M42                                                  | SHG45●●●H30                      | SHW45●●●H30                                                                                       | —                                                                              | SHA55●●●H30                                                                 | SHA45●●●H30                      |
|                                 | 400                |           | PLL34080M68                                                  | SHG46●●●H30                      | SHW46●●●H30                                                                                       | —                                                                              | SHA56●●●H30                                                                 | SHA46●●●H30                      |
|                                 | 500                | 7         | PLL36080M68                                                  | SJG42●●●H30                      | SJW42●●●H30                                                                                       | —                                                                              | SJA52●●●H30                                                                 | —                                |
|                                 | 600                |           | PLL36100M69                                                  | SJG43●●●H30                      | SJW43●●●H30                                                                                       | —                                                                              | SJA53●●●H30                                                                 | —                                |
| 575 (600)                       | 0.25–5             | 0         | HLL36030M71                                                  | SBG43●●●H30 [45]                 | SBW43●●●H30 [45]                                                                                  | SBW53●●●H30 [45]                                                               | SBA53●●●H30 [45]                                                            | SBA43●●●H30 [45]                 |
|                                 | 0.25–10            | 1         | HLL36030M71                                                  | SCG44●●●H30 [45]                 | SCW44●●●H30 [45]                                                                                  | SCW54●●●H30 [45]                                                               | SCA54●●●H30 [45]                                                            | SCA44●●●H30 [45]                 |
|                                 | 5–20               | 2         | HLL36030M71                                                  | SDG42●●●H301                     | SDW42●●●H301                                                                                      | SDW52●●●H301                                                                   | SDA52●●●H301                                                                | SDA42●●●H301                     |
|                                 | 25                 |           | HLL36050M72                                                  | SDG43●●●H30 [45]                 | SDW43●●●H30 [45]                                                                                  | SDW53●●●H30 [45]                                                               | SDA53●●●H30 [45]                                                            | SDA43●●●H30 [45]                 |
|                                 | 25–30              | 3         | HLL36050M72                                                  | SEG41●●●H30                      | SEW41●●●H30                                                                                       | SEW51●●●H30                                                                    | SEA51●●●H30                                                                 | SEA41●●●H30                      |
|                                 | 40–50              |           | HLL36100M73                                                  | SEG42●●●H30                      | SEW42●●●H30                                                                                       | SEW52●●●H30                                                                    | SEA52●●●H30                                                                 | SEA42●●●H30                      |
|                                 | 60–100             | 4         | JLL36250M75                                                  | SFG44●●●H30                      | SFW44●●●H30                                                                                       | SFW54●●●H30                                                                    | SFA54●●●H30                                                                 | SFA44●●●H30                      |
|                                 | 125–150            | 5         | JLL36250M75                                                  | SGG44●●●H30                      | SGW44●●●H30                                                                                       | —                                                                              | SGA54●●●H30                                                                 | SGA44●●●H30                      |
|                                 | 200                |           | LJL36400M36                                                  | SGG45●●●H30                      | SGW45●●●H30                                                                                       | —                                                                              | SGA55●●●H30                                                                 | SGA45●●●H30                      |
|                                 | 250                | 6         | LJL36400M36                                                  | SHG43●●●H30                      | SHW43●●●H30                                                                                       | —                                                                              | SHA53●●●H30                                                                 | SHA43●●●H30                      |
|                                 | 300–400            |           | LJL36600M42                                                  | SHG45●●●H30                      | SHW45●●●H30                                                                                       | —                                                                              | SHA55●●●H30                                                                 | SHA45●●●H30                      |
|                                 | 500–600            | 7         | PLL34100M69                                                  | SJG41●●●H30                      | SJW41●●●H30                                                                                       | —                                                                              | SJA51●●●H30                                                                 | —                                |

**NOTE:** Some control transformers may require the use of oversized enclosures. Refer to .

**Table 16.143: Coil Voltage Codes**

| Voltage             |         | Code |
|---------------------|---------|------|
| 60 Hz               | 50 Hz   |      |
| 24 <sup>[46]</sup>  | —       | V01  |
| 120 <sup>[47]</sup> | 110     | V02  |
| 208                 | —       | V08  |
| 240                 | 220     | V03  |
| 277                 | —       | V04  |
| 480                 | 440     | V06  |
| 600                 | 550     | V07  |
| Specify             | Specify | V99  |

**NOTE:** For voltage codes used with control transformers, see . Form S (separate control) is used when a separate source of power is available for the control (coil) voltage. Form S is available at no charge.

Dimensions: [page 16-58](#)

Factory Modifications (Forms): [page 16-117](#)

Replacement Parts (Class 9998): [page 16-92](#)

Type S Accessories (Class 9999): [page 16-125](#)

For How to Order Information, see [page 16-28](#).

### NEMA Size 0–2 in Oversized Enclosure

#### 3-Pole Polyphase—600 Vac Maximum—50–60 Hz

For Form H30• (special lower-FLA factory-assembled starter combinations with Motor Logic SSOLR protection), see [Solid-State Overload Relay Forms](#), page 16-119.

**Table 16.144: Class 8539 Electronic Motor Circuit Protectors (MCP) in Oversized Enclosure, NEMA Size 0–2<sup>[41][48][49]</sup> Full Voltage Type, Non-Reversing with Motor Logic SSOLR (replace ●●● with the voltage code)**

| Ratings                         |                    |           |                                                              | NEMA 1 General Purpose Enclosure | NEMA 4 & 4X Watertight and Dusttight Stainless Steel (304) Enclosure | NEMA 12/3R <sup>[43]</sup> Dusttight and Driptight Industrial Use Enclosure |                                  |
|---------------------------------|--------------------|-----------|--------------------------------------------------------------|----------------------------------|----------------------------------------------------------------------|-----------------------------------------------------------------------------|----------------------------------|
| Motor Voltage (Starter Voltage) | Hp Range Polyphase | NEMA Size | Circuit Breaker (See Page 7-32 for Breaker Adjustment Range) | Type [44]                        | Type [44]                                                            | With External Reset Type [44]                                               | Without External Reset Type [44] |
| 200 (208)                       | 0.25–3             | 0         | HLL36030M71                                                  | SBG43S8●●●H30 <sup>[45]</sup>    | SBW43S8●●●H30 <sup>[45]</sup>                                        | SBA53S8●●●H30 <sup>[45]</sup>                                               | SBA43S8●●●H30 <sup>[45]</sup>    |
|                                 | 0.25–5             | 1         | HLL36030M71                                                  | SCG44S8●●●H30 <sup>[45]</sup>    | SCW44S8●●●H30 <sup>[45]</sup>                                        | SCA54S8●●●H30 <sup>[45]</sup>                                               | SCA44S8●●●H30 <sup>[45]</sup>    |

<sup>[41]</sup> To order melting alloy overload relay, remove form "H30" from part number.

<sup>[42]</sup> Size 6 and 7 are NEMA 4 only, painted sheet steel enclosures.

<sup>[43]</sup> NEMA 12 enclosures can be field modified for outdoor non-corrosive and non-service entrance rated applications. See [page 16-112](#) for more information.

<sup>[44]</sup> Replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard coil voltage codes shown in [Table 16.143](#).

<sup>[45]</sup> Form H30, with the possibility of a fourth character to select a lower FLA range (for example, H308). See "Solid-State Overload Relay Forms" on [page 16-119](#)

<sup>[46]</sup> 24 V coils are not available on Sizes 4–7. On Sizes 00–3, where 24 V coils are available,

Form S (separate control) must be specified (i.e., order as 8539SBG41V01S).

<sup>[47]</sup> These voltage codes must include Form S (furnished at no charge). When specifying Form S, please include the motor voltage when ordering (for example, order as 8539SCG41V02S).

<sup>[48]</sup> Not included in the Laser™ Delivery program.

<sup>[49]</sup> For NEMA Size 3–5 starters in oversized NEMA 1, 4 or 12 enclosures, contact factory for pricing and TAG number.

**Table 16.144 Class 8539 Electronic Motor Circuit Protectors (MCP) in Oversized Enclosure, NEMA Size 0–2**<sup>[16.144][16.144]</sup><sup>NEMASize0-2inOversizedEnclosure3-PolePolyphase-600VacMax\_1602\_18[16.144]</sup> **Full Voltage Type, Non-Reversing with Motor Logic SSOLR (replace ●●● with the voltage code) (cont'd.)**

| Motor Voltage (Starter Voltage) | Ratings             |           |                                                              | NEMA 1 General Purpose Enclosure                                                 | NEMA 4 & 4X Watertight and Dusttight Stainless Steel (304) Enclosure             | NEMA 12/3R <sup>[58]</sup> Dusttight and Driptight Industrial Use Enclosure      |                                                                                  |
|---------------------------------|---------------------|-----------|--------------------------------------------------------------|----------------------------------------------------------------------------------|----------------------------------------------------------------------------------|----------------------------------------------------------------------------------|----------------------------------------------------------------------------------|
|                                 | Hp Range Polyphase  | NEMA Size | Circuit Breaker (See Page 7-32 for Breaker Adjustment Range) | Type <sup>[59]</sup>                                                             | Type <sup>[59]</sup>                                                             | With External Reset                                                              | Without External Reset                                                           |
|                                 |                     |           |                                                              |                                                                                  |                                                                                  | Type <sup>[59]</sup>                                                             | Type <sup>[59]</sup>                                                             |
| 230 (240)                       | 7.5                 | 2         | HLL36050M72                                                  | SCG45S8●●●H30 <sup>[50]</sup>                                                    | SCW45S8●●●H30 <sup>[50]</sup>                                                    | SCA55S8●●●H30 <sup>[50]</sup>                                                    | SCA45S8●●●H30 <sup>[50]</sup>                                                    |
|                                 | 1.5–5               |           | HLL36030M71                                                  | SDG42S8●●●H301                                                                   | SDW42S8●●●H301                                                                   | SDA52S8●●●H301                                                                   | SDA42S8●●●H301                                                                   |
|                                 | 7.5–10              |           | HLL36050M72                                                  | SDG43S8●●●H30 <sup>[50]</sup>                                                    | SDW43S8●●●H30 <sup>[50]</sup>                                                    | SDA53S8●●●H30 <sup>[50]</sup>                                                    | SDA43S8●●●H30 <sup>[50]</sup>                                                    |
|                                 | 0.25–3              | 0         | HLL36030M71                                                  | SBG43S8●●●H30 <sup>[50]</sup>                                                    | SBW43S8●●●H30 <sup>[50]</sup>                                                    | SBA53S8●●●H30 <sup>[50]</sup>                                                    | SBA43S8●●●H30 <sup>[50]</sup>                                                    |
|                                 | 0.25–7.5            | 1         | HLL36030M71                                                  | SCG44S8●●●H30 <sup>[50]</sup>                                                    | SCW44S8●●●H30 <sup>[50]</sup>                                                    | SCA54S8●●●H30 <sup>[50]</sup>                                                    | SCA44S8●●●H30 <sup>[50]</sup>                                                    |
|                                 | 1.5–7.5<br>10<br>15 | 2         | HLL36030M71<br>HLL36050M72<br>HLL36100M73                    | SDG42S8●●●H301<br>SDG43S8●●●H30 <sup>[50]</sup><br>SDG44S8●●●H30 <sup>[50]</sup> | SDW42S8●●●H301<br>SDW43S8●●●H30 <sup>[50]</sup><br>SDW44S8●●●H30 <sup>[50]</sup> | SDA52S8●●●H301<br>SDA53S8●●●H30 <sup>[50]</sup><br>SDA54S8●●●H30 <sup>[50]</sup> | SDA42S8●●●H301<br>SDA43S8●●●H30 <sup>[50]</sup><br>SDA44S8●●●H30 <sup>[50]</sup> |
| 460 (480)                       | 0.25–5              | 0         | HLL36030M71                                                  | SBG43S8●●●H30 <sup>[50]</sup>                                                    | SBW43S8●●●H30 <sup>[50]</sup>                                                    | SBA53S8●●●H30 <sup>[50]</sup>                                                    | SBA43S8●●●H30 <sup>[50]</sup>                                                    |
|                                 | 0.25–10             | 1         | HLL36030M71                                                  | SCG44S8●●●H30 <sup>[50]</sup>                                                    | SCW44S8●●●H30 <sup>[50]</sup>                                                    | SCA54S8●●●H30 <sup>[50]</sup>                                                    | SCA44S8●●●H30 <sup>[50]</sup>                                                    |
|                                 | 5–15<br>20–25       | 2         | HLL36030M71<br>HLL36050M72                                   | SDG42S8●●●H301<br>SDG43S8●●●H30 <sup>[50]</sup>                                  | SDW42S8●●●H301<br>SDW43S8●●●H30 <sup>[50]</sup>                                  | SDA52S8●●●H301<br>SDA53S8●●●H30 <sup>[50]</sup>                                  | SDA42S8●●●H301<br>SDA43S8●●●H30 <sup>[50]</sup>                                  |
|                                 | 0.25–5              | 0         | HLL36060M71                                                  | SBG43S8●●●H30 <sup>[50]</sup>                                                    | SBW43S8●●●H30 <sup>[50]</sup>                                                    | SBA53S8●●●H30 <sup>[50]</sup>                                                    | SBA43S8●●●H30 <sup>[50]</sup>                                                    |
| 575 (600)                       | 0.25–10             | 1         | HLL36030M71                                                  | SCG44S8●●●H30 <sup>[50]</sup>                                                    | SCW44S8●●●H30 <sup>[50]</sup>                                                    | SCA54S8●●●H30 <sup>[50]</sup>                                                    | SCA44S8●●●H30 <sup>[50]</sup>                                                    |
|                                 | 5–20<br>25          | 2         | HLL36030M71<br>HLL36050M72                                   | SDG42S8●●●H301<br>SDG43S8●●●H30 <sup>[50]</sup>                                  | SDW42S8●●●H301<br>SDW43S8●●●H30 <sup>[50]</sup>                                  | SDA52S8●●●H301<br>SDA53S8●●●H30 <sup>[50]</sup>                                  | SDA42S8●●●H301<br>SDA43S8●●●H30 <sup>[50]</sup>                                  |

**NOTE:** Some control transformers may require the use of oversized enclosures. Refer to .

**Table 16.145: Coil Voltage Codes**

| Voltage             |         | Code |
|---------------------|---------|------|
| 60 Hz               | 50 Hz   |      |
| 24 <sup>[56]</sup>  | —       | V01  |
| 120 <sup>[57]</sup> | 110     | V02  |
| 208                 | —       | V08  |
| 240                 | 220     | V03  |
| 277                 | —       | V04  |
| 480                 | 440     | V06  |
| 600                 | 550     | V07  |
| Specify             | Specify | V99  |

**NOTE:** For voltage codes used with control transformers, see page 16-118. Form S (separate control) is used when a separate source of power is available for the control (coil) voltage. Form S is available at no charge.

Dimensions: page 16-58

Factory Modifications (Forms): page 16-117

Replacement Parts (Class 9998): page 16-122

Type S Accessories (Class 9999): page 16-125

For How to Order Information, see page 16-28.

<sup>[58]</sup> NEMA 12 enclosures can be field modified for outdoor non-corrosive and non-service entrance rated applications. See page 16-112 for more information.

<sup>[59]</sup> Replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard coil voltage codes shown in Table 16.145.

<sup>[50]</sup> **Form H30**, with the possibility of a fourth character to select a lower FLA range (for example, **H308**). See "Solid-State Overload Relay Forms" on page 16-119

<sup>[56]</sup> 24 V coils are not available on Sizes 4–7. On Sizes 00–3, where 24 V coils are available, **Form S** (separate control) must be specified (for example, order as 8539SBG41S8V01S).

<sup>[57]</sup> These voltage codes must include **Form S** (provided at no charge). When specifying **Form S**, please include the motor voltage when ordering (for example, order as 8539SCG41S8V02S).



## Thermal Magnetic Circuit Breaker

## Full Voltage Type

## 3-Pole Polyphase—600 Vac Maximum—50–60 Hz

For Form H30• (special lower-FLA factory-assembled starter combinations with Motor Logic SSOLR protection), see [Solid-State Overload Relay Forms](#), page 16-119.

Table 16.146: Class 8539 Full Voltage, Thermal-Magnetic Circuit Breaker Type, Non-Reversing, with Motor Logic SSOLR (replace ●●● with the voltage code)<sup>[58]</sup>

| Ratings                                  |                      |              |                                          |                      | NEMA 1<br>General Purpose<br>Enclosure | NEMA 4 & 4X<br>Watertight and Dusttight<br>Enclosure<br>Stainless Steel<br>(304)<br>(Sizes 0–5)/[59] | NEMA 4 & 4X<br>Watertight,<br>Dusttight and<br>Corrosion Resistant<br>Polyester Enclosure | NEMA 12/3R/[60]<br>Dusttight and Driptight<br>Industrial Use<br>Enclosure |                                        |                                    |
|------------------------------------------|----------------------|--------------|------------------------------------------|----------------------|----------------------------------------|------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|---------------------------------------------------------------------------|----------------------------------------|------------------------------------|
| Motor<br>Voltage<br>(Starter<br>Voltage) | Max. Hp<br>Polyphase | NEMA<br>Size | Circuit Breaker                          |                      | Type [61]                              | Type [61]                                                                                            | Type [61]                                                                                 | With<br>External<br>Reset                                                 | Without<br>External<br>Reset           |                                    |
|                                          |                      |              | Type                                     | Ampere<br>Rating     |                                        |                                                                                                      |                                                                                           | Type [61]                                                                 | Type [61]                              |                                    |
| 200<br>(208)                             | 2<br>3               | 0            | HLL36015<br>HLL36020                     | 15<br>20             | SBG1●●●H30 [62]<br>SBG3●●●H30 [62]     | SBW1●●●H30 [62]<br>SBW3●●●H30 [62]                                                                   | SBW11●●●H30 [62]<br>SBW13●●●H30 [62]                                                      | SBA11●●●H30 [62]<br>SBA13●●●H30 [62]                                      | SBA1●●●H30 [62]<br>SBA3●●●H30 [62]     |                                    |
|                                          | 5<br>7-1/2           | 1            | HLL36035<br>HLL36050                     | 35<br>50             | SCG5●●●H30 [62]<br>SCG2●●●H30 [62]     | SCW5●●●H30 [62]<br>SCW2●●●H30 [62]                                                                   | SCW15●●●H30 [62]<br>SCW12●●●H30 [62]                                                      | SCA15●●●H30 [62]<br>SCA12●●●H30 [62]                                      | SCA5●●●H30 [62]<br>SCA2●●●H30 [62]     |                                    |
|                                          | 10                   | 2            | HLL36060                                 | 60                   | SDG1●●●H30 [62]                        | SDW1●●●H30 [62]                                                                                      | SDW11●●●H30 [62]                                                                          | SDA11●●●H30 [62]                                                          | SDA1●●●H30 [62]                        |                                    |
|                                          | 15<br>20<br>25       | 3            | HLL36100<br>HLL36125<br>HLL36150         | 100<br>125<br>150    | SEG3●●●H30<br>SEG1●●●H30<br>SEG5●●●H30 | SEW3●●●H30<br>SEW1●●●H30<br>SEW5●●●H30                                                               | SEW13●●●H30<br>SEW11●●●H30<br>SEW15●●●H30                                                 | SEA13●●●H30<br>SEA11●●●H30<br>SEA15●●●H30                                 | SEA3●●●H30<br>SEA1●●●H30<br>SEA5●●●H30 |                                    |
|                                          | 30<br>40             | 4            | JLL36200<br>JLL36250                     | 200<br>250           | SFG3●●●H30<br>SFG4●●●H30               | SFW3●●●H30<br>SFW4●●●H30                                                                             | SFW13●●●H30<br>SFW14●●●H30                                                                | SFA13●●●H30<br>SFA14●●●H30                                                | SFA3●●●H30<br>SFA4●●●H30               |                                    |
|                                          | 50<br>60–75          | 5            | JLL36250<br>LLL36400U33X                 | 250<br>400           | SGG6●●●H30<br>SGG4●●●H30               | SGW6●●●H30<br>SGW4●●●H30                                                                             | —                                                                                         | SGA16●●●H30<br>SGA14●●●H30                                                | SGA6●●●H30<br>SGA4●●●H30               |                                    |
|                                          | 100–125<br>150       | 6            | LLL36600U33X<br>MJL36800                 | 600<br>800           | SHG4●●●H30<br>SHG5●●●H30               | SHW4●●●H30<br>SHW5●●●H30                                                                             | —                                                                                         | SHA14●●●H30<br>SHA15●●●H30                                                | SHA4●●●H30<br>SHA5●●●H30               |                                    |
|                                          | 230<br>(240)         | 2<br>3       | 0                                        | HLL36015<br>HLL36020 | 15<br>20                               | SBG1●●●H30 [62]<br>SBG3●●●H30 [62]                                                                   | SBW1●●●H30 [62]<br>SBW3●●●H30 [62]                                                        | SBW11●●●H30 [62]<br>SBW13●●●H30 [62]                                      | SBA11●●●H30 [62]<br>SBA13●●●H30 [62]   | SBA1●●●H30 [62]<br>SBA3●●●H30 [62] |
|                                          |                      | 5<br>7-1/2   | 1                                        | HLL36035<br>HLL36045 | 35<br>45                               | SCG5●●●H30 [62]<br>SCG6●●●H30 [62]                                                                   | SCW5●●●H30 [62]<br>SCW6●●●H30 [62]                                                        | SCW15●●●H30 [62]<br>SCW16●●●H30 [62]                                      | SCA15●●●H30 [62]<br>SCA16●●●H30 [62]   | SCA5●●●H30 [62]<br>SCA6●●●H30 [62] |
|                                          |                      | 10<br>15     | 2                                        | HLL36060<br>HLL36090 | 60<br>90                               | SDG1●●●H30 [62]<br>SDG7●●●H30 [62]                                                                   | SDW1●●●H30 [62]<br>SDW7●●●H30 [62]                                                        | SDW11●●●H30 [62]<br>SDW17●●●H30 [62]                                      | SDA11●●●H30 [62]<br>SDA17●●●H30 [62]   | SDA1●●●H30 [62]<br>SDA7●●●H30 [62] |
| 20<br>25–30                              |                      | 3            | HLL36100<br>HLL36150                     | 100<br>150           | SEG3●●●H30<br>SEG5●●●H30               | SEW3●●●H30<br>SEW5●●●H30                                                                             | SEW13●●●H30<br>SEW15●●●H30                                                                | SEA13●●●H30<br>SEA15●●●H30                                                | SEA3●●●H30<br>SEA5●●●H30               |                                    |
| 40<br>50                                 |                      | 4            | JLL36225<br>JLL36250                     | 225<br>250           | SFG1●●●H30<br>SFG4●●●H30               | SFW1●●●H30<br>SFW4●●●H30                                                                             | SFW11●●●H30<br>SFW14●●●H30                                                                | SFA11●●●H30<br>SFA14●●●H30                                                | SFA1●●●H30<br>SFA4●●●H30               |                                    |
| 60<br>75<br>100                          |                      | 5            | JLL36250<br>LLL36400U33X<br>LLL36600U33X | 250<br>400<br>600    | SGG6●●●H30<br>SGG4●●●H30<br>SGG2●●●H30 | SGW6●●●H30<br>SGW4●●●H30<br>SGW2●●●H30                                                               | —                                                                                         | SGA16●●●H30<br>SGA14●●●H30<br>SGA12●●●H30                                 | SGA6●●●H30<br>SGA4●●●H30<br>SGA2●●●H30 |                                    |
| 125<br>150–200                           |                      | 6            | LLL36600U33X<br>MJL36800                 | 600<br>800           | SHG4●●●H30<br>SHG5●●●H30               | SHW4●●●H30<br>SHW5●●●H30                                                                             | —                                                                                         | SHA14●●●H30<br>SHA15●●●H30                                                | SHA4●●●H30<br>SHA5●●●H30               |                                    |
| 250–300                                  |                      | 7            | PKL36100                                 | 1200                 | SJG3●●●H30                             | SJW3●●●H30                                                                                           | —                                                                                         | SJA13●●●H30                                                               | —                                      |                                    |

NOTE: Some control transformers may require the use of oversized enclosures. Refer to .

Table 16.147: Coil Voltage Codes

| Voltage             |         | Code |
|---------------------|---------|------|
| 60 Hz               | 50 Hz   |      |
| 24 <sup>[63]</sup>  | —       | V01  |
| 120 <sup>[64]</sup> | 110     | V02  |
| 208                 | —       | V08  |
| 240                 | 220     | V03  |
| 277                 | —       | V04  |
| 480                 | 440     | V06  |
| 600                 | 550     | V07  |
| Specify             | Specify | V99  |

NOTE: For voltage codes used with control transformers, see [page 16-118](#). Form S (separate control) is used when a separate source of power is available for the control (coil) voltage. Form S is provided at no charge.

Dimensions: [page 16-58](#)

Factory Modifications (Forms): [page 16-117](#)

Replacement Parts (Class 9998): [page 16-122](#)

Type S Accessories (Class 9999): [page 16-125](#)

For How to Order Information, see [page 16-28](#).

[58] To order melting alloy overload relay, remove form "H30" from part number.

[59] Size 6 and 7 are NEMA 4 only, painted sheet steel enclosures.

[60] NEMA 12 enclosures can be field modified for outdoor non-corrosive and non-service entrance rated applications. See [page 16-112](#) for more information.

[61] Replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard coil voltage codes listed in [Table 16.147](#).

[62] Form H30, with the possibility of a fourth character to select a lower FLA range (for example, H308). See "Solid-State Overload Relay Forms" on [page 16-119](#)

[63] 24 V coils are not available on Sizes 4–7. On Sizes 00–3, where 24 V coils are available,

Form S (separate control) must be specified (for example, order as 8539SBG1V01S).

[64] These voltage codes must include Form S (provided at no charge). When specifying Form S, please include the motor voltage when ordering (for example, order as 8539SCG5V02S).

**Line Voltage Type**

**3-Pole Polyphase—600 Vac Maximum—50–60 Hz**

For Form H30\* (special lower-FLA factory-assembled starter combinations with Motor Logic SSOLR protection), see [Solid-State Overload Relay Forms](#), page 16-119.

**Table 16.148: Class 8539 Line Voltage, Thermal-Magnetic Circuit Breaker Type, Non-Reversing, with Motor Logic SSOLR (replace ●●● with the voltage code)**<sup>[65]</sup>

| Ratings                         |                   |           |                 |               | NEMA 1 General Purpose Enclosure | NEMA 4 & 4X Watertight and Dusttight Stainless Steel (304) Enclosure (Sizes 0–5) | NEMA 4 & 4X Watertight and Dusttight and Corrosion Resistant Polyester Enclosure | NEMA 12/3R/67 Dusttight and Driptight Industrial Use Enclosure |                        |
|---------------------------------|-------------------|-----------|-----------------|---------------|----------------------------------|----------------------------------------------------------------------------------|----------------------------------------------------------------------------------|----------------------------------------------------------------|------------------------|
| Motor Voltage (Starter Voltage) | Max. Hp Polyphase | NEMA Size | Circuit Breaker |               | Type [68]                        | Type [68]                                                                        | Type [68]                                                                        | With External Reset                                            | Without External Reset |
|                                 |                   |           | Type            | Ampere Rating |                                  |                                                                                  |                                                                                  | Type [68]                                                      | Type [68]              |
| 460 (480)                       | 5                 | 0         | HLL36015        | 15            | SBG1●●●H30 [69]                  | SBW1●●●H30 [69]                                                                  | SBW11●●●H30 [69]                                                                 | SBA11●●●H30 [69]                                               | SBA1●●●H30 [69]        |
|                                 | 7.5               | 1         | HLL36025        | 25            | SCG3●●●H30 [69]                  | SCW3●●●H30 [69]                                                                  | SCW13●●●H30 [69]                                                                 | SCA13●●●H30 [69]                                               | SCA3●●●H30 [69]        |
|                                 | 10                | 1         | HLL36030        | 30            | SCG7●●●H30 [69]                  | SCW7●●●H30 [69]                                                                  | SCW17●●●H30 [69]                                                                 | SCA17●●●H30 [69]                                               | SCA7●●●H30 [69]        |
|                                 | 15                | 2         | HLL36045        | 45            | SDG3●●●H30 [69]                  | SDW3●●●H30 [69]                                                                  | SDW13●●●H30 [69]                                                                 | SDA13●●●H30 [69]                                               | SDA3●●●H30 [69]        |
|                                 | 20                | 2         | HLL36060        | 60            | SDG1●●●H30 [69]                  | SDW1●●●H30 [69]                                                                  | SDW11●●●H30 [69]                                                                 | SDA11●●●H30 [69]                                               | SDA1●●●H30 [69]        |
|                                 | 25                | 2         | HLL36070        | 70            | SDG5●●●H30 [69]                  | SDW5●●●H30 [69]                                                                  | SDW15●●●H30 [69]                                                                 | SDA15●●●H30 [69]                                               | SDA5●●●H30 [69]        |
|                                 | 30                | 3         | HLL36080        | 80            | SEG7●●●H30                       | SEW7●●●H30                                                                       | SEW17●●●H30                                                                      | SEA17●●●H30                                                    | SEA7●●●H30             |
|                                 | 40                | 3         | HLL36100        | 100           | SEG3●●●H30                       | SEW3●●●H30                                                                       | SEW13●●●H30                                                                      | SEA13●●●H30                                                    | SEA3●●●H30             |
|                                 | 50                | 3         | HLL36150        | 150           | SEG5●●●H30                       | SEW5●●●H30                                                                       | SEW15●●●H30                                                                      | SEA15●●●H30                                                    | SEA5●●●H30             |
|                                 | 60                | 4         | JLL36150        | 150           | SFG5●●●H30                       | SFW5●●●H30                                                                       | SFW15●●●H30                                                                      | SFA15●●●H30                                                    | SFA5●●●H30             |
|                                 | 75                | 4         | JLL36200        | 200           | SFG3●●●H30                       | SFW3●●●H30                                                                       | SFW13●●●H30                                                                      | SFA13●●●H30                                                    | SFA3●●●H30             |
|                                 | 100               | 4         | JLL36250        | 250           | SFG4●●●H30                       | SFW4●●●H30                                                                       | SFW14●●●H30                                                                      | SFA14●●●H30                                                    | SFA4●●●H30             |
| 575 (600)                       | 125–150           | 5         | LLL36400U33X    | 400           | SGG4●●●H30                       | SGW4●●●H30                                                                       | —                                                                                | SGA14●●●H30                                                    | SGA4●●●H30             |
|                                 | 200               | 5         | LLL36600U33X    | 600           | SGG2●●●H30                       | SGW2●●●H30                                                                       | —                                                                                | SGA12●●●H30                                                    | SGA2●●●H30             |
|                                 | 250               | 6         | LLL36600U33X    | 600           | SHG4●●●H30                       | SHW4●●●H30                                                                       | —                                                                                | SHA14●●●H30                                                    | SHA4●●●H30             |
|                                 | 300–400           | 6         | MJL36800        | 800           | SHG5●●●H30                       | SHW5●●●H30                                                                       | —                                                                                | SHA15●●●H30                                                    | SHA5●●●H30             |
|                                 | 500–600           | 7         | PLL36120        | 1200          | SJG3●●●H30                       | SJW3●●●H30                                                                       | —                                                                                | SJA13●●●H30                                                    | —                      |
|                                 | 5                 | 0         | HLL36015        | 15            | SBG1●●●H30 [69]                  | SBW1●●●H30 [69]                                                                  | SBW11●●●H30 [69]                                                                 | SBA11●●●H30 [69]                                               | SBA1●●●H30 [69]        |
|                                 | 7.5               | 1         | HLL36020        | 20            | SCG8●●●H30 [69]                  | SCW8●●●H30 [69]                                                                  | SCW18●●●H30 [69]                                                                 | SCA18●●●H30 [69]                                               | SCA8●●●H30 [69]        |
|                                 | 10                | 1         | HLL36025        | 25            | SCG3●●●H30 [69]                  | SCW3●●●H30 [69]                                                                  | SCW13●●●H30 [69]                                                                 | SCA13●●●H30 [69]                                               | SCA3●●●H30 [69]        |
|                                 | 15                | 2         | HLL36035        | 35            | SDG8●●●H301                      | SDW8●●●H301                                                                      | SDW18●●●H301                                                                     | SDA18●●●H301                                                   | SDA8●●●H301            |
|                                 | 20                | 2         | HLL36045        | 45            | SDG3●●●H30 [69]                  | SDW3●●●H30 [69]                                                                  | SDW13●●●H30 [69]                                                                 | SDA13●●●H30 [69]                                               | SDA3●●●H30 [69]        |
|                                 | 25                | 2         | HLL36060        | 60            | SDG1●●●H30 [69]                  | SDW1●●●H30 [69]                                                                  | SDW11●●●H30 [69]                                                                 | SDA11●●●H30 [69]                                               | SDA1●●●H30 [69]        |
|                                 | 30                | 3         | HLL36070        | 70            | SEG4●●●H30                       | SEW4●●●H30                                                                       | SEW14●●●H30                                                                      | SEA14●●●H30                                                    | SEA4●●●H30             |
| 575 (600)                       | 40                | 3         | HLL36090        | 90            | SEG6●●●H30                       | SEW6●●●H30                                                                       | SEW16●●●H30                                                                      | SEA16●●●H30                                                    | SEA6●●●H30             |
|                                 | 50                | 3         | HLL36100        | 100           | SEG3●●●H30                       | SEW3●●●H30                                                                       | SEW13●●●H30                                                                      | SEA13●●●H30                                                    | SEA3●●●H30             |
|                                 | 60–75             | 4         | JLL36150        | 150           | SFG5●●●H30                       | SFW5●●●H30                                                                       | SFW15●●●H30                                                                      | SFA15●●●H30                                                    | SFA5●●●H30             |
|                                 | 100               | 4         | JLL36250        | 250           | SFG4●●●H30                       | SFW4●●●H30                                                                       | SFW14●●●H30                                                                      | SFA14●●●H30                                                    | SFA4●●●H30             |
|                                 | 125–150           | 5         | JLL36250        | 250           | SGG6●●●H30                       | SGW6●●●H30                                                                       | —                                                                                | SGA16●●●H30                                                    | SGA6●●●H30             |
|                                 | 200               | 5         | LLL36400U33X    | 400           | SGG4●●●H30                       | SGW4●●●H30                                                                       | —                                                                                | SGA14●●●H30                                                    | SGA4●●●H30             |
|                                 | 250–350           | 6         | LLL36600U33X    | 600           | SHG4●●●H30                       | SHW4●●●H30                                                                       | —                                                                                | SHA14●●●H30                                                    | SHA4●●●H30             |
|                                 | 400               | 6         | MJL36800        | 800           | SHG5●●●H30                       | SHW5●●●H30                                                                       | —                                                                                | SHA15●●●H30                                                    | SHA5●●●H30             |
|                                 | 500–600           | 7         | PKL36100        | 1200          | SJG2●●●H30                       | SJW2●●●H30                                                                       | —                                                                                | SJA12●●●H30                                                    | —                      |

**Table 16.149: Class 8539 Thermal Magnetic Circuit Breaker Type, Single Phase**<sup>[70][71]</sup> with Melting Alloy Overload Relays

| Motor Voltage | Max. Hp | Coil Voltage | NEMA Size | Poles | Circuit Breaker (Type) | Ampere Rating | NEMA 1 General Purpose Enclosure | NEMA 4 & 4X Watertight and Dusttight Stainless Steel (304) Enclosure (Sizes 0–2) | NEMA 4 & 4X Watertight, Dusttight and Corrosion Resistant Polyester Enclosure | NEMA 12/3R/67 Dusttight and Driptight Industrial Use Enclosure |                        |
|---------------|---------|--------------|-----------|-------|------------------------|---------------|----------------------------------|----------------------------------------------------------------------------------|-------------------------------------------------------------------------------|----------------------------------------------------------------|------------------------|
|               |         |              |           |       |                        |               | Type                             | Type                                                                             | Type                                                                          | With External Reset                                            | Without External Reset |
| 120           | 1       | 120          | 0         | 2     | HLL26030               | 30            | SBG72V02                         | SBW72V02                                                                         | SBW75V02                                                                      | SBA75V02                                                       | SBA72V02               |
|               | 2       |              | 1         |       | HLL26050               | 50            | SCG72V02                         | SCW72V02                                                                         | SCW75V02                                                                      | SCA75V02                                                       | SCA72V02               |
|               | 3       |              | 2         |       | HLL26080               | 80            | SDG71V02                         | SDW71V02                                                                         | SDW74V02                                                                      | SDA74V02                                                       | SDA71V02               |
| 240           | 2       | 240          | 0         | 2     | HLL26025               | 25            | SBG71V03                         | SBW71V03                                                                         | SBW74V03                                                                      | SBA74V03                                                       | SBA71V03               |
|               | 3       |              | 1         |       | HLL26035               | 35            | SCG71V03                         | SCW71V03                                                                         | SCW74V03                                                                      | SCA74V03                                                       | SCA71V03               |
|               | 7.5     |              | 2         |       | HLL26080               | 80            | SDG71V03                         | SDW71V03                                                                         | SDW74V03                                                                      | SDA74V03                                                       | SDA71V03               |

**NOTE:** Some control transformers may require the use of oversized enclosures.

Refer to [page 16-57](#).

For How to Order Information, see [page 16-28](#).



<sup>[65]</sup> To order melting alloy overload relay, remove form "H30" from part number.

<sup>[66]</sup> Size 6 and 7 are NEMA 4 only, painted sheet steel enclosures.

<sup>[67]</sup> NEMA 12 enclosures can be field modified for outdoor non-corrosive and non-service entrance rated applications. See [page 16-112](#) for more information.

<sup>[68]</sup> Replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard coil voltage codes listed in [Table 16.147](#).

<sup>[69]</sup> Form H30, with the possibility of a fourth character to select a lower FLA range (for example, H308). See "Solid-State Overload Relay Forms" on [page 16-119](#).

<sup>[70]</sup> Not included in the Laser™ Delivery program.

<sup>[71]</sup> Single-phase units require one thermal unit and are not available with Form H●● (solid-state overload relay).



## Application Data

Table 16.150: Class 8539—UL Listed Short Circuit Ratings

| Motor Circuit Protector Type |               |                      |                      |
|------------------------------|---------------|----------------------|----------------------|
| NEMA Size                    | Enclosure     | AIC at 480 Vac (RMS) | AIC at 600 Vac (RMS) |
| 0, 1                         | Standard [72] | 100,000              | 35,000               |
| 2 thru 5                     | Standard [72] | 100,000              | 50,000               |
| 6                            | Standard [72] | 65,000               | 18,000               |
| 7                            | Standard [72] | 65,000               | 30,000               |

Table 16.151: Electronic Motor Circuit Protector (MCP)  
Selection by HP Ratings of Induction-type Squirrel-Cage Motors

| 3Ø, 60 Hz Voltages |         |         |         | Full-Load (A) | Suffix |
|--------------------|---------|---------|---------|---------------|--------|
| 200 Vac            | 230 Vac | 460 Vac | 575 Vac |               |        |
| .5–5               | .5–7.5  | .75–15  | 1–20    | 1.5–25        | M71    |
| 5–10               | 5–15    | 10–30   | 15–40   | 14–42         | M72    |
| 10–25              | 15–30   | 25–60   | 30–75   | 30–80         | M73    |
| 20–40              | 25–50   | 50–100  | 60–125  | 58–130        | M74    |
| 40–60              | 50–75   | 100–150 | 125–200 | 114–217       | M75    |

**NOTE:** The MCP adjustable trip range is determined by the suffix of the circuit breaker catalog number. This table indicates the trip range which corresponds to a given suffix number. The MCP motor circuit protector should be adjusted to a level just above locked-rotor current of the motor. This setting will provide optimum overcurrent protection for the motor. For more information on MCP instantaneous-trip circuit breakers, refer to the MCP circuit breaker section of this catalog.

Table 16.152: Class 8539, UL Listed Short Circuit Ratings

| Thermal Magnetic Circuit Breaker Type |               |                      |                      |
|---------------------------------------|---------------|----------------------|----------------------|
| NEMA Size                             | Enclosure     | AIC at 480 Vac (RMS) | AIC at 600 Vac (RMS) |
| 0, 1                                  | Standard [72] | 100,000              | 35,000               |
| 2 thru 5                              | Standard [72] | 100,000              | 50,000               |
| 6                                     | Standard [72] | 65,000               | 18,000               |
| 7                                     | Standard [72] | 65,000               | 30,000               |

Table 16.153: Class 8538—UL Listed Short Circuit Ratings

| NEMA Size | NEMA Fuse Class | Enclosure     | Available Amperes RMS Symmetrical |
|-----------|-----------------|---------------|-----------------------------------|
| 0–3       | Class H or K    | Standard [73] | 5,000                             |
| 0–3       | Class R/J       | Standard [73] | 100,000                           |
| 0–2       | Class H or K    | Oversize      | 5,000                             |
| 0–2       | Class R/J       | Standard      | 100,000                           |
| 4–5       | Class H or K    | Standard [73] | 10,000                            |
| 4–5       | Class R/J       | Standard [73] | 100,000                           |
| 6         | Class H or K    | Standard [73] | 18,000                            |
| 6         | Class R/J       | Standard [73] | 100,000                           |

Table 16.154: 2: Motor Code Letter Table

| Horsepower  | Motor Code Letters |
|-------------|--------------------|
| 1/2 or less | A-L                |
| 3/4–1-1/2   | A-K                |
| 2–3         | A-J                |
| 5–25        | A-H                |
| 30–125      | A-G                |
| 150 or more | A-F                |

**NOTE:** The combination starter selection tables on page 16-51 to page 16-52 are suitable for motors with locked-rotor current letters according to NEC Table 430-7(b) as listed in Table 16.154. For other motors, a special thermal-magnetic circuit breaker with adjustable magnetic trip settings for the specific motor is required. When ordering for these special applications, specify the motor horsepower, voltage, frequency, full-load current, and code letter (or locked rotor current) to help ensure proper protection.

Table 16.155: Terminals

| NEMA Size | Type    | Line Terminals on Disconnect |                  |                                                                                                                                                                                                                                                                                      | Power Terminals On Magnetic Starter |                     |                    | Control Terminals On Magnetic Starter |               |                    |
|-----------|---------|------------------------------|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|---------------------|--------------------|---------------------------------------|---------------|--------------------|
|           |         | Type of Lug                  | Wire Range       |                                                                                                                                                                                                                                                                                      | Type of Lug                         | Wire Range          | Wires Per Terminal | Type of Lug                           | Wire Range    | Wires Per Terminal |
|           |         |                              | Switch           | Circuit Breaker                                                                                                                                                                                                                                                                      |                                     |                     |                    |                                       |               |                    |
| 0 & 1     | SB & SC | Box Lug                      | 14–1/0 Cu/Al     | (1) 14-3/0 Al or Cu                                                                                                                                                                                                                                                                  | Pressure Wire                       | 14–8 Cu             | 1 or 2             | Pressure Wire                         | 16–12 Cu      | 2                  |
| 2         | SD      | Box Lug                      | 14–1/0 Cu/Al     | (1) 14-3/0 Al or Cu                                                                                                                                                                                                                                                                  | Box Lug                             | 14–4 Cu             | 1                  | Pressure Wire                         | 16–12 Cu      | 2                  |
| 3         | SE      | Box Lug                      | 14–1/0 Cu/Al     | (1) 14-3/0 Al or Cu                                                                                                                                                                                                                                                                  | Box Lug                             | 14–0 Cu             | 1                  | Pressure Wire                         | 16–12 Cu      | 2                  |
| 4         | SF      | Box Lug                      | 6–300 MCM Cu/Al  | (1) 4-4/0 Al or Cu (JLL Breaker 150 A - 175 A)<br>(1) 3/0 - 350 MCM Al or Cu (JLL Breaker 200 A - 250 A)                                                                                                                                                                             | Box Lug                             | 8–250 MCM Cu        | 1                  | Pressure Wire                         | 16–12 Cu      | 2                  |
| 5         | SG      | Box Lug                      | One 4–500 MCM Cu | (1) 2 - 500 MCM Al or (1) 2 - 350 MCM Cu (DJL36400 Breaker)<br>(2) 2/0 - 500 MCM Al or (2) 2/0 - 350 MCM Cu (DLL36600 Breaker)<br>(1) 3/0 - 350 MCM Al or (1) 3/0 - 350 MCM Cu (JLL36250 Breaker)                                                                                    | Box Lug                             | 4–500 MCM Cu        | 1                  | Pressure Wire                         | 16–12 Cu      | 2                  |
| 6         | SH      | Box Lug                      | —                | (2) 2/0 - 500 MCM Al or (2) 2/0 - 350 MCM Cu (DJL36600 Breaker, DLL Breaker)<br>(1) 2 - 600 MCM Al or (1) 2 - 350 MCM Cu (DJL36400 Breaker)<br>(3) 3/0 - 500 MCM Al or (3) 3/0 - 350 MCM Cu (MJL36800 Breaker)<br>(3) 3/0 - 500 MCM Al or (3) 3/0 - 350 MCM Cu (PLL34080M68 Breaker) | Parallel Groove                     | 250–500 MCM Cu [74] | 1 or 2             | Pressure Wire                         | 16–12 Cu [75] | 2                  |
| 7         | SJ      | Box Lug                      | —                | (4) 3/0 - 300 MCM Al or CU (PJL, PKL, PLL Breaker)                                                                                                                                                                                                                                   | Parallel Groove                     | 250–500 MCM Cu      | 1–4                | Pressure Wire                         | 16–12 Cu      | 2                  |

[72] Standard enclosure includes: NEMA 1, 4 and 4X stainless, and 12/3R.

[73] Standard enclosure includes non-oversize NEMA 1, 4 and 4X stainless, and 12.

[74] Order Class 9999 Type SCU6 parts kit to convert power terminals to accept sizes 2/0–300 MCM wire.

[75] Terminal block range limited to 16–14.



### Accessories—Interlocks and Control Transformers

A one or two-pole electrical interlock can be added to the disconnect switch or circuit breaker. So if a separate control circuit is used, the magnetic starter can be de-energized when the disconnect is switched to the Off position. See Table 16.156 for proper interlock selection.

For electrical ratings of disconnect and circuit breaker interlocks, see Table 16.157.

An electrical interlock may also be factory installed in either a disconnect switch or circuit breaker combination starter. Specify **Form Y74** for single-pole or **Form Y75** for two-pole interlocks.

**Table 16.156: Disconnect Switch and Breaker Interlocks**

| Class                     | Type                                                                               | SPDT (Y74)      | DPDT (Y75)      |
|---------------------------|------------------------------------------------------------------------------------|-----------------|-----------------|
|                           |                                                                                    | Class 9999 Type | Class 9999 Type |
| 8538 <a href="#">[76]</a> | SB, SC, SD (Series B)                                                              | R6              | R7              |
| 8538, 8738                | SD (Series C)                                                                      | R43             | R44             |
|                           | SB, SC (Series C)                                                                  | R45             | R46             |
|                           | SE, SF (Series A)                                                                  | R8              | R9              |
|                           | SE (Series B & C)                                                                  | R41             | R42             |
|                           | SF (Series B & C)                                                                  | R39             | R40             |
|                           | SG                                                                                 | R35             | R36             |
| 8539, 8739                | SB, SC, SD, SE, SF, SG (Series K)                                                  | R26             | R27             |
| 8538                      | SBA, SCA, SBG, SCG (Series D and above)                                            | TC11            | TC21            |
| 8538                      | SBAS8, SCAS8, SBGS8, SCGS8 (Series D and above)                                    | TC10            | TC20            |
| 8738                      | SBAS8, SCAS8, SBGS8, SCGS8 (Series E and above)                                    | TC10            | TC20            |
| 8738                      | SBA, SCA, SBG, SCG (Series E and above)                                            | TC11            | TC21            |
| 8538                      | SDA, SDA <a href="#">[76]</a> , SDG, SDG <a href="#">[76]</a> (Series D and above) | TC10            | TC20            |
| 8738                      | SDA, SDG (Series E and above)                                                      | TC10            | TC20            |
| 8538, 8738                | SEA, SEG (Series D and above)                                                      | TC10            | TC20            |

**Table 16.157: Disconnect Switch and Breaker Interlock Electrical Ratings**

| Class 9999 Type R6, 8, 26, 35, 39, 41, 43, 45, TC10, & TC11 |                 |       |                                 | Class 9999 Type R7, 9, 27, 36, 40, 42, 44, 46 & TC 20, 21 |                 |      |       |     |                                 |
|-------------------------------------------------------------|-----------------|-------|---------------------------------|-----------------------------------------------------------|-----------------|------|-------|-----|---------------------------------|
| AC—50 or 60 Hz                                              |                 |       |                                 | AC—50 or 60 Hz                                            |                 |      |       |     |                                 |
| Volts                                                       | Maximum Current |       |                                 | Volts                                                     | Maximum Current |      |       |     | Continuous Carrying Current (A) |
|                                                             | Make            | Break | Continuous Carrying Current (A) |                                                           | Make            |      | Break |     |                                 |
|                                                             | (A)             | (A)   |                                 |                                                           | (A)             | VA   | (A)   | VA  |                                 |
| 120                                                         | 40              | 15    | 15                              | 120                                                       | 30              | 3450 | 3     | 345 | 10                              |
| 240                                                         | 20              | 10    | 15                              | 240                                                       | 15              | 3450 | 1.5   | 345 | 10                              |
| 480                                                         | 10              | 6     | 15                              | 480                                                       | 7.5             | 3450 | 0.75  | 345 | 10                              |
| 600                                                         | 8               | 5     | 15                              | 600                                                       | 6               | 3450 | 0.6   | 345 | 10                              |

**Table 16.158: Control Transformer Selection**

| NEMA Size | Starter Type | Standard Capacity (Form FF4T) | Additional Capacity |                      |                      |
|-----------|--------------|-------------------------------|---------------------|----------------------|----------------------|
|           |              |                               | 50 VA (Form FF4T10) | 100 VA (Form FF4T11) | 200 VA (Form FF4T12) |
|           |              | Class 9070 Type [77]          |                     |                      |                      |
| 0 & 1     | SB & SC      | TF100                         | TF150               | TF200                | TF300 [78]/[79]      |
| 2         | SD           | TF100                         | TF150               | TF200                | TF300                |
| 3         | SE           | TF150                         | TF200               | TF300                | TF500                |
| 4         | SF           | TF300                         | TF300               | TF500                | T500                 |
| 5         | SG           | TF100 and 8501XO20            | TF100 and 8501XO20  | TF150 and 8501XO20   | TF300 and 8501XO20   |
| 6         | SH           | EO3S2 is standard             | N/A                 | EO3FS2 and T100      | EO3S2 and TF200      |
| 7         | SJ           | EO19S2 is standard            | N/A                 | EO19S2 and TE100     | EO3S2 and TF200      |

**NOTE:** 9070TF transformers are now standard in Series K combination starters.

**Internal Auxiliary Switch**—Circuit breakers can be supplied with a factory installed auxiliary switch for remote indication of an open and/or tripped or a closed breaker. One (specify **Form Y741**) or two (specify **Form Y751**) auxiliary switches can be supplied. The switches are supplied with normally open and normally closed circuits with a common connection. Contacts must be used on the same polarity and are rated 15 A at 240 Vac. The auxiliary switches are located internally and are furnished with 19-20 inch long leads.

**Alarm Switch**—The alarm switch only operates when the breaker is tripped. It is used to actuate bell alarms and warning lights. The alarm switch is factory installed only (specify **Form Y742**) and consists of a single pole single throw switch which is normally open except when the breaker is tripped. The contacts are rated 4 A at 240 Vac. This switch is located in the breaker and is supplied with 19-20 inch long leads.

**Transformer Selection**—Space and drilling are provided in all disconnect switch and circuit breaker combination starters in NEMA 1, 4 & 4X stainless and polyester, 12 and 7 & 9 bolted enclosures for the field addition (or factory installation) of a Class 9070 control circuit transformer and Class 9999 Type SFR4 fuse holder. This kit can be either panel mounted or side mounted on the Type S starter. For standard control transformer selection in combination starters, see . Consult the field office for transformer additions to NEMA 7 and 9 Spin Top™ enclosures. For secondary fuse holder, order 9080PF1.

**Fuse Block Mounting Brackets**—The standard capacity transformer, Class 9070 Type T100, for the Size 0 and 1 starters mounts to the right of the magnetic starter.

**Standards**—Most combination starters and forms are UL Listed in file E152395, Category NKJH, and CSA File CR 584.

[76] Class 8538 type numbers ending in suffix **S8**.

[77] Complete the contactor or starter Class and Type with the voltage code. See [Full Voltage Contactors and Starters Forms](#), page 16-118.

[78] Requires oversized enclosure. (Size 2 reversing enclosure.)

[79] Available in standard enclosure with Mag-Gard™ circuit breaker and non-fusible disconnect switch. Requires oversized enclosure with thermal-magnetic circuit breakers and fusible disconnect switches. (Size 2 reversing enclosure.)

## Approximate Dimensions

Table 16.159: See Figure: NEMA 1 Enclosure, Sizes 0–2

| NEMA Size | Class      | Type     | Dimensions, in. [80] |      |      |      |      |       |      |      |   |      |      |      |      |      |      |   | Top & Bottom |          | Sides | Wt. (lb) |
|-----------|------------|----------|----------------------|------|------|------|------|-------|------|------|---|------|------|------|------|------|------|---|--------------|----------|-------|----------|
|           |            |          | A                    | B    | C    | D    | E    | F     | G    | H    | I | J    | K    | L    | M    | N    | O    | P | W            | X        | Y     |          |
| 0–1       | 8538       | SBG, SCG | 9.5                  | 22.5 | 8.34 | 6.38 | 20.5 | 14.66 | 1.81 | 1.69 | 3 | 2.31 | 1.06 | 3.25 | 2.19 | 1.25 | 0.88 | — | 0.5–0.75     | 0.5–0.75 | 0.5   | 38       |
|           | 8539       | SBG, SCG | 9.5                  | 22.5 | 9.84 | 6.38 | 20.5 | 14.66 | 1.81 | 1.69 | 3 | 2.31 | 1.06 | 3.25 | 2.19 | 1.25 | 0.88 | — | 0.5–0.75     | 0.5–0.75 | 0.5   | 38       |
| 2         | 8538, 8539 | SDG      | 10.5                 | 26   | 9.59 | 7.38 | 24   | 16.91 | 2.13 | 2    | 4 | 2.31 | 1.06 | 3.25 | 2.19 | 1.25 | 0.88 | — | 1–1.25       | 0.5–0.75 | 0.5   | 54       |

Table 16.160: See Figure: NEMA 1 Enclosure, Sizes 3–6

| NEMA Size | Class      | Type | Dimensions, in. [80] |      |       |      |   |       |      |     |   |      |      |      |      |      |      |      | Top & Bottom     |          | Sides | Wt. (lb) |
|-----------|------------|------|----------------------|------|-------|------|---|-------|------|-----|---|------|------|------|------|------|------|------|------------------|----------|-------|----------|
|           |            |      | A                    | B    | C     | D    | E | F     | G    | H   | I | J    | K    | L    | M    | N    | O    | P    | W                | X        | Y     |          |
| 3 [81]    | 8538, 8539 | SEG  | 15.25                | 42   | 10.59 | 9.25 | 3 | 22.72 | 41   | 0.5 | — | 2.83 | 3.53 | 5    | 2.69 | 5.38 | 1.28 | 0.91 | 1–1.25<br>2–2.5  | 0.5–0.75 | 0.5   | 102      |
| 4         | 8538       | SFG  | 16                   | 52.5 | 10.53 | 10   | 3 | 23.66 | 51.5 | 0.5 | — | 2.83 | 3.53 | 5    | 2.69 | 5.38 | 1.28 | 0.91 | 2.5              | 0.5–0.75 | 0.5   | 163      |
|           | 8539       | SFG  | 16                   | 52.5 | 10.53 | 10   | 3 | 23.66 | 51.5 | 0.5 | — | 2.83 | 3.53 | 5    | 2.69 | 5.38 | 1.28 | 0.91 | 2.5              | 0.5–0.75 | 0.5   | 163      |
| 5         | 8538       | SGG  | 20                   | 78   | 15.5  | 12   | 4 | 29.41 | 77   | 0.5 | — | 3.52 | 4.61 | 9.25 | 3.19 | —    | —    | —    | 0.5–0.75<br>[82] | 3        | —     | 450      |
|           | 8539       | SGG  | 20                   | 66   | 13.72 | 12   | 4 | 29.41 | 65   | 0.5 | — | 3.52 | 4.61 | 5    | 3.19 | —    | —    | —    | 0.5–0.75         | 3        | —     | 420      |
| 6 [83]    | 8538, 8539 | SHG  | 36                   | 90   | 21.03 | —    | — | 41.38 | —    | —   | — | —    | —    | 5    | —    | —    | —    | —    | —                | —        | —     | —        |

Table 16.161: See Figure: NEMA 12/3R Enclosure

| NEMA Size | Class      | Type | Dimensions, in. [84] |       |       |      |     |      |      |      |      |       | Wt. (lb) |
|-----------|------------|------|----------------------|-------|-------|------|-----|------|------|------|------|-------|----------|
|           |            |      | A                    | B     | C     | D    | E   | F    | G    | H    | I    | J     |          |
| 0–1       | 8538       | SBA  | 9.5                  | 8.34  | 24    | 3.25 | 2.5 | 4.5  | 23.5 | 0.59 | 4.44 | 14.31 | 40       |
|           | 8539       | SCA  | 9.5                  | 9.84  | 24    | 3.25 | 2.5 | 4.5  | 23.5 | 0.59 | 4.44 | 14.31 | 40       |
| 2         | 8538, 8539 | SDA  | 10.5                 | 9.59  | 27.75 | 3.25 | 2.5 | 5.5  | 27   | 0.38 | 4.13 | 16.56 | 55       |
| 3 [81]    | 8538, 8539 | SEA  | 15.25                | 10.59 | 42    | 5    | 3   | 9.25 | 41   | 0.5  | 5.06 | 22.31 | 111      |
| 4         | 8538       | SFA  | 16                   | 10.53 | 52.5  | 5    | 3   | 10   | 51.5 | 0.5  | 4.19 | 22.97 | 170      |
|           | 8539       | SFA  | 16                   | 10.53 | 52.5  | 5    | 3   | 10   | 51.5 | 0.5  | 5.19 | 22.97 | 170      |
| 5         | 8538       | SGA  | 20                   | 13.72 | 78    | 9.25 | 4   | 12   | 77   | 0.5  | 7.78 | 29.41 | —        |
|           | 8539       | SGA  | 20                   | 13.72 | 66    | 5    | 4   | 12   | 65   | 0.5  | 7.78 | 27.41 | 440      |
| 6 [83]    | 8538, 8539 | SHA  | 36                   | 17    | 90    | 5    | —   | —    | —    | —    | —    | 47.38 | —        |

Table 16.162: See Figure: NEMA 4 and 4X Stainless Steel Enclosure

| NEMA<br>Size | Class      | Type | Dimensions, in. [80] |       |       |      |      |       |      |      |      |      |      |       | Bottom   | Top & Bot. | Wt.<br>(lb) |
|--------------|------------|------|----------------------|-------|-------|------|------|-------|------|------|------|------|------|-------|----------|------------|-------------|
|              |            |      | A                    | B     | C     | D    | E    | F     | G    | H    | I    | J    | K    | L     | W        | X          |             |
| 0–1          | 8538       | SBW  | 9.5                  | 8.34  | 24.06 | 3.25 | 2.5  | 4.5   | 23.5 | 0.59 | 3.03 | 1.31 | 2.31 | 14.28 | 0.75 Hub | 1 Hub      | 40          |
|              | 8539       | SCW  | 9.5                  | 9.84  | 24.06 | 3.25 | 2.5  | 4.5   | 23.5 | 0.59 | 3.03 | 1.31 | 2.31 | 14.28 | 0.75 Hub | 1 Hub      | 40          |
| 2            | 8538, 8539 | SDW  | 10.5                 | 9.59  | 27.75 | 3.25 | 2.5  | 5.5   | 27   | 0.59 | 3    | 2    | 2.63 | 16.53 | 0.75 Hub | 1.5 Hub    | 55          |
| 3 [81]       | 8538, 8539 | SEW  | 15.25                | 10.59 | 42    | 5    | 3.19 | 10.25 | 40.5 | 0.59 | 3    | 2.56 | 3.19 | 22.19 | 0.75 Hub | 2.5 Hub    | 111         |
| 4            | 8538       | SFW  | 16                   | 10.53 | 52.5  | 5    | 3.56 | 11    | 51   | 0.59 | 3    | 2.56 | 3.19 | 22.47 | 0.75 Hub | 2.5 Hub    | 158         |
|              | 8539       | SFW  | 16                   | 10.53 | 52.5  | 3.25 | 2.5  | 11    | 51   | 0.59 | 3    | 2.56 | 3.19 | 22.47 | 0.75 Hub | 2.5 Hub    | 120         |
| 5            | 8538       | SGW  | 20                   | 13.72 | 78    | 9.25 | 4    | 12    | 77   | 0.56 | 4.5  | 3    | 3.5  | 29.41 | 0.75 Hub | 3.5 Hub    | —           |
|              | 8539       | SGW  | 20                   | 13.72 | 66    | 5    | 4    | 12    | 65   | 0.56 | 4.5  | 3    | 3.5  | 29.41 | 0.75 Hub | 3.5 Hub    | 440         |
| 6 [83]       | 8538, 8539 | SHW  | 36                   | 17    | 90    | —    | —    | —     | —    | —    | —    | —    | —    | 47.88 | —        | —          | —           |

**NOTE:** These dimensions are for reference only. If you need precise measurements, contact the Customer Care Center at 1-888-778-2733.

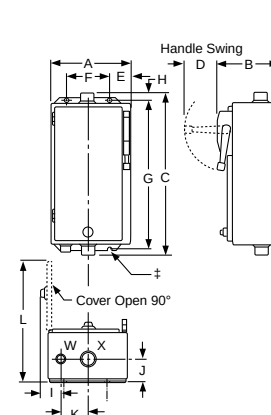
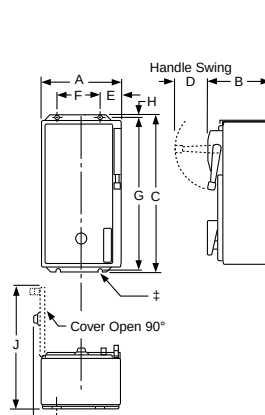
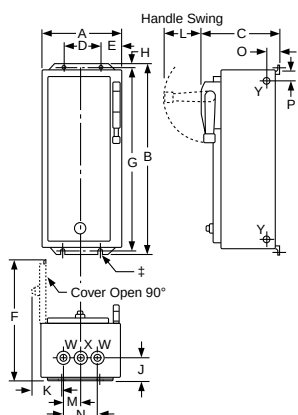
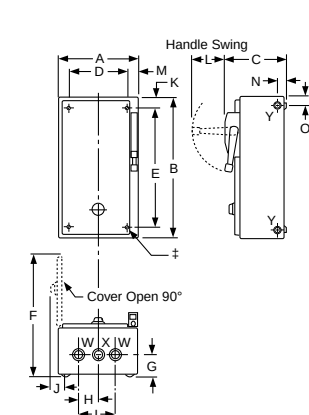


Figure 16.3: NEMA 1 Enclosure, Size 0–2      Figure 16.4: NEMA 1 Enclosure, Size 3–6      Figure 16.5: NEMA 12 Enclosure      Figure 16.6: NEMA 4 and 4X Stainless Steel Enclosure

± = 4 mounting holes: 0.31 in. (8 mm) dia. for Sizes 0, 1, and 2; 0.44 in. (11 mm) dia. for Sizes 3 and 4; 0.56 in. (14 mm) dia., located on external flanges, for Size 5.

**NOTE:** Illustrations may not represent the actual enclosure. They are intended for dimensional information only.


[80] Dimensions also for Form FF4T (standard control transformer). Form FF4T11 (100 VA extra capacity) and Form FF4T12 (200 VA extra capacity) could require the use of an oversized enclosure. Refer to .

[81] Class 8538 Size 3 devices with 200 A fuse clips use dimensions for Class 8538 Size 4.


[82] Left side only.

[83] Size 6 enclosures are floor mounting.

[84] Dimensions include space for control circuit transformers.



**Figure 16.7: NEMA 4X Polyester Enclosure**



**Figure 16.8: Class 8538 and 8539 in Oversize Enclosures—NEMA 1, 4 & 4X Stainless, and 12/3R**

## Enclosures

**NOTE:** These dimensions are for reference only. If you need precise measurements, contact the Customer Care Center at 1-888-778-2733.

**Table 16.163: See Figure: NEMA 4X Polyester Enclosure, page 16-59 [85]**

| NEMA Size | Class                    | Dimensions, in. |       |      |       |       |       |
|-----------|--------------------------|-----------------|-------|------|-------|-------|-------|
|           |                          | Type            | A     | B    | C     | E     | F     |
| 0, 1      | 8538                     | SBW             | 13.72 | 11.4 | 26.94 | 6.25  | 25.75 |
| 0, 1      | 8539                     | SCW<br>SDW      |       |      |       |       |       |
| 0, 1, & 2 | 8738, 8739               | SBW             | 25.25 | 11.4 | 27.00 | 17.88 | 25.75 |
| 2         | 8538, 8539               | SCW<br>SDW      |       |      |       |       |       |
| 3-4       | 8538, 8738<br>8539, 8739 | SEW<br>SFW [86] | 26.31 | 11.4 | 33.50 | 18.50 | 32.25 |

**Table 16.164: See Figure: Class 8538 and 8539 in Oversize Enclosures—NEMA 1, 4 & 4X Stainless, and 12/3R, page 16-59**

| NEMA Size | NEMA Type Encl. | Dimensions, in. |        |        |          |          |       |
|-----------|-----------------|-----------------|--------|--------|----------|----------|-------|
|           |                 | Wide A          | High B | Deep C | Handle L | Mounting |       |
|           |                 |                 |        |        |          | D        | E     |
| 0-2       | 1               | 15              | 28.33  | 9.59   | 3.25     | 11.625   | 26.25 |
|           | 4               | 15              | 30.03  | 9.59   | 3.25     | 10       | 29.75 |
|           | 12              | 15              | 31     | 10.97  | 3.25     | 9        | 30.25 |

## Information on Hubs

Hubs are supplied with each NEMA Type 4X combination starter as shown in Table 16.165.

Note that hubs are only installed in stainless steel enclosures; they are not installed in polyester enclosures.

**Table 16.165: Hub Sizes**

| NEMA Size | Quantity | Hub Size (in.) |
|-----------|----------|----------------|
| 0 and 1   | 1        | 0.75           |
|           | 2        | 1.00           |
| 2         | 1        | 0.75           |
|           | 2        | 1.50           |
| 3 and 4   | 1        | 0.75           |
|           | 2        | 2.50           |

**NOTE:** Illustrations may not represent the actual enclosure—they are intended for dimensional information only.

**Table 16.166: Conduit Sizes LOC A, B, C and D**

| NEMA Size | Standard |
|-----------|----------|
| 0-1       | 1.25     |
| 2         | 1.5      |
| 3-4       | 2.5      |
| 5         | 4        |

[85] Dimensions also for Form F4T (standard control transformer) and Form F4T10 (50 VA additional capacity). Other control transformers may require the use of oversized enclosures. Refer to

[86] 8539 Size 4 only.



NEMA 00, 0, and 1  
Reversing Contactor

## General Information

Class 8702 Type S reversing magnetic contactors are used for starting, stopping, and reversing AC motors where overload protection is separately provided. Class 8702 reversing contactors consist of two Class 8502 contactors mechanically and electrically interlocked. Open type devices, Sizes 0–5, are available in either horizontal or vertical arrangements. Sizes 00, 6, and 7 are available as horizontal only. Enclosed devices, Size 00–7, use horizontally arranged components. Type S reversing contactors are designed for operation at up to 600 Vac, 50/60 Hz.

**NOTE:** In Table 16.167, replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard coil voltage codes listed in Table 16.168.

For information on field modification of NEMA 12 enclosures, see page 16-112.

Table 16.167: 600 Vac Maximum—50–60 Hz

| NEMA Size | Continuous Current Ratings | Motor Voltage            | Max. Hp                  | Open Type     |                 | NEMA 1 General Purpose Enclosure | NEMA 4 & 4X Watertight, Dusttight Brushed Stainless Steel Enclosure (Sizes 0–5)[1] | NEMA 7 & 9 [2] Hazardous Locations, Div. 1 & 2 Class I, Groups C & D Class II, Groups E, F & G |                | NEMA 12/3R/3 Dusttight & Driptight Industrial Use Enclosure |
|-----------|----------------------------|--------------------------|--------------------------|---------------|-----------------|----------------------------------|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|----------------|-------------------------------------------------------------|
|           |                            |                          |                          | Vertical Type | Horizontal Type | Type                             | Type                                                                               | Bolted Aluminum Type                                                                           | SPIN TOP™ Type | Type                                                        |
| 00        | 9                          | 200<br>230<br>460<br>575 | 1.5<br>1.5<br>2<br>2     | —             | SAO4●●●         | SAG4●●●                          | Use Size 0                                                                         | Use Size 0                                                                                     | Use Size 0     | Use Size 0                                                  |
| 0         | 18                         | 200<br>230<br>460<br>575 | 3<br>3<br>5<br>5         | SBO12●●●      | SBO4●●●         | SBG4●●●                          | SBW14●●●                                                                           | SBT49●●●                                                                                       | SBR9●●●        | SBA4●●●                                                     |
| 1         | 27                         | 200<br>230<br>460<br>575 | 7.5<br>7.5<br>10<br>10   | SCO7●●●       | SCO8●●●         | SCG8●●●                          | SCW14●●●                                                                           | SCT49●●●                                                                                       | SCR9●●●        | SCA4●●●                                                     |
| 2         | 45                         | 200<br>230<br>460<br>575 | 10<br>15<br>25<br>25     | SDO1●●●       | SDO2●●●         | SDG2●●●                          | SDW11●●●                                                                           | SDT43●●●                                                                                       | SDR3●●●        | SDA1●●●                                                     |
| 3         | 90                         | 200<br>230<br>460<br>575 | 25<br>30<br>50<br>50     | SEO1●●●       | SEO2●●●         | SEG2●●●                          | SEW11●●●                                                                           | —                                                                                              | —              | SEA1●●●                                                     |
| 4         | 135                        | 200<br>230<br>460<br>575 | 40<br>50<br>100<br>100   | SFO1●●●       | SFO3●●●         | SFG3●●●                          | SFW11●●●                                                                           | —                                                                                              | —              | SFA1●●●                                                     |
| 5         | 270                        | 200<br>230<br>460<br>575 | 75<br>100<br>200<br>200  | SGO1●●●       | SGO3●●●         | SGG3●●●                          | SGW11●●●                                                                           | —                                                                                              | —              | SGA1●●●                                                     |
| 6         | 540                        | 200<br>230<br>460<br>575 | 150<br>200<br>400<br>400 | —             | SHO1●●●         | SHG1●●●                          | SHW1●●●                                                                            | —                                                                                              | —              | SHA1●●●                                                     |
| 7         | 810                        | 200<br>230<br>460<br>575 | 300<br>600<br>600<br>600 | —             | SJO1●●●         | SJG1●●●                          | SJW1●●●                                                                            | —                                                                                              | —              | SJA1●●●                                                     |

Table 16.168: Coil Voltage Codes

| Voltage |         | Code |
|---------|---------|------|
| 60 Hz   | 50 Hz   |      |
| 24[4]   | —       | V01  |
| 120[5]  | 110     | V02  |
| 208     | —       | V08  |
| 240     | 220     | V03  |
| 277     | —       | V04  |
| 480     | 440     | V06  |
| 600     | 550     | V07  |
| Specify | Specify | V99  |

**NOTE:** For voltage codes used with control transformers, see page 16-118. Form S (separate control) is used when a separate source of power is available for the control (coil) voltage. Form S is available at no charge.

Dimensions: page 16-64

Factory Modifications (Forms) page 16-117

Separate Enclosures (Class 9991): page 16-110

Replacement Parts (Class 9998): page 16-122

Type S Accessories (Class 9999): page 16-125

For How to Order Information, see page 16-28.

[1] NEMA 4 and 4X stainless steel enclosures (sizes 0–5) have a brushed finish. Sizes 6 and 7 are painted sheet steel and are rated NEMA 4 only.

[2] NEMA 7 and 9 bolted are not UL listed.

[3] NEMA 12 enclosures can be field modified for outdoor non-corrosive and non-service entrance rated applications.

[4] 24 V coils are not available on Sizes 4–7. On Sizes 00–3, where 24 V coils are available, **Form S** (separate control) can be specified (i.e., order as 8702SAO4V01S).

[5] This voltage code can include **Form S** for separate control (provided at no charge) (for example, order as 8702SAO4V02S).

### Single-Phase and 4-Pole Polyphase

**NOTE:** In Table 16.169, replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard coil voltage codes listed in Table 16.168.

For information on field modification of NEMA 12 enclosures, see page 16-112.

**Table 16.169: 600 Vac Maximum—50–60 Hz**

| NEMA Size           | Continuous Current Ratings | Motor Voltage            | Max. Hp                | Type of Motor       | Open Type     |                 | NEMA 1 General Purpose Enclosure | NEMA 4 & 4X Watertight, Dusttight Brushed Stainless Steel Enclosure | NEMA 7 & 9 [6] Hazardous Locations, Div. 1 & 2 Class I, Groups C & D Class II, Groups E, F & G |                | NEMA 12/3R/7 Dusttight & Driptight Industrial Use Enclosure |
|---------------------|----------------------------|--------------------------|------------------------|---------------------|---------------|-----------------|----------------------------------|---------------------------------------------------------------------|------------------------------------------------------------------------------------------------|----------------|-------------------------------------------------------------|
|                     |                            |                          |                        |                     | Vertical Type | Horizontal Type | Type                             | Type                                                                | Bolted Type                                                                                    | Spin Top™ Type | Type                                                        |
| 2-Pole Single Phase |                            |                          |                        |                     |               |                 |                                  |                                                                     |                                                                                                |                |                                                             |
| 00                  | 9                          | 115<br>230               | 1/3<br>1               | Single Phase 3-Wire | —             | SAO1●●●         | SAG1●●●                          | Use Size 0                                                          | Use Size 0                                                                                     | Use Size 0     | Use Size 0                                                  |
| 0                   | 18                         | 115<br>230               | 1<br>2                 |                     | SBO9●●●       | SBO1●●●         | SBG1●●●                          | SBW11●●●                                                            | SBT46●●●                                                                                       | SBR6●●●        | SBA1●●●                                                     |
| 1                   | 27                         | 115<br>230               | 2<br>3                 |                     | SCO1●●●       | SCO2●●●         | SCG2●●●                          | SCW11●●●                                                            | SCT46●●●                                                                                       | SCR6●●●        | SCA1●●●                                                     |
| 3-Pole Single Phase |                            |                          |                        |                     |               |                 |                                  |                                                                     |                                                                                                |                |                                                             |
| 00                  | 9                          | 115<br>230               | 1/3<br>1               | 4-Wire Rep.-Ind.    | —             | SAO2●●●         | SAG2●●●                          | Use Size 0                                                          | Use Size 0                                                                                     | Use Size 0     | Use Size 0                                                  |
|                     |                            | 115<br>230               | 1/3<br>1               | 4-Wire Split Ph.    | —             | SAO3●●●         | SAG3●●●                          | Use Size 0                                                          | Use Size 0                                                                                     | Use Size 0     | Use Size 0                                                  |
| 0                   | 18                         | 115<br>230               | 1<br>2                 | 4-Wire Rep.-Ind.    | SBO10●●●      | SBO2●●●         | SBG2●●●                          | SBW12●●●                                                            | SBT47●●●                                                                                       | SBR7●●●        | SBA2●●●                                                     |
|                     |                            | 115<br>230               | 1<br>2                 | 4-Wire Split Ph.    | SBO11●●●      | SBO3●●●         | SBG3●●●                          | SBW13●●●                                                            | SBT48●●●                                                                                       | SBR8●●●        | SBA3●●●                                                     |
| 1                   | 27                         | 115<br>230               | 2<br>3                 | 4-Wire Rep.Ind.     | SCO3●●●       | SCO4●●●         | SCG4●●●                          | SCW12●●●                                                            | SCT47●●●                                                                                       | SCR7●●●        | SCA2●●●                                                     |
|                     |                            | 115<br>230               | 2<br>3                 | 4-Wire Split Ph.    | SCO5●●●       | SCO6●●●         | SCG6●●●                          | SCW13●●●                                                            | SCT48●●●                                                                                       | SCR8●●●        | SCA3●●●                                                     |
| 4-Pole Polyphase    |                            |                          |                        |                     |               |                 |                                  |                                                                     |                                                                                                |                |                                                             |
| 0                   | 18                         | 200<br>230<br>460<br>575 | 3<br>5<br>5<br>5       | 2 Phase 4-Wire      | SBO13●●●      | SBO5●●●         | SBG5●●●                          | SBW15●●●                                                            | Consult the Customer Care Center at 1-888-778-2733                                             | SBR10●●●       | SBA5●●●                                                     |
| 1                   | 27                         | 200<br>230<br>460<br>575 | 7.5<br>7.5<br>10<br>10 |                     | SCO9●●●       | SCO10●●●        | SCG10●●●                         | SCW15●●●                                                            |                                                                                                | SCR10●●●       | SCA5●●●                                                     |
| 2                   | 45                         | 200<br>230<br>460<br>575 | 10<br>15<br>25<br>25   |                     | —             | SDO4●●●         | SDG4●●●                          | SDW12●●●                                                            |                                                                                                | SDR4●●●        | SDA2●●●                                                     |
| 3                   | 90                         | 200<br>230<br>460<br>575 | 25<br>30<br>50<br>50   |                     | —             | SEO4●●●         | SEG4●●●                          | SEW12●●●                                                            | —                                                                                              | —              | SEA2●●●                                                     |
| 4                   | 135                        | 200<br>230<br>460<br>575 | 40<br>50<br>100<br>100 |                     | —             | SFO4●●●         | SFG4●●●                          | SFW12●●●                                                            | —                                                                                              | —              | SFA2●●●                                                     |

### Auxiliary Units

Table 16.170 shows the maximum number of auxiliary units (in addition to the holding circuit and interlocking contacts) that can be added to either the forward or reverse contactor or starter.

**Table 16.170: Auxiliary Units—Class 8702, 8736, and 8810**

| NEMA Size (Type) | No. of Poles—Basic Contactor | Maximum number of auxiliary units on each contactor, forward or reverse (in addition to internal holding circuit and interlocking contacts) |
|------------------|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| 00 (SA)          | 2–3                          | 2 single circuit auxiliary contacts (N.O. or N.C.)                                                                                          |
| 0–2 (SB–SD)      | 2–3                          | 4 single circuit auxiliary contacts (N.O. or N.C.) [8]                                                                                      |
|                  | 4                            | 2 single circuit auxiliary contacts (N.O. or N.C.)                                                                                          |
| 3–7 (SE–SJ)      | Any                          | 2 single circuit auxiliary contacts (N.O. or N.C.)                                                                                          |

Dimensions: page 16-64  
Factory Modifications (Forms): page 16-117  
Separate Enclosures (Class 9991): page 16-110  
Replacement Parts (Class 9998): page 16-122  
Type S Accessories (Class 9999): page 16-125  
For How to Order Information, see page 16-28.

[6] NEMA 7 and 9 bolted are not UL listed.  
[7] NEMA 12 enclosures can be field modified for outdoor non-corrosive and non-service entrance rated applications.  
[8] When adding 4 external auxiliary contacts to one Size 0 or 1 contactor, remove one of the return springs.




## Introduction and Overload Relays

### NEMA Sizes 00, 0, 1 Reversing Starter



Horizontal Type



Vertical Type

Class 8736 Type S reversing magnetic starters are used for full-voltage starting, stopping, and reversing AC squirrel cage motors. Class 8736 starters consist of one Class 8502 contactor and one Class 8536 starter mechanically and electrically interlocked. Open type devices, Sizes 0–5, are available in either horizontal or vertical arrangements. Sizes 00, 6, and 7 are available as horizontal only. Enclosed devices use horizontally arranged components. Type S starters are designed for operation at up to 600 Vac, 50/60 Hz. For How to Order Information, see [page 16-28](#)

### Motor Logic™ Solid-State Overload Relay (SSOLR) Protection

These ambient insensitive overload relays are available on three phase sizes 00 through 6 and standard on size 7. They provide phase loss, phase unbalance protection. To order, add Form **H30** (for selectable trip class 10 or 20 protection). For more information about Motor Logic solid-state overload relays (SSOLRs), see [pages 16-101 and 16-119](#). (Catalog no. example: 8736SCO8V06H30)

### New! Adapted Bimetallic or Solid-State Overload Relay (NEMA Sizes 00–1)

The Adapted Bimetallic or Solid-State starter includes a specially designed adapter that attaches with bus bars to the Type S NEMA contactor. This adapter allows direct mounting of the IEC Style bimetallic (LRD or LR3D) or solid-state (LR9D) overload relay (OLR). To order this starter configuration, add **Form E** (adapter only) to the standard catalog number. The LRD, LR3D, or LR9D OLR must be purchased separately, based on the FLA of the motor, and installed in the field to properly operate the starter. For the Adapted Bimetallic device only, if the FLA is known at the time of purchase, you can order the starter with the OLR installed. For more information and a list of options, see [Adapted Bimetallic Overload Relay Forms](#), [page 16-119](#). (Catalog no. example: 8736SCO8V06E—without OLR)

### New! TeSys T Motor Management System (NEMA Sizes 1–6)

TeSys T is a flexible system that integrates seamlessly into your automation system through five major communication protocols. TeSys T can predict what will happen in the process, as it accurately monitors current, voltage, and power over a wide range. For additional information about the TeSys T Motor Management System, see [page 16-103](#) (for example, 8736SCO8V06H616).

### Melting Alloy Overload Relays

Melting alloy type thermal overload blocks are installed as part of the starter, and thermal elements must be selected and installed separately in order to operate the starter. For a three-phase motor, three thermal units must be ordered using the tables beginning under [page 16-133](#). The catalog number includes no Form number (for example, 8736SCO8V06).

## Type S Reversing Starters, 3–Pole Polyphase

**NOTE:** In [Table 16.171](#), replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard coil voltage codes shown in . For information on field modification of NEMA 12 enclosures, see [page 16-112](#). For Form H30\* (special lower-FLA factory-assembled starter combinations with Motor Logic SSOLR protection), see [Solid-State Overload Relay Forms](#), [page 16-119](#).

**Table 16.171: 3–Pole Polyphase, 600 Vac Maximum, 50–60 Hz, with Motor Logic SSOLR** <sup>[9]</sup>

| NEMA Size | Continuous Current Ratings | Motor Voltage            | Max. Hp                 | Open Style                  |                             | NEMA 1 General Purpose Enclosure | NEMA 4 & 4X Watertight, Dusttight Brushed Stainless Steel Enclosure (Sizes 0–5) <sup>[10]</sup> | NEMA 7 & 9 <sup>[11]</sup> Hazardous Locations Class I, Groups C & D Class II, Groups E, F & G |                            | NEMA 12/3R <sup>[12]</sup> Dusttight, Dripight Industrial Use Enclosure |
|-----------|----------------------------|--------------------------|-------------------------|-----------------------------|-----------------------------|----------------------------------|-------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|----------------------------|-------------------------------------------------------------------------|
|           |                            |                          |                         | Vertical                    | Horizontal                  |                                  |                                                                                                 | Bolted, Type                                                                                   | SPIN-TOP™ , Type           |                                                                         |
|           |                            |                          |                         | Type                        | Type                        | Type                             | Type                                                                                            |                                                                                                |                            |                                                                         |
| 00        | 9                          | 200<br>230<br>460<br>575 | 1.5<br>1.5<br>2<br>2    | —                           | SAO16●●●H30 <sup>[13]</sup> | SAG16●●●H30 <sup>[13]</sup>      | Use Size 0                                                                                      | Use Size 0                                                                                     | Use Size 0                 | Use Size 0                                                              |
| 0         | 18                         | 200<br>230<br>460<br>575 | 3<br>3<br>5<br>5        | SBO10●●●H30 <sup>[13]</sup> | SBO4●●●H30 <sup>[13]</sup>  | SBG4●●●H30 <sup>[13]</sup>       | SBW14●●●H30 <sup>[13]</sup>                                                                     | SBT49●●●H30 <sup>[13]</sup>                                                                    | SBR9●●●H30 <sup>[13]</sup> | SBA4●●●H30 <sup>[13]</sup>                                              |
| 1         | 27                         | 200<br>230<br>460<br>575 | 7.5<br>7.5<br>10<br>10  | SCO7●●●H30 <sup>[13]</sup>  | SCO8●●●H30 <sup>[13]</sup>  | SCG8●●●H30 <sup>[13]</sup>       | SCW14●●●H30 <sup>[13]</sup>                                                                     | SCT49●●●H30 <sup>[13]</sup>                                                                    | SCR9●●●H30 <sup>[13]</sup> | SCA4●●●H30 <sup>[13]</sup>                                              |
| 2         | 45                         | 200<br>230<br>460<br>575 | 10<br>15<br>25<br>25    | SDO1●●●H30 <sup>[13]</sup>  | SDO2●●●H30 <sup>[13]</sup>  | SDG2●●●H30 <sup>[13]</sup>       | SDW11●●●H30 <sup>[13]</sup>                                                                     | SDT43●●●H30 <sup>[13]</sup>                                                                    | SDR3●●●H30 <sup>[13]</sup> | SDA1●●●H30 <sup>[13]</sup>                                              |
| 3         | 90                         | 200<br>230<br>460<br>575 | 25<br>30<br>50<br>50    | SEO1●●●H30                  | SEO2●●●H30                  | SEG2●●●H30                       | SEW11●●●H30                                                                                     | —                                                                                              | —                          | SEA1●●●H30                                                              |
| 4         | 135                        | 200<br>230<br>460<br>575 | 40<br>50<br>100<br>100  | SFO1●●●H30                  | SFO3●●●H30                  | SFG3●●●H30                       | SFW11●●●H30                                                                                     | —                                                                                              | —                          | SFA1●●●H30                                                              |
| 5         | 270                        | 200<br>230<br>460<br>575 | 75<br>100<br>200<br>200 | SGO1●●●H30                  | SGO3●●●H30                  | SGG3●●●H30                       | SGW11●●●H30                                                                                     | —                                                                                              | —                          | SGA1●●●H30                                                              |

<sup>[9]</sup> To order melting alloy overload relay, remove form "H30" from part number.

<sup>[10]</sup> NEMA 4 and 4X stainless steel enclosures (sizes 0–5) have a brushed finish. Sizes 6 and 7 are painted sheet steel and are rated NEMA 4 only.

<sup>[11]</sup> NEMA 7 and 9 bolted are not UL listed.

<sup>[12]</sup> NEMA 12 enclosures can be field modified for outdoor non-corrosive and non-service entrance rated applications.

<sup>[13]</sup> **Form H30**, with the possibility of a fourth character to select a lower FLA range (for example, **H308**). See "Solid-State Overload Relay Forms" on [page 16-119](#)

Table 16.171 3-Pole Polyphase, 600 Vac Maximum, 50–60 Hz, with Motor Logic SSOLR [16.171] (cont'd.)

| NEMA Size | Continuous Current Ratings | Motor Voltage            | Max. Hp                  | Open Style |            | NEMA 1 General Purpose Enclosure | NEMA 4 & 4X Watertight, Dusttight Brushed Stainless Steel Enclosure (Sizes 0–5) [14] | NEMA 7 & 9 [15] Hazardous Locations Class II, Groups C & D Class II, Groups E, F & G |                 | NEMA 12/3R [16] Dusttight, Driptight Industrial Use Enclosure |
|-----------|----------------------------|--------------------------|--------------------------|------------|------------|----------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|-----------------|---------------------------------------------------------------|
|           |                            |                          |                          | Vertical   | Horizontal |                                  |                                                                                      |                                                                                      |                 |                                                               |
|           |                            |                          |                          | Type       | Type       | Type                             | Type                                                                                 | Bolted, Type                                                                         | SPIN-TOP™, Type | Type                                                          |
| 6         | 540                        | 200<br>230<br>460<br>575 | 150<br>200<br>400<br>400 | —          | SHO1●●●H30 | SHG1●●●H30                       | SHW1●●●H30                                                                           | —                                                                                    | —               | SHA1●●●H30                                                    |
| 7         | 810                        | 200<br>230<br>460<br>575 | —<br>300<br>600<br>600   | —          | SJO1●●●H30 | SJG1●●●H30                       | SJW1●●●H30                                                                           | —                                                                                    | —               | SJA1●●●H30                                                    |

### Type S, 2- and 3-Pole Single Phase, 4-Pole Polyphase

Devices require melting alloy thermal units, page 16-132.

**NOTE:** In Table 16.172, replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard coil voltage codes shown in .

For information on field modification of NEMA 12 enclosures, see page 16-112 .

Table 16.172: 2- and 3-Pole Single Phase, 4-Pole Polyphase, 600 Vac Maximum—50–60 Hz

| NEMA Size                                   | Continuous Current Ratings | Motor Voltage            | Max. Hp                | Type of Motor       | Open Type     |                 | NEMA 1 General Purpose Enclosure | NEMA 4 & 4X Watertight, Dusttight Brushed Stainless Steel Enclosure | NEMA 7 & 9 [15] Hazardous Locations Class I, Groups C & D Class II, Groups E, F & G |                | NEMA 12/3R/16 Dusttight, Driptight Industrial Use Enclosure |
|---------------------------------------------|----------------------------|--------------------------|------------------------|---------------------|---------------|-----------------|----------------------------------|---------------------------------------------------------------------|-------------------------------------------------------------------------------------|----------------|-------------------------------------------------------------|
|                                             |                            |                          |                        |                     | Vertical Type | Horizontal Type | Type                             | Type                                                                | Bolted Type                                                                         | Spin Top™ Type | Type                                                        |
| 2-Pole Single Phase—1 Thermal Unit Required |                            |                          |                        |                     |               |                 |                                  |                                                                     |                                                                                     |                |                                                             |
| 00                                          | 9                          | 115<br>230               | 1/3<br>1               | Single Phase 3-Wire | —             | SAO13●●●        | SAG13●●●                         | Use Size 0                                                          | Use Size 0                                                                          | Use Size 0     | Use Size 0                                                  |
| 0                                           | 18                         | 115<br>230               | 1<br>2                 |                     | SBO7●●●       | SBO1●●●         | SBG1●●●                          | SBW11●●●                                                            | SBT46●●●                                                                            | SBR6●●●        | SBA1●●●                                                     |
| 1                                           | 27                         | 115<br>230               | 2<br>3                 |                     | SCO1●●●       | SCO2●●●         | SCG2●●●                          | SCW11●●●                                                            | SCT46●●●                                                                            | SCR6●●●        | SCA1●●●                                                     |
| 3-Pole Single Phase—1 Thermal Unit Required |                            |                          |                        |                     |               |                 |                                  |                                                                     |                                                                                     |                |                                                             |
| 00                                          | 9                          | 115<br>230               | 1/3<br>1               | 4-Wire Rep.-Ind.    | —             | SAO14●●●        | SAG14●●●                         | Use Size 0                                                          | Use Size 0                                                                          | Use Size 0     | Use Size 0                                                  |
|                                             |                            | 115<br>230               | 1/3<br>1               | 4-Wire Split Ph.    | —             | SAO15●●●        | SAG15●●●                         | Use Size 0                                                          | Use Size 0                                                                          | Use Size 0     | Use Size 0                                                  |
| 0                                           | 18                         | 115<br>230               | 1<br>2                 | 4-Wire Rep.-Ind.    | SBO8●●●       | SBO2●●●         | SBG2●●●                          | SBW12●●●                                                            | SBT47●●●                                                                            | SBR7●●●        | SBA2●●●                                                     |
|                                             |                            | 115<br>230               | 1<br>2                 | 4-Wire Split Ph.    | SBO9●●●       | SBO3●●●         | SBG3●●●                          | SBW13●●●                                                            | SBT48●●●                                                                            | SBR8●●●        | SBA3●●●                                                     |
| 1                                           | 27                         | 115<br>230               | 2<br>3                 | 4-Wire Rep.-Ind.    | SCO3●●●       | SCO4●●●         | SCG4●●●                          | SCW12●●●                                                            | SCT47●●●                                                                            | SCR7●●●        | SCA2●●●                                                     |
|                                             |                            | 115<br>230               | 2<br>3                 | 4-Wire Split Ph.    | SCO5●●●       | SCO6●●●         | SCG6●●●                          | SCW13●●●                                                            | SCT48●●●                                                                            | SCR8●●●        | SCA3●●●                                                     |
| 4-Pole Polyphase—2 Thermal Units Required   |                            |                          |                        |                     |               |                 |                                  |                                                                     |                                                                                     |                |                                                             |
| 0                                           | 18                         | 200<br>230<br>460<br>575 | 3<br>3<br>5<br>5       | 2 Phase 4-Wire      | SBO11●●●      | SBO5●●●         | SBG5●●●                          | SBW15●●●                                                            | Consult the Customer Care Center at 1-888-778-2733                                  | SBR10●●●       | SBA5●●●                                                     |
| 1                                           | 27                         | 200<br>230<br>460<br>575 | 7.5<br>7.5<br>10<br>10 |                     | SCO9●●●       | SCO10●●●        | SCG10●●●                         | SCW15●●●                                                            |                                                                                     | SCR10●●●       | SCA5●●●                                                     |
| 2                                           | 45                         | 200<br>230<br>460<br>575 | 10<br>15<br>25<br>25   |                     | —             | SDO4●●●         | SDG4●●●                          | SDW12●●●                                                            |                                                                                     | SDR4●●●        | SDA2●●●                                                     |
| 3                                           | 90                         | 200<br>230<br>460<br>575 | 25<br>30<br>50<br>50   |                     | —             | SEO4●●●         | SEG4●●●                          | SEW12●●●                                                            | —                                                                                   | —              | SEA2●●●                                                     |
| 4                                           | 135                        | 200<br>230<br>460<br>575 | 40<br>50<br>100<br>100 |                     | —             | SFO4●●●         | SFG4●●●                          | SFW12●●●                                                            | —                                                                                   | —              | SFA2●●●                                                     |

Table 16.173: Coil Voltage Codes

| Voltage  |         | Code |
|----------|---------|------|
| 60 Hz    | 50 Hz   |      |
| 24 [17]  | —       | V01  |
| 120 [18] | 110     | V02  |
| 208      | —       | V08  |
| 240      | 220     | V03  |
| 277      | —       | V04  |
| 480      | 440     | V06  |
| 600      | 550     | V07  |
| Specify  | Specify | V99  |

**NOTE:** For voltage codes used with control transformers, see page 16-118.

Form S (separate control) is used when a separate source of power is available for the control (coil) voltage. Form S is supplied at no charge.

Dimensions: page 16-64

Factory Modifications (Forms) page 16-117

Separate Enclosures (Class 9991): page 16-110

Replacement Parts (Class 9998): page 16-122

Type S Accessories (Class 9999): page 16-125

For How to Order Information, see page 16-28.

[14] NEMA 4 and 4X stainless steel enclosures (sizes 0–5) have a brushed finish. Sizes 6 and 7 are painted sheet steel and are rated NEMA 4 only.

[15] NEMA 7 and 9 bolted are not UL listed.

[16] NEMA 12 enclosures can be field modified for outdoor non-corrosive and non-service entrance rated applications.

[17] 24 V coils are not available on Sizes 4–7. On Sizes 00–3, where 24 V coils are available, Form S (separate control) must be specified (for example, order as 8736SCO1V01S).

[18] This voltage code can include Form S for separate control (provided at no charge) (for example, order as 8736SBO7V02S).

## Open and NEMA 1 Enclosures

**NOTE:** These dimensions are for reference only. If you need precise measurements, contact the Customer Care Center at 1-888-778-2733.

**Table 16.174: Open Style, 2 or 3-Pole Only** (Mounting: H = Horizontal; V = Vertical)

See Figures: [Class 8702 Contactor, Open Type](#) and [Class 8736 Starter, Open Type](#)

| NEMA Size             | Type     | Mtg. | Fig. No. | Dimensions, in. |       |       |       |      |      |      |       |       |       |      |      |       |     | Wt. (lb) |
|-----------------------|----------|------|----------|-----------------|-------|-------|-------|------|------|------|-------|-------|-------|------|------|-------|-----|----------|
|                       |          |      |          | A               | B     | C     | D     | E    | F    | G    | H     | I     | J     | K    | L    | M     |     |          |
| Class 8702 Contactors |          |      |          |                 |       |       |       |      |      |      |       |       |       |      |      |       |     |          |
| 00                    | SAO      | H    | 1        | 7.13            | 5     | 5.31  | —     | —    | 3.41 | 0.47 | 4.34  | 0.19  | 5.5   | 0.91 | —    | —     | 12  |          |
| 0, 1                  | SBO, SCO | H    | 1        | 7.13            | 5     | 5.31  | —     | —    | 3.41 | 0.47 | 4.34  | 0.19  | 5.5   | 0.91 | —    | —     | 12  |          |
|                       |          | V    | 1/19     | 5.47            | 9.22  | 5.31  | 5.5   | 0.22 | —    | 0.61 | 8     | 0.61  | 5.03  | 0.22 | —    | —     | 12  |          |
| 2                     | SDO      | H    | 1        | 9               | 6.88  | 6.03  | —     | —    | 4.5  | 0.38 | 5.63  | 0.25  | 6     | 1.5  | —    | —     | 16  |          |
|                       |          | V    | 1/19     | 6.75            | 11.38 | 6.03  | 6.25  | 0.25 | —    | 0.5  | 10.38 | 0.5   | 0.25  | 0.25 | —    | —     | 16  |          |
| 3                     | SEO      | H    | 1        | 12.72           | 7.97  | 7     | 11.75 | 0.48 | —    | 0.48 | 7     | 0.48  | 11.75 | 0.48 | —    | —     | 35  |          |
|                       |          | V    | 1/19     | 7.20            | 19    | 7     | 6.25  | 0.48 | —    | 1.02 | 17    | 0.98  | 6.25  | 0.48 | —    | —     | 35  |          |
| 4                     | SFO      | H    | 1        | 14.25           | 11.69 | 7     | 13.25 | 0.5  | —    | 0.5  | 8     | 1.84  | 13.25 | 0.5  | —    | —     | 45  |          |
|                       |          | V    | 1/19     | 7.97            | 23.91 | 7     | 7     | 0.48 | —    | 1.81 | 20.25 | 1.19  | 7     | 0.48 | —    | —     | 45  |          |
| 5                     | SGO      | H    | 1        | 19.31           | 16.19 | 9.38  | 18    | 0.66 | —    | 1.03 | 14    | 1.16  | 18    | 0.66 | —    | —     | 98  |          |
|                       |          | V    | 1/19     | 10.75           | 34.41 | 9.38  | 9.5   | 0.63 | —    | 1.25 | 32    | 1.16  | 9.5   | 0.63 | —    | —     | 98  |          |
| 6                     | SHO      | H    | 1        | 22.38           | 28.05 | 9.52  | 18    | 0.63 | —    | 3.83 | 21.19 | 3.03  | 18    | 0.77 | —    | —     | 195 |          |
| 7                     | SJO      | H    | 1        | 24.25           | 37.25 | 13.81 | 19.75 | 1.52 | —    | —    | 30    | —     | —     | —    | —    | —     | 310 |          |
| Class 8736 Starters   |          |      |          |                 |       |       |       |      |      |      |       |       |       |      |      |       |     |          |
| 00                    | SAO      |      | 2        | 7.13            | 6.91  | 5.31  | —     | —    | 3.41 | 0.47 | 4.34  | 6.22  | 4.53  | 5.06 | 0.66 | —     | 13  |          |
| 0, 1                  | SBO, SCO | H    | 2        | 7.13            | 6.91  | 5.31  | —     | —    | 3.41 | 0.47 | 4.34  | 6.22  | 4.53  | 5.06 | 0.66 | —     | 13  |          |
|                       |          | V    | 2/19     | 5.47            | 11.52 | 5.31  | 5.03  | 0.22 | —    | 0.61 | 8     | 10.70 | 2.52  | 5.06 | 0.22 | 5.03  | 13  |          |
| 2                     | SDO      | H    | 2        | 9               | 8.5   | 6.03  | —     | —    | 4.5  | 0.38 | 5.63  | 7.5   | 5     | 5.16 | 1.5  | —     | 18  |          |
|                       |          | V    | 2/19     | 6.75            | 13.48 | 6.03  | 6.25  | 0.25 | —    | 0.78 | 10.38 | 12.97 | 3.13  | 5.16 | 0.25 | 6     | 18  |          |
| 3                     | SEO      | H    | 2        | 12.72           | 11.72 | 7     | 11.75 | 0.48 | —    | 0.48 | 10.75 | 10.75 | 11.75 | 6.25 | 0.48 | 11.75 | 38  |          |
|                       |          | V    | 2/19     | 7.31            | 22.25 | 7     | 6.25  | 0.48 | —    | 1.02 | 20.75 | —     | 6.25  | 6.25 | 0.48 | 6.25  | 38  |          |
| 4                     | SFO      | H    | 2        | 14.25           | 14.59 | 7     | 13.25 | 0.5  | —    | 1.84 | 12.25 | 12.25 | 13.25 | 6.25 | 0.5  | 13.25 | 48  |          |
|                       |          | V    | 2/19     | 7.97            | 26.81 | 7     | 7     | 0.48 | —    | 1.84 | 24.5  | —     | 4.05  | 6.25 | 0.48 | 7     | 48  |          |
| 5                     | SGO      | H    | 2        | 19.31           | 20.91 | 9.38  | 18    | 0.66 | —    | 1.28 | 19    | 19    | 18    | 6.63 | 0.63 | 18    | 115 |          |
|                       |          | V    | 2/19     | 10.75           | 39.16 | 9.38  | 9.5   | 0.66 | —    | 1.28 | 37.25 | 37.25 | 9.5   | 6.63 | 0.63 | 9.5   | 115 |          |
| 6                     | SHO      | H    | 2        | 22.38           | 28.05 | 9.52  | 18    | 0.69 | —    | 3.83 | 21.19 | 3.03  | 18    | 0.77 | —    | —     | 200 |          |
| 7                     | SJO      | H    | 1        | 24.25           | 37.25 | 13.81 | 19.75 | 1.52 | —    | —    | 30    | —     | —     | —    | —    | —     | 315 |          |

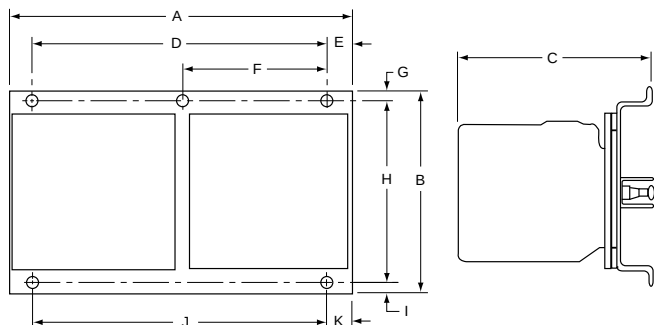


Figure 16.9: Class 8702 Contactor, Open Type

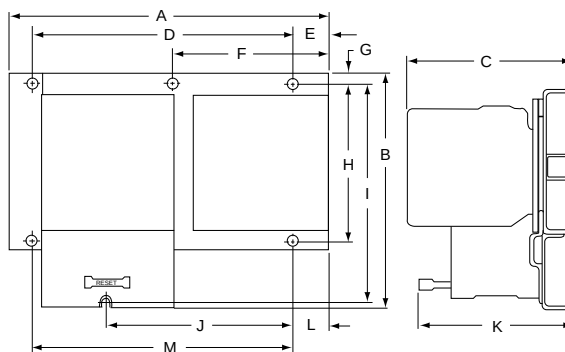


Figure 16.10: Class 8736 Starter, Open Type

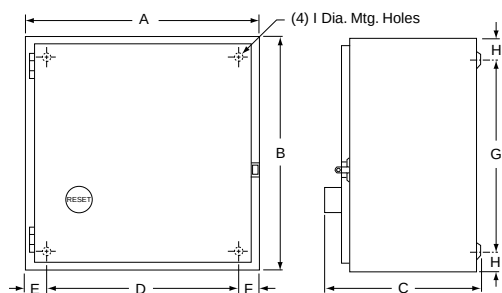


Figure 16.11: NEMA 1

**Table 16.175: NEMA 1, Class 8702 and 8736** (see Figure: [NEMA 1](#))

| NEMA Size  | Dimensions—in. |       |       |       |       |      |      |      |      |      | Weight (lb) |      |
|------------|----------------|-------|-------|-------|-------|------|------|------|------|------|-------------|------|
|            | A              | B     | C     |       | D     | E    | F    | G    | H    | I    | 8702        | 8736 |
| 00, 0 [20] | 11.88          | 11.88 | 7.41  | 7.53  | 9.75  | 1.06 | 1.06 | 9.75 | 1.06 | 0.31 | 16          | 17   |
| 1 [21]     | 14.88          | 14.13 | 7.56  | 7.66  | 12.75 | 1.06 | 1.06 | 12   | 1.06 | 0.31 | 24          | 25   |
| 2 [21]     | 18.16          | 29.16 | 9.25  | 9.25  | 15.5  | 1.33 | 1.33 | 26.5 | 1.33 | 0.44 | 95          | 98   |
| 3 [20]     | 35.22          | 46.22 | 12.81 | 12.94 | 31    | 2.11 | 2.11 | 42   | 2.11 | 0.56 | 298         | 315  |
| 4 [20]     | 36.22          | 62.22 | 19.47 | —     | —     | —    | —    | —    | —    | —    | 400         | 405  |
| 5          | 34.5           | 93    | 23.5  | —     | —     | —    | —    | —    | —    | —    | —           | —    |

Floor Mounting.

[19] The vertical design differs from the horizontal design figure shown for the corresponding NEMA size, but the dimensions listed apply.

[20] 3-Pole only.

[21] The standard enclosure has space for a fused control transformer, **Form FF4T**, on Sizes 0-2 (except 4-pole devices, Size 0 and 1).

NEMA 4, 4X, 7, 9, and 12/3R Enclosures

Table 16.176: See Figure: NEMA 4 and 4X—Stainless Steel [22]

| NEMA Size      | Class Number | Dimensions, in. |       |       |                |      |      |      |      |       |      |      |      | Hub Dia.    |              | Weight (lb) |      |     |
|----------------|--------------|-----------------|-------|-------|----------------|------|------|------|------|-------|------|------|------|-------------|--------------|-------------|------|-----|
|                |              | A               | B     | C     | D              | E    | F    | G    | H    | I     | J    | K    | L    | W Bot. Only | X Top & Bot. | 8702        | 8736 |     |
| 0[23]<br>1[23] | 8702, 8736   | 12.63           | 7.81  | 14.69 | 2.56           | 7.5  | 13.5 | 0.59 | 3.88 | 18.41 | 1.66 | 2.31 | 0.31 | 0.75        | 1            | 25          | 26   |     |
| 2[23]          | 8702, 8736   | 14.88           | 8.25  | 15.75 | 2.56           | 9.75 | 15   | 0.38 | 3.88 | 20.88 | 1.72 | 2.63 | 0.31 | 0.75        | 1.5          | 33          | 35   |     |
| 3[24]          | 8702         | 18.16           | 8.75  | 32.22 | 3.08           | 12   | 30.5 | 0.88 | 3.69 | 26.72 | 2.56 | 3.19 | 0.44 | 0.75        | 2.5          | 96          | —    |     |
| 4[24]          | 8736         | 18.16           | 9.56  | 32.22 | 3.08           | 12   | 30.5 | 0.88 | 4.5  | 26.72 | 2.56 | 3.19 | 0.44 | 0.75        | 2.5          | —           | 99   |     |
| 5              | 8702         | 35.22           | 12.13 | 49.22 | 4.11           | 27   | 48   | 0.63 | 4.59 | 45.81 | 2.97 | 3.5  | 0.56 | 0.75        | 3.5          | 300         | —    |     |
|                | 8736         | 35.22           | 12.94 | 49.22 | 4.11           | 27   | 48   | 0.63 | 5.41 | 45.81 | 2.97 | 3.5  | 0.56 | 0.75        | 3.5          | —           | 317  |     |
| 6              | 8702, 8736   | 36.22           | 19.47 | 70.13 | Floor Mounting |      |      |      |      |       |      |      |      |             |              |             | 500  | 505 |
| 7              | 8702, 8736   | 34.5            | 23.5  | 101   |                |      |      |      |      |       |      |      |      |             |              |             | —    | —   |

Table 16.177: Bolted Cover, Cast Aluminum Enclosure—see figure in Table 16.108 NEMA 7 and 9 Enclosures, page 16-41

| NEMA Size | Type              | Dimensions, in. [25] |       |       |       |       |       |       |      |            | Wt. (lb) |
|-----------|-------------------|----------------------|-------|-------|-------|-------|-------|-------|------|------------|----------|
|           |                   | G                    | H     | J     | K     | L     | N     | P     | Q, R | S, T, U, V |          |
| 0-2       | SBT<br>SCT<br>SDT | 14.25                | 27.63 | 9.5   | 12.25 | 19.25 | 9.63  | 11.5  | 2.38 | 3.13       | 115      |
| 3-4       | SET<br>SFT        | 24.5                 | 45.63 | 13.75 | 22.5  | 27.5  | 13.75 | 15.38 | 3.44 | 4          | 180      |

**NOTE:** These dimensions are for reference only. If you need precise measurements, contact the Customer Care Center at 1-888-778-2733.

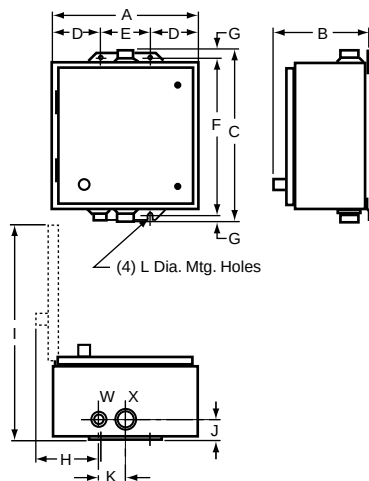


Figure 16.12: NEMA 4 and 4X—Stainless Steel

Table 16.178: Spin Top™ Enclosure—see figure in Table 16.108 NEMA 7 and 9 Enclosures, page 16-41

| NEM-A Size | Type       | Dimensions, in.                                     |       |       |       |       |       |       |       |      |       |       |       |       |       |       |     |      |      |      |     | Wt. (lb) |     |
|------------|------------|-----------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|------|-------|-------|-------|-------|-------|-------|-----|------|------|------|-----|----------|-----|
|            |            | A                                                   | B[26] | B[27] | C[26] | C[27] | D     | E[26] | E[27] | F    | G[26] | G[27] | H[26] | H[27] | J[26] | J[27] | K   | L    | M    | N    | P   |          | R   |
| 0-1        | SBR<br>SCR | 12                                                  | 41.06 | 46.13 | 68.06 | 79.13 | 16.75 | 7.25  | 12.25 | 7.69 | 26.13 | 26.13 | 3     | 9     | 24    | 24    | 8.5 | 2.06 | 9.38 | 5.25 | 1.5 | 0.38     | 70  |
| 2          | SDR        | 16.13                                               | 48.5  | 50.5  | 81.5  | 85    | 20.25 | 12.13 | 9.13  | 8.63 | 27.75 | 32.75 | 8     | 4.5   | 25    | 30    | 12  | 2.63 | 11   | 5.5  | 2.5 | 0.38     | 100 |
| 3          | SER        | Consult the Customer Care Center at 1-888-778-2733. |       |       |       |       |       |       |       |      |       |       |       |       |       |       |     |      |      |      |     |          |     |

Consult the Customer Care Center at 1-888-778-2733.

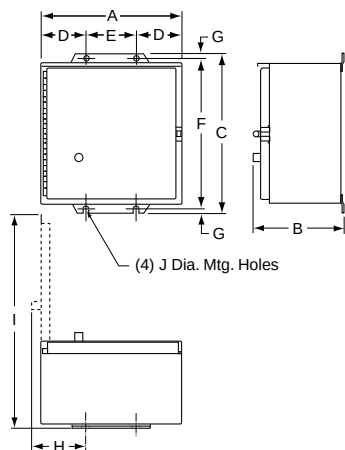


Figure 16.13: NEMA 12/3R

Table 16.179: See Figure: NEMA 12/3R

| NEMA<br>Size   | Class        | Dimensions, in. |       |       |                |      |       |     |      |       |      | Weight<br>(lb) |      |
|----------------|--------------|-----------------|-------|-------|----------------|------|-------|-----|------|-------|------|----------------|------|
|                |              | A               | B     | C     | D              | E    | F     | G   | H    | I     | J    | 8702           | 8736 |
| 0[23]<br>1[23] | 8702<br>8736 | 11.88           | 7.75  | 13.75 | 2.56           | 6.75 | 12.75 | 0.5 | 3.66 | 18.13 | 0.31 | 23             | 24   |
| 2[23]          | 8702<br>8736 | 14.88           | 7.88  | 16    | 2.56           | 9.75 | 15    | 0.5 | 3.66 | 21.25 | 0.31 | 31             | 32   |
| 3[24]<br>4[24] | 8702         | 18.16           | 9.25  | 31.5  | 3.08           | 12   | 30.5  | 0.5 | 3.69 | 26.72 | 0.44 | 96             | —    |
|                | 8736         | 18.16           | 9.56  | 31.5  | 3.08           | 12   | 30.5  | 0.5 | 4.5  | 26.72 | 0.44 | —              | 99   |
| 5              | 8702         | 35.22           | 13.13 | 49    | 4.13           | 27   | 48    | 0.5 | 5.31 | 45.88 | 0.56 | 302            | —    |
|                | 8736         | 35.22           | 13.94 | 49    | 4.13           | 27   | 48    | 0.5 | 6.13 | 45.88 | 0.56 | —              | 319  |
| 6              | 8702<br>8736 | 36.22           | 19.47 | 62.22 | Floor Mounting |      |       |     |      |       |      | 490            | 495  |
| 7              | 8702<br>8736 | 34.5            | 23.5  | 93    |                |      |       |     |      |       |      | —              | —    |

**NOTE:** These dimensions are for reference only. If you need precise measurements, contact the Customer Care Center at 1-888-778-2733.

[22] Size 6 and 7 are NEMA 4 sheet steel enclosures.

[23] The standard enclosure has space for a fused control transformer, Form FF4T, on Sizes 0-2 (except 4-pole devices, Size 0 and 1).

[24] 3-Pole only.

[25] Dimensions shown for 2 or 3-Pole devices only.

[26] Without control transformer.

[27] With control transformer (Form FF4T).

Class 8702 Type W  
Reversing Vacuum Contactor**Class 8702 Type W**

Class 8702 Type W Reversing Vacuum Contactors are used to switch capacitors, transformers and electric motors where overload protection is separately provided. Type W reversing vacuum contactors are designed for operation at 600 V, 50/60 Hz.

**Auxiliary Contacts**—An auxiliary contact block, Class 9999 Type WX11, with one normally open contact and one normally closed contact, is used with Size 4, 5 and 6 vacuum contactors. Additional auxiliary contact units may be added to the Size 4 and 5 reversing contactors in the field. A maximum of 2 units may be added to the Size 4; a maximum of 1 unit may be added to the Size 5.

**Termination Means**—The Size 4 reversing vacuum contactor is supplied with line and load side lugs. The Size 5 and 6 reversing vacuum contactors are supplied without line and load side lugs.

**NOTE:** In Table 16.180, replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard coil voltage codes listed in Table 16.182. Replacement coils are listed in Table 16.181.

**Table 16.180: Class 8702 Full Voltage Reversing Vacuum Contactors (Horizontal Only) 3-Pole Polyphase—600 Vac Maximum—50–60 Hz**


| NEMA Size | Enclosed Ampere Rating | Motor Voltage | Maximum Horsepower | Open Style |
|-----------|------------------------|---------------|--------------------|------------|
|           |                        |               |                    | Type       |
| 4         | 135                    | 200           | 40                 | WFO3●●●    |
|           |                        | 230           | 50                 |            |
|           |                        | 380           | 75                 |            |
|           |                        | 460           | 100                |            |
|           |                        | 575           | 100                |            |
| 5         | 270                    | 200           | 75                 | WGO3●●●    |
|           |                        | 230           | 100                |            |
|           |                        | 380           | 150                |            |
|           |                        | 460           | 200                |            |
|           |                        | 575           | 200                |            |
| 6         | 540                    | 200           | 150                | WHO3V●●●   |
|           |                        | 230           | 200                |            |
|           |                        | 380           | 300                |            |
|           |                        | 460           | 400                |            |
|           |                        | 575           | 400                |            |

**Table 16.181: Class 9998—Replacement Coils for Class 8702 Reversing Contactors**


| Size | Type | Poles | Class and Type | Suffix Number (Complete Coil Number Consists of Class and Type Followed by Suffix Number) |       |       |       |
|------|------|-------|----------------|-------------------------------------------------------------------------------------------|-------|-------|-------|
|      |      |       |                | 120 V                                                                                     | 240 V | 480 V | 600 V |
| 4    | WF   | All   | 9998WF         | 120                                                                                       | 240   | 480   | 600   |
| 5    | WG   | All   | 9998WG         | 120                                                                                       | 240   | 480   | 600   |
| 6    | WH   | All   | 9998WH         | 120                                                                                       | 240   | 480   | 600   |

**Table 16.182: Coil Voltage Codes**

| Voltage | 110 | 120 | 220 | 240 | 440 | 480 | 550 | 600 |
|---------|-----|-----|-----|-----|-----|-----|-----|-----|
| 50 Hz   | V02 |     | V03 |     | V06 |     | V07 |     |
| 60 Hz   |     | V02 |     | V03 |     | V06 |     | V07 |

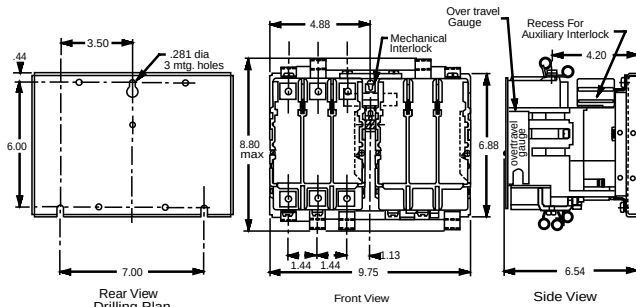**Table 16.183: Approximate Dimensions**


Size 4 Reversing Contactor Outline with Lugs, Class 8702 WF

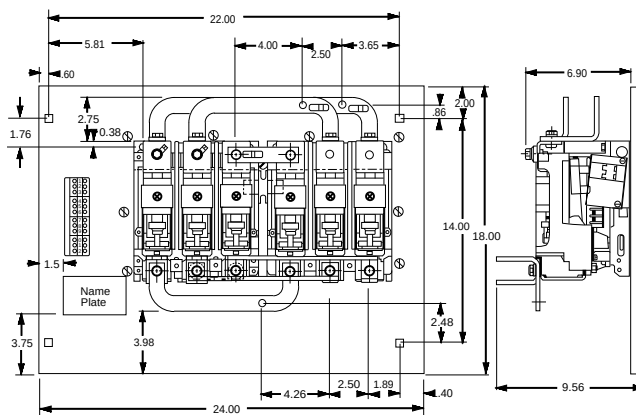

Size 5 Reversing Contactor Outline without Lugs, Class 8702 WG

**Table 16.184: Class 9999—Vacuum Starter Kits**

| For Use With |          | Kit Description                                                                                                | Class 9999 Type |
|--------------|----------|----------------------------------------------------------------------------------------------------------------|-----------------|
| Type         | Size     |                                                                                                                |                 |
| WF–WG<br>WH  | 4–5<br>6 | Auxiliary Contacts, Non-Convertible<br>1 N.O. & 1 N.C. Isolated Contacts                                       | WX11            |
| WF<br>WG–WH  | 4<br>5–6 | Coil Circuit Auxiliary Contacts<br>1 N.O. & 1 N.C. Isolated Contacts, Delayed Break<br>1 N.C. Isolated Contact | WCX11<br>WLX01  |
| WG           | 5        | Lug Kits<br>6 lugs included                                                                                    | LUW5            |

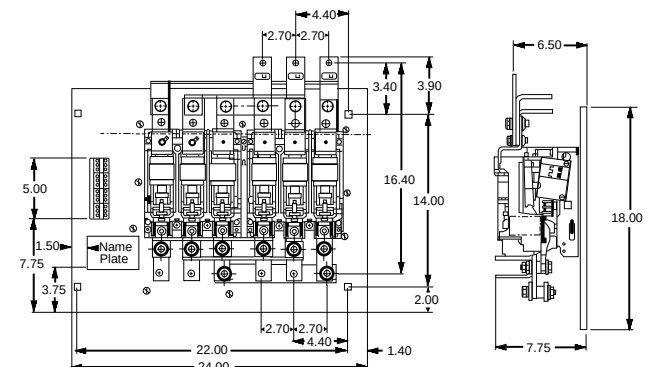Size 6 Reversing Contactor Outline without Lugs, Class 8702 WH  
For How to Order Information, see page 16-28.



### Class 8738 Fusible Disconnect Switch Type 3-Pole Polyphase—600 Vac Maximum—50–60 Hz

Class 8738 and 8739 Type S reversing combination starters combine the requirements of motor overload and short circuit protection into one convenient package. Type S reversing combination starters are manufactured in accordance with NEMA standards, and are UL Listed (although some Form numbers may not be listed—contact your nearest Square D/Schneider Electric sales office for further information). Class 8738 and 8739 reversing combination starters are designed to operate at 600 Vac, 50–60 Hz, and are available with one of four types of overload relays. See [page 16-62](#) for more information. For Class J fuses, use Form Y1072 (no charge).

For Form H30\* (special lower-FLA factory-assembled starter combinations with Motor Logic SSOLR protection), see [Solid-State Overload Relay Forms](#), [page 16-119](#)

**Table 16.185: Class 8738 Full-Voltage Type, Fusible (With Class H Fuse Clips) Reversing with Motor Logic SSOLR (replace ●●● with the voltage code)<sup>[1]</sup>**

| Motor Voltage (Starter Voltage) | Max. Hp Polyphase | NEMA Size | Fuse Clip Size (A) | NEMA 1 General Purpose Enclosure | NEMA 4 & 4X Watertight, Dusttight Stainless Steel (304) Enclosure | NEMA 4X Watertight, Dusttight, Corrosion Resistant Polyester Enclosure | NEMA 12/3R/2 Dusttight and Driptight Industrial Use Enclosure |                        |
|---------------------------------|-------------------|-----------|--------------------|----------------------------------|-------------------------------------------------------------------|------------------------------------------------------------------------|---------------------------------------------------------------|------------------------|
|                                 |                   |           |                    | Type [3]                         | Type [3]                                                          | Type [3]                                                               | With External Reset                                           | Without External Reset |
| 200 (208)                       | 3                 | 0         | 30                 | SBG12●●●H30 [4]                  | SBW12●●●H30 [4]                                                   | SBW22●●●H30 [4]                                                        | SBA22●●●H30 [4]                                               | SBA12●●●H30 [4]        |
|                                 | 5                 | 1         | 30                 | SCG12●●●H30 [4]                  | SCW12●●●H30 [4]                                                   | SCW22●●●H30 [4]                                                        | SCA22●●●H30 [4]                                               | SCA12●●●H30 [4]        |
|                                 | 7.5               |           | 60                 | SCG13●●●H30 [4]                  | SCW13●●●H30 [4]                                                   | SCW23●●●H30 [4]                                                        | SCA23●●●H30 [4]                                               | SCA13●●●H30 [4]        |
|                                 | 10                | 2         | 60                 | SDG12●●●H30 [4]                  | SDW12●●●H30 [4]                                                   | SDW22●●●H30 [4]                                                        | SDA22●●●H30 [4]                                               | SDA12●●●H30 [4]        |
|                                 | 20                | 3         | 100                | SEG15●●●H30                      | SEW15●●●H30                                                       | —                                                                      | SEA25●●●H30                                                   | SEA15●●●H30            |
|                                 | 40                | 4         | 200                | SFG15●●●H30                      | SFW15●●●H30                                                       | —                                                                      | SFA25●●●H30                                                   | SFA15●●●H30            |
| 230 (240)                       | 7.5               | 5         | 400                | SGG15●●●H30                      | SGW15●●●H30                                                       | —                                                                      | SGA25●●●H30                                                   | SGA15●●●H30            |
|                                 | 3                 | 0         | 30                 | SBG12●●●H30 [4]                  | SBW12●●●H30 [4]                                                   | SBW22●●●H30 [4]                                                        | SBA22●●●H30 [4]                                               | SBA12●●●H30 [4]        |
|                                 | 5                 | 1         | 30                 | SCG12●●●H30 [4]                  | SCW12●●●H30 [4]                                                   | SCW22●●●H30 [4]                                                        | SCA22●●●H30 [4]                                               | SCA12●●●H30 [4]        |
|                                 | 7.5               |           | 60                 | SCG13●●●H30 [4]                  | SCW13●●●H30 [4]                                                   | SCW23●●●H30 [4]                                                        | SCA23●●●H30 [4]                                               | SCA13●●●H30 [4]        |
|                                 | 15                | 2         | 60                 | SDG12●●●H30 [4]                  | SDW12●●●H30 [4]                                                   | SDW22●●●H30 [4]                                                        | SDA22●●●H30 [4]                                               | SDA12●●●H30 [4]        |
|                                 | 25                | 3         | 100                | SEG15●●●H30                      | SEW15●●●H30                                                       | —                                                                      | SEA25●●●H30                                                   | SEA15●●●H30            |
| 460 (480)                       | 50                | 4         | 200                | SFG15●●●H30                      | SFW15●●●H30                                                       | —                                                                      | SFA25●●●H30                                                   | SFA15●●●H30            |
|                                 | 100               | 5         | 400                | SGG15●●●H30                      | SGW15●●●H30                                                       | —                                                                      | SGA25●●●H30                                                   | SGA15●●●H30            |
|                                 | 5                 | 0         | 30                 | SBG13●●●H30 [4]                  | SBW13●●●H30 [4]                                                   | SBW23●●●H30 [4]                                                        | SBA23●●●H30 [4]                                               | SBA13●●●H30 [4]        |
|                                 | 10                | 1         | 30                 | SCG14●●●H30 [4]                  | SCW14●●●H30 [4]                                                   | SCW24●●●H30 [4]                                                        | SCA24●●●H30 [4]                                               | SCA14●●●H30 [4]        |
|                                 | 15                | 2         | 30                 | SDG16●●●H301                     | SDW16●●●H301                                                      | SDW26●●●H301                                                           | SDA26●●●H301                                                  | SDA16●●●H301           |
|                                 | 25                |           | 60                 | SDG14●●●H30 [4]                  | SDW14●●●H30 [4]                                                   | SDW24●●●H30 [4]                                                        | SDA24●●●H30 [4]                                               | SDA14●●●H30 [4]        |
| 575 (600)                       | 50                | 3         | 100                | SEG13●●●H30                      | SEW13●●●H30                                                       | —                                                                      | SEA23●●●H30                                                   | SEA13●●●H30            |
|                                 | 100               | 4         | 200                | SFG13●●●H30                      | SFW13●●●H30                                                       | —                                                                      | SFA23●●●H30                                                   | SFA13●●●H30            |
|                                 | 200               | 5         | 400                | SGG13●●●H30                      | SGW13●●●H30                                                       | —                                                                      | SGA23●●●H30                                                   | SGA13●●●H30            |
|                                 | 5                 | 0         | 30                 | SBG13●●●H30                      | SBW13●●●H30                                                       | SBW23●●●H30                                                            | SBA23●●●H30                                                   | SBA13●●●H30            |
|                                 | 10                | 1         | 30                 | SCG14●●●H301                     | SCW14●●●H301                                                      | SCW24●●●H301                                                           | SCA24●●●H301                                                  | SCA14●●●H301           |
|                                 | 15                | 2         | 30                 | SDG16●●●H30                      | SDW16●●●H30                                                       | SDW26●●●H30                                                            | SDA26●●●H30                                                   | SDA16●●●H30            |
|                                 | 25                |           | 60                 | SDG14●●●H30                      | SDW14●●●H30                                                       | SDW24●●●H30                                                            | SDA24●●●H30                                                   | SDA14●●●H30            |
|                                 | 50                | 3         | 100                | SEG13●●●H30                      | SEW13●●●H30                                                       | —                                                                      | SEA23●●●H30                                                   | SEA13●●●H30            |
|                                 | 100               | 4         | 200                | SFG13●●●H30                      | SFW13●●●H30                                                       | —                                                                      | SFA23●●●H30                                                   | SFA13●●●H30            |
|                                 | 200               | 5         | 400                | SGG13●●●H30                      | SGW13●●●H30                                                       | —                                                                      | SGA23●●●H30                                                   | SGA13●●●H30            |

**Table 16.186: Coil Voltage Codes**

| Voltage            |         | Code |
|--------------------|---------|------|
| 60 Hz              | 50 Hz   |      |
| 24 <sup>[5]</sup>  | —       | V01  |
| 120 <sup>[6]</sup> | 110     | V02  |
| 208                | —       | V08  |
| 240                | 220     | V03  |
| 277                | —       | V04  |
| 480                | 440     | V06  |
| 600                | 550     | V07  |
| Specify            | Specify | V99  |

**NOTE:** For voltage codes used with control transformers, see [page 16-118](#).

Form S (separate control) is used when a separate source of power is available for the control (coil) voltage. Form S is available at no charge.

Dimensions: [page 16-72](#)

Factory Modifications (Forms): [page 16-117](#)

Replacement Parts (Class 9998): [page 16-122](#)

Type S Accessories (Class 9999): [page 16-125](#)

For How to Order Information, see [page 16-28](#).

[1] To order melting alloy overload relay, remove form "H30" from part number.

[2] NEMA 12 enclosures can be field modified for outdoor non-corrosive and non-service entrance rated applications. See [page 16-112](#) for more information.

[3] Replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard coil voltage codes shown in [Table 16.186](#).

[4] Form H30, with the possibility of a fourth character to select a lower FLA range (for example, H308). See "Solid-State Overload Relay Forms" on [page 16-119](#)

[5] 24 V coils are not available on Sizes 4–7. On Sizes 00–3, where 24 V coils are available,

Form S (separate control) must be specified (for example, order as 8738SBG12V01S).

[6] These voltage codes must include Form S (supplied at no charge) (for example, order as 8738SC13V02S).



## Non-Fusible and Fusible Disconnect Switch Type 3-Pole Polyphase—600 Vac Maximum—50–60 Hz

For Form H30\* (special lower-FLA factory-assembled starter combinations with Motor Logic SSOLR protection), see [Solid-State Overload Relay Forms](#), page 16-119

**Table 16.187: Class 8738 Non-Fusible Disconnect Switch Type—Full-Voltage, Reversing, with Motor Logic SSOLR (replace ●●● with the voltage code)[7]**

| Ratings                         |                   |           |                    | NEMA 1 General Purpose Enclosure | NEMA 4 & 4X Watertight, Dusttight, Stainless Steel (304) Enclosure | NEMA 4X Watertight, Dusttight, Corrosion Resistant Polyester Enclosure | NEMA 12/3R/8J Dusttight and Driptight Industrial Use Enclosure |                        |
|---------------------------------|-------------------|-----------|--------------------|----------------------------------|--------------------------------------------------------------------|------------------------------------------------------------------------|----------------------------------------------------------------|------------------------|
| Motor Voltage (Starter Voltage) | Max. Hp Polyphase | NEMA Size | Fuse Clip Size (A) | Type [9]                         | Type [9]                                                           | Type [9]                                                               | With External Reset                                            | Without External Reset |
| 200 (208)                       | 3                 | 0         | None               | SBG11●●●H30 [10]                 | SBW11●●●H30 [10]                                                   | SBW21●●●H30 [10]                                                       | SBA21●●●H30 [10]                                               | SBA11●●●H30 [10]       |
|                                 | 7-1/2             | 1         | None               | SCG11●●●H30 [10]                 | SCW11●●●H30 [10]                                                   | SCW21●●●H30 [10]                                                       | SCA21●●●H30 [10]                                               | SCA11●●●H30 [10]       |
|                                 | 10                | 2         | None               | SDG11●●●H30 [10]                 | SDW11●●●H30 [10]                                                   | SDW21●●●H30 [10]                                                       | SDA21●●●H30 [10]                                               | SDA11●●●H30 [10]       |
|                                 | 25                | 3         | None               | SEG11●●●H30                      | SEW11●●●H30                                                        | —                                                                      | SEA21●●●H30                                                    | SEA11●●●H30            |
|                                 | 40                | 4         | None               | SFG11●●●H30                      | SFW11●●●H30                                                        | —                                                                      | SFA21●●●H30                                                    | SFA11●●●H30            |
| 230 (240)                       | 75                | 5         | None               | SGG11●●●H30                      | SGW11●●●H30                                                        | —                                                                      | SGA21●●●H30                                                    | SGA11●●●H30            |
|                                 | 3                 | 0         | None               | SBG11●●●H30 [10]                 | SBW11●●●H30 [10]                                                   | SBW21●●●H30 [10]                                                       | SBA21●●●H30 [10]                                               | SBA11●●●H30 [10]       |
|                                 | 7-1/2             | 1         | None               | SCG11●●●H30 [10]                 | SCW11●●●H30 [10]                                                   | SCW21●●●H30 [10]                                                       | SCA21●●●H30 [10]                                               | SCA11●●●H30 [10]       |
|                                 | 15                | 2         | None               | SDG11●●●H30 [10]                 | SDW11●●●H30 [10]                                                   | SDW21●●●H30 [10]                                                       | SDA21●●●H30 [10]                                               | SDA11●●●H30 [10]       |
|                                 | 30                | 3         | None               | SEG11●●●H30                      | SEW11●●●H30                                                        | —                                                                      | SEA21●●●H30                                                    | SEA11●●●H30            |
| 460 (480)                       | 50                | 4         | None               | SFG11●●●H30                      | SFW11●●●H30                                                        | —                                                                      | SFA21●●●H30                                                    | SFA11●●●H30            |
|                                 | 100               | 5         | None               | SGG11●●●H30                      | SGW11●●●H30                                                        | —                                                                      | SGA21●●●H30                                                    | SGA11●●●H30            |
|                                 | 5                 | 0         | None               | SBG11●●●H30 [10]                 | SBW11●●●H30 [10]                                                   | SBW21●●●H30 [10]                                                       | SBA21●●●H30 [10]                                               | SBA11●●●H30 [10]       |
|                                 | 10                | 1         | None               | SCG11●●●H30 [10]                 | SCW11●●●H30 [10]                                                   | SCW21●●●H30 [10]                                                       | SCA21●●●H30 [10]                                               | SCA11●●●H30 [10]       |
|                                 | 25                | 2         | None               | SDG11●●●H30 [10]                 | SDW11●●●H30 [10]                                                   | SDW21●●●H30 [10]                                                       | SDA21●●●H30 [10]                                               | SDA11●●●H30 [10]       |
| 575 (600)                       | 50                | 3         | None               | SEG11●●●H30                      | SEW11●●●H30                                                        | —                                                                      | SEA21●●●H30                                                    | SEA11●●●H30            |
|                                 | 100               | 4         | None               | SFG11●●●H30                      | SFW11●●●H30                                                        | —                                                                      | SFA21●●●H30                                                    | SFA11●●●H30            |
|                                 | 200               | 5         | None               | SGG11●●●H30                      | SGW11●●●H30                                                        | —                                                                      | SGA21●●●H30                                                    | SGA11●●●H30            |
|                                 | 5                 | 0         | None               | SBG11●●●H30 [10]                 | SBW11●●●H30 [10]                                                   | SBW21●●●H30 [10]                                                       | SBA21●●●H30 [10]                                               | SBA11●●●H30 [10]       |
|                                 | 10                | 1         | None               | SCG11●●●H30 [10]                 | SCW11●●●H30 [10]                                                   | SCW21●●●H30 [10]                                                       | SCA21●●●H30 [10]                                               | SCA11●●●H30 [10]       |

**Table 16.188: Class 8738 Fusible Disconnect Switch Type with Class R Fuse Clips—100,000 AIC Rating (replace ●●● with the voltage code)[7]**

| Ratings                         |                   |           |                    | NEMA 1 General Purpose Enclosure | NEMA 4 & 4X Watertight, Dusttight, Stainless Steel (304) Enclosure | NEMA 4X Watertight, Dusttight, Corrosion Resistant Polyester Enclosure [11] | NEMA 12/3R/8J Dusttight and Driptight Industrial Use Enclosure |                        |
|---------------------------------|-------------------|-----------|--------------------|----------------------------------|--------------------------------------------------------------------|-----------------------------------------------------------------------------|----------------------------------------------------------------|------------------------|
| Motor Voltage (Starter Voltage) | Max. Hp Polyphase | NEMA Size | Fuse Clip Size (A) | Type [9]                         | Type [9]                                                           | Type [9]                                                                    | With External Reset                                            | Without External Reset |
| 200 (208)                       | 3                 | 0         | 30                 | SBG32●●●H30 [10]                 | SBW32●●●H30 [10]                                                   | SBW42●●●H30 [10]                                                            | SBA42●●●H30 [10]                                               | SBA32●●●H30 [10]       |
|                                 | 5                 | 1         | 30                 | SCG32●●●H30 [10]                 | SCW32●●●H30 [10]                                                   | SCW42●●●H30 [10]                                                            | SCA42●●●H30 [10]                                               | SCA32●●●H30 [10]       |
|                                 | 7-1/2             | 1         | 60                 | SDG32●●●H30 [10]                 | SDW32●●●H30 [10]                                                   | SDW42●●●H30 [10]                                                            | SDA42●●●H30 [10]                                               | SDA32●●●H30 [10]       |
|                                 | 10                | 2         | 60                 | SEG35●●●H30                      | SEW35●●●H30                                                        | —                                                                           | SEA45●●●H30                                                    | SEA35●●●H30            |
|                                 | 20                | 3         | 100                | SFG35●●●H30                      | SFW35●●●H30                                                        | —                                                                           | SFA45●●●H30                                                    | SFA35●●●H30            |
| 230 (240)                       | 40                | 4         | 200                | SGG35●●●H30                      | SGW35●●●H30                                                        | —                                                                           | SGA45●●●H30                                                    | SGA35●●●H30            |
|                                 | 75                | 5         | 400                | SBG32●●●H30 [10]                 | SBW32●●●H30 [10]                                                   | SBW42●●●H30 [10]                                                            | SBA42●●●H30 [10]                                               | SBA32●●●H30 [10]       |
|                                 | 3                 | 0         | 30                 | SCG32●●●H30 [10]                 | SCW32●●●H30 [10]                                                   | SCW42●●●H30 [10]                                                            | SCA42●●●H30 [10]                                               | SCA32●●●H30 [10]       |
|                                 | 5                 | 1         | 30                 | SDG32●●●H30 [10]                 | SDW32●●●H30 [10]                                                   | SDW42●●●H30 [10]                                                            | SDA42●●●H30 [10]                                               | SDA32●●●H30 [10]       |
|                                 | 7-1/2             | 1         | 60                 | SEG35●●●H30                      | SEW35●●●H30                                                        | —                                                                           | SEA45●●●H30                                                    | SEA35●●●H30            |
| 460 (480)                       | 15                | 2         | 60                 | SFG35●●●H30                      | SFW35●●●H30                                                        | —                                                                           | SFA45●●●H30                                                    | SFA35●●●H30            |
|                                 | 25                | 3         | 100                | SGG35●●●H30                      | SGW35●●●H30                                                        | —                                                                           | SGA45●●●H30                                                    | SGA35●●●H30            |
|                                 | 50                | 4         | 200                | SBG33●●●H30 [10]                 | SBW33●●●H30 [10]                                                   | SBW43●●●H30 [10]                                                            | SBA43●●●H30 [10]                                               | SBA33●●●H30 [10]       |
|                                 | 100               | 5         | 400                | SCG34●●●H30 [10]                 | SCW34●●●H30 [10]                                                   | SCW44●●●H30 [10]                                                            | SCA44●●●H30 [10]                                               | SCA34●●●H30 [10]       |
|                                 | 5                 | 0         | 30                 | SDG36●●●H301                     | SDW36●●●H301                                                       | SDW46●●●H301                                                                | SDA46●●●H301                                                   | SDA36●●●H301           |
| 575 (600)                       | 25                | 2         | 60                 | SEG33●●●H30                      | SEW33●●●H30                                                        | —                                                                           | SEA43●●●H30                                                    | SEA33●●●H30            |
|                                 | 50                | 3         | 100                | SFG33●●●H30                      | SFW33●●●H30                                                        | —                                                                           | SFA43●●●H30                                                    | SFA33●●●H30            |
|                                 | 100               | 4         | 200                | SGG33●●●H30                      | SGW33●●●H30                                                        | —                                                                           | SGA43●●●H30                                                    | SGA33●●●H30            |
|                                 | 200               | 5         | 400                | SBG33●●●H30 [10]                 | SBW33●●●H30 [10]                                                   | SBW43●●●H30 [10]                                                            | SBA43●●●H30 [10]                                               | SBA33●●●H30 [10]       |
|                                 | 5                 | 0         | 30                 | SCG34●●●H30 [10]                 | SCW34●●●H30 [10]                                                   | SCW44●●●H30 [10]                                                            | SCA44●●●H30 [10]                                               | SCA34●●●H30 [10]       |

For How to Order Information, see [page 16-28](#).

[7] To order melting alloy overload relay, remove form "H30" from part number.

[8] NEMA 12 enclosures can be field modified for outdoor non-corrosive and non-service entrance rated applications. See [page 16-112](#) for more information.

[9] Replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard coil voltage codes shown in [Table 16.190](#).

[10] Form H30, with the possibility of a fourth character to select a lower FLA range (for example, H308). See "Solid-State Overload Relay Forms" on [page 16-119](#)

[11] 5,000 AIC Rating

**Electronic Motor Circuit Protector (MCP)  
3-Pole Polyphase—600 Vac Maximum—50–60 Hz**

For Form H30• (special lower-FLA factory-assembled starter combinations with Motor Logic SSOLR protection), see [Solid-State Overload Relay Forms](#), page 16-119

**Table 16.189: Class 8739 Full-Voltage Type, Reversing with Motor Logic SSOLR (replace ●●● with the voltage code)**<sup>[12]</sup>

| Ratings                                  |              |                       |                                                                       | NEMA 1<br>General Purpose<br>Enclosure | NEMA 4 & 4X<br>Watertight,<br>Dusttight, Stainless<br>Steel (304)<br>Enclosure (Sizes 0-<br>5) <sup>[13]</sup> | NEMA 4X<br>Watertight,<br>Dusttight, Corrosion<br>Resistant Polyester<br>Enclosure | NEMA 12/3R/ <sup>[14]</sup><br>Dusttight and Driptight<br>Industrial Use Enclosure |                             |
|------------------------------------------|--------------|-----------------------|-----------------------------------------------------------------------|----------------------------------------|----------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-----------------------------|
| Motor<br>Voltage<br>(Starter<br>Voltage) | NEMA Size    | Hp Range<br>Polyphase | Circuit Breaker (See<br>Page 7-32 for<br>Breaker Adjustment<br>Range) | Type <sup>[15]</sup>                   | Type <sup>[15]</sup>                                                                                           | Type <sup>[15]</sup>                                                               | With<br>External Reset                                                             | Without<br>External Reset   |
|                                          |              |                       |                                                                       | Type <sup>[15]</sup>                   | Type <sup>[15]</sup>                                                                                           | Type <sup>[15]</sup>                                                               | Type <sup>[15]</sup>                                                               | Type <sup>[15]</sup>        |
| 200<br>(208)                             | 0            | 0.25–3                | HLL36030M71                                                           | SBG43●●●H30 <sup>[16]</sup>            | SBW43●●●H30 <sup>[16]</sup>                                                                                    | SBW53●●●H30 <sup>[16]</sup>                                                        | SBA53●●●H30 <sup>[16]</sup>                                                        | SBA43●●●H30 <sup>[16]</sup> |
|                                          | 1            | 0.25–5                | HLL36030M71                                                           | SCG44●●●H30 <sup>[16]</sup>            | SCW44●●●H30 <sup>[16]</sup>                                                                                    | SCW54●●●H30 <sup>[16]</sup>                                                        | SCA54●●●H30 <sup>[16]</sup>                                                        | SCA44●●●H30 <sup>[16]</sup> |
|                                          |              | 7.5                   | HLL36050M72                                                           | SCG45●●●H30 <sup>[16]</sup>            | SCW45●●●H30 <sup>[16]</sup>                                                                                    | SCW55●●●H30 <sup>[16]</sup>                                                        | SCA55●●●H30 <sup>[16]</sup>                                                        | SCA45●●●H30 <sup>[16]</sup> |
|                                          | 2            | 1.5–5                 | HLL36030M71                                                           | SDG42●●●H301                           | SDW42●●●H301                                                                                                   | SDW52●●●H301                                                                       | SDA52●●●H301                                                                       | SDA42●●●H301                |
|                                          |              | 7.5–10                | HLL36050M72                                                           | SDG43●●●H30 <sup>[16]</sup>            | SDW43●●●H30 <sup>[16]</sup>                                                                                    | SDW53●●●H30 <sup>[16]</sup>                                                        | SDA53●●●H30 <sup>[16]</sup>                                                        | SDA43●●●H30 <sup>[16]</sup> |
|                                          | 3            | 15–25                 | HLL36100M73                                                           | SEG42●●●H30                            | SEW42●●●H30                                                                                                    | SEW52●●●H30                                                                        | SEA52●●●H30                                                                        | SEA42●●●H30                 |
|                                          | 4            | 30–40                 | JLL36250M75                                                           | SFG44●●●H30                            | SFW44●●●H30                                                                                                    | SFW54●●●H30                                                                        | SFA54●●●H30                                                                        | SFA44●●●H30                 |
|                                          | 5            | 50–60                 | JLL36250M75                                                           | SGG44●●●H30                            | SGW44●●●H30                                                                                                    | —                                                                                  | SGA54●●●H30                                                                        | SGA44●●●H30                 |
|                                          |              | 75                    | LJL36400M36                                                           | SGG45●●●H30                            | SGW45●●●H30                                                                                                    | —                                                                                  | SGA55●●●H30                                                                        | SGA45●●●H30                 |
|                                          | 6            | 100                   | LJL36400M36                                                           | SHG43●●●H30                            | SHW43●●●H30                                                                                                    | —                                                                                  | SHA53●●●H30                                                                        | SHA43●●●H30                 |
|                                          |              | 125–150               | LJL36600M42                                                           | SHG45●●●H30                            | SHW45●●●H30                                                                                                    | —                                                                                  | SHA55●●●H30                                                                        | SHA45●●●H30                 |
|                                          | 230<br>(240) | 0                     | 0.25–3                                                                | HLL36030M71                            | SBG43●●●H30 <sup>[16]</sup>                                                                                    | SBW43●●●H30 <sup>[16]</sup>                                                        | SBW53●●●H30 <sup>[16]</sup>                                                        | SBA53●●●H30 <sup>[16]</sup> |
| 1                                        |              | 0.25–7.5              | HLL36030M71                                                           | SCG44●●●H30 <sup>[16]</sup>            | SCW44●●●H30 <sup>[16]</sup>                                                                                    | SCW54●●●H30 <sup>[16]</sup>                                                        | SCA54●●●H30 <sup>[16]</sup>                                                        | SCA44●●●H30 <sup>[16]</sup> |
| 2                                        |              | 1.5–7.5               | HLL36030M71                                                           | SDG42●●●H301                           | SDW42●●●H301                                                                                                   | SDW52●●●H301                                                                       | SDA52●●●H301                                                                       | SDA42●●●H301                |
|                                          |              | 10                    | HLL36050M72                                                           | SDG43●●●H30 <sup>[16]</sup>            | SDW43●●●H30 <sup>[16]</sup>                                                                                    | SDW53●●●H30 <sup>[16]</sup>                                                        | SDA53●●●H30 <sup>[16]</sup>                                                        | SDA43●●●H30 <sup>[16]</sup> |
| 3                                        |              | 15                    | HLL36100M73                                                           | SDG44●●●H30 <sup>[16]</sup>            | SDW44●●●H30 <sup>[16]</sup>                                                                                    | SDW54●●●H30 <sup>[16]</sup>                                                        | SDA54●●●H30 <sup>[16]</sup>                                                        | SDA44●●●H30 <sup>[16]</sup> |
|                                          |              | 3                     | 15–30                                                                 | HLL36100M73                            | SEG42●●●H30                                                                                                    | SEW42●●●H30                                                                        | SEW52●●●H30                                                                        | SEA52●●●H30                 |
| 4                                        |              | 40–50                 | JLL36250M75                                                           | SFG44●●●H30                            | SFW44●●●H30                                                                                                    | SFW54●●●H30                                                                        | SFA54●●●H30                                                                        | SFA44●●●H30                 |
| 5                                        |              | 60                    | JLL36250M75                                                           | SGG44●●●H30                            | SGW44●●●H30                                                                                                    | —                                                                                  | SGA54●●●H30                                                                        | SGA44●●●H30                 |
|                                          |              | 75–100                | LJL36400M36                                                           | SGG45●●●H30                            | SGW45●●●H30                                                                                                    | —                                                                                  | SGA55●●●H30                                                                        | SGA45●●●H30                 |
| 6                                        |              | 125–150               | LJL36600M42                                                           | SHG45●●●H30                            | SHW45●●●H30                                                                                                    | —                                                                                  | SHA55●●●H30                                                                        | SHA45●●●H30                 |
|                                          |              | 200                   | PLL34080M68                                                           | SHG46●●●H30                            | SHW46●●●H30                                                                                                    | —                                                                                  | SHA56●●●H30                                                                        | SHA46●●●H30                 |
| 460<br>(480)                             |              | 0                     | 0.25–5                                                                | HLL36030M71                            | SBG43●●●H30 <sup>[16]</sup>                                                                                    | SBW43●●●H30 <sup>[16]</sup>                                                        | SBW53●●●H30 <sup>[16]</sup>                                                        | SBA53●●●H30 <sup>[16]</sup> |
|                                          | 1            | 0.25–10               | HLL36030M71                                                           | SCG44●●●H30 <sup>[16]</sup>            | SCW44●●●H30 <sup>[16]</sup>                                                                                    | SCW54●●●H30 <sup>[16]</sup>                                                        | SCA54●●●H30 <sup>[16]</sup>                                                        | SCA44●●●H30 <sup>[16]</sup> |
|                                          | 2            | 5–15                  | HLL36030M71                                                           | SDG42●●●H301                           | SDW42●●●H301                                                                                                   | SDW52●●●H301                                                                       | SDA52●●●H301                                                                       | SDA42●●●H301                |
|                                          |              | 20–25                 | HLL36050M72                                                           | SDG43●●●H30 <sup>[16]</sup>            | SDW43●●●H30 <sup>[16]</sup>                                                                                    | SDW53●●●H30 <sup>[16]</sup>                                                        | SDA53●●●H30 <sup>[16]</sup>                                                        | SDA43●●●H30 <sup>[16]</sup> |
|                                          | 3            | 20–25                 | HLL36050M72                                                           | SEG41●●●H30                            | SEW41●●●H30                                                                                                    | SEW51●●●H30                                                                        | SEA51●●●H30                                                                        | SEA41●●●H30                 |
|                                          | 4            | 30–50                 | HLL36100M73                                                           | SEG42●●●H30                            | SEW42●●●H30                                                                                                    | SEW52●●●H30                                                                        | SEA52●●●H30                                                                        | SEA42●●●H30                 |
|                                          |              | 60–100                | JLL36250M75                                                           | SFG44●●●H30                            | SFW44●●●H30                                                                                                    | SFW54●●●H30                                                                        | SFA54●●●H30                                                                        | SFA44●●●H30                 |
|                                          | 5            | 125                   | JLL36250M75                                                           | SGG44●●●H30                            | SGW44●●●H30                                                                                                    | —                                                                                  | SGA54●●●H30                                                                        | SGA44●●●H30                 |
|                                          |              | 150–200               | LJL36400M36                                                           | SGG45●●●H30                            | SGW45●●●H30                                                                                                    | —                                                                                  | SGA55●●●H30                                                                        | SGA45●●●H30                 |
|                                          | 6            | 250–350               | LJL36600M42                                                           | SHG45●●●H30                            | SHW45●●●H30                                                                                                    | —                                                                                  | SHA55●●●H30                                                                        | SHA45●●●H30                 |
|                                          |              | 400                   | PLL34080M68                                                           | SHG46●●●H30                            | SHW46●●●H30                                                                                                    | —                                                                                  | SHA56●●●H30                                                                        | SHA46●●●H30                 |
|                                          | 575<br>(600) | 0                     | 0.25–5                                                                | HLL36030M71                            | SBG43●●●H30 <sup>[16]</sup>                                                                                    | SBW43●●●H30 <sup>[16]</sup>                                                        | SBW53●●●H30 <sup>[16]</sup>                                                        | SBA53●●●H30 <sup>[16]</sup> |
| 1                                        |              | 0.25–10               | HLL36030M71                                                           | SCG44●●●H30 <sup>[16]</sup>            | SCW44●●●H30 <sup>[16]</sup>                                                                                    | SCW54●●●H30 <sup>[16]</sup>                                                        | SCA54●●●H30 <sup>[16]</sup>                                                        | SCA44●●●H30 <sup>[16]</sup> |
| 2                                        |              | 5–20                  | HLL36030M71                                                           | SDG42●●●H301                           | SDW42●●●H301                                                                                                   | SDW52●●●H301                                                                       | SDA52●●●H301                                                                       | SDA42●●●H301                |
|                                          |              | 25                    | HLL36050M72                                                           | SDG43●●●H30 <sup>[16]</sup>            | SDW43●●●H30 <sup>[16]</sup>                                                                                    | SDW53●●●H30 <sup>[16]</sup>                                                        | SDA53●●●H30 <sup>[16]</sup>                                                        | SDA43●●●H30 <sup>[16]</sup> |
| 3                                        |              | 25–30                 | HLL36050M72                                                           | SEG41●●●H30                            | SEW41●●●H30                                                                                                    | SEW51●●●H30                                                                        | SEA51●●●H30                                                                        | SEA41●●●H30                 |
| 4                                        |              | 40–50                 | HLL36100M73                                                           | SEG42●●●H30                            | SEW42●●●H30                                                                                                    | SEW52●●●H30                                                                        | SEA52●●●H30                                                                        | SEA42●●●H30                 |
|                                          |              | 60–100                | JLL36250M75                                                           | SFG44●●●H30                            | SFW44●●●H30                                                                                                    | SFW54●●●H30                                                                        | SFA54●●●H30                                                                        | SFA44●●●H30                 |
| 5                                        |              | 125–150               | JLL36250M75                                                           | SGG44●●●H30                            | SGW44●●●H30                                                                                                    | —                                                                                  | SGA54●●●H30                                                                        | SGA44●●●H30                 |
|                                          |              | 200                   | LJL36400M36                                                           | SGG45●●●H30                            | SGW45●●●H30                                                                                                    | —                                                                                  | SGA55●●●H30                                                                        | SGA45●●●H30                 |
| 6                                        |              | 250                   | LJL36400M36                                                           | SHG43●●●H30                            | SHW43●●●H30                                                                                                    | —                                                                                  | SHA53●●●H30                                                                        | SHA43●●●H30                 |
|                                          |              | 300–400               | LJL36600M42                                                           | SHG45●●●H30                            | SHW45●●●H30                                                                                                    | —                                                                                  | SHA55●●●H30                                                                        | SHA45●●●H30                 |

**Table 16.190: Coil Voltage Codes**

| Voltage             |         | Code |
|---------------------|---------|------|
| 60 Hz               | 50 Hz   |      |
| 24 <sup>[17]</sup>  | —       | V01  |
| 120 <sup>[18]</sup> | 110     | V02  |
| 208                 | —       | V08  |
| 240                 | 220     | V03  |
| 277                 | —       | V04  |
| 480                 | 440     | V06  |
| 600                 | 550     | V07  |
| Specify             | Specify | V99  |

**NOTE:** For voltage codes used with control transformers, see [page 16-118](#).

Form S (separate control) is used when a separate source of power is available for the control (coil) voltage. Form S is available at no charge.

Dimensions: [page 16-72](#)

Factory Modifications (Forms): [page 16-117](#)

Replacement Parts (Class 9998): [page 16-122](#)

Type S Accessories (Class 9999): [page 16-125](#)

For How to Order Information, see [page 16-28](#).

[12] To order melting alloy overload relay, remove form "H30" from part number.

[13] Size 6 starters are NEMA 4 painted sheet steel enclosures.

[14] NEMA 12 enclosures can be field modified for outdoor non-corrosive and non-service entrance rated applications. See [page 16-112](#) for more information.

[15] Replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard coil voltage codes shown in [Table 16.190](#).

[16] **Form H30**, with the possibility of a fourth character to select a lower FLA range (for example, **H308**). See "Solid-State Overload Relay Forms" on [page 16-119](#).

[17] 24 V coils are not available on Sizes 4–7. On Sizes 00–3, where 24 V coils are available, **Form S** (separate control) must be specified (for example, order as 8739SBG41V01S).

[18] These voltage codes must include **Form S** (provided at no charge) (for example, order as 8739SCG41V02S).

## Thermal Magnetic Circuit Breaker

## 3-Pole Polyphase—600 Vac Maximum—50–60 Hz

For Form H30• (special lower-FLA factory-assembled starter combinations with Motor Logic SSOLR protection), see [Solid-State Overload Relay Forms](#), page 16-119

Table 16.191: Class 8739 Full-Voltage Type, Reversing, 200–240 V, with Motor Logic SSOLR (replace ●●● with the voltage code)<sup>[19]</sup>

| Ratings                         |                   |           |                 |               | NEMA 1 General Purpose Enclosure | NEMA 4 & 4X Watertight and Dusttight Enclosure Stainless Steel (304) (Sizes 0-5) <sup>[20]</sup> | NEMA 4X Watertight, Dusttight and Corrosion Resistant Polyester Enclosure | NEMA 12/3R <sup>[21]</sup> Dusttight and Driptight Industrial Use Enclosure |                            |
|---------------------------------|-------------------|-----------|-----------------|---------------|----------------------------------|--------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------|-----------------------------------------------------------------------------|----------------------------|
| Motor Voltage (Starter Voltage) | Max. Hp Polyphase | NEMA Size | Circuit Breaker |               | Type <sup>[22]</sup>             | Type <sup>[22]</sup>                                                                             | Type <sup>[22]</sup>                                                      | With External Reset                                                         | Without External Reset     |
|                                 |                   |           | Type            | Ampere Rating |                                  |                                                                                                  |                                                                           | Type <sup>[22]</sup>                                                        | Type <sup>[22]</sup>       |
| 200 (208)                       | 2                 | 0         | HLL36015        | 15            | SBG1●●●H30 <sup>[23]</sup>       | SBW1●●●H30 <sup>[23]</sup>                                                                       | SBW11●●●H30 <sup>[23]</sup>                                               | SBA11●●●H30 <sup>[23]</sup>                                                 | SBA1●●●H30 <sup>[23]</sup> |
|                                 | 3                 |           | HLL36020        | 20            | SBG3●●●H30 <sup>[23]</sup>       | SBW3●●●H30 <sup>[23]</sup>                                                                       | SBW13●●●H30 <sup>[23]</sup>                                               | SBA13●●●H30 <sup>[23]</sup>                                                 | SBA3●●●H30 <sup>[23]</sup> |
|                                 | 5                 | 1         | HLL36035        | 35            | SCG5●●●H30 <sup>[23]</sup>       | SCW5●●●H30 <sup>[23]</sup>                                                                       | SCW15●●●H30 <sup>[23]</sup>                                               | SCA15●●●H30 <sup>[23]</sup>                                                 | SCA5●●●H30 <sup>[23]</sup> |
|                                 | 7.5               |           | HLL36050        | 50            | SCG2●●●H30 <sup>[23]</sup>       | SCW2●●●H30 <sup>[23]</sup>                                                                       | SCW12●●●H30 <sup>[23]</sup>                                               | SCA12●●●H30 <sup>[23]</sup>                                                 | SCA2●●●H30 <sup>[23]</sup> |
|                                 | 10                | 2         | HLL36060        | 60            | SDG1●●●H30 <sup>[23]</sup>       | SDW1●●●H30 <sup>[23]</sup>                                                                       | SDW11●●●H30 <sup>[23]</sup>                                               | SDA11●●●H30 <sup>[23]</sup>                                                 | SDA1●●●H30 <sup>[23]</sup> |
|                                 | 15                | 3         | HLL36100        | 100           | SEG3●●●H30                       | SEW3●●●H30                                                                                       | SEW13●●●H30                                                               | SEA13●●●H30                                                                 | SEA3●●●H30                 |
|                                 | 20                |           | HLL36125        | 125           | SEG1●●●H30                       | SEW1●●●H30                                                                                       | SEW11●●●H30                                                               | SEA11●●●H30                                                                 | SEA1●●●H30                 |
|                                 | 25                |           | HLL36150        | 150           | SEG5●●●H30                       | SEW5●●●H30                                                                                       | SEW15●●●H30                                                               | SEA15●●●H30                                                                 | SEA5●●●H30                 |
|                                 | 30                | 4         | JLL36200        | 200           | SFG3●●●H30                       | SFW3●●●H30                                                                                       | SFW13●●●H30                                                               | SFA13●●●H30                                                                 | SFA3●●●H30                 |
|                                 | 40                |           | JLL36250        | 250           | SFG4●●●H30                       | SFW4●●●H30                                                                                       | SFW14●●●H30                                                               | SFA14●●●H30                                                                 | SFA4●●●H30                 |
|                                 | 50                | 5         | JLL36250        | 250           | SGG6●●●H30                       | SGW6●●●H30                                                                                       | —                                                                         | SGA16●●●H30                                                                 | SGA6●●●H30                 |
|                                 | 60–75             |           | LLL36400U33X    | 400           | SGG4●●●H30                       | SGW4●●●H30                                                                                       | —                                                                         | SGA14●●●H30                                                                 | SGA4●●●H30                 |
| 230 (240)                       | 100–125           | 6         | LLL36600U33X    | 600           | SHG4●●●H30                       | SHW4●●●H30                                                                                       | —                                                                         | SHA14●●●H30                                                                 | SHA4●●●H30                 |
|                                 | 150               |           | MJL36800        | 800           | SHG5●●●H30                       | SHW5●●●H30                                                                                       | —                                                                         | SHA15●●●H30                                                                 | SHA5●●●H30                 |
|                                 | 2                 | 0         | HLL36015        | 15            | SBG1●●●H30 <sup>[23]</sup>       | SBW1●●●H30 <sup>[23]</sup>                                                                       | SBW11●●●H30 <sup>[23]</sup>                                               | SBA11●●●H30 <sup>[23]</sup>                                                 | SBA1●●●H30 <sup>[23]</sup> |
|                                 | 3                 |           | HLL36020        | 20            | SBG3●●●H30 <sup>[23]</sup>       | SBW3●●●H30 <sup>[23]</sup>                                                                       | SBW13●●●H30 <sup>[23]</sup>                                               | SBA13●●●H30 <sup>[23]</sup>                                                 | SBA3●●●H30 <sup>[23]</sup> |
|                                 | 5                 | 1         | HLL36035        | 35            | SCG5●●●H30 <sup>[23]</sup>       | SCW5●●●H30 <sup>[23]</sup>                                                                       | SCW15●●●H30 <sup>[23]</sup>                                               | SCA15●●●H30 <sup>[23]</sup>                                                 | SCA5●●●H30 <sup>[23]</sup> |
|                                 | 7.5               |           | HLL36045        | 45            | SCG6●●●H30 <sup>[23]</sup>       | SCW6●●●H30 <sup>[23]</sup>                                                                       | SCW16●●●H30 <sup>[23]</sup>                                               | SCA16●●●H30 <sup>[23]</sup>                                                 | SCA6●●●H30 <sup>[23]</sup> |
|                                 | 10                | 2         | HLL36060        | 60            | SDG1●●●H30 <sup>[23]</sup>       | SDW1●●●H30 <sup>[23]</sup>                                                                       | SDW11●●●H30 <sup>[23]</sup>                                               | SDA11●●●H30 <sup>[23]</sup>                                                 | SDA1●●●H30 <sup>[23]</sup> |
|                                 | 15                |           | HLL36090        | 90            | SDG7●●●H30 <sup>[23]</sup>       | SDW7●●●H30 <sup>[23]</sup>                                                                       | SDW17●●●H30 <sup>[23]</sup>                                               | SDA17●●●H30 <sup>[23]</sup>                                                 | SDA7●●●H30 <sup>[23]</sup> |
|                                 | 20                | 3         | HLL36100        | 100           | SEG3●●●H30                       | SEW3●●●H30                                                                                       | SEW13●●●H30                                                               | SEA13●●●H30                                                                 | SEA3●●●H30                 |
|                                 | 25–30             |           | HLL36150        | 150           | SEG5●●●H30                       | SEW5●●●H30                                                                                       | SEW15●●●H30                                                               | SEA15●●●H30                                                                 | SEA5●●●H30                 |
|                                 | 40                | 4         | JLL36225        | 225           | SFG1●●●H30                       | SFW1●●●H30                                                                                       | SFW11●●●H30                                                               | SFA11●●●H30                                                                 | SFA1●●●H30                 |
|                                 | 50                |           | JLL36250        | 250           | SFG4●●●H30                       | SFW4●●●H30                                                                                       | SFW14●●●H30                                                               | SFA14●●●H30                                                                 | SFA4●●●H30                 |
|                                 | 60                | 5         | JLL36250        | 250           | SGG6●●●H30                       | SGW6●●●H30                                                                                       | —                                                                         | SGA16●●●H30                                                                 | SGA6●●●H30                 |
|                                 | 75                |           | LLL36400U33X    | 400           | SGG4●●●H30                       | SGW4●●●H30                                                                                       | —                                                                         | SGA14●●●H30                                                                 | SGA4●●●H30                 |
|                                 | 100               |           | LLL36600U33X    | 600           | SGG2●●●H30                       | SGW2●●●H30                                                                                       | —                                                                         | SGA12●●●H30                                                                 | SGA2●●●H30                 |
|                                 | 125               | 6         | LLL36600U33X    | 600           | SHG4●●●H30                       | SHW4●●●H30                                                                                       | —                                                                         | SHA14●●●H30                                                                 | SHA4●●●H30                 |
|                                 | 150–200           |           | MJL36800        | 800           | SHG5●●●H30                       | SHW5●●●H30                                                                                       | —                                                                         | SHA15●●●H30                                                                 | SHA5●●●H30                 |

Table 16.192: Coil Voltage Codes

| Voltage             |         | Code |
|---------------------|---------|------|
| 60 Hz               | 50 Hz   |      |
| 24 <sup>[24]</sup>  | —       | V01  |
| 120 <sup>[25]</sup> | 110     | V02  |
| 208                 | —       | V08  |
| 240                 | 220     | V03  |
| 277                 | —       | V04  |
| 480                 | 440     | V06  |
| 600                 | 550     | V07  |
| Specify             | Specify | V99  |

**NOTE:** For voltage codes used with control transformers, see [page 16-118](#).

Form S (separate control) is used when a separate source of power is available for the control (coil) voltage. Form S is available at no charge.

Dimensions: [page 16-72](#)

Factory Modifications (Forms): [page 16-117](#)

Replacement Parts (Class 9998): [page 16-122](#)

Type S Accessories (Class 9999): [page 16-125](#)

For How to Order Information, see [page 16-28](#).

<sup>[19]</sup> To order melting alloy overload relay, remove form "H30" from part number.

<sup>[20]</sup> Size 6 starters are NEMA 4 painted sheet steel enclosures.

<sup>[21]</sup> NEMA 12 enclosures can be field modified for outdoor non-corrosive and non-service entrance rated applications. See [page 16-112](#) for more information.

<sup>[22]</sup> Replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard coil voltage codes shown in [Table 16.192](#).

<sup>[23]</sup> Form H30, with the possibility of a fourth character to select a lower FLA range (for example, H308). See "Solid-State Overload Relay Forms" on [page 16-119](#).

<sup>[24]</sup> 24 V coils are not available on Sizes 4–7. On Sizes 00–3, where 24 V coils are available, Form S (separate control) must be specified (for example, order as 8739SBG1V01S).

<sup>[25]</sup> These voltage codes must include Form S (provided at no charge) (for example, order as 8739SCG5V02S).

**Thermal Magnetic Circuit Breaker**  
**3-Pole Polyphase—600 Vac Maximum—50–60 Hz**

For Form H30\* (special lower-FLA factory-assembled starter combinations with Motor Logic SSOLR protection), see [Solid-State Overload Relay Forms](#), page 16-119

**Table 16.193: Class 8739 Full-Voltage Type, Reversing, 460–600 V, with Motor Logic SSOLR (replace ●●● with the voltage code)[26]**

| Ratings                         |                   |           |                 | NEMA 1 General Purpose Enclosure | NEMA 4 & 4X Watertight, Dusttight, Stainless Steel (304) Enclosure (Sizes 0–5)[27] | NEMA 4X Watertight, Dusttight, Corrosion Resistant Polyester Enclosure | NEMA 12/3R[28] Dusttight and Driptight Industrial Use Enclosure |                     |                        |
|---------------------------------|-------------------|-----------|-----------------|----------------------------------|------------------------------------------------------------------------------------|------------------------------------------------------------------------|-----------------------------------------------------------------|---------------------|------------------------|
| Motor Voltage (Starter Voltage) | Max. Hp Polyphase | NEMA Size | Circuit Breaker | Type [29]                        | Type [29]                                                                          | Type [29]                                                              | Type [29]                                                       | With External Reset | Without External Reset |
|                                 |                   |           | Type            | Ampere Rating                    |                                                                                    |                                                                        |                                                                 | Type [29]           | Type [29]              |
| 460 (480)                       | 5                 | 0         | HLL36015        | 15                               | SBG1●●●H30 [30]                                                                    | SBW1●●●H30 [30]                                                        | SBW11●●●H30 [30]                                                | SBA11●●●H30 [30]    | SBA1●●●H30 [30]        |
|                                 | 7-1/2             | 1         | HLL36025        | 25                               | SCG3●●●H30 [30]                                                                    | SCW3●●●H30 [30]                                                        | SCW13●●●H30 [30]                                                | SCA13●●●H30 [30]    | SCA3●●●H30 [30]        |
|                                 | 10                |           | HLL36030        | 30                               | SCG7●●●H30 [30]                                                                    | SCW7●●●H30 [30]                                                        | SCW17●●●H30 [30]                                                | SCA17●●●H30 [30]    | SCA7●●●H30 [30]        |
|                                 | 15                | 2         | HLL36045        | 45                               | SDG3●●●H30 [30]                                                                    | SDW3●●●H30 [30]                                                        | SDW13●●●H30 [30]                                                | SDA13●●●H30 [30]    | SDA3●●●H30 [30]        |
|                                 | 20                |           | HLL36060        | 60                               | SDG1●●●H30 [30]                                                                    | SDW1●●●H30 [30]                                                        | SDW11●●●H30 [30]                                                | SDA11●●●H30 [30]    | SDA1●●●H30 [30]        |
|                                 | 25                |           | HLL36070        | 70                               | SDG5●●●H30 [30]                                                                    | SDW5●●●H30 [30]                                                        | SDW15●●●H30 [30]                                                | SDA15●●●H30 [30]    | SDA5●●●H30 [30]        |
|                                 | 30                | 3         | HLL36080        | 80                               | SEG6●●●H30                                                                         | SEW6●●●H30                                                             | SEW16●●●H30                                                     | SEA16●●●H30         | SEA6●●●H30             |
|                                 | 40                |           | HLL36100        | 100                              | SEG3●●●H30                                                                         | SEW3●●●H30                                                             | SEW13●●●H30                                                     | SEA13●●●H30         | SEA3●●●H30             |
|                                 | 50                |           | HLL36150        | 150                              | SEG5●●●H30                                                                         | SEW5●●●H30                                                             | SEW15●●●H30                                                     | SEA15●●●H30         | SEA5●●●H30             |
|                                 | 60                | 4         | JLL36105        | 150                              | SFG5●●●H30                                                                         | SFW5●●●H30                                                             | SFW15●●●H30                                                     | SFA15●●●H30         | SFA5●●●H30             |
|                                 | 75                |           | JLL36200        | 200                              | SFG3●●●H30                                                                         | SFW3●●●H30                                                             | SFW13●●●H30                                                     | SFA13●●●H30         | SFA3●●●H30             |
|                                 | 100               |           | JLL36250        | 250                              | SFG4●●●H30                                                                         | SFW4●●●H30                                                             | SFW14●●●H30                                                     | SFA14●●●H30         | SFA4●●●H30             |
| 575 (600)                       | 125–150           | 5         | LLL36400U33X    | 400                              | SGG4●●●H30                                                                         | SGW4●●●H30                                                             | —                                                               | SGA14●●●H30         | SGA4●●●H30             |
|                                 | 200               |           | LLL36600U33X    | 600                              | SGG2●●●H30                                                                         | SGW2●●●H30                                                             | —                                                               | SGA12●●●H30         | SGA2●●●H30             |
|                                 | 250               | 6         | LLL36600U33X    | 600                              | SHG4●●●H30                                                                         | SHW4●●●H30                                                             | —                                                               | SHA14●●●H30         | SHA4●●●H30             |
|                                 | 300–400           |           | MJL36800        | 800                              | SHG5●●●H30                                                                         | SHW5●●●H30                                                             | —                                                               | SHA15●●●H30         | SHA5●●●H30             |
|                                 | 5                 | 0         | HLL36015        | 15                               | SBG1●●●H30                                                                         | SBW1●●●H30                                                             | SBW11●●●H30                                                     | SBA11●●●H30         | SBA1●●●H30             |
|                                 | 7-1/2             | 1         | HLL36020        | 20                               | SCG8●●●H30                                                                         | SCW8●●●H30                                                             | SCW18●●●H30                                                     | SCA18●●●H30         | SCA8●●●H30             |
|                                 | 10                |           | HLL36025        | 25                               | SCG3●●●H30                                                                         | SCW3●●●H30                                                             | SCW13●●●H30                                                     | SCA13●●●H30         | SCA3●●●H30             |
|                                 | 15                | 2         | HLL36035        | 35                               | SDG8●●●H301                                                                        | SDW8●●●H301                                                            | SDW18●●●H301                                                    | SDA18●●●H301        | SDA8●●●H301            |
|                                 | 20                |           | HLL36045        | 45                               | SDG3●●●H30                                                                         | SDW3●●●H30                                                             | SDW13●●●H30                                                     | SDA13●●●H30         | SDA3●●●H30             |
|                                 | 25                |           | HLL36060        | 60                               | SDG1●●●H30                                                                         | SDW1●●●H30                                                             | SDW11●●●H30                                                     | SDA11●●●H30         | SDA1●●●H30             |
|                                 | 30                | 3         | HLL36070        | 70                               | SEG4●●●H30                                                                         | SEW4●●●H30                                                             | SEW14●●●H30                                                     | SEA14●●●H30         | SEA4●●●H30             |
|                                 | 40                |           | HLL36090        | 90                               | SEG6●●●H30                                                                         | SEW6●●●H30                                                             | SEW16●●●H30                                                     | SEA16●●●H30         | SEA6●●●H30             |
|                                 | 50                |           | HLL36100        | 100                              | SEG3●●●H30                                                                         | SEW3●●●H30                                                             | SEW13●●●H30                                                     | SEA13●●●H30         | SEA3●●●H30             |
| 575 (600)                       | 60–75             | 4         | JLL36150        | 150                              | SFG5●●●H30                                                                         | SFW5●●●H30                                                             | SFW15●●●H30                                                     | SFA15●●●H30         | SFA5●●●H30             |
|                                 | 100               |           | JLL36250        | 250                              | SFG4●●●H30                                                                         | SFW4●●●H30                                                             | SFW14●●●H30                                                     | SFA14●●●H30         | SFA4●●●H30             |
|                                 | 125–150           | 5         | JLL36250        | 250                              | SGG6●●●H30                                                                         | SGW6●●●H30                                                             | —                                                               | SGA16●●●H30         | SGA6●●●H30             |
|                                 | 200               |           | LLL36400U33X    | 400                              | SGG4●●●H30                                                                         | SGW4●●●H30                                                             | —                                                               | SGA14●●●H30         | SGA4●●●H30             |
|                                 | 250–350           | 6         | LLL36600U33X    | 600                              | SHG4●●●H30                                                                         | SHW4●●●H30                                                             | —                                                               | SHA14●●●H30         | SHA4●●●H30             |
|                                 | 400               |           | MJL36800        | 800                              | SHG5●●●H30                                                                         | SHW5●●●H30                                                             | —                                                               | SHA15●●●H30         | SHA5●●●H30             |

**Table 16.194: Coil Voltage Codes**

| Voltage  |         | Code |
|----------|---------|------|
| 60 Hz    | 50 Hz   |      |
| 24 [31]  | —       | V01  |
| 120 [32] | 110     | V02  |
| 208      | —       | V08  |
| 240      | 220     | V03  |
| 480      | 440     | V06  |
| 600      | 550     | V07  |
| Specify  | Specify | V99  |

**NOTE:** For voltage codes used with control transformers, see [page 16-118](#).

Form S (separate control) is used when a separate source of power is available for the control (coil) voltage. Form S is available at no charge.

For How to Order Information, see [page 16-28](#).

**Table 16.195: Class 8738 UL Listed Short Circuit Ratings**

| NEMA Size | Fuse Clip Type | Enclosure [33] | Ampere Interrupting Capability Rating (AIC) |
|-----------|----------------|----------------|---------------------------------------------|
| 0–3       | Standard       | Standard       | 5,000                                       |
| 0–3       | Class R        | Standard       | 100,000                                     |
| 4–5       | Standard       | Standard       | 10,000                                      |
| 4–5       | Class R        | Standard       | 100,000                                     |

**Table 16.196: Class 8739 UL Listed Short Circuit Ratings**

| Motor Circuit Protector Type          |           |                |                                             |
|---------------------------------------|-----------|----------------|---------------------------------------------|
| NEMA Size                             | Voltage   | Enclosure [33] | Ampere Interrupting Capability Rating (AIC) |
| 0–1                                   | 480       | Standard       | 100,000                                     |
| 0–1                                   | 481 – 600 | Standard       | 35,000                                      |
| 2–5                                   | 480       | Standard       | 100,000                                     |
| 2–5                                   | 481 – 600 | Standard       | 50,000                                      |
| 6                                     | 480       | Standard       | 65,000                                      |
| 6                                     | 600       | Standard       | 18,000                                      |
| Thermal Magnetic Circuit Breaker Type |           |                |                                             |
| 0–1                                   | 480       | Standard       | 100,000                                     |
| 0–1                                   | 481–600   | Standard       | 35,000                                      |
| 2–5                                   | 480       | Standard       | 100,000                                     |
| 2–5                                   | 481–600   | Standard       | 50,000                                      |
| 6                                     | 480       | Standard       | 65,000                                      |
| 6                                     | 600       | Standard       | 18,000                                      |

[26] To order melting alloy overload relay, remove form "H30" from part number.

[27] Size 6 starters are NEMA 4 painted sheet steel enclosures.

[28] NEMA 12 enclosures can be field modified for outdoor non-corrosive and non-service entrance rated applications. See [page 16-112](#) for more information.

[29] Replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard coil voltage codes shown in [Table 16.194](#).

[30] **Form H30**, with the possibility of a fourth character to select a lower FLA range (for example, **H308**). See "Solid-State Overload Relay Forms" on [page 16-119](#)

[31] 24 V coils are not available on Sizes 4–7. On Sizes 00–3, where 24 V coils are available, **Form S** (separate control) must be specified (for example, order as 8739SBG2V01S).

[32] These voltage codes must include **Form S** (provided at no charge) (for example, order as 8739SDG3V02S).

[33] Standard enclosures include NEMA 1; 4 and 4X stainless; and 12/3R.

## NEMA 1, 12, and 3R Dimensions

**NOTE:** These dimensions are for reference only. If you need precise measurements, contact the Customer Care Center at 1-888-778-2733.

Table 16.197: See Figure: NEMA 1 Enclosure (Sizes 0–2), page 16-72

| NEMA Size | Class      | Type       | Dimensions (in.) [34] |       |      |       |       |       |      |      |      |      |      |      |      |      |      |   | Top & Bottom |             | Sides | Wt. (lb) |
|-----------|------------|------------|-----------------------|-------|------|-------|-------|-------|------|------|------|------|------|------|------|------|------|---|--------------|-------------|-------|----------|
|           |            |            | A                     | B     | C    | D     | E     | F     | G    | H    | I    | J    | K    | L    | M    | N    | O    | P | W            | X           | Y     |          |
| 0–1       | 8738, 8739 | SBG<br>SCG | 13.75                 | 23    | 8.34 | 10.63 | 21    | 18.91 | 1.88 | 1.88 | 3.75 | 2.31 | 1.06 | 3.25 | 2.19 | 1.25 | 0.88 | — | 0.25–0.75–1  | 0.25–0.75–1 | 0.25  | 49       |
| 2         | 8738, 8739 | SDG        | 15                    | 28.75 | 9.59 | 11.63 | 26.25 | 21.47 | 2.19 | 2    | 4    | 2.56 | 1.25 | 3.25 | 2.19 | 1.25 | 0.91 | — | 1–1.25       | 1–1.25      | 0.25  | 80       |

Table 16.198: See Figure: NEMA 1 Enclosure (Sizes 3–6), page 16-72

| NEMA Size | Class      | Type | Dimensions (in.) [34] |      |       |      |   |       |      |      |   |      |      |      |      |      |      |      | Top & Bottom     |           | Sides | Wt. (lb) |
|-----------|------------|------|-----------------------|------|-------|------|---|-------|------|------|---|------|------|------|------|------|------|------|------------------|-----------|-------|----------|
|           |            |      | A                     | B    | C     | D    | E | F     | G    | H    | I | J    | K    | L    | M    | N    | O    | P    | W                | X         | Y     |          |
| 3         | 8738, 8739 | SEG  | 18.5                  | 44   | 10.59 | 12.5 | 3 | 25.97 | 43.5 | 0.25 | — | 2.81 | 3.5  | 5    | 2.69 | 5.38 | 1.22 | 0.91 | 1–1.25<br>2–2.25 | 0.25–0.75 | 0.25  | 245      |
| 4         | 8738       | SFG  | 21                    | 51.5 | 10.53 | 15   | 3 | 30.72 | 51   | 0.25 | — | 2.81 | 3.5  | 5    | 2.69 | 5.38 | 1.22 | 0.91 | 2.5              | 0.25–0.75 | 0.25  | —        |
|           | 8739       | SFG  | 18.5                  | 44   | 10.59 | 12.5 | 3 | 25.97 | 43.5 | 0.25 | — | 2.81 | 3.5  | 5    | 2.69 | 5.38 | 1.22 | 0.91 | 1–1.25<br>2–2.25 | 0.25–0.75 | 0.25  | —        |
| 5         | 8738       | SGG  | 30                    | 77   | 15.5  | 22   | 4 | 39.41 | 76   | 0.25 | — | 3.5  | 6.28 | 9.25 | 3.19 | —    | —    | —    | 0.25–0.75        | 3         | —     | —        |
|           | 8739       | SGG  | 30                    | 65   | 13.72 | 22   | 4 | 39.41 | 64   | 0.25 | — | 3.5  | 6.28 | 5    | 3.19 | —    | —    | —    | 0.25–0.75        | 3         | —     | —        |
| 6         | 8738, 8739 | SHG  | 36                    | 90   | 17.03 | —    | — | —     | —    | —    | — | —    | —    | —    | —    | —    | —    | —    | —                | —         | —     | —        |

Table 16.199: See Figure: NEMA 12/3R Enclosure, page 16-72

| NEMA Size | Class      | Type       | Dimensions (in.) [34] |       |       |      |     |      |       |      |      |       | Wt. (lb) |
|-----------|------------|------------|-----------------------|-------|-------|------|-----|------|-------|------|------|-------|----------|
|           |            |            | A                     | B     | C     | D    | E   | F    | G     | H    | I    | J     |          |
| 0–1       | 8738, 8739 | SBA<br>SCA | 13.75                 | 10.09 | 24.75 | 3.25 | 2.5 | 8.75 | 24    | 0.38 | 3.75 | 20.31 | 52       |
| 2         | 8738, 8739 | SDA        | 15                    | 10.97 | 31    | 3.25 | 3   | 9    | 30.25 | 0.38 | 3.75 | 23.44 | 95       |
| 3         | 8738, 8739 | SEA        | 18.5                  | 10.59 | 45    | 5    | 3   | 12.5 | 44    | 0.25 | 3.75 | 25.59 | 255      |
| 4         | 8738       | SFA        | 21                    | 10.59 | 52.5  | 5    | 3   | 15   | 51.5  | 0.25 | 3.75 | 30.34 | —        |
|           | 8739       | SFA        | 18.5                  | 10.59 | 45    | 3.25 | 3   | 12.5 | 44    | 0.25 | 3.75 | 25.59 | —        |
| 5         | 8738       | SGA        | 30                    | 15.5  | 78    | 9.25 | 4   | 22   | 77    | 0.25 | 7.5  | 39.41 | —        |
|           | 8739       | SGA        | 30                    | 15.5  | 66    | —    | 4   | 22   | 65    | 0.25 | 7.5  | 37.88 | —        |
| 6 [35]    | 8739       | SHA        | 36                    | 17.03 | 90    | —    | —   | —    | —     | —    | —    | —     | —        |

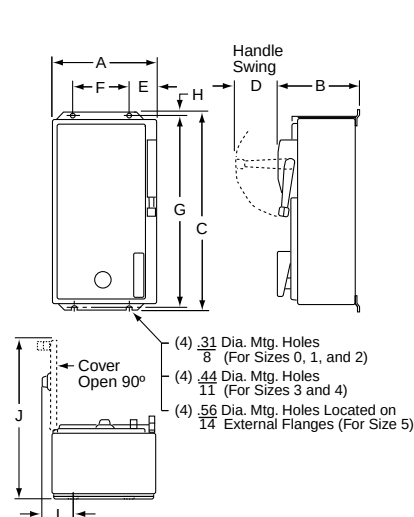
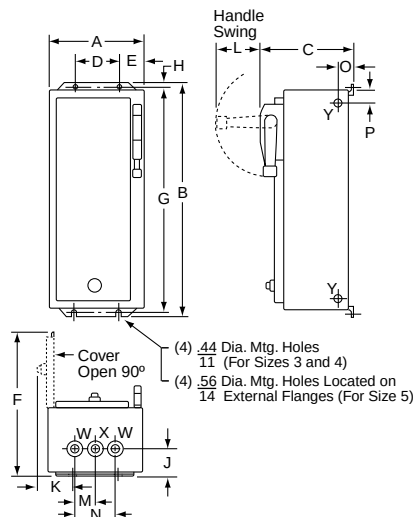
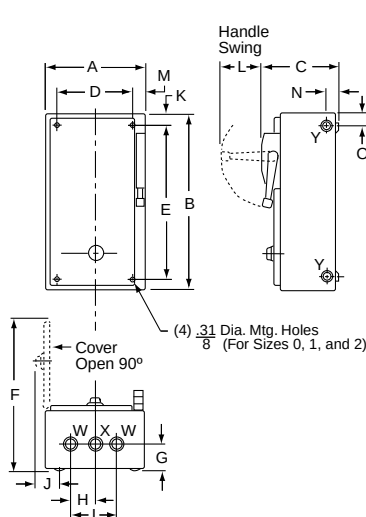


Figure 16.14: NEMA 1 Enclosure (Sizes 0–2)

Figure 16.15: NEMA 1 Enclosure (Sizes 3–6)

Figure 16.16: NEMA 12/3R Enclosure

**NOTE:** Illustrations may not represent the actual enclosure; they are intended for dimensional information only.

[34] The dimensions shown in all tables above are also for Form FF4T (standard control transformer),

Form FF4T11 (100 VA extra-capacity), and Form FF4T12 (200 VA extra-capacity).

[35] Size 6 enclosures are floor mounting.




### NEMA 4, 4X Dimensions

**NOTE:** These dimensions are for reference only. If you need precise measurements, contact the Customer Care Center at 1-888-778-2733.

**Table 16.200: See Figure: NEMA 4X Polyester Enclosure, page 16-73 [36]**

| NEMA Size | Class       | Type | Dimensions (in inches) [37] |      |       |       |       |
|-----------|-------------|------|-----------------------------|------|-------|-------|-------|
|           |             |      | A                           | B    | C     | E     | F     |
| 0-2       | 8738 & 8739 | SBW  | 25.25                       | 11.4 | 27.00 | 17.88 | 25.75 |
|           |             | SCW  |                             |      |       |       |       |
| 3-4       | 8739        | SEW  | 26.31                       | 11.4 | 33.50 | 18.50 | 32.25 |
|           |             | SFW  |                             |      |       |       |       |

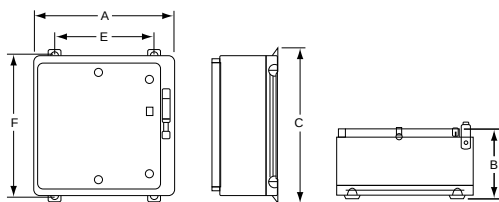

**Figure 16.17: NEMA 4X Polyester Enclosure**

**Table 16.201: See Figure: NEMA 4 & 4X Stainless Steel Enclosure, page 16-73**

| NEMA Size | Class      | Type | Dimensions (in inches) [38] |       |       |      |     |      |       |      |      |      |      |       | Bottom   | Top & Bot. | Wt. (lb) |
|-----------|------------|------|-----------------------------|-------|-------|------|-----|------|-------|------|------|------|------|-------|----------|------------|----------|
|           |            |      | A                           | B     | C     | D    | E   | F    | G     | H    | I    | J    | K    | L     | W        | X          |          |
| 0-1       | 8738, 8739 | SBW  | 13.75                       | 8.34  | 25.19 | 3.25 | 2.5 | 8.75 | 24    | 0.59 | 3    | 1.63 | 2.31 | 18.53 | 0.75 Hub | 1 Hub      | 52       |
| 2         | 8738, 8739 | SCW  | 15                          | 9.59  | 30.03 | 3.25 | 2.5 | 10   | 29.75 | 0.63 | 3    | 2    | 2.63 | 21.03 | 0.75 Hub | 1.5 Hub    | 95       |
|           |            | SDW  |                             |       |       |      |     |      |       |      |      |      |      |       |          |            |          |
| 3         | 8738, 8739 | SEW  | 18.5                        | 10.56 | 45.19 | 5    | 3   | 12.5 | 44    | 0.59 | 3.5  | 2.63 | 3.19 | 25.5  | 0.75 Hub | 2.5 Hub    | 255      |
| 4         | 8738       | SFW  | 21                          | 10.53 | 52.69 | 5    | 3   | 15   | 51.5  | 0.59 | 3.5  | 2.63 | 3.19 | 30.25 | 0.75 Hub | 2.5 Hub    | —        |
|           | 8739       | SFW  | 18.5                        | 10.56 | 45.19 | 5    | 3   | 12.5 | 44    | 0.59 | 3.5  | 2.63 | 3.19 | 25.5  | 0.75 Hub | 2.5 Hub    | —        |
| 5         | 8738       | SGW  | 30                          | 15.5  | 78.09 | 9.25 | 4   | 22   | 77    | 0.56 | 6.09 | 3    | 3.5  | 39.41 | 0.75 Hub | 3.5 Hub    | —        |
|           | 8739       | SGW  | 30                          | 13.89 | 66.09 | 5    | 4   | 22   | 65    | 0.56 | 6.09 | 3    | 3.5  | 37.88 | 0.75 Hub | 3.5 Hub    | —        |
| 6         | 8739       | SHW  | 36                          | 17.03 | 98    | —    | —   | —    | —     | —    | —    | —    | —    | —     | —        | —          | —        |

**NOTE:** Illustrations may not represent the actual enclosure; they are intended for dimensional information only.


#### Information on Hubs

Hubs are supplied with each NEMA 4X combination starter as shown in Table 16.202.

Note that hubs are only installed in stainless steel enclosures; they are supplied but not installed in polyester enclosures.

**Table 16.202: Hubs**

| NEMA Size | Quantity | Hub Size (in.) |
|-----------|----------|----------------|
| 0-1       | 1        | 0.75           |
|           | 2        | 1.00           |
| 2         | 1        | 0.75           |
|           | 2        | 1.50           |
| 3-4       | 1        | 0.75           |
|           | 2        | 2.50           |

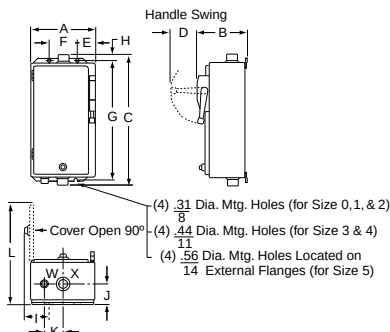

**Figure 16.18: NEMA 4 & 4X Stainless Steel Enclosure**

[36] See Table 16.202 for important information on hubs for NEMA 4X enclosures.

[37] The dimensions shown in all tables above are also for Form FF4T (standard control transformer),

Form FF4T11 (100 VA extra-capacity), and Form FF4T12 (200 VA extra-capacity).

[38] Dimensions also for Form F4T (standard control transformer), Form F4T11 (100 VA extra capacity) and Form F4T12 (200 VA extra capacity).





Type L



Type LX

## Features

- LED ready [1]
- 30 A fluorescent lighting rating, 20 A tungsten lighting rating
- Electrically and mechanically held
- 2 through 12-pole versions
- Field-convertible contacts with N.O. and N.C. indicators (8 N.C. contacts maximum [2])
- Silver-Cadmium-Oxide double break contacts

**NOTE:** When ordering contactors with more than 8 poles, the catalog number configuration is the number of normally open contacts followed by a 0 and then the number of normally closed contacts (i.e. for 4 N.O. and 6 N.C. on a 10-pole contactor, order 8903LG406V02).



File  
E78427  
CCN  
NRNT



File  
LR60905  
Class  
3211 07

Table 16.203: Multipole Lighting Contactors (50–60 Hz) (replace ●●● with the voltage code)

| Contact<br>Ampere<br>Ratings                    | No.<br>of<br>Poles | NEMA 1<br>General<br>Purpose<br>Enclosure | NEMA 1<br>Flush Mounting<br>General Purpose<br>Enclosure with Plaster<br>Adjustment | NEMA 3R<br>Rainproof<br>Enclosure <sup>[3]</sup> | NEMA 4 & 4X<br>Watertight, Dusttight, and<br>Corrosion-Resistant Glass-<br>Polyester Enclosure | NEMA 4 & 4X<br>Watertight, Dusttight<br>Brushed Stainless<br>Steel Enclosure | NEMA 12/3R <sup>[4]</sup><br>Dusttight and<br>Driptight Industrial<br>Use Enclosure | Open Type <sup>[5]</sup> |
|-------------------------------------------------|--------------------|-------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------|------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------|
|                                                 |                    | Type <sup>[6]</sup>                       | Type <sup>[6]</sup>                                                                 | Type <sup>[6]</sup>                              | Type <sup>[6]</sup>                                                                            | Type <sup>[6]</sup>                                                          | Type <sup>[6]</sup>                                                                 | Type <sup>[6]</sup>      |
| Electrically Held <sup>[2]</sup>                |                    |                                           |                                                                                     |                                                  |                                                                                                |                                                                              |                                                                                     |                          |
| 30 <sup>[6]</sup>                               | 2                  | LG20●●●                                   | LF20●●●                                                                             | LH20 ●●●                                         | LWW20●●●                                                                                       | LW20●●●                                                                      | LA20●●●                                                                             | LO20 ●●●                 |
|                                                 | 3                  | LG30●●●                                   | LF30●●●                                                                             | LH30 ●●●                                         | LWW30●●●                                                                                       | LW30●●●                                                                      | LA30 ●●●                                                                            | LO30 ●●●                 |
|                                                 | 4                  | LG40 ●●●                                  | LF40 ●●●                                                                            | LH40 ●●●                                         | LWW40●●●                                                                                       | LW40 ●●●                                                                     | LA40 ●●●                                                                            | LO40 ●●●                 |
|                                                 | 6                  | LG60●●●                                   | LF60●●●                                                                             | LH60 ●●●                                         | LWW60 ●●●                                                                                      | LW60 ●●●                                                                     | LA60 ●●●                                                                            | LO60 ●●●                 |
|                                                 | 8                  | LG80 ●●●                                  | LF80 ●●●                                                                            | LH80 ●●●                                         | LWW80 ●●●                                                                                      | LW80 ●●●                                                                     | LA80 ●●●                                                                            | LO80 ●●●                 |
|                                                 | 10                 | LG1000 ●●●                                | LF1000 ●●●                                                                          | LH1000 ●●●                                       | LWW1000 ●●●                                                                                    | LW1000●●●                                                                    | LA1000 ●●●                                                                          | LO1000 ●●●               |
| 12                                              | LG1200 ●●●         | LF1200 ●●●                                | LH1200 ●●●                                                                          | LWW1200 ●●●                                      | LW1200 ●●●                                                                                     | LA1200●●●                                                                    | LO1200 ●●●                                                                          |                          |
| Mechanically Held <sup>[2]</sup> <sup>[7]</sup> |                    |                                           |                                                                                     |                                                  |                                                                                                |                                                                              |                                                                                     |                          |
| 30 <sup>[6]</sup>                               | 2                  | LXG20 ●●●                                 | LXF20 ●●●                                                                           | —                                                | LXWW20 ●●●                                                                                     | LXW20 ●●●                                                                    | LXA20 ●●●                                                                           | LXO20 ●●●                |
|                                                 | 3                  | LXG30 ●●●                                 | LXF30 ●●●                                                                           | —                                                | LXWW30 ●●●                                                                                     | LXW30 ●●●                                                                    | LXA30 ●●●                                                                           | LXO30 ●●●                |
|                                                 | 4                  | LXG40 ●●●                                 | LXF40 ●●●                                                                           | —                                                | LXWW40 ●●●                                                                                     | LXW40 ●●●                                                                    | LXA40 ●●●                                                                           | LXO40 ●●●                |
|                                                 | 6                  | LXG60 ●●●                                 | LXF60 ●●●                                                                           | —                                                | LXWW60 ●●●                                                                                     | LXW60 ●●●                                                                    | LXA60 ●●●                                                                           | LXO60 ●●●                |
|                                                 | 8                  | LXG80 ●●●                                 | LXF80 ●●●                                                                           | —                                                | LXWW80 ●●●                                                                                     | LXW80 ●●●                                                                    | LXA80 ●●●                                                                           | LXO80 ●●●                |
|                                                 | 10                 | LXG1000●●●                                | LXF1000 ●●●                                                                         | —                                                | LXWW1000 ●●●                                                                                   | LXW1000 ●●●                                                                  | LXA1000 ●●●                                                                         | LXO1000 ●●●              |
| 12                                              | LXG1200 ●●●        | LXF1200 ●●●                               | —                                                                                   | LXWW1200 ●●●                                     | LXW1200 ●●●                                                                                    | LXA1200 ●●●                                                                  | LXO1200 ●●●                                                                         |                          |

**NOTE:** If a holding circuit contact is required for proper operation, order an additional contact.

## Power Pole Kits

The kits in Table 16.204 are used to add 30 A power poles to existing Type L contactors when additional circuits are required. Type L lighting contactors come with mounting brackets, so that adder poles may be mounted from the front by a single captive screw. Adder poles come standard with N.O. contacts which are convertible to N.C.

For How to Order Information, see page 16-28.

**NOTE:** 12 N.C. poles are only available with a 120 V coil (V02).

Table 16.204: Power Poles for Type L or LX

| Power Pole Adder Kit[8] |     | Can Only Be Added to Contactor Type[9]               |
|-------------------------|-----|------------------------------------------------------|
| Class 8903 Type         |     |                                                      |
| Single Pole             | L1L | LO60<br>LXO60,<br>LO80, LXO80,<br>LO1000,<br>LXO1000 |
|                         | L1R |                                                      |
| Double Pole             | L3L |                                                      |
|                         | L3R |                                                      |

Table 16.206: How to Order

| To Order Specify: |                | Catalog Number |       |              |         |
|-------------------|----------------|----------------|-------|--------------|---------|
| • Class Number    | • Voltage Code | Class          | Type  | Voltage Code | Form(s) |
|                   |                | 8903           | LXG60 | VO4          | CF4R6   |

Factory Modifications (Forms): page 16-79

Replacement Coils: page 16-122

Replacement Contacts: page 16-124

Table 16.205: Coil Voltage Codes

| Voltage |         | Code |
|---------|---------|------|
| 60 Hz   | 50 Hz   |      |
| 24      | —       | V01  |
| 120     | 110     | V02  |
| 208     | —       | V08  |
| 240     | 220     | V03  |
| 277     | —       | V04  |
| 480     | 440     | V06  |
| Specify | Specify | V99  |

[1] Conforms to NEMA -410 -2015 and UL508: Table 46.1 and Section 61C test procedures for LED loads up to 16 A at 120 V. Devices were tested to 20 A at 120 V and conform to the test requirements.

[2] Factory conversion of N.O. contacts to N.C., order by catalog number (for example, for 6 N.O. and 2 N.C. poles on an 8 pole contactor, order as 8903LG62V02). Versions are available from the factory with up to 12 N.C. poles for Type L (electrically held) or 2, 4, or 6 N.C. poles for Type LX (mechanically held). For field conversion, there is a maximum of eight N.C. poles for Type L (electrically held) and a maximum of six N.C. poles for Type LX (mechanically held) contactors.

[3] Cannot support control transformer Forms.

[4] NEMA 12 enclosures can be field modified for outdoor non-corrosive and non-service entrance rated applications. See page 16-112 for more information.

[5] Separate enclosures are available for these devices. It may be possible to improve delivery by ordering an open type contactor and separate Class 9991 enclosure.

[6] Replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard voltage codes listed in Table 16.205. All lighting contactors come with separate control as standard.

[7] When ordering Form C on mechanically held devices, you must also include Form R6.

[8] 8903LO (electrically held) devices can accommodate 10 or 12 N.C. contacts use only 120 V 60Hz coils.

[9] LO60 and LXO60: add single-pole kits only, 1 on each side, for converting to 8-pole. To maintain proper operation, the contactor cannot be converted to more than 8 poles.

LO80 and LXO80: use single-pole kits, 1 on each side, for converting to 10-pole and use two-pole kits, 1 on each side, for converting to 12-pole.

LO1000 and LXO1000: remove the existing single-pole kit and install two-pole kits, 1 on each side, for converting to 12-pole.



Electrically Held



Mechanically Held

## Features

- Electrically and mechanically held
- 30–800 A lighting ratings
- LED ready [10]
- 2- through 5-pole versions (5-poles through 200 A)
- UL Listed short-circuit rating up to 100,000 Amperes
- Factory wired controls and clearly marked termination points
- Quick ship on most items in 5–7 days

Table 16.207: Coil Voltage Codes

| Voltage [11] |         | Code     |
|--------------|---------|----------|
| 60 Hz        | 50 Hz   |          |
| 24 [12]      | —       | V01      |
| 120          | 110     | V02      |
| 208          | —       | V08      |
| 240          | 220     | V03      |
| 277          | —       | V04 [13] |
| 480          | 440     | V06      |
| Specify      | Specify | V99      |

Table 16.208: Multipole Lighting Contactors—Type S, 50–60 Hz (replace ●●● with the voltage code)

| Contact<br>Ampere<br>Ratings | No. of<br>Poles | NEMA 1<br>General Purpose<br>Enclosure | NEMA 1<br>Flush Mounting<br>General Purpose<br>Enclosure with<br>Plaster<br>Adjustment | NEMA<br>Type 3R<br>Rainproof<br>Enclosure [14] | NEMA 4 & 4X<br>Watertight,<br>Dusttight and<br>Corrosion-Resistant<br>Glass-Polyester<br>Enclosure | NEMA<br>Type 4 & 4X [15]<br>Watertight and<br>Dusttight<br>Enclosure | NEMA<br>Type 12/3R [16]<br>Dusttight and<br>Driptight<br>Industrial Use<br>Enclosure | Open Type     |
|------------------------------|-----------------|----------------------------------------|----------------------------------------------------------------------------------------|------------------------------------------------|----------------------------------------------------------------------------------------------------|----------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------|
|                              |                 | Type [17]                              | Type [17]                                                                              | Type [17]                                      | Type [17]                                                                                          | Type [17]                                                            | Type [17]                                                                            | Type [17]     |
| Electrically Held [11]       |                 |                                        |                                                                                        |                                                |                                                                                                    |                                                                      |                                                                                      |               |
| 30                           | 2               | SMG1●●●                                | SMF1●●●                                                                                | SMH1●●●                                        | SMW21●●●                                                                                           | SMW1●●●                                                              | SMA1●●●                                                                              | SMO1●●● [18]  |
|                              | 3               | SMG2●●●                                | SMF2●●●                                                                                | SMH2●●●                                        | SMW22●●●                                                                                           | SMW2●●●                                                              | SMA2●●●                                                                              | SMO2●●● [18]  |
|                              | 4               | SMG3●●●                                | SMF3●●●                                                                                | SMH3●●●                                        | SMW23●●●                                                                                           | SMW3●●●                                                              | SMA3●●●                                                                              | SMO3●●● [18]  |
|                              | 5               | SMG4●●●                                | SMF4●●●                                                                                | SMH4●●●                                        | SMW24●●●                                                                                           | SMW4●●●                                                              | SMA4●●●                                                                              | SMO4●●● [18]  |
| 60                           | 2               | SPG1●●●                                | SPF1●●●                                                                                | SPH1●●●                                        | SPW21●●●                                                                                           | SPW1●●●                                                              | SPA1●●●                                                                              | SPO1●●● [18]  |
|                              | 3               | SPG2●●●                                | SPF2●●●                                                                                | SPH2●●●                                        | SPW22●●●                                                                                           | SPW2●●●                                                              | SPA2●●●                                                                              | SPO2●●● [18]  |
|                              | 4               | SPG3●●●                                | SPF3●●●                                                                                | SPH3●●●                                        | SPW23●●●                                                                                           | SPW3●●●                                                              | SPA3●●●                                                                              | SPO3●●● [18]  |
|                              | 5               | SPG4●●●                                | SPF4●●●                                                                                | SPH4●●●                                        | SPW24●●●                                                                                           | SPW4●●●                                                              | SPA4●●●                                                                              | SPO4●●● [18]  |
| 100                          | 2               | SQG1●●●                                | SQF1●●●                                                                                | SQH1●●●                                        | SQW21●●●                                                                                           | SQW1●●●                                                              | SQA1●●●                                                                              | SQO1●●● [18]  |
|                              | 3               | SQG2●●●                                | SQF2●●●                                                                                | SQH2●●●                                        | SQW22●●●                                                                                           | SQW2●●●                                                              | SQA2●●●                                                                              | SQO2●●● [18]  |
|                              | 4               | SQG3●●●                                | —                                                                                      | SQH3●●●                                        | —                                                                                                  | SQW3●●●                                                              | SQA3●●●                                                                              | SQO3●●● [18]  |
|                              | 5               | SQG4●●●                                | —                                                                                      | SQH4●●●                                        | —                                                                                                  | SQW4●●●                                                              | SQA4●●●                                                                              | SQO4●●● [18]  |
| 200                          | 2               | SVG1●●●                                | —                                                                                      | SVH1●●●                                        | —                                                                                                  | SVW1●●●                                                              | SVA1●●●                                                                              | SVO1●●●       |
|                              | 3               | SVG2●●●                                | —                                                                                      | SVH2●●●                                        | —                                                                                                  | SVW2●●●                                                              | SVA2●●●                                                                              | SVO2●●●       |
|                              | 4               | SVG3●●●                                | —                                                                                      | —                                              | —                                                                                                  | SVW3●●●                                                              | SVA3●●●                                                                              | SVO3●●●       |
|                              | 5               | SVG4●●●                                | —                                                                                      | —                                              | —                                                                                                  | SVW4●●●                                                              | SVA4●●●                                                                              | SVO4●●●       |
| 300                          | 2               | SXG1●●●                                | —                                                                                      | —                                              | —                                                                                                  | SXW1●●●                                                              | SXA1●●●                                                                              | SXO1●●●       |
|                              | 3               | SXG2●●●                                | —                                                                                      | —                                              | —                                                                                                  | SXW2●●●                                                              | SXA2●●●                                                                              | SXO2●●●       |
| 400[19]                      | 2               | SYG1●●●                                | —                                                                                      | —                                              | —                                                                                                  | SYW1●●●                                                              | SYA1●●●                                                                              | SYO1●●●       |
|                              | 3               | SYG2●●●                                | —                                                                                      | —                                              | —                                                                                                  | SYW2●●●                                                              | SYA2●●●                                                                              | SYO2●●●       |
| 600[19]                      | 2               | SZG1●●●                                | —                                                                                      | —                                              | —                                                                                                  | SZW1●●●                                                              | SZA1●●●                                                                              | SZO1●●●       |
|                              | 3               | SZG2●●●                                | —                                                                                      | —                                              | —                                                                                                  | SZW2●●●                                                              | SZA2●●●                                                                              | SZO2●●●       |
| 800[19]                      | 2               | SJG1●●●                                | —                                                                                      | —                                              | —                                                                                                  | SJW1●●●                                                              | SJA1●●●                                                                              | SJO1●●●       |
|                              | 3               | SJG2●●●                                | —                                                                                      | —                                              | —                                                                                                  | SJW2●●●                                                              | SJA2●●●                                                                              | SJO2●●●       |
| Mechanically Held[11]        |                 |                                        |                                                                                        |                                                |                                                                                                    |                                                                      |                                                                                      |               |
| 30                           | 2               | SMG10●●●                               | SMF10●●●                                                                               | —                                              | SMW31●●●                                                                                           | SMW10●●●                                                             | SMA10●●●                                                                             | SMO10●●● [18] |
|                              | 3               | SMG11●●●                               | SMF11●●●                                                                               | —                                              | SMW32●●●                                                                                           | SMW11●●●                                                             | SMA11●●●                                                                             | SMO11●●● [18] |
|                              | 4               | SMG12●●●                               | SMF12●●●                                                                               | —                                              | SMW33●●●                                                                                           | SMW12●●●                                                             | SMA12●●●                                                                             | SMO12●●● [18] |
|                              | 5               | SMG13●●●                               | SMF13●●●                                                                               | —                                              | SMW34●●●                                                                                           | SMW13●●●                                                             | SMA13●●●                                                                             | SMO13●●● [18] |
| 60                           | 2               | SPG10●●●                               | SPF10●●●                                                                               | —                                              | SPW31●●●                                                                                           | SPW10●●●                                                             | SPA10●●●                                                                             | SPO10●●● [18] |
|                              | 3               | SPG11●●●                               | SPF11●●●                                                                               | —                                              | SPW32●●●                                                                                           | SPW11●●●                                                             | SPA11●●●                                                                             | SPO11●●● [18] |
|                              | 4               | SPG12●●●                               | SPF12●●●                                                                               | —                                              | SPW33●●●                                                                                           | SPW12●●●                                                             | SPA12●●●                                                                             | SPO12●●● [18] |
|                              | 5               | SPG13●●●                               | SPF13●●●                                                                               | —                                              | SPW34●●●                                                                                           | SPW13●●●                                                             | SPA13●●●                                                                             | SPO13●●● [18] |
| 100                          | 2               | SQG10●●●                               | SQF10●●●                                                                               | —                                              | SQW31●●●                                                                                           | SQW10●●●                                                             | SQA10●●●                                                                             | SQO10●●● [18] |
|                              | 3               | SQG11●●●                               | SQF11●●●                                                                               | —                                              | SQW32●●●                                                                                           | SQW11●●●                                                             | SQA11●●●                                                                             | SQO11●●● [18] |
|                              | 4               | SQG12●●●                               | —                                                                                      | —                                              | —                                                                                                  | SQW12●●●                                                             | SQA12●●●                                                                             | SQO12●●● [18] |
|                              | 5               | SQG13●●●                               | —                                                                                      | —                                              | —                                                                                                  | SQW13●●●                                                             | SQA13●●●                                                                             | SQO13●●● [18] |
| 200                          | 2               | SVG10●●●                               | —                                                                                      | —                                              | —                                                                                                  | SVW10●●●                                                             | SVA10●●●                                                                             | SVO10●●●      |
|                              | 3               | SVG11●●●                               | —                                                                                      | —                                              | —                                                                                                  | SVW11●●●                                                             | SVA11●●●                                                                             | SVO11●●●      |
|                              | 4               | SVG12●●●                               | —                                                                                      | —                                              | —                                                                                                  | SVW12●●●                                                             | SVA12●●●                                                                             | SVO12●●●      |
| 300                          | 2               | SXG13●●●                               | —                                                                                      | —                                              | —                                                                                                  | SXW13●●●                                                             | SXA13●●●                                                                             | SXO13●●●      |
|                              | 3               | SXG14●●●                               | —                                                                                      | —                                              | —                                                                                                  | SXW14●●●                                                             | SXA14●●●                                                                             | SXO14●●●      |
| 400                          | 2               | SYG16●●●                               | —                                                                                      | —                                              | —                                                                                                  | SYW16●●●                                                             | SYA16●●●                                                                             | SYO16●●●      |
|                              | 3               | SYG17●●●                               | —                                                                                      | —                                              | —                                                                                                  | SYW17●●●                                                             | SYA17●●●                                                                             | SYO17●●●      |
| 600                          | 2               | SZG18●●●                               | —                                                                                      | —                                              | —                                                                                                  | SZW18●●●                                                             | SZA18●●●                                                                             | SZO18●●●      |
|                              | 3               | SZG19●●●                               | —                                                                                      | —                                              | —                                                                                                  | SZW19●●●                                                             | SZA19●●●                                                                             | SZO19●●●      |

**NOTE:** If a holding circuit contact is required for proper operation, order an additional contact.

[10] Conforms to NEMA -410 -2015 and UL508: Table 46.1 and Section 61C test procedures for LED loads up to 16 A at 120 V. Devices were tested to 20 A at 120 V and conform to the test requirements.

[11] Lighting contactors come with separate control as standard—except electrically held 400, 600, and 800 A devices, which come with common control as standard.

[12] 24 V coils are not available for 200–800 A devices. Contact your local sales office for more information.

[13] On 400–800 A electrically held contactors, for voltage code V04, you must select Form S (separate control).

[14] Cannot support control transformer forms.

[15] For contactor sizes 30–300 A, NEMA 4 and 4X enclosures are brush finished stainless steel. Sizes 400–800 A are painted sheet steel.

[16] NEMA 12 enclosures can be field modified for outdoor non-corrosive and non-service entrance rated applications. See page 16-112 for more information.

[17] Replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard voltage codes in Table 16.207.

[18] Separate enclosures are available for these devices. It may be possible to improve delivery time by ordering an open type contactor and a separate Class 9991 enclosure from the section, Separate Enclosures, page 16-110.

[19] Form FF4T comes standard; include the line voltage when ordering. Control voltage is 120–60.

Power Pole Kits for Type S Only

A single-pole or double-pole kit can be added to any 2- or 3-pole 30 or 60 A Type S lighting contactor to make a 4- or 5-pole device. Factory assembled 4- and 5-pole contactors utilize the basic 3-pole device with a single or double-pole kit installed. Only one power pole can be added per contactor. Sufficient room is provided in all enclosure styles for the addition of a power pole kit.

Table 16.209: Power Pole Kits for Type S Only

| Ampere Rating | Description           | Class 9999 Type |
|---------------|-----------------------|-----------------|
| 30            | One N.O.              | SB6             |
|               | One N.C.              | SB7             |
|               | One N.O. and One N.C. | SB8             |
|               | Two N.O.              | SB9             |
|               | Two N.C.              | SB10            |
| 60            | One N.O.              | SB21 [20]       |
|               | One N.C.              | SB22 [20]       |
|               | One N.O. and One N.C. | SB23 [20]       |
|               | Two N.O.              | SB24 [20]       |
|               | Two N.C.              | SB25 [20]       |

Factory Modifications (Forms): [page 16-79](#)

Replacement Coils: [page 16-122](#)

Replacement Contacts: [page 16-124](#)

Dimensions: [page 16-83](#)

For How to Order Information, see [page 16-28](#).

[20] When power pole is added to 60 Ampere contactor, a 4-pole coil is also required. Order from [Table 16.331](#). 60 A power poles are suitable for use with copper or aluminum wire.



File E16151  
CCN NRNT

**NOTE:** If a holding circuit contact is required for proper operation, order an additional contact.

## Features

The features include: disconnect switch and circuit breaker versions; rugged flange-mounted handle; easy installation; occupation of less space; increased operator protection; room to spare for modifications; Class R fuse clips standard; electrically and mechanically held; 30–600 A.

It is desirable to install the branch-circuit protective device and lighting contactor, combining switching and over-current protection, in one enclosure. Combination lighting contactors are well suited for industrial, highway and area lighting applications, or where a lighting circuit may have to be disconnected for periodic maintenance. They may also be used for resistance heating loads.

**Table 16.210: Fusible or Non-Fusible Disconnect Switch—3-Pole, 50–60 Hz (replace ●●● with the voltage code)**

| Contactor<br>Ampere<br>Rating     | Fuse<br>Clip<br>Size<br>(A) | Fuse<br>Clip<br>Spacing<br>(V) | NEMA 1<br>General Purpose<br>Enclosure | NEMA 4 & 4X <sup>[21]</sup><br>Watertight and<br>Dusttight<br>Enclosure<br>Stainless Steel | NEMA 12/3R <sup>[22]</sup><br>Dusttight, Oiltight<br>Driptight, Industrial<br>Use Enclosure |
|-----------------------------------|-----------------------------|--------------------------------|----------------------------------------|--------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|
|                                   |                             |                                | Type <sup>[23]</sup>                   | Type <sup>[23]</sup>                                                                       | Type <sup>[23]</sup>                                                                        |
| Electrically Held <sup>[24]</sup> |                             |                                |                                        |                                                                                            |                                                                                             |
| 30                                | None                        | —                              | SMG60●●●                               | SMW60●●●                                                                                   | SMA60●●●                                                                                    |
|                                   | 30                          | 600                            | SMG61●●●                               | SMW61●●●                                                                                   | SMA61●●●                                                                                    |
|                                   | 30                          | 250                            | SMG62●●●                               | SMW62●●●                                                                                   | SMA62●●●                                                                                    |
| 60                                | None                        | —                              | SPG60●●●                               | SPW60●●●                                                                                   | SPA60●●●                                                                                    |
|                                   | 60                          | 600                            | SPG61●●●                               | SPW61●●●                                                                                   | SPA61●●●                                                                                    |
|                                   | 60                          | 250                            | SPG62●●●                               | SPW62●●●                                                                                   | SPA62●●●                                                                                    |
| 100                               | None                        | —                              | SQG60●●●                               | SQW60●●●                                                                                   | SQA60●●●                                                                                    |
|                                   | 100                         | 600                            | SQG61●●●                               | SQW61●●●                                                                                   | SQA61●●●                                                                                    |
|                                   | 100                         | 250                            | SQG62●●●                               | SQW62●●●                                                                                   | SQA62●●●                                                                                    |
| 200                               | None                        | —                              | SVG60●●●                               | SVW60●●●                                                                                   | SVA60●●●                                                                                    |
|                                   | 200                         | 600                            | SVG61●●●                               | SVW61●●●                                                                                   | SVA61●●●                                                                                    |
|                                   | 200                         | 250                            | SVG62●●●                               | SVW62●●●                                                                                   | SVA62●●●                                                                                    |
| 300                               | None                        | —                              | SXG60●●●                               | SXW60●●●                                                                                   | SXA60●●●                                                                                    |
|                                   | 400                         | 600                            | SXG61●●●                               | SXW61●●●                                                                                   | SXA61●●●                                                                                    |
|                                   | 400                         | 250                            | SXG62●●●                               | SXW62●●●                                                                                   | SXA62●●●                                                                                    |
| Mechanically Held <sup>[24]</sup> |                             |                                |                                        |                                                                                            |                                                                                             |
| 30                                | None                        | —                              | SMG70●●●                               | SMW70●●●                                                                                   | SMA70●●●                                                                                    |
|                                   | 30                          | 600                            | SMG71●●●                               | SMW71●●●                                                                                   | SMA71●●●                                                                                    |
|                                   | 30                          | 250                            | SMG72●●●                               | SMW72●●●                                                                                   | SMA72●●●                                                                                    |
| 60                                | None                        | —                              | SPG70●●●                               | SPW70●●●                                                                                   | SPA70●●●                                                                                    |
|                                   | 60                          | 600                            | SPG71●●●                               | SPW71●●●                                                                                   | SPA71●●●                                                                                    |
|                                   | 60                          | 250                            | SPG72●●●                               | SPW72●●●                                                                                   | SPA72●●●                                                                                    |
| 100                               | None                        | —                              | SQG70●●●                               | SQW70●●●                                                                                   | SQA70●●●                                                                                    |
|                                   | 100                         | 600                            | SQG71●●●                               | SQW71●●●                                                                                   | SQA71●●●                                                                                    |
|                                   | 100                         | 250                            | SQG72●●●                               | SQW72●●●                                                                                   | SQA72●●●                                                                                    |
| 200                               | None                        | —                              | SVG70●●●                               | SVW70●●●                                                                                   | SVA70●●●                                                                                    |
|                                   | 200                         | 600                            | SVG71●●●                               | SVW71●●●                                                                                   | SVA71●●●                                                                                    |
|                                   | 200                         | 250                            | SVG72●●●                               | SVW72●●●                                                                                   | SVA72●●●                                                                                    |
| 300                               | None                        | —                              | SXG70●●●                               | SXW70●●●                                                                                   | SXA70●●●                                                                                    |
|                                   | 400                         | 600                            | SXG71●●●                               | SXW71●●●                                                                                   | SXA71●●●                                                                                    |
|                                   | 400                         | 250                            | SXG72●●●                               | SXW72●●●                                                                                   | SXA72●●●                                                                                    |

**Table 16.211: Coil Voltage Codes [24]**

| Voltage |         | Code |
|---------|---------|------|
| 60 Hz   | 50 Hz   |      |
| 24 [25] | —       | V01  |
| 120     | 110     | V02  |
| 208     | —       | V08  |
| 240     | 220     | V03  |
| 277     | —       | V04  |
| 480     | 440     | V06  |
| Specify | Specify | V99  |

**Table 16.212: Circuit Breaker—3-Pole, 50–60 Hz (replace ●●● with the voltage code)**

| Contactor Ampere Rating       | Circuit Breaker |               | NEMA 1 General Purpose Enclosure | NEMA 4 & 4X [21] Watertight and Dusttight Enclosure Stainless Steel (30–300 A) | NEMA 12/3R [22] Dusttight, Oiltight, Driptight, Industrial Use Enclosure |
|-------------------------------|-----------------|---------------|----------------------------------|--------------------------------------------------------------------------------|--------------------------------------------------------------------------|
|                               | Ampere Rating   | Maximum Volts | Type [23]                        | Type [23]                                                                      | Type [23]                                                                |
| <b>Electrically Held [24]</b> |                 |               |                                  |                                                                                |                                                                          |
| 30                            | 30              | 600           | SMG81●●●                         | SMW81●●●                                                                       | SMA81●●●                                                                 |
| 60                            | 60              | 600           | SPG81●●●                         | SPW81●●●                                                                       | SPA81●●●                                                                 |
| 100                           | 100             | 600           | SQG81●●●                         | SQW81●●●                                                                       | SQA81●●●                                                                 |
| 200                           | 200             | 600           | SVG81●●●                         | SVW81●●●                                                                       | SVA81●●●                                                                 |
| 300                           | 300             | 600           | SXG81●●●                         | SXW81●●●                                                                       | SXA81●●●                                                                 |
| 400                           | 400             | 600           | SYG81●●●                         | SYW81●●●                                                                       | SYA81●●●                                                                 |
| 600                           | 600             | 600           | SZG81●●●                         | SZW81●●●                                                                       | SZA81●●●                                                                 |
| <b>Mechanically Held [24]</b> |                 |               |                                  |                                                                                |                                                                          |
| 30                            | 30              | 600           | SMG91●●●                         | SMW91●●●                                                                       | SMA91●●●                                                                 |
| 60                            | 60              | 600           | SPG91●●●                         | SPW91●●●                                                                       | SPA91●●●                                                                 |
| 100                           | 100             | 600           | SQG91●●●                         | SQW91●●●                                                                       | SQA91●●●                                                                 |
| 200                           | 200             | 600           | SVG91●●●                         | SVW91●●●                                                                       | SVA91●●●                                                                 |
| 300                           | 300             | 600           | SXG91●●●                         | SXW91●●●                                                                       | SXA91●●●                                                                 |
| 400                           | 400             | 600           | SYG91●●●                         | SYW91●●●                                                                       | SYA91●●●                                                                 |
| 600                           | 600             | 600           | SZG91●●●                         | SZW91●●●                                                                       | SZA91●●●                                                                 |

For How to Order Information, see page 16-28.

[21] For NEMA 4 and 4X watertight, dusttight, and corrosion-resistant glass-polyester enclosures, add Form G18 (limited to 100 A max.). 400 and 600 A enclosures are painted sheet steel (NEMA Type 4 & 4X).

[22] NEMA 12 enclosures can be field modified for outdoor non-corrosive and non-service entrance rated applications. See page 16-112 for more information.

[23] Replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard voltage codes shown in Table 16.207.

[24] The control/coil voltage must be specified.

[25] 24 V coils are not available for 200 A or larger devices. Contact the Customer Care Center for additional information.




Long Version



Short Version



Table 16.214: Coil Voltage Codes

| Voltage |         | Code |
|---------|---------|------|
| 60 Hz   | 50 Hz   |      |
| 24 [27] | —       | V01  |
| 120     | 110     | V02  |
| 208     | —       | V08  |
| 240     | 220     | V03  |
| 277     | —       | V04  |
| 480     | 440     | V06  |
| Specify | Specify | V99  |

## Night-Master Combination Lighting Contactors

The Class 8903 Night-Master Outdoor Combination Lighting Contactor is the only product on the market that is UL Listed for Service Entrance. This allows the contactor to be pole mounted when used to control lighting in remote locations such as parks, monuments, group sports facilities, and streets and highways.

Factory modifications such as photocells, time switches, key operated selector switches, and the combination of photocells and time switches (photocell on, time switch off) allow the Night-Master to be located in applications where manual operation of lights is not practical.

Night-Master comes in long and short versions in sizes 30 through 200 Amperes. Most common modifications can be provided from the factory, or added in the field to the pre-drilled and pre-tapped panels.

NIGHT-MASTER Outdoor Combination Lighting Contactors offer a disconnecting means, overcurrent protection, and a lighting contactor in one NEMA 3R Rainproof enclosure. These combination units satisfy the requirements of the National Electrical Code and UL 508 for service entrance equipment.

### Features

- Solid neutral standard
- Grounding lug standard
- Padlocking provisions
- Short and long versions available
- Electrically held Type S lighting contactor
- Eliminates the need for separate mounted safety switches
- Additional panel space eliminates the need for external mounting of time clocks
- Separate control comes standard on all lighting contactors

**NOTE:** If a holding circuit contact is required for proper operation, order an additional contact.

Table 16.213: Disconnect Switch Type—3-Pole (replace ●●● with the voltage code)

| Contactor<br>Ampere<br>Rating | Fuse Clip<br>Size<br>(A) | Fuse Clip<br>Spacing<br>(V) | Short Version              |                                                  | Long Version               |                                                  |
|-------------------------------|--------------------------|-----------------------------|----------------------------|--------------------------------------------------|----------------------------|--------------------------------------------------|
|                               |                          |                             | Class 8903<br>Type 3R [26] | Class 8903<br>Type 3R<br>Stainless Steel<br>[26] | Class 8903<br>Type 3R [26] | Class 8903<br>Type 3R<br>Stainless Steel<br>[26] |
| 30                            | 30                       | 600                         | SMC61●●●                   | SMH61●●●                                         | SMC63●●●                   | SMH63●●●                                         |
|                               | 30                       | 250                         | SMC62●●●                   | SMH62●●●                                         | SMC64●●●                   | SMH64●●●                                         |
| 60                            | 60                       | 600                         | SPC61●●●                   | SPH61●●●                                         | SPC63●●●                   | SPH63●●●                                         |
|                               | 60                       | 250                         | SPC62●●●                   | SPH62●●●                                         | SPC64●●●                   | SPH64●●●                                         |
| 100                           | 100                      | 600                         | SQC61●●●                   | SQH61●●●                                         | SQC63●●●                   | SQH63●●●                                         |
|                               | 100                      | 250                         | SQC62●●●                   | SQH62●●●                                         | SQC64●●●                   | SQH64●●●                                         |
| 200                           | 200                      | 600                         | SVC61●●●                   | SVH61●●●                                         | SVC63●●●                   | SVH63●●●                                         |
|                               | 200                      | 250                         | SVC62●●●                   | SVH62●●●                                         | SVC64●●●                   | SVH64●●●                                         |

Table 16.215: Circuit Breaker Type—3-Pole (replace ●●● with the voltage code)

| Contactor<br>Ampere<br>Rating | Circuit Breaker  |                  | Short Version              |                                                  | Long Version               |                                                  |
|-------------------------------|------------------|------------------|----------------------------|--------------------------------------------------|----------------------------|--------------------------------------------------|
|                               | Ampere<br>Rating | Maximum<br>Volts | Class 8903<br>Type 3R [26] | Class 8903<br>Type 3R<br>Stainless Steel<br>[26] | Class 8903<br>Type 3R [26] | Class 8903<br>Type 3R<br>Stainless Steel<br>[26] |
| 30                            | 30               | 600              | SMC81●●●                   | SMH81●●●                                         | SMC83●●●                   | SMH83●●●                                         |
| 60                            | 60               | 600              | SPC81●●●                   | SPH81●●●                                         | SPC83●●●                   | SPH83●●●                                         |
| 100                           | 100              | 600              | SQC81●●●                   | SQH81●●●                                         | SQC83●●●                   | SQH83●●●                                         |
| 200                           | 200              | 600              | SVC81●●●                   | SVH81●●●                                         | SVC83●●●                   | SVH83●●●                                         |

For How to Order Information, see page 16-28.

[26] Replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard voltage codes listed in Table 16.214.

[27] 24 V coils are not available for 200 A devices. Contact your local sales office for additional information.



## Factory Modifications (Forms)

**NOTE:** If a UL label is required, consult the Customer Care Center at 1-888-778-2733. Some Forms are not UL Listed.

Standard Equipment dimensions and enclosure construction may not apply when certain special features are added. Such cases should be referred to the factory with a complete description when precise dimensions are required.

**Table 16.216: Lighting Contactor Forms (Factory Modifications)**

| Description                                                                                                                                                                                                                    | Form Letter     | NEMA Enclosure Type  | Used On    |            |            |            |                       | Rating (A) |      |        |        |     |     |               |   |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|----------------------|------------|------------|------------|------------|-----------------------|------------|------|--------|--------|-----|-----|---------------|---|
|                                                                                                                                                                                                                                |                 |                      | Std.       |            | Combo      |            | Night-Master 30–200 A | 30 Type L  | 30   | 60     | 100    | 200 | 300 | 400, 600, 800 |   |
|                                                                                                                                                                                                                                |                 |                      | Elec. Held | Mech. Held | Elec. Held | Mech. Held |                       |            |      |        |        |     |     |               |   |
| On-Off push button(momentary contact)                                                                                                                                                                                          | A3              | 1                    | —          | Y          | —          | Y          | —                     | —          | Y    | Y      | Y      | Y   | Y   | Y             | Y |
| On-Off push button (with holding circuit interlock)                                                                                                                                                                            | A3              | 3R, 4, 12            | —          | Y          | —          | Y          | —                     | —          | Y    | Y      | Y      | Y   | Y   | Y             | Y |
| On-Off push button (with holding circuit interlock)                                                                                                                                                                            | A12             | Any                  | Y          | —          | Y          | —          | —                     | Y          | Y    | Y      | Y      | Y   | Y   | Y             | Y |
| Hand-Off-Auto selector switch.<br>To substitute a key operated selector switch, use Form C33 and specify positions, legend marking, and key removal. This form must be used with another selector switch form (example: CC33). | C               | 1                    | Y          | Y [28]     | Y          | Y [28]     | —                     | —          | Y    | Y      | Y      | Y   | Y   | Y             | Y |
| Hand-Off-Auto selector switch.<br>To substitute a key operated selector switch, use Form C33 and specify positions, legend marking, and key removal. This form must be used with another selector switch form (example: CC33). | C               | 3R, 4, 12            | Y          | Y [28]     | Y          | Y [28]     | Y                     | Y          | Y    | Y      | Y      | Y   | Y   | Y             | Y |
| On-Off selector switch.<br>To substitute a key operated selector switch, use Form C33 and specify positions, legend marking, and key removal. This form must be used with another selector switch form (example: C33C6).       | C6              | 1                    | Y          | Y          | Y          | Y          | —                     | —          | Y    | Y      | Y      | Y   | Y   | Y             | Y |
| On-Off selector switch.<br>To substitute a key operated selector switch, use Form C33 and specify positions, legend marking, and key removal. This form must be used with another selector switch form (example: C33C6).       | C6              | 3R, 4, 12            | Y          | Y          | Y          | Y          | Y                     | Y          | Y    | Y      | Y      | Y   | Y   | Y             | Y |
| Control circuit fuse (1 fuse)                                                                                                                                                                                                  | F               | Any                  | Y          | Y          | Y          | Y          | Y                     | Y          | Y    | Y      | Y      | Y   | Y   | Y             | Y |
| Control circuit fuses (2 fuses)                                                                                                                                                                                                | F4              | Any                  | Y          | Y          | Y          | Y          | Y                     | Y          | Y    | Y      | Y      | Y   | Y   | Y             | Y |
| Control circuit transformer standard capacity 50/60 Hz                                                                                                                                                                         |                 |                      |            |            |            |            |                       |            |      |        |        |     |     |               |   |
| Primary Fuses                                                                                                                                                                                                                  | Secondary Fuses | Transformer capacity |            |            |            |            |                       |            |      |        |        |     |     |               |   |
| 2 [29]                                                                                                                                                                                                                         | 0               | Std.                 | F4T        | 1, 4, 12   | Y          | Y          | Y                     | Y          | Y    | Y      | Y      | Y   | Y   | Y             | Y |
| 2                                                                                                                                                                                                                              | 1               | Std.                 | FF4T       | 1, 4, 12   | Y          | Y          | Y                     | Y          | Y    | Y      | Y      | Y   | Y   | Y             | Y |
| 2                                                                                                                                                                                                                              | 1               | 100 VA Additional    | FF4T11     | 1, 4, 12   | Y          | Y          | Y                     | Y          | Y    | Y      | Y      | Y   | Y   | Y             | Y |
| 2                                                                                                                                                                                                                              | 1               | 200 VA Additional    | FF4T12     | 1, 4, 12   | Y          | Y          | Y                     | Y          | Y    | Y [30] | Y      | Y   | Y   | Y             | Y |
| 2                                                                                                                                                                                                                              | 1               | 300 VA Additional    | FF4T13     | 1, 4, 12   | Y          | Y          | Y                     | Y          | Y    | Y      | Y [30] | Y   | Y   | Y             | Y |
| Noise reduced enclosure and shock mounted panel                                                                                                                                                                                | G4              | Any                  | —          | Y          | —          | —          | —                     | —          | Y    | Y      | Y      | Y   | Y   | Y             | Y |
| Addition of photoelectric receptacle                                                                                                                                                                                           | G10             | 1 [32], 3R, 12       | Y          | —          | Y          | —          | —                     | Y          | Y    | Y      | Y      | Y   | Y   | Y             | Y |
| Addition of photoelectric receptacle with photo-cell                                                                                                                                                                           | G101            | 1 [32], 3R, 12       | Y          | —          | Y          | —          | —                     | Y          | Y    | Y      | Y      | Y   | Y   | Y             | Y |
| Addition of photoelectric receptacle and relay (R6)[33]                                                                                                                                                                        | G10R6           | 1 [32], 12           | —          | Y          | —          | Y          | —                     | —          | Y    | Y      | Y      | Y   | Y   | Y             | Y |
| With photo-cell installed [33]                                                                                                                                                                                                 | G101R6          | 1 [32], 12           | —          | Y          | —          | Y          | —                     | —          | Y    | Y      | Y      | Y   | Y   | Y             | Y |
| Addition of terminal blocks (other than standard). The designation xx represents the number of terminals needed. Available in multiples of 5 only.                                                                             |                 |                      |            |            |            |            |                       |            |      |        |        |     |     |               |   |
| Wired                                                                                                                                                                                                                          | G56xx           | Any                  | Y          | Y          | Y          | Y          | Y                     | Y          | Y    | Y      | Y      | Y   | Y   | Y             | Y |
| Unwired                                                                                                                                                                                                                        | G50xx           | Any                  | Y          | Y          | Y          | Y          | Y                     | Y          | Y    | Y      | Y      | Y   | Y   | Y             | Y |
| Addition of 24 hour time clock (120–277 V only)                                                                                                                                                                                | K14             | 1, 4, 12             | Y          | Y          | Y          | Y          | Y                     | —          | Y    | Y      | Y      | Y   | Y   | Y             | Y |
| Addition of 24 hour time clock w/day omission (120–277 V)                                                                                                                                                                      | K141            | 1, 4, 12             | Y          | Y          | Y          | Y          | Y                     | —          | Y    | Y      | Y      | Y   | Y   | Y             | Y |
| Addition of 7 day time clock (120–277 V)                                                                                                                                                                                       | K142            | 1, 4, 12             | Y          | Y          | Y          | Y          | Y                     | —          | Y    | Y      | Y      | Y   | Y   | Y             | Y |
| Addition of 24 hour time clock (120–277 V only)                                                                                                                                                                                | K14             | 3R                   | —          | —          | —          | —          | —                     | Y          | —    | Y      | Y      | Y   | Y   | —             | — |
| Addition of 24 hr time clock w/skip day (120–277 V)                                                                                                                                                                            | K141            | 3R                   | —          | —          | —          | —          | —                     | Y          | —    | Y      | Y      | Y   | Y   | —             | — |
| Addition of 7 day time clock (120–277 V)                                                                                                                                                                                       | K142            | 3R                   | —          | —          | —          | —          | —                     | Y          | —    | Y      | Y      | Y   | Y   | —             | — |
| Addition of solid neutral terminal block                                                                                                                                                                                       | N               | 1, 4, 12             | Y          | Y          | Y          | Y          | Y                     | Std.       | Y    | Y      | Y      | Y   | Y   | Y             | Y |
| Red pilot light                                                                                                                                                                                                                | P1              | Any                  | Y          | Y          | Y          | Y          | Y                     | Y          | Y    | Y      | Y      | Y   | Y   | Y             | Y |
| Two or more lights [34] (each)                                                                                                                                                                                                 | P               | Any                  | Y          | Y          | Y          | Y          | Y                     | Y          | Y    | Y      | Y      | Y   | Y   | Y             | Y |
| Red push-to-test pilot light                                                                                                                                                                                                   | P21             | Any                  | Y          | Y          | Y          | Y          | Y                     | Y          | Y    | Y      | Y      | Y   | Y   | Y             | Y |
| Interlock necessary for pilot light one needed for each additional pilot light                                                                                                                                                 | [35]            | Any                  | Y          | Y          | Y          | Y          | Y                     | Y          | [36] | Y      | Y      | Y   | Y   | Y             | Y |
| Two-wire interface for mechanically held [33]                                                                                                                                                                                  | R6              | Any                  | —          | Y          | —          | Y          | —                     | —          | Y    | Y      | Y      | Y   | Y   | Y             | Y |
| Addition of undervoltage and overvoltage relay                                                                                                                                                                                 | R46             | Any                  | Y          | Y          | Y          | Y          | Y                     | Y          | Y    | Y      | Y      | Y   | Y   | Y             | Y |
| Three wire control for long distance applications[33]                                                                                                                                                                          | R62             | Any                  | —          | Y          | —          | Y          | —                     | —          | Y    | Y      | Y      | Y   | Y   | Y             | Y |
| Auxiliary contacts (specify number of N.O. + N.C.)                                                                                                                                                                             | X               | Any                  | Y          | Y          | Y          | Y          | Y                     | Y          | [36] | Y      | Y      | Y   | Y   | Y             | Y |
| Auxiliary electrical interlock installed on disconnect switch or circuit breaker operating mechanism                                                                                                                           | Y74             | Any                  | —          | —          | Y          | Y          | Y                     | Y          | —    | Y      | Y      | Y   | Y   | Y             | Y |
| Coil transient suppressor (120 Vac only)                                                                                                                                                                                       | Y145            | Any                  | Y          | Y          | Y          | Y          | Y                     | Y          | Y    | Y      | Y      | Y   | Y   | —             | — |
| Addition of lightning arrester                                                                                                                                                                                                 | Y1532           | Any                  | Y          | Y          | Y          | Y          | Y                     | Y          | Y    | Y      | Y      | Y   | Y   | Y             | Y |
| Substitute copper only lugs for standard                                                                                                                                                                                       | Y157            | Any                  | Y          | Y          | Y          | Y          | Y                     | Y          | —    | —      | Y      | Y   | Y   | Y             | Y |

[28] When ordering Form C on mechanically held devices, you must also include Form R6.

[29] Transformer voltage codes.

[30] Single primary voltage must be specified using the codes shown in Table 16.217.

[31] Mechanically held only. Electrically held device has a control circuit requiring a 120 V secondary, therefore, a transformer is supplied. The transformer comes wired to L1 and L2 unless Form S is called for. It is supplied with two primary and one secondary fuse.

[32] Photocell mounted on a NEMA 1 enclosure is designed for indoor areas which rely on natural light. Addition of the photocell does not make the enclosure suitable for outdoor (NEMA Type 3R) installations.

[33] Available for 24 V, 120 V, 240 V, 277 V and 480 V applications only.

[34] For electrically held enclosed devices, the first pilot is wired in parallel with the coil. Operating interlocks are required for all additional pilot lights. Mechanically held devices require operating interlocks for all pilot lights.

[35] Do not use Form X for any interlock wired in series with a pilot light, but do specify how the pilot light and interlock are to be wired into the circuit.

[36] Electrically held 20 A multipole contactors cannot add interlocks. Additional poles can be used for the same function, however. Mechanically held (Type LX) provide one double throw auxiliary (or status) contact as standard.



Table 16.217: Voltage Codes

| Voltage at 60 Hz (primary-secondary) | Code |
|--------------------------------------|------|
| 120-24                               | V89  |
| 208-120                              | V84  |
| 240-24                               | V82  |
| 240-120                              | V80  |
| 277-120                              | V85  |
| 480-24                               | V83  |
| 480-120                              | V81  |
| 480-240                              | V87  |
| 600-120                              | V86  |

## Order Example

You have device 8903SMG2V02. V02 means that you need a coil voltage of 120-60/110-50, wired for separate control.  
You want to add Form FF4T, with transformer voltages of 480 V primary, 120 V secondary. The new and complete Class, Type, Voltage Code and Form number are:

| Class | Type | Voltage Code | Form [37] |
|-------|------|--------------|-----------|
| 8903  | SMG2 | V81          | FF4T      |

Table 16.218: Lighting Contactor Field Modifications

| Description                                             | Types L & LX            | Type S        |               |              |              |              |                        |             |
|---------------------------------------------------------|-------------------------|---------------|---------------|--------------|--------------|--------------|------------------------|-------------|
|                                                         | 30 A<br>Kit             | 30 A<br>Kit   | 60 A<br>Kit   | 100 A<br>Kit | 200 A<br>Kit | 300 A<br>Kit | 400, 600, 800 A<br>Kit | Form<br>No. |
| Auxiliary Contacts                                      |                         |               |               |              |              |              |                        |             |
| 1 N.O. LH or RH Mounting                                | —                       | 9999SX6       | 9999SX6       | 9999SX6      | 9999SX6      | 9999SX6      | 9999SX6                | X           |
| 1 N.C. LH or RH Mounting                                | —                       | 9999SX7       | 9999SX7       | 9999SX7      | 9999SX7      | 9999SX7      | 9999SX7                |             |
| 1 N.C. & 1 N.O. Isolated LH or RH                       | —                       | 9999SX8       | 9999SX8       | 9999SX8      | 9999SX8      | 9999SX8      | 9999SX8                |             |
| 1 N.O. Overlapping LH or RH                             | —                       | 9999SX9       | 9999SX9       | 9999SX9      | 9999SX9      | 9999SX9      | 9999SX9                |             |
| 1 N.C. Overlapping LH or RH                             | —                       | 9999SX10      | 9999SX10      | 9999SX10     | 9999SX10     | 9999SX10     | 9999SX10               |             |
| Control Circuit Fuse Holder                             |                         |               |               |              |              |              |                        |             |
| Single Fuse Unit                                        | 9999LLX and<br>9999SFR3 | 9999SFR3      | 9999SFR3      | 9999SFR3     | 9999SFR3     | 9999SFR3     | 9999SFR3               | F           |
| Two Fuse Unit                                           | 9999LLX and<br>9999SFR4 | 9999SFR4      | 9999SFR4      | 9999SFR4     | 9999SFR4     | 9999SFR4     | 9999SFR4               | F4          |
| Transformers                                            | 9070TF50                | 9070TF100     | 9070TF100     | 9070TF150    | 9070TF300    | 9070TF500    | 9070TF750              | T           |
| Oversized Enclosures (Non-Combo)                        |                         |               |               |              |              |              |                        |             |
| NEMA 1                                                  | 9991SDG3                | 9991SDG3      | 9991SDG3      | —            | —            | —            | —                      | —           |
| NEMA 4                                                  | 9991SDW3                | 9991SDW3      | 9991SDW3      | —            | —            | —            | —                      | —           |
| NEMA 12                                                 | 9991SDA3                | 9991SDA3      | 9991SDA3      | —            | —            | —            | —                      | —           |
| Standard Enclosures                                     |                         |               |               |              |              |              |                        |             |
| NEMA 1—Surface Mount                                    | 9991LXG1                | 9991SCG7 [38] | 9991SDG7 [38] | 9991SFG8     | 9991SFG4     | 9991SGG8     | —                      | —           |
| NEMA 3R                                                 | 9991SDH1                | 9991SCH2      | 9991SDH1      | 9991SEH1     | 9991SFH1     | —            | —                      | —           |
| NEMA 4—Standard                                         | 9991SDW1                | 9991SCW1      | 9991SDW1      | —            | —            | —            | —                      | —           |
| NEMA 4—With 2 Cvr Mtd. Clsng Plts                       | 9991SDW11               | 9991SCW11     | 9991SDW11     | 9991SEW11    | —            | —            | —                      | —           |
| NEMA 4X—Glass Polyester                                 | 9991SDW20               | 9991SCW20     | 9991SDW20     | —            | —            | —            | —                      | —           |
| NEMA 12                                                 | 9991SDA11               | 9991SCA11     | 9991SDA11     | 9991SEA11    | —            | —            | —                      | —           |
| NEMA 1—Flushmount—Complete                              | —                       | —             | —             | 9991SEF11    | —            | —            | —                      | —           |
| NEMA 1—Flush Mount Parts                                | —                       | —             | —             | —            | —            | —            | —                      | —           |
| FLUSH PARTS                                             | —                       | —             | —             | —            | —            | —            | —                      | —           |
| Standard—Elec. held                                     | 9991SDF13               | 9991SCF11     | 9991SDF11     | —            | —            | —            | —                      | —           |
| Standard—Mech. held                                     | 9991SDF13               | 9991SCF13     | 9991SDF13     | —            | —            | —            | —                      | —           |
| Mounting Strap                                          | 9991SDF2                | 9991SCF2      | 9991SDF2      | —            | —            | —            | —                      | —           |
| Pull Box                                                | 9991SDF1                | 9991SCF1      | 9991SDF1      | —            | —            | —            | —                      | —           |
| Internal Operator Mounting Bracket                      | 3010215901              | 3010215901    | 3010215901    | 3010215901   | 3010215901   | 3010215901   | 3010215901             | G53         |
| Solid Neutral                                           | 9999SN1                 | 9999SN1       | 9999SN1       | 9999SN1      | 9999SN2      | 9999SN2      | 9999SN3 [39]           | N           |
| Combination Lighting Contactor Disconnect Interlock Kit |                         |               |               |              |              |              |                        |             |
| Breaker Type                                            | —                       | 9999R26       | 9999R26       | 9999R26      | 9999R26      | 9999R26      | 9999R26                | Y74         |
| 1-Pole                                                  | —                       | 9999R27       | 9999R27       | 9999R27      | 9999R27      | 9999R27      | 9999R27                |             |
| 2-Pole                                                  | —                       | 9999R27       | 9999R27       | 9999R27      | 9999R27      | 9999R27      | 9999R27                |             |
| Disconnect Type                                         | —                       | 9999TC11      | 9999TC10      | 9999TC10     | 9999R8       | 9999R35      | 9999R26                |             |
| 1-Pole                                                  | —                       | 9999TC21      | 9999TC20      | 9999TC20     | 9999R9       | 9999R36      | 9999R27                |             |
| 2-Pole                                                  | —                       | 9999TC21      | 9999TC20      | 9999TC20     | 9999R9       | 9999R36      | 9999R27                |             |
| Lightning Arrestor                                      |                         |               |               |              |              |              |                        |             |
| 175 Vac to Ground Max<br>2 or 3 wire Grounded           | SDSA1175                | SDSA1175      | SDSA1175      | SDSA1175     | SDSA1175     | SDSA1175     | SDSA1175               | Y1532       |
| 650 Vac to Ground Max<br>3 or 4 wire Grounded           | SDSA3650                | SDSA3650      | SDSA3650      | SDSA3650     | SDSA3650     | SDSA3650     | SDSA3650               |             |

[37] Form numbers should always be shown in alphabetical order.

[38] For electrically held only.

[39] Limited to 400 and 600 A versions. 800 A is a factory modification only.

## Cover Mounted Control Units

Table 16.219: Mechanically Held

| Description                                                                                        | Form No. | TYPE LX                  | TYPE S                   |                          |                          |                          |                          |                          |
|----------------------------------------------------------------------------------------------------|----------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
|                                                                                                    |          | 30 A Kit                 | 30 A Kit                 | 60 A Kit                 | 100 A Kit                | 200 A Kit                | 300 A Kit                | 400, 600, 800 A Kit      |
| Push Button (On-Off)<br>NEMA 1 Enclosure                                                           | A3       | 9999BLX<br>9999LXPB      | [40]                     | 9001KA2<br>9999SA3 [41]  | 9001KA2<br>9999SA3 [41]  | 9001KA2<br>9999SA3 [41]  | 9001KA2<br>9999SA3 [41]  | 9001KA2<br>9999SA3 [41]  |
| NEMA 3R, 4 or 12 Enclosure                                                                         |          | 9001KA2<br>9999SA3 [41]  | 9001KA2<br>9999SA3 [41]  | 9001KA2<br>9999SA3 [41]  | 9001KA2<br>9999SA3 [41]  | 9001KA2<br>9999SA3 [41]  | 9001KA2<br>9999SA3 [41]  | 9001KA2<br>9999SA3 [41]  |
| Selector Switch (2 Position)<br>NEMA 1 Enclosure                                                   | C6       | 9999BLX<br>9999LXS       | 9001KN244<br>9001KS11BH1 | 9001KN244<br>9001KS11BH1 | 9001KN244<br>9001KS11BH1 | 9001KN244<br>9001KS11BH1 | 9001KN244<br>9001KS11BH1 | 9001KN244<br>9001KS11BH1 |
| NEMA 3R, 4 or 12 Enclosure                                                                         |          | 9001KN244<br>9001KS11BH1 | 9001KN244<br>9001KS11BH1 | 9001KN244<br>9001KS11BH1 | 9001KN244<br>9001KS11BH1 | 9001KN244<br>9001KS11BH1 | 9001KN244<br>9001KS11BH1 | 9001KN244<br>9001KS11BH1 |
| Selector Switch (3 Position)<br>NEMA 1 Enclosure<br>(must include two wire control relay, Form R6) | C        | 9999BLX<br>9999SC2       | 9001KN260<br>9001KS46BH2 | 9001KN260<br>9001KS46BH2 | 9001KN260<br>9001KS46BH2 | 9001KN260<br>9001KS46BH2 | 9001KN260<br>9001KS46BH2 | 9001KN260<br>9001KS46BH2 |
| NEMA 3R, 4 or 12 Enclosure                                                                         |          | 9001KN260<br>9001KS46BH2 |                          |                          |                          |                          |                          |                          |
| Two Wire Control Relay (Form R6) [42]                                                              | R6       | 9999RLX<br>CA2SK11 [43]  | 8501XO11                 | 8501XO11                 | 8501XO11                 | 8501XO11                 | 8501XO11                 | 8501XO11                 |

Table 16.220: Electrically Held

| Description                                      | Form No. | TYPE L                   | TYPE S                   |                          |                                |                                |                                |                          |
|--------------------------------------------------|----------|--------------------------|--------------------------|--------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------|
|                                                  |          | 30 A Kit                 | 30 A Kit                 | 60 A Kit                 | 100 A Kit                      | 200 A Kit                      | 300 A Kit                      | 400, 600, 800 A Kit      |
| Pilot Lights (Red and Green)<br>NEMA 1 Enclosure | P1       | 9999SP28R                | 9999SP28R                | 9999SP3R<br>9999SP28R    | [44]<br>9999SP14R<br>9999SP28R | [45]<br>9999SP28R<br>9999SP28R | [45]<br>9999SP28R<br>9999SP28R | 9999SP28R<br>9999SP28R   |
| NEMA 3R, 4 or 12 Enclosure                       |          | 9999SP28R                | 9999SP28R                | 9999SP3R<br>9999SP28R    | [44]<br>9999SP14R<br>9999SP28R | [45]<br>9999SP28R<br>9999SP28R | [45]<br>9999SP28R<br>9999SP28R | 9999SP28R<br>9999SP28R   |
| Push Buttons [46]<br>NEMA 1 Enclosure            | A12      | 9999BLX<br>9999SA10      | 9999SA10                 | 9999SA10                 | 9999SA3                        | 9999SA3                        | 9999SA3                        | 9999SA3                  |
| NEMA 3R, 4 or 12 Enclosure                       |          | 9999SA3                  | 9999SA3                  | 9999SA3                  | 9999SA3                        | 9999SA3                        | 9999SA3                        | 9999SA3                  |
| Selector Switch (2 Position)<br>NEMA 1 Enclosure | C6       | 9999BLX<br>9999SC22      | 9999SC22                 | 9999SC22                 | 9999SC22                       | 9001KN244<br>9001KS11BH1       | 9001KN244<br>9001KS11BH1       | 9001KN244<br>9001KS11BH1 |
| NEMA 3R, 4 or 12 Enclosure                       |          | 9001KN244<br>9001KS11BH1 | 9001KN244<br>9001KS11BH1 | 9001KN244<br>9001KS11BH1 | 9001KN244<br>9001KS11BH1       | 9001KN244<br>9001KS11BH1       | 9001KN244<br>9001KS11BH1       | 9001KN244<br>9001KS11BH1 |
| Selector Switch (3 Position)<br>NEMA 1 Enclosure | C        | 9999BLX<br>9999SC2       | 9999SC2                  | 9999SC2                  | 9999SC2                        | 9999SC8                        | 9999SC8                        | 9999SC8                  |
| NEMA 3R, 4 or 12 Enclosure                       |          | 9999SC8                  | 9999SC8                  | 9999SC8                  | 9999SC8                        | 9999SC8                        | 9999SC8                        | 9999SC8                  |

[40] No field installed kit available.

[41] Mechanically held contactors need two distinct signals to operate. An N.O. contact block must be added to the Class 9999 Type SA3 push button kit.

[42] Form R6 available for 24 V, 120 V, 240 V and 277 V only.

[43] Insert CA2SK11( ) voltage code from page 23-21.

[44] 2- or 3-pole only. For 4- or 5-pole use Class 9999SP15R.


[45] The coil voltage must be the same as the pilot light rating. Kit contains one (1) Class 9001, Type KP1R6 120 V/60 Hz red pilot light control unit. For other voltages, refer to the Class 9001, Type KP Control Section.

[46] Requires holding circuit interlock for Type S or additional power pole on Type L devices.


## Open Type

Table 16.221: Open Type

| Electrically Held |      |              |              |              |              |               | Mechanically Held |              |             |              |             |              |             |
|-------------------|------|--------------|--------------|--------------|--------------|---------------|-------------------|--------------|-------------|--------------|-------------|--------------|-------------|
| Rating (A)        | Type | No. of Poles | Dimensions   |              |              |               | Type              | Dimensions   |             |              |             |              |             |
|                   |      |              | A            | B            | C            | E             |                   | A            | B           | C            | D           | E            | F           |
| 30                | LO   | 2-4          | 2.88<br>73   | 5<br>127     | 4.62<br>117  | 3.12<br>79    | LXO               | 2.88<br>73   | —           | —            | 8.81<br>224 | 3.25<br>83   | 7.70<br>196 |
|                   |      | 6            | 4.25<br>108  | 5<br>127     | 4.62<br>117  | 3.12<br>79    |                   | 4.25<br>108  | —           | —            | 8.81<br>224 | 3.25<br>83   | 7.70<br>196 |
|                   |      | 8-12         | 5.63<br>143  | 5<br>127     | 4.62<br>117  | 3.12<br>79    |                   | 5.63<br>143  | —           | —            | 8.81<br>224 | 3.25<br>83   | 7.70<br>196 |
| 30                | SMO  | 2-3          | 4.34<br>110  | 3.22<br>82   | 4.22<br>107  | 3.50<br>89    | —                 | 7.15<br>182  | 3.79<br>96  | 4.68<br>119  | —           | 6.04<br>153  | —           |
|                   |      | 4-5          | 4.34<br>110  | 4.25<br>108  | 4.22<br>107  | 3.50<br>89    | —                 | 7.15<br>182  | 4.54<br>115 | 4.68<br>119  | —           | 6.04<br>153  | —           |
| 60                | SPO  | 2-3          | 5.33<br>135  | 4.31<br>110  | 4.94<br>125  | 5.50<br>140   | —                 | 8.25<br>210  | 4.61<br>117 | 5.23<br>133  | —           | 7.81<br>198  | —           |
|                   |      | 4-5          | 6.22<br>158  | 5.61<br>142  | 4.94<br>125  | 5.50<br>140   | —                 | 8.70<br>221  | 5.90<br>150 | 5.23<br>133  | —           | 7.81<br>198  | —           |
| 100               | SQO  | 2-3          | 7.09<br>180  | 5.45<br>138  | 6.50<br>165  | 7.26<br>184   | —                 | 10.13<br>257 | 5.94<br>151 | 6.72<br>171  | —           | 7.26<br>184  | —           |
|                   |      | 4-5          | 7.82<br>199  | 9.75<br>248  | 6.50<br>165  | 7.26<br>184   | —                 | 10.56<br>268 | 9.75<br>248 | 6.72<br>171  | —           | 7.26<br>184  | —           |
| 200               | SVO  | 2-3          | 9.14<br>232  | 6.00<br>152  | 6.50<br>165  | 9.14<br>232   | SVO               | 11.35<br>288 | 6.00<br>152 | 6.72<br>171  | —           | 9.14<br>232  | —           |
|                   |      | 4, 5[47]     | 9.14<br>232  | 9.75<br>248  | 6.50<br>165  | 9.14<br>232   |                   | 11.55<br>293 | 9.75<br>248 | 6.72<br>171  | —           | 9.14<br>232  | —           |
| 300               | SXO  | 2-3          | 12.31<br>313 | 8.66<br>220  | 8.74<br>222  | 12.25<br>311  | SXO               | 12.31<br>313 | 8.66<br>220 | 10.50<br>267 | —           | 12.31<br>313 | —           |
| 400               | SYO  | 2-3          | —            | 12.33<br>313 | 9.00<br>229  | 27.78<br>706  | SYO               | —            | 8.66<br>220 | 10.50<br>267 | —           | 21.00<br>533 | —           |
| 600               | SZO  |              |              | 12.33<br>313 | 11.94<br>303 | 42.70<br>1085 | SZO               |              | —           | —            | —           | —            | —           |
| 800               | SJO  | 2-3          | —            | 12.33<br>313 | 11.94<br>303 | 42.70<br>1085 | —                 | —            | —           | —            | —           | —            | —           |

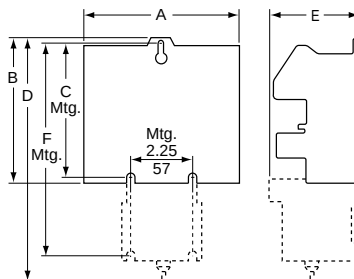

Open Type L and LX



Open Type S


**NOTE:** These dimensions are for reference only. If you need precise measurements, contact the Customer Care Center at 1-888-778-2733.

[47] 5-Pole, electrically held only.


**NEMA 1**

**Table 16.222: NEMA 1 Non-Combination Lighting Contactors, Electrically Held (EH) and Mechanically Held (MH)**


| Rating (A) | Type     | No. of Poles | Form(s)                                 | Fig. | Dimensions, in. (mm) |                 |                |                |               |                |                 |              |                |               |              |               |
|------------|----------|--------------|-----------------------------------------|------|----------------------|-----------------|----------------|----------------|---------------|----------------|-----------------|--------------|----------------|---------------|--------------|---------------|
|            |          |              |                                         |      | A                    | B               | C              | D              | E             | F              | G               | H            | I              | J             | K            | L             |
| 30         | LG, LXG  | Any          | Standard, A3, A12, C, C6, F, P, R6, Y48 | A    | 7.81<br>(198)        | 12.69<br>(322)  | 6.03<br>(153)  | —              | 1.09<br>(28)  | 10.50<br>(267) | 1.09<br>(28)    | 1.09<br>(28) | 5.63<br>(143)  | 5.75<br>(146) | 1.09<br>(28) | 5.63<br>(143) |
|            |          |              | P, T                                    | B    | 11.88<br>(302)       | 11.88<br>(302)  | 7.44<br>(189)  | 9.75<br>(248)  | 1.06<br>(27)  | 1.06<br>(27)   | 9.75<br>(248)   | 1.06<br>(27) | 1.06<br>(27)   | 0.31<br>(8)   | —            | —             |
|            |          |              | K14, K141, K142                         | A    | 16.00<br>(406)       | 22.00<br>(559)  | 7.38<br>(188)  | 8.00<br>(203)  | 1.00<br>(25)  | 20.00<br>(508) | 1.00<br>(25)    | 1.00<br>(25) | 14.00<br>(356) | 7.38<br>(188) | 1.00<br>(25) | 7.00<br>(178) |
| 30         | SMG      | 2-5          | EH Standard, A12, C, C6, P, X           | A    | 6.00<br>(152)        | 10.00<br>(254)  | 5.28<br>(134)  | 3.00<br>(76)   | 0.88<br>(22)  | 8.13<br>(206)  | 1.00<br>(25)    | 0.94<br>(24) | 4.13<br>(105)  | 5.00<br>(127) | —            | —             |
|            |          |              | MH Standard, X                          |      |                      |                 |                |                |               |                |                 |              |                |               |              |               |
|            |          |              | EH T                                    | A    | 6.34<br>(161)        | 15.88<br>(403)  | 5.19<br>(132)  | 14.38<br>(365) | 4.66<br>(118) | 0.28<br>(7)    | 0.75<br>(19)    | 0.84<br>(21) | —              | —             | —            | —             |
|            |          |              | N                                       | B    | 14.88<br>(378)       | 14.12<br>(359)  | 7.56<br>(192)  | 12.75<br>(324) | 1.06<br>(27)  | 1.06<br>(27)   | 12.00<br>(305)  | 1.06<br>(27) | 1.06<br>(27)   | 0.31<br>(8)   | —            | —             |
|            |          |              | MH T, N, R6                             |      |                      |                 |                |                |               |                |                 |              |                |               |              |               |
|            |          |              | A3, C, C6, P                            | B    | 8.12<br>(206)        | 14.12<br>(359)  | 9.73<br>(247)  | 6.00<br>(152)  | 1.06<br>(27)  | 1.06<br>(27)   | 12.00<br>(305)  | 1.06<br>(27) | 1.06<br>(27)   | 0.31<br>(8)   | —            | —             |
| 60         | SPG      | 2-3          | EH Standard, A12, C, C6, P, X           | A    | 7.81<br>(198)        | 12.69<br>(322)  | 6.03<br>(153)  | —              | 1.09<br>(28)  | 10.50<br>(267) | 1.09<br>(28)    | 1.09<br>(28) | 5.63<br>(143)  | 5.75<br>(146) | 1.09<br>(28) | 5.63<br>(143) |
|            |          | 4-5          | EH Standard, A12, C, C6, P, X           | B    | 8.12<br>(206)        | 14.12<br>(359)  | 9.73<br>(247)  | 6.00<br>(152)  | 1.06<br>(27)  | 1.06<br>(27)   | 12.00<br>(305)  | 1.06<br>(27) | 1.06<br>(27)   | 0.31<br>(8)   | —            | —             |
|            |          | 2-5          | EH, MH T, N, R6                         | B    | 14.88<br>(378)       | 14.12<br>(359)  | 7.56<br>(192)  | 12.75<br>(324) | 1.06<br>(27)  | 1.06<br>(27)   | 12.00<br>(305)  | 1.06<br>(27) | 1.06<br>(27)   | 0.31<br>(8)   | —            | —             |
|            |          | 2-5          | MH Standard, A3, C, C6, P, X            | B    | 8.12<br>(206)        | 14.12<br>(359)  | 9.73<br>(247)  | 6.00<br>(152)  | 1.06<br>(27)  | 1.06<br>(27)   | 12.00<br>(305)  | 1.06<br>(27) | 1.06<br>(27)   | 0.31<br>(8)   | —            | —             |
|            |          |              |                                         |      |                      |                 |                |                |               |                |                 |              |                |               |              |               |
| 100        | SQG      | 2, 3 [48]    | EH Standard, A12, C, C6, F, P, X, T     | B    | 11.25<br>(286)       | 25.15<br>(639)  | 8.99<br>(228)  | 8.60<br>(218)  | 1.25<br>(32)  | 1.25<br>(32)   | 22.32<br>(567)  | 1.42<br>(36) | 1.42<br>(36)   | 0.44<br>(11)  | —            | —             |
|            |          |              | MH Standard, F, X, T                    |      |                      |                 |                |                |               |                |                 |              |                |               |              |               |
|            |          | 2, 3         | EH N, R6, T, T10-T13 [49]               | B    | 18.15<br>(461)       | 29.15<br>(740)  | 9.24<br>(234)  | 15.50<br>(394) | 9.24<br>(234) | 1.33<br>(34)   | 26.50<br>(673)  | 1.33<br>(34) | 1.33<br>(34)   | 0.44<br>(11)  | —            | —             |
|            |          |              | MH A3, C, C6, N, R6, T, T10-T13 [49]    |      |                      |                 |                |                |               |                |                 |              |                |               |              |               |
|            |          | 4, 5         | EH Standard, A12, C, C6, F, P, X        | B    | 11.25<br>(286)       | 25.15<br>(639)  | 8.99<br>(228)  | 8.60<br>(218)  | 1.25<br>(32)  | 1.25<br>(32)   | 22.32<br>(567)  | 1.42<br>(36) | 1.42<br>(36)   | 0.44<br>(11)  | —            | —             |
|            |          |              | MH Standard, F, X                       |      |                      |                 |                |                |               |                |                 |              |                |               |              |               |
|            |          |              | EH [49]                                 | B    | 18.15<br>(461)       | 29.15<br>(740)  | 9.24<br>(234)  | 15.50<br>(394) | 9.24<br>(234) | 1.33<br>(34)   | 26.50<br>(673)  | 1.33<br>(34) | 1.33<br>(34)   | 0.44<br>(11)  | —            | —             |
|            |          |              | MH A3, C, C6 [49]                       |      |                      |                 |                |                |               |                |                 |              |                |               |              |               |
|            |          |              | EH, MH N, R6, T, T10-T13                | B    | 22.15<br>(563)       | 39.15<br>(994)  | 10.24<br>(260) | 19.50<br>(495) | 1.33<br>(34)  | 1.33<br>(34)   | 36.50<br>(927)  | 1.33<br>(34) | 1.33<br>(34)   | 0.44<br>(11)  | —            | —             |
|            |          |              |                                         |      |                      |                 |                |                |               |                |                 |              |                |               |              |               |
| 200        | SVG      | All          | EH, MH Standard and All Forms           | B    | 22.15<br>(563)       | 39.15<br>(994)  | 10.24<br>(260) | 19.50<br>(495) | 1.33<br>(34)  | 1.33<br>(34)   | 36.50<br>(927)  | 1.33<br>(34) | 1.33<br>(34)   | 0.44<br>(11)  | —            | —             |
| 300        | SXG      | All          | EH, MH Standard and All Forms           | B    | 17.21<br>(437)       | 44.21<br>(1123) | 12.83<br>(325) | 13.00<br>(330) | 2.11<br>(54)  | 2.11<br>(54)   | 40.00<br>(1016) | 2.11<br>(54) | 2.11<br>(54)   | 0.56<br>(14)  | —            | —             |
| 400, 600   | SYG, SZG | All          | EH, MH Standard and All Forms           | B    | 20.21<br>(513)       | 65.75<br>(1670) | 13.10<br>(333) | 11.00<br>(972) | 4.61<br>(117) | 4.61<br>(117)  | 64.50<br>(1638) | 0.63<br>(16) | 0.63<br>(16)   | 0.69<br>(18)  | —            | —             |
| 800        | SJG      | 2-3          | With or Without Any Forms               | C    | 34.50<br>(876)       | 93.00<br>(2362) | 23.50<br>(597) | Floor Mounting |               |                |                 |              |                |               |              |               |

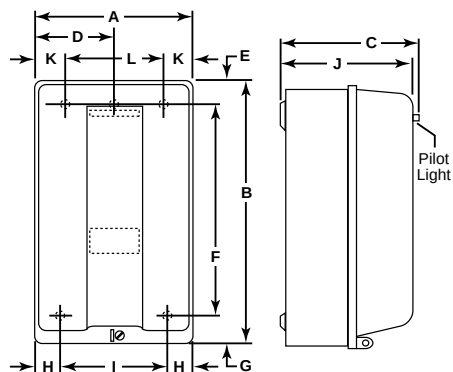

**Figure A**

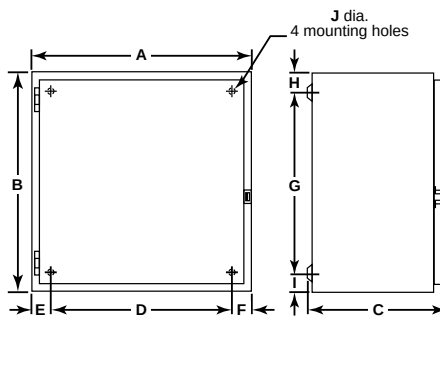

**Figure B**

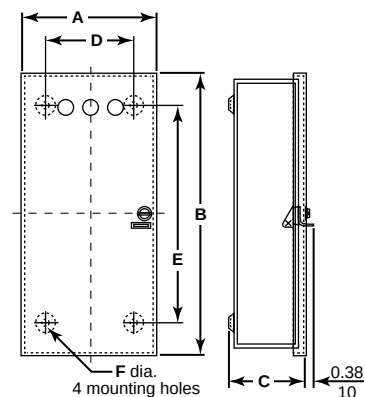

**Figure C**

[48] Factory transformer only.  
[49] All Type K Forms.

NEMA 1 Flush Mounting

Table 16.223: NEMA 1 Flush Mounted Enclosures

| Rating<br>(A) | Type | Form(s)                   |                           | Dimensions   |              |              |              |             |              |             |
|---------------|------|---------------------------|---------------------------|--------------|--------------|--------------|--------------|-------------|--------------|-------------|
|               |      |                           |                           | A            | B            | C            | D            | E           | F            | G           |
| 30            | LF   | Standard, F, Y48, R6      |                           | 15.19<br>386 | 8.94<br>227  | 7.63<br>194  | 12.88<br>327 | 5.44<br>138 | 10.94<br>278 | 5.13<br>130 |
|               | LXF  | A3, A12, C, C6,<br>T, P   |                           | 24.00<br>610 | 17.50<br>445 | 15.00<br>381 | 19.25<br>489 | 7.12<br>181 | —            | —           |
| 30            | SMF  | EH                        | Std., A12,<br>C, C6, P, X | 13.44<br>341 | 7.19<br>183  | 5.88<br>149  | 11.13<br>283 | 4.75<br>121 | 9.19<br>233  | 4.50<br>114 |
|               |      | MH                        | Std., X                   |              |              |              |              |             |              |             |
|               |      | EH                        | T, N                      |              |              |              |              |             |              |             |
|               |      | MH                        | A3, C, C6,<br>T, N, P, R6 | 24.00<br>610 | 17.50<br>445 | 15.00<br>381 | 19.25<br>489 | 5.75<br>146 | —            | —           |
| 60            | SPF  | EH                        | Std., A12,<br>C, C6, P, X | 15.19<br>386 | 8.94<br>227  | 7.63<br>194  | 12.88<br>327 | 5.44<br>138 | 10.94<br>278 | 5.13<br>130 |
|               |      | MH                        | Std., X                   |              |              |              |              |             |              |             |
|               |      | EH                        | T, N                      |              |              |              |              |             |              |             |
|               |      | MH                        | A3, C, C6,<br>T, N, P, R6 | 24.00<br>610 | 17.50<br>445 | 15.00<br>381 | 19.25<br>489 | 5.75<br>146 | —            | —           |
| 100           | SQF  | With or without any Forms |                           | 31.00<br>787 | 16.75<br>425 | 14.25<br>362 | 26.25<br>667 | 8.00<br>203 | —            | —           |

EH = Electrically Held. MH = Mechanically Held.

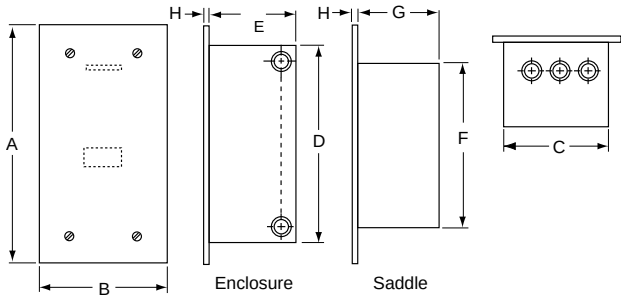


Figure 16.19: NEMA 1 Flush Mounted

Dimensions: in.  
mm

**NEMA 3R, 4, and 4X**

**NOTE:** These dimensions are for reference only. If you need precise measurements, contact the Customer Care Center at 1-888-778-2733.


**Table 16.224: NEMA 3R Enclosures**

| Rating (A) | Type | No. of Poles | A            | B             | C           | D1         | D2         | E            | F            | G1         | G2         | H1         | H2         | J            | K          | L          | M          | N           | P          | K.O. X                | K.O. Y           |
|------------|------|--------------|--------------|---------------|-------------|------------|------------|--------------|--------------|------------|------------|------------|------------|--------------|------------|------------|------------|-------------|------------|-----------------------|------------------|
| 30         | SMH  | All          | 8.83<br>224  | 12.30<br>312  | 7.12<br>181 | 1.39<br>35 | 1.44<br>37 | 6.00<br>152  | 7.50<br>191  | 2.64<br>67 | 2.16<br>55 | 2.08<br>53 | 2.62<br>66 | 14.28<br>363 | 1.37<br>35 | 1.37<br>35 | 1.88<br>48 | 4.38<br>111 | 1.83<br>46 | 0.5<br>0.75<br>1      | 0.5<br>0.75<br>1 |
| 30         | LH   | All          | 9.83<br>250  | 16.30<br>414  | 8.62<br>219 | 1.39<br>35 | 1.44<br>37 | 7.00<br>178  | 11.50<br>292 | 2.64<br>67 | 2.16<br>55 | 2.08<br>53 | 2.62<br>66 | 16.78<br>426 | 1.31<br>33 | 1.75<br>44 | 2.13<br>54 | 4.88<br>124 | 1.83<br>46 | 1<br>1.25<br>1.5      | 0.5<br>0.75      |
| 60         | SPH  |              |              |               |             |            |            |              |              |            |            |            |            |              |            |            |            |             |            |                       |                  |
| 100        | SQH  | All          | 12.83<br>326 | 25.30<br>643  | 8.62<br>219 | 1.39<br>35 | 1.44<br>37 | 10.00<br>254 | 20.50<br>521 | 2.64<br>67 | 2.16<br>55 | 2.08<br>53 | 2.62<br>66 | 19.78<br>502 | 1.31<br>33 | 1.94<br>49 | 2.44<br>62 | 6.38<br>162 | 1.83<br>46 | 1<br>1.25<br>2<br>2.5 | 0.5<br>0.75      |
| 200        | SVH  | All          | 12.83<br>326 | 40.30<br>1024 | 9.12<br>232 | 1.39<br>35 | 1.44<br>37 | 10.00<br>254 | 35.50<br>902 | 2.64<br>67 | 2.16<br>55 | 2.08<br>53 | 2.62<br>66 | 20.28<br>515 | 1.31<br>33 | 2.31<br>59 | 2.69<br>68 | 6.38<br>162 | 1.83<br>46 | 1<br>1.25<br>2<br>2.5 | 0.5<br>0.75      |

**Table 16.225: NEMA 4 and 4X Stainless Steel Only Enclosures [50]**

| Rating (A) | Type     | No. of Poles | Forms                                          | Dimensions for Stainless Steel Enclosures |              |                |             |              |               |            |             |              |            |             |            |           |            | Bottom Hub Only W | Top & Bottom Hub X |
|------------|----------|--------------|------------------------------------------------|-------------------------------------------|--------------|----------------|-------------|--------------|---------------|------------|-------------|--------------|------------|-------------|------------|-----------|------------|-------------------|--------------------|
|            |          |              |                                                | A                                         | B            | C              | D           | E            | F             | G          | H           | I            | J          | K           | L          |           |            |                   |                    |
| 30         | LW LXW   | Any          | Standard, F, R6, Y48                           | 8.13<br>206                               | 7.88<br>200  | 16.19<br>411   | 1.56<br>40  | 5.00<br>127  | 15.00<br>381  | 0.60<br>15 | 1.94<br>49  | 14.75<br>375 | 2.00<br>51 | 2.63<br>67  | 0.31<br>8  | 0.75      | 1.5        |                   |                    |
|            |          |              | A3, A12, C, C6, P, T                           | 12.62<br>321                              | 7.81<br>198  | 14.69<br>373   | 2.56<br>65  | 7.50<br>191  | 13.50<br>343  | 0.63<br>16 | 3.38<br>86  | 18.44<br>468 | 1.69<br>43 | 2.31<br>59  | 0.31<br>8  | 0.75      | 1          |                   |                    |
| 30         | SMW      | 2-5          | EH Std., A12, C, C6, P, X                      | 6.38<br>162                               | 7.13<br>181  | 13.19<br>335   | 1.56<br>40  | 3.25<br>83   | 12.00<br>305  | 0.63<br>16 | 1.19<br>30  | 11.81<br>300 | 1.63<br>41 | 2.31<br>59  | 0.31<br>8  | 0.75      | 1          |                   |                    |
|            |          |              | MH Std., F, X                                  | 12.63<br>321                              | 7.11<br>181  | 14.69<br>373   | 2.56<br>65  | 7.50<br>191  | 13.50<br>343  | 0.63<br>16 | 3.19<br>81  | 18.50<br>470 | 1.64<br>42 | 2.31<br>59  | 0.31<br>8  | 0.75      | 1          |                   |                    |
|            |          |              | EH T                                           | 14.88<br>378                              | 7.25<br>184  | 16.31<br>414   | 2.56<br>65  | 9.75<br>248  | 15.00<br>381  | 0.63<br>16 | 3.19<br>81  | 20.88<br>530 | 2.06<br>52 | 2.63<br>67  | 0.31<br>8  | 0.75      | 1.5        |                   |                    |
|            |          |              | MH A3, C, C6, T, N, P, R6                      | 8.13<br>206                               | 7.88<br>200  | 16.19<br>411   | 1.56<br>40  | 5.00<br>127  | 15.00<br>381  | 0.60<br>15 | 1.94<br>49  | 14.75<br>375 | 2.00<br>51 | 2.63<br>67  | 0.31<br>8  | 0.75      | 1.5        |                   |                    |
|            |          |              | EH Std., A12, C, C6, P, X                      | 14.88<br>378                              | 7.25<br>184  | 16.31<br>414   | 2.56<br>65  | 9.75<br>248  | 15.00<br>381  | 0.63<br>16 | 3.19<br>81  | 20.88<br>530 | 2.06<br>52 | 2.63<br>67  | 0.31<br>8  | 0.75      | 1.5        |                   |                    |
|            |          |              | MH Std., A3, C, C6, P, X                       | 14.88<br>378                              | 7.25<br>184  | 16.31<br>414   | 2.56<br>65  | 9.75<br>248  | 15.00<br>381  | 0.63<br>16 | 3.19<br>81  | 20.88<br>530 | 2.06<br>52 | 2.63<br>67  | 0.31<br>8  | 0.75      | 1.5        |                   |                    |
| 60         | SPW      | 2-5          | EH Std., A12, C, C6, P, X                      | 8.13<br>206                               | 7.88<br>200  | 16.19<br>411   | 1.56<br>40  | 5.00<br>127  | 15.00<br>381  | 0.60<br>15 | 1.94<br>49  | 14.75<br>375 | 2.00<br>51 | 2.63<br>67  | 0.31<br>8  | 0.75      | 1.5        |                   |                    |
|            |          |              | MH Std., A3, C, C6, P, X                       | 14.88<br>378                              | 7.25<br>184  | 16.31<br>414   | 2.56<br>65  | 9.75<br>248  | 15.00<br>381  | 0.63<br>16 | 3.19<br>81  | 20.88<br>530 | 2.06<br>52 | 2.63<br>67  | 0.31<br>8  | 0.75      | 1.5        |                   |                    |
|            |          |              | EH T, N, R6                                    | 14.88<br>378                              | 7.25<br>184  | 16.31<br>414   | 2.56<br>65  | 9.75<br>248  | 15.00<br>381  | 0.63<br>16 | 3.19<br>81  | 20.88<br>530 | 2.06<br>52 | 2.63<br>67  | 0.31<br>8  | 0.75      | 1.5        |                   |                    |
| 100        | SQW      | 2-3          | EH Std., A12, C, C6, F, N, R6, P, T, T10-13, X | 18.15<br>461                              | 8.77<br>223  | 32.21<br>818   | 3.08<br>78  | 12.00<br>305 | 30.50<br>775  | 0.61<br>15 | 3.67<br>93  | 26.71<br>678 | 2.58<br>66 | 3.19<br>81  | 0.44<br>11 | 0.75      | 2.5        |                   |                    |
|            |          |              | MH Std., A3, C, C6, F, N, P, R6, T, T10-13, X  | 22.15<br>563                              | 9.77<br>248  | 42.21<br>1072  | 3.08<br>78  | 16.00<br>406 | 40.50<br>1029 | 0.61<br>15 | 3.67<br>93  | 31.71<br>805 | 2.33<br>59 | 2.88<br>73  | 0.44<br>11 | 0.75      | 2.5        |                   |                    |
|            |          | 4-5          | EH Std., A12, C, C6, F, P [51]                 | 18.15<br>461                              | 8.77<br>223  | 32.21<br>818   | 3.08<br>78  | 12.00<br>305 | 30.50<br>775  | 0.61<br>15 | 3.67<br>93  | 26.71<br>678 | 2.58<br>66 | 3.19<br>81  | 0.44<br>11 | 0.75      | 2.5        |                   |                    |
|            |          |              | MH Std., A3, C, C6, P [51]                     | 22.15<br>563                              | 9.77<br>248  | 42.21<br>1072  | 3.08<br>78  | 16.00<br>406 | 40.50<br>1029 | 0.61<br>15 | 3.67<br>93  | 31.71<br>805 | 2.33<br>59 | 2.88<br>73  | 0.44<br>11 | 0.75      | 2.5        |                   |                    |
|            |          |              | EH N, R6, T, T10-13                            | 22.15<br>563                              | 9.77<br>248  | 42.21<br>1072  | 3.08<br>78  | 16.00<br>406 | 40.50<br>1029 | 0.61<br>15 | 3.67<br>93  | 31.71<br>805 | 2.33<br>59 | 2.88<br>73  | 0.44<br>11 | 0.75      | 2.5        |                   |                    |
|            |          |              | MH N, R6, T, T10-13                            | 22.15<br>563                              | 9.77<br>248  | 42.21<br>1072  | 3.08<br>78  | 16.00<br>406 | 40.50<br>1029 | 0.61<br>15 | 3.67<br>93  | 31.71<br>805 | 2.33<br>59 | 2.88<br>73  | 0.44<br>11 | 0.75      | 2.5        |                   |                    |
| 200        | SVW      | All          | EH, MH Standard and All Forms                  | 22.15<br>563                              | 9.77<br>248  | 42.21<br>1072  | 3.08<br>78  | 16.00<br>406 | 40.50<br>1029 | 0.61<br>15 | 3.67<br>93  | 31.71<br>805 | 2.33<br>59 | 2.88<br>73  | 0.44<br>11 | 0.75      | 2.5        |                   |                    |
| 300        | SXW      | All          | EH, MH Standard and All Forms                  | 17.21<br>437                              | 12.63<br>321 | 47.21<br>1199  | 4.11<br>104 | 9.00<br>229  | 46.00<br>1168 | 0.61<br>15 | 4.59<br>117 | 28.32<br>719 | 3.11<br>79 | 5.75<br>146 | 0.56<br>14 | 0.75      | 3.5        |                   |                    |
| 400, 600   | SYW, SZW | All          | EH, MH Standard and All Forms                  | 20.21<br>513                              | 12.13<br>308 | 65.21<br>1656  | 4.11<br>104 | 12.00<br>305 | 64.00<br>1626 | 0.61<br>15 | 4.59<br>117 | 30.82<br>783 | 2.67<br>68 | 4.50<br>114 | 0.56<br>14 | 0.75 [52] | Two 3 [52] |                   |                    |
| 800        | SJW      | 2-3          | With or without any Forms                      | 34.50<br>876                              | 23.50<br>597 | 101.00<br>2565 |             |              |               |            |             |              |            |             |            |           |            |                   |                    |

EH = Electrically Held. MH = Mechanically Held.

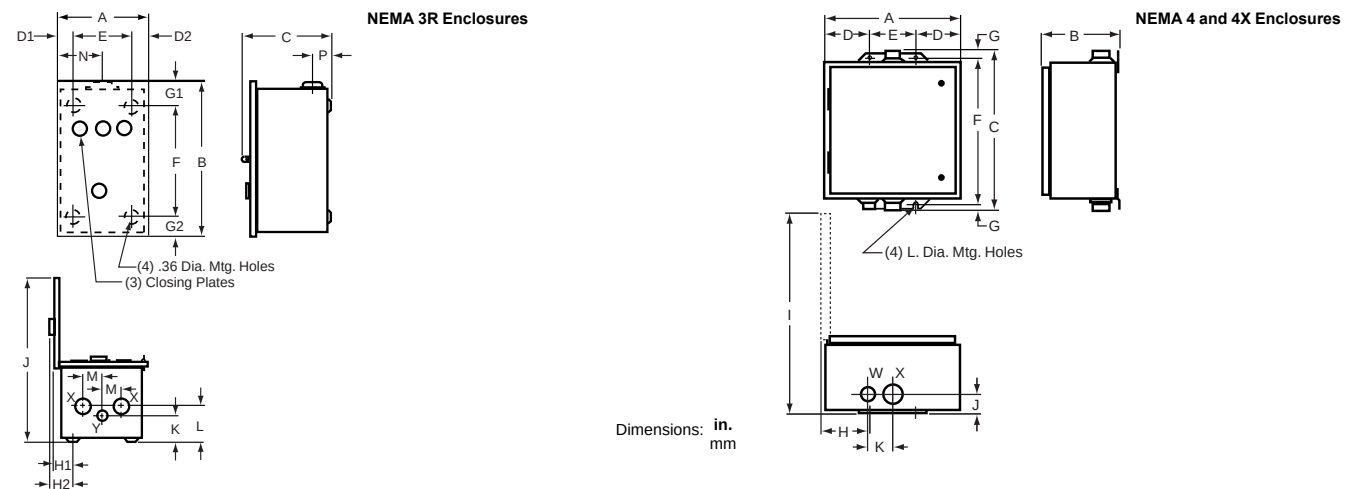

[50] For glass polyester enclosures (through 100 A), see Table 16.106.

[51] All Type K Forms.

[52] X hub is 1/4" left of center. W hub shown is another X hub. K dimension is distance between two X hubs. Actual W hub is located 3-3/16" to the right of X hub shown.



## NEMA 12/3R and Night-Master™, NEMA 3R

Table 16.226: See Figures: NEMA 12/3R (30–600 A) and NEMA 12/3R (800 A) (EH = Electrically Held; MH = Mechanically Held)

| Ampere Rating | Type      | Number of Poles | Form(s)                                        | Dimensions    |              |               |             |              |               |            |             |              |            |
|---------------|-----------|-----------------|------------------------------------------------|---------------|--------------|---------------|-------------|--------------|---------------|------------|-------------|--------------|------------|
|               |           |                 |                                                | A             | B            | C             | D           | E            | F             | G          | H           | I            | J          |
| 30            | LA<br>LXA | Any             | Standard, F, R6, Y48                           | 8.13<br>206   | 8.50<br>216  | 15.75<br>400  | 1.56<br>40  | 5.00<br>127  | 15.00<br>381  | 0.31<br>8  | 2.13<br>54  | 14.75<br>375 | 0.31<br>8  |
|               |           |                 | A3, A12, C, C6, P, T                           | 14.88<br>378  | 7.88<br>200  | 16.00<br>406  | 2.56<br>65  | 9.75<br>248  | 15.00<br>381  | 0.5<br>13  | 3.66<br>93  | 21.25<br>540 | 0.31<br>8  |
| 30            | SMA       | 2-5             | EH Std., A12, C, C6, P, X                      | 6.38<br>162   | 8.53<br>217  | 12.75<br>324  | 1.56<br>40  | 3.25<br>83   | 12.00<br>305  | 0.38<br>10 | 3.56<br>90  | 12.50<br>318 | 0.31<br>8  |
|               |           |                 | MH Std., F, P, X                               | 11.88<br>302  | 7.75<br>197  | 13.50<br>343  | 2.56<br>65  | 6.75<br>171  | 12.75<br>324  | 0.38<br>10 | 3.66<br>93  | 18.12<br>460 | 0.31<br>8  |
|               |           |                 | EH T                                           | 14.88<br>378  | 7.88<br>200  | 16.00<br>406  | 2.56<br>65  | 9.75<br>248  | 15.00<br>381  | 0.50<br>13 | 3.66<br>93  | 21.25<br>540 | 0.31<br>8  |
|               |           |                 | MH N, R6                                       | 14.88<br>378  | 7.88<br>200  | 16.00<br>406  | 2.56<br>65  | 9.75<br>248  | 15.00<br>381  | 0.50<br>13 | 3.66<br>93  | 21.25<br>540 | 0.31<br>8  |
|               |           |                 | EH Std., A12, C, C6, P, X                      | 8.13<br>206   | 9.28<br>236  | 16.00<br>406  | 1.56<br>40  | 5.00<br>127  | 15.00<br>381  | 0.50<br>13 | 3.66<br>93  | 15.38<br>391 | 0.31<br>8  |
|               |           |                 | MH Std., A3, C, C6, P, X                       | 14.88<br>378  | 7.88<br>200  | 15.75<br>400  | 2.56<br>65  | 9.75<br>248  | 15.00<br>381  | 0.38<br>10 | 3.66<br>93  | 21.25<br>540 | 0.31<br>8  |
| 60            | SPA       | 2-5             | EH T, N, R6                                    | 14.88<br>378  | 7.88<br>200  | 15.75<br>400  | 2.56<br>65  | 9.75<br>248  | 15.00<br>381  | 0.38<br>10 | 3.66<br>93  | 21.25<br>540 | 0.31<br>8  |
|               |           |                 | MH A3, C, C6, T, N, P, R6                      | 14.88<br>378  | 7.88<br>200  | 15.75<br>400  | 2.56<br>65  | 9.75<br>248  | 15.00<br>381  | 0.38<br>10 | 3.66<br>93  | 21.25<br>540 | 0.31<br>8  |
|               |           |                 | EH Std., A12, C, C6, F, N, R6, P, T, T10-13, X | 18.15<br>461  | 9.24<br>235  | 31.50<br>800  | 3.08<br>78  | 12.00<br>305 | 30.50<br>775  | 0.50<br>13 | 3.67<br>93  | 26.71<br>678 | 0.44<br>11 |
|               |           |                 | MH Std., A3, C, C6, F, N, P, R6, T, T10-13, X  | 22.15<br>563  | 10.24<br>260 | 41.50<br>1054 | 3.08<br>78  | 16.00<br>406 | 40.50<br>1029 | 0.50<br>13 | 3.67<br>93  | 31.71<br>805 | 0.44<br>11 |
|               |           |                 | EH Std., A12, C, C6, F, N, P, [53]             | 22.15<br>563  | 10.24<br>260 | 41.50<br>1054 | 3.08<br>78  | 16.00<br>406 | 40.50<br>1029 | 0.50<br>13 | 3.67<br>93  | 31.71<br>805 | 0.44<br>11 |
|               |           |                 | MH Std., A3, C, C6, P, [53]                    | 22.15<br>563  | 10.24<br>260 | 41.50<br>1054 | 3.08<br>78  | 16.00<br>406 | 40.50<br>1029 | 0.50<br>13 | 3.67<br>93  | 31.71<br>805 | 0.44<br>11 |
| 100           | SQA       | 2, 3            | EH N, R6, T, T10-13, [53]                      | 22.15<br>563  | 10.24<br>260 | 41.50<br>1054 | 3.08<br>78  | 16.00<br>406 | 40.50<br>1029 | 0.50<br>13 | 3.67<br>93  | 31.71<br>805 | 0.44<br>11 |
|               |           |                 | MH N, R6, T, T10-13, [53]                      | 22.15<br>563  | 10.24<br>260 | 41.50<br>1054 | 3.08<br>78  | 16.00<br>406 | 40.50<br>1029 | 0.50<br>13 | 3.67<br>93  | 31.71<br>805 | 0.44<br>11 |
|               |           |                 | EH Std., A12, C, C6, F, N, P, [53]             | 22.15<br>563  | 10.24<br>260 | 41.50<br>1054 | 3.08<br>78  | 16.00<br>406 | 40.50<br>1029 | 0.50<br>13 | 3.67<br>93  | 31.71<br>805 | 0.44<br>11 |
|               |           |                 | MH Std., A3, C, C6, P, [53]                    | 22.15<br>563  | 10.24<br>260 | 41.50<br>1054 | 3.08<br>78  | 16.00<br>406 | 40.50<br>1029 | 0.50<br>13 | 3.67<br>93  | 31.71<br>805 | 0.44<br>11 |
| 200           | SVA       | All             | EH and MH Standard and All Forms               | 22.15<br>563  | 10.24<br>260 | 41.50<br>1054 | 3.08<br>78  | 16.00<br>406 | 40.50<br>1029 | 0.50<br>13 | 3.67<br>93  | 31.71<br>805 | 0.44<br>11 |
| 300           | SXA       | All             | EH and MH Standard and All Forms               | 17.21<br>437  | 13.33<br>339 | 47.00<br>1194 | 4.11<br>104 | 9.00<br>229  | 46.00<br>1168 | 0.50<br>13 | 4.59<br>117 | 28.32<br>719 | 0.56<br>14 |
| 400, 600      | SYA, SZA  | All             | EH and MH Standard and All Forms               | 20.21<br>513  | 13.00<br>330 | 65.00<br>1651 | 4.11<br>104 | 12.00<br>305 | 64.00<br>1626 | 0.50<br>13 | 5.31<br>135 | 30.87<br>784 | 0.69<br>18 |
| 800           | SJA       | 2-3             | With or without any Forms                      | 93.00<br>2362 | 34.50<br>876 | 23.50<br>597  |             |              |               |            |             |              |            |

Table 16.227: Night-Master™ Outdoor Lighting Contactors (Short Version)—NEMA 3R Enclosures (see Figure: Night-Master Style)

| Ampere Rating | Description                                 | Type Number   | A     | B     | C    | D     | E     | F     | G    | H    | J [54] | K    | L    | M    | Knockouts |        |           |
|---------------|---------------------------------------------|---------------|-------|-------|------|-------|-------|-------|------|------|--------|------|------|------|-----------|--------|-----------|
|               |                                             |               |       |       |      |       |       |       |      |      |        |      |      |      | N         | P      | Q         |
| 30            | Disconnect Switch and Circuit Breaker Types | SMC61, 62, 81 | 23.50 | 15.00 | 8.42 | 10.50 | 19.00 | 22.38 | 7.00 | 2.18 | 1.50   | 2.13 | 2.13 | 2.13 | 0.50–0.75 | 1–1.25 | 0.50–0.75 |
| 60            |                                             | SPC61, 62, 81 | 597   | 381   | 214  | 267   | 483   | 568   | 178  | 55   | 38     | 54   | 54   | 54   | 0.50–0.75 | 1–1.25 | 0.50–0.75 |
| 100           |                                             | SQC61, 62, 81 | 34.53 | 20.00 | 8.42 | 10.50 | 30.04 | 33.41 | 7.00 | 2.18 | 2.0    | 2.68 | 2.68 | 3.44 | 0.50–0.75 | 1–1.25 | 1–1.25    |
| 200           | Disconnect Switch Type                      | SVC61, 62     | 48.37 | 19.00 | 9.12 | 10.53 | 44.00 | 47.25 | 7.00 | 2.18 | 2.50   | 2.68 | 2.68 | 3.44 | 0.50–0.75 | 1–1.25 | 1–1.25    |
|               | Circuit Breaker Type                        | SVC81         | 1229  | 483   | 232  | 267   | 1118  | 1200  | 178  | 55   | 64     | 68   | 68   | 87   | 0.50–0.75 | 2–2.50 | 1.5–2.0   |

Table 16.228: Night-Master™ Outdoor Lighting Contactors (Long Version)—NEMA 3R Enclosures (see Figure: Night-Master Style)

| Ampere Rating | Description                                 | Type Number   | A     | B     | C    | D     | E     | F     | G    | H    | J [54] | K    | L    | M    | Knockouts |        |           |
|---------------|---------------------------------------------|---------------|-------|-------|------|-------|-------|-------|------|------|--------|------|------|------|-----------|--------|-----------|
|               |                                             |               |       |       |      |       |       |       |      |      |        |      |      |      | N         | P      | Q         |
| 30            | Disconnect Switch and Circuit Breaker Types | SMC63, 64, 83 | 38.88 | 15.00 | 8.42 | 10.42 | 34.38 | 37.76 | 7.00 | 2.18 | 1.50   | 2.13 | 2.13 | 2.13 | 0.50–0.75 | 1–1.25 | 0.50–0.75 |
| 60            |                                             | SPC63, 64, 83 | 987   | 381   | 214  | 265   | 873   | 959   | 178  | 55   | 38     | 54   | 54   | 54   | 0.50–0.75 | 1–1.25 | 0.50–0.75 |
| 100           |                                             | SQC63, 64, 83 | 42.53 | 20.00 | 8.42 | 10.42 | 38.04 | 41.41 | 7.00 | 2.18 | 2.0    | 2.68 | 2.68 | 3.44 | 0.50–0.75 | 1–1.25 | 1–1.25    |
| 200           | Disconnect Switch Type                      | SVC63, 64     | 56.37 | 19.00 | 9.12 | 10.53 | 52.00 | 55.25 | 7.00 | 2.18 | 2.50   | 2.68 | 2.68 | 3.44 | 0.50–0.75 | 1–1.25 | 1–1.25    |
|               | Circuit Breaker Type                        | SVC83         | 1432  | 483   | 232  | 267   | 1321  | 1403  | 178  | 55   | 64     | 68   | 68   | 87   | 0.50–0.75 | 2–2.50 | 1.5–2.0   |

**NOTE:** These dimensions are for reference only. If you need precise measurements, contact the Customer Care Center at 1-888-778-2733.

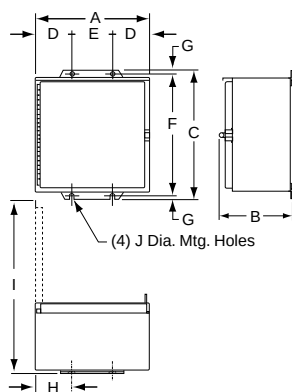


Figure 16.20: NEMA 12/3R (30–600 A)

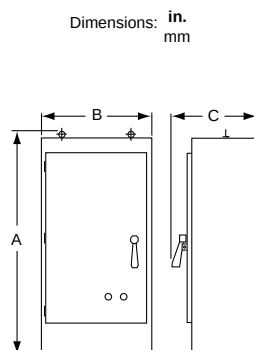


Figure 16.21: NEMA 12/3R (800 A)

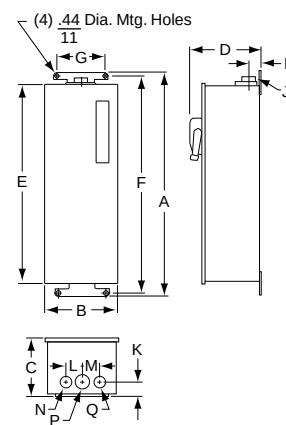


Figure 16.22: Night-Master Style

[53] All Type K Forms using Class 9001 Type K control units.

[54] Conduit size.

## Combination Lighting Contactors


**Table 16.229: See Figure: NEMA 1 Enclosure, Combination Devices**

| Ampere Rating | Type              | Dimensions [55] |              |             |              |              |              |            |            |             |            |            |            |            |            |            | Top & Bot.        |                   | Sides |
|---------------|-------------------|-----------------|--------------|-------------|--------------|--------------|--------------|------------|------------|-------------|------------|------------|------------|------------|------------|------------|-------------------|-------------------|-------|
|               |                   | A               | B            | C           | D            | E            | F            | G          | H          | I           | J          | K          | L          | M          | N          | O          | W                 | X                 | Y     |
| 30            | SMG6<br>_, SMG8_  | 9.50<br>241     | 22.50<br>572 | 8.37<br>213 | 6.38<br>162  | 20.50<br>521 | 14.68<br>373 | 1.81<br>46 | 1.69<br>43 | 3.37<br>86  | 3.38<br>86 | 1.06<br>27 | 3.25<br>83 | 2.18<br>55 | 1.25<br>32 | 0.87<br>22 | 0.50-<br>0.75     | 0.50-<br>0.75     | .50   |
|               | SMG7_<br>_, SMG9_ | 13.75<br>349    | 23.00<br>584 | 8.36<br>212 | 10.63<br>270 | 21.00<br>533 | 20.07<br>510 | 1.87<br>47 | 1.88<br>48 | 3.76<br>96  | 2.06<br>52 | 1.06<br>27 | 3.25<br>83 | 2.18<br>55 | 1.25<br>32 | 0.87<br>22 | 0.50-0.75-<br>1.0 | 0.50-0.75-<br>1.0 | .50   |
| 60            | SPG6_<br>_, SPG8_ | 10.50<br>267    | 26.00<br>660 | 9.62<br>244 | 7.37<br>187  | 24.00<br>610 | 17.00<br>432 | 2.12<br>54 | 2.00<br>51 | 4.00<br>102 | 2.06<br>52 | 1.06<br>27 | 3.25<br>83 | 2.18<br>55 | 1.25<br>32 | 0.87<br>22 | 1.0-<br>1.25      | 0.50-<br>0.75     | .50   |
|               | SPG7_<br>_, SPG9_ | 15.00<br>381    | 28.75<br>730 | 9.62<br>244 | 11.62<br>295 | 26.25<br>667 | 21.50<br>546 | 2.18<br>55 | 2.00<br>51 | 4.00<br>102 | 2.56<br>65 | 1.31<br>33 | 3.25<br>83 | 2.18<br>55 | 1.25<br>32 | 0.87<br>22 | 1.0-<br>1.25      | 0.50-<br>0.75     | .50   |


**Table 16.230: See Figure: NEMA 1 Enclosure**

| Ampere Rating | Type                       | Dimensions [55] |               |              |                          |             |              |               |            |             |            |             |             |   |            |            | Top & Bot.         |               | Sides |
|---------------|----------------------------|-----------------|---------------|--------------|--------------------------|-------------|--------------|---------------|------------|-------------|------------|-------------|-------------|---|------------|------------|--------------------|---------------|-------|
|               |                            | A               | B             | C            | D                        | E           | F            | G             | H          | I           | J          | K           | L           | M | N          | O          | W                  | X             | Y     |
| 100           | SQG6_, SQG7_, SQG81, SQG91 | 15.25<br>387    | 39.50<br>1003 | 10.60<br>269 | 9.25<br>235              | 3.00<br>76  | 22.68<br>576 | 41.00<br>1041 | 2.69<br>68 | 5.38<br>137 | 2.83<br>72 | 3.74<br>95  | 5.00<br>127 | — | 1.21<br>31 | 0.90<br>23 | 1.-1.25<br>2.-2.50 | 0.50-<br>0.75 | 0.50  |
| 200           | SVG6_, SVG7_, SVG81, SVG91 | 16.00<br>406    | 50.00<br>1270 | 10.68<br>271 | 10.00<br>254             | 3.00<br>76  | 23.68<br>601 | 51.50<br>1308 | 2.69<br>68 | 5.38<br>137 | 2.83<br>72 | 3.74<br>95  | 5.00<br>127 | — | 1.21<br>31 | 0.90<br>23 | 2.50               | 0.50-<br>0.75 | 0.50  |
| 300           | SXG6_, SXG7_               | 20.00<br>508    | 75.00<br>1905 | 14.37<br>365 | 12.00<br>305             | 4.00<br>102 | 29.43<br>748 | 77.00<br>1956 | 3.19<br>81 | —           | 3.52<br>89 | 7.00<br>178 | 9.25<br>235 | — | —          | —          | 0.50-<br>0.75      | 3.00          | —     |
|               | SXG81, SXG91               | 20.00<br>508    | 63.00<br>1600 | 14.37<br>365 | 12.00<br>305             | 4.00<br>102 | 27.43<br>697 | 65.00<br>1651 | 3.19<br>81 | —           | 3.52<br>89 | 7.00<br>178 | 5.00<br>127 | — | —          | —          | 0.50-<br>0.75      | 3.00          | —     |
| 400           | SYG81, SYG91               | 36.00<br>914    | 90.00<br>2286 | 17.00<br>432 | Floor Mounting Enclosure |             |              |               |            |             |            |             |             |   |            |            | —                  | —             | —     |
| 600           | SZG81, SZG91               |                 |               |              |                          |             |              |               |            |             |            |             |             |   |            |            |                    |               |       |

**NOTE:** These dimensions are for reference only. If you need precise measurements, contact the Customer Care Center at 1-888-778-2733.

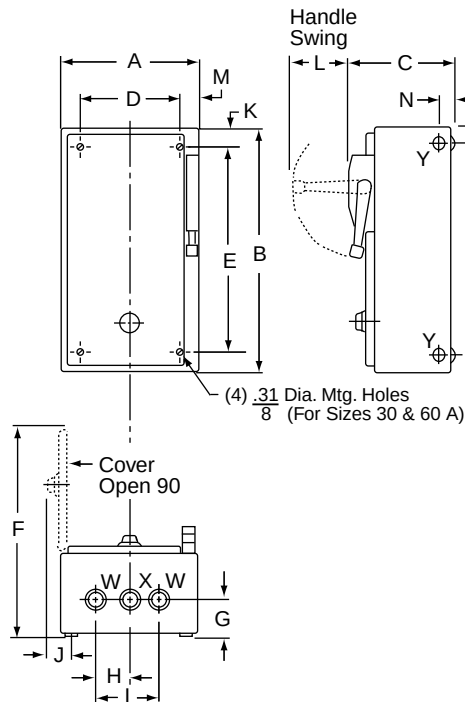

**Figure 16.23: NEMA 1 Enclosure, Combination Devices**

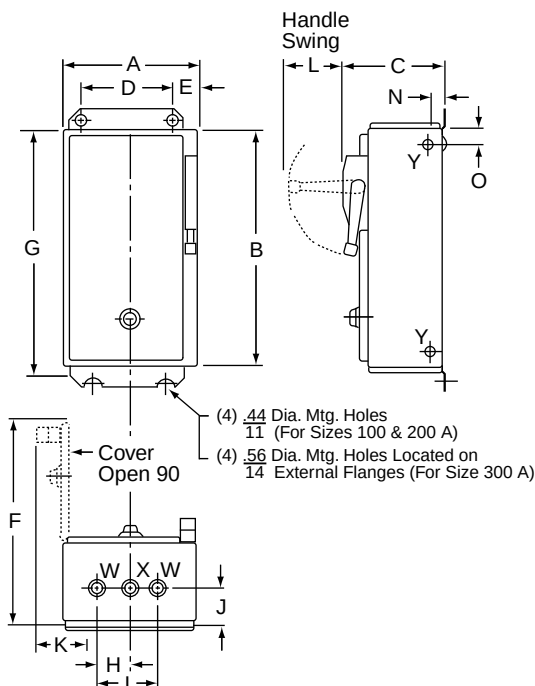

**Figure 16.24: NEMA 1 Enclosure**

[55] Dimensions are the same for Form FF4T (standard control transformer), Form FF4T11 (100 VA extra capacity) and Form FF4T12 (200 VA extra capacity).

Table 16.231: See Figure: NEMA 4, 4X Enclosure

| Ampere Rating | Type                         | Dimensions [56]          |              |               |             |             |              |               |            |             |            |            |              |          |          |
|---------------|------------------------------|--------------------------|--------------|---------------|-------------|-------------|--------------|---------------|------------|-------------|------------|------------|--------------|----------|----------|
|               |                              | A                        | B            | C             | D           | E           | F            | G             | H          | I           | J          | K          | L            | W        | X        |
| 30            | SMW6_, SMW8_                 | 9.50<br>241              | 8.36<br>212  | 24.76<br>629  | 3.25<br>83  | 2.50<br>64  | 4.50<br>114  | 23.50<br>597  | 0.63<br>16 | 3.00<br>76  | 1.62<br>41 | 2.31<br>59 | 14.31<br>363 | 0.75 Hub | 1.0 Hub  |
|               | SMW7_, SMW9_                 | 13.75<br>349             | 8.36<br>212  | 25.26<br>642  | 3.25<br>83  | 4.75<br>121 | 4.25<br>108  | 24.00<br>610  | 0.63<br>16 | 5.25<br>133 | 1.62<br>41 | 2.31<br>59 | 20.14<br>512 | 0.75 Hub | 1.0 Hub  |
| 60            | SPW6_, SPW8_                 | 10.50<br>267             | 9.61<br>244  | 28.26<br>718  | 3.25<br>83  | 2.50<br>64  | 5.50<br>140  | 27.00<br>686  | 0.63<br>16 | 3.00<br>76  | 2.00<br>51 | 2.63<br>67 | 16.56<br>421 | 0.75 Hub | 1.50 Hub |
|               | SPW7_, SPW9_                 | 15.00<br>381             | 9.61<br>244  | 31.01<br>788  | 3.25<br>83  | 5.38<br>137 | 4.25<br>108  | 29.75<br>756  | 0.63<br>16 | 5.88<br>149 | 2.00<br>51 | 2.63<br>67 | 21.06<br>535 | 0.75 Hub | 1.50 Hub |
| 100           | SQW6_, SQW7_<br>SQW8T, SQW9T | 15.25<br>387             | 10.60<br>269 | 41.76<br>1061 | 5.00<br>127 | 2.50<br>64  | 10.25<br>260 | 40.50<br>1029 | 0.63<br>16 | 3.24<br>82  | 2.61<br>66 | 3.19<br>81 | 22.18<br>563 | 0.75 Hub | 2.50 Hub |
| 200           | SVW6_, SVW7_<br>SVW8T, SVW9T | 16.00<br>406             | 10.56<br>268 | 52.26<br>1327 | 5.00<br>127 | 2.50<br>64  | 11.00<br>279 | 51.00<br>1295 | 0.63<br>16 | 3.24<br>82  | 2.61<br>66 | 3.19<br>81 | 23.00<br>584 | 0.75 Hub | 2.50 Hub |
| 300           | SXW6_, SXW7_<br>SXW8T, SXW9T | 20.00<br>508             | 14.21<br>361 | 78.12<br>1984 | 9.25<br>235 | 4.00<br>102 | 12.00<br>305 | 77.00<br>1956 | 0.56<br>14 | 4.77<br>121 | 2.96<br>75 | 3.50<br>89 | 29.43<br>748 | 0.75 Hub | 3.50 Hub |
|               |                              | 20.00<br>508             | 14.21<br>361 | 66.12<br>1679 | 5.00<br>127 | 4.00<br>102 | 12.00<br>305 | 65.00<br>1651 | 0.56<br>14 | 4.77<br>121 | 2.96<br>75 | 3.50<br>89 | 27.43<br>697 | 0.75 Hub | 3.50 Hub |
| 400           | SYW8T, SYW9T                 | Floor Mounting Enclosure |              |               |             |             |              |               |            |             |            |            |              |          |          |
| 600           | SZW8T, SZW9T                 | 36.00<br>914             | 17.71<br>450 | 98.00<br>2489 |             |             |              |               |            |             |            |            |              |          | —        |

Table 16.232: See Figure: NEMA 12/3R Enclosure

| Ampere Rating | Type                         | Dimensions [56]          |              |               |             |             |              |               |            |             |              |
|---------------|------------------------------|--------------------------|--------------|---------------|-------------|-------------|--------------|---------------|------------|-------------|--------------|
|               |                              | A                        | B            | C             | D           | E           | F            | G             | H          | I           | J            |
| 30            | SMA6_, SMA8_                 | 9.50<br>241              | 8.36<br>212  | 24.26<br>616  | 3.25<br>83  | 2.50<br>64  | 4.50<br>114  | 23.50<br>597  | 0.38<br>10 | 3.25<br>83  | 14.31<br>363 |
|               | SMA7_, SMA9_                 | 13.75<br>349             | 10.10<br>257 | 24.76<br>629  | 3.25<br>83  | 4.75<br>121 | 4.25<br>108  | 24.00<br>610  | 0.38<br>10 | 5.50<br>140 | 22.00<br>559 |
| 60            | SPA6_, SPA8_                 | 10.50<br>267             | 9.61<br>244  | 27.76<br>705  | 3.25<br>83  | 2.50<br>64  | 5.50<br>140  | 27.00<br>686  | 0.38<br>10 | 3.25<br>83  | 16.56<br>421 |
|               | SPA7_, SPA9_                 | 15.00<br>381             | 10.98<br>279 | 30.51<br>775  | 3.25<br>83  | 5.38<br>137 | 4.25<br>108  | 29.75<br>756  | 0.38<br>10 | 6.13<br>156 | 23.43<br>595 |
| 100           | SQA6_, SQA7_<br>SQA8T, SQA9T | 15.25<br>387             | 10.59<br>269 | 42.00<br>1067 | 5.00<br>127 | 3.00<br>76  | 9.25<br>235  | 41.00<br>1041 | 0.50<br>13 | 3.75<br>95  | 22.31<br>567 |
| 200           | SVA6_, SVA7_<br>SVA8T, SVA9T | 16.00<br>406             | 10.52<br>267 | 52.50<br>1334 | 5.00<br>127 | 3.00<br>76  | 10.00<br>254 | 51.50<br>1308 | 0.50<br>13 | 3.75<br>95  | 23.00<br>584 |
| 300           | SXA6_, SXA7_<br>SXA8T, SXA9T | 20.00<br>508             | 14.21<br>361 | 78.00<br>1981 | 9.25<br>235 | 4.00<br>102 | 12.00<br>305 | 77.00<br>1956 | 0.50<br>13 | 7.75<br>197 | 29.43<br>748 |
|               |                              | 20.00<br>508             | 14.21<br>361 | 66.00<br>1676 | 5.00<br>127 | 4.00<br>102 | 12.00<br>305 | 65.00<br>1651 | 0.50<br>13 | 7.75<br>197 | 27.43<br>697 |
| 400           | SYA8T, SYA9T                 | Floor Mounting Enclosure |              |               |             |             |              |               |            |             |              |
| 600           | SZA8T, SZA9T                 | 36.00<br>914             | 17.71<br>450 | 90.00<br>2286 |             |             |              |               |            |             |              |

**NOTE:** These dimensions are for reference only. If you need precise measurements, contact the Customer Care Center at 1-888-778-2733.

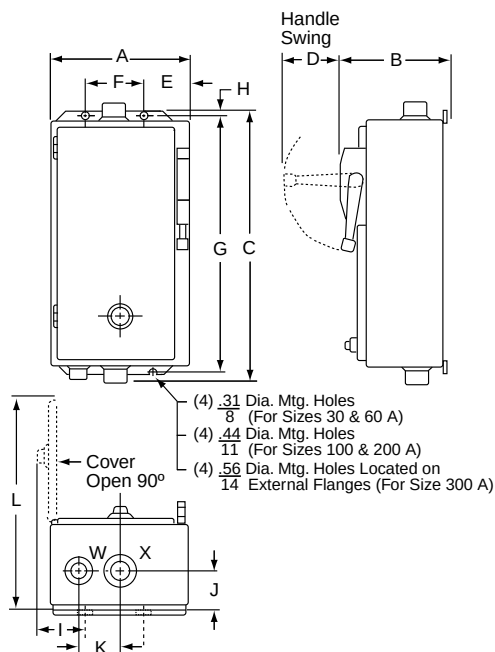


Figure 16.25: NEMA 4, 4X Enclosure

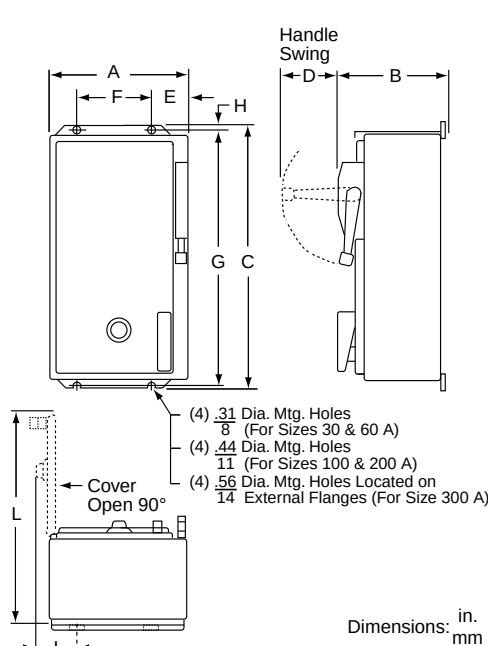


Figure 16.26: NEMA 12/3R Enclosure

[56] Dimensions are the same for Form FF4T (standard control transformer), Form FF4T11 (100 VA extra capacity) and Form FF4T12 (200 VA extra capacity).



8910DP22V09  
Definite Purpose Contactor



8910DP42V14  
Definite Purpose Contactor



8910DPA33V04  
Definite Purpose Contactor

**Table 16.233: Coil Voltage Codes**

| Voltage |       | Code<br>Type DP, DPA |
|---------|-------|----------------------|
| 60 Hz   | 50 Hz |                      |
| 24      | 24    | V14                  |
| 24      | —     | —                    |
| 120     | 110   | V02                  |
| 208     | —     | —                    |
| 208-240 | 220   | V09                  |
| 230-240 | 220   | —                    |
| 277     | —     | V04                  |
| 480     | 440   | V06 [1]              |
| 600     | 550   | V07 [2]              |

Definite purpose contactors are ideal for heating, air conditioning, refrigeration, data processing, and food service equipment. New compact 1 and 2-Pole contactors are available along with standard size 2, 3, and 4-Pole devices.

They feature quick connect terminals and binder head screws for easy wiring. Box lugs are standard on 40 A contactors and larger. An exclusive DIN track mounting option may reduce installation costs. Coils can be changed on the Type DPA contactors (50 to 90 A) quickly without a tool. Auxiliary contact modules snap on either side of the Type DPA contactors.

- Compact Design
- Industry Standard Mounting
- Double Break Contacts
- Low Coil VA
- Straight-Through Wiring
- Low Cost

**Table 16.234: Compact 1-Pole Contactors—600 Vac Maximum**  
(replace ●●● with the voltage code)

| Full Load<br>Amperes | Locked Rotor Amperes |       |       | Resistive Load<br>Amperes           | N.O.<br>Poles | Type [3] |
|----------------------|----------------------|-------|-------|-------------------------------------|---------------|----------|
|                      | 277 V                | 460 V | 575 V |                                     |               |          |
| 20                   | 120                  | 100   | 80    | 30                                  | 1             | DP11●●●  |
| 25                   | 150                  | 125   | 100   | 35                                  | 1             | DP21●●●  |
| 30                   | 150                  | 125   | 100   | 40                                  | 1             | DP31●●●  |
| 40                   | 240                  | 200   | 160   | 50 (277 V max.)<br>40 (above 277 V) | 1             | DP41●●●  |

**Table 16.235: Compact 2-Pole Contactors—600 Vac Maximum**  
(above 240 V, all lines must be switched) (replace ●●● with the voltage code)

| Full Load<br>Amperes | Locked Rotor Amperes |       |       | Resistive Load<br>Amperes | N.O.<br>Poles | Type [3] |
|----------------------|----------------------|-------|-------|---------------------------|---------------|----------|
|                      | 277 V                | 460 V | 575 V |                           |               |          |
| 20                   | 120                  | 100   | 80    | 30                        | 2             | DP12●●●  |
| 25                   | 150                  | 125   | 100   | 35                        | 2             | DP22●●●  |
| 30                   | 150                  | 125   | 100   | 40                        | 2             | DP32●●●  |
| 40                   | 240                  | 200   | 160   | 50                        | 2             | DP42●●●  |

**Table 16.236: 2, 3, and 4-Pole Contactors—600 Vac Maximum**  
(above 240 V, all lines must be switched) (replace ●●● with the voltage code)

| Full Load<br>Amperes | Locked Rotor Amperes |       |       | Resistive<br>Load<br>Amperes | Horsepower Ratings |             |             |                 | N.O.<br>Poles | Type [3]                         |
|----------------------|----------------------|-------|-------|------------------------------|--------------------|-------------|-------------|-----------------|---------------|----------------------------------|
|                      | 230 V                | 460 V | 575 V |                              | 115 V<br>1Ø        | 230 V<br>1Ø | 230 V<br>3Ø | 460/575 V<br>3Ø |               |                                  |
| 20                   | 120                  | 100   | 80    | 30                           | 1.5                | 3           | 7-1/2       | 7-1/2           | 2<br>3<br>4   | DPA12●●●<br>DPA13●●●<br>DPA14●●● |
| 25                   | 150                  | 125   | 100   | 35                           | 2                  | 5           | 10          | 15/20           | 2<br>3<br>4   | DPA22●●●<br>DPA23●●●<br>DPA24●●● |
| 30                   | 180                  | 150   | 120   | 40                           | 2                  | 5           | 10          | 15/20           | 2<br>3<br>4   | DPA32●●●<br>DPA33●●●<br>DPA34●●● |
| 40                   | 240                  | 200   | 160   | 50                           | 3                  | 7-1/2       | 10          | 20/25           | 2<br>3<br>4   | DPA42●●●<br>DPA43●●●<br>DPA44●●● |
| 50                   | 300                  | 250   | 200   | 65                           | 3                  | 10          | 15          | 30              | 2<br>3        | DPA52●●●<br>DPA53●●●             |
| 60                   | 360                  | 300   | 240   | 75                           | 5                  | 10          | 25          | 30              | 2<br>3        | DPA62●●●<br>DPA63●●●             |
| 75                   | 450                  | 375   | 300   | 94                           | 5                  | 15          | 25          | 40              | 2<br>3        | DPA72●●●<br>DPA73●●●             |
| 90                   | 540                  | 450   | 360   | 120                          | 7-1/2              | 20          | 30          | 50              | 2<br>3        | DPA92●●●<br>DPA93●●●             |

[1] Not available for Type DP11 through DP31 single-pole devices.

[2] Not available for Type DP one- and two-pole devices.

[3] Replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard voltage codes listed in Table 16.233.

**Table 16.237: 2 Normally Open & 2 Normally Closed 4-Pole Contactors—600 Vac Maximum**  
(replace ●●● with the voltage code)

| Full Load (A) | Resistive Load (A) | N.O. Poles | N.C. Poles [4] | Class 8910 |      |
|---------------|--------------------|------------|----------------|------------|------|
|               |                    |            |                | Type [5]   | Form |
| 20            | 25                 | 2          | 2              | DPA14●●●   | Y392 |
| 25            | 35                 | 2          | 2              | DPA24●●●   | Y392 |
| 30            | 40                 | 2          | 2              | DPA34●●●   | Y392 |

**NOTE:** N.C. poles on outside. N.C. poles open before N.O. poles close.

**Table 16.238: Auxiliary Contacts, 5 A, 600 Vac Rated**

| For Use with Class 8910, Type | Contact Arrangement | Class 9999 Type |
|-------------------------------|---------------------|-----------------|
| DPA                           | 1 N.O.              | D10             |
|                               | 1 N.C.              | D01             |
|                               | 1 N.O. & 1 N.C.     | D11             |
|                               | 2 N.O.              | D20             |
|                               |                     | D20             |

**Table 16.239: NEMA 1 General Purpose Enclosures**

for Type DP, DPA Contactors

| Class 8910 Type | Full Load (A) | Poles | Class 9991 Type |
|-----------------|---------------|-------|-----------------|
| DP              | 20–40         | 1 & 2 | DPG1            |
| DPA             | 20–40         | 2 & 3 | DPG1            |
| DPA             | 50            | 2 & 3 | DPG2            |
| DPA             | 20–40         | 4     | DPG2            |
| DPA             | 60–75         | 2 & 3 | DPG3            |
| DPA             | 90            | 2 & 3 | DPG4            |

**Table 16.240: Terminals**

| Full Load (A) | Power Terminals        |                |
|---------------|------------------------|----------------|
|               | Type of Lug [6]        | Wire Range [7] |
| 20–30 A       | Binder Head            | 14–8           |
| 40 A          | Box Lug or Ring Tongue | 14–6           |
| 50–60 A       | Box Lug or Ring Tongue | 14–2           |
| 75–90 A       | Box Lug or Ring Tongue | 14–1/0         |

**Table 16.241: Miscellaneous Parts**

| Description                                         | Class 9999 Type |
|-----------------------------------------------------|-----------------|
| DIN mounting bracket attachment (Type DPA, 20–60 A) | DMB1            |
| Type DP Series B Cover                              | DPC1            |

**Table 16.242: Factory Modifications**

| Modification                                         | Type   | Form   |
|------------------------------------------------------|--------|--------|
| Factory installed auxiliary contacts                 | —      | [8]    |
| Pressure wire connectors, 20–30 A                    | DPA    | Y122   |
| Box lugs, 20–30 A                                    | DP DPA | Y124   |
| DIN mounting bracket attached (35 mm style), 20–60 A | DP DPA | Y135   |
| Contact cover for Type DP Series B                   | —      | Y248   |
| UL Listed label on device                            | DP     | U1 [9] |
| Ring tongue terminals: 30–90 A 3 pole DPA contactors | DPA    | RT     |

## Types DP, DPA Application Data

### Factory Modifications

Auxiliary contacts can be factory installed along with a DIN mounting bracket option. Special terminations are also available.

**Table 16.243: Application Data**


| Description                                                                                       | Specification                                                               |
|---------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|
| Mechanical Life (depending on the application)                                                    | 500,000 operations                                                          |
| Electrical Life (depending on the application)                                                    | 100,000 operations<br>200,000 operations                                    |
| Type DP<br>Type DPA                                                                               | Continuous                                                                  |
| Approvals:<br>UL Component Recognized<br>UL Listed (Form U1)<br>CSA Certified<br>DPA is CE marked | File E3190, CCN NLDX2<br>File E3190, CCN NLDX<br>File LR25490, Class 321104 |

**NOTE:** See page 16-124 for replacement contacts.

**Table 16.244: Type DPA Coil Voltage Codes**

| Voltage, 60 Hz | Voltage, 50 Hz | Voltage Code |
|----------------|----------------|--------------|
| 24             | 24             | V14          |
| 120            | 110            | V02          |
| 208–240        | 220            | V09          |
| 277            | —              | V04          |
| 480            | 440            | V06 [10]     |
| 600            | 550            | V07 [10]     |

**Table 16.245: Coil Replacement**

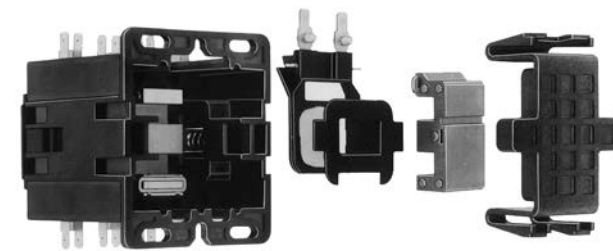

No tools required (DPA50–60A)

**Table 16.246: Class 8910 Type DPA Replacement Coils**  
(replace ●●● with the voltage code)

| Full Load (A) | Poles | Class 9998 Type [11] | Volt-Amperes [12] |        |
|---------------|-------|----------------------|-------------------|--------|
|               |       |                      | Inrush            | Sealed |
| 50–60 A       | 2 & 3 | DA2●●●               | 109               | 10     |
| 75–90 A       | 2 & 3 | DA3●●●               | 214               | 19     |

[4] Above 240 V, all lines must be switched.

[5] Replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard voltage codes in Table 16.244.

[6] For Ring Tongue, add RT after coil voltage.

[7] Solid or stranded copper wire only.

[8] Contact your local Schneider Electric sales office.


[9] Form U1, Type DPA3• and DPA4• have lighting ratings per pole: Tungsten 250 V, 60 Hz, 30 A; and Ballast 277 V, 60 Hz, 40 A.

[10] Available for Type DPA contactors only.

[11] Append the voltage code from Table 16.244. Example: The coil for Class 8910 Type DPA53V02, 120 V, 60 Hz is Class 9998 Type DA2V02.


[12] For Types DP11 through DP32: Inrush 30 VA; Sealed 5 VA.

**Types DP, DPA Approximate Dimensions**

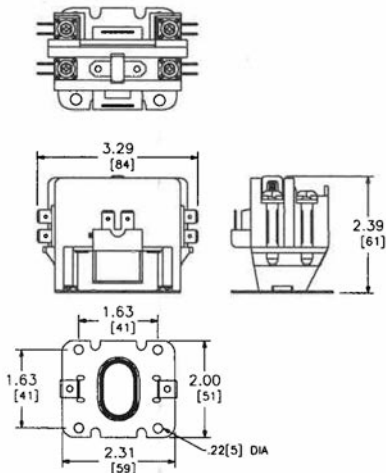


No Cover, No DIN

Type DP—1-Pole  
20 through 40 Full Load Amperes

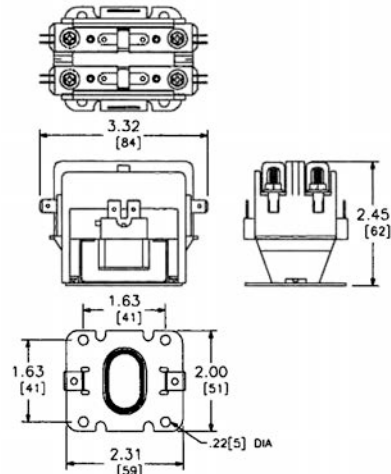


No Cover, No DIN

Type DP—2-Pole  
20 through 40 Full Load Amperes

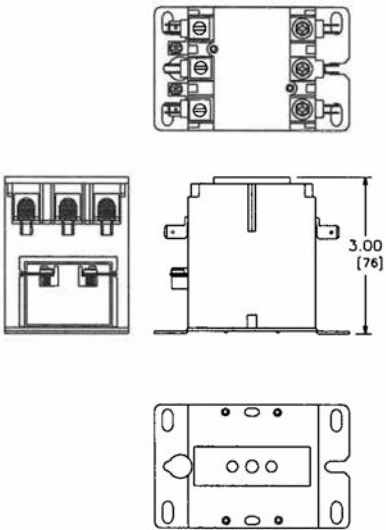


With Cover, No DIN

Type DPA—2 and 3-Pole  
20 through 40 Full Load Amperes

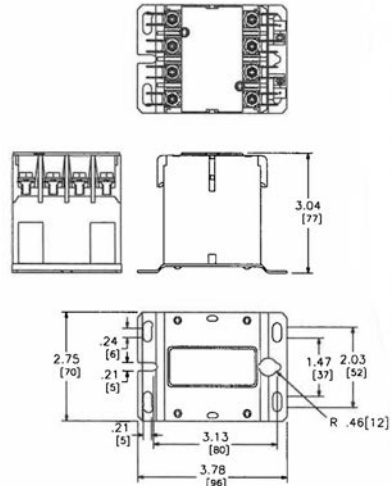


With Cover, No DIN

Type DPA—4-Pole  
20 through 40 Full Load Amperes

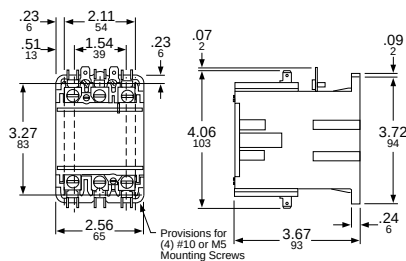

Type DPA—2 and 3-Pole  
50 and 60 Full Load Amperes

Dimensions: in.  
mm

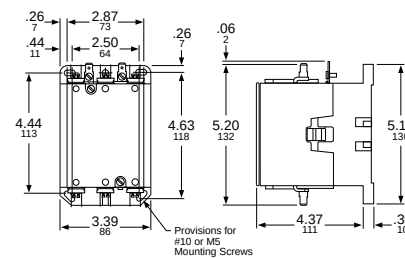

Type DPA—2 and 3-Pole  
75 and 90 Full Load Amperes





8911DPSO33V09 Definite Purpose Starter



Type DPSG23V02

## Types DPS and H through M

Class 8911 definite purpose starters are inexpensive starters for applications with relatively low duty cycles. Typical applications include air compressors, agricultural equipment, pumps, and HVAC equipment. Definite purpose starters offer:

- Low cost
- Small size
- Melting alloy overload block
- Trip-free reset mechanism
- Open type or enclosed
- 500,000 mechanical operations

**Table 16.247: 2- and 3-Pole Starters—600 Vac Maximum**

| No. of Poles              | Full Load (A) | Horsepower Ratings |             |             |                 | Open Type<br>Type [2], [3] | NEMA 1 Enclosed<br>Type [2], [3] | No. of Thermal Units [1] |
|---------------------------|---------------|--------------------|-------------|-------------|-----------------|----------------------------|----------------------------------|--------------------------|
|                           |               | 115 V<br>1Ø        | 230 V<br>1Ø | 230 V<br>3Ø | 460/575 V<br>3Ø |                            |                                  |                          |
| 2-Pole<br>Single<br>Phase | 20            | 1.5                | 3           | —           | —               | DPSO12●●●                  | DPSG12●●●                        | 1                        |
|                           | 25            | 2                  | 5           | —           | —               | DPSO22●●●                  | DPSG22●●●                        |                          |
|                           | 30            | 2                  | 5           | —           | —               | DPSO32●●●                  | DPSG32●●●                        |                          |
|                           | 40            | 3                  | 7.5         | —           | —               | DPSO42●●●                  | DPSG42●●●                        |                          |
| 3-Pole<br>Poly-<br>Phase  | 50            | 3                  | 10          | —           | —               | DPSO52●●●                  | DPSG52●●●                        | 3                        |
|                           | 20            | 1.5                | 3           | 7.5         | 7.5             | DPSO13●●●                  | DPSG13●●●                        |                          |
|                           | 25            | 2                  | 5           | 10          | 15/20           | DPSO23●●●                  | DPSG23●●●                        |                          |
|                           | 30            | 2                  | 5           | 10          | 15/20           | DPSO33●●●                  | DPSG33●●●                        |                          |
|                           | 40            | 3                  | 7.5         | 10          | 20/25           | DPSO43●●●                  | DPSG43●●●                        |                          |
|                           | 50            | 3                  | 10          | 15          | 30              | DPSO53●●●                  | DPSG53●●●                        |                          |

**Table 16.248: Cross Reference Existing/Replacement Class 8911**

| Existing Device | Replacement Device |
|-----------------|--------------------|
| HO33            | DPSO13             |
| HG33            | DPSG13             |
| JO33            | DPSO23             |
| JG33            | DPSG23             |
| KO33            | DPSO33             |
| KG33            | DPSG33             |
| KO43            | [4]                |
| KG43            | [4]                |
| LO33            | DPSO43             |
| LG33            | DPSG43             |
| MO33            | DPSO53             |
| MG33            |                    |
| MO43            | DPSG53             |
|                 | [4]                |
| MG43            | [4]                |

**Table 16.249: Miscellaneous Parts and Kits**

| Description                                          | Class & Type |
|------------------------------------------------------|--------------|
| Start-Stop push button kit [5]                       | 8911DPB1     |
| Hand-Off-Auto selector switch kit [6]                | 8911DSS1     |
| Standard N.C. overload relay contact                 | 9998SO1      |
| N.C. and N.O. isolated overload relay alarm contacts | 9999SO4      |
| Overload relay jumper strap                          | 9998SO31     |

**Table 16.250: Replacement Magnet Coil for Class 8911 Type DPS**

| Full Load (A) | Poles   | Class 9998 Type | Volt A |        |
|---------------|---------|-----------------|--------|--------|
|               |         |                 | Inrush | Sealed |
| 50 A          | 2 and 3 | DA2 [7]         | 109    | 10     |

See page 16-124 for replacement contacts for DPS devices.

**Table 16.251: Coil Voltage Codes**

| Voltage, 60 Hz | Voltage, 50 Hz | Voltage Code |
|----------------|----------------|--------------|
| 24             | 24             | V14          |
| 120            | 110            | V02          |
| 208-240        | 220            | V09          |
| 277            | —              | V04          |
| 480            | 440            | V06          |
| 600            | 550            | V07          |

**Table 16.252: Auxiliary Contacts for Type DPS Starters**

| Description   | 20-90 A         |
|---------------|-----------------|
|               | Class 9999 Type |
| 1 N.O.        | D10             |
| 1 N.C.        | D01             |
| 1 N.O./1 N.C. | D11             |
| 2 N.O.        | D20             |


**NOTE:** Auxiliary contacts must be field installed.

**Table 16.253: Ratings—Overload Contacts and Auxiliary Contacts**

| Device                   | Volts AC    | Pilot Duty – AC Only (35% Power Factor) |                 | Continuous Current Rating |
|--------------------------|-------------|-----------------------------------------|-----------------|---------------------------|
|                          |             | Make                                    | Carry and Break |                           |
| 9998 SO1                 | 120 or Less | 30 A                                    | 3 A             | 5 A                       |
| 9999 SO4                 |             |                                         |                 |                           |
| 9999 R20 & R21           | 120-600     | 3600 VA                                 | 360 VA          | 5 A                       |
| 9999 D10, D01, D11 & D20 |             |                                         |                 |                           |

**Table 16.254: How to Order**

| To Order Specify: | Catalog Number |        |                   |         |
|-------------------|----------------|--------|-------------------|---------|
| • Class Number    | Class          | Type   | Coil Voltage Code | Form(s) |
| • Type Number     |                |        |                   |         |
| • Voltage Code    |                |        |                   |         |
| • Form(s)         | 8911           | DPSG33 | V02               |         |

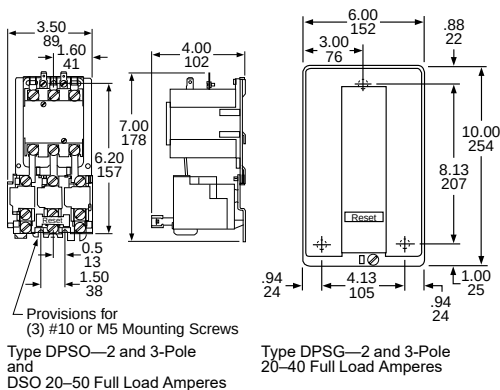

[1] See for selection information on standard trip thermal units.

[2] Holding circuit contacts are not provided as standard; refer to Table 16.252 for kit.

[3] Replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard voltage codes listed in Table 16.251.

[4] Type DPS 4-pole starter not available. Suggest 3-pole device with auxiliary contact.

[5] Does not include holding circuit interlock—order auxiliary contact.

[6] Use for 20 to 40 A starters. For 50 A starters, use the 9999BLX bracket.

[7] Append the coil voltage code from Table 16.251.



Type SSD4030



Type SSE4050

### Class 8940 Type SS, XS Selection

Class 8940 Type SS and XS panels in NEMA 3R enclosures are specifically designed for pumping applications. Extra space is provided for field installation of auxiliary equipment.

- Type S Contactor provided as standard
- Approved for submersible pump applications
- Motor Logic™ Class 10/20 (Selectable) SSOLR through 200 hp—480 V, 100 hp—240 V. Included in the catalog number for Type SS (the H30 suffix is required only for eMCP units). (Includes rubber boot.)
- All prices include a Start push button and a Hand-Off-Auto selector switch
- Adjustable trip current
- Phase failure sensitive
- Ambient temperature compensated overload
- All devices are UL Listed, and marked "Suitable For Use As Service Equipment"

**NOTE:** Motor Logic™ SSOLRs are designed to protect 50/60 Hz, three-phase AC motors from overload and phase loss conditions. Open Delta systems or grounded B-phase systems are difficult to balance and could cause the Motor Logic SSOLR to trip. For applications of this nature, it is recommended that bimetallic overload relays (Form B12) be used.

**Table 16.255: 3-Pole Polyphase—480 Vac Maximum (50–60 Hz)—Fusible or Thermal-Magnetic Circuit Breaker [1]**

| Volts | Maximum Hp Polyphase | Coil Voltage     | Fuse Clip (A) [2] | Type           |
|-------|----------------------|------------------|-------------------|----------------|
| 240   | 3, 5, 7.5            | 240–60<br>220–50 | 30                | SSC2007 [4][5] |
|       | 10, 15               |                  | 60                | SSD2015 [4][5] |
|       | 20, 25, 30           |                  | 100               | SSE2030 [4]    |
|       | 40, 50               |                  | 200               | SSF2050 [4]    |
|       | 75                   |                  | LLS36400U31X [3]  | XSG2075 [6]    |
|       | 100                  |                  | 400               | SSG2100 [4]    |
|       | 100                  |                  | LLS36600U31X [3]  | XSG2100 [6]    |
|       | 200                  |                  | MJL36800 [3]      | XSH2200 [6]    |
|       | 250, 300             |                  | PLL34120 [3]      | XSJ2300 [6]    |
|       |                      |                  |                   |                |
| 480   | 3, 5, 7-1/2, 10      | 480–60<br>440–50 | 30                | SSC4010 [4][5] |
|       | 15, 20, 25           |                  | 60                | SSD4025 [4][5] |
|       | 30                   |                  | 100               | SSD4030 [4][5] |
|       | 40, 50               |                  | 200               | SSE4050 [4]    |
|       | 60, 75, 100          |                  | 400               | SSF4100 [4]    |
|       | 150                  |                  | LLS36400U31X [3]  | XSG4150 [6]    |
|       | 200                  |                  | 400               | SSG4200 [4]    |
|       | 200                  |                  | LLS36600U31X [3]  | XSG4200 [6]    |
|       | 300, 350, 400        |                  | MJL36800 [3]      | XSH4400 [6]    |
|       | 500, 600             |                  | PLL34120 [3]      | XSJ4600 [6]    |

**Table 16.256: 3-Pole Polyphase—480 Vac Maximum (50–60 Hz)—Electronic Motor Circuit Protector (MCP)**

| Volts | Max. Hp Polyphase | Coil Voltage [6] | Circuit Breaker [7] | Type               |
|-------|-------------------|------------------|---------------------|--------------------|
| 240   | 30                | 240–60<br>220–50 | HLL36100M73         | XSE2030V03H30      |
|       | 40                |                  | JLL36250M75         | XSE2040V03H309 [8] |
|       | 50                |                  | JLL36250M75         | XSF2050V03H30      |
|       | 40                |                  | HLL36100M73         | XSE4040V06H30      |
| 480   | 40                | 480–60<br>440–50 | HLL36100M73         | XSE4050V06H30      |
|       | 50                |                  | JLL36250M75         | XSE4075V06H309 [8] |
|       | 75                |                  | JLL36250M75         | XSF4100V06H30      |
|       | 100               |                  | JLL36250M75         | XSF4100V06H30      |

**Table 16.257: Class 8940—UL Listed Short Circuit Ratings**

| NEMA Size                             | NEMA Fuse Class or Voltage | Enclosure | Available Amperes RMS Symmetrical |
|---------------------------------------|----------------------------|-----------|-----------------------------------|
| Fusible Type                          |                            |           |                                   |
| 0–3                                   | Class H or K               | Standard  | 5,000                             |
| 0–3                                   | Class R                    | Standard  | 100,000                           |
| 0–2                                   | Class H or K               | Standard  | 5,000                             |
| 0–2                                   | Class R                    | Standard  | 100,000                           |
| 4–5                                   | Class H or K               | Standard  | 10,000                            |
| 4–5                                   | Class R                    | Standard  | 100,000                           |
| 6                                     | Class H or K               | Standard  | 18,000                            |
| 6                                     | Class R                    | Standard  | 100,000                           |
| Thermal-Magnetic Circuit Breaker Type |                            |           |                                   |
| 0–5                                   | 0–480 V                    | Standard  | 100,000                           |
| 6, 7                                  | 0–480 V                    | Standard  | 65,000                            |

**NOTE:** Standard enclosures include non-oversize NEMA 1, 4 & 4X Stainless, and 12.

For How to Order information, see page 16-28.

[1] To substitute an IEC ambient compensated bimetallic overload relay (up to size 5) for the Motor Logic SSOLR, request Form B12 and state motor hp (no charge). This applies to the above (SSx) devices only.  
 [2] Fuse clips are sized for use with dual-element time-delay fuses.  
 [3] Circuit breaker disconnect supplied. (See Section 7 for circuit breaker adjustment range.)  
 [4] A voltage code is not required for 240 V or 480 V common control with 8940SS controllers.  
 [5] To select a Motor Logic SSOLR with an FLA lower than the standard NEMA sizing, use the four-character Form H30•. See the section "Solid-State Overload Relay Forms."  
 [6] See Table 16.258 for coil voltage codes.  
 [7] See page 7-32 for circuit breaker adjustment range.  
 [8] FLA is 45–135.



Type WC3S2V06



Type XE3S2V02B12S

**Table 16.258: Coil Voltage Codes**

| Voltage     |         | Code |
|-------------|---------|------|
| 60 Hz       | 50 Hz   |      |
| 24 [9] [10] | —       | V01  |
| 120 [9]     | 110 [9] | V02  |
| 208 [9]     | —       | V08  |
| 240         | 220     | V03  |
| —           | 380     | V05  |
| 480         | 440     | V06  |
| 600 [9]     | 550 [9] | V07  |
| Specify     | Specify | V99  |

**Table 16.259: Replacement Overload Relay for Square D Class 8940 Pump Panel with IEC Style Bimetallic Overload Relays Mounted on Current Transformers**

| Ampere Range | Number of Poles | Form | Series | Type [11]  |
|--------------|-----------------|------|--------|------------|
| 40–63 A      | 3               | B12  | B      | 9065TJF40  |
| 63–100 A     | 3               | B12  | B      | 9065TJF63  |
| 100–160 A    | 3               | B12  | B      | 9065TJF100 |
| 160–250 A    | 3               | B12  | B      | 9065TJF160 |

**Class 8940 Type W, X**

Class 8940 style S2 pumping plant panels in NEMA 3R enclosures are specifically designed for oil field applications. All panels are supplied with an electronic motor circuit protector (MCP) or a visible blade, fused, disconnect switch. This line of pumping plant panels features:

- Rugged spring latches for easy access without a tool
- Side mounted control units for convenient operation
- Door retainer available for windy areas
- Includes Hand-Off-Auto selector switch
- Motor Logic™ Class 10/20 (selectable) SSOLR included (the H30 suffix is required).
- UL Listed for use as service equipment for motors
- Extra panel space for additional electrical controls
- All devices are UL Listed, and marked "SUITABLE FOR USE AS SERVICE EQUIPMENT"

**NOTE:** Motor Logic™ SSOLRs are designed to protect 50/60 Hz, three-phase AC motors from overload and phase loss conditions. Open Delta systems or grounded B-phase systems are difficult to balance and could cause the Motor Logic SSOLR to trip. For such applications, we recommend bimetallic overload relays (Form B12).

**Table 16.260: 3-Pole Polyphase—480 Vac Maximum (50–60 Hz)**

| V   | Max. Hp Poly-phase | Coil Voltage [12] | NEMA Size | Fusible Disconnect Type |                  | Circuit Breaker Type |                  |
|-----|--------------------|-------------------|-----------|-------------------------|------------------|----------------------|------------------|
|     |                    |                   |           | Fuse Clip (A) [13]      | Type             | Frame Size           | Type             |
| 240 | 7-1/2              | 240–60<br>220–50  | 1         | 30                      | WC1S2V03H30 [14] | HLL36030M71          | XC1S2V03H30 [14] |
|     | 10                 |                   | 2         | 60                      | WD1S2V03H30 [14] | HLL36050M72          | XD1S2V03H30 [14] |
|     | 15                 |                   |           |                         |                  | HLL36100M73          | XD2S2V03H30 [14] |
|     | 30                 |                   |           |                         |                  | HLL36100M73          | XE1S2V03H30      |
|     | 50                 |                   |           |                         |                  | JLL36250M75          | XF2S2V03H30      |
| 480 | 10                 | 480–60<br>440–50  | 1         | 30                      | WC3S2V06H30      | HLL36030M71          | XC4S2V06H30      |
|     | 15                 |                   | 2         | 60                      | WD3S2V06H30      | HLL36030M71          | XD3S2V06H30      |
|     | 25                 |                   | 2         |                         |                  | HLL36050M72          | XD4S2V06H30      |
|     | 50                 |                   | 3         |                         |                  | HLL36100M73          | XE3S2V06H30      |
|     | 100                |                   | 4         |                         |                  | JLL36250M75          | XF4S2V06H30      |
|     |                    |                   | 3         | 100                     | WE3S2V06H30      |                      |                  |

**Table 16.261: Factory Modifications (Forms)**

| Description                                                                                                                                                                                                                                                                                                      | Form   |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| Substitute Class 10 IEC overload relay – state motor hp (NEMA Sizes 0–4 only)                                                                                                                                                                                                                                    | B12    |
| Control transformer with fused primary, Types: <ul style="list-style-type: none"> <li>• NPD, NPE, NPF, SSC, WC, XC (50 VA)</li> <li>• NPG, SSD, XD, WD (100 VA)</li> <li>• NPJ, SSE, XE, WE (150 VA)</li> <li>• SSF, XF, WF (300 VA)</li> <li>• SG, NSG, XSG (50 VA and an interposing control relay)</li> </ul> | F4T    |
| Factory-installed door wind latch assembly in a standard Class 8940 Type SSC, SSD, SSE, SSF, XSE, and XSF                                                                                                                                                                                                        | G45    |
| Elapsed time meter                                                                                                                                                                                                                                                                                               | G97    |
| Substitute Class 10/20 (selectable) Motor Logic™ SSOLR [15]                                                                                                                                                                                                                                                      | H30    |
| On Delay Timer                                                                                                                                                                                                                                                                                                   | K25    |
| Off Delay Timer                                                                                                                                                                                                                                                                                                  | K26    |
| Program timer with day omission feature                                                                                                                                                                                                                                                                          | K141   |
| Backspin timer (time delay upon energization)                                                                                                                                                                                                                                                                    | K15    |
| Start push button (S2 panels only)                                                                                                                                                                                                                                                                               | A28    |
| Slim panel (Types WC, WD, WE, XC, XD, XE only)                                                                                                                                                                                                                                                                   | L8     |
| Short panel (Types SSE, SSF, XE-S2 and XF-S2 only)                                                                                                                                                                                                                                                               | L9     |
| Pilot light (specify lens color). Does not include auxiliary contact.                                                                                                                                                                                                                                            | P [16] |
| Separate control                                                                                                                                                                                                                                                                                                 | S      |
| Auxiliary contacts (specify N.O. or N.C.)                                                                                                                                                                                                                                                                        | X [17] |
| Special UL panel label for modified UL Listed devices on non-standard panels (requires approval by the manufacturing plant)                                                                                                                                                                                      | Y1     |
| Lightning arrestor                                                                                                                                                                                                                                                                                               | Y1532  |
| Move control operators from the enclosure side to the door                                                                                                                                                                                                                                                       | Y45    |
| Phase failure, phase reversal relay with time delay including under and over voltage protection                                                                                                                                                                                                                  | R44    |
| Substitute standard trip melting alloy overload relays                                                                                                                                                                                                                                                           | Y61    |
| Substitute quick-trip melting alloy overload relay (Sizes 1 and 2 only)—Not available on IEC style contactors                                                                                                                                                                                                    | Y611   |
| Substitution of Class R rejection fuse clips for standard fuse clip. (8940 RD, RE, RF, RG, MD, ME, MF, MG, SSC, SSD, SSE, SSF, SSG, WC, WD, WE and WF)                                                                                                                                                           | Y1071  |

[9] Form S required for separate control.

[10] 24 V coils are not available on Size 4–7 starters. On Size 1–3 starters, 24 V coils are available using Form S.

[11] A retro-fit reset kit is required for pre-series B pump panels. See page 16-109 for selection.

[12] Coil voltage code must be supplied to order this product. See Table 16.258 for codes.

[13] Fuse clips are sized for use with dual-element time-delay fuses.

[14] To select a Motor Logic SSOLR with an FLA lower than the standard NEMA sizing, use the four-character Form H30•. See the section "Solid-State Overload Relay Forms."

[15] Motor Logic SSOLR are designed to protect 50/60 hertz three-phase AC motors from overload, phase unbalance and phase loss conditions. Open Delta systems or grounded B-phase systems are difficult to balance and could cause the Motor Logic SSOLR to trip. For applications of this nature, it is recommended that bi-metallic overload relays (Form B12) be used.

[16] Indicate pilot light color as Form P1 (red) or Form P2 (green). See page 16-117 for more selections.

[17] To determine the maximum number of auxiliary contacts which can be added to each Type S device and for the appropriate "X Form," refer to Table 16.85 (for non-reversing single-speed devices) or to Table 16.170 (for reversing or two-speed devices).

For How to Order Information, see [page 16-28](#).

**Approximate Dimensions**
**NOTE:** These dimensions are for reference only. If you need precise measurements, contact the Customer Care Center at 1-888-778-2733.

**Table 16.262:**

| Type                             | Fig. | A<br>in.<br>mm | B<br>in.<br>mm | C<br>in.<br>mm | D<br>in.<br>mm | E<br>in.<br>mm | F<br>in.<br>mm | G<br>in.<br>mm | H<br>in.<br>mm | J<br>in.<br>mm | K<br>in.<br>mm | L<br>Conduit | M<br>in.<br>mm | Knockouts |                 |                 | V<br>in.<br>mm |
|----------------------------------|------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|--------------|----------------|-----------|-----------------|-----------------|----------------|
| NPD/E/F                          |      |                |                |                |                |                |                |                |                |                |                |              |                |           |                 |                 |                |
| SSC<br>SSD                       | 1    | 39.05<br>992   | 13.73<br>349   | 6.67<br>169    | 9.70<br>246    | 33.05<br>839   | 37.93<br>963   | 7.00<br>178    | 2.41<br>61     | 3.00<br>76     | 3.00<br>76     | 2.5          | 2.41<br>61     | 0.5–0.75  | 1.25–1.5        | 0.5–0.75        | 1.41<br>36     |
| NPG/J<br>SSE/F<br>XSE/F          | 1    | 49.00<br>1245  | 19.15<br>486   | 8.81<br>224    | 10.37<br>263   | 44.07<br>1119  | 47.88<br>1216  | 7.00<br>178    | 2.17<br>55     | 2.69<br>68     | 3.44<br>87     | 2.5          | 2.57<br>65     | 0.5–0.75  | 1–1.25<br>1–2.5 | 1–1.25<br>1.5–2 | 1.41<br>36     |
| WC—S2<br>WD—S2<br>XC—S2<br>XD—S2 | 1    | 38.50<br>978   | 19.00<br>483   | 7.29<br>185    | 9.39<br>239    | 34.00<br>864   | 37.38<br>949   | 7.00<br>178    | 2.18<br>55     | 2.13<br>54     | 2.13<br>54     | 1.5          | 2.12<br>54     | 0.5–0.75  | 1–1.25<br>1.5   | 0.5–0.75        | —              |
| WE—S2<br>WF—S2<br>XE—S2<br>XF—S2 | 1    | 56.50<br>1435  | 23.00<br>584   | 8.23<br>209    | 10.33<br>262   | 52.00<br>1321  | 55.38<br>1407  | 7.00<br>178    | 2.18<br>55     | 2.69<br>68     | 3.44<br>87     | 2            | 2.68<br>68     | 0.5–0.75  | 1–1.25<br>2–2.5 | 1–1.25<br>1.5–2 | 1.50<br>38     |
| SSG<br>XSG                       | 1    | 75.50<br>1892  | 22.00<br>559   | 13.80<br>351   | 17.55<br>446   | 73.00<br>1854  | 74.50<br>1881  | 14.00<br>356   | N/A            | 0.56<br>14     | N/A            | N/A          | N/A            | N/A       | N/A             | N/A             | 1.50<br>38     |
| XSH                              | 2    | 82.50<br>2096  | 36.00<br>914   | 20.00<br>508   | 23.25<br>591   | 80.00<br>2032  | 83.75<br>2127  | 16.50<br>419   | N/A            | N/A            | N/A            | N/A          | N/A            | N/A       | N/A             | N/A             | N/A            |
| XSJ                              | 2    | 92.50<br>2350  | 34.00<br>864   | 20.00<br>508   | 23.25<br>591   | 90.00<br>2286  | 91.75<br>2329  | 16.50<br>419   | N/A            | N/A            | N/A            | N/A          | N/A            | N/A       | N/A             | N/A             | N/A            |

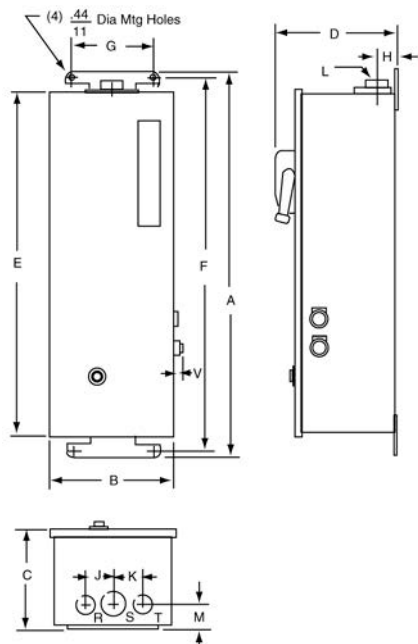
**NOTE:** Illustrations may not represent the actual enclosure. They are intended for dimensional information only.


Figure 1

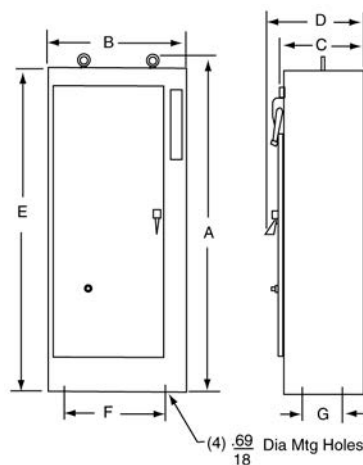
 Dimensions: in.  
mm


Figure 2



## Selection

Duplex Motor Controllers are used to control two motors, and consist of two starters in a common enclosure. Two separate disconnect switches or circuit breakers with operators are included with all combination devices. Unless **Form Y68** is specified, an alternation circuit (a Class 8501 Type XO40 relay) is included, which alternately operates first one motor and then the other on each successive closing of a pilot device. Both motors will be energized should a second pilot device close. All devices incorporate a terminal block to simplify wiring of pilot devices A and B. Typical applications include pump motors where a second pump is required for peak demand periods yet alternation is desirable to equalize pump wear.

**Table 16.263: 3-Pole Polyphase—600 Vac Maximum (50–60 Hz)  
Non-Combination Type—Without Disconnect—With Electric Alternation  
(replace ●●● with the voltage code)**

(Devices require 6 thermal units. See [Thermal Unit Selection, page 16-132.](#))

| NEMA Size | Maximum Rating Each Motor |                 | NEMA 1 General Purpose Enclosure | NEMA 4/4X Watertight and Dusttight Enclosure Stainless Steel | NEMA 12 (NEMA 3 and 3R) [1] Dusttight and Driptight Industrial Use Enclosure | Open Type |
|-----------|---------------------------|-----------------|----------------------------------|--------------------------------------------------------------|------------------------------------------------------------------------------|-----------|
|           | Voltage                   | Hp Polyphase    | Type [2]                         | Type [2]                                                     | Type [2]                                                                     | Type [2]  |
| 0         | 200–230<br>460–575        | 3<br>5          | NBG10●●●                         | NBW10●●●                                                     | NBA10●●●                                                                     | NBO10●●●  |
| 1         | 200–230<br>460–575        | 7.5<br>10       | NCG20●●●                         | NCW20●●●                                                     | NCA20●●●                                                                     | NCO20●●●  |
| 2         | 200<br>230<br>460–575     | 10<br>15<br>25  | NDG30●●●                         | NDW30●●●                                                     | NDA30●●●                                                                     | NDO30●●●  |
| 3         | 200<br>230<br>460–575     | 25<br>30<br>50  | NEG40●●●                         | NEW40●●●                                                     | NEA40●●●                                                                     | NEO40●●●  |
| 4         | 200<br>230<br>460–575     | 40<br>50<br>100 | NFG50●●●                         | NFW50●●●                                                     | NFA50●●●                                                                     | NFO50●●●  |

**Table 16.264: 3-Pole Polyphase—600 Vac Maximum (50–60 Hz) Combination Thermal Magnetic Circuit Breaker Type—With Electric Alternation (replace ●●● with the voltage code) (Devices require 6 thermal units. See [Thermal Unit Selection, page 16-132.](#))**

| Motor Starter Voltage | Max. Hp Polyphase | Coil Voltage     | NEMA Size | Circuit Breaker                  |                   | NEMA 1 General Purpose Enclosure    | NEMA 4/4X Watertight and Dusttight Enclosure Stainless Steel | NEMA 12 (NEMA 3 and 3R) [1] Dusttight and Driptight Industrial Use Enclosure |
|-----------------------|-------------------|------------------|-----------|----------------------------------|-------------------|-------------------------------------|--------------------------------------------------------------|------------------------------------------------------------------------------|
|                       |                   |                  |           | Frame Size                       | Ampere Rating     | Type [2]                            | Type [2]                                                     | Type [2]                                                                     |
| 200<br>(208)          | 2                 | 208–60           | 0         | HLL36015<br>HLL36020             | 15<br>20          | CBG06 ●●●<br>CBG08 ●●●              | CBW06 ●●●<br>CBW08 ●●●                                       | CBA06 ●●●<br>CBA08 ●●●                                                       |
|                       | 3                 |                  | 1         | HLL36035<br>HLL36050             | 35<br>50          | CCG12 ●●●<br>CCG15 ●●●              | CCW12 ●●●<br>CCW15 ●●●                                       | CCA12 ●●●<br>CCA15 ●●●                                                       |
|                       | 5                 |                  | 2         | HLL36060                         | 60                | CDG22 ●●●                           | CDW22 ●●●                                                    | CDA22 ●●●                                                                    |
|                       | 10                |                  | 3         | HLL36100<br>HLL36125<br>HLL36150 | 100<br>125<br>150 | CEG32 ●●●<br>CEG36 ●●●<br>CEG38 ●●● | CEW32 ●●●<br>CEW36 ●●●<br>CEW38 ●●●                          | CEA32 ●●●<br>CEA36 ●●●<br>CEA38 ●●●                                          |
|                       | 20                |                  | 4         | JLL36200<br>JLL36250             | 200<br>250        | CFG41 ●●●<br>CFG44 ●●●              | CFW41 ●●●<br>CFW44 ●●●                                       | CFA41 ●●●<br>CFA44 ●●●                                                       |
|                       | 25                |                  |           |                                  |                   |                                     |                                                              |                                                                              |
| 230<br>(240)          | 30                | 240–60<br>220–50 | 0         | HLL36015<br>HLL36020             | 15<br>20          | CBG06 ●●●<br>CBG08 ●●●              | CBW06 ●●●<br>CBW08 ●●●                                       | CBA06 ●●●<br>CBA08 ●●●                                                       |
|                       | 40                |                  | 1         | HLL36035<br>HLL36045             | 35<br>45          | CCG14 ●●●<br>CCG16 ●●●              | CCW14 ●●●<br>CCW16 ●●●                                       | CCA14 ●●●<br>CCA16 ●●●                                                       |
|                       | 50                |                  | 2         | HLL36060<br>HLL36090             | 60<br>90          | CDG22 ●●●<br>CDG24 ●●●              | CDW22 ●●●<br>CDW24 ●●●                                       | CDA22 ●●●<br>CDA24 ●●●                                                       |
|                       |                   |                  | 3         | HLL36150                         | 150               | CEG38 ●●●                           | CEW38 ●●●                                                    | CEA38 ●●●                                                                    |
|                       |                   |                  | 4         | JLL36225<br>JLL36250             | 225<br>250        | CFG43 ●●●<br>CFG44 ●●●              | CFW43 ●●●<br>CFW44 ●●●                                       | CFA43 ●●●<br>CFA44 ●●●                                                       |
|                       |                   |                  |           |                                  |                   |                                     |                                                              |                                                                              |
| 460<br>(480)          | 5                 | 480–60<br>440–50 | 0         | HLL36015                         | 15                | CBG10 ●●●                           | CBW10 ●●●                                                    | CBA10 ●●●                                                                    |
|                       | 7.5               |                  | 1         | HLL36025<br>HLL36030             | 25<br>30          | CCG18 ●●●<br>CCG20 ●●●              | CCW18 ●●●<br>CCW20 ●●●                                       | CCA18 ●●●<br>CCA20 ●●●                                                       |
|                       | 10                |                  | 2         | HLL36045<br>HLL36060<br>HLL36070 | 45<br>60<br>70    | CDG26 ●●●<br>CDG28 ●●●<br>CDG30 ●●● | CDW26 ●●●<br>CDW28 ●●●<br>CDW30 ●●●                          | CDA26 ●●●<br>CDA28 ●●●<br>CDA30 ●●●                                          |
|                       | 15                |                  | 3         | HLL36080<br>HLL36150             | 80<br>150         | CEG39 ●●●<br>CEG40 ●●●              | CEW39 ●●●<br>CEW40 ●●●                                       | CEA39 ●●●<br>CEA40 ●●●                                                       |
|                       | 20                |                  | 4         | JLL36200<br>JLL36250             | 200<br>250        | CFG45 ●●●<br>CFG47 ●●●              | CFW45 ●●●<br>CFW47 ●●●                                       | CFA45 ●●●<br>CFA47 ●●●                                                       |
|                       | 25                |                  |           |                                  |                   |                                     |                                                              |                                                                              |

**NOTE:** For voltage codes used with control transformers, see [page 16-118.](#)

For How to Order Information, see [page 16-28.](#)

[1] NEMA 12 enclosures can be field modified for outdoor applications. For details, refer to Class 9991 on [page 16-112.](#)

[2] Replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard voltage codes listed in [Table 16.274.](#)



**Table 16.265: 3-Pole Polyphase—600 Vac Maximum (50–60 Hz) Combination Disconnect Switch Type—With Electric Alternation**  
(Devices require 6 thermal units. See [Thermal Unit Selection](#), page 16-132.)

| Motor Voltage (Starter Voltage) | Max. Hp Poly-phase | Coil Voltage                  | NEMA Size | Fuse Clip Size (A) [3] | NEMA 1 General Purpose Enclosure | NEMA 4/4X Watertight and Dusttight Enclosure Stainless Steel | NEMA 12 (NEMA 3 and 3R) [4] Dusttight and Dripight Industrial Use Enclosure |
|---------------------------------|--------------------|-------------------------------|-----------|------------------------|----------------------------------|--------------------------------------------------------------|-----------------------------------------------------------------------------|
|                                 |                    |                               |           |                        | Type [5]                         | Type [5]                                                     | Type [5]                                                                    |
| 200 (208)                       | 3                  | 208-60                        | 0         | None 30                | UBG10●●●<br>DBG08●●●             | UBW10●●●<br>DBW08●●●                                         | UBA10●●●<br>DBA08●●●                                                        |
|                                 | 7.5                |                               | 1         | None 60                | UCG20●●●<br>DCG18●●●             | UCW20●●●<br>DCW18●●●                                         | UCA20●●●<br>DCA18●●●                                                        |
|                                 | 10                 |                               | 2         | None 60                | UDG30●●●<br>DDG28●●●             | UDW30●●●<br>DDW28●●●                                         | UDA30●●●<br>DDA28●●●                                                        |
| 230 (240)                       | 3                  | 240-60<br>220-50              | 0         | None 30                | UBG10●●●<br>DBG08●●●             | UBW10●●●<br>DBW08●●●                                         | UBA10●●●<br>DBA08●●●                                                        |
|                                 | 7.5                |                               | 1         | None 60                | UCG20●●●<br>DCG18●●●             | UCW20●●●<br>DCW18●●●                                         | UCA20●●●<br>DCA18●●●                                                        |
|                                 | 15                 |                               | 2         | None 60                | UDG30●●●<br>DDG28●●●             | UDW30●●●<br>DDW28●●●                                         | UDA30●●●<br>DDA28●●●                                                        |
| 460 (480)                       | 5                  | 480-60<br>440-50<br>575 (600) | 0         | None 30                | UBG10●●●<br>DBG10●●●             | UBW10●●●<br>DBW10●●●                                         | UBA10●●●<br>DBA10●●●                                                        |
|                                 | 10                 |                               | 1         | None 30                | UCG20●●●<br>DCG20●●●             | UCW20●●●<br>DCW20●●●                                         | UCA20●●●<br>DCA20●●●                                                        |
|                                 | 25                 |                               | 2         | None 60                | UDG30●●●<br>DDG30●●●             | UDW30●●●<br>DDW30●●●                                         | UDA30●●●<br>DDA30●●●                                                        |
|                                 | 50                 |                               | 3         | None 100               | UEG40●●●<br>DEG40●●●             | UEW40●●●<br>DEW40●●●                                         | UEA40●●●<br>DEA40●●●                                                        |

## Factory Modifications (Forms)

**Table 16.266: Factory Modifications (Forms)**

| Description [6]                                                                                                                                 | Enclosure Type | Form      | NEMA Size |        |        |        |
|-------------------------------------------------------------------------------------------------------------------------------------------------|----------------|-----------|-----------|--------|--------|--------|
|                                                                                                                                                 |                |           | 0-1       | 2      | 3      | 4      |
| <b>Pilot Devices in Cover</b> [7]<br>Start-Stop push buttons—one provided for each motor.<br>(Form C or Form Y68 required.)                     | 1, 4, 12       | A         | X         | X      | X      | X      |
| <b>Hand-Off-Auto selector switch</b> —one provided for each motor.                                                                              | 1, 4, 12       | C         | X         | X      | X      | X      |
| No. 1 Lead—No. 2 Lead selector switch for manual selection of lead pump.<br>(Form Y68 required.)                                                | Any            | C13<br>P1 | X<br>X    | X<br>X | X<br>X | X<br>X |
| Red On pilot light—one provided for each motor.                                                                                                 | 1, 4, 12       | P21       | X         | X      | X      | X      |
| Push-to-test, red On pilot light—one provided for each motor.                                                                                   | Any            | G12       | X         | X      | X      | X      |
| Non-standard markings for pilot devices.                                                                                                        | Any            | Y29       | X         | X      | X      | X      |
| Test push button for each starter.                                                                                                              | Any            | Any       | X         | X      | X      | X      |
| <b>Control Circuit Modifications</b><br>Fused control circuit without transformer                                                               | Any            | F         | X         | X      | X      | X      |
| One fuse                                                                                                                                        | Any            | F4        | X         | X      | X      | X      |
| Two fuses                                                                                                                                       | Any            | F4T       | X         | X      | X      | X      |
| Fused control circuit transformer, two fuses in primary, with 600, 480, 240 or 208 V primary and 120 V secondary—one provided for each starter. | Any            | FF4T      | X         | X      | X      | X      |
| Fused control circuit transformer, two fuses in primary, one fuse in secondary—one provided for each starter.                                   | Any            | FF4T11    | X         | X      | X      | X      |
| 100 VA additional capacity                                                                                                                      | Any            | FF4T12    | X         | X      | X      | X      |
| 200 VA additional capacity                                                                                                                      | Any            | FF4T12    | X         | X      | X      | X      |
| Extra capacity control circuit transformer—two fuses in primary—one provided for each starter (see <a href="#">Table 16.267</a> )               | Any            | F4T11     | X         | X      | X      | X      |
| 100 VA additional capacity                                                                                                                      | Any            | F4T12     | X         | X      | X      | X      |
| 200 VA additional capacity                                                                                                                      | Any            | G97       | X         | X      | X      | X      |
| Elapsed time meter for each starter                                                                                                             | Any            | Y24       | X         | X      | X      | X      |
| Pressure switch for each starter (Square D pressure switch 9012GAW25)                                                                           | Any            | D         | X         | X      | X      | X      |
| Addition of 2 relays to modify controller for operation with single pole pilot devices                                                          | Any            | R7        | X         | X      | X      | X      |
| Addition of 3 relays to modify controller for operation with single pole mercury float switches                                                 | Any            | R8        | X         | X      | X      | X      |
| Control circuit wired for separate 120 V source                                                                                                 | Any            | S         | X         | X      | X      | X      |
| Addition of 1 N.O. unwired interlock per starter for use by customer<br>(1 N.O. unwired interlock per starter is provided as standard.)         | Any            | X10       | X         | X      | X      | X      |
| Addition of 1 N.C. unwired interlock per starter for customer use                                                                               | Any            | X01       | X         | X      | X      | X      |
| Modified wiring for use with double pole mercury float switches                                                                                 | Any            | Y24       | X         | X      | X      | X      |
| <b>Deduct</b> for omission of electrical alternating circuit                                                                                    | Any            | Y68       | X         | X      | X      | X      |
| Additional Control circuit terminals—per wired terminal<br>(5 point terminal block is standard)                                                 | Any            | G56[10]   | X         | X      | X      | X      |
| Unwired                                                                                                                                         | Any            | G50[10]   | X         | X      | X      | X      |

**Table 16.267: Capacity**

| NEMA Size | Standard Capacity (Form F4T) | 100 VA Additional Capacity (Form F4T11) | 200 VA Additional Capacity (Form F4T12) |
|-----------|------------------------------|-----------------------------------------|-----------------------------------------|
|           | Class 9070 Type              | Class 9070 Type                         | Class 9070 Type                         |
| 0, 1      | TF100                        | TF200                                   | TF300                                   |
| 2         | TF100                        | TF200                                   | TF300                                   |
| 3         | TF150                        | TF300                                   | TF500                                   |
| 4         | TF300                        | TF500                                   | TF500                                   |

For How to Order Information, see [page 16-28](#).

[3] The hp rating applies only when dual element time delay fuses are used.

[4] NEMA 12 enclosures can be field modified for outdoor applications. For details, refer to Class 9991 on [page 16-112](#).

[5] Replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard voltage codes listed in [Table 16.274](#).

[6] These Forms are most commonly used. Other Forms may be available. Consult the Customer Care Center at 1-888-778-2733 for additional information.

[7] Not available on open style devices.

[8] Single primary voltage must be specified.

[9] Not available on this size. Use Form FF4T●●.

[10] Addition of terminal block 9080CA or 9080GR6 only. A 5-point terminal block is provided as standard for custom connection. A wiring diagram must be provided for factory wiring.



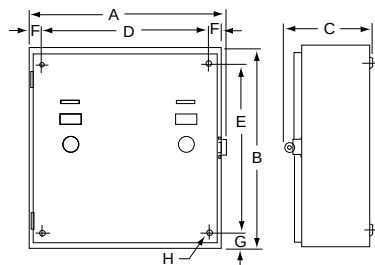


Figure 16.27: NEMA 1 Enclosure—Non-Combination

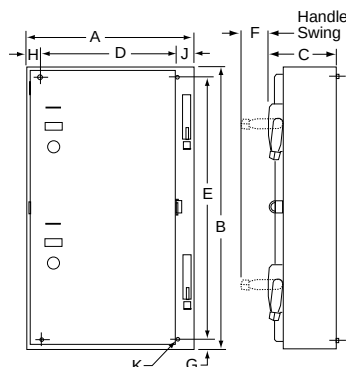


Figure 16.28: NEMA 1 Enclosure—Combination

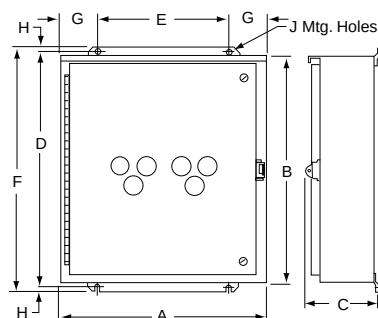


Figure 16.29: NEMA 4 and 12/3R Enclosure—Non-Combination

Table 16.274: Coil Voltage Codes

| Voltage  |         | Code |
|----------|---------|------|
| 60 Hz    | 50 Hz   |      |
| 24 [11]  | 110     | V01  |
| 120 [12] | 220     | V02  |
| 208      | 380     | V08  |
| 240      | 440     | V03  |
| —        | 550     | V05  |
| 480      | —       | V06  |
| 600      | —       | V07  |
| Specify  | Specify | V99  |

## Approximate Dimensions (in.)

**NOTE:** These dimensions are for reference only. If you need precise measurements, contact the Customer Care Center at 1-888-778-2733.

Table 16.268: NEMA 1 Enclosure—Non-Combination (Figure 1)

| Starter Size | A     | B     | C    | D     | E    | F    | G    | H         |
|--------------|-------|-------|------|-------|------|------|------|-----------|
| 0, 1, or 2   | 20.5  | 24.13 | 8.69 | 17.88 | 21.5 | 1.31 | 1.31 | 0.31 Dia. |
| 3 or 4       | 22.13 | 34    | 9.75 | 16    | 35.5 | 3.06 | 0.75 | 0.44 Dia. |

Table 16.269: NEMA 1 Enclosure—Combination (Figure 2)

| Starter Size                                                                | A     | B  | C     | D  | E    | F    | G    | H    | J    | K            |
|-----------------------------------------------------------------------------|-------|----|-------|----|------|------|------|------|------|--------------|
| 0, 1, or 2<br>(For Circuit Breaker and<br>30 A & 60 A Disconnect<br>Switch) | 20.38 | 35 | 9.63  | 17 | 32.5 | 3.31 | 1.25 | 1.25 | 1.25 | 0.44<br>Dia. |
| 3 or 4<br>(For Circuit Breaker and<br>100 A Disconnect Switch)              | 32    | 44 | 10.75 | 24 | 46   | 4.88 | 1    | 2.5  | 2.5  | 0.56<br>Dia. |

Table 16.270: NEMA 4 Enclosure—Non-Combination (Figure 3)

| Starter Size | A    | B  | C    | D  | E     | F  | G    | H   | J    |
|--------------|------|----|------|----|-------|----|------|-----|------|
| 0, 1, or 2   | 20.5 | 24 | 8    | 25 | 15.38 | 26 | 2.56 | 0.5 | 0.31 |
| 3 or 4       | 22   | 34 | 9.13 | 35 | 17    | 36 | 2.5  | 0.5 | 0.56 |

Table 16.271: NEMA 4 Enclosure—Combination (Figure 4)

| Starter Size                                                                | A    | B  | C     | D  | E     | F  | G    | H   | J    | K    |
|-----------------------------------------------------------------------------|------|----|-------|----|-------|----|------|-----|------|------|
| 0, 1, or 2<br>(For Circuit Breaker and<br>30 A & 60 A Disconnect<br>Switch) | 20.5 | 35 | 9.56  | 36 | 15.38 | 37 | 2.56 | 0.5 | 0.31 | 3.31 |
| 3 or 4<br>(For Circuit Breaker and<br>100 A Disconnect Switch)              | 32   | 44 | 10.69 | 46 | 26    | 47 | 3    | 0.5 | 0.56 | 4.88 |

Table 16.272: NEMA 12/3R Enclosure—Non-Combination (Figure 3)

| Starter Size | A    | B     | C    | D    | E     | F    | G    | H   | J    |
|--------------|------|-------|------|------|-------|------|------|-----|------|
| 0, 1, or 2   | 20.5 | 24.25 | 8    | 25.5 | 14.38 | 26.5 | 3.06 | 0.5 | 0.44 |
| 3 or 4       | 22   | 34    | 9.13 | 35.5 | 16    | 36.5 | 3    | 0.5 | 0.44 |

Table 16.273: NEMA 12/3R Enclosure—Combination (Figure 4)

| Starter Size                                                                | A     | B     | C     | D    | E     | F    | G    | H   | J    | K    |
|-----------------------------------------------------------------------------|-------|-------|-------|------|-------|------|------|-----|------|------|
| 0, 1, or 2<br>(For Circuit Breaker and<br>30 A & 60 A Disconnect<br>Switch) | 20.5  | 35    | 9.56  | 36.5 | 14.38 | 37.5 | 3    | 0.5 | 0.44 | 3.31 |
| 3 or 4<br>(For Circuit Breaker and<br>100 A Disconnect Switch)              | 32.25 | 44.25 | 10.69 | 46   | 24    | 47   | 4.13 | 0.5 | 0.56 | 4.88 |

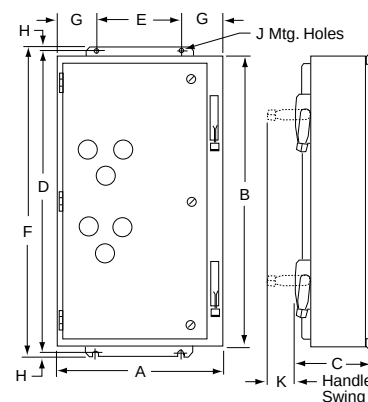


Figure 16.30: NEMA 4 and 12/3R Enclosure—Combination

**NOTE:** Illustrations may not represent the actual enclosure; they are intended for dimensional information only. Dimensions are in inches.

[11] 24 V coil is not available on Size 4. On Sizes 00–3, specify **Form S** (separate control).

[12] These voltage codes must include **Form S** (no additional charge).



8965DPR33V02 Hoist Contactor  
600 Vac, 25 A  
DPR, Angled

Class 8965 Type DPR reversing/hoist contactors are designed for the control of motors in hoists, overhead doors, small elevators, commercial laundry equipment, and other related products which use reversing motors. They are rated to perform in the short periods of jogging experienced in hoist service.

The coils are designed to operate on line voltages of 85–110% of rated voltage, and are for applications at 50 or 60 Hz only. Coils are easily replaced with external base removed.

Auxiliary contacts can easily be fieldadded to any Class 8965 reversing contactor. Type DPR contactors accept one auxiliary contact module with up to two isolated circuits per side (two modules per device). When auxiliary contacts are ordered separately, two modules are normally used for each device; one for forward, one for reverse.

**Table 16.275: Reversing/Hoist Contactors—600 Vac Maximum**  
(replace ●●● with the voltage code)

| No. of Poles     | Horsepower Ratings [1] |             |             |                 | Open Type |
|------------------|------------------------|-------------|-------------|-----------------|-----------|
|                  | 115 V<br>10            | 230 V<br>10 | 230 V<br>30 | 460/575 V<br>30 | Type [2]  |
| 3-Pole Polyphase | 1                      | 2           | 5           | 7-1/2           | DPR13●●●  |
|                  | 2                      | 3           | 7-1/2       | 10              | DPR23●●●  |
|                  | 2                      | 5           | 10          | 15              | DPR33●●●  |
|                  | 3                      | 7-1/2       | 15          | 20              | DPR43●●●  |
| 4-Pole Polyphase | 1                      | 2           | 5           | 7-1/2           | DPR14●●●  |
|                  | 2                      | 3           | 7-1/2       | 10              | DPR24●●●  |
|                  | 2                      | 5           | 10          | 15              | DPR34●●●  |
|                  | 3                      | 7-1/2       | 10          | 20              | DPR44●●●  |

**Table 16.276: Auxiliary Contacts Separate Module**  
[3]

| Description   | Class 9999 Type |
|---------------|-----------------|
| 1 N.O.        | D10             |
| 1 N.C.        | D01             |
| 1 N.O.–1 N.C. | D11             |
| 2 N.O.        | D20             |

**Table 16.278: Coil Voltage Codes**

| Volts, 60 Hz | Volts, 50 Hz | Voltage Code |
|--------------|--------------|--------------|
| 24           | 24           | V14          |
| 120          | 110          | V02          |
| 208–240      | 220          | V09          |
| 277          | —            | V04          |
| 480          | 440          | V06          |
| 600          | 550          | V07          |


**Table 16.277: Factory Installed**

| Description             | Form  |
|-------------------------|-------|
| 1 N.O. Each Side        | X1010 |
| 1 N.C. Each Side        | X0101 |
| 1 N.O.–1 N.C. Each Side | X1111 |
| 2 N.O. Each Side        | X2020 |



**Table 16.279: Approvals**

UL Component Recognized—File E42240, CCN NLDX  
CSA Certified—File LR25490, Class 3211 04


## Approximate Dimensions

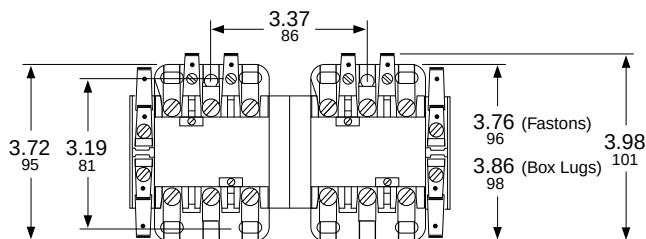

Type DPR13 through DPR43

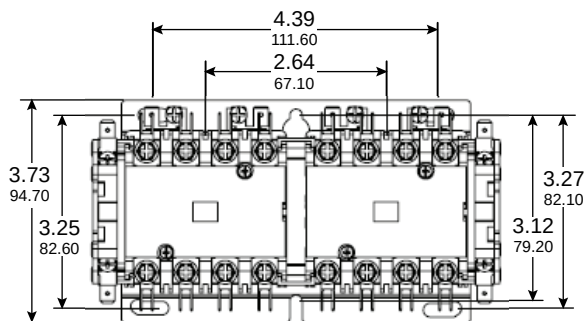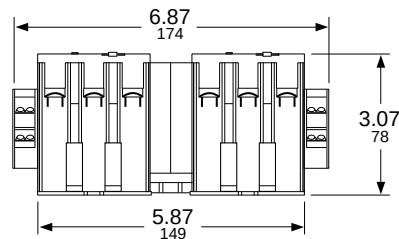

Type DPR14 through DPR44

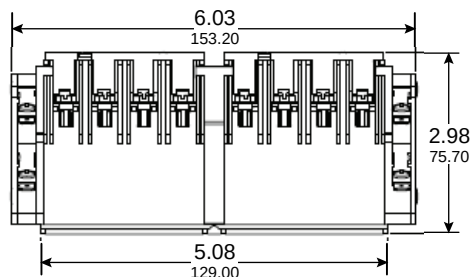


[1] For rapid operation (jogging duty), use the next larger size contactor.

[2] Replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard voltage codes listed in Table 16.278.

[3] Order two modules for Type DPR, one for each side.



Type SEO5

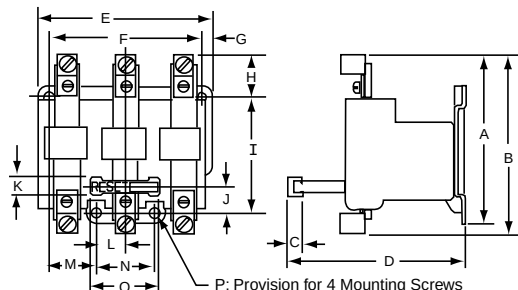

Type SEO Dimensions

## Melting Alloy Overload Relay Selection

NEMA style thermal overload relays feature:

- Exclusive one-piece thermal unit
- Inverse time delay trip
- Trip free reset mechanism
- Replaceable contact units

Note that these overload relays do not include thermal units, which must be ordered and field installed separately. Slow trip (Class 30) and quick trip (Class 10) melting alloy thermal units are available for all Size 1, 2, 5 and 6, and some Size 3 and 4 applications.

**Table 16.280: For Separate Mounting—Melting Alloy—600 V Maximum, AC or DC<sup>[1]</sup>**

| NEMA Size                                                                                 | Maximum Full Load Current (A) | Open Type for Separate Panel Mounting Left and Right Hand Types | Open Type Relay and Bracket Kit for Terminal Block Channel Mounting |
|-------------------------------------------------------------------------------------------|-------------------------------|-----------------------------------------------------------------|---------------------------------------------------------------------|
|                                                                                           |                               |                                                                 | Type                                                                |
| Three Pole Construction (One Common N.C. Contact on Type S Only)—3 Thermal Units Required |                               |                                                                 |                                                                     |
| 00-1                                                                                      | 25                            | 9065SEO5                                                        | 9065SM2                                                             |
| 2                                                                                         | 45                            | 9065SEO8                                                        | 9065SM2                                                             |
| 3                                                                                         | 86                            | 9065SEO12                                                       | —                                                                   |
| 4                                                                                         | 133                           | 9065SEO15                                                       | —                                                                   |

**Table 16.281: Replacement Melting Alloy Overload Relays for Square D Class 8536 Starters**

| Locate Class 8536 Starter in this Column |      |        |                  | Order Class 9065 Overload Relay from this Column |                                  |
|------------------------------------------|------|--------|------------------|--------------------------------------------------|----------------------------------|
| NEMA Size                                | Type | Series | Number of Poles  | Type                                             | Number of Thermal Units Required |
| 00                                       | SA   | A & B  | 2<br>3           | 9065SDO4<br>9065SDO5                             | 1<br>3                           |
| 0                                        | SB   | A      | 2<br>3-5         | 9065SDO4<br>9065SDO5                             | 1<br>3 [2]                       |
| 1                                        | SC   | A      | 2<br>3-5         | 9065SDO4<br>9065SDO5                             | 1<br>3 [2]                       |
| 1P                                       | SC   | A      | 2                | 9065SDO10                                        | 1                                |
| 2                                        | SD   | A      | 2<br>3-5         | 9065SDO7<br>9065SDO8                             | 1<br>3 [2]                       |
| 3                                        | SE   | A      | 2<br>3<br>4<br>5 | 9065SDO11<br>9065SDO12<br>9065SDO13<br>9065SDO14 | 1<br>3<br>2<br>3                 |
| 4                                        | SF   | A      | 3<br>4<br>5      | 9065SDO15<br>9065SDO16<br>9065SDO17              | 3<br>2<br>3                      |
| 5                                        | SG   | A      | 3                | Form Y500 and Series B, use 9065SEO5             | 3                                |
| 6                                        | SH   | A & B  | 3                | 9065SEO5                                         | 3                                |

**Table 16.282: Special Features for Melting Alloy Overload Relays**

| Description                                                                                                                    | Form |
|--------------------------------------------------------------------------------------------------------------------------------|------|
| Substitute 1-N.O. isolated alarm contact and 1-N.C. contact per relay. (Type S starters only) [3]                              | Y342 |
| Substitute 2-N.C. contacts for standard N.C. contact per relay. (Type S starters only) [3]                                     | Y344 |
| Modify Type SDO12 relays to accept Type FB quick trip or SB slow trip thermal units. (Rejects Type CC standard trip units) [4] | Y81  |

**Table 16.283: Approximate Dimensions, NEMA Style Melting Alloy Overload Relays**

| Type  | Dimensions (in.) |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      | Shipping Weight (lb) |
|-------|------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|----------------------|
|       | A                | B    | C    | D    | E    | F    | G    | H    | I    | J    | K    | L    | M    | N    | O    | P    |                      |
| SEO5  | 3.31             | —    | 0.47 | 3.97 | 3.53 | 2.81 | 0.22 | 0.69 | 2.31 | 0.5  | 0.5  | 0.5  | 0.84 | 1    | 1.38 | #10  | 1                    |
| SEO8  | 3.31             | —    | 0.47 | 3.97 | 3.5  | 2.81 | 0.19 | 0.69 | 2.31 | 0.5  | 0.5  | 0.13 | 0.84 | 1    | 1.38 | #10  | 1.25                 |
| SEO12 | —                | 5.59 | 0.56 | 5.75 | 5.31 | 4.75 | 0.28 | 1.44 | 3.56 | 0.75 | 0.56 | 0.88 | 1.5  | 1.75 | 2    | #1/4 | 3                    |
| SEO15 | —                | 6.97 | 0.56 | 5.75 | 5.31 | 4.75 | 0.28 | 2.13 | 3.56 | 0.75 | 0.56 | 0.88 | 1.5  | 1.75 | 2    | #1/4 | 4                    |

**NOTE:** These dimensions are for reference only. If you need precise measurements, contact the Customer Care Center at 1-888-778-2733.

[1] The maximum power circuit rating for Type S separate-mounting overload relays is 600 Vac only. The maximum control circuit contact rating for Type S versions is 600 Vac only.

[2] For 4-pole starters used on two-phase systems, order two thermal units plus one Class 9998 Type SO31 jumper strap kit for every two starters. Each kit includes two jumper straps.

[3] Field modification possible. Order 9999S04 (for Form Y342) or 9999S05 (for Form Y344).

[4] This Form cannot be field modified.



### Motor Logic Solid-State Overload Relays

**Motor Logic solid-state overload relays (SSOLRs)** feature: 3 to 1 adjustment for trip current; phase loss and unbalance protection; direct replacement for Type S melting alloy. They are ambient insensitive and self-powered. Switch selectable trip class; Class II ground fault detection; and direct replacement for Type S melting alloy. Electrical remote reset is also available.

**NOTE:** Motor Logic SSOLRs are designed to protect 50/60 Hz, three-phase AC motors from overload, phase unbalance, and phase loss conditions. Open Delta systems or grounded B-phase systems are difficult to balance and could cause the Motor Logic SSOLR to trip.

**Table 16.284: Class 10/20 (Selectable): For Separate Mounting Solid-State Overload Relay, 600 Vac Maximum**


| NEMA Size <sup>[5]</sup><br>(3-Pole) | Full Load<br>Current Range<br>(A) | Open Type        |
|--------------------------------------|-----------------------------------|------------------|
|                                      |                                   | Trip Class 10/20 |
| 00B                                  | 1.5–4.5 <sup>[6]</sup>            | SFB20            |
| 00C                                  | 3–9 <sup>[6]</sup>                | SFC20            |
| 0                                    | 6–18 <sup>[6]</sup>               | SF020            |
| 1                                    | 9–27 <sup>[6]</sup>               | SF120            |
| 2                                    | 15–45                             | SF220            |
| 3                                    | 30–90                             | SF320            |
| 4                                    | 45–135                            | SF420            |

**Table 16.285: Class 10/20 (Selectable): Replacement SSOLR for Retrofit of Square D Type S Starter Solid-State Overload Relay 600 Vac Maximum**

| Locate 8536 Starter in this column |                                   | Order Class 9065 Overload Relay from this column |
|------------------------------------|-----------------------------------|--------------------------------------------------|
| NEMA Size <sup>[5]</sup>           | Full Load<br>Current Range<br>(A) | Open Type                                        |
|                                    |                                   | Trip Class 10/20                                 |
| 00B <sup>[6]</sup>                 | 1.5–4.5                           | SFB20                                            |
| 00C <sup>[6]</sup>                 | 3–9                               | SFC20                                            |
| 0 <sup>[6]</sup>                   | 6–18                              | SF020                                            |
| 1 <sup>[6]</sup>                   | 9–27                              | SF120                                            |
| 2                                  | 15–45                             | ST220                                            |
| 3                                  | 30–90                             | ST320                                            |
| 4                                  | 45–135                            | ST420                                            |
| 5 <sup>[7]</sup>                   | 90–270                            | ST520                                            |
| 5 <sup>[8]</sup>                   | 90–270                            | SF520                                            |
| 6 <sup>[7]</sup>                   | 180–540                           | ST620                                            |
| 7 <sup>[7]</sup>                   | 270–810                           | ST720                                            |


<sup>[5]</sup> Size 00B and 00C are not actual NEMA sizes. These designations are used to differentiate the lower FLA of these devices from the NEMA Size 00 Motor Logic solid-state overload relay.  
<sup>[6]</sup> Size 00B, 00C, 0, and 1 come without lugs. Lower amperage loads can be protected by looping the power wires. Lugs are available. See Table 16.358.  
<sup>[7]</sup> Size 5, 6, and 7 replacement overload relays are only for existing NEMA style Type S starters with a Motor Logic overload relay. External CTs and additional components are not included.  
<sup>[8]</sup> Size 5 is a complete drop-in replacement for Square D Type S melting alloy, bimetallic, and Y500 overload relays **only**.

## Approximate Dimensions

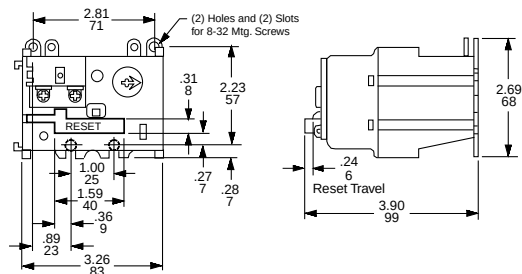


NEMA Size 00B, 00C, 0, and 1 Devices


**NOTE:** Sizes 00B and 00C are not actual NEMA sizes. These designations are used to differentiate the lower FLA of these devices from the NEMA Size 00 Motor Logic solid-state overload relay.

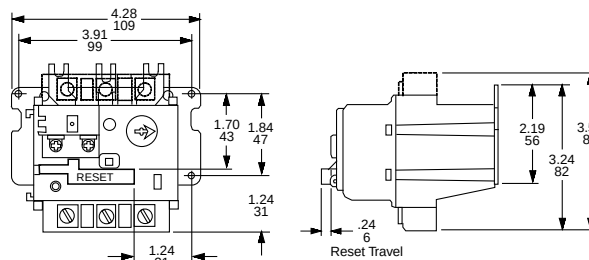

Size 2 Devices

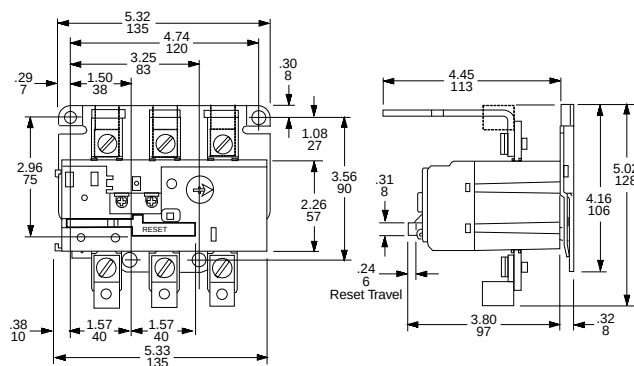


Size 3 Devices

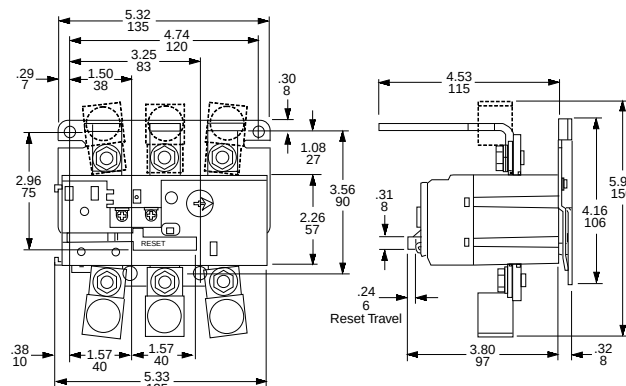


Size 4 Devices

**Note:** The dimensions are for reference only.

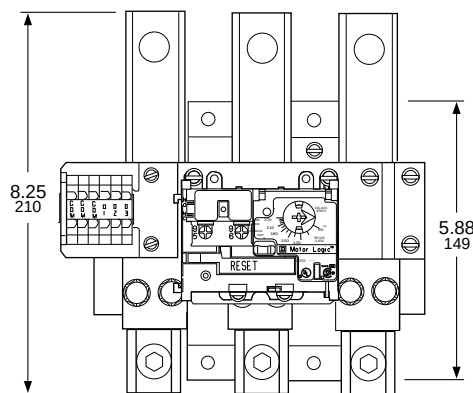

NEMA Size 5 Type S Device

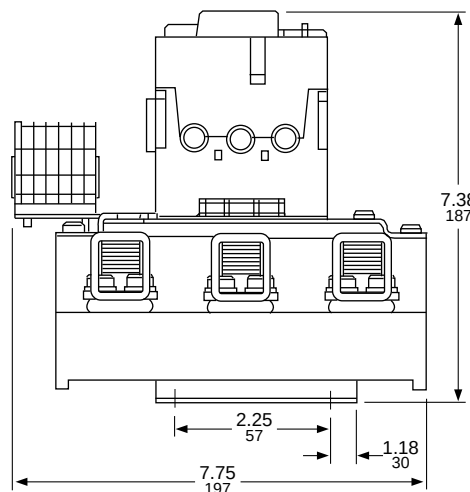

New!

## Introduction

TeSys T is a motor management system that provides full motor monitoring, control, and protection when used with short circuit protection and a contactor. TeSys T manages most critical processes while reducing downtime and increasing productivity.

TeSys T is a flexible system that integrates seamlessly into your automation system through five major communication protocols. TeSys T predicts what will happen in the process, as it accurately monitors current, voltage, and power over a wide range.

TeSys T is a green motor management system with unique power monitoring capabilities for better energy management. TeSys T carries all appropriate and necessary third party certifications.

To get detailed information about TeSys T, visit our website at [www.schneider-electric.us.com](http://www.schneider-electric.us.com).

### TeSys T detailed functionalities and possible configuration:

#### Communication:

TeSys T is a flexible motor management system that supports six major communication protocols: Modbus™, CANopen, DeviceNet™, Profibus™, Ethernet/IP, and Modbus/TCP.

These communication protocols allow the TeSys T controller to integrate seamlessly into your automation systems.

Ethernet/IP and Modbus/TCP provide FDR to enable quick replacement of products and minimize maintenance time.

#### Protection functions:

- thermal overload
- phase imbalance and phase failure
- thermal motor protection via PTC probes
- phase reversal
- ground fault detection
- long starting times and motor stalling
- automatic load shedding and restarting
- load fluctuations (current, voltage, power)
- variations of Cos  $\phi$  (power factor)

#### Metering functions:

- Measurements (rms values):
  - current on the 3 phases
  - voltage on the 3 phases (shedding)
  - motor temperature
  - ground fault sensing
- Values calculated:
  - average current
  - frequency
  - Power factor, power, power consumption

#### Motor control functions:

A motor managed by a TeSys T controller can be controlled:

- locally, using the logic inputs present on the product, or via the human machine interface (HMI)
- remotely, via the network

#### Motor control modes:

10 predefined motor control modes are incorporated in the controller. Each listed mode is available as 2 or 3 wire control.


- overload mode: monitoring of motors whose control is not managed by the controller
- independent mode: starting of full voltage non-reversing motors
- reverser mode: starting of full voltage reversing motors
- 2-step mode: 2-step starting of motors (star-delta, by autotransformer and by resistor)
- 2-speed mode: 2-speed starting of motors (Dahlander, pole changer)

A custom mode is available to allow the user to create a specific motor control mode that is not predefined in the controller.

Custom Logic has the basic functions of a small programmable logic controller (PLC). Programming can be done in Structured Text mode or in Block Diagrams through SoMove V2.2 software. To ensure consistency, the same software used to commission the TeSys T controller is used for Custom Logic programming.

#### Statistical and diagnostic functions:

- history of the last five detected faults
- motor statistics
- controller operations
- warning of pending faults

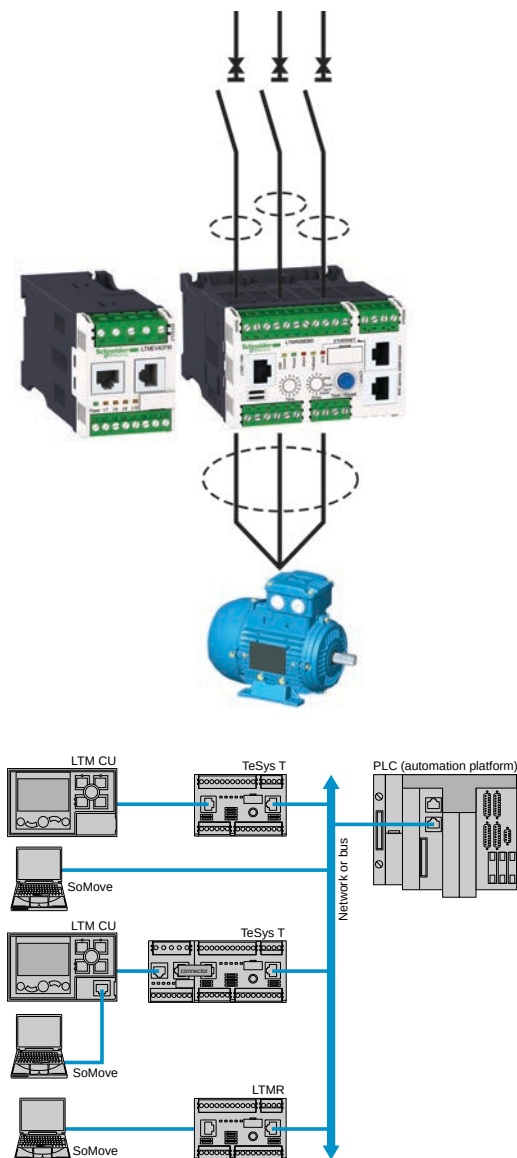

**Table 16.286: Standards and Certifications**

| Product Type            | LTM Controllers                                                                               | LTMEV40 Expansion Modules |
|-------------------------|-----------------------------------------------------------------------------------------------|---------------------------|
| Conforming to standards | IEC/EN 60947-4-1, UL 508, UL E164353 NKCR, CSA 22-2 n°14, CSA LR43364 Class 3211 03, IACS E10 |                           |
| Product certifications  | UL, CSA, BV, LROS, DNV, GL, RINA, ABS, RMRos, NOM, CCC, C-TiC'K, ATEX, GOST, KERI             |                           |

### Possible Configurations:

TeSys T controller is a flexible motor management system using SoMove V2.2 commissioning tool. PowerSuite is the configuration software for the TeSys T controllers. See [page 16-106](#) for details.

TeSys T is a motor management system that provides full motor monitoring, control, and protection when used with short circuit protection and a contactor. TeSys T manages most critical processes while reducing downtime and increasing productivity.

TeSys T is a flexible system that integrates seamlessly into your automation system through five major communication protocols. TeSys T predicts what will happen in the process, as it accurately monitors current, voltage, and power over a wide range.

TeSys T is a green motor management system with unique power monitoring capabilities for better energy management.

TeSys T carries all appropriate and necessary third party certifications.

To get detailed information about TeSys T, visit our website at [www.schneider-electric.us.com](http://www.schneider-electric.us.com).



New!

## LTMR Controller



LTMR27EBD

Table 16.287: Controllers

| Setting Range (A)                                                            | Control Voltage (V) | Current Range (A) | Catalog Number             |
|------------------------------------------------------------------------------|---------------------|-------------------|----------------------------|
| <b>Modbus™ Protocol</b>                                                      |                     |                   |                            |
| 8                                                                            | 24 Vdc              | 0.4–8             | <a href="#">LTMR08MBD</a>  |
|                                                                              | 100–240 Vac         | 0.4–8             | <a href="#">LTMR08MFM</a>  |
| 27                                                                           | 24 Vdc              | 1.35–27           | <a href="#">LTMR27MBD</a>  |
|                                                                              | 100–240 Vac         | 1.35–27           | <a href="#">LTMR27MFM</a>  |
| 100                                                                          | 24 Vdc              | 5–100             | <a href="#">LTMR100MBD</a> |
|                                                                              | 100–240 Vac         | 5–100             | <a href="#">LTMR100MFM</a> |
| <b>Ethernet TCP/IP Communication (Protocols: Ethernet/IP and Modbus/TCP)</b> |                     |                   |                            |
| 8                                                                            | 24 Vdc              | 0.4–8             | <a href="#">LTMR08EBD</a>  |
|                                                                              | 100–240 Vac         | 0.4–8             | <a href="#">LTMR08EFM</a>  |
| 27                                                                           | 24 Vdc              | 1.35–27           | <a href="#">LTMR27EBD</a>  |
|                                                                              | 100–240 Vac         | 1.35–27           | <a href="#">LTMR27EFM</a>  |
| 100                                                                          | 24 Vdc              | 5–100             | <a href="#">LTMR100EBD</a> |
|                                                                              | 100–240 Vac         | 5–100             | <a href="#">LTMR100EFM</a> |
| <b>CANopen Protocol</b>                                                      |                     |                   |                            |
| 8                                                                            | 24 Vdc              | 0.4–8             | <a href="#">LTMR08CBD</a>  |
|                                                                              | 100–240 Vac         | 0.4–8             | <a href="#">LTMR08CFM</a>  |
| 27                                                                           | 24 Vdc              | 1.35–27           | <a href="#">LTMR27CBD</a>  |
|                                                                              | 100–240 Vac         | 1.35–27           | <a href="#">LTMR27CFM</a>  |
| 100                                                                          | 24 Vdc              | 5–100             | <a href="#">LTMR100CBD</a> |
|                                                                              | 100–240 Vac         | 5–100             | <a href="#">LTMR100CFM</a> |
| <b>DeviceNet™ Protocol</b>                                                   |                     |                   |                            |
| 8                                                                            | 24 Vdc              | 0.4–8             | <a href="#">LTMR08DBD</a>  |
|                                                                              | 100–240 Vac         | 0.4–8             | <a href="#">LTMR08DFM</a>  |
| 27                                                                           | 24 Vdc              | 1.35–27           | <a href="#">LTMR27DBD</a>  |
|                                                                              | 100–240 Vac         | 1.35–27           | <a href="#">LTMR27DFM</a>  |
| 100                                                                          | 24 Vdc              | 5–100             | <a href="#">LTMR100DBD</a> |
|                                                                              | 100–240 Vac         | 5–100             | <a href="#">LTMR100DFM</a> |
| <b>Profibus™ DP Protocol</b>                                                 |                     |                   |                            |
| 8                                                                            | 24 Vdc              | 0.4–8             | <a href="#">LTMR08PBD</a>  |
|                                                                              | 100–240 Vac         | 0.4–8             | <a href="#">LTMR08PFM</a>  |
| 27                                                                           | 24 Vdc              | 1.35–27           | <a href="#">LTMR27PBD</a>  |
|                                                                              | 100–240 Vac         | 1.35–27           | <a href="#">LTMR27PFM</a>  |
| 100                                                                          | 24 Vdc              | 5–100             | <a href="#">LTMR100PBD</a> |
|                                                                              | 100–240 Vac         | 5–100             | <a href="#">LTMR100PFM</a> |

The controller is the central component in the motor management system. It manages the basic functions such as:

- measurement of 3-phase current via integral current transformers from 0.4 to 100 A (up to 810 A by external current transformers)
- measurement of ground current internally or external ground sensors
- measurement of motor temperature
- inputs and outputs for the various motor control modes, detected fault management, and other functions

**Characteristics**

As standard, the controller manages the following:

**Control Modes**

- overload mode
- independent mode
- reverser mode
- 2-speed mode
- 2-step mode
- Custom mode

**Inputs/Outputs**

- 6 discrete logic inputs
- 3 relay logic outputs (1 N.O. contact each)
- 1 relay output for detected fault signaling (1 N.O. + 1 N.C.) overload relay

**Measurements**

- connection for a thermistor probe
- connections for a ground sensor



## Components



**LTMEV40FM**

**Table 16.288: Expansion Module**

| Input Control Voltage | Number of Inputs | Supply to the Electronics | Catalog Number            |
|-----------------------|------------------|---------------------------|---------------------------|
| 24 Vdc                | 4                | via the LTMR controller   | <a href="#">LTMEV40BD</a> |
| 100–240 Vac           | 4                |                           | <a href="#">LTMEV40FM</a> |



**LTM9KCU**  
(Holder Only)



**LTMCU**



**Magelis Display**

**Table 16.289: HMI Modules and Software**

| Description                                 | Supply Voltage          | Catalog Number                |
|---------------------------------------------|-------------------------|-------------------------------|
| Operator Control unit                       | via the LTMR controller | <a href="#">LTMCU</a>         |
| Holder for LTMCU (with magnetic back)       | —                       | <a href="#">LTM9KCU</a>       |
| Magelis compact display                     | 24 Vdc                  | <a href="#">XBTN410</a>       |
| Configuration software Windows 99, 2000, XP | —                       | <a href="#">VJDSNDTMSV13M</a> |

### LTME Expansion Module

The expansion module adds the following functionalities to the TeSys T controller:

- voltage measurement between phases up to 690 V nominal
- 4 additional inputs

#### Inputs

- 4 discrete logic inputs (isolated)
- 2 types of power for the inputs: 24 Vdc and 100 to 240 Vac
- A 24 Vdc LTMR controller can be assembled with a 240 Vac expansion module and vice versa

The LTMVE must be connected to the LTMR controller by a connecting cable.

### HMI—Human Machine Interface

Depending on the application, two types of HMI can be used with the motor management system.

- The LTMCU operator control unit:
  - Control/monitoring of a 1 to 1 LTMR controller
- A Magelis XBTN410 terminal
  - Control/monitoring of 1 to 8 LTMR controllers

#### LTMCU Compact Display

- Configure the parameters
- Display information
- Monitor the alarms and detected faults
- Local control of the motor via the local control interface (keys can be customized)
- Three different languages can be loaded into the LTMCU controller at the same time: English, French, Spanish are the defaults.

A language download utility (LangTool), together with all the other languages, are available on the website [www.schneider-electric.com](http://www.schneider-electric.com).

This tool allows the languages present in the LTMCU control until to be adapted.

The LTMCU HMI control unit has an additional front panel RJ45 port, protected by a flexible cover.

#### Magelis™ Display

Two applications have been predefined for the TeSys T controller. Depending on the application loaded, the HMI terminal makes it possible to:

- Configure and monitor a motor starter (LTM\_1T1\_V1.dop)
- Monitor and modify certain parameters up to 8 motor starters (LTM\_1T8\_X\_V1.dop)

Vijeo Designer programming software is needed for loading applications into the XBT HMI terminal.

New!

## Components

Table 16.290: Current Transformers

| Current Transformer Ratio [1] | Catalog Number |
|-------------------------------|----------------|
| 100:1                         | LT6CT1001      |
| 200:1                         | LT6CT2001      |
| 400:1                         | LT6CT4001      |
| 800:1                         | LT6CT8001      |

Table 16.291: Ground Fault Sensors

| Rated Operational Current Ie (A) | Internal Toroid Ø (mm) | Catalog Number |
|----------------------------------|------------------------|----------------|
| Closed Toroids, Type A           |                        |                |
| 65                               | 30                     | 50437          |
| 85                               | 50                     | 50438          |
| 160                              | 80                     | 50439          |
| 250                              | 120                    | 50440          |
| 400                              | 200                    | 50441          |
| 630                              | 300                    | 50442          |
| Split Toroids, Type QA           |                        |                |
| 85                               | 46                     | 50485          |
| 250                              | 110                    | 50486          |

NOTE: Dimensional drawings are in catalog DIA1ED2061002EN-US.

Table 16.292: PTC Thermistor Probes [2]

| Description   | Nominal Operating Temperature (NOT) °C | Color       | Catalog Number [3] |
|---------------|----------------------------------------|-------------|--------------------|
| Triple Probes | 90                                     | Green/green | DA1TT090           |
|               | 110                                    | Brown/brown | DA1TT110           |
|               | 120                                    | Gray/gray   | DA1TT120           |
|               | 130                                    | Blue/blue   | DA1TT130           |
|               | 140                                    | White/blue  | DA1TT140           |
|               | 150                                    | Black/black | DA1TT150           |
|               | 160                                    | Blue/red    | DA1TT160           |
|               | 170                                    | White/green | DA1TT170           |

## Configuration with SoMove Software

The TeSys T configurator is incorporated in the SoMove software application, versions 2.2 and higher.

SoMove software allows configuration, commissioning and maintenance of motor starters protected by a TeSys T controller.

A library containing predefined motor control mode functions is available in order to:

- allow standardization
- avoid errors
- reduce motor starter setup times

By using logic functions, a custom mode makes it possible to:

- easily adapt these predefined motor control mode functions to the specific needs of your applications
- create new functions

The functions thus defined can be saved and used to build your function library for future applications.

To create special functions, a logic editor is incorporated in the configurator and allows a choice of 2 programming languages:

- function block
- structured text

Table 16.293: Configuration Tools

| Description                                                                | Composition                                                                           | Catalog Number |
|----------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------|
| Connection kit for PC serial port for Modbus™ PLC multidrop connection     | 1 x 3 m length cable with two RJ45 connectors                                         | VW3A8106       |
|                                                                            | 1 RS232/RS485 converter with one 9-pin female SUB-D connector and one RJ45 connector. |                |
| USB serial port adapter [4] for connecting a TeSys T controller to your PC | 1 USB / serial port adapter [4]                                                       | TSXCUSB485     |
| USB serial port cable for connecting a TeSys T controller to your PC       | 1 USB / serial port cable                                                             | TCSMCNAM3M002P |

## TeSys T and SMS PowerLogic:


TeSys T is integrated in PowerLogic SMS Version 4.0. and will address energy management needs by fully utilizing the TeSys T power/energy management features. For more information on PowerLogic products, see Power Monitor Control Section 4.



LT6CT4001



DA1TT●●

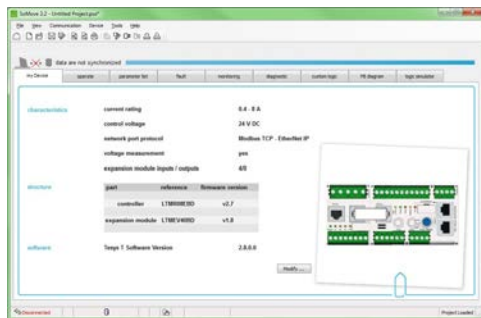

[1] For use with LTMR08●● controllers. Three current transformers are required for 3-phase applications.

[2] PTC: Positive Temperature Coefficient.

[3] Sold in lots of 10.

[4] Modbus RS-485 cable required, not included.

New!

## Accessories

**Table 16.294: Connection Accessories**

| Description                                                                 |                                                               | Length<br>m (ft) | Catalog Number |
|-----------------------------------------------------------------------------|---------------------------------------------------------------|------------------|----------------|
| For Ethernet TCP/IP connection                                              |                                                               |                  |                |
| Shielded twisted pair cables, UL and CA 22.1 approved                       |                                                               |                  |                |
| Cables fitted with 2 x RJ45 connectors for connection to terminal equipment | Straight                                                      | 2 (7)            | 490NTW00002U   |
|                                                                             |                                                               | 5 (16)           | 490NTW00005U   |
|                                                                             |                                                               | 12 (39)          | 490NTW00012U   |
|                                                                             |                                                               | 40 (131)         | 490NTW00040U   |
|                                                                             |                                                               | 80 (263)         | 490NTW00080U   |
| For Modbus PLC connection                                                   |                                                               |                  |                |
| Cables fitted with 2 x RJ45 connectors                                      |                                                               | 0.3 (1)          | VW3A8306R03    |
|                                                                             |                                                               | 1 (3)            | VW3A8306R10    |
|                                                                             |                                                               | 3 (10)           | VW3A8306R30    |
| T-junctions                                                                 |                                                               | 0.3 (1)          | VW3A8306TF03   |
|                                                                             |                                                               | 1 (3)            | VW3A8306TF10   |
| RS485 line terminator                                                       |                                                               | —                | VW3A8306R      |
| For CANopen connection                                                      |                                                               |                  |                |
| Cables                                                                      |                                                               | 50 (164)         | TSXCANCA50     |
|                                                                             |                                                               | 100 (328)        | TSXCANCA100    |
|                                                                             |                                                               | 300 (984)        | TSXCANCA300    |
| IP20 connectors<br>SUB-D 9-pin female<br>Line end adapter switch            | Elbowed (90°)                                                 | —                | TSXCANKCDF90T  |
|                                                                             | Straight                                                      | —                | TSXCANKCDF180T |
|                                                                             | Elbowed (90°)                                                 | —                | TSXCANKCDF90TP |
|                                                                             | SUB-D 9-pin connector for connection to PC or diagnostic tool | —                |                |
| For DeviceNet connection                                                    |                                                               |                  |                |
| Cables                                                                      |                                                               | 50 (164)         | TSXCANCA50     |
|                                                                             |                                                               | 100 (328)        | TSXCANCA100    |
|                                                                             |                                                               | 300 (984)        | TSXCANCA300    |
| For Profibus DP connection                                                  |                                                               |                  |                |
| Cables                                                                      |                                                               | 100 (328)        | TSXPBSCA100    |
|                                                                             |                                                               | 400 (1313)       | TSXPBSCA400    |
| Connectors                                                                  | With line terminator                                          | —                | 490NAD91103    |
|                                                                             | Without line terminator                                       | —                | 490NAD91104    |
|                                                                             | With line terminator and terminal port                        | —                | 490NAD91105    |

**Table 16.295: Connecting Cables**

| Description                            | Number and type of connectors | Length<br>m (ft) | Catalog Number |
|----------------------------------------|-------------------------------|------------------|----------------|
| LTMCU control unit                     | 2 x RJ45                      | 1 (3)            | VW3A1104R10    |
|                                        |                               | 3 (10)           | VW3A1104R30    |
|                                        |                               | 5 (16)           | VW3A1104R50    |
| XBTN410                                | SUB-D 25-pin female to RJ45   | 2.5 (8)          | XBTZ938        |
| LTME expansion module                  | 2 x RJ45                      | 0.04 (0.13)      | LTMCC004       |
|                                        |                               | 0.3 (1)          | LU9R03         |
|                                        |                               | 1 (3)            | LU9R10         |
| 180 degree Ethernet external connector | 1 x RJ45                      | —                | LTM9CE180T     |

**Table 16.296: Marking Accessories**

| Description                                | Composition                                     | Sold in<br>lots of | Catalog Number |
|--------------------------------------------|-------------------------------------------------|--------------------|----------------|
| Clip-in markers<br>(maximum of 5 per unit) | Strips of 10 identical numbers (0 to 9)         | 25                 | AB1R • [5]     |
|                                            | Strips of 10 identical capital letters (A to Z) | 25                 | AB1G • [5]     |

8536SCO3V02H626

[5] When ordering, replace the • in the catalog number with the number or letter required.

## Dimensions (mm)

Table 16.297: LTMR\*\* controllers


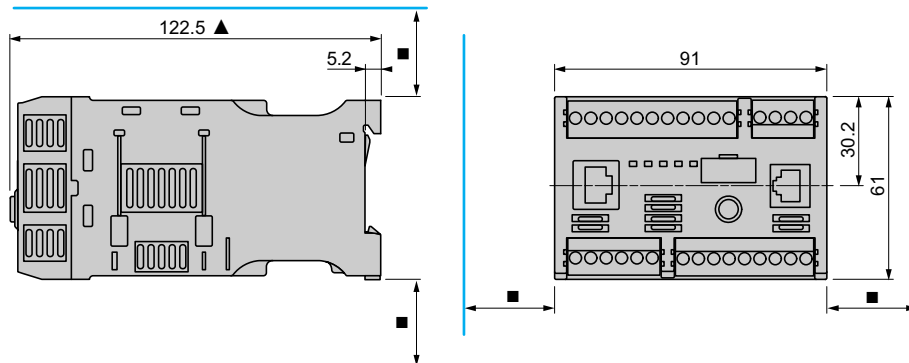



Table 16.298: LTMEV40\*\* expansion modules

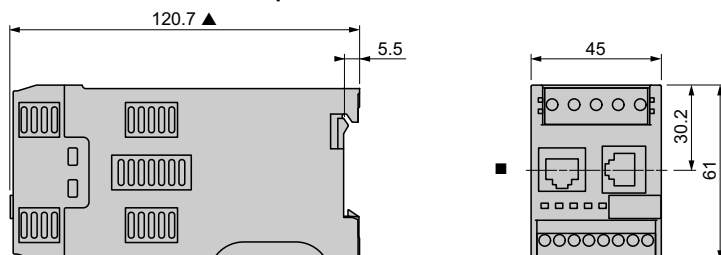

■ Leave a gap around the device of: 9 mm at 45 °C, 9–40 mm from 45–50 °C, 40 mm at 60 °C.

▲ 140 mm with an RJ45 connector for connection to an expansion module and a network; 166 mm with a Profibus DP/CANopen connector.


Table 16.299: LTMCU operator control unit

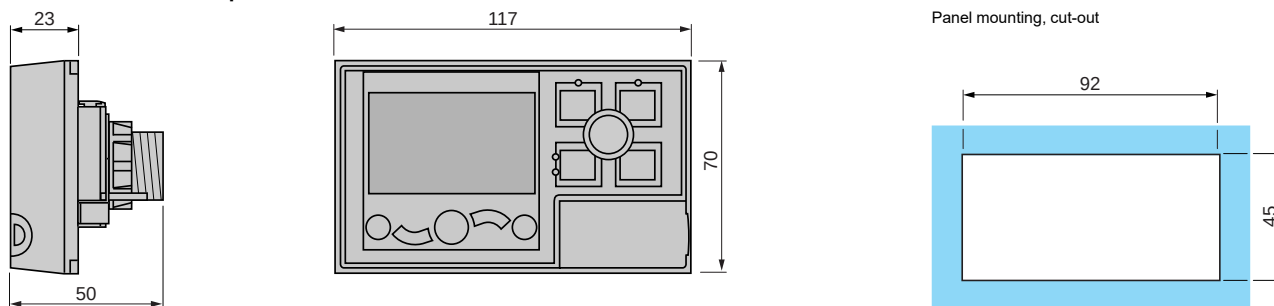

Panel mounting, cut-out


## Current Transformers

LT6CT

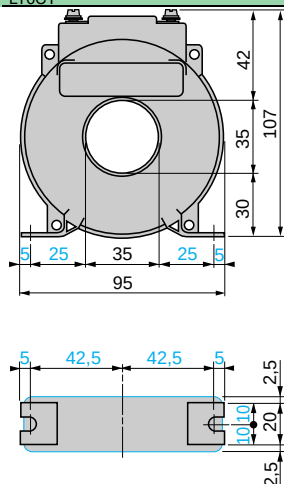

## HMI Terminal

XBTN410

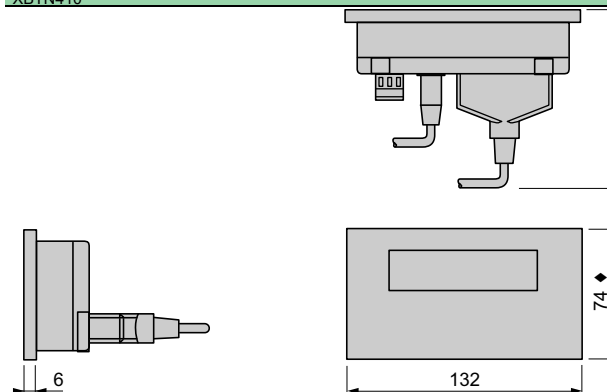

58 mm with SUB-D 25-pin elbowed cable XBTZ9680 for Twido®, TSX Micro™ and Premium™ PLCs or XBTZ998 for Advantys™ STB distributed I/O system.


104 mm with SUB-D 25-pin cable XBTZ68/Z9681 for Twido®, TSX Micro™ and Premium™ PLCs

◆ 104 mm with mounting clips (provided with the product).

New!

## Adapted Bimetallic or Solid-State Overload Relay Mounting Bracket Adapter (NEMA Sizes 00–1)

New!



Stand-Alone Mounting Bracket  
(Mounted to the Overload Relay)

The adapted bimetallic Type S starter incorporates a mounting bracket for use with a self-contained adjustable bimetallic or solid state overload relay. A separately mounting version of the bracket is also available for use with contactors that do not offer the same terminal configurations as the Type S, or for applications with height restraints that demand mounting next to the contactor rather than directly below as is typical for most starter configurations.

The bimetallic thermal overload relays feature Class 10 or Class 20 protection with automatic and manual (hand) reset and a trip-free mechanism. These overload relays are ambient temperature compensated, and available with or without phase imbalance protection. The component is available as a replacement on a starter or as a separately mounted overload relay adapter. The overload relay (LRD or LR3D) can be purchased separately and field installed at a future date.

The solid-state overload relays feature Class 5, 10, 20 or 30 protection (dip switch selectable) with automatic and manual (hand) reset and a trip-free mechanism. These overload relays are ambient-temperature compensated and can be wired for single-phase applications (must use the three-pole unit). The component is available as a replacement on a starter or as a separately mounted overload relay adapter. The overload relay (LR9D) can be purchased separately and field installed at a future date. If using the LR9D with a single-phase motor, the three-pole adapter must be purchased to accommodate looping of the motor leads.

For more information, see [Table 16.325](#).

**NOTE:** The LRD, LR3D, or LR9D overload relays must be purchased separately.

**Table 16.300: Replacement or Retrofit**

| Description | Sizes    | Maximum Full Load Current (A)<br>of Overload Relay | Catalog<br>Number |
|-------------|----------|----------------------------------------------------|-------------------|
| Two Pole    | 00, 0, 1 | 27                                                 | SADR751           |
| Three Pole  | 00, 0, 1 | 27                                                 | SADR75            |

**Table 16.301: Stand Alone**

| Description | Sizes    | Maximum Full Load Current (A)<br>of Overload Relay | Catalog<br>Number |
|-------------|----------|----------------------------------------------------|-------------------|
| Two Pole    | 00, 0, 1 | 27                                                 | SAD751            |
| Three Pole  | 00, 0, 1 | 27                                                 | SAD75             |

## External Reset Mechanisms, Class 9066

**Type RA** kits provide a convenient external means for resetting overload relays mounted in control enclosures of almost any depth. Designed for use on NEMA 1, 4 or 12 enclosures, they can be used with any Square D open type magnetic starter or Class 9065 overload relay. All kits are individually packaged for easy stocking and include complete installation instructions.

Only a single mounting hole is required in the enclosure door. Each kit contains one or more threaded reset rods, grooved at intervals of 3/4" so they can be cut to the approximate length required without thread damage. Final adjustment is easily made after installation by rotating a plunger and tightening the lock nut. Mechanisms with more than one reset rod include a steel cross bar with mounting holes located at 1/2" intervals, providing a choice of rod locations to suit any application. All steel parts are electrically isolated from the enclosure and the operator.

**Type RB** kits make it possible to field install external reset mechanisms to Type S combination starters in NEMA 12 enclosures. They may also be used to replace external reset mechanisms on Type S combination starters in NEMA 1, 4 and 12 enclosures.



Type RB1



Type W1



Type RA2 Series B  
Type SC1

**Table 16.302: Class 9066 External Reset Mechanisms**

| Where Used                                              | Type of Enclosure          | Reset Mechanism Kit<br>Description                                | Type              |
|---------------------------------------------------------|----------------------------|-------------------------------------------------------------------|-------------------|
| OEM Kit for commercial enclosures                       | NEMA 1, 12                 | With 1 Rod<br>With 2 Rods<br>With 3 Rods                          | RA1<br>RA2<br>RA3 |
| Replacement on 8538, 8539 starters                      | NEMA 1, 12                 | Size 0 and 1<br>Size 2                                            | RB1<br>RB2        |
| On commercial enclosures or Type S combination starters | NEMA 4                     | W1 is a boot only and must be used with RA or RB Kit listed above | W1                |
| Replacement on Class 8536 Type S starters               | NEMA 1 with slip-on covers | Size 00, 0 and 1<br>Size 2<br>Size 3                              | SC1<br>SD1<br>SE1 |
| Retro-fit kit Class 8940 Pump Panel                     | NEMA 3R                    | Reset for use with 9065TJF Series B OLR                           | RTJF              |



Type SCW21  
NEMA 4X EnclosureType SCA11  
NEMA 12 EnclosureType SCW11  
NEMA 4 EnclosureType SCH2  
NEMA 3R Enclosure

## Separate Enclosures, Class 9991

Separate enclosures can be used with open style devices for field assembly of enclosed controls. These enclosures, plus the open style components, are equivalent to a factory-assembled device. Separate enclosures are for use only with the following equipment:

- **NEMA 4 and 12** Class 9991 separate enclosures for Type S devices come standard with closing plates. See [Table 16.304](#) for the specific number of closing plates. For applications requiring enclosures without closing plates, contact your nearest Schneider Electric sales office.
- **NEMA 3R** enclosures for field assembly of equipment for outdoor applications come with three closing plates, a reset mechanism, and a predrilled panel as standard. For a conduit connection to the top of these enclosures, select watertight hubs from the listing on Digest page 3-10 in accordance with applicable code requirements. Square D NEMA 12 enclosures can also be modified for outdoor use. For details, refer to the NEMA 12 enclosure modification information on page [page 16-112](#). **NOTE:** Not for use in high-corrosive outdoor locations or sea coast environments.
- **NEMA 4X** enclosures for Type S devices, Sizes 0–2 and 30–60 A, come standard without closing plates. Cover mounted control units for NEMA 4X separate enclosures are available as a factory modification only.

When closing plates are removed from NEMA 4, 12, and 3R enclosure covers, the openings can be used for easy installation of Class 9001 Type K or SK cover-mounted control units. Convenient Class 9999 modification kits containing Class 9001 Type K control kits can be found on page [page 16-126](#).

**Table 16.303: How to Order**

| To Order Specify: | Catalog Number |       |
|-------------------|----------------|-------|
| • Class Number    | Class          | Type  |
| • Type Number     | 9991           | SCW11 |

**Table 16.304: Selection, Class 9991**

| For Use With                                                                    |                               | NEMA Size or Ampere Rating | Enclosure Classification                                              |                                                     |                          |                                    |                          |                                                 |
|---------------------------------------------------------------------------------|-------------------------------|----------------------------|-----------------------------------------------------------------------|-----------------------------------------------------|--------------------------|------------------------------------|--------------------------|-------------------------------------------------|
|                                                                                 |                               |                            | NEMA 4X Watertight, Dusttight and Corrosion-Resistant Glass-Polyester | NEMA 4 [1] Watertight and Dusttight Stainless Steel |                          | NEMA 12/3R Dusttight and Driptight |                          | NEMA 3R Rainproof, Sleet Resistant, Outdoor Use |
| Class                                                                           | Types (All Pole Arrangements) |                            | Type                                                                  | Type                                                | Number of Closing Plates | Type                               | Number of Closing Plates | Type                                            |
| <b>Manual Starters</b>                                                          |                               |                            |                                                                       |                                                     |                          |                                    |                          |                                                 |
| 2510 [2]                                                                        | MBO, MCO                      | MO<br>M1<br>M1P            | MW1                                                                   | MW11                                                | —                        | MA1                                | —                        | —                                               |
| <b>Magnetic Contactors</b>                                                      |                               |                            |                                                                       |                                                     |                          |                                    |                          |                                                 |
| 8502 [3]                                                                        | SAO, SBO, SCO                 | 00, 0, 1                   | SCW20                                                                 | SCW11                                               | 2                        | SCA11 [4]                          | 2                        | SCH2                                            |
|                                                                                 | SDO                           | 2                          | SDW20                                                                 | SDW11                                               | 2                        | SDA11 [4]                          | 2                        | SDH1                                            |
|                                                                                 | SEO                           | 3                          | —                                                                     | SEW11                                               | 3                        | SEA11 [4]                          | 3                        | SEH1                                            |
|                                                                                 | SFO                           | 4                          | —                                                                     | SFW11                                               | 3                        | SFA11 [4]                          | 3                        | SFH1                                            |
| <b>Magnetic Starters</b>                                                        |                               |                            |                                                                       |                                                     |                          |                                    |                          |                                                 |
| 8536                                                                            | SAO, SBO, SCO                 | 00, 0, 1                   | SCW21                                                                 | SCW11                                               | 2                        | SCA11 [4]                          | 2                        | SCH2                                            |
|                                                                                 | SDO                           | 2                          | SDW21                                                                 | SDW11                                               | 2                        | SDA11 [4]                          | 2                        | SDH1                                            |
|                                                                                 | SEO                           | 3                          | —                                                                     | SEW11 [5]                                           | 3                        | SEA11 [4]                          | 3                        | SEH1                                            |
|                                                                                 | SFO                           | 4                          | —                                                                     | SFW11 [5]                                           | 3                        | SFA11 [4]                          | 3                        | SFH1                                            |
| <b>Lighting Contactors, Non-Combination, Electrically and Mechanically Held</b> |                               |                            |                                                                       |                                                     |                          |                                    |                          |                                                 |
| 8903 [3]                                                                        | LO, LXO                       | 20 A                       | SDW20                                                                 | SDW11                                               | 2                        | SDA11 [4]                          | 2                        | SDH1                                            |
|                                                                                 | SMO                           | 30 A                       | SCW20 [6]                                                             | SCW11                                               | 2                        | SCA11 [4]                          | 2                        | SCH2                                            |
|                                                                                 | SPO                           | 60 A                       | SCW20 [6]                                                             | SDW11                                               | 2                        | SDA11 [4]                          | 2                        | SDH1                                            |
|                                                                                 | SQO                           | 100 A                      | —                                                                     | SEW11 [5]                                           | 3                        | SEA11 [4]                          | 3                        | SEH1                                            |
|                                                                                 | SVO                           | 200 A                      | —                                                                     | —                                                   | —                        | —                                  | —                        | SFH1                                            |
| <b>Reversing and Two-Speed, Horizontally Arranged Contactors and Starters</b>   |                               |                            |                                                                       |                                                     |                          |                                    |                          |                                                 |
| 8702 [3]                                                                        | SBO, SCO                      | 0, 1                       | —                                                                     | SCW12                                               | 3                        | SCA12 [4]                          | 3                        | —                                               |
| 8736                                                                            | SDO                           | 2                          | —                                                                     | SDW12                                               | —                        | SDA12 [4]                          | —                        | —                                               |
| 8810                                                                            | SBO & SCO                     | 0, 1                       | —                                                                     | SCW13                                               | 3                        | SCA13 [4]                          | 3                        | —                                               |

[1] The standard cabinet has a brushed finish.


[2] Type MBO, Size MO only.

[3] For contactors, replace the reset assembly with a proper closing plate: for NEMA 4, use Class 9001 Type K52; for NEMA 3R and 12, use Class 9001 Type K51. (Class 9991 Types SCW20 and SDW20 are designed for contactors only, so reset closing plates are not required.)

[4] NEMA 12 enclosures can be field modified for outdoor non-corrosive and non-service entrance rated applications. See [page 16-112](#) for more information.

[5] This enclosure is suitable only for starters with a **melting alloy**, **solid-state**, or **adapted bimetallic** overload relay.

[6] For electrically held devices only.



Flush Mounting Starter with Pull Box and Mounting Strap and Plaster Adjustment Feature



Type SCG8  
NEMA 1 Enclosure

## Flush Mounting, General Purpose Separate Enclosures

Flush mounting, general purpose separate enclosures for Type S Sizes 0–2, 30–60 A are provided with knock-outs in the cover for field assembly of one Class 9999 push button or selector switch kit and one Class 9999 pilot light kit. (Refer to Class 9999 for selection.) For Type S Size 3, 100 A, three closing plates are provided for installation of Class 9001 Type K oiltight control units. For enclosure dimensions, refer to Table 16.309.

Table 16.305: Flush Mounting Selection Table

| For Use With                                                           |                                     | NEMA<br>Size<br>or<br>Ampere Rating | Flush Mounting General Purpose (Components) |                                           |                   |          |
|------------------------------------------------------------------------|-------------------------------------|-------------------------------------|---------------------------------------------|-------------------------------------------|-------------------|----------|
| Class                                                                  | Types<br>(All Pole<br>Arrangements) |                                     | Flush Plates                                |                                           | Mounting<br>Strap | Pull Box |
|                                                                        |                                     |                                     | Standard                                    | Stainless<br>Steel [7]                    |                   |          |
|                                                                        |                                     |                                     |                                             |                                           |                   |          |
| 2510                                                                   | MBO,<br>MCO                         | MO<br>M1<br>M1P                     | MF1                                         | (with pullbox and plaster adjustment)     |                   |          |
|                                                                        |                                     |                                     | MF2                                         | (without pullbox but with mounting strap) |                   |          |
| Magnetic Contactors                                                    |                                     |                                     |                                             |                                           |                   |          |
| 8502[8]                                                                | SBO,<br>SCO                         | 0, 1                                | SCF11                                       | SCF12                                     | SCF2              | SCF1     |
|                                                                        | SDO                                 | 2                                   | SDF11                                       | SDF12                                     | SDF2              | SDF1     |
|                                                                        | SEO                                 | 3                                   | SEF11                                       | (Enclosure Complete)                      |                   |          |
| Magnetic Starters                                                      |                                     |                                     |                                             |                                           |                   |          |
| 8536                                                                   | SBO,<br>SCO                         | 0, 1                                | SCF11                                       | SCF12                                     | SCF2              | SCF1     |
|                                                                        | SDO                                 | 2                                   | SDF11                                       | SDF12                                     | SDF2              | SDF1     |
| Lighting Contactors Non-Combination Electrically and Mechanically Held |                                     |                                     |                                             |                                           |                   |          |
| 8903[8]                                                                | LO, LXO                             | 20 A                                | SDF13                                       | —                                         | SDF2              | SDF1     |
|                                                                        | SMO 1–4                             | 30 A                                | SCF11                                       | —                                         | SCF2              | SCF1     |
|                                                                        | SMO 10–13                           | 30 A                                | SCF13                                       | —                                         | SCF2              | SCF1     |
|                                                                        | SPO 1–4                             | 60 A                                | SDF11                                       | —                                         | SDF2              | SDF1     |
|                                                                        | SPO 10–13                           | 60 A                                | SDF13                                       | —                                         | SDF2              | SDF1     |
|                                                                        | SQO 1–13                            | 100 A                               | SEF11                                       | (Enclosure Complete)                      |                   |          |

NEMA 1 General Purpose separate enclosures in Table 16.306, when used with open style components, are equivalent to a standard factory assembled control device.

Table 16.306: NEMA 1 Selection Table

| For Use With |                                                                                     |                            | NEMA 1 General Purpose Enclosure Class 9991 |
|--------------|-------------------------------------------------------------------------------------|----------------------------|---------------------------------------------|
| Class        | Type                                                                                | No. of Poles               | Type                                        |
| 2510         | F and K                                                                             | All                        | EN1                                         |
|              | M—Sizes M0 and M1                                                                   | All                        | MG1                                         |
|              | M—Size M1P                                                                          | All                        | MG2                                         |
| 8501         | CO                                                                                  | All                        | UE1                                         |
|              | XO                                                                                  | 2–12, 2–4 with attachments | UE7                                         |
| 8502         | XDO                                                                                 | 2–8 without attachments    | SDG7                                        |
|              | SAO, SBO, SCO                                                                       | 2–4                        | SDG7                                        |
|              | SDO                                                                                 | 2–4                        | SDG7                                        |
| 8536         | SEO                                                                                 | 2–4                        | SEG7                                        |
|              | SFO                                                                                 | 2–4                        | SFG8                                        |
|              | SAO, SBO, SCO                                                                       | 2–4                        | SCG8                                        |
| 8702, 8736   | SDO                                                                                 | 2–4                        | SDG8                                        |
|              | SEO                                                                                 | 2–4                        | SEG8 [8] [9]                                |
|              | SFO                                                                                 | 2–4                        | SFG8 [8] [9]                                |
| 8903         | SGO                                                                                 | 3                          | SGG8 [10] [9]                               |
|              | SAO, SBO, SCO                                                                       | All                        | SCG9 [11]                                   |
|              | SDO                                                                                 | All                        | SDG9 [11]                                   |
| 8910         | LO, LXO                                                                             | All                        | LXG1 [12]                                   |
|              | SMO                                                                                 | All                        | SCG7 [13]                                   |
|              | SPO                                                                                 | All                        | SDG7 [13]                                   |
| 8911         | SQO                                                                                 | All                        | SFG8                                        |
|              | SVO                                                                                 | All                        | SFG4                                        |
| 9050         | DP                                                                                  | 1–2                        | DPG1                                        |
|              | DPA12, 13, 22, 23, 32, 33, 42, 43                                                   | 2–3                        | DPG1                                        |
|              | DPA14, 24, 34, 44, 52, 53                                                           | 2–4                        | DPG2                                        |
| 9070         | DPA62, 63                                                                           | 2–3                        | DPG3                                        |
|              | DPA72, 73, 92, 93                                                                   | 2–3                        | DPG4                                        |
|              | H, J, K, L & M                                                                      | All                        | UE6                                         |
| 9090         | DPSO13, 23, 33, 43                                                                  | 3                          | DPG1                                        |
|              | DPSO53                                                                              | 3                          | DPG2                                        |
|              | DPSO63, 73, 93                                                                      | 3                          | SEG8                                        |
| 9095         | AO (Single Head)                                                                    | All                        | UE6                                         |
|              | HO                                                                                  | All                        | UE6                                         |
|              | EO51, EO61, EO71, K750, K1000                                                       | —                          | SDG4                                        |
| 9097         | EO2, EO3, EO4, EO15, EO16 EO18, EO19, T75, T100, T150, T200, T250, T300, T350, T500 | —                          | LG1                                         |
|              | EO1, EO17, T50                                                                      | —                          | UE7                                         |

[7] The standard cabinet has a brushed finish.

[8] For contactors, replace the reset assembly with a proper closing plate. For flush mounting, use Class 9999 Type SG2—except for Class 9991 Type SDF11 enclosures, which require a Class 9001 Type K51 or K11 closing plate. (Class 9991 Types SEF11 and LF1 are designed for contactors only, so reset closing plates are not required.)

[9] This enclosure is suitable only for starters with a melting alloy, solid-state, or adapted bimetallic overload relay.

[10] Series B starter enclosure.

[11] For horizontally arranged Class 8702 contactors, replace the reset assembly with a Class 9001 Type K51 closing plate.

[12] If cover mounted control units are required, select an oversized enclosure listed in Table 16.307.

[13] For electrically held contactors only. See Table 16.307 for mechanically held contactors.

Type SCW4  
NEMA 4 EnclosureType SCG1  
With Starter, Transformer and  
Fuse Block InstalledType SCA11  
NEMA 12 Enclosure

## Enclosure Selection

### NEMA 1, 4, and Oversized Enclosures

#### For the Addition of a Control Circuit Transformer

The Class 9991 enclosures listed in [Table 16.307](#) accept an open type Class 8502 or 8536 Type S, NEMA Size 0, 1, 1P, or 2 contactor or starter along with a fused control circuit transformer (Form F4T) to allow field assembly of enclosed controllers. In the cover of the Class 9991 Type SCG1 enclosure, knock-outs are provided for field addition of Class 9999 cover-mounted control units. All other Class 8502 & 8536 enclosures include a panel with space and drilling for an open-type device and a fused control circuit transformer. In addition, three closing plates are included in each cover for easy installation of Class 9001 Type K or SK control units.

Oversized enclosures for open type Class 8903 Type L & LX, 20 A and Type S, 30 and 60 A electrically and mechanically held lighting contactors include a panel with space and drilling for an open-type contactor and fused control circuit transformer (Form F4T) and/or an auxiliary relay for use with single pole pilot devices (Form R6). When an auxiliary relay is required, use a Class 8501 Type XO11 relay. Three closing plates are provided as standard for easy installation of Class 9001 Type K or SK control units.

**Note:** A Class 9991 Type SCG1 NEMA 1 separate enclosure can also be used for Class 8903 Type SMO, 30 A electrically held lighting contactor if Form F4T (control transformer), with or without cover control units is required.

### NEMA 12/3R Enclosures Modified for Outdoor Applications (not to be used in salt air or corrosive environments)

**Field Modifications for NEMA 3** dusttight, raintight and sleet resistant outdoor applications are as follows: Watertight conduit hubs or equivalent provision for watertight connection at the conduit entrance shall be used.

**Field Modifications for NEMA 3R** rainproof and sleet resistant outdoor applications are as follows:

- Watertight conduit hubs or equivalent provision for watertight connection at the conduit entrance, when the conduit enters at a level higher than the lowest live part, shall be used.
- Drain holes of 1/8 inch diameter shall be added to the bottom of the enclosure.

Class 9001 Type K oiltight/watertight control units can be easily installed in NEMAs 4, 12, and oversized NEMA 1 separate enclosures provided with closing plates. When installing control units simply remove the closing plates and install the proper Class 9001 Type K components. Convenient control unit kits complete with assembled and pre-wired operators for quick installation are available as Class 9999 user modification kits. See [Table 16.308](#) for contents of each control unit kit. Class 9001 Type SK NEMA 4X corrosion resistant control units may be used as an alternate.

**Table 16.307: NEMA 1, 4, and 12 Enclosures**

| For Use With                          |                     |                                     |                    | Class 9991 Enclosure         |                                                               |                                                              | Recommended Class 9070 [14]<br>Transformer Selection |        |                |                |                | Fuse<br>Block |
|---------------------------------------|---------------------|-------------------------------------|--------------------|------------------------------|---------------------------------------------------------------|--------------------------------------------------------------|------------------------------------------------------|--------|----------------|----------------|----------------|---------------|
| Class                                 | Type                | NEMA<br>Size or<br>Ampere<br>Rating | No.<br>of<br>Poles | General<br>Purpose<br>NEMA 1 | Watertight and<br>Dusttight<br>Stainless Steel<br>NEMA 4 [15] | Dusttight and<br>Driptight<br>Industrial Use<br>NEMA 12 [16] | Standard                                             |        | Extra Capacity |                |                |               |
|                                       |                     |                                     |                    | Type                         | Type                                                          | Type                                                         | Type                                                 | VA     | 100 VA<br>Type | 150 VA<br>Type | 300 VA<br>Type |               |
| Magnetic Contactors and Starters [17] |                     |                                     |                    |                              |                                                               |                                                              |                                                      |        |                |                |                |               |
| 8502,<br>8536                         | SAO,<br>SBO,<br>SCO | 00, 0, 1                            | 1-3                | SCG1                         | SCW4                                                          | SCA4                                                         | T50                                                  | 50 VA  | T100 [18]      | T150 [18]      | —              |               |
|                                       |                     | 4-5                                 | T100 [18]          |                              |                                                               |                                                              | 100 VA                                               | —      | T150 [18]      | —              |                |               |
|                                       | SDO                 | 2                                   | 2-5                | SDG4                         | SDW4                                                          | SDA4                                                         | T100                                                 | 100 VA | —              | T150           | T300           |               |
| Lighting Contactors, Non-Combination  |                     |                                     |                    |                              |                                                               |                                                              |                                                      |        |                |                |                |               |
| 8903                                  | LO, LXO             | 20 A                                | All                | SDG3                         | SDW3                                                          | SDA3                                                         | T50                                                  | 50 VA  | —              | —              | —              |               |
|                                       |                     |                                     |                    |                              |                                                               |                                                              | T50                                                  | 50 VA  | T100 [18]      | T150 [18]      | —              |               |
|                                       | SMO [19]            | 30 A                                | 1-3                |                              |                                                               |                                                              | T100 [18]                                            | 100 VA | —              | T150 [18]      | —              |               |
|                                       |                     | 4-5                                 |                    |                              |                                                               |                                                              |                                                      |        |                |                |                |               |
|                                       | SPO [19]            | 60 A                                | 2-5                |                              |                                                               |                                                              | T100                                                 | 100 VA | —              | T150           | T300           |               |

Class  
9999  
Type  
SFR4

**Table 16.308: Control Unit Selection Table**

| Class 9999<br>Type | Control Function                 | Kit Contents<br>Class and Type                                           | Description                                                                                 |
|--------------------|----------------------------------|--------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|
| SA3                | Start-Stop<br>Push Button        | 1-9001 KR1B<br>1-9001 KR1R<br>1-9001 KN201<br>1-9001 KN202<br>2-9001 KA1 | Start Operator<br>Stop Operator<br>Start Legend Plate<br>Stop Legend Plate<br>Contact Block |
| SC8                | Hand-Off-Auto<br>Selector Switch | 1-9001 KS43B<br>1-9001 KN260<br>1-9001 KA1                               | Selector Operator Switch<br>Hand-Off-Auto Legend Plate<br>Contact Block                     |
| SP28R              | Pilot Light (120 V)              | 1-9001 KP1R31                                                            | Red Pilot Light                                                                             |

[14] For complete description, see the Class 9070 section. **Note:** The Class 9991 Type SCG1 enclosure comes standard with a Class 9999 Type SF4 fuse block.

[15] The standard cabinet has a brushed finish.

[16] NEMA 12 modified for outdoor use (see [NEMA 12/3R Enclosures Modified for Outdoor Applications](#)).

[17] For contactors (Class 8502), a separate closing plate is provided with each enclosure to replace the reset mechanism—with the exception of Class 9991 Type SCG1, which requires a separate reset closing plate: Class 9999 Type SG2.

[18] To mount in an SCG1 enclosure, a Class 9991 Type S1 adapter bracket is also required.

[19] Mechanically held.

## NEMA 1 Enclosures

**NOTE:** These dimensions are for reference only. If you need precise measurements, contact the Customer Care Center at 1-888-778-2733.

**Table 16.309: NEMA 1—General Purpose Enclosures (Standard)**

| Class<br>9991<br>Type | For Use With |                      |            |                 | Dimensions (inches/millimeters) |                          |              |              |             |              |            |              |              |            |             |             |            |             |    | Weight<br>(lb) |  |  |  |  |  |  |  |  |  |
|-----------------------|--------------|----------------------|------------|-----------------|---------------------------------|--------------------------|--------------|--------------|-------------|--------------|------------|--------------|--------------|------------|-------------|-------------|------------|-------------|----|----------------|--|--|--|--|--|--|--|--|--|
|                       | Class        | Type                 | Size       | No. of<br>Poles | Fig.<br>No.                     | Mounting<br>Screws (in.) | A            | B            | C           | D            | E          | F            | G            | H          | I           | J           | K          | L           |    |                |  |  |  |  |  |  |  |  |  |
| LXG1                  | 8903         | LO<br>LXO            | 20 A       | 2-12            | 1                               | —                        | 7.81<br>198  | 12.69<br>322 | 6.03<br>153 | —            | 1.09<br>28 | 10.50<br>267 | 1.09<br>28   | 1.09<br>28 | 5.63<br>143 | 5.75<br>146 | 1.09<br>28 | 5.63<br>143 | 8  |                |  |  |  |  |  |  |  |  |  |
| DPG1                  | 8910         | DP<br>DPA            | 20-40<br>A | 1-2<br>1-3      | 1                               | (4) #10                  | 4.85<br>123  | 8.5<br>216   | 4.03<br>102 | 2.42<br>62   | .109<br>3  | 5.75<br>146  | .531<br>13   | .92<br>23  | 3.00<br>76  | 3.75<br>95  | —          | —           | 2  |                |  |  |  |  |  |  |  |  |  |
| SCG7                  | 8903         | SMO (E.H.)           | 30 A       | All             | 1                               | (3) #10                  | 6.00<br>152  | 10.00<br>254 | 5.28<br>134 | 3.00<br>76   | .88<br>22  | 8.13<br>206  | 1.00<br>25   | .94<br>24  | 4.13<br>105 | 5.00<br>127 | —          | —           | 4  |                |  |  |  |  |  |  |  |  |  |
|                       | 8502         | SAO                  | .00        | 2-3             |                                 |                          |              |              |             |              |            |              |              |            |             |             |            |             |    |                |  |  |  |  |  |  |  |  |  |
|                       |              | SBO<br>SCO           | 0<br>1     | All             |                                 |                          |              |              |             |              |            |              |              |            |             |             |            |             |    |                |  |  |  |  |  |  |  |  |  |
| SCG8                  | 8536         | SAO                  | .00        | 2-3             |                                 |                          |              |              | 5.56<br>141 |              |            |              |              |            |             |             |            |             |    |                |  |  |  |  |  |  |  |  |  |
|                       |              | SBO<br>SCO           | 0<br>1     | All             |                                 |                          |              |              |             |              |            |              |              |            |             |             |            |             |    |                |  |  |  |  |  |  |  |  |  |
| DPG2                  | 8910         | DPA                  | —          | —               | 1                               | (4) 1/4                  | 7.81<br>198  | 12.69<br>322 | 6.31<br>160 | —            | 1.09<br>28 | 10.50<br>267 | 1.09<br>28   | 1.09<br>28 | 5.63<br>143 | 5.75<br>146 | 1.09<br>28 | 5.63<br>143 | 8  |                |  |  |  |  |  |  |  |  |  |
| DPSG1                 | 8911         | DPS                  | —          | —               |                                 |                          |              |              |             |              |            |              |              |            |             |             |            |             |    |                |  |  |  |  |  |  |  |  |  |
| SDG7                  | 8903         | SPO (E.H.)           | 60 A       | 2-12            |                                 |                          |              |              |             |              |            |              |              |            |             |             |            |             |    |                |  |  |  |  |  |  |  |  |  |
| SDG8                  | 8536         | SDO                  | 2          | All             |                                 |                          |              |              |             |              |            |              |              |            |             |             |            |             |    |                |  |  |  |  |  |  |  |  |  |
|                       |              | SDO                  | 2          | All             |                                 |                          |              |              |             |              |            |              |              |            |             |             |            |             |    |                |  |  |  |  |  |  |  |  |  |
| DPG3                  | 8910         | DPA                  | —          | —               | 1                               | (4) 3/8                  | 11.44<br>291 | 21.81<br>554 | 8.00<br>203 | —            | 1.53<br>39 | 18.75<br>476 | 1.53<br>39   | 1.53<br>39 | 8.38<br>213 | 7.75<br>197 | 1.53<br>39 | 8.38<br>213 | 23 |                |  |  |  |  |  |  |  |  |  |
| DPSG2                 | 8911         | DPS                  | —          | —               |                                 |                          |              |              |             |              |            |              |              |            |             |             |            |             |    |                |  |  |  |  |  |  |  |  |  |
| SEG7                  | 8502         | SEO                  | 3          | All             |                                 |                          |              |              |             |              |            |              |              |            |             |             |            |             |    |                |  |  |  |  |  |  |  |  |  |
| SEG8                  | 8536         | SEO                  | 3          | All             |                                 |                          |              |              |             |              |            |              |              |            |             |             |            |             |    |                |  |  |  |  |  |  |  |  |  |
|                       |              | DPSG63 to 93         | —          | All             |                                 |                          |              |              |             |              |            |              |              |            |             |             |            |             |    |                |  |  |  |  |  |  |  |  |  |
| DPG4                  | 8910         | DPA                  | —          | —               | 2                               | (4) 7/16                 | 11.25<br>286 | 25.15<br>639 | 8.99<br>228 | 8.60<br>218  | 1.25<br>32 | 1.25<br>32   | 22.31<br>567 | 1.42<br>36 | .44<br>11   | —           | —          | —           | 34 |                |  |  |  |  |  |  |  |  |  |
| SFG8                  | 8502         | SFO                  | 4          | All             |                                 |                          |              |              |             |              |            |              |              |            |             |             |            |             |    |                |  |  |  |  |  |  |  |  |  |
|                       | 8536         | SFO                  | 4          | All             |                                 |                          |              |              |             |              |            |              |              |            |             |             |            |             |    |                |  |  |  |  |  |  |  |  |  |
| SCG9                  | 8903         | SQO<br>(E.H. & M.H.) | 100 A      | All             | 2                               | (4) 5/16                 | 11.88<br>302 | 11.88<br>302 | 7.41<br>188 | 9.75<br>248  | 1.06<br>27 | 1.06<br>27   | 9.75<br>248  | 1.06<br>27 | .31<br>8    | —           | —          | —           | 16 |                |  |  |  |  |  |  |  |  |  |
|                       | 8702<br>[20] | SBO, SCO             | 0 & 1      |                 |                                 |                          |              |              |             |              |            |              |              |            |             |             |            |             |    |                |  |  |  |  |  |  |  |  |  |
|                       | 8922         | ETBC20,<br>ETBC36    | —          |                 |                                 |                          |              |              |             |              |            |              |              |            |             |             |            |             |    |                |  |  |  |  |  |  |  |  |  |
| SDG9                  | 8702<br>[20] | SCO                  | 2          | All             | 2                               | (4) 5/16                 | 14.88<br>378 | 14.13<br>359 | 7.56<br>192 | 12.75<br>324 | 1.06<br>27 | 1.06<br>27   | 12.00<br>305 | 1.06<br>27 | .31<br>8    | —           | —          | —           | 24 |                |  |  |  |  |  |  |  |  |  |
|                       | 8922         | ETBC60               | —          |                 |                                 |                          |              |              |             |              |            |              |              |            |             |             |            |             |    |                |  |  |  |  |  |  |  |  |  |

**Table 16.310: NEMA 1—General Purpose Enclosures (Oversize)**

| Class 9991 Type | For Use With |                                          |                      |              | Fig. No. | Mounting Screws (in.) | A         | B         | C        | D         | E       | F         | G         | H       | I     | Weight (lb) |
|-----------------|--------------|------------------------------------------|----------------------|--------------|----------|-----------------------|-----------|-----------|----------|-----------|---------|-----------|-----------|---------|-------|-------------|
|                 | Class        | Type                                     | Size                 | No. of Poles |          |                       |           |           |          |           |         |           |           |         |       |             |
| SDG3            | 8903         | LO, L XO<br>SMO (M.H.)<br>SPO (Form F4T) | 20 A<br>30 A<br>60 A | All          | 2        | (4) 5/16              | 14.88 378 | 14.13 359 | 7.56 192 | 12.75 324 | 1.06 27 | 1.06 27   | 12.00 305 | 1.06 27 | .31 8 | 15          |
| SDG4            | 8502         | SDO (Form F4T)                           | 2                    | All          |          |                       |           |           |          |           |         |           |           |         |       |             |
|                 | 8536         | SDO (Form F4T)                           | 2                    | All          |          |                       |           |           |          |           |         |           |           |         |       |             |
|                 | 9070         | EO51, EO61, EO71, T750, T1000            | —                    | —            |          |                       |           |           |          |           |         |           |           |         |       |             |
| SCG1            | 8502         | SBO, SCO (Form F4T)                      | 0, 1                 | All          | 3        | (4) 9/32              | 6.34 161  | 15.88 403 | 5.19 132 | 4.66 118  | .84 21  | 14.38 365 | .75 19    | .28 7   | .35 9 | 8           |
|                 | 8536         | SBO, SCO (Form F4T)                      | 0, 1                 | All          |          |                       |           |           |          |           |         |           |           |         |       |             |
|                 | 8903         | SMO (E.H.) (Form F4T)                    | 30 A                 | All          |          |                       |           |           |          |           |         |           |           |         |       |             |

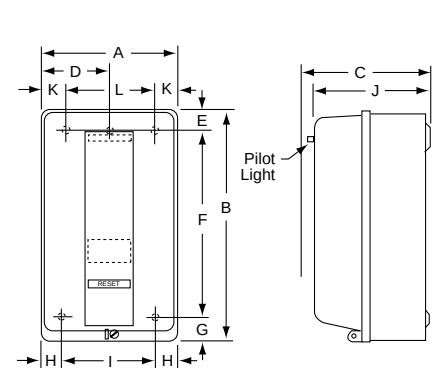


Figure 1  
Dimensions: in.  
mm

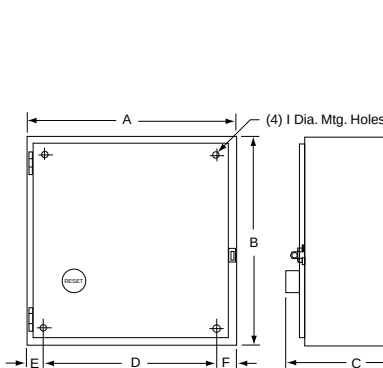


Figure 2

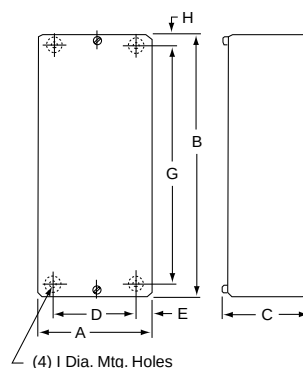


Figure 3

[20] The standard enclosure has space for a fused control transformer, **Form FF4T**, on Sizes 0-2.

## NEMA 1 and 3R Enclosures



**NOTE:** These dimensions are for reference only. If you need precise measurements, contact the Customer Care Center at 1-888-778-2733.

Table 16.311: NEMA 1—General Purpose Enclosures

| Class 9991 Type | For Use With |                                                                                                       |                                | Dimensions (See Figure 4) |             |             |             |             |            |            |                 |                            |             | Weight (lb) |
|-----------------|--------------|-------------------------------------------------------------------------------------------------------|--------------------------------|---------------------------|-------------|-------------|-------------|-------------|------------|------------|-----------------|----------------------------|-------------|-------------|
|                 | Class        | Type                                                                                                  | No. of Poles                   | A                         | B           | C           | D           | E           | F          | G          | H               | J                          | L           |             |
| UE1             | 8501         | CO                                                                                                    | All                            | 3.63<br>92                | 5.28<br>134 | 3.31<br>84  | 1.88<br>48  | 3.63<br>92  | 1.06<br>27 | 1.50<br>38 | 1/4 in.<br>[21] | 1/2–3/4 in.                |             | 2           |
| UE6             | 8910         | H, J, K<br>L & M                                                                                      | All                            | 4.91<br>125               | 5.75<br>146 | 5.53<br>140 | 3.50<br>89  | 4.38<br>111 | 1.56<br>40 | 2.00<br>51 | 9/32 in.        | 1/2–3/4 in.<br>1–1-1/4 in. | 1/2–3/4 in. | 2           |
|                 | 9050         | AO<br>(Single Head)                                                                                   | All                            |                           |             |             |             |             |            |            |                 |                            |             |             |
|                 |              | HO                                                                                                    | All                            |                           |             |             |             |             |            |            |                 |                            |             |             |
| UE7             | 8501         | XO                                                                                                    | 2–12, 2–4<br>w/<br>Attachments | 4.87<br>124               | 7.79<br>198 | 7.53<br>191 | 3.50<br>89  | 6.38<br>162 | 1.31<br>33 | 1.88<br>48 | #10             | 1/2–3/4 in.                |             | 4           |
|                 |              | XDO                                                                                                   | 2–8                            |                           |             |             |             |             |            |            |                 |                            |             |             |
|                 | 9070         | EO1, EO17<br>T25, & T50                                                                               | —                              |                           |             |             |             |             |            |            |                 |                            |             |             |
| LG1             | 9070         | EO2, EO3, EO4, EO15,<br>EO16, EO18, EO19,<br>T75, T100, T150,<br>T200, T250, T300,<br>T350, &<br>T500 | —                              | 7.53<br>191               | 9.78<br>248 | 5.91<br>150 | 6.13<br>156 | 8.38<br>213 | 1.31<br>33 | 1.88<br>48 | 9/32 in.        | 1/2–3/4–1 in. [22]         |             | 10          |

Table 16.312: NEMA 3R—Rainproof and Sleet-Resistant Enclosures

| Class<br>9991<br>Type | For Use With |            |       |                 | Dimensions (see Figure 5) |               |             |            |            |              |              |            |            |            |            |              |            |            |            |             |            |                          |                 |
|-----------------------|--------------|------------|-------|-----------------|---------------------------|---------------|-------------|------------|------------|--------------|--------------|------------|------------|------------|------------|--------------|------------|------------|------------|-------------|------------|--------------------------|-----------------|
|                       | Class        | Type       | Size  | No. of<br>Poles | A                         | B             | C           | D1         | D2         | E            | F            | G1         | G2         | H1         | H2         | J            | K          | L          | M          | N           | P          | K.O.<br>X                | K.O.<br>Y       |
| SCH2                  | 8502<br>8536 | SBO<br>SCO | 0, 1  | All             | 8.83<br>224               | 12.30<br>312  | 7.12<br>181 | 1.39<br>35 | 1.44<br>37 | 6.00<br>152  | 7.50<br>191  | 2.61<br>66 | 2.19<br>56 | 2.08<br>53 | 2.62<br>66 | 14.28<br>363 | 1.37<br>35 | 1.37<br>35 | 1.88<br>48 | 4.38<br>111 | 1.83<br>46 | 1/2<br>3/4<br>1          | 1/2<br>3/4<br>1 |
|                       | 8903         | SMO        | 30 A  |                 |                           |               |             |            |            |              |              |            |            |            |            |              |            |            |            |             |            |                          |                 |
| SDH1                  | 8502<br>8536 | SDO        | 2     | All             | 9.83<br>250               | 16.30<br>414  | 8.62<br>219 | 1.39<br>35 | 1.44<br>37 | 7.00<br>178  | 11.50<br>292 | 2.61<br>66 | 2.19<br>56 | 2.08<br>53 | 2.62<br>66 | 16.78<br>426 | 1.31<br>33 | 1.75<br>44 | 2.13<br>54 | 4.88<br>124 | 1.83<br>46 | 1<br>1-1/4<br>1-1/2      | 1/2<br>3/4      |
|                       | 8903         | LO<br>LXO  | 20 A  |                 |                           |               |             |            |            |              |              |            |            |            |            |              |            |            |            |             |            |                          |                 |
| SEH1                  | 8502<br>8536 | SEO        | 3     | All             | 12.63<br>321              | 25.30<br>643  | 8.62<br>219 | 1.39<br>35 | 1.44<br>37 | 10.00<br>254 | 20.60<br>523 | 2.61<br>66 | 2.19<br>56 | 2.08<br>53 | 2.62<br>66 | 19.78<br>502 | 1.31<br>33 | 2.31<br>59 | 2.69<br>68 | 6.38<br>162 | 1.83<br>46 | 1<br>1-1/4<br>2<br>2-1/2 | 1/2<br>3/4      |
|                       | 8903         | SQO        | 100 A |                 |                           |               |             |            |            |              |              |            |            |            |            |              |            |            |            |             |            |                          |                 |
| SFH1                  | 8502<br>8536 | SFO        | 4     | All             | 12.63<br>321              | 40.30<br>1024 | 9.12<br>232 | 1.39<br>35 | 1.44<br>37 | 10.00<br>254 | 35.50<br>902 | 2.61<br>66 | 2.19<br>56 | 2.08<br>53 | 2.62<br>66 | 20.28<br>515 | 1.31<br>33 | 2.31<br>59 | 2.69<br>68 | 6.38<br>162 | 1.83<br>46 | 1<br>1-1/4<br>2<br>2-1/2 | 1/2<br>3/4      |
|                       | 8903         | SVO        | 200 A |                 | 2-3                       |               |             |            |            |              |              |            |            |            |            |              |            |            |            |             |            |                          |                 |

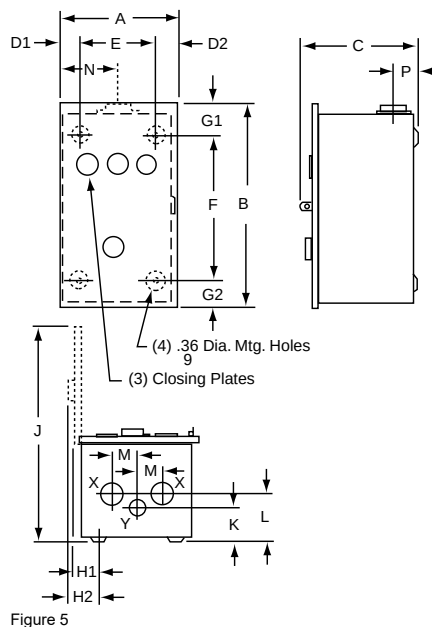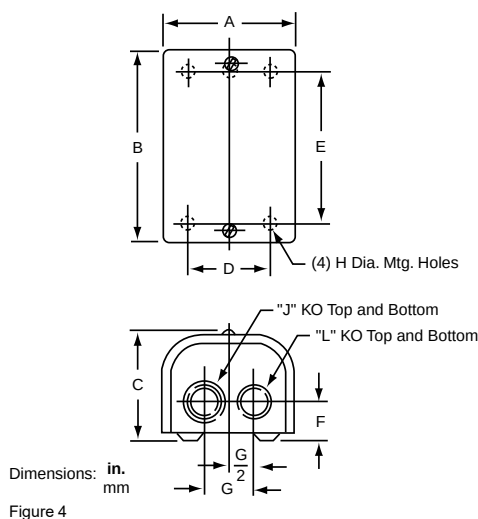

[21] Class 9991 Type UE1 has only 3 of the H diameter mounting holes: 2 in the bottom as shown, and 1 centered at the top.

[22] Class 9999 Type LG1 has 3 knockouts, top and bottom.

## NEMA 4 and 4X Enclosures

**NOTE:** These dimensions are for reference only. If you need precise measurements, contact the Customer Care Center at 1-888-778-2733.

**Table 16.313: NEMA 4X—Watertight and Corrosion Resistant Enclosures**

| Class 9991 Type | For Use With |            |      |              | Dimensions (see Figure 6) |             |              |           |             |              |            |            |              |            |            |          | Hub Dia.    |              | Weight (lb) |
|-----------------|--------------|------------|------|--------------|---------------------------|-------------|--------------|-----------|-------------|--------------|------------|------------|--------------|------------|------------|----------|-------------|--------------|-------------|
|                 | Class        | Type       | Size | No. of Poles | A                         | B           | C            | D         | E           | F            | G          | H          | I            | J          | K          | L        | Bot. Only W | Top & Bot. X |             |
| SCW20           | 8903         | SMO (E.H.) | 30 A | All          | 6.50<br>165               | 6.44<br>164 | 12.13<br>308 | .75<br>19 | 5.00<br>127 | 8.25<br>210  | 1.69<br>43 | 3.34<br>85 | 10.06<br>256 | 1.31<br>33 | 2.13<br>54 | .31<br>8 | 3/4 in.     | 1 in.        | 7           |
|                 | 8502         | SBO, SCO   | 0, 1 | All          |                           |             |              |           |             |              |            |            |              |            |            |          |             |              |             |
| SCW21           | 8536         | SBO, SCO   | 0, 1 | All          | 8.50<br>216               | 7.06<br>179 | 13.88<br>352 | .75<br>19 | 7.00<br>178 | 10.50<br>267 | 1.69<br>43 | 3.91<br>99 | 11.94<br>303 | 1.63<br>41 | 2.38<br>60 | .31<br>8 | 3/4 in.     | 1-1/2 in.    | 13          |
| SDW20           | 8903         | LO, LXO    | 20 A | All          |                           |             |              |           |             |              |            |            |              |            |            |          |             |              |             |
|                 | 8903         | SPO (E.H.) | 60 A | All          |                           |             |              |           |             |              |            |            |              |            |            |          |             |              |             |
|                 | 8502         | SDO        | 2    | All          |                           |             |              |           |             |              |            |            |              |            |            |          |             |              |             |
| SDW21           | 8536         | SDO        | 2    | All          |                           |             |              |           |             |              |            |            |              |            |            |          |             |              |             |

**Table 16.314: NEMA 4—Watertight Enclosures (Standard)**

| Class 9991 Type | For Use With |          |       |              | Dimensions (see Figure 6) |      |       |      |       |       |      |      |       |      |      |     | Hub Dia.    |              | Weight (lb) |
|-----------------|--------------|----------|-------|--------------|---------------------------|------|-------|------|-------|-------|------|------|-------|------|------|-----|-------------|--------------|-------------|
|                 | Class        | Type     | Size  | No. of Poles | A                         | B    | C     | D    | E     | F     | G    | H    | I     | J    | K    | L   | Bot. Only W | Top & Bot. X |             |
| SCW11           | 8903         | SMO      | 30 A  | All          | 6.38                      | 7.13 | 13.19 | 1.56 | 3.25  | 12.00 | .59  | 1.88 | 11.78 | 1.63 | 2.31 | .31 | 3/4 in.     | 1 in.        | 12          |
|                 | 8502         | SBO, SCO | 0, 1  | All          | 162                       | 181  | 335   | 40   | 83    | 305   | 15   | 48   | 299   | 41   | 59   | 8   |             |              |             |
|                 | 8536         | SBO, SCO | 0, 1  | All          | 6.38                      | 7.81 | 13.19 | 1.56 | 3.25  | 12.00 | .59  | 1.88 | 11.78 | 1.63 | 2.31 | .31 |             |              |             |
| SDW11           | 8903         | LO, LXO  | 20 A  | All          | 8.13                      | 7.88 | 16.19 | 1.56 | 5.00  | 15.00 | 1.09 | 1.94 | 14.75 | 2.00 | 2.63 | .31 | 3/4 in.     | 1-1/2 in.    | 18          |
|                 | 8903         | SPO      | 60 A  | All          |                           |      |       |      |       |       |      |      |       |      |      |     |             |              |             |
|                 | 8502         | SDO      | 2     | All          |                           |      |       |      |       |       |      |      |       |      |      |     |             |              |             |
|                 | 8536         | SDO      | 2     | All          | 8.13                      | 8.56 | 16.19 | 1.56 | 5.00  | 15.00 | 1.09 | 2.88 | 14.75 | 2.00 | 2.63 | .31 |             |              |             |
| SEW11           | 8903         | SQO      | 100 A | All          | 18.15                     | 8.77 | 32.21 | 3.08 | 12.00 | 30.50 | .86  | 3.67 | 26.71 | 2.58 | 3.19 | .44 | 3/4 in.     | 2-1/2 in.    | 51          |
|                 | 8502         | SEO      | 3     | All          | 461                       | 223  | 818   | 78   | 305   | 775   | 22   | 93   | 678   | 66   | 81   | 11  |             |              |             |
|                 | 8536         | SEO      | 3     | All          | 18.15                     | 9.58 | 32.21 | 3.08 | 12.00 | 30.50 | .86  | 4.48 | 26.71 | 2.58 | 3.19 | .44 |             |              |             |
|                 | 8536         | SFO      | 4     | All          | 461                       | 243  | 818   | 78   | 305   | 775   | 22   | 114  | 678   | 66   | 81   | 11  |             |              |             |
| SFW11           | 8502         | SFO      | 4     | All          | 18.15                     | 8.77 | 32.21 | 3.08 | 12.00 | 30.50 | .86  | 3.67 | 26.71 | 2.58 | 3.19 | .44 | 3/4 in.     | 2-1/2 in.    | 51          |
|                 |              |          |       |              | 461                       | 223  | 818   | 78   | 305   | 775   | 22   | 93   | 678   | 66   | 81   | 11  |             |              |             |

**Table 16.315: NEMA 4—Watertight Enclosures (Oversize)**

| Class 9991 Type | For Use With |                                   |                      |              | Dimensions (see Figure 7) |             |              |            |             |              |           |            |              |            |            |          | Hub Dia.    |              | Weight (lb) |
|-----------------|--------------|-----------------------------------|----------------------|--------------|---------------------------|-------------|--------------|------------|-------------|--------------|-----------|------------|--------------|------------|------------|----------|-------------|--------------|-------------|
|                 | Class        | Type                              | Size                 | No. of Poles | A                         | B           | C            | D          | E           | F            | G         | H          | I            | J          | K          | L        | Bot. Only W | Top & Bot. X |             |
| SCW2            | 8702<br>8736 | SCO                               | 1                    | All          | 12.63<br>321              | 7.81<br>198 | 14.69<br>373 | 2.56<br>65 | 7.50<br>191 | 13.50<br>343 | .59<br>15 | 3.88<br>98 | 18.41<br>468 | 1.66<br>42 | 2.31<br>59 | .31<br>8 | 3/4 in.     | 1 in.        | 23          |
| SCW3            | 8810         | SBO<br>SCO                        | 0<br>1               | All          |                           |             |              |            |             |              |           |            |              |            |            |          |             |              |             |
| SCW4            | 8502<br>8536 | SBO, SCO<br>(Form F4T)            | 0, 1                 | All          |                           |             |              |            |             |              |           |            |              |            |            |          |             |              |             |
| SDW2            | 8702<br>8736 | SDO                               | 2                    | All          | 14.88<br>378              | 7.25<br>184 | 16.19<br>411 | 2.56<br>65 | 9.75<br>248 | 15.00<br>381 | .38<br>10 | 3.88<br>98 | 20.88<br>530 | 1.72<br>44 | 2.63<br>67 | .31<br>8 | 3/4 in.     | 1-1/2 in.    | 25          |
| SDW3            | 8903         | LO, LXO<br>SMO, SPO<br>(Form F4T) | 20 A<br>30 A<br>60 A | All          |                           |             |              |            |             |              |           |            |              |            |            |          |             |              |             |
| SDW4            | 8502         | SDO                               | 2                    | All          |                           |             |              |            |             |              |           |            |              |            |            |          |             |              |             |
|                 | 8536         | SDO<br>(Form F4T)                 | 2                    | All          |                           |             |              |            |             |              |           |            |              |            |            |          |             |              |             |

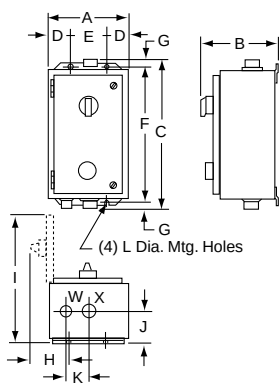


Figure 6

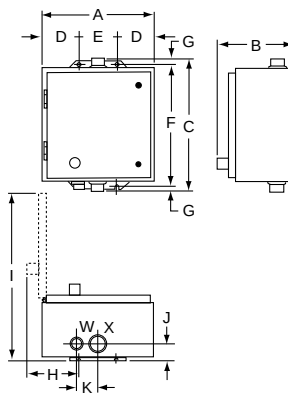


Figure 7

Dimensions: in.  
mm



## NEMA 12/3R and Flush Mounting General Purpose Enclosures

**NOTE:** These dimensions are for reference only. If you need precise measurements, contact the Customer Care Center at 1-888-778-2733.

Table 16.316: See Figure: NEMA 12/3R—Dusttight and Driptight Enclosures (Standard)

| Class<br>9991<br>Type | For Use With |          |       |                 | Dimensions   |             |              |            |             |              |           |            |              |           | Weight<br>(lb) |
|-----------------------|--------------|----------|-------|-----------------|--------------|-------------|--------------|------------|-------------|--------------|-----------|------------|--------------|-----------|----------------|
|                       | Class        | Type     | Size  | No. of<br>Poles | A            | B           | C            | D          | E           | F            | G         | H          | I            | J         |                |
| SCA11                 | 8502         | SBO, SCO | 0, 1  | All             | 6.38<br>162  | 8.53<br>217 | 12.75<br>324 | 1.56<br>40 | 3.25<br>83  | 12.00<br>305 | .38<br>10 | 3.56<br>90 | 12.50<br>318 | .31<br>8  | 10             |
|                       | 8536         | SBO, SCO | 0, 1  | All             |              |             |              |            |             |              |           |            |              |           |                |
|                       | 8903         | SMO      | 30 A  | All             |              |             |              |            |             |              |           |            |              |           |                |
| SDA11                 | 8502         | SDO      | 2     | All             | 8.13<br>206  | 9.28<br>236 | 16.00<br>406 | 1.56<br>40 | 5.00<br>127 | 15.00<br>381 | .50<br>13 | 3.56<br>90 | 15.38<br>391 | .31<br>8  | 15             |
|                       | 8536         | SDO      | 2     | All             |              |             |              |            |             |              |           |            |              |           |                |
|                       | 8903         | LO, LXO  | 20 A  | All             |              |             |              |            |             |              |           |            |              |           |                |
|                       | 8903         | SPO      | 60 A  | All             |              |             |              |            |             |              |           |            |              |           |                |
| SEA11                 | 8903         | SQO      | 100 A | All             | 18.15<br>461 | 9.24<br>235 | 31.50<br>800 | 3.08<br>78 | 12.0<br>305 | 30.50<br>775 | .50<br>13 | 3.67<br>93 | 26.71<br>678 | .44<br>11 | 51             |
|                       | 8502         | SEO      | 3     | All             |              |             |              |            |             |              |           |            |              |           |                |
|                       | 8536         | SEO      | 3     | All             |              |             |              |            |             |              |           |            |              |           |                |
| SFA11                 | 8536         | SFO      | 4     | All             | 18.15<br>461 | 9.24<br>235 | 31.50<br>800 | 3.08<br>78 | 12.0<br>305 | 30.50<br>775 | .50<br>13 | 3.67<br>93 | 26.71<br>678 | .44<br>11 |                |
|                       | 8502         | SFO      | 4     | All             |              |             |              |            |             |              |           |            |              |           |                |
|                       | 8502         | SFO      | 4     | All             |              |             |              |            |             |              |           |            |              |           |                |

Table 16.317: See Figure: NEMA 12/3R—Dusttight and Driptight Enclosures (Oversized)

| Class 9991 Type | For Use With |                                   |                      |              | Dimensions   |             |              |            |             |              |           |            |              |          | Weight (lb) |
|-----------------|--------------|-----------------------------------|----------------------|--------------|--------------|-------------|--------------|------------|-------------|--------------|-----------|------------|--------------|----------|-------------|
|                 | Class        | Type                              | Size                 | No. of Poles | A            | B           | C            | D          | E           | F            | G         | H          | I            | J        |             |
| SCA2            | 8702<br>8736 | SCO                               | 1                    | All          | 11.88<br>302 | 7.75<br>197 | 13.5<br>343  | 2.56<br>65 | 6.75<br>171 | 12.75<br>324 | .38<br>10 | 3.66<br>93 | 18.13<br>460 | .31<br>8 | 17          |
| SCA3            | 8810         | SBO<br>SCO                        | 0<br>1               | All          |              |             |              |            |             |              |           |            |              |          | 18          |
| SCA4            | 8502<br>8536 | SBO, SCO<br>(Form F4T)            | 0, 1                 | All          |              |             |              |            |             |              |           |            |              |          | 19          |
| SDA2            | 8702<br>8736 | SDO                               | 2                    | All          | 14.88<br>378 | 7.88<br>200 | 16.00<br>406 | 2.56<br>65 | 9.75<br>248 | 15.00<br>381 | .50<br>13 | 3.66<br>93 | 21.25<br>540 | .31<br>8 | 24          |
| SDA3            | 8903         | LO, LXO<br>SMO, SPO<br>(Form F4T) | 20 A<br>30 A<br>60 A | All          |              |             |              |            |             |              |           |            |              |          | 27          |
| SDA4            | 8502         | SDO                               | 2                    | All          |              |             |              |            |             |              |           |            |              |          | 27          |
|                 | 8536         | SDO<br>(Form F4T)                 | 2                    | All          |              |             |              |            |             |              |           |            |              |          |             |

Table 16.318: See Figure: Flush Mounting General Purpose Enclosures

| Class 9991 Type             | For Use With |            |       |              | Dimensions   |              |              |              |             |              |             |           |  | Weight (lb) |
|-----------------------------|--------------|------------|-------|--------------|--------------|--------------|--------------|--------------|-------------|--------------|-------------|-----------|--|-------------|
|                             | Class        | Type       | Size  | No. of Poles | A            | B            | C            | D            | E           | F            | G           | H         |  |             |
| SDF13<br>(w/SDF1<br>& SDF2) | 8903         | LO, LXO    | 20 A  | All          | 15.19<br>386 | 8.94<br>227  | 7.63<br>194  | 12.88<br>327 | 5.44<br>138 | 10.94<br>278 | 5.13<br>130 | .38<br>10 |  | 17          |
| SCF11<br>(w/SDF1<br>& SDF2) | 8502         | SBO, SCO   | 0, 1  | All          | 13.44<br>341 | 7.19<br>183  | 5.88<br>149  | 11.13<br>283 | 4.75<br>121 | 9.19<br>233  | 4.50<br>114 | .38<br>10 |  | 10          |
|                             | 8536         | SBO, SCO   | 0, 1  | All          |              |              |              |              |             |              |             |           |  |             |
|                             | 8903         | SMO (E.H.) | 30 A  | All          |              |              |              |              |             |              |             |           |  |             |
| SDF11<br>(w/SDF1<br>& SDF2) | 8502         | SDO        | 2     | All          | 15.19<br>386 | 8.94<br>227  | 7.63<br>194  | 12.88<br>327 | 5.44<br>138 | 10.94<br>278 | 5.13<br>130 | .38<br>10 |  | 17          |
|                             | 8536         | SDO        | 2     | All          |              |              |              |              |             |              |             |           |  |             |
|                             | 8903         | SPO (E.H.) | 60 A  | All          |              |              |              |              |             |              |             |           |  |             |
|                             | 8903         | SPO (E.H.) | 60 A  | All          |              |              |              |              |             |              |             |           |  |             |
| SEF11                       | 8502         | SEO        | 3     | All          | 31.00<br>787 | 16.75<br>425 | 14.25<br>362 | 26.25<br>667 | 8.00<br>203 | —            | —           | .18<br>5  |  | 48          |
|                             | 8903         | SQO        | 100 A | All          |              |              |              |              |             |              |             |           |  |             |

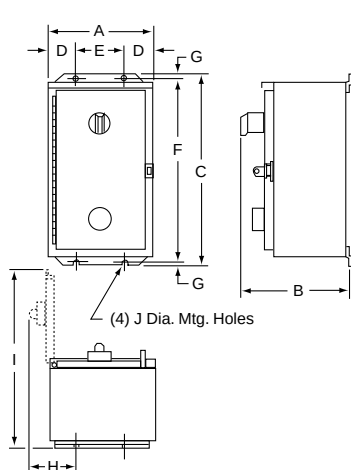


Figure 16.31: NEMA 12/3R—Dusttight and Driptight Enclosures (Standard)

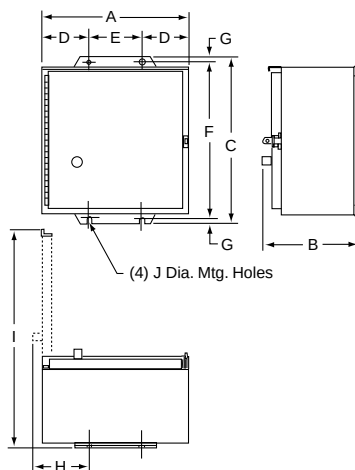


Figure 16.32: NEMA 12/3R—Dusttight and Driptight Enclosures (Oversized)




Figure 16.33: Flush Mounting General Purpose Enclosures

## Full Voltage Starters

Factory installed modifications are available for the classes of control equipment listed in the respective tables. Kits are also available for many field modifications and normal parts replacement on most control items. Refer to Classes 9998 and 9999 for complete listings.

### NOTES

- Standard equipment dimensions and enclosure construction may not apply when certain special features are added. Such cases should be referred to the factory, with complete description, when precise dimensions are required.
- If a UL label is required, consult the Customer Care Center at 1-888-778-2733. Some Forms are not UL Listed.

**Table 16.319: Full Voltage Starters**

|                                                                                                                                 | Factory Modifications                                           | Enclosure Type               | Form    |
|---------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------|------------------------------|---------|
| Pilot Devices in Cover<br>Full Voltage Non-Reversing Controllers Only<br>Classes 8502 8536 8538 8539                            | <b>Push Buttons [1]</b>                                         |                              |         |
|                                                                                                                                 | Start-Stop                                                      | 1 [2], 3R, 4, 4X, 12, 7, & 9 | A       |
|                                                                                                                                 | Start-Stop (maintained contact) [3] [4]                         | 1 [2], 3R, 4, 4X, 12         | A16     |
|                                                                                                                                 | Start-Stop push button and Hand-Off-Auto selector switch [4]    | 1 [2], 3R, 4, 4X, 12         | AC      |
|                                                                                                                                 | On-Off [4]                                                      | 1 [2], 3R, 4, 4X, 12         | A3      |
|                                                                                                                                 | Single oiltight push button (specify marking) [4]               | 1, 3R, 4, 4X, 12             | A11     |
|                                                                                                                                 | <b>Selector Switches</b>                                        |                              |         |
|                                                                                                                                 | Hand-Off-Auto                                                   | 1 [2], 3R, 4, 4X, 12, 7, & 9 | C       |
|                                                                                                                                 | On-Off [4]                                                      | 1 [2], 3R, 4, 4X, 12, 7, & 9 | C6      |
|                                                                                                                                 | NON-STANDARD markings for Pilot Devices [4]                     | 1, 3R, 4, 12                 | G12 [5] |
|                                                                                                                                 | Addition of padlock attachment to Class 9001 operators [4]      | 1, 3R, 4, 12                 | G122    |
|                                                                                                                                 | Pilot Lights (specify color/type) [6] See Table 16.320.         |                              |         |
|                                                                                                                                 | With Operating Interlock: Add price of each interlock per light | 1, 3R, 4, 4X, 12             | X [7]   |
|                                                                                                                                 | <b>Push Buttons [1]</b>                                         |                              |         |
| Pilot Devices in Cover<br>Full Voltage Reversing and Multi-Speed Controllers Only<br>Classes 8702 8736 8738 8739 8810 8811 8812 | Forward-Reverse-Stop [4]                                        | 1, 4, 4X, 12, 7, 9           | A1      |
|                                                                                                                                 | High-Low-Stop [4]                                               | 1, 4, 12                     | A2      |
|                                                                                                                                 | Fast-Off-Slow [4]                                               | 1, 4, 12                     | A9      |
|                                                                                                                                 | High-Low push button and Hand-Off-Auto selector [4]             | 1, 4, 12                     | A10C    |
|                                                                                                                                 | Single oiltight push button (specify marking) [4]               | 1, 4, 4X, 12                 | A11     |
|                                                                                                                                 | <b>Selector Switches</b>                                        |                              |         |
|                                                                                                                                 | Hand-Off-Auto                                                   | 1 [2], 4, 4X, 12, 7, & 9     | C       |
|                                                                                                                                 | On-Off [4]                                                      | 1 [2], 4, 4X, 7, & 9         | C6      |
|                                                                                                                                 | High-Off-Low                                                    | 1, 4, 12                     | C7      |
|                                                                                                                                 | Forward-Off-Reverse [4]                                         | 1, 4, 4X, 12, 7, & 9         | C14     |
|                                                                                                                                 | High-Low and Hand-Off-Auto [4]                                  | 1, 4, 12                     | CC17    |
|                                                                                                                                 | Slow-Fast [4]                                                   | 1, 4, 4X, 12                 | C19     |
|                                                                                                                                 | Forward-Reverse [4]                                             | 1, 4, 4X, 12                 | C20     |
|                                                                                                                                 | High-Low-Off-Auto [4]                                           | 1, 4, 12                     | C25     |
|                                                                                                                                 | Non-Standard Markings for Pilot Devices [4]                     | Any                          | G12 [5] |
|                                                                                                                                 | Pilot Lights [6]                                                |                              |         |
|                                                                                                                                 | Available with Operating Interlock                              | 1, 4, 4X, 12                 | X [7]   |

**Table 16.320: Pilot Light Forms**

|                       | Standard Form | Push-to-Test Form | LED Form | LED-Push-to-Test Form |
|-----------------------|---------------|-------------------|----------|-----------------------|
| Red ON                | P1 [8]        | P21               | P51      | P42                   |
| Red OFF               | P71           | P81               | P91      | P43                   |
| Red Unwired           | P38           | P28               | P58      | P44                   |
| Green ON              | P72           | P82               | P92      | P45                   |
| Green OFF             | P2 [8]        | P22               | P52      | P46                   |
| Green Unwired         | P39           | P29               | P59      | P47                   |
| Amber                 | P3            | P23               | P53      | P63                   |
| Clear                 | P4            | P24               | P54      | P64                   |
| Yellow                | P35           | P25               | P55      | P48                   |
| Blue                  | P36           | P26               | P56      | P66                   |
| White                 | P37           | P27               | P57      | P67                   |
| Red LOW—Green HI      | P73           | P83               | P93      | P77                   |
| Green LOW—Red HI      | P74           | P84               | P94      | P78                   |
| Red OFF—Green FWD/REV | P75           | P85               | P95      | P79                   |
| Green OFF—Red FWD/REV | P76           | P86               | P96      | P80                   |

[1] All push buttons are momentary contact unless specified otherwise.

[2] Selection of various Form combinations may force the use of a larger enclosure.

[3] Specify the appropriate Class 9001 Type K or SK operator required.

[4] Not available for Size 00.

[5] Specify the marking and/or the required Class 9001 Type KN or SKN legend plate.

[6] Indicate the pilot light color as **Form P1** (red), **Form P2** (green), and so forth, as shown in Table 16.320. Unless otherwise requested, standard practice is to wire a red pilot light to indicate that the device is energized. No additional auxiliary contact is required. Also, standard practice is to wire a green pilot light to indicate that the device is de-energized. An additional normally closed auxiliary contact is supplied. A wiring diagram must be provided for other pilot light colors or arrangements.

[7] To determine the maximum number of auxiliary contacts that can be added to each Type S device, and for the appropriate X Form, refer to Table 16.85 (for non-reversing single-speed devices) or Table 16.170 (for reversing or two-speed devices). For Class 8600 reduced voltage controllers, consult the Customer Care Center at 1-888-778-2733.

[8] Only for pilot light. Available for Size 00.

## Full Voltage Contactors and Starters

Table 16.321: Control Circuit, Full Voltage and Multi-Speed Controllers Only

| Classes 8502, 8536, 8538, 8539, 8702, 8736, 8738, 8739, 8810, 8811 and 8812 |                                                                                                                                     |                        |                   |           |        |        |        |        |        |        |        |        |
|-----------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|------------------------|-------------------|-----------|--------|--------|--------|--------|--------|--------|--------|--------|
| Classes                                                                     | Factory Modifications                                                                                                               | Enclosure Type         | Form              | NEMA SIZE |        |        |        |        |        |        |        |        |
|                                                                             |                                                                                                                                     |                        |                   | 00        | 0      | 1      | 2      | 3      | 4      | 5      | 6      | 7      |
|                                                                             | Separate Control Circuit—(specify voltage and frequency)                                                                            | Any                    | S [9]             | X         | X      | X      | X      | X      | X      | X      | X      | X      |
|                                                                             | Fused Control Circuit (without control transformer)                                                                                 |                        |                   |           |        |        |        |        |        |        |        |        |
|                                                                             | One fuse [10]                                                                                                                       | 1, 3R, 4, 4X, 12       | F                 | X         | X      | X      | X      | X      | X      | X      | —      | —      |
|                                                                             | Two fuses [10]                                                                                                                      | 1, 3R, 4, 4X, 7, 9, 12 | F4                | X         | X      | X      | X      | X      | X      | X      | —      | —      |
|                                                                             | Control Circuit Transformers [11]—Standard capacity (50 or 60 Hz) Note: All orders requesting Form FT will be supplied as Form F4T. |                        |                   |           |        |        |        |        |        |        |        |        |
|                                                                             | FUSES                                                                                                                               |                        |                   |           |        |        |        |        |        |        |        |        |
|                                                                             | Primary                                                                                                                             | Secondary              |                   |           |        |        |        |        |        |        |        |        |
| 8502                                                                        | 2                                                                                                                                   | 1                      | 1, 4, 4X, 12      | FF4T      | X      | X      | X      | X      | X      | X      | X [12] | X      |
| 8536                                                                        | 2                                                                                                                                   | 1                      | 7 & 9             | FF4T      | X      | X      | X      | X      | X      | X      | X [12] | X      |
| 8538                                                                        | 2                                                                                                                                   | 2                      | 1, 4, 4X, 12 [10] | F4F10T    | X      | X      | X      | X      | X      | X      | X [12] | —      |
| 8539                                                                        | Additional Capacity (50 or 60 Hz)                                                                                                   |                        |                   |           |        |        |        |        |        |        |        |        |
| 8702                                                                        | Two fuses in primary and one fuse in secondary                                                                                      |                        |                   |           |        |        |        |        |        |        |        |        |
| 8736                                                                        | 100 VA additional capacity                                                                                                          | 1, 4, 4X, 12           | FF4T11            | X         | X      | X      | X      | X      | X [12] | X [12] | X      | X      |
| 8738                                                                        | 100 VA additional capacity [10]                                                                                                     | 7 & 9                  | FF4T11            | X         | X      | X      | X      | X      | X [12] | X [12] | —      | —      |
| 8739                                                                        | 200 VA additional capacity                                                                                                          | 1, 4, 4X, 12           | FF4T12            | X         | X      | X      | X      | X [12] | X [12] | X [12] | X      | X      |
| 8810                                                                        | 300 VA additional capacity                                                                                                          | 1, 4, 4X, 12           | FF4T13            | X         | X [12] | X [12] | X [12] | X [12] | X [12] | X [12] | X      | X      |
| 8811                                                                        | 400 VA additional capacity                                                                                                          | 1, 4, 4X, 12           | FF4T14            | X         | X [12] | X [12] | X [12] | X [12] | X [12] | X [12] | X [12] | X [12] |
| 8812                                                                        | 500 VA additional capacity                                                                                                          | 1, 4, 4X, 12           | FF4T15            | X         | X [12] | X [12] | X [12] | X [12] | X [12] | X [12] | X [12] | X [12] |

Table 16.322: Marine Control

| Class                                                                        | Factory Modification                                                                    | Enclosure Type                          | Form |
|------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|-----------------------------------------|------|
| 8502<br>8536<br>8538<br>8539<br>8702<br>8736<br>8738<br>8739<br>8810<br>8941 | Modification of standard device for use as marine control in accordance with UL508 [13] | 12/3R<br>4/4X<br>(stainless steel only) | M10  |

Table 16.323: Control Circuit Transformer Codes

| AC-Operated Devices With Control Transformers |      |
|-----------------------------------------------|------|
| Voltage                                       | Code |
| 60 Hz (Primary–Secondary)                     |      |
| 120–12 [14]                                   | V88  |
| 120–24 [14]                                   | V89  |
| 208–120                                       | V84  |
| 240–24 [14]                                   | V82  |
| 240–120                                       | V80  |
| 277–120                                       | V85  |
| 480–24 [14]                                   | V83  |
| 480–120                                       | V81  |
| 480–240                                       | V87  |
| 600–120                                       | V86  |
| Specify                                       | V99  |

## Selection of Control Circuit Transformers

The standard primary/secondary voltages for control circuit transformers are indicated in .

To order, select the desired device with the appropriate transformer Form designation. Then convert the previously selected voltage code (V●●) to reflect the desired primary/secondary voltage for the transformer. The secondary voltage should equal the previously selected coil voltage of the device.

## Example:

You have selected 8536SDG1V02S. V02S means that you need a coil voltage of 120-60/110-50 wired for separate control. You would like to add **Form FF4T**, with transformer voltages of 480 V primary, 120 V secondary, and solid-state overload relay protection with selectable Class 10/20 trip class—Form **H30**. (The Form designations needed are **FF4**, **H30**, and **T**.)

The new and complete Class, Type, voltage code, and Form number will be:

| Class | Type | Voltage Code | Form [15] |
|-------|------|--------------|-----------|
| 8536  | SDG1 | V81          | FF4H30T   |

[9] All combination style devices—such as Class 8538, 8539, 8738, and 8739—that use **Form S** should also use **Form Y74** (auxiliary contact installed on the disconnect switch) in accordance with NEC Article 430-74.

[10] Not available for Sizes 6 and 7.

[11] See .

[12] **Single** primary voltage must be specified.

[13] Not available for NEMA Sizes 0, 00, or 7. NEMA Sizes 00 and 0 cannot be used with marine controls.

[14] 12 V coils are not available on Sizes 3–7. 24 V coils are not available on Sizes 4–7.

[15] Specify Form numbers in alphabetical order. Each letter indicates the beginning of a new Form and may be followed by one or more numbers.

### Solid-State Overload Relay Forms

The solid-state overload relay (SSOLR) is available on NEMA Size 00–7. For Class 8536, 8538, 8539, 8736, 8738, 8739 and 8810 devices.


#### Form Description

Type S Starter with Motor Logic™ Solid-State Overload Relay (SSOLR)

3: Motor Logic SSOLR, Class 10/20 (Selectable)

0: No additional modifications

1: N.O. auxiliary contact (field convertible to N.C.)



#### Special note for Class 8810 devices:

You **must** specify two separate Form numbers to get Motor Logic overload relays on two-speed starters.

- The catalog number will be alphanumeric. Example:
- Open style, Size 4 two speed starter with Motor Logic SSOLRs
  - Single winding, 460 V, constant or variable torque
  - High speed FLA = 96 A
  - Low speed FLA = 27 A (use Size 2 overload relay)

Catalog number to order: **8810SF01V02H30H302S**

- Where:
- Form H30 is a Size 4 contactor with a 45–135 A Motor Logic SSOLR for high speed
  - Form H302 is a 15–45 A Motor Logic SSOLR on the low speed contactor.

#### Special Factory-Assembled SSOLR/Contactor Size Combinations (When Applicable): (must be specified on Size 00 starter orders)

Blank: Overload relay matched to the starter size (for example, Size 1 contactor and 9-27 A overload relay)

- 0: 6–18 A overload relay on the starter size indicated by the starter catalog number
- 1: 9–27 A overload relay on the starter size indicated by the starter catalog number
- 2: 15–45 A overload relay on the starter size indicated by the starter catalog number
- 3: 30–90 A overload relay on the starter size indicated by the starter catalog number
- 4: 45–135 A overload relay on the starter size indicated by the starter catalog number
- 8: 1.5–4.5 A overload relay on the starter size indicated by the starter catalog number (only offered on Feature Units)
- 9: 3–9 A overload relay on the starter size indicated by the starter catalog number

**NOTE:** Size 7 comes standard with the Motor Logic SSOLR, Class 10/20 (Selectable). No Form designation is required.

**Table 16.324: Special Factory-Assembled Starter Combinations with Motor Logic SSOLR Protection**

| NEMA Contactor Size | SSOLR Size      |            |             |             |              |              |               |
|---------------------|-----------------|------------|-------------|-------------|--------------|--------------|---------------|
|                     | 00<br>1.5–4.5 A | 0<br>3–9 A | 0<br>6–18 A | 1<br>9–27 A | 2<br>15–45 A | 3<br>30–90 A | 4<br>45–135 A |
| 00                  | H308            | H30        | —           | —           | —            | —            | —             |
| 0                   | H308            | H309       | H30         | —           | —            | —            | —             |
| 1                   | H308            | H309       | H300        | H30         | —            | —            | —             |
| 2                   | —               | H309       | H300        | H301        | H30          | —            | —             |
| 3                   | —               | —          | —           | —           | —            | H30          | —             |
| 4                   | —               | —          | —           | —           | —            | —            | H30           |

### Adapted Bimetallic Overload Relay Forms

New!

#### Table 16.325: Adapted Bimetallic Overload Relay for NEMA Type S Starter

This bimetallic overload relay is available on NEMA Sizes 00, 0 & 1 for Class 8536, 8538, 8539, 8736, 8738 and 8739 devices. To order a starter with the **adapter only**, add Form E to the catalog number (8536SBG2V02ES). When ordering with the adapter and bimetallic overload relay installed, use [Table 16.326](#) as a guide.

#### Form Description

Bimetallic Overload Relay

Class


- 1: Class 10 Balanced Loads (with single phase sensitivity)
- 2: Class 20 Balanced Loads (with single phase sensitivity)
- 3: Class 10 Unbalanced Loads (without single phase sensitivity)
- 4: Class 20 Unbalanced Loads (without single phase sensitivity)

FLA: Suffix from the TeSys D Overload Relays table below (for example, for 4–6 FLA, use suffix **10**)

Terminals: **0** for screw terminal and **6** for ring tongue terminals

Sample catalog number: **8536SCO3V02E2160S**

NEMA Size 1 starter controlling a 7.5 hp motor (11 FLA)—Bimetallic overload relay is LRD16L (9–13 FLA)



**Table 16.326: TeSys D Overload Relays for Sizes 00–1 Type S Starters, Non-Reversing and Reversing, Classes 8536, 8538, 8539, 8736, 8738, and 8739**

| Current Setting Range Amperes | Class 20 with Single Phase Sensitivity | Class 20 without Single Phase Sensitivity | Class 20 with Single Phase Sensitivity | Class 20 without Single Phase Sensitivity | Factory Installed—Catalog Number Suffix (CP1 List) |
|-------------------------------|----------------------------------------|-------------------------------------------|----------------------------------------|-------------------------------------------|----------------------------------------------------|
|                               | Screw Termination                      | Screw Termination                         | Ring Tongue Connector                  | Ring Tongue Connector                     |                                                    |
| 0.40 to 0.63                  | LRD04L                                 | LR3D04L                                   | LRD04L6                                | LR3D04L6                                  | 04                                                 |
| 0.63 to 1                     | LRD05L                                 | LR3D05L                                   | LRD05L6                                | LR3D05L6                                  | 05                                                 |
| 1 to 1.6                      | LRD06L                                 | LR3D06L                                   | LRD06L6                                | LR3D06L6                                  | 06                                                 |
| 1.6 to 2.5                    | LRD07L                                 | LR3D07L                                   | LRD07L6                                | LR3D07L6                                  | 07                                                 |
| 2.5 to 4                      | LRD08L                                 | LR3D08L                                   | LRD08L6                                | LR3D08L6                                  | 08                                                 |
| 4 to 6                        | LRD10L                                 | LR3D10L                                   | LRD10L6                                | LR3D10L6                                  | 10                                                 |
| 5.5 to 8                      | LRD12L                                 | LR3D12L                                   | LRD12L6                                | LR3D12L6                                  | 12                                                 |
| 7 to 10                       | LRD14L                                 | LR3D14L                                   | LRD14L6                                | LR3D14L6                                  | 14                                                 |
| 9 to 13                       | LRD16L                                 | LR3D16L                                   | LRD16L6                                | LR3D16L6                                  | 16                                                 |
| 12 to 18                      | LRD21L                                 | LR3D21L                                   | LRD21L6                                | LR3D21L6                                  | 21                                                 |
| 17 to 24                      | LRD22L                                 | LR3D22L                                   | LRD22L6                                | LR3D22L6                                  | 22                                                 |
| 23 to 32                      | LRD32L                                 | LR3D32L                                   | LRD32L6                                | LR3D32L6                                  | 32                                                 |

**Solid-State TeSys D Overload Relays for Type S Starters****Sizes 00–1, Non-Reversing (Classes 8536, 8538, 8539) and Reversing (Classes 8736, 8738 and 8739)****NOTE:**

- **Field installed only:** The LR9D Overload Relay cannot be factory installed—it must be purchased separately and field installed.
- **Single-phase motor applications:** When using the LR9D with a single-phase motor, you must purchase the three-pole starter to accommodate looping of the motor leads.

| Current Setting | Overload Relay Catalog Number (sold separately) |
|-----------------|-------------------------------------------------|
| Range Amperes   | Trip Class 5/10/20/30 Dip Switch Selectable     |
| 0.1–0.5 A       | LR9D01                                          |
| 0.4–2 A         | LR9D02                                          |
| 1.6–8 A         | LR9D08                                          |
| 6.4–32 A        | LR9D32                                          |

**TeSys T Factory Modifications (Forms)****Table 16.328: TeSys T Motor Management System Modifications****H6xx or H7xx for use with Class 8536 and 8736 (Open Starters)**

| Used on Size | Range                      | Form Control Voltage |           |
|--------------|----------------------------|----------------------|-----------|
|              |                            | 100–240 Vac          | 24 Vdc    |
| 1            | 0.4–8 A                    | H61X [16]            | H71X [16] |
| 1            | 1.35–27 A                  | H62X [16]            | H72X [16] |
| 2, 3         | 5.0–100 A                  | H63X [16]            | H73X [16] |
| 4            | 8–160 (CT 300:5 3 turns)   | H65X [16]            | H75X [16] |
| 5            | 24–480 A (CT 300:5 1 turn) | H66X [16]            | H76X [16] |
| 6            | 48–960 A (CT 600:5 1 turn) | H67X [16]            | H77X [16] |

**NOTES:**

- The product configurator must be used to order TeSys T open starters.
- The auxiliary contact for the control of the starter coil has a maximum rating of 240 Vac.

**Table 16.327: Communication Codes**

| Communication Network                                                    | Code |
|--------------------------------------------------------------------------|------|
| Modbus                                                                   | 2    |
| Profibus                                                                 | 3    |
| CANopen                                                                  | 4    |
| DeviceNet                                                                | 5    |
| Ethernet TCP/IP<br>(communication protocols: Ethernet/IP and Modbus/TCP) | 6    |

**Table 16.329: Full Voltage Controllers Only**

| Classes 8502, 8536, 8538, 8539, 8702, 8736, 8738, 8739, 8810, 8811 and 8812 |                                                                                                                                                                          |                             |                              |             |             |             |             |             |             |             |             |             |
|-----------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|------------------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Factory Modifications                                                       |                                                                                                                                                                          | Enclosure Type              | Form                         | NEMA Size   |             |             |             |             |             |             |             |             |
|                                                                             |                                                                                                                                                                          |                             |                              | 00          | 0           | 1           | 2           | 3           | 4           | 5           | 6           | 7           |
| Power Poles<br>(addition of one)                                            | NEMA Size 1, 30 A, single pole, N.O.                                                                                                                                     | Any                         | Y428                         | —           | X           | X           | X [17]      | X           | X           | X           | X           | X           |
|                                                                             | NEMA Size 1, 30 A, single pole, N.C.                                                                                                                                     | Any                         | Y429                         | —           | X           | X           | X [17]      | X           | X           | X           | X           | X           |
|                                                                             | NEMA Size 1, 30 A, double pole, N.O./N.O.                                                                                                                                | Any                         | Y430                         | —           | X           | X           | X [17]      | X           | X           | X           | X           | X           |
|                                                                             | NEMA Size 1, 30 A, double pole, N.C./N.C.                                                                                                                                | Any                         | Y434                         | —           | X           | X           | X [17]      | X           | X           | X           | X           | X           |
|                                                                             | NEMA Size 1, 30 A, double pole, N.O./N.C.                                                                                                                                | Any                         | Y435                         | —           | X           | X           | X [17]      | X           | X           | X           | X           | X           |
|                                                                             | NEMA Size 2, single pole, N.O.                                                                                                                                           | Any                         | Y436                         | —           | —           | —           | X [17]      | X           | X           | X           | X           | X           |
|                                                                             | NEMA Size 2, single pole, N.C.                                                                                                                                           | Any                         | Y437                         | —           | —           | —           | X [17]      | X           | X           | X           | X           | X           |
|                                                                             | NEMA Size 2, double pole, N.O./N.O.                                                                                                                                      | Any                         | Y438                         | —           | —           | —           | X [17]      | X           | X           | X           | X           | X           |
| Miscellaneous                                                               | NEMA Size 2, double pole, N.C./N.C.                                                                                                                                      | Any                         | Y439                         | —           | —           | —           | X [17]      | X           | X           | X           | X           | X           |
|                                                                             | NEMA Size 2, double pole, N.O./N.C.                                                                                                                                      | Any                         | Y440                         | —           | —           | —           | X [17]      | X           | X           | X           | X           | X           |
|                                                                             | Coil transient suppressor (120 V only), per coil.<br>Addition of terminal blocks (specify wired or unwired).<br>Wired, per terminal, each<br>Unwired, per terminal, each | Any<br>1, 4, 12<br>1, 4, 12 | Y145<br>G56 [18]<br>G50 [18] | X<br>—<br>— | X<br>X<br>X | X<br>X<br>X | X<br>X<br>X | X<br>X<br>X | X<br>X<br>X | X<br>X<br>X | X<br>X<br>X | X<br>X<br>X |

[16] Where X is the communication option according to Table 16.327 at right (for example, H612).

[17] When adding a power pole to a Size 2 device, also specify **Form Y118** (stronger coil, Size 2 only).

[18] Addition of terminal block Type 9080CA or 9080GR6 only. The number of circuits is the same as the ending of the Form number (example: G505 is a 5–circuit unwired terminal block). Available in groups of 5 only.

**Type S Contactor and Starter Forms**

**Table 16.330: Full Voltage Controllers [19]**

| Classes 8502, 8536, 8538, 8539, 8702, 8736, 8738, 8739, and 8810                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                               |                                     |                |      |           |              |              |              |              |              |              |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|----------------|------|-----------|--------------|--------------|--------------|--------------|--------------|--------------|
| Factory Modifications                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                               |                                     | Enclosure Type | Form | NEMA Size |              |              |              |              |              |              |
|                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                               |                                     |                |      | 0         | 1 PW<br>1 YD | 2 PW<br>2 YD | 3 PW<br>3 YD | 4 PW<br>4 YD | 5 PW<br>5 YD | 6 PW<br>6 YD |
| Auxiliary Relays                                                                                                                                                                  | Control relay (4 and 8 poles)                                                                                                                                                                                                                                                                                                                                                                                 | 1, 12                               | R174           | X    | X         | X            | X            | X            | X            | X            | X            |
|                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                               | 4, 4X [20]                          | R174           | X    | X         | X            | X            | X            | X            | X            | X            |
|                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                               | 7, 9                                | R174           | X    | X         | X            | X            | X            | X            | —            | —            |
|                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                               | 1, 12                               | R178           | X    | X         | X            | X            | X            | X            | X            | X            |
|                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                               | 4, 4X [20]                          | R178           | X    | X         | X            | X            | X            | X            | X            | X            |
|                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                               | 7, 9                                | R178           | X    | X         | X            | X            | X            | X            | —            | —            |
|                                                                                                                                                                                   | Pneumatic Timing Relay – specify Class 9050 Type A or B                                                                                                                                                                                                                                                                                                                                                       |                                     |                |      |           |              |              |              |              |              |              |
|                                                                                                                                                                                   | 0.1 seconds to 1.0 minute—On delay                                                                                                                                                                                                                                                                                                                                                                            | 1                                   | K25            | X    | X         | X            | X            | X            | X            | X            | X            |
|                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                               | 4, 4X [20], 12, 3R                  | K25            | X    | X         | X            | X            | X            | X            | X            | X            |
|                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                               | 7, 9                                | K25            | X    | X         | X            | X            | X            | X            | —            | —            |
|                                                                                                                                                                                   | 0.1 seconds to 1.0 minute—Off delay                                                                                                                                                                                                                                                                                                                                                                           | 1                                   | K26            | X    | X         | X            | X            | X            | X            | X            | X            |
|                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                               | 4, 4X [20], 12, 3R                  | K26            | X    | X         | X            | X            | X            | X            | X            | X            |
|                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                               | 7, 9                                | K26            | X    | X         | X            | X            | X            | X            | —            | —            |
|                                                                                                                                                                                   | 1.0 to 3.0 minute—On delay                                                                                                                                                                                                                                                                                                                                                                                    | 1, 4, 12, 3R                        | K37            | X    | X         | X            | X            | X            | X            | X            | X            |
|                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                               | 4X [20], 7, 9                       | K37            | X    | X         | X            | X            | X            | X            | —            | —            |
|                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                               | 1, 4, 12, 3R                        | K38            | X    | X         | X            | X            | X            | X            | X            | X            |
|                                                                                                                                                                                   | 1.0 to 3.0 minute—Off delay                                                                                                                                                                                                                                                                                                                                                                                   | 4X [20], 7, 9                       | K38            | X    | X         | X            | X            | X            | X            | —            | —            |
|                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                               | 1, 4, 4X, 7, 9, 12                  | K1070          | X    | X         | X            | X            | X            | X            | X            | X            |
|                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                               | Motor-driven timing relay [21] [22] | 1, 4, 12       | K5   | X         | X            | X            | X            | X            | X            | X            |
|                                                                                                                                                                                   | Phase failure and phase reversal relay with time delay option including under and over voltage protection.                                                                                                                                                                                                                                                                                                    | 1, 4, 4X, 7/9, 12, 3R               | R44            | X    | X         | X            | X            | X            | X            | X            | X            |
|                                                                                                                                                                                   | Addition of a protective relay with options of phase failure with time delay, phase reversal and under/over voltage protection (RM3TR1). Both motor voltage and control voltage (V8+ voltage code) must be specified with device even if Form S is specified. Form replaces Forms Y444, Y445, Y447, Y448 and Y449.                                                                                            |                                     |                |      |           |              |              |              |              |              |              |
|                                                                                                                                                                                   | For multispeed controllers:<br>Compelling relay (requires motor to be started in low speed)                                                                                                                                                                                                                                                                                                                   | 1, 4, 7, 9, 12                      | R1             | X    | X         | X            | X            | X            | X            | X            | X            |
|                                                                                                                                                                                   | Accelerating relay (provides timed acceleration to selected speed):                                                                                                                                                                                                                                                                                                                                           |                                     |                |      |           |              |              |              |              |              |              |
|                                                                                                                                                                                   | For Class 8810                                                                                                                                                                                                                                                                                                                                                                                                | 1, 4, 7, 9, 12                      | R2             | X    | X         | X            | X            | X            | X            | X            | X            |
|                                                                                                                                                                                   | For Class 8811                                                                                                                                                                                                                                                                                                                                                                                                | 1, 4, 7, 9, 12                      | R2             | X    | X         | X            | X            | X            | X            | X            | X            |
|                                                                                                                                                                                   | For Class 8812                                                                                                                                                                                                                                                                                                                                                                                                | 1, 4, 7, 9, 12                      | R2             | X    | X         | X            | X            | X            | X            | X            | X            |
|                                                                                                                                                                                   | Decelerating relay (imposes a timing delay during transfer from a higher to a lower speed):                                                                                                                                                                                                                                                                                                                   |                                     |                |      |           |              |              |              |              |              |              |
|                                                                                                                                                                                   | For Class 8810                                                                                                                                                                                                                                                                                                                                                                                                | 1, 4, 7, 9, 12                      | R3             | X    | X         | X            | X            | X            | X            | X            | X            |
|                                                                                                                                                                                   | For Class 8811                                                                                                                                                                                                                                                                                                                                                                                                | 1, 4, 7, 9, 12                      | R3             | X    | X         | X            | X            | X            | X            | X            | X            |
|                                                                                                                                                                                   | For Class 8812                                                                                                                                                                                                                                                                                                                                                                                                | 1, 4, 7, 9, 12                      | R3             | X    | X         | X            | X            | X            | X            | X            | X            |
|                                                                                                                                                                                   | Antiplugging timers and relays                                                                                                                                                                                                                                                                                                                                                                                | 1, 4, 7, 9, 12                      | R10            | X    | X         | X            | X            | X            | X            | X            | X            |
| Meters and Metering [23]                                                                                                                                                          | Ammeter in cover (includes current transformer if required)                                                                                                                                                                                                                                                                                                                                                   | 1                                   | G91            | X    | X         | X            | X            | X            | X            | X            | X            |
|                                                                                                                                                                                   | Ammeter and switch with two current transformers                                                                                                                                                                                                                                                                                                                                                              | 1                                   | G92            | —    | X         | X            | X            | X            | X            | X            | X            |
|                                                                                                                                                                                   | Ammeter and switch with three current transformers                                                                                                                                                                                                                                                                                                                                                            | 1                                   | G93            | —    | X         | X            | X            | X            | X            | X            | X            |
|                                                                                                                                                                                   | Voltmeter mounted                                                                                                                                                                                                                                                                                                                                                                                             | 1                                   | G94            | —    | X         | X            | X            | X            | X            | X            | X            |
|                                                                                                                                                                                   | Voltmeter and switch mounted                                                                                                                                                                                                                                                                                                                                                                                  | 1                                   | G95            | —    | X         | X            | X            | X            | X            | X            | X            |
|                                                                                                                                                                                   | Elapsed time meter                                                                                                                                                                                                                                                                                                                                                                                            | 1, 12                               | G97            | X    | X         | X            | X            | X            | X            | X            | X            |
|                                                                                                                                                                                   | Operation counter                                                                                                                                                                                                                                                                                                                                                                                             | 1, 12                               | G99            | X    | X         | X            | X            | X            | X            | X            | X            |
| Auxiliary Contacts                                                                                                                                                                | Additional starter (contactor) auxiliary contacts (Specify number of additional N.O. or N.C. contacts required per contactor.) Each will be X●● (for example, X01).                                                                                                                                                                                                                                           | Any                                 | X              | X    | X         | X            | X            | X            | X            | X            |              |
|                                                                                                                                                                                   | To determine the maximum number of auxiliary contacts that can be added to each Type S device, and for the appropriate X Form, refer to the tables in the Class 8536 section on page 16-30 (for non-reversing single-speed devices) or the Class 8736 section on page 16-61 (for reversing or two-speed devices). For Class 8600 Reduced Voltage controllers, consult Customer Care Center at 1-888-778-2733. |                                     |                |      |           |              |              |              |              |              |              |
|                                                                                                                                                                                   | Auxiliary contacts installed on disconnect switch or circuit breaker operating mechanism.                                                                                                                                                                                                                                                                                                                     |                                     |                |      |           |              |              |              |              |              |              |
|                                                                                                                                                                                   | SPDT                                                                                                                                                                                                                                                                                                                                                                                                          | 1, 4, 4X, 12                        | Y74            | X    | X         | X            | X            | X            | X            | X            | X            |
|                                                                                                                                                                                   | DPDT                                                                                                                                                                                                                                                                                                                                                                                                          | 1, 4, 4X, 12                        | Y75            | X    | X         | X            | X            | X            | X            | X            | X            |
| (Note: The above contacts do not switch with the automatic tripping of the circuit breaker. If such operation is required, consult your nearest Schneider Electric sales office.) |                                                                                                                                                                                                                                                                                                                                                                                                               |                                     |                |      |           |              |              |              |              |              |              |
| Enclosures                                                                                                                                                                        | Space heater with N.C. auxiliary contact                                                                                                                                                                                                                                                                                                                                                                      | 1, 4, 4X, 12                        | G51            | X    | X         | X            | X            | X            | X            | X            | X            |
|                                                                                                                                                                                   | Function identification plate, with marking as specified                                                                                                                                                                                                                                                                                                                                                      | Any                                 | G11            | X    | X         | X            | X            | X            | X            | X            | X            |
|                                                                                                                                                                                   | Drain and breather installed                                                                                                                                                                                                                                                                                                                                                                                  | 7 and 9 [24]                        | Y41            | X    | X         | X            | X            | X            | X            | X            | —            |
|                                                                                                                                                                                   | Cover gaskets added to NEMA 1 enclosures:                                                                                                                                                                                                                                                                                                                                                                     |                                     |                |      |           |              |              |              |              |              |              |
|                                                                                                                                                                                   | For Classes 8538 and 8539                                                                                                                                                                                                                                                                                                                                                                                     | 1                                   | Y47            | X    | X         | Std.         | Std.         | Std.         | Std.         | —            | —            |
|                                                                                                                                                                                   | For Classes 8738 and 8739                                                                                                                                                                                                                                                                                                                                                                                     | 1                                   | Y47            | Std. | Std.      | Std.         | Std.         | Std.         | Std.         | —            | —            |
|                                                                                                                                                                                   | For other full voltage controllers                                                                                                                                                                                                                                                                                                                                                                            | 1                                   | Y47            | X    | X         | X            | X            | X            | X            | X            | X            |
|                                                                                                                                                                                   | For reduced voltage controllers                                                                                                                                                                                                                                                                                                                                                                               | 1                                   | Y47            | X    | X         | X            | X            | X            | X            | X            | X            |
|                                                                                                                                                                                   | Brushed stainless steel watertight device                                                                                                                                                                                                                                                                                                                                                                     |                                     |                |      |           |              |              |              |              |              |              |
|                                                                                                                                                                                   | Class 8606                                                                                                                                                                                                                                                                                                                                                                                                    | —                                   | Y56            | —    | —         | X            | X            | X            | X            | X            | X            |
| Classes 8630 and 8640                                                                                                                                                             | —                                                                                                                                                                                                                                                                                                                                                                                                             | Y56                                 | —              | Std. | Std.      | Std.         | Std.         | X            | X            | X            |              |

[19] NEMA 7 and 9 enclosures are available only with Class 2510, 8502, and 8702 devices.  
 [20] This adder, used with a NEMA 4X enclosure, applies only to Classes 8538, 8539, 8738, 8739, and 8810 non-reversing.  
 [21] If the controller has a control transformer, price that transformer with additional capacity for the relay provided.  
 [22] Specify the control and line voltage.  
 [23] The motor hp and voltage must be specified when placing an order. Meters are panel-mounted in NEMA 12 enclosures.  
 [24] Available only on Spin Top™ and cast aluminum NEMA 7 and 9 enclosures.



## Replacement AC Magnetic Coils

Table 16.331: Replacement AC Magnet Coils for Magnetic Contactors and Starters

| Equipment To Be Serviced                                                                                                                                                                                    |                       |                               |       | Coil Prefix, or Class and Type                    | Hz       | Suffix Number<br>(Complete Coil Number Consists of the Prefix or the Class and Type, Followed by the Suffix) |           |          |          |           |          |         |          |           |           |           |          | Coil VA      |            |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-------------------------------|-------|---------------------------------------------------|----------|--------------------------------------------------------------------------------------------------------------|-----------|----------|----------|-----------|----------|---------|----------|-----------|-----------|-----------|----------|--------------|------------|
| Device                                                                                                                                                                                                      | Size                  | Type                          | Poles |                                                   |          | 24 V                                                                                                         | 110-115 V | 120 V    | 208 V    | 220 V     | 240 V    | 277 V   | 380 V    | 440 V     | 480 V     | 550 V     | 600 V    | In-rush      | Sealed     |
| Coils for Present Design Magnetic Contactors and Starters Classes 8502, 8536, 8538, 8539, 8606, 8630, 8640, 8647, 8650, 8651, 8702, 8736, 8738, 8739, 8810, 8811, 8812, 8903, 8910 [1] and 8940 (except NP) | 30 A                  | L                             | 2-6   | 9998L                                             | 60<br>50 | 23<br>24                                                                                                     | —<br>44   | 44<br>45 | 50<br>52 | [2]<br>53 | 53<br>54 | 55<br>— | —<br>60  | —<br>62   | 62<br>63  | —<br>65   | 65<br>66 | 150<br>140   | 30<br>30   |
|                                                                                                                                                                                                             |                       |                               | 8-12  | 9998LH                                            | 60<br>50 | 23<br>24                                                                                                     | —<br>44   | 44<br>45 | 50<br>52 | [2]<br>53 | 53<br>54 | 55<br>— | —<br>60  | —<br>62   | 62<br>63  | —<br>65   | 65<br>66 | 180<br>170   | 35<br>35   |
|                                                                                                                                                                                                             |                       | LX (Latch)                    | 2-4   | 9998L                                             | 60<br>50 | 23<br>24                                                                                                     | —<br>44   | 44<br>45 | 50<br>52 | —<br>53   | 53<br>54 | 55<br>— | —<br>60  | —<br>62   | 62<br>63  | —<br>65   | 65<br>66 | 150<br>140   | —<br>—     |
|                                                                                                                                                                                                             |                       |                               | 6-12  | 9998LH                                            | 60<br>50 | 23<br>24                                                                                                     | —<br>44   | 44<br>45 | 50<br>52 | —<br>53   | 53<br>54 | 55<br>— | —<br>60  | —<br>62   | 62<br>63  | —<br>65   | 65<br>66 | 180<br>170   | —<br>—     |
|                                                                                                                                                                                                             | 00                    | SA [3] (Series B)             | All   | 9998SAC                                           | 60<br>50 | 23<br>—                                                                                                      | [2]<br>45 | 45<br>—  | 52<br>—  | [2]<br>54 | 54<br>—  | 55<br>— | —<br>60  | [2]<br>62 | 62<br>—   | [2]<br>65 | 65<br>—  | 165<br>—     | 33<br>—    |
|                                                                                                                                                                                                             | 00, 0, 1, 1-P, & 30 A | SA (Series A) SB, SC, & SM    | All   | 31041400                                          | 60<br>50 | 20<br>22                                                                                                     | [2]<br>42 | 42<br>43 | 48<br>—  | [2]<br>51 | 51<br>53 | 52<br>— | 56<br>57 | 58<br>60  | [2]<br>62 | 61<br>62  | 62<br>64 | 245<br>232   | 27<br>26   |
|                                                                                                                                                                                                             | 2 & 60 A              | SD & SP                       | 2 & 3 | 31063409                                          | 60<br>50 | 16<br>17                                                                                                     | [2]<br>38 | 38<br>39 | 44<br>—  | [2]<br>47 | 47<br>48 | 49<br>— | 53<br>54 | [2]<br>57 | 57<br>—   | [2]<br>60 | 60<br>61 | 311<br>296   | 37<br>36   |
|                                                                                                                                                                                                             |                       |                               | 4 & 5 | 31063400                                          | 60<br>50 | 16<br>17                                                                                                     | [2]<br>38 | 38<br>39 | 44<br>—  | [2]<br>47 | 47<br>48 | 49<br>— | 53<br>54 | [2]<br>57 | 57<br>—   | [2]<br>60 | 60<br>61 | 438<br>429   | 38<br>37   |
|                                                                                                                                                                                                             | 3 & 100 A             | DPA12 SE, SQ, & SYD138        | 2 & 3 | 31074400                                          | 60<br>50 | 16<br>17                                                                                                     | [2]<br>38 | 38<br>39 | 44<br>—  | [2]<br>47 | 47<br>48 | 49<br>— | 53<br>54 | [2]<br>57 | 57<br>—   | [2]<br>60 | 60<br>61 | 700<br>678   | 46<br>47   |
|                                                                                                                                                                                                             |                       |                               | 4 & 5 | 31091400                                          | 60<br>50 | —<br>—                                                                                                       | [2]<br>38 | 38<br>39 | 44<br>—  | [2]<br>47 | 47<br>48 | 49<br>— | 53<br>54 | [2]<br>57 | 57<br>58  | [2]<br>60 | 60<br>61 | 1185<br>1260 | 85<br>89   |
|                                                                                                                                                                                                             | 4 & 200 A             | SF, SV, & SYD230              | All   | 31091400                                          | 60<br>50 | —<br>—                                                                                                       | [2]<br>38 | 38<br>39 | 44<br>—  | [2]<br>47 | 47<br>48 | 49<br>— | 53<br>54 | [2]<br>57 | 57<br>58  | [2]<br>60 | 60<br>61 | 1185<br>1260 | 85<br>89   |
|                                                                                                                                                                                                             |                       |                               | All   | 31096400                                          | 60<br>50 | —<br>—                                                                                                       | [2]<br>09 | 09<br>10 | 15<br>—  | [2]<br>18 | 18<br>—  | 19<br>— | 21<br>22 | [2]<br>24 | 24<br>—   | [2]<br>29 | 29<br>30 | 2970<br>2970 | 212<br>250 |
|                                                                                                                                                                                                             | 5 & 300 A             | SG, SX, & SYD368 Series A [4] | All   | 31096320                                          | 60<br>50 | —<br>—                                                                                                       | 50<br>50  | 50<br>50 | 51<br>—  | 52<br>52  | 52<br>52 | 53<br>— | 54<br>54 | 55<br>55  | 55<br>55  | —<br>—    | —<br>—   | 1300<br>—    | 14<br>—    |
|                                                                                                                                                                                                             |                       | SG, SX, & SYD368 Series B [4] | All   | 31096320                                          | 60<br>50 | —<br>—                                                                                                       | 50<br>50  | 50<br>50 | 51<br>—  | 52<br>52  | 52<br>52 | 53<br>— | 54<br>54 | 55<br>55  | 55<br>55  | —<br>—    | —<br>—   | 1300<br>—    | 14<br>—    |
|                                                                                                                                                                                                             | 6 & 7                 | SH & SJ                       | 2-3   | Coil Part Number 3110440050 (All System Voltages) |          |                                                                                                              |           |          |          |           |          |         |          |           |           |           |          | 1780         | 48         |
|                                                                                                                                                                                                             | 400, 600 & 800 A      | SY, SZ, SJ (Elect. Held)      |       |                                                   |          |                                                                                                              |           |          |          |           |          |         |          |           |           |           |          | 1960         | 59         |
|                                                                                                                                                                                                             | 400, 600 & 800 A      | SY, SZ, SJ (Mech. Held)       | 2-3   | 31104418                                          | 60<br>50 | —<br>—                                                                                                       | [2]<br>09 | 09<br>—  | 15<br>—  | [2]<br>18 | 18<br>—  | 19<br>— | —<br>—   | [2]<br>24 | 24<br>—   | [2]<br>29 | 29<br>—  | 1530<br>1250 | —<br>—     |

NOTE: Refer to Table 16.333 for mechanically held unlatch coils.

Table 16.332: Size 5 Coil Modification Kits

| Catalog Number | Voltage |
|----------------|---------|
| 9998SG120      | 120 V   |
| 9998SG208      | 208 V   |
| 9998SG240      | 240 V   |
| 9998SG277      | 277 V   |
| 9998SG380      | 380 V   |
| 9998SG480      | 480 V   |

## NEMA Size 5, Type S, E-Coil Modification Kit for Series A Devices

Applies to Classes 8502, 8536, 8538, 8539, 8606, 8630, 8640, 8647, 8650, 8651, 8702, 8736, 8738, 8739, 8810, 8811, 8812, 8910 and 8903. Consists of:

- E-coil (31096320\*\* from Table 16.331).
- Armature
- 15 A, 600 V fuse and holder (Class 9999SFR)
- Bottom magnet
- Instruction material

NOTE: No 600 V coil nor mechanically held lighting contactor.

[1] For 8910DPA1 to DPA9, see page 16-90.

[2] Use a 60 Hz coil of the next higher voltage.

[3] Use on Type S Series B devices only.

[4] Size 5 Series A devices should use these only as replacements for the exact part number. Another option is to use the coil modification kits in Table 16.332 for the Series B coil.

**Relays, Timers, and Contactors**

**Table 16.333: Replacement AC Magnet Coils for Relays, Timers, and Contactors**

| Equipment To Be Serviced                                                                         |                    |       | Coil Prefix or Class and Type | Hz    | Suffix Number<br>(Complete Coil Number Consists of Prefix or Class and Type Followed by Suffix Number) |           |           |           |           |           |           |       |           |           |           |           | Coil VA |        |
|--------------------------------------------------------------------------------------------------|--------------------|-------|-------------------------------|-------|--------------------------------------------------------------------------------------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-------|-----------|-----------|-----------|-----------|---------|--------|
| Device                                                                                           | Type               | Poles |                               |       | 24 V                                                                                                   | 110-115 V | 120 V     | 208 V     | 220 V     | 240 V     | 277 V     | 380 V | 440 V     | 480 V     | 550 V     | 600 V     | In-rush | Sealer |
| Classes 8501 and 9050                                                                            |                    |       |                               |       |                                                                                                        |           |           |           |           |           |           |       |           |           |           |           |         |        |
| 8501 (Relays)                                                                                    | X                  | All   | 9998X<br>[5]                  | 60/50 | 23/24                                                                                                  | —/44      | 44        | 51/52     | 52/53     | 53        | 55        | —     | —/62      | 62        | —/65      | 65        | 148/143 | 23/25  |
| 9050 (Timer)                                                                                     | A                  | All   | 2959-S49-                     | 60/50 | W25A/W25B                                                                                              | W31B/W32A | W32A/W32B | W34A/W34B | W34B/W35A | W35A/W35B | W35B/W36A | —     | W37B/W38A | W38A/W38B | W38B/W39A | W39A/W39B | 74/68   | 17/17  |
|                                                                                                  | B [6]              | All   | 31017-400-                    | 60/50 | 33/34                                                                                                  | —         | 54/55     | 61        | 61/63     | 63        | 65        | —     | 70/72     | 72/73     | 73/75     | 75/76     | 165/155 | 27/27  |
| Mechanically Held Unlatch Coils—Classes 8508 and 8903                                            |                    |       |                               |       |                                                                                                        |           |           |           |           |           |           |       |           |           |           |           |         |        |
| NOTE: A latch coil is also used with mechanically held devices. For selection, see Table 16.331. |                    |       |                               |       |                                                                                                        |           |           |           |           |           |           |       |           |           |           |           |         |        |
| 8903 (Lighting Contactors)                                                                       | LX                 | All   | 9998LX                        | 60/50 | 23                                                                                                     | —/44      | 44        | 51        | —/53      | 53        | 55        | —     | —/62      | 62        | —/65      | 65        | 25      | —      |
|                                                                                                  | SM, SP             | All   | 2959-S13                      | 60/50 | W23B/W24B                                                                                              | [7]/W30B  | W30B/W31B | W33A      | [7]/W33B  | W33B/W34B | W34A      | —     | W36A      | [7]/W36B  | —         | W37B      | 80      | —      |
|                                                                                                  | SQ, SV, SX, SY, SZ | All   | 31096-416                     | 60/50 | 03                                                                                                     | [7]/09    | 09        | 15        | [7]/18    | 18        | 20        | —     | 22        | [7]/24    | 24        | [7]/28    | 28      | 550    |
|                                                                                                  | SJ                 | All   | 31123-403                     | 60/50 | 03                                                                                                     | [7]/09    | 09        | 15        | [7]/18    | 18        | 20        | —     | 22        | [7]/24    | 24        | [7]/28    | 28      | 2100   |

**Table 16.334: Replacement DC Magnet Coils for Magnetic Relays and Timers**

| Equipment To Be Serviced |      |       | Coil Prefix or Class and Type | Suffix Number<br>(Complete Coil Number Consists of Prefix or Class and Type Followed by Suffix Number.) |      |      |      |      |      |      |      |      |       |           |       |           | Coil Burden Watts |
|--------------------------|------|-------|-------------------------------|---------------------------------------------------------------------------------------------------------|------|------|------|------|------|------|------|------|-------|-----------|-------|-----------|-------------------|
| Class                    | Type | Poles |                               | 6 V                                                                                                     | 12 V | 18 V | 24 V | 32 V | 48 V | 64 V | 72 V | 90 V | 110 V | 115/125 V | 220 V | 230/250 V |                   |
| 8501<br>(Relays)         | XD   | All   | 9998XD                        | 19                                                                                                      | 28   | 34   | 37   | 40   | 46   | 49   | 52   | 55   | —     | 58        | —     | 67        | 18                |
|                          | XDL  | —     | 9998XDL                       | 19                                                                                                      | 28   | 34B  | 37B  | 40B  | 46B  | 49B  | 52B  | 55B  | —     | 58B       | —     | 67B       | 50                |
|                          | XUD  | All   | 9998XUD                       | 19                                                                                                      | 28   | —    | 37   | —    | 46   | —    | —    | —    | —     | 58 [8]    | —     | 67 [8]    | 16                |
| 9050<br>(Timers)         | C    | —     | 31018-400-                    | 22                                                                                                      | 31   | —    | 40   | —    | 49   | —    | —    | —    | —     | 61        | —     | 70        | 14                |
|                          | H    | —     | 4491S1                        | W21                                                                                                     | W24  | —    | W27  | —    | W30  | —    | —    | —    | —     | W34       | —     | W37       | 14                |

**Table 16.335: Replacement Coil for 8903 Panel Board Lighting Contactors**

| Class | Type | Replacement Solenoid | Catalog Number |
|-------|------|----------------------|----------------|
| 8903  | PB   | 120 V                | 9998PBV02      |
|       |      | 208 V                | 9998PBV08      |
|       |      | 240/277 V            | 9998PBV39      |
|       |      | 480 V                | 9998PBV28      |

[5] To order an unlatch coil, add **L** to the Type number and **B** to the suffix. Example: For a 120 V 60 Hz unlatch coil, order 9998XL44B.


[6] Series C (double pole) and Series E (single pole).

[7] Use a 60 Hz coil of the next higher voltage.

[8] Not dual rated. 125 Vdc or 250 Vdc only.

## Contactor and Starter Replacement Part Kits

Class 9998 replacement parts kits are available for servicing Square D relays, contactors, and starters as well as pressure, vacuum, and float switches. Each kit contains the necessary movable and stationary contacts, contact springs (when required)—NEMA Size 3 and above do not include contact springs, and springs are not available), and additional hardware required to service the devices listed below. When servicing devices having more poles than contained in the corresponding kit, it may be necessary to order an additional kit.

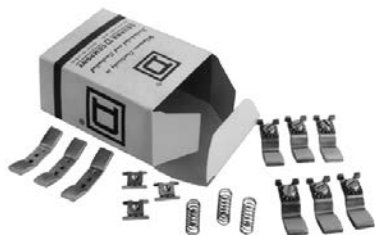

**Table 16.336: Magnetic Contactor and Starter Contact Kits for Present Designs**

| Equipment To Be Serviced                                                                                                                     |                              |                            | No. of Poles in Kit | Class 9998 Parts Kit Type No. |
|----------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|----------------------------|---------------------|-------------------------------|
| Class                                                                                                                                        | Type                         | NEMA Size or Ampere Rating |                     |                               |
| 8502<br>8536<br>8538<br>8539<br>8547<br>8549<br>8606<br>8630<br>8640<br>8647<br>8702<br>8736<br>8738<br>8739<br>8810<br>8811<br>8812<br>8940 | SA- (Series B)               | 00                         | 3                   | SL1                           |
|                                                                                                                                              | SB-                          | 0                          | 3                   | SL2                           |
|                                                                                                                                              | SB-, SC- (Power Pole Adder)  | 0 & 1                      | 4                   | SL12                          |
|                                                                                                                                              | SC-                          | 1 & 1P                     | 1                   | SL22                          |
|                                                                                                                                              | SD-                          | 1                          | 3                   | SL3                           |
|                                                                                                                                              | SD-, SC- (Power Pole Adder)  | 1                          | 4                   | SL13                          |
|                                                                                                                                              | SD-                          | 2                          | 3                   | SL4                           |
|                                                                                                                                              | SD-, SC- (Power Pole Adder)  | 2                          | 4                   | SL14                          |
|                                                                                                                                              | SE-                          | 2                          | 1                   | SL24                          |
|                                                                                                                                              | SE-                          | 3                          | 2                   | SL6                           |
|                                                                                                                                              | SE-                          | 3                          | 3                   | SL7                           |
|                                                                                                                                              | SF-                          | 4                          | 2                   | SL8                           |
|                                                                                                                                              | SF-                          | 4                          | 3                   | SL9                           |
|                                                                                                                                              | SG-                          | 5                          | 2                   | SL10                          |
|                                                                                                                                              | SG-                          | 5                          | 3                   | SL11                          |
| 8903                                                                                                                                         | SH-                          | 6                          | 2                   | SL25                          |
|                                                                                                                                              | SH-                          | 6                          | 3                   | SL26                          |
|                                                                                                                                              | SJ-                          | 7                          | 2                   | SL30                          |
|                                                                                                                                              | SJ-                          | 7                          | 3                   | SL31                          |
|                                                                                                                                              | L (Series C) & LX (Series B) | 30 A                       | 4                   | RA5B                          |
|                                                                                                                                              | SM-                          | 30 A                       | 3                   | SL3                           |
|                                                                                                                                              | SM-                          | 30 A                       | 4                   | SL13                          |
|                                                                                                                                              | SP-                          | 60 A                       | 3                   | SL4                           |
|                                                                                                                                              | SP-                          | 60 A                       | 4                   | SL14                          |
|                                                                                                                                              | SQ-                          | 100 A                      | 2                   | SL6                           |
|                                                                                                                                              | SQ-                          | 100 A                      | 3                   | SL7                           |
|                                                                                                                                              | SV-                          | 200 A                      | 2                   | SL8                           |
|                                                                                                                                              | SV-                          | 200 A                      | 3                   | SL9                           |
|                                                                                                                                              | SX-                          | 300 A                      | 2                   | SL10                          |
|                                                                                                                                              | SX-                          | 300 A                      | 3                   | SL11                          |
| 8903                                                                                                                                         | SY-                          | 400 A                      | 2                   | SL25                          |
|                                                                                                                                              | SY-                          | 400 A                      | 3                   | SL26                          |
|                                                                                                                                              | SZ-                          | 600 A                      | 2                   | SL32                          |
|                                                                                                                                              | SZ-                          | 600 A                      | 3                   | SL33                          |
|                                                                                                                                              | SJ-                          | 800 A                      | 2                   | SL30                          |
|                                                                                                                                              | SJ-                          | 800 A                      | 3                   | SL31                          |
|                                                                                                                                              | PBM, PBP                     | 30, 60 A                   | 2                   | PB2                           |
|                                                                                                                                              | PBN, PBQ                     | 75, 100 A                  |                     |                               |
|                                                                                                                                              | PBM, PBP                     | 30, 60 A                   | 3                   | PB3                           |
|                                                                                                                                              | PBN, PBQ                     | 75, 100 A                  |                     |                               |
| 8903                                                                                                                                         | PBR, PBV, PBW                | 150, 200, 225 A            | 2                   | PB14                          |
|                                                                                                                                              | PBR, PBV, PBW                | 150, 200, 225 A            | 3                   | PB15                          |

**Table 16.341: Magnetic Contactor and Starter Contact Kits for Obsolete Designs**

| Equipment To Be Serviced |                                     |           | No. of Poles in Kit | Class 9998 Parts Kit Type No. |
|--------------------------|-------------------------------------|-----------|---------------------|-------------------------------|
| Class                    | Type                                | NEMA Size |                     |                               |
| 8502 & 8536 [2]          | SA-, (Series A)                     | 00        | 3                   | SL2                           |
|                          |                                     |           | 4                   | SL12                          |
| 8903                     | LL, L (Series A, B) & LX (Series A) | 20 A      | 4                   | RA5                           |

**Table 16.337: Class 8965 Replacement Contact Kits**

| Device Type | Device Series | Class 9998 Kit Type | Device Series | Class 9998 Kit Type |
|-------------|---------------|---------------------|---------------|---------------------|
| DPR53       | A             | DRC5 [1]            | —             | —                   |
| DPR63       | A             | DRC6 [1]            | —             | —                   |
| RO10        | A & B         | RA10                | C             | RA14                |
| RO11        | A & B         | RA11                | C             | RA15                |
| RO12        | A & B         | RA12                | C             | RA16                |
| RO13        | A & B         | RA13                | C             | RA17                |

**Table 16.338: Manual Starter Contact Kits**

| Equipment To Be Serviced |        |            | No. of Poles in Kit | Class 9998 Parts Kit Type No. |
|--------------------------|--------|------------|---------------------|-------------------------------|
| Class                    | Type   | NEMA Size  |                     |                               |
| 2510 Manual Starters     | M-, T- | M-0        | 3                   | ML1                           |
|                          |        | M-1 & M-1P | 3                   | ML2                           |

**Table 16.339: Replacement Control Transformers (150 VA) Class 8502, 8536 Type S Size 6**

| Voltage     |             | Part Number |
|-------------|-------------|-------------|
| 60 Hz       | 50 Hz       |             |
| 240/480–120 | 220/440–110 | 3110451250  |
| 208–120     | —           | 3110451252  |
| 277–120     | —           | 3110451253  |
| —           | 380–110     | 3110451254  |
| 600–120     | 550–110     | 3110451251  |
| 120–120     | 110–110     | 3110451255  |
| 240–120     | 220–110     | 3110451256  |

**Table 16.340: Replacement Control Transformers (200 VA) Class 8502, 8536 Type S Size 7**

| Voltage     |             | Part Number |
|-------------|-------------|-------------|
| 60 Hz       | 50 Hz       |             |
| 240/480–120 | 220/440–110 | 3112350150  |
| 208–120     | —           | 3112350152  |
| 277–120     | —           | 3112350153  |
| —           | 380–110     | 3112350154  |
| 600–120     | 550–110     | 3112350151  |
| 120–120     | 110–110     | 3112350155  |
| 240–120     | 220–110     | 3112350156  |

**Table 16.342: Class 8910, 8911 & 8965 Replacement Contact Kits**

| Device To Be Serviced |                 |        | Class 9998  |             |
|-----------------------|-----------------|--------|-------------|-------------|
| Class 8910 Type       | Class 8911 Type | Series | 1-Pole Type | 3-Pole Type |
| SYD138                | —               | —      | —           | SL27        |
| SYD230                | —               | —      | —           | SL28        |
| SYD368                | —               | —      | —           | SL29        |
| DPA 50A               | DPSO5_          | A, B   | DRC5        | —           |
| DPA 60A               | —               | A, B   | DRC6        | —           |
| DPA 75A               | —               | A      | DRC7        | —           |
| DPA 90A               | —               | A      | DRC9        | —           |

**Table 16.343: How to Order**

| To Order Specify: | Catalog Number |      |
|-------------------|----------------|------|
| • Class Number    | Class          | Type |
| • Type Number     | 9998           | SL6  |

[1] Single-pole kits.

[2] Includes reversing, two-speed, and similar devices. Select the coil based on the NEMA size of the basic starter or contactor.



Class 9998 Type SO1

### Contact Units for Melting Alloy Overload Relays

One normally closed contact, Class 9998 Type SO1, is provided in each overload relay block on Type S starters Sizes 00-6. The Class 9998 Type SO1 contact unit listed in Table 16.344 is provided as standard in each Class 9065 melting alloy overload relay. Contact modules can be easily replaced and are identified in Table 16.344. Isolated overload relay alarm circuit contacts are available as an optional feature. A pilot light or alarm bell can be wired in series with this contact to indicate that the overload relay has tripped. For further information on isolated alarm contacts refer to Class 9999 Types SO4 and SO5, page 16-129.

**Table 16.344: Class 9998 Type SO1 Contact Units for Melting Alloy Overload Relays**

| Magnetic Starter |          |        | Description [3]            | Parts Kit Number       |
|------------------|----------|--------|----------------------------|------------------------|
| NEMA Size        | Type     | Series |                            |                        |
| 00-4 and 6       | SA-SF SH | A & B  | Standard N.C. contact unit | Class 9998 Type SO1[4] |

### Class 9998 Type UB Universal Baseplate

A universal baseplate may be used to retrofit a Square D Type S NEMA starter into an application which is currently using a competitive NEMA starter. The universal baseplate is a metal plate which attaches to the panel in the location of the starter to be replaced. The Type S starter then mounts to the baseplate. It is available for NEMA Sizes 00 through 4, and mounting screws are provided with each plate.

The universal baseplate adapter allows the Type S starter to replace the competitive starters in Table 16.345:

**Table 16.345: Competitive Starter Replacement**

| Competitor Starter                      | NEMA Size | Base-plate | NEMA Size | Base-plate | NEMA Size | Base-plate | NEMA Size | Base-plate |
|-----------------------------------------|-----------|------------|-----------|------------|-----------|------------|-----------|------------|
| Allen Bradley 509                       | 0, 1      | UB01       | 2         | UB02       | 3         | UB03       | 4         | UB04       |
| Allen Bradley 709                       | 1         |            | 2         |            | 3         |            | 4         |            |
| Cutler Hammer Freedom Series            | 00, 0, 1  |            | 2         |            | 3         |            | 4         |            |
| Furnas ESP100                           | 0, 1      |            | 2         |            | 3         |            | 4         |            |
| Furnas INNOVA                           | 0, 1      |            | 2         |            | 3         |            | 4         |            |
| General Electric CR306                  | 00, 0, 1  |            | 2         |            | 3         |            | 4         |            |
| Telemecanique "A" Line and Pre-type "S" | 0, 1      | UB11       | 2         | UB12       | 3         | UB13       | 4         | UB14       |

### Melting Alloy Overload Relay Jumper Strap Kits


Jumper strap kits are for use on three-phase manual or magnetic starters with melting alloy overload relays only, where a three-phase starter is used to control a single-phase motor. These kits will include two jumper straps, a wiring diagram showing how to wire a three-phase starter to control a single-phase motor, and single-phase (one thermal unit) selection tables.

**Table 16.346: Melting Alloy Overload Relay Jumper Strap Kits**

| Class | For Starter             |                                   | Class 9998 Kit Type [5] |
|-------|-------------------------|-----------------------------------|-------------------------|
|       | Size                    | Type                              |                         |
| ALL   | 00, 0, 1, 2 and M0 & M1 | SA, SB, SC, SD and M & T (Manual) | SO31                    |
|       | 3,4                     | SE, SF                            | SO32                    |
|       | 5                       | SG                                | None Available          |

**Table 16.347: How to Order**

| To Order Specify: | Catalog Number |      |
|-------------------|----------------|------|
| • Class Number    | Class          | Type |
| • Type Number     | 9998           | UB01 |



[3] Refer to page Table 16.351 for contact ratings.  
[4] The Type SO1 is also the replacement contact unit for Class 9065 Type M melting alloy overload relays.  
[5] CP1 discount schedule.

## Cover-Mounted Control Unit Selection

Class 9999 push button, selector switch and pilot light cover-mounted control unit kits can be easily field installed in a NEMA 1, 3R, 4 or 12 Type S contactor or starter enclosure cover. Knockouts or removable closing plates are furnished with many enclosure covers for convenient field installation of control units. Kits are supplied with leads and clearly illustrated instructions. The Class 9999 cover mounted control unit kits are identical to the units which are factory installed.

Table 16.348: Cover-Mounted Control Unit Selection

| For Use With                                         |                          |                                     |                 |                               | NEMA 1 Kit<br>8538, 8539, and 8903<br>Pre-Series K |                      |                    |                     |                       |            | NEMA 1 and 12/3R Kit<br>8538, 8539, and 8903<br>Series K and Later <sup>[1]</sup> |                             |                       | NEMA 4/4X Kit<br>(Stainless) <sup>[1]</sup>                   |                             |                       |                         |     |                         |      |     |                     |                           |     |                           |      |     |                    |     |   |  |  |
|------------------------------------------------------|--------------------------|-------------------------------------|-----------------|-------------------------------|----------------------------------------------------|----------------------|--------------------|---------------------|-----------------------|------------|-----------------------------------------------------------------------------------|-----------------------------|-----------------------|---------------------------------------------------------------|-----------------------------|-----------------------|-------------------------|-----|-------------------------|------|-----|---------------------|---------------------------|-----|---------------------------|------|-----|--------------------|-----|---|--|--|
| Class                                                | Type                     | NEMA<br>Size or<br>Ampere<br>Rating | No. of<br>Poles | V                             | Red or Green<br>Pilot Light <sup>[2]</sup>         |                      | Push Button        |                     | Selector Switch       |            | Red or<br>Green<br>Pilot Light                                                    | Push<br>Button              | Selector<br>Switch    | Red or<br>Green<br>Pilot Light                                | Push<br>Button              | Selector<br>Switch    |                         |     |                         |      |     |                     |                           |     |                           |      |     |                    |     |   |  |  |
|                                                      |                          |                                     |                 |                               | With<br>Control<br>Trans-<br>former<br>(Form F4T)  | Standard             | Start-<br>Stop     | On-<br>Off          | Hand-<br>Off-<br>Auto | On-<br>Off | 120 V<br>60 Hz                                                                    | Start-<br>Stop or<br>On-Off | Hand-<br>Off-<br>Auto | 120 V<br>60 Hz                                                | Start-<br>Stop or<br>On-Off | Hand-<br>Off-<br>Auto |                         |     |                         |      |     |                     |                           |     |                           |      |     |                    |     |   |  |  |
|                                                      |                          |                                     |                 |                               | Type                                               | Type                 | Type               | Type                | Type                  | Type       | Type                                                                              | Type                        | Type                  | Type                                                          | Type                        | Type                  |                         |     |                         |      |     |                     |                           |     |                           |      |     |                    |     |   |  |  |
| 8502<br>&<br>8536                                    | SA, SB,<br>SC            | 00, 0, 1,<br>1P                     | All             | 6–600<br>V<br><br>50–60<br>Hz | SP28R <sup>[3]</sup>                               | SP2R                 | SA2                | SA10                | SC2                   | SC22       | SP28R <sup>[2]</sup><br><sup>[3]</sup><br>(incan-<br>descent)                     | SA3 <sup>[4]</sup>          | SC8                   | SP29R <sup>[2]</sup><br><sup>[3]</sup><br>(incan-<br>descent) | SA13                        | SC9                   |                         |     |                         |      |     |                     |                           |     |                           |      |     |                    |     |   |  |  |
|                                                      | SD                       | 2                                   | All             |                               | SP28R <sup>[3]</sup>                               | SP3R                 |                    |                     |                       |            |                                                                                   |                             |                       |                                                               |                             |                       |                         |     |                         |      |     |                     |                           |     |                           |      |     |                    |     |   |  |  |
|                                                      | SE                       | 3                                   | 2–3<br>4–5      |                               | SP28R <sup>[3]</sup>                               | SP4R                 |                    |                     |                       |            |                                                                                   |                             |                       |                                                               |                             |                       |                         |     |                         |      |     |                     |                           |     |                           |      |     |                    |     |   |  |  |
|                                                      | SF                       | 4                                   | All             |                               | SP28R <sup>[3]</sup>                               | SP5R                 |                    |                     |                       |            |                                                                                   |                             |                       |                                                               |                             |                       |                         |     |                         |      |     |                     |                           |     |                           |      |     |                    |     |   |  |  |
|                                                      | SG–SJ                    | 5–7                                 | All             |                               | SP28R <sup>[3]</sup>                               | SP28R <sup>[3]</sup> | SA3                | SA3                 | SC8                   | —          |                                                                                   |                             |                       |                                                               |                             |                       |                         |     |                         |      |     |                     |                           |     |                           |      |     |                    |     |   |  |  |
| SB, SC                                               | 0, 1                     | All                                 | SP12R           |                               | SP12R                                              |                      |                    |                     |                       |            |                                                                                   |                             |                       |                                                               |                             |                       |                         |     |                         |      |     |                     |                           |     |                           |      |     |                    |     |   |  |  |
| 8538<br>8539<br>8702<br>8736                         | SD                       | 2                                   | All             |                               | SP13R                                              | SP13R                | SA2                | SA10                | SC2                   | SC22       |                                                                                   |                             |                       |                                                               |                             |                       | SPL28R<br>(LED–<br>Red) | SC8 | SPL29R<br>(LED–<br>Red) | SA13 | SC9 |                     |                           |     |                           |      |     |                    |     |   |  |  |
|                                                      | SE                       | 3                                   | All             |                               | SP14R                                              | SP14R                |                    |                     |                       |            |                                                                                   |                             |                       |                                                               |                             |                       |                         |     |                         |      |     |                     |                           |     |                           |      |     |                    |     |   |  |  |
|                                                      | SF                       | 4                                   | All             |                               | SP15R                                              | SP15R                |                    |                     |                       |            |                                                                                   |                             |                       |                                                               |                             |                       |                         |     |                         |      |     |                     |                           |     |                           |      |     |                    |     |   |  |  |
|                                                      | SG–SJ                    | 5–7                                 | All             |                               | SP28R <sup>[3]</sup>                               | SP28R <sup>[3]</sup> | SA3                | SA3                 | SC8                   | —          |                                                                                   |                             |                       |                                                               |                             |                       |                         |     |                         |      |     |                     |                           |     |                           |      |     |                    |     |   |  |  |
| 8903,<br>Elec-<br>trically<br>Held<br><sup>[5]</sup> | L                        | 20 A                                | All             |                               | SP28R <sup>[3]</sup>                               | —                    | —                  | SA10 <sup>[6]</sup> | —                     |            |                                                                                   |                             |                       |                                                               |                             |                       |                         |     |                         |      |     | SC22 <sup>[6]</sup> | SPL28G<br>(LED–<br>Green) | SC8 | SPL29G<br>(LED–<br>Green) | SA13 | SC9 |                    |     |   |  |  |
|                                                      | SM                       | 30 A                                | All             |                               | SP28R <sup>[3]</sup>                               | SP2R                 | SA2 <sup>[4]</sup> | SA10 <sup>[4]</sup> | SC2                   | SC22       |                                                                                   |                             |                       |                                                               |                             |                       |                         |     |                         |      |     |                     |                           |     |                           |      |     |                    |     |   |  |  |
|                                                      | SP                       | 60 A                                | All             |                               | SP28R <sup>[3]</sup>                               | SP3R                 |                    |                     |                       |            |                                                                                   |                             |                       |                                                               |                             |                       |                         |     |                         |      |     |                     |                           |     |                           |      |     |                    |     |   |  |  |
|                                                      | SQ                       | 100 A                               | All             |                               | SP28R <sup>[3]</sup>                               | SP28R <sup>[3]</sup> |                    |                     |                       |            |                                                                                   |                             |                       |                                                               |                             |                       |                         |     |                         |      |     | SA3 <sup>[4]</sup>  |                           |     |                           |      |     | SA3 <sup>[4]</sup> | SC8 | — |  |  |
|                                                      | SJ, SV,<br>SX, SY,<br>SZ | 200–800<br>A                        | All             |                               | SP28R <sup>[3]</sup>                               | SP28R <sup>[3]</sup> | SA3 <sup>[4]</sup> | SA3 <sup>[4]</sup>  | SC8                   | —          |                                                                                   |                             |                       |                                                               |                             |                       |                         |     |                         |      |     |                     |                           |     |                           |      |     |                    |     |   |  |  |
|                                                      |                          |                                     |                 |                               |                                                    |                      |                    |                     |                       |            |                                                                                   |                             |                       |                                                               |                             |                       |                         |     |                         |      |     |                     |                           |     |                           |      |     |                    |     |   |  |  |

**NOTE:** Field modification kits are **not** available for the polyester enclosures.

Table 16.349: NEMA 1 Enclosure Closing Plates

| For Use With                  |                |                            | Description                                                       | Type    |
|-------------------------------|----------------|----------------------------|-------------------------------------------------------------------|---------|
| Class                         | Type           | NEMA Size or Ampere Rating |                                                                   |         |
| 8502, 8536, 8903              | SA–SE or SM–SP | 00–3 or 30–60A             | For Pilot Light or Reset—Slip-on Cover NEMA 1 Enclosure           | SG2     |
|                               |                |                            | For Push Button or Selector Switch—Slip-on Cover NEMA 1 Enclosure | SG3     |
| 8538 & 8539 Pre-series "K"    | SB–SF          | 0–4                        | For Push Button or Selector Switch—Hinged Cover NEMA 1 Enclosure  | SG1     |
|                               |                |                            | For Pilot Light—Hinged Cover NEMA 1 Enclosure                     | SG2     |
| 8538, 8539 Series J and later | SB–SF          | 0–4                        | Push Button or Pilot Light NEMA Combination Starter               | 9001K51 |
| 8903                          | SM–SV          | 30–400 A                   | Combination Lighting Contactor                                    | 9001K51 |

Table 16.350: How to Order

| To Order Specify: | Catalog Number |       |
|-------------------|----------------|-------|
| • Class Number    | Class          | Type  |
| • Type Number     | 9999           | SP29R |



Class 9999 Type SP2R Pilot Light Kit



Class 9999 Type SA2 Push Button Kit



Class 9999 Type SC2 Selector Switch Kit



Class 9999 Type SA3 Push Button Kit

[1] User-made openings are required in order to field install these modification kits on standard Class 8502 and 8536 Type S Sizes 0–2, and Class 8903 Sizes 30–60 A, NEMA 4 and 12 enclosures.

[2] Each pilot light kit contains one red and one green lens cap.

[3] The coil voltage must be the same as the pilot light rating. The kit contains one 60 Hz red pilot light control unit, Class 9001 Type KP1R31120V. For other voltages, refer to Class 9001 Type KP.

[4] Also requires an N.O. auxiliary contact for the holding circuit contact when used on Class 8903 electrically held lighting contactors.

[5] For control unit kits for Class 8903 mechanically held contactors, refer to Mechanically Held, page 16-81.

[6] To mount a control unit in a NEMA 1 enclosure, a Class 9999 Type BLX bracket is also required.



Internal Auxiliary



External Single-Circuit Auxiliary Contact

## Auxiliary Contacts for Manual and Magnetic Contactors and Starters

### Internal Contacts

Class 9999 Type SX11 internal contact kit is a replacement unit for the N.O. holding circuit contact supplied as standard on Type S Sizes 00–2 three phase starters and contactors. The Class 9999 Type SX12 is a replacement unit for the N.C. electrical contact which is furnished as standard on Type S, Sizes 00–2 mechanically interlocked devices (e.g., Class 8736 reversing starters). Internal contacts are also used on Class 2510 Types M & T manual starters. The internal contacts can be used for other applications as long as the electrical rating is not exceeded. See Table 16.351 for electrical ratings.

### External Contacts

Class 9999 Type SX6 external auxiliary contact is supplied as standard for the N.O. holding circuit contact on Type S Sizes 3–7 starters and contactors. Additional auxiliary contacts can be added to Type S contactors, starters and lighting contactors. These contacts mount on either side of the basic contactor and are available with convertible or non-convertible contacts. The contacts of the convertible version can be changed from N.O. to N.C. or vice versa in the field. The non-convertible version has fixed contacts, either N.O. or N.C.

To determine the number of auxiliary contacts that can be added to each Type S contactor or starter, refer to the Class 8536 or Class 8736 section.

See Table 16.351 for electrical ratings.

**Table 16.351: Maximum Ratings for Type S Auxiliary Contacts and Timers**

| Class<br>9999<br>Type | Contact Ratings |                               |        |            | Class<br>9999<br>Type | Contact Ratings |                               |        |            |
|-----------------------|-----------------|-------------------------------|--------|------------|-----------------------|-----------------|-------------------------------|--------|------------|
|                       | Volts<br>AC     | AC Only<br>(35% Power Factor) |        | Continuous |                       | Volts<br>AC     | AC Only<br>(35% Power Factor) |        | Continuous |
|                       |                 | Make                          | Break  |            |                       |                 | Make                          | Break  |            |
|                       |                 |                               |        |            |                       |                 |                               |        |            |
| SX11, SX12            | 120 or Less     | 30 A                          | 3 A    | 3 A        | SX6-SX10<br>SX13-SX17 | 120 or Less     | 60 A                          | 6 A    | 10 A       |
|                       | 120-600         | 3600 VA                       | 360 VA | 3 A        |                       | 120-600         | 7200 VA                       | 720 VA | 10 A       |
|                       |                 |                               |        |            |                       |                 |                               |        |            |

**Table 16.352: Class 8502, 8536 and 8903 Type S**

| For Use With               |           | Kit Description                     | Ordering Information     |
|----------------------------|-----------|-------------------------------------|--------------------------|
| Type                       | NEMA Size |                                     | Class 9999               |
|                            |           |                                     | Type                     |
| External—Field Convertible |           |                                     |                          |
| SA-SJ                      | 00–7      | 1-N.O. Contact                      | SX6                      |
|                            |           | 1-N.C. Contact                      | SX7                      |
|                            |           | 1-N.O. and 1-N.C. Isolated Contacts | SX8                      |
|                            |           | 1-N.O. Overlapping Contact          | SX9 <a href="#">[7]</a>  |
|                            |           | 1-N.C. Overlapping Contact          | SX10 <a href="#">[7]</a> |
| External—Non-Convertible   |           |                                     |                          |
| SA-SJ                      | 00–7      | 1-N.O. Contact                      | SX13                     |
|                            |           | 1-N.C. Contact                      | SX14                     |
|                            |           | 1-N.O. & 1 N.C. Isolated Contacts   | SX15                     |
|                            |           | 1-N.O. Overlapping Contact          | SX16 <a href="#">[7]</a> |
|                            |           | 1-N.C. Overlapping Contact          | SX17 <a href="#">[7]</a> |
| Internal—Non-Convertible   |           |                                     |                          |
| SA-SD                      | 00–2      | 1-N.O. Contact                      | SX11 <a href="#">[8]</a> |
|                            |           | 1-N.C. Contact                      | SX12 <a href="#">[8]</a> |

**Table 16.353: Class 8965 Reversing/Hoist Contactors—Auxiliary Contacts**

| Device To Be Serviced                     | Auxiliary Contact Kit |                         |                 |
|-------------------------------------------|-----------------------|-------------------------|-----------------|
| Class 8965 Type                           | Contact Arrangement   | Type of Connector       | Class 9999 Type |
| DPR                                       | 1 N.O.                | Screw/<br>Quick-Connect | D10             |
|                                           | 1 N.C.                |                         | D01             |
|                                           | 1 N.O./1 N.C.         |                         | D11             |
|                                           | 2 N.O.                |                         | D20             |
| RO2 & RG2<br>RO10 Form X1<br>RO11 Form X1 | 1 N.O.<br>each side   | Slip-on                 | R10             |
| RO3 & RG3<br>RO10 Form X2<br>RO11 Form X2 | 1 N.C.<br>each side   |                         | R11             |
| RO5 & RG5<br>RO12 Form X1<br>RO13 Form X1 | 1 N.O.<br>each side   | Screw                   | R12             |
| RO6 & RG6<br>RO12 Form X2<br>RO13 Form X2 | 1 N.C.<br>each side   |                         | R13             |

**Table 16.354: Class 8910 and 8911 Definite Purpose Contactors and Starters—Auxiliary Contacts**

| Device To Be Serviced   | Auxiliary Contact Kit |                    |                    |
|-------------------------|-----------------------|--------------------|--------------------|
| Class 8910 or 8911 Type | Contact Arrangement   | Class 9999         |                    |
|                         |                       | Series B (20–90 A) | Series C (20–40 A) |
| DPA<br>DPS              | 1 N.O.                | D10                | DD10               |
|                         | 1 N.C.                | D01                | DD01               |
|                         | 1 N.O./1 N.C.         | D11                | DD11               |
|                         | 2 N.O.                | D20                | DD20               |

**Table 16.355: How to Order**

| To Order Specify: | Catalog Number |      |
|-------------------|----------------|------|
| • Class Number    | Class          | Type |
| • Type Number     | 9999           | SX6  |

[7] Types SX9 and SX10 or Types SX16 and SX17 must be used together and mounted on the same side of the contactor. They are suitable for applications where it is necessary for a normally open contact to overlap a normally closed contact.

[8] Types SX11 and SX12 are not for use on NEMA Sizes 3 or larger. Internal contacts can also be used on Class 2510 Types M and T manual starters.



**Table 16.356: Isolated Auxiliary Contacts for Motor Logic Overload Relays**

| For Use With        |               | Parts Kit Description                              | Class 9999 Type |
|---------------------|---------------|----------------------------------------------------|-----------------|
| Class & Type        | NEMA Size [9] |                                                    |                 |
| 8536 SA-SJ          | 00B through 7 | N.O. or N.C. Auxiliary Contact (Field Convertible) | AC04            |
| 9065 SS, SR, SF, ST | 00B through 7 |                                                    |                 |

**Table 16.357: DIN Adapter**

| For Use With  |                    | Parts Kit Description | Class 9999 Type |
|---------------|--------------------|-----------------------|-----------------|
| Class & Type  | NEMA Size [9]      |                       |                 |
| 9065 SS or SF | 00B, 00C, 0, and 1 | DIN Adapter           | DA01            |

**Table 16.358: Lug-Lug and Lug-Extender Kits**

| For Use With  |                    | Parts Kit Description                                      | Class 9999 Type |
|---------------|--------------------|------------------------------------------------------------|-----------------|
| Class & Type  | NEMA Size [9]      |                                                            |                 |
| 9065 SS or SF | 00B, 00C, 0, and 1 | Lug-Lug Kit for separate mounting                          | LL0             |
| 9065 SS or SF | 00B, 00C, 0, and 1 | Lug-Extender Kit for retrofitting existing NEMA S starters | LB0             |

Class 9999 Type SB6  
Single Power Pole AdderClass 9999 Type SB9  
Double Power Pole Adder**Motor Logic—Class 9999****Isolated Auxiliary Contacts for Motor Logic Overload Relays**

Overload relay auxiliary contacts are available factory installed or in kit form for field installation on Motor Logic overload relays. These contacts may be used for isolated alarm contact applications.

**DIN Adapter**

The DIN adapter provides a method to mount the Motor Logic overload relay to a 35 mm DIN rail.

**Lug-Lug and Lug-Extender Kits**

A Class 9999 LL0 Lug-Lug Kit can be field installed on separately mounted overload relays. The standard Size 00B, 00C, 0, and 1 Class 9065 Type SS and SF overload relays are supplied without lugs. A Class 9999 LB0 Lug-Extender Kit is designed for Size 00B, 00C, 0, and 1 Retrofit Starter Applications. This kit allows the lugs to be in the same location as the Class 9065 melting alloy overload relay, eliminating the need for additional wire length.

**Remote Reset Module**

The Remote Reset Module can be easily field installed on solid-state overload relays. This module will allow the overload relay to be reset from a remote location.

**Table 16.359: Remote Reset Module**

| For Use With        |               | Parts Kit Description | Class 9999 Type |
|---------------------|---------------|-----------------------|-----------------|
| Class and Type      | NEMA Size [9] |                       |                 |
| 536 SA-SJ           | 00B through 7 | Remote Reset Module   | RR04 [10]       |
| 9065 SS, SR, SF, ST | 00B through 7 |                       |                 |
| 8536 SE-SF          | 3 and 4       | Top Mounting Bracket  | RB34 [10] [11]  |
| 9065 SS, SR, SF, ST | 3 and 4       |                       |                 |

**Power Pole Adders**

One single- or double-circuit power pole kit can be field added to a basic two- or three-pole Type S contactor or starter Sizes 0, 1 and 2, or lighting contactors 30–60 A. See Table 16.360 for selection. The ratings for these power pole adders correspond to the NEMA contact ratings found on page 16-122. A two- or three-pole contactor or starter accepts only one single- or double-circuit unit. A power pole cannot be used on four- or five-pole devices, or on devices that are mechanically interlocked.

When adding a power pole to a Size 0 or 1 device, remove the return springs according to the instructions that come with the device.

When adding a power pole to a Size 2 or 60 A device, a coil change is required. Select a four- or five-pole coil from page 16-122, or specify Form Y118 as noted in the footnote below.

When adding Size 0–2 power pole kits to a Size 3–7 or 100–800 A device, an adapter bracket (9999 SBT1) is required. The Class 9999 Types SB6–SB15 power pole kits are suitable for copper wire only. Types SB21–SB25 come with lugs suitable for copper or aluminum wire.

**Table 16.360: Power Pole Adders—Selection**

| For Use With           |                   | Power Pole Adder Kit                   |                 |
|------------------------|-------------------|----------------------------------------|-----------------|
| Type                   | Size              | Description                            | Class 9999 Type |
| SB, SC, and SM         | 0, 1, and 30 A    | One N.O. power pole adder              | SB6             |
| SD                     | 2                 |                                        | SB11 [12]       |
| SP                     | 60 A              |                                        | SB21 [12]       |
| SB, SC, and SM         | 0, 1, and 30 A    | One N.C. power pole adder              | SB7             |
| SD                     | 2                 |                                        | SB12 [12]       |
| SP                     | 60 A              |                                        | SB22 [12]       |
| SB, SC, and SM         | 0, 1, and 30 A    | One N.O. and one N.C. power pole adder | SB8             |
| SD                     | 2                 |                                        | SB13 [12]       |
| SP                     | 60 A              |                                        | SB23 [12]       |
| SB, SC, and SM         | 0, 1, and 30 A    | Two N.O. power pole adders             | SB9             |
| SD                     | 2                 |                                        | SB14 [12]       |
| SP                     | 60 A              |                                        | SB24 [12]       |
| SB, SC, and SM         | 0, 1, and 30 A    | Two N.C. power pole adders             | SB10            |
| SD                     | 2                 |                                        | SB15 [12]       |
| SP                     | 60 A              |                                        | SB25 [12]       |
| SE-SJ and SQ-SZ and SJ | 3–7 and 100–800 A | Adapter bracket                        | SBT1            |

[9] Size 00B and 00C are not actual NEMA sizes. These designations are used to differentiate the lower FLA of these devices from the NEMA Size 00 Motor Logic solid-state overload relay.

[10] 120 Vac power required.

[11] For mounting the remote reset module on the top of the overload relay.

[12] To order a Size 2 or 60 A power pole kit complete with a new starter coil, specify Form Y118, the voltage, and the frequency (for example, Class 9999 Type SB11 Y118, 120 V, 60 Hz).



Class 9999 Type SF4  
Fuse Kit



Class 9999 Type ST1  
Transient Suppression Module

**Table 16.362: How to Order**

| To Order Specify: | Catalog Number |      |
|-------------------|----------------|------|
| • Class Number    | Class          | Type |
| • Type Number     | 9999           | SM1  |



Type SO4

## Control Circuit Fuse Holder

The control circuit fuse holder is designed to be used on Type S contactors and starters, Sizes 00–7, when either one or two control circuit fuses, 600 V maximum, are required. The Type SF3 and SF4 fuse holders will accept standard 600 V Bussmann Type KTK or equivalent fuses (13/32" x 1-1/2"); 6 A maximum. The SFR3 and SFR4 will accept Class CC 600 V Bussmann Type KTK-R or equivalent fuses only.

**Table 16.361: Control Circuit Fuse Holder—Selection**

| Description<br>(fuses not included) | Class 9999<br>Type |
|-------------------------------------|--------------------|
| Single Fuse Unit                    | SF3                |
| Single Fuse Unit for Class CC Fuse  | SFR3               |
| Two Fuse Unit                       | SF4                |
| Two Fuse Unit for Class CC Fuses    | SFR4               |

## Transient Suppression Module

The transient suppression module is designed to be used where the transient voltage, generated when opening the coil circuit, interferes with the proper operation of nearby integrated or solid-state control circuits. The module consists of an RC circuit and is designed to suppress the coil voltage transients to approximately 200% of peak coil supply voltage. The module is wired across the coil for Type S, Sizes 00–5 and is designed for coil voltages of 120 V only.

**Table 16.363: Transient Suppression Module—Selection**

| Description    | Class 9999<br>Type |
|----------------|--------------------|
| For Sizes 00–2 | ST1                |
| For Sizes 3–5  | ST2                |

## Isolated Alarm Contacts For Melting Alloy Overload Relays

Isolated overload relay alarm contacts are available factory-installed or in kit form for field installation in NEMA Size 00–6 Type S [13] starters, and Class 9065 Type SE melting alloy overload relays. NEMA Size 7 Type S devices use a solidstate overload relay which has isolated alarm contacts as a standard feature. The alarm contacts allow the starter to be used in applications that require isolated contacts, such as inputs to a computer.

Class 9999 Types SO4 and SO5 modules are interchangeable with the standard module (Class 9998 Type SO1) and can be installed on starters already in service. The case is made of clear plastic (polycarbonate) to allow for visual inspection of contacts.

**Table 16.364: Contact Unit for Melting Alloy Overload Relays**

| Magnetic Starter |       | Parts Kit Description                                           | Class 9999<br>Type |
|------------------|-------|-----------------------------------------------------------------|--------------------|
| NEMA Size        | Type  |                                                                 |                    |
| 00-6 [13]        | SA-SH | N.O. Isolated Alarm Contact Plus Standard N.C. Overload Contact | SO4                |
|                  |       | N.C. Isolated Alarm Contact Plus Standard N.C. Overload Contact | SO5                |

## Solid Neutral

The Class 9999 Type SN kit can be used on Class 8903 Type S lighting contactors and other controllers where field addition of a solid neutral is required. Each kit has lugs suitable for both copper and aluminum wire, and mounts with two screws.

**Table 16.365: Solid Neutral Selection**

| Number of Lugs | Wire Capacity Per Lug (Cu/Al)    | Class 9999<br>Type |
|----------------|----------------------------------|--------------------|
| 4              | 14–2/0                           | SN1                |
| 3              | one 4–600 MCM or two 1/0–250 MCM | SN2                |
| 3 (Dual)       | two 2–600 MCM                    | SN3                |
| 2 (Dual)       | two 6–350 MCM                    | SN4                |

## Tie Point Terminal Block

The tie point terminal block provides easy wiring of a Hand-Off-Auto selector switch or Start-Stop push buttons with separate control. The T7 terminal block requires no panel space. It simply snaps on Sizes 00–4 Type S contactors and starters by two tabs and is secured to the left hand coil terminal.

**Table 16.367: Tie Point Terminal Block Selection**

| Magnetic Contactor or Starter |       | Class 9999<br>Type |
|-------------------------------|-------|--------------------|
| NEMA Size                     | Type  |                    |
| 00–4                          | SA-SF | T7                 |



Tie Point Terminal Block

**Table 16.366: How to Order**

| To Order Specify: | Catalog Number |      |
|-------------------|----------------|------|
| • Class Number    | Class          | Type |
| • Type Number     | 9999           | SO4  |

[13] Isolated alarm contacts **cannot** be added in the field to the Size 5 Type S starter. Current transers and a Size 1 overload block must be used. For factory installation specify **Form Y342**.



Type SM1



Type SM12

## Mechanical Interlock

**General:** Type S contactors or starters can be mechanically interlocked so that only one device is energized at a time. The mechanical interlock is an interference (non-jamming) type, locking at the beginning of the stroke of any starter or contactor.







**Type S Sizes 00, 0, 1, and 2—**The mechanical interlock is mounted on the underside of the reversing baseplate. Two pins extend from the mechanical interlock through openings in the baseplate and engage the contact carrier of each contactor. Two styles of mechanical interlocks are used: one version for three pole contactors, a different version for four or five pole contactors. *When adding a power pole to the left side of an existing Size 0, 1, or 2 three-pole reversing contactor, a new mechanical interlock must also be installed. When added to the right side only, the power pole is not mechanically interlocked with the left-hand contactor.*

**Type S Sizes 3 and 4—**The mechanical interlock is separate from the mounting pan on Sizes 3 and 4. Cams on the mechanical interlocks are operated by the contact carrier of each contactor. The mechanical interlock is attached to the underside of the two contactor baseplates on Sizes 3 and 4.

**NOTE:** The mechanical interlock kits in Table 16.368 can be used to interlock 2–5 pole contactors. Mechanical interlocks for horizontal and vertical arrangement are listed in various pole arrangements.

Mechanical interlock Types SM1 through SM10 for Sizes 00–2 devices use overload relay mounting brackets to support the overload relay portion of the starter. See Table 16.369.

**Table 16.368: Mechanical Interlock for Two Contactors**

|                                                                                                                                                                                   |                                                                                                                                                                                                    |                                                                                                                                                                                                                    | Contactor NEMA Size                                        | Class 9999 Type                                                                      |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------|--------------------------------------------------------------------------------------|
| <br>Horizontal<br>Type SM1 for Size 00–1<br>Type SM6 for Size 2<br>Type SM12 for Sizes 3 & 4     | <br>Horizontal<br>Type SM2 for Size 0 or 1 <sup>[14]</sup><br>Type SM7 for Size 2<br>Type SM12 for Sizes 3 & 4    | <br>Vertical<br>Type SM2 for Size 0 or 1 <sup>[14]</sup><br>Type SM10 for Size 2<br>Type SM11 for Size 3<br>Type SM13 for Size 4 | 00, 0, 1<br><br>0, 1<br><br>0, 1<br><br>0, 1<br><br>0, 1   | SM1<br><br>SM2<br><br>SM3<br><br>SM4<br><br>SM5                                      |
| <br>Horizontal<br>Type SM3 for Size 0 or 1<br>Type SM8 for Size 2<br>Type SM12 for Sizes 3 & 4 | <br>Vertical<br>Type SM4 for Size 0 or 1<br>Type SM9 for Size 2<br>Type SM11 for Size 3<br>Type SM13 for Size 4 | <br>Vertical<br>Type SM5 for Size 0 or 1<br>Type SM11 for Size 3<br>Type SM13 for Size 4                                       | 2<br><br>2<br><br>2<br><br>2<br><br>3<br><br>3, 4<br><br>4 | SM6<br><br>SM7<br><br>SM8<br><br>SM9<br><br>SM10<br><br>SM11<br><br>SM12<br><br>SM13 |



Overload Relay Mounting Bracket

**Table 16.369: Overload Relay Mounting Bracket**

| Kit Description                                                                                             | Class 9999 Type |
|-------------------------------------------------------------------------------------------------------------|-----------------|
| Bracket for one overload relay used with horizontal mechanical interlocks, Types SM1 through SM10           | SO11            |
| Bracket for two overload relays used with vertical mechanical interlocks, Types SM2, SM4, SM5, SM9 and SM10 | SO12            |

**Table 16.370: How to Order**

| To Order Specify: | Catalog Number |      |
|-------------------|----------------|------|
| • Class Number    | Class          | Type |
| • Type Number     | 9999           | SM1  |


[14] The Type SM2 interlock is factory assembled for horizontal mounting, but can easily be converted to vertical mounting. Conversion instructions are included.



Class 9422 TC33 Fuse Block



Class 9999 Type TC10



Class 9999 Type S2  
Interchangeable Fuse Clips

## Fuse Block Replacement Parts Kits

Class 8538 (Series D and newer), Class 8738 (Series E and newer), and Class 8903 (Series C and newer) Type S non-fusible combination starters and lighting contactors (sizes 0–2, 30 to 60 A) can be converted to the fusible type by installing a Class 9422 Fuse Clip Kit. Both fusible and non-fusible combination devices have the same size enclosure in NEMAs 1, 4, and 12 construction, which permits this conversion. The 9422 Fuse Clip Kits contain line and load fuse clips, load base, and fuse pullers.

**Table 16.371: Class 9422 Replacement Fuse Clip Kits**

| Device<br>Used on        | Disconnect<br>Ampere<br>Rating | NEMA Class H, K, J, R Fuses |               | Class and Type           | Class R<br>Fuse Clip Kits |
|--------------------------|--------------------------------|-----------------------------|---------------|--------------------------|---------------------------|
|                          |                                | Fuse Clip Ratings<br>(A)    |               |                          |                           |
| Size or<br>Ampere Rating |                                | 250 V<br>Max.               | 600 V<br>Max. |                          |                           |
| 0, 1, and 30 A           | 30                             | 0–30                        | —             | 9422TC30 <sup>[15]</sup> | RFK03 <sup>[16]</sup>     |
| 0, 1, and 30 A           | 30                             | 31–60                       | 0–30          | 9422TC33 <sup>[15]</sup> | RFK06 <sup>[16]</sup>     |
| 2 and 60 A               | 60                             | 31–60                       | 0–30          | 9422TC33                 | RFK06 <sup>[16]</sup>     |
| 2 and 60 A               | 60                             | —                           | 31–60         | 9422TD63                 | RFK06H <sup>[16]</sup>    |

**Table 16.372: Class 9999 Replacement Fuse Clip Kits (8538 Pre-Series D, 8738 Pre-Series E)**

| Device Used on        | Disconnect Ampere Rating | NEMA Class H Fuses     |                    |                         | NEMA Class R Fuses     |                    |                           | NEMA Class J Fuses               |                 |
|-----------------------|--------------------------|------------------------|--------------------|-------------------------|------------------------|--------------------|---------------------------|----------------------------------|-----------------|
|                       |                          | Fuse Clip Ratings (A)  |                    | Type                    | Fuse Clip Ratings (A)  |                    | Type                      | Fuse Clip Ratings (A) 600 V Max. | Type            |
| Size or Ampere Rating |                          | 250 V Max.             | 600 V Max.         |                         | 250 V Max.             | 600 V Max.         |                           |                                  |                 |
| 0, 1, and 30 A        | 30                       | 0–30<br>—<br>31–60     | —<br>0–30<br>0–30  | S1<br>S2<br>S2          | 0–30<br>—<br>31–60     | —<br>0–30<br>0–30  | SR1<br>SR2<br>SR2         | —<br>0–30<br>0–30                | —<br>SJ2<br>SJ2 |
| 2 and 60 A            | 60                       | 31–60<br>—<br>—        | 0–30<br>31–60<br>— | S2<br>S3<br>—           | 31–60<br>—<br>—        | 0–30<br>31–60<br>— | SR2<br>SR3<br>—           | 0–30<br>31–60<br>—               | SJ2<br>SJ3<br>— |
| 3 and 100 A           | 100                      | 61–100<br>101–200<br>— | 61–100<br>—<br>—   | S4 [17]<br>S5 [17]<br>— | 61–100<br>101–200<br>— | 61–100<br>—<br>—   | SR4 [18]<br>SR4 [18]<br>— | 61–100<br>—<br>—                 | SJ4<br>—<br>—   |
| 4 and 200 A           | 200                      | 101–200<br>—<br>—      | 101–200<br>—<br>—  | S5 [17]<br>—<br>—       | 101–200<br>—<br>—      | 101–200<br>—<br>—  | SR4 [18]<br>—<br>—        | —<br>—<br>—                      | —<br>—<br>—     |
| 5 and 300 A           | 400                      | —<br>—<br>—            | —<br>—<br>—        | —<br>—<br>—             | 201–400<br>—<br>—      | 201–400<br>—<br>—  | SR5 [18]<br>—<br>—        | —<br>—<br>—                      | —<br>—<br>—     |
| 6 and 400, 600 A      | 600                      | —<br>—<br>—            | —<br>—<br>—        | —<br>—<br>—             | 401–600<br>—<br>—      | 401–600<br>—<br>—  | SR5 [18]<br>—<br>—        | —<br>—<br>—                      | —<br>—<br>—     |

**Table 16.373: Class 9999 Auxiliary Contact Kits for Disconnect Switches and Circuit Breakers**

| Class      | Type                                                                    | SPDT<br>Type | DPDT<br>Type |
|------------|-------------------------------------------------------------------------|--------------|--------------|
| 8538, 8738 | SB, SC (Series C)                                                       | R45          | R46          |
| 8539, 8739 | SB, SC, SD, SE, SF, SG                                                  | R26          | R27          |
| 8538       | SBA, SCA, SBG, SCG (Series K)                                           | TC11         | TC21         |
| 8738       | SBA, SCA, SBG, SCG (Series K)                                           | TC10         | TC20         |
| 8538       | SB <sup>[19]</sup> , SC <sup>[19]</sup> , SD <sup>[19]</sup> (Series B) | R6           | R7           |
| 8538       | SBAS8, SCAS8, SBGS8, SCGS8, (Series K)                                  | TC10         | TC20         |
| 8538, 8738 | SD (Series C)                                                           | R43          | R44          |
| 8538       | SDA, SDA <sup>[19]</sup> , SDG, SDG <sup>[19]</sup> (Series K)          | TC10         | TC20         |
| 8738       | SDA, SDG (Series K)                                                     | TC10         | TC20         |
| 8538, 8738 | SE (Series B and C)                                                     | R41          | R42          |
| 8538, 8738 | SE, SF (Series A)                                                       | R8           | R9           |
| 8538, 8738 | SF (Series B and C)                                                     | R39          | R40          |
| 8538, 8738 | SG                                                                      | R35          | R36          |

| Class                                | Type                               | SPDT<br>Type | DPDT<br>Type |
|--------------------------------------|------------------------------------|--------------|--------------|
| Disconnect Switches                  |                                    |              |              |
| 9422                                 | BTCF, BTCN, BTDF, BTEF, BTEN       | TC11         | TC21         |
| 9422                                 | TCF, TCN, TDF, TDN, TEF, TEN       | TC10         | TC11         |
| 9422                                 | TF                                 | R8           | R9           |
| Circuit Breaker Operating Mechanisms |                                    |              |              |
| 9421                                 | LF, LK, LL, LM, LN, LP, LR, LT, LW | R47          | R48          |
| 9422                                 | RM, RN, RP, RQ, RR, RT             | R26          | R27          |
| 9422                                 | CFA, CKA, CLA, CSF, CMP            | R26          | R27          |

**Table 16.374: How to Order**

| To Order Specify: | Catalog Number |      |
|-------------------|----------------|------|
| • Class Number    | Class          | Type |
| • Type Number     | 9999           | R6   |

[15] When using with a 9422FTCN or FTCTF disconnect switch in Class 8538 or 8738 combination starters, remove and discard the metal base plate.

[16] No Class number required. Discount schedule DE1.

[17] Cannot be used in Series B or newer 8538 devices.

[18] Fuse clips are not provided in the Type SR4 and SR5 kits. On new installations, Class 9999 Type S fuse clips must also be purchased. Three non-removable pins are included and can be installed only in the latest production devices, which have a hole in the lower fuse clips.

[19] Class 8538 Type numbers ending in suffix S8.

## General

All tables are based on the operation of the motor and controller in the same ambient temperature, 40 °C (104 °F) or less. Always be certain the correct thermal units are installed in the starter before operating the motor. Each thermal unit shall be installed such that its catalog number is visible. See [page 16-136](#) for information on installing thermal units. On melting alloy thermal units the ratchet wheel must engage the pawl assembly.

## Selection Procedure

### 1. Determine motor data:

- Full load current rating
- Service factor

**NOTE:** If motor full load current (FLC) is not known, a tentative thermal unit selection could be made, based on horsepower and voltage. Refer to [page 16-136](#).

### 2. Motor and controller in *same ambient temperature*:

- All starter classes, except Class 8198:
  - For 1.15 to 1.25 service factor motors use 100% of motor FLC for thermal unit selection.
  - For 1.0 service factor motors use 90% of motor FLC for thermal unit selection.
- Class 8198 only:
  - For 1.0 service factor motors use 100% of motor FLC for thermal unit selection.
  - For 1.15 to 1.25 service factor motors use 110% of motor FLC for thermal unit selection.

### 3. Motor and controller in *different ambient temperatures*:

- Multiply motor FLC by the multiplier in [Selection of Thermal Units for Special Applications](#), [page 16-132](#). Use the resultant full load current for thermal unit selection.

### 4. Locate the proper selection table from the index, [pages 16-133](#) and [page 16-134](#).

- The proper thermal unit number will be found adjacent, to the right of the range of full load currents in which the motor FLC or resultant full load current falls.

### 5. See [page 16-135](#) for calculation of trip current rating.

## Slow Trip Thermal Unit Selection

To select Type SB slow trip thermal units, the selection table for a standard Type B thermal unit may be used with the following modifications: For continuous rated motors having service factors of 1.15 to 1.25, select thermal units from the standard Type B table using 93% (102% for Class 8198) of the full load current shown on the motor nameplate and then substitute an SB for the B in the thermal unit type number.

Example: A motor with a full load current of 12 A controlled by an 8536SCG3 would require B22 thermal units for standard trip applications and SB19.5 thermal units for slow trip applications. The SB is selected by multiplying 12 A times 93% for 11.16 A and using this value to select B19.5. Then add the S prefix to arrive at SB19.5.

For continuous rated motors having a service factor of 1.0, select thermal units in the same manner using 84% (93% for Class 8198) of full load current shown on the motor nameplate.

**NOTE:** SB thermal units are used on Size 0, 1, 2, and only some Size 3 applications. Check thermal unit tables for current ranges.

Table 16.375: Thermal Unit Trip Types

| Melting Alloy |                   |
|---------------|-------------------|
| Type of Trip  | Thermal Unit Type |
| Standard      | A                 |
|               | B                 |
|               | C                 |
|               | CC                |
|               | DD                |
| Quick         | FB                |
| Slow          | SB                |

Table 16.376: Selection of Thermal Units for Special Applications

| Class of Controller      | Continuous Duty Motor Service Factor | Melting Alloy                |                                                       |                                                      |
|--------------------------|--------------------------------------|------------------------------|-------------------------------------------------------|------------------------------------------------------|
|                          |                                      | Ambient Temperature of Motor |                                                       |                                                      |
|                          |                                      | Same as Controller Ambient   | Constant 10 °C (18 °F) Higher Than Controller Ambient | Constant 10 °C (18 °F) Lower Than Controller Ambient |
|                          |                                      |                              | Full Load Current Multiplier                          |                                                      |
| All Classes, Except 8198 | 1.15 to 1.25                         | 1.0                          | 0.9                                                   | 1.05                                                 |
|                          | 1.0                                  | 0.9                          | 0.8                                                   | 0.95                                                 |
| Class 8198               | 1.15 to 1.25                         | 1.1                          | 1.0                                                   | 1.15                                                 |
|                          | 1.0                                  | 1.0                          | 0.9                                                   | 1.05                                                 |

## Thermal Unit Selection

**NOTE:** For thermal unit selection tables for other devices including obsolete devices, consult the Customer Care Center at 1-888-778-2733.

**Table 16.377: Thermal Unit Selection**

| Controller                             |                                                                                                                                                        |                   |                       |                    | Thermal Unit Selection Table Number |                   |                                                    |
|----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|-----------------------|--------------------|-------------------------------------|-------------------|----------------------------------------------------|
| Starter Type                           | Class                                                                                                                                                  | Type              | Series <sup>[1]</sup> | Size               | Hand Reset Melting Alloy            |                   |                                                    |
|                                        |                                                                                                                                                        |                   |                       |                    | Standard Trip (20)                  | Quick Trip (10)   | Slow Trip (30)                                     |
| Manual Starters FHP                    | 2510<br>2512<br>8908                                                                                                                                   | F                 | A                     | FHP                | 43 <sup>[2]</sup>                   | —                 | —                                                  |
| Manual Starters (Small Enclosure)      | 2510                                                                                                                                                   | M, T              | A                     | M-0<br>M-1<br>M-1P | 1<br>1<br>1                         | 72<br>72<br>72    | <sup>[3]</sup><br><sup>[3]</sup><br><sup>[3]</sup> |
| Manual Starters (Large Enclosure)      | 2510<br>2511<br>2512<br>8925                                                                                                                           | M, T              | A                     | M-0<br>M-1<br>M-1P | 2<br>2<br>2                         | 73<br>73<br>73    | <sup>[3]</sup><br><sup>[3]</sup><br><sup>[3]</sup> |
| DC Magnetic Starters                   | 7135                                                                                                                                                   | C, D              | —                     | 1, 2               | 65                                  | —                 | <sup>[3]</sup>                                     |
| EC & M Crane Control Product           | 7136                                                                                                                                                   | E                 | —                     | 3                  | 9                                   | —                 | —                                                  |
|                                        | 7735                                                                                                                                                   | F                 | —                     | 4                  | 10                                  | —                 | —                                                  |
|                                        | 7736                                                                                                                                                   | G                 | —                     | 5                  | 12                                  | —                 | —                                                  |
| AC Magnetic Starters (Small Enclosure) | 8536<br>8904 <sup>[4]</sup><br>(Starter In Own Enclosure)<br>8933<br>8998<br>8999<br>(Model 3 Control Center)<br>I-LINE® and QMB Motor Starter Centers | A (8536 only)     | B, C                  | 00                 | 17 <sup>[2]</sup>                   | —                 | —                                                  |
|                                        |                                                                                                                                                        | SA                | A, B                  | 00                 | 13                                  | —                 | <sup>[3]</sup>                                     |
|                                        |                                                                                                                                                        | SB                | A                     | 0                  | 13                                  | 74                | <sup>[3]</sup>                                     |
|                                        |                                                                                                                                                        | SC                | A                     | 1                  | 13                                  | 74                | <sup>[3]</sup>                                     |
|                                        |                                                                                                                                                        |                   | A                     | 1P                 | 41                                  | —                 | <sup>[3]</sup>                                     |
|                                        |                                                                                                                                                        | SD                | A                     | 2                  | 56                                  | 75                | <sup>[3]</sup>                                     |
|                                        |                                                                                                                                                        | SE                | A                     | 3                  | 18                                  | 76 <sup>[5]</sup> | 134 <sup>[3]/[5]</sup>                             |
|                                        |                                                                                                                                                        | SF                | A                     | 4                  | 54                                  | —                 | —                                                  |
|                                        |                                                                                                                                                        | SG                | A                     | 5                  | 49                                  | —                 | —                                                  |
|                                        |                                                                                                                                                        |                   | B <sup>[6]</sup>      | 5                  | 59                                  | 83                | —                                                  |
|                                        |                                                                                                                                                        | SH                | A, B                  | 6                  | 21                                  | —                 | —                                                  |
|                                        | 8998<br>8999<br>(Model 4 Control Center)                                                                                                               | SC                | A                     | 1 Fusible          | 66                                  | 74                | —                                                  |
|                                        |                                                                                                                                                        |                   |                       | 1 Circuit Breaker  | 15                                  | 74                | —                                                  |
|                                        |                                                                                                                                                        | SD                | A                     | 2 Fusible          | 67                                  | 75                | —                                                  |
|                                        |                                                                                                                                                        |                   |                       | 2 Circuit Breaker  | 58 <sup>[7]</sup>                   | 75                | —                                                  |
|                                        |                                                                                                                                                        | SE                | A                     | 3 Small Enclosure  | 16                                  | 76 <sup>[5]</sup> | 134 <sup>[3]/[5]</sup>                             |
|                                        |                                                                                                                                                        |                   |                       | 3 Large Enclosure  | 68 <sup>[7]</sup>                   | 76 <sup>[5]</sup> | 133 <sup>[3]/[5]</sup>                             |
|                                        |                                                                                                                                                        | SF                | A                     | 4                  | 61                                  | —                 | —                                                  |
|                                        |                                                                                                                                                        | SG                | A                     | 5                  | 24                                  | —                 | —                                                  |
|                                        |                                                                                                                                                        | SH                | A                     | 6                  | 20                                  | —                 | —                                                  |
|                                        | 8998<br>(Model 5 and Model 6 MCCs)                                                                                                                     | SC <sup>[8]</sup> | A                     | 1                  | 109                                 | —                 | —                                                  |
|                                        |                                                                                                                                                        | SD <sup>[8]</sup> | A                     | 1 COMPAC 6         | 104                                 | —                 | —                                                  |
|                                        |                                                                                                                                                        |                   |                       | 2                  | 110                                 | —                 | —                                                  |
|                                        |                                                                                                                                                        | SE <sup>[8]</sup> | A                     | 3                  | 111                                 | —                 | —                                                  |
|                                        |                                                                                                                                                        | SF <sup>[8]</sup> | A                     | 4                  | 112                                 | —                 | —                                                  |
|                                        |                                                                                                                                                        | SG <sup>[8]</sup> | A                     | 5                  | 113                                 | —                 | —                                                  |
|                                        |                                                                                                                                                        |                   |                       | 5 CT               | 103                                 | —                 | —                                                  |
|                                        | 8911                                                                                                                                                   | DPSG              | C                     | 6                  | 114                                 | —                 | —                                                  |
|                                        |                                                                                                                                                        |                   |                       | 20–30 A            | 135                                 | —                 | —                                                  |
|                                        |                                                                                                                                                        |                   |                       | 40 A               | 145                                 | —                 | —                                                  |
|                                        |                                                                                                                                                        |                   |                       | 50 A               | 146                                 | —                 | —                                                  |

(table continued on the next page)

**NOTE:** For thermal unit selection tables for other devices, including obsolete devices, consult the Customer Care Center at 1-888-778-2733.

- <sup>[1]</sup> Series letters listed refer to the marking on the nameplate of the basic openstyle starter. When the starter comes in a controller containing other devices, the controller may have a different series letter marked on the enclosure nameplate.
- <sup>[2]</sup> Type A thermal units for full-load currents lower than those listed in this table are available. For complete information, consult Customer Care Center at 1-888-778-2733.
- <sup>[3]</sup> This device will accept Type SB slow trip (Class 30) thermal units. For selection, see page 16-132.
- <sup>[4]</sup> Small enclosure tables apply for **Class 8904** non-combination and non-reversing starters. For combination and reversing **Class 8904** starters, refer to the large enclosure selections, index above.
- <sup>[5]</sup> **Form Y81** must be specified to use quick trip (Class 10) or slow trip (Class 30) thermal units on Size 3 starters.
- <sup>[6]</sup> Divide the motor FLC by 60, and use this quotient to select the appropriate thermal units.
- <sup>[7]</sup> Use for autotransformer starters (fusible and circuit breaker).
- <sup>[8]</sup> Refers to the Type number of the starter in the MCC, not the Type number of the MCC.



## Thermal Unit Selection

Table 16.378: Thermal Unit Selection

| Controller                             |                                          |                                                                                                                            |                       |           | Thermal Unit Selection Table Number |                 |                |
|----------------------------------------|------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|-----------------------|-----------|-------------------------------------|-----------------|----------------|
|                                        |                                          |                                                                                                                            |                       |           | Hand Reset Melting Alloy            |                 |                |
| Starter Type                           | Class                                    | Type                                                                                                                       | Series <sup>[9]</sup> | Size      | Standard Trip (20)                  | Quick Trip (10) | Slow Trip (30) |
| AC Magnetic Starters (Large Enclosure) | 8198                                     | G, S                                                                                                                       | —                     | —         | 5                                   | —               | [10]           |
|                                        | 8536 (Starter Used in Multi-Motor Panel) | A (8536 only)                                                                                                              | B, C                  | 00        | 14 [11]                             | —               | —              |
|                                        | 8538 8904 [12]                           | SA                                                                                                                         | A, B                  | 00        | 53                                  | —               | [10]           |
|                                        | 8539 8906                                | SB, NB                                                                                                                     | A                     | 0         | 15                                  | 78              | [10]           |
|                                        | 8606 8907                                | SC, NC                                                                                                                     | A                     | 1         | 15                                  | 78              | [10]           |
|                                        | 8630 [13]                                | SD, ND                                                                                                                     | A                     | 2         | 58                                  | 79              | [10]           |
|                                        | 8640 [14]                                | SE, NE                                                                                                                     | A                     | 3         | 16                                  | 80 [15]         | 133 [15][10]   |
|                                        | 9089 8924                                | SF, NF                                                                                                                     | A                     | 4         | 61                                  | —               | —              |
|                                        | 8647 8925                                | SG                                                                                                                         | A                     | 5         | 24                                  | —               | —              |
|                                        | 8650 8930                                |                                                                                                                            | B [16]                | 5         | 59                                  | 83              | —              |
|                                        | 8736 8941                                | SH                                                                                                                         | A, B                  | 6         | 20                                  | —               | [10]           |
|                                        | 8738                                     | CB, DB, SB, UB<br>CC, DC, SC, UC<br>CD, DD, SD, UD<br>CE, DE, SE, UE<br>CF, DF, SF, UF<br>CG, DG, SG, UG<br>CH, DH, SH, UH | A                     | 0         | 15                                  | 78              | [10]           |
|                                        | 8739                                     |                                                                                                                            | A                     | 1         | 15                                  | 78              | [10]           |
|                                        |                                          |                                                                                                                            | A                     | 2         | 58                                  | 79              | [10]           |
|                                        |                                          |                                                                                                                            | A                     | 3         | 16                                  | 80 [15]         | 133 [15][10]   |
|                                        |                                          |                                                                                                                            | A                     | 4         | 61                                  | —               | —              |
|                                        |                                          |                                                                                                                            | A                     | 5         | 24                                  | —               | —              |
|                                        |                                          |                                                                                                                            | B [16]                | 5         | 59                                  | 83              | —              |
|                                        |                                          |                                                                                                                            | A                     | 6         | 20                                  | —               | [10]           |
|                                        | 8940 WELL-GUARD™ Control                 | WC, XC                                                                                                                     | A                     | 1         | 13                                  | 78              | —              |
|                                        |                                          | WD, XD, MD, RD, VD                                                                                                         | A                     | 2         | 56                                  | 79              | —              |
|                                        |                                          | WE, XE, ME, RE, VE                                                                                                         | A                     | 3         | 18                                  | 80 [15]         | —              |
|                                        |                                          | PF, WF, XF, MF, RF, VF, PE                                                                                                 | A                     | 4         | 54                                  | —               | —              |
|                                        | 8911                                     | DPSO                                                                                                                       | C                     | 20–30 A   | 136                                 | —               | —              |
|                                        |                                          |                                                                                                                            |                       | 40 A      | 147                                 | —               | —              |
|                                        |                                          |                                                                                                                            |                       | 50 A      | 148                                 | —               | —              |
| AC Magnetic Part-Winding               | 8998 (Model 5 and Model 6 MCCs)          | SC [17]                                                                                                                    | A                     | 1         | 127                                 | —               | —              |
|                                        |                                          | SD [17]                                                                                                                    | A                     | 2         | 128                                 | —               | —              |
|                                        |                                          | SE [17]                                                                                                                    | A                     | 3         | 129                                 | —               | —              |
|                                        |                                          | SF                                                                                                                         | A                     | 4         | 105                                 | —               | —              |
|                                        |                                          | SG                                                                                                                         | A                     | 5         | 115                                 | —               | —              |
|                                        |                                          |                                                                                                                            | B [16]                | 5 CT      | 116                                 | —               | —              |
| Separately Mounted Overload Relays     | 9065                                     | C                                                                                                                          | A                     | 1 (25 A)  | 44                                  | 82              | [10]           |
|                                        |                                          | F                                                                                                                          | B                     | 4 (133 A) | 19                                  | —               | —              |
|                                        |                                          | G                                                                                                                          | A                     | 5 (266 A) | 22                                  | —               | —              |
|                                        |                                          | MEO                                                                                                                        | A                     | (32 A)    | 86                                  | —               | —              |
|                                        |                                          | S                                                                                                                          | A                     | 1 (26 A)  | 59                                  | 83              | [10]           |
|                                        |                                          |                                                                                                                            |                       | 2 (45 A)  | 69                                  | 84              | [10]           |
|                                        |                                          |                                                                                                                            |                       | 3 (86 A)  | 34                                  | —               | —              |
|                                        |                                          |                                                                                                                            |                       | 4 (133 A) | 28                                  | —               | —              |
|                                        |                                          | T                                                                                                                          | A                     | 2 (45 A)  | 31                                  | —               | [10]           |
|                                        |                                          | U                                                                                                                          | —                     | 3 (86 A)  | 40                                  | —               | —              |

**NOTE:** For thermal unit selection tables for other devices including obsolete devices, consult the Customer Care Center at 1-888-778-2733.

[9] Series letters listed refer to the marking on the nameplate of the basic openstyle starter. When the starter comes in a controller containing other devices, the controller may have a different series letter marked on the enclosure nameplate.

[10] This device will accept Type SB slow trip (Class 30) thermal units. For selection, see page 16-132.

[11] Type A thermal units for full-load currents lower than those listed in this table are available. For complete information, consult Customer Care Center at 1-888-778-2733.

[12] Large enclosure tables apply for **Class 8904** combination and reversing starters. For non-combination and non-reversing **Class 8904** starters refer to small enclosure selections, page 16-133.

[13] For **Class 8630** starters, divide the delta-connected motor full-load current by 1.73, and use this quotient to select thermal units.

[14] For **Class 8640** and **Class 8940** starters (MD, PD, ME, PE, MF, PF, MG and PG), use the full-load current of each motor winding as a basis for thermal unit selection—normally one-half the total motor current.

[15] **Form Y81** must be specified to use quick trip (Class 10) or slow trip (Class 30) thermal units on Size 3 starters.

[16] Divide the motor FLC by 60, and use this quotient to select the appropriate thermal units.

[17] Refers to the Type number of the starter in the MCC, not the Type number of the MCC.

## Calculation of the Trip Current Rating

**Trip Current Rating**—The trip current rating is a nominal value that approximates the minimum current to trip an overload relay in an ambient temperature, outside of the enclosure, of 40 °C (104 °F). In all selection tables except Class 8198, the trip current rating is 1.25 times the minimum full load current shown for the thermal unit selected. For Class 8198, the trip current rating is 1.15 times the minimum full load current. This applies to bimetallic overload relays with the trip adjustment set at 100 percent.

### Calculation Procedure

1. Use the selection table for the specific controller involved.
2. Find the minimum motor full load current listed for the thermal unit in question.
3. Multiply that current by 1.25 (1.15 for Class 8198). The result is the trip current rating.

**Example 1:** Determine the thermal unit selection and trip current rating for thermal units in a Class 8536 Type SCG3 Size 1 magnetic starter used to control a three-phase, 1.15 service factor motor with a full load current of 17.0 Amperes, where the motor and controller are both located in a 40°C (104°F) ambient temperature.

1. From Table 13 the proper selection is B32.
2. The minimum motor full load current is 16.0 Amperes.
3. Trip current rating is  $16.0 \times 1.25 = 20.0$  Amperes.

**Protection Level** is the relationship between trip current rating and full load current. Protection level, in percent, is the trip current rating divided by the motor full load current times 100. In Example 1 the protection level for the B32 thermal unit is:  $20.0/17.0 \times 100 = 118\%$ .

National Electrical Code, Section 430-32, allows a maximum protection level of 125% for the motor in the above example.

**Minimum Trip Current** (also called ultimate current) may vary from the trip current rating value, since ratings are established under standardized test conditions. Factors which influence variations include: the number of thermal units installed, enclosure size, proximity to heat producing devices, size of conductors installed, ambient (room) temperature, and others.


Except for ambient temperature-compensated overload relays, an ambient temperature higher than 40°C would lower the trip current, and a lower temperature would increase it. This variation is not a factor in selecting thermal units for the average application, since most motor ratings are based on an ambient temperature of 40 °C, and motor capacity varies with temperature in about the same proportion as the change in trip current. Temperature-compensated relays maintain a nearly constant trip current over a wide range of ambient temperature, and are intended for use where the relay, because of its location, cannot sense changes in the motor ambient temperature.

## Calculation of the Trip Current for Ambient Temperatures Other Than 40 °C

For a controller ambient temperature other than 40 °C (104 °F) trip current can be calculated by applying a correction factor from the curve in Figure 1. The approximate trip current for a particular ambient temperature is the product of (1) the multiplier M corresponding to the temperature and (2) the 40 °C trip current rating.

**NOTE:** Ambient temperature is the temperature surrounding the starter enclosure. Normal temperature rise inside the enclosure has been taken into account in preparing the thermal unit selection tables.

**Example 2:** Determine the trip current for the motor and controller in Example 1, except the controller is in a 30 °C (86 °F) ambient temperature. From the curve in Figure 1 the multiplier M is 1.1 at 30 °C. The approximate trip current is  $16.0 \times 1.25 \times 1.1 = 22$  A.

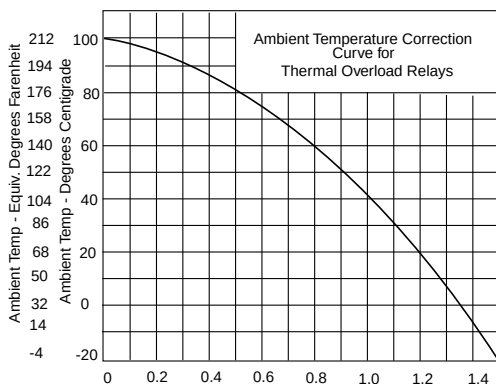

## Approximate Thermal Unit Selection Based On Horsepower and Voltage

**General**—Thermal units selected using approximate full-load currents from Table 16.379 will provide a trip current between 101% and 125% of full-load current for many 4-pole, single speed, normal torque, 60 Hz motors. Since full-load current rating of different makes and types of motors vary so widely, these selections may not be suitable.

Thermal units should be selected on the basis of motor nameplate full-load current and service factor. Thermal unit sizes originally selected on an approximate basis should always be rechecked and corrected at the time of installation if required.

### How to use Table 16.379:

- Locate the motor horsepower and voltage.
- Determine the approximate full-load current from Table 16.379.
- Use the approximate full-load current in place of actual nameplate full-load current and follow the Selection Procedure on page 16-132.

**Table 16.379: Use This Table Only When the Motor Full-Load Current Is Not Known**

| Motor<br>Horsepower | Motor Full-Load Current |       |       |       |          |       |
|---------------------|-------------------------|-------|-------|-------|----------|-------|
|                     | Three Ø                 |       |       |       | Single Ø |       |
|                     | 200 V                   | 230 V | 460 V | 575 V | 115 V    | 230 V |
| 1/6                 | —                       | —     | —     | —     | 4.4      | 2.2   |
| 1/4                 | —                       | —     | —     | —     | 5.8      | 2.9   |
| 1/3                 | —                       | —     | —     | —     | 7.2      | 3.6   |
| 1/2                 | 2.5                     | 2.2   | 1.1   | 0.9   | 9.8      | 4.9   |
| 3/4                 | 3.7                     | 3.2   | 1.6   | 1.3   | 13.8     | 6.9   |
| 1                   | 4.8                     | 4.2   | 2.1   | 1.7   | 16       | 8     |
| 1-1/2               | 6.9                     | 6.0   | 3.0   | 2.4   | 20       | 10    |
| 2                   | 7.8                     | 6.8   | 3.4   | 2.7   | 24       | 12    |
| 3                   | 11.0                    | 9.6   | 4.8   | 3.9   | 34       | 17    |
| 5                   | 17.5                    | 15.2  | 7.6   | 6.1   | 56       | 28    |
| 7-1/2               | 25.3                    | 22    | 11    | 9     | 80       | 40    |
| 10                  | 32.2                    | 28    | 14    | 11    | —        | 50    |
| 15                  | 48.3                    | 42    | 21    | 17    | —        | —     |
| 20                  | 62.1                    | 54    | 27    | 22    | —        | —     |
| 25                  | 78.2                    | 68    | 34    | 27    | —        | —     |
| 30                  | 92                      | 80    | 40    | 32    | —        | —     |
| 40                  | 120                     | 104   | 52    | 41    | —        | —     |
| 50                  | 150                     | 130   | 65    | 52    | —        | —     |
| 60                  | 177                     | 154   | 77    | 62    | —        | —     |
| 75                  | 221                     | 192   | 96    | 77    | —        | —     |
| 100                 | 285                     | 248   | 124   | 99    | —        | —     |
| 125                 | 359                     | 312   | 156   | 125   | —        | —     |
| 150                 | 414                     | 360   | 180   | 144   | —        | —     |
| 200                 | 552                     | 480   | 240   | 192   | —        | —     |

**NOTE:** These currents should not be used for selection of fuses, circuit breakers or wire sizes. See NEC tables 430-248 through 430-250. For motors rated 208-220 volts, use 230 V column. For motors rated 440 to 550 volts, use 460 and 575 V columns, respectively.

## Mounting of the Thermal Units

Always be certain the correct thermal units are installed in the starter before operating the motor. Thermal units should always be mounted so that their type designation can be read from the front of the starter (see Figure 1). Melting alloy thermal units should be mounted so that the tooth of the pawl assembly can engage the teeth of the ratchet wheel when the reset button is pushed.

Mounting surfaces of starter and thermal units should be clean and care should be taken to insure that thermal unit mounting screws are fastened securely.



Figure 1

## Thermal Unit Selection Tables

**Thermal Unit Table 1**

(index and instructions: [page 16-132 to page 16-136](#))

| Motor FLC (A)                                     |           | Thermal Unit Number |
|---------------------------------------------------|-----------|---------------------|
| 1 T.U.                                            | 3 T.U.    |                     |
| 0.33-0.36                                         | 0.29-0.32 | B 0.44              |
| 0.37-0.40                                         | 0.33-0.36 | B 0.51              |
| 0.41-0.45                                         | 0.37-0.39 | B 0.57              |
| 0.46-0.52                                         | 0.40-0.47 | B 0.63              |
| 0.53-0.59                                         | 0.48-0.56 | B 0.71              |
| 0.60-0.66                                         | 0.57-0.63 | B 0.81              |
| 0.67-0.73                                         | 0.64-0.69 | B 0.92              |
| 0.74-0.81                                         | 0.70-0.77 | B 1.03              |
| 0.82-0.91                                         | 0.78-0.86 | B 1.16              |
| 0.92-1.02                                         | 0.87-0.96 | B 1.30              |
| 1.03-1.14                                         | 0.97-1.11 | B 1.45              |
| 1.15-1.29                                         | 1.12-1.23 | B 1.67              |
| 1.20-1.42                                         | 1.24-1.37 | B 1.88              |
| 1.43-1.64                                         | 1.38-1.55 | B 2.10              |
| 1.65-1.80                                         | 1.56-1.75 | B 2.40              |
| 1.81-2.10                                         | 1.76-1.92 | B 2.65              |
| 2.11-2.30                                         | 1.93-2.16 | B 3.00              |
| 2.31-2.61                                         | 2.17-2.50 | B 3.30              |
| 2.62-2.99                                         | 2.51-2.81 | B 3.70              |
| 3.00-3.37                                         | 2.82-3.16 | B 4.15              |
| 3.38-3.94                                         | 3.17-3.40 | B 4.85              |
| 3.95-4.24                                         | 3.41-3.76 | B 5.50              |
| 4.25-4.54                                         | 3.77-4.00 | B 6.25              |
| 4.55-5.29                                         | 4.01-4.68 | B 6.90              |
| 5.30-5.73                                         | 4.69-5.18 | B 7.70              |
| 5.74-6.35                                         | 5.19-5.51 | B 8.20              |
| 6.36-7.08                                         | 5.52-6.19 | B 9.10              |
| 7.09-7.83                                         | 6.20-7.12 | B 10.2              |
| 7.84-8.47                                         | 7.13-8.15 | B 11.5              |
| 8.48-9.83                                         | 8.16-8.60 | B 12.8              |
| 9.84-10.5                                         | 8.61-9.21 | B 14.0              |
| 10.6-11.4                                         | 9.22-10.1 | B 15.5              |
| 11.5-12.8                                         | 10.2-11.2 | B 17.5              |
| 12.9-13.9                                         | 11.3-12.0 | B 19.5              |
| 14.0-16.1                                         | —         | B 22.0              |
| 16.2-18.0                                         | —         | B 25.0              |
| Following Selections<br>for Size M-1 & M-1P Only. |           |                     |
| —                                                 | 11.3-12.1 | B 19.5              |
| —                                                 | 12.2-13.6 | B 22.0              |
| 16.2-17.6                                         | 13.7-15.3 | B 25.0              |
| 17.7-20.6                                         | 15.4-17.3 | B 28.0              |
| 20.7-23.1                                         | 17.4-19.1 | B 32.0              |
| 23.2-26.0                                         | 19.2-21.7 | B 36.0              |
| —                                                 | 21.8-24.2 | B 40.0              |
| —                                                 | 24.3-26.0 | B 45.0              |
| Following Selections<br>for Size M-1P Only        |           |                     |
| 23.2-27.1                                         | —         | B 36.0              |
| 27.2-29.2                                         | —         | B 40.0              |
| 29.3-33.0                                         | —         | B 45.0              |
| 33.1-36.0                                         | —         | B 50.0              |

**Thermal Unit Table 2**

(index and instructions: [page 16-132 to page 16-136](#))

| Motor FLC (A)                                     |           | Thermal Unit Number |
|---------------------------------------------------|-----------|---------------------|
| 1 T.U.                                            | 3 T.U.    |                     |
| 0.35-0.38                                         | 0.30-0.32 | B 0.44              |
| 0.39-0.43                                         | 0.33-0.37 | B 0.51              |
| 0.44-0.48                                         | 0.36-0.39 | B 0.57              |
| 0.49-0.56                                         | 0.40-0.48 | B 0.63              |
| 0.57-0.63                                         | 0.49-0.57 | B 0.71              |
| 0.64-0.71                                         | 0.58-0.64 | B 0.81              |
| 0.72-0.78                                         | 0.65-0.70 | B 0.92              |
| 0.79-0.88                                         | 0.71-0.78 | B 1.03              |
| 0.89-0.99                                         | 0.79-0.87 | B 1.16              |
| 1.00-1.15                                         | 0.88-0.98 | B 1.30              |
| 1.16-1.23                                         | 0.99-1.13 | B 1.45              |
| 1.24-1.43                                         | 1.14-1.25 | B 1.67              |
| 1.44-1.51                                         | 1.26-1.40 | B 1.88              |
| 1.52-1.75                                         | 1.41-1.58 | B 2.10              |
| 1.76-1.93                                         | 1.59-1.79 | B 2.40              |
| 1.94-2.25                                         | 1.80-1.91 | B 2.65              |
| 2.26-2.47                                         | 1.92-2.20 | B 3.00              |
| 2.48-2.81                                         | 2.21-2.55 | B 3.30              |
| 2.82-3.20                                         | 2.56-2.87 | B 3.70              |
| 3.21-3.63                                         | 2.88-3.24 | B 4.15              |
| 3.64-4.19                                         | 3.25-3.48 | B 4.85              |
| 4.20-4.53                                         | 3.49-3.85 | B 5.50              |
| 4.54-4.89                                         | 3.86-4.10 | B 6.25              |
| 4.90-5.68                                         | 4.11-4.79 | B 6.90              |
| 5.69-6.27                                         | 4.80-5.31 | B 7.70              |
| 6.28-6.85                                         | 5.32-5.65 | B 8.20              |
| 6.86-7.73                                         | 5.66-6.35 | B 9.10              |
| 7.74-8.50                                         | 6.36-7.31 | B 10.2              |
| 8.51-9.29                                         | 7.32-8.34 | B 11.5              |
| 9.30-10.4                                         | 8.35-8.84 | B 12.8              |
| 10.5-11.3                                         | 8.85-9.47 | B 14.0              |
| 11.4-12.3                                         | 9.48-10.4 | B 15.5              |
| 12.4-13.9                                         | 10.5-11.5 | B 17.5              |
| 14.0-15.0                                         | 11.6-12.0 | B 19.5              |
| 15.1-18.0                                         | —         | B 22.0              |
| Following Selections<br>for Size M-1 & M-1P Only. |           |                     |
| —                                                 | 11.6-12.4 | B 19.5              |
| 15.1-17.4                                         | 12.5-14.0 | B 22.0              |
| 17.5-19.2                                         | 14.1-15.8 | B 25.0              |
| 19.3-22.0                                         | 15.9-17.8 | B 28.0              |
| 22.1-24.6                                         | 17.9-19.7 | B 32.0              |
| 24.7-26.0                                         | 19.8-22.4 | B 36.0              |
| —                                                 | 22.5-25.1 | B 40.0              |
| —                                                 | 25.1-26.0 | B 45.0              |
| Following Selections<br>for Size M-1P Only.       |           |                     |
| 24.7-29.1                                         | —         | B 36.0              |
| 29.2-31.7                                         | —         | B 40.0              |
| 31.8-36.0                                         | —         | B 45.0              |

Thermal Unit Table 3

(index and instructions: [page 16-132](#) to [page 16-136](#))

| Motor FLC (A)                                  |           | Thermal Unit Number |
|------------------------------------------------|-----------|---------------------|
| 1 T.U.                                         | 3 T.U.    |                     |
| 0.29–0.31                                      | 0.28–0.29 | B 0.44              |
| 0.32–0.36                                      | 0.30–0.33 | B 0.51              |
| 0.37–0.39                                      | 0.34–0.36 | B 0.57              |
| 0.40–0.47                                      | 0.37–0.44 | B 0.63              |
| 0.48–0.56                                      | 0.45–0.52 | B 0.71              |
| 0.57–0.63                                      | 0.53–0.59 | B 0.81              |
| 0.64–0.69                                      | 0.60–0.64 | B 0.92              |
| 0.70–0.77                                      | 0.65–0.71 | B 1.03              |
| 0.78–0.86                                      | 0.72–0.80 | B 1.16              |
| 0.87–0.97                                      | 0.81–0.90 | B 1.30              |
| 0.98–1.12                                      | 0.91–1.03 | B 1.45              |
| 1.13–1.24                                      | 1.04–1.14 | B 1.67              |
| 1.25–1.39                                      | 1.15–1.27 | B 1.88              |
| 1.40–1.57                                      | 1.28–1.44 | B 2.10              |
| 1.58–1.78                                      | 1.45–1.63 | B 2.40              |
| 1.79–1.96                                      | 1.64–1.79 | B 2.65              |
| 1.97–2.20                                      | 1.80–2.01 | B 3.00              |
| 2.21–2.41                                      | 2.02–2.19 | B 3.30              |
| 2.42–2.75                                      | 2.20–2.52 | B 3.70              |
| 2.76–3.25                                      | 2.53–2.95 | B 4.15              |
| 3.26–3.50                                      | 2.96–3.17 | B 4.85              |
| 3.51–3.87                                      | 3.18–3.50 | B 5.50              |
| 3.88–4.13                                      | 3.51–3.73 | B 6.25              |
| 4.14–4.69                                      | 3.74–4.22 | B 6.90              |
| 4.70–5.20                                      | 4.23–4.68 | B 7.70              |
| 5.21–5.53                                      | 4.69–4.98 | B 8.20              |
| 5.54–6.23                                      | 4.99–5.59 | B 9.10              |
| 6.24–7.18                                      | 5.60–6.43 | B 10.2              |
| 7.19–8.20                                      | 6.44–7.41 | B 11.5              |
| 8.21–8.98                                      | 7.42–8.02 | B 12.8              |
| 8.99–9.63                                      | 8.03–8.59 | B 14.0              |
| 9.64–10.6                                      | 8.60–9.52 | B 15.5              |
| 10.7–11.8                                      | 9.53–10.5 | B 17.5              |
| 11.9–12.7                                      | 10.6–11.2 | B 19.5              |
| 12.8–14.3                                      | 11.3–12.0 | B 22.0              |
| 14.4–16.1                                      | —         | B 25.0              |
| 16.2–18.0                                      | —         | B 28.0              |
| Following Selections for Size M-1 & M-1P Only. |           |                     |
| —                                              | 11.3–12.7 | B 22.0              |
| —                                              | 12.8–14.3 | B 25.0              |
| 16.2–18.3                                      | 14.4–16.1 | B 28.0              |
| 18.4–20.2                                      | 16.2–17.8 | B 32.0              |
| 20.3–23.0                                      | 17.9–20.1 | B 36.0              |
| 23.1–26.0                                      | 20.2–22.6 | B 40.0              |
| —                                              | 22.7–25.5 | B 45.0              |
| —                                              | 25.6–26.0 | B 50.0              |
| Following Selections for Size M-1P Only        |           |                     |
| 25.9–29.0                                      | —         | B 45.0              |
| 29.1–30.8                                      | —         | B 50.0              |
| 30.9–32.7                                      | —         | B 56.0              |
| 32.8–36.0                                      | —         | B 62.0              |

Thermal Unit Table 5

(index and instructions: [page 16-132](#) to [page 16-136](#))

| Current Transformer Ratio |           |           |           |           |           |           |           |           |           | Thermal Unit Number |
|---------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|---------------------|
| 25/5                      | 50/5      | 75/5      | 100/5     | 150/5     | 200/5     | 250/5     | 300/5     | 400/5     | 500/5     |                     |
| Motor FLC                 |           |           |           |           |           |           |           |           |           |                     |
| 10.6–11.7                 | 21.1–23.6 | 31.7–35.4 | 42.3–47.2 | 63.4–70.9 | 84.5–94.6 | 106.–117. | 127.–141. | 169.–188. | 211.–236. | B 3.00              |
| 11.8–13.2                 | 23.7–26.5 | 35.5–39.8 | 47.3–53.1 | 71.0–79.7 | 94.7–105. | 118.–132. | 142.–159. | 189.–212. | 237.–265. | B 3.30              |
| 13.3–14.8                 | 26.6–29.6 | 39.9–44.5 | 53.2–59.4 | 79.8–89.1 | 106.–118. | 133.–148. | 160.–177. | 213.–237. | 266.–296. | B 3.70              |
| 14.9–17.2                 | 29.7–34.5 | 44.6–51.8 | 59.5–69.2 | 89.2–103. | 119.–138. | 149.–172. | 178.–207. | 238.–276. | 297.–345. | B 4.15              |
| 17.3–19.6                 | 34.6–39.2 | 51.9–58.9 | 69.3–78.6 | 104.–117. | 139.–156. | 173.–196. | 208.–235. | 277.–314. | 346.–360. | B 4.85              |
| 19.7–22.3                 | 39.3–44.6 | 59.0–67.0 | 78.7–89.3 | 118.–133. | 157.–178. | 197.–223. | 236.–267. | 315.–357. | —         | B 5.50              |

Thermal Unit Table 9

(index and instructions: [page 16-132](#) to [page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 15.3–16.7     | C 20.0              |
| 16.8–19.8     | C 22.0              |
| 19.9–22.8     | C 26.0              |
| 22.9–25.8     | C 30.0              |
| 25.9–30.4     | C 34.0              |
| 30.5–31.9     | C 40.0              |
| 32.0–34.2     | C 42.0              |
| 34.3–38.8     | C 45.0              |
| 38.9–44.2     | C 51.0              |
| 44.3–50.2     | C 58.0              |
| 50.3–57.1     | C 66.0              |
| 57.2–63.2     | C 75.0              |
| 63.3–68.6     | C 83.0              |
| 68.7–78.6     | C 90.0              |
| 78.7–86.9     | C 103.0             |
| 87.0–100.0    | C 114.0             |

Thermal Unit Table 4

(index and instructions: [page 16-132](#) to [page 16-136](#))

| Motor FLC (A)                                  |           | Thermal Unit Number |
|------------------------------------------------|-----------|---------------------|
| 1 T.U.                                         | 3 T.U.    |                     |
| 0.32–0.33                                      | 0.29–0.30 | B 0.44              |
| 0.34–0.38                                      | 0.31–0.35 | B 0.51              |
| 0.39–0.41                                      | 0.36–0.37 | B 0.57              |
| 0.42–0.50                                      | 0.38–0.45 | B 0.63              |
| 0.51–0.61                                      | 0.46–0.54 | B 0.71              |
| 0.62–0.68                                      | 0.55–0.61 | B 0.81              |
| 0.69–0.74                                      | 0.62–0.66 | B 0.92              |
| 0.75–0.83                                      | 0.67–0.74 | B 1.03              |
| 0.84–0.93                                      | 0.75–0.83 | B 1.16              |
| 0.94–1.05                                      | 0.84–0.93 | B 1.30              |
| 1.06–1.21                                      | 0.94–1.07 | B 1.45              |
| 1.22–1.34                                      | 1.08–1.19 | B 1.67              |
| 1.35–1.50                                      | 1.20–1.33 | B 1.88              |
| 1.51–1.70                                      | 1.34–1.51 | B 2.10              |
| 1.71–1.93                                      | 1.52–1.70 | B 2.40              |
| 1.94–2.12                                      | 1.71–1.87 | B 2.65              |
| 2.13–2.38                                      | 1.88–2.10 | B 3.00              |
| 2.39–2.61                                      | 2.11–2.29 | B 3.30              |
| 2.62–2.99                                      | 2.30–2.63 | B 3.70              |
| 3.00–3.53                                      | 2.64–3.09 | B 4.15              |
| 3.54–3.80                                      | 3.10–3.32 | B 4.85              |
| 3.81–4.21                                      | 3.33–3.67 | B 5.50              |
| 4.22–4.49                                      | 3.68–3.91 | B 6.25              |
| 4.50–5.10                                      | 3.92–4.43 | B 6.90              |
| 5.11–5.66                                      | 4.44–4.91 | B 7.70              |
| 5.67–6.03                                      | 4.92–5.23 | B 8.20              |
| 6.04–6.79                                      | 5.24–5.88 | B 9.10              |
| 6.80–7.84                                      | 5.89–6.77 | B 10.2              |
| 7.85–8.96                                      | 6.78–7.90 | B 11.5              |
| 8.97–9.82                                      | 7.91–8.44 | B 12.8              |
| 9.83–10.4                                      | 8.45–9.05 | B 14.0              |
| 10.5–11.6                                      | 9.06–9.99 | B 15.5              |
| 11.7–12.9                                      | 10.0–11.0 | B 17.5              |
| 13.0–13.9                                      | 11.1–11.9 | B 19.5              |
| 14.0–15.7                                      | 12.0–12.0 | B 22.0              |
| 15.8–18.0                                      | —         | B 25.0              |
| Following Selections for Size M-1 & M-1P Only. |           |                     |
| —                                              | 12.0–13.4 | B 22.0              |
| —                                              | 13.5–15.1 | B 25.0              |
| 17.8–20.1                                      | 15.2–17.0 | B 28.0              |
| 20.2–22.2                                      | 17.1–18.9 | B 32.0              |
| 22.3–25.3                                      | 19.0–21.4 | B 36.0              |
| 25.4–26.0                                      | 21.5–24.0 | B 40.0              |
| —                                              | 24.1–26.0 | B 45.0              |
| Following Selections for Size M-1P Only.       |           |                     |
| 25.4–28.4                                      | —         | B 40.0              |
| 28.5–33.1                                      | —         | B 45.0              |
| 33.2–36.0                                      | —         | B 50.0              |

Thermal Unit Table 10

(index and instructions: [page 16-132](#) to [page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 43.6–47.3     | CC 54.5             |
| 47.4–51.3     | CC 59.4             |
| 51.4–54.6     | CC 64.3             |
| 54.7–59.7     | CC 68.5             |
| 59.8–65.1     | CC 74.6             |
| 65.2–70.1     | CC 81.5             |
| 70.2–75.1     | CC 87.7             |
| 75.2–82.2     | CC 94.0             |
| 82.3–89.2     | CC 103.0            |
| 89.3–96.5     | CC 112.0            |
| 96.6–104.     | CC 121.0            |
| 105.–113.     | CC 132.0            |
| 114.–123.     | CC 143.0            |
| 124.–132.     | CC 156.0            |
| 133.–150.     | CC 167.0            |

**Thermal Unit Table 12**

(index and instructions: [page 16-132](#) to [page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 92–100.       | DD 112.0            |
| 101–109.      | DD 121.0            |
| 110–119.      | DD 128.0            |
| 120–131.      | DD 140.0            |
| 132–139.      | DD 150.0            |
| 140–156.      | DD 160.0            |
| 157–166.      | DD 185.0            |
| 167–180.      | DD 213.0            |
| 181–189.      | DD 220.0            |
| 190–209.      | DD 230.0            |
| 210–225.      | DD 250.0            |
| 226–238.      | DD 265.0            |
| 239–263.      | DD 280.0            |
| 264–300.      | DD 300.0            |

**Thermal Unit Table 14**

(index and instructions: [page 16-132](#) to [page 16-136](#))

| Motor FLC (A) |           |           | Thermal Unit Number |
|---------------|-----------|-----------|---------------------|
| 1 T.U.        | 2 T.U.    | 3 T.U.    |                     |
| 0.43–0.47     | 0.41–0.45 | 0.40–0.41 | A .49               |
| 0.48–0.51     | 0.46–0.50 | 0.42–0.46 | A .54               |
| 0.52–0.56     | 0.51–0.55 | 0.47–0.51 | A .59               |
| 0.57–0.64     | 0.56–0.62 | 0.52–0.57 | A .65               |
| 0.65–0.69     | 0.63–0.67 | 0.58–0.62 | A .71               |
| 0.70–0.76     | 0.68–0.72 | 0.63–0.67 | A .78               |
| 0.77–0.84     | 0.73–0.81 | 0.68–0.75 | A .86               |
| 0.85–0.91     | 0.82–0.88 | 0.76–0.80 | A .95               |
| 0.92–1.01     | 0.89–0.97 | 0.81–0.89 | A 1.02              |
| 1.02–1.15     | 0.98–1.08 | 0.90–1.02 | A 1.16              |
| 1.16–1.23     | 1.09–1.18 | 1.03–1.09 | A 1.25              |
| 1.24–1.37     | 1.19–1.32 | 1.10–1.21 | A 1.39              |
| 1.38–1.45     | 1.33–1.40 | 1.22–1.29 | A 1.54              |
| 1.46–1.56     | 1.41–1.48 | 1.30–1.37 | A 1.63              |
| 1.57–1.67     | 1.49–1.60 | 1.38–1.48 | A 1.75              |
| 1.68–1.77     | 1.61–1.72 | 1.49–1.58 | A 1.86              |
| 1.78–1.92     | 1.73–1.84 | 1.59–1.72 | A 1.99              |
| 1.93–2.09     | 1.85–2.00 | 1.73–1.85 | A 2.15              |
| 2.10–2.31     | 2.01–2.22 | 1.86–2.05 | A 2.31              |
| 2.32–2.56     | 2.23–2.45 | 2.06–2.29 | A 2.57              |
| 2.57–2.92     | 2.46–2.82 | 2.30–2.62 | A 2.81              |
| 2.93–3.16     | 2.83–3.08 | 2.63–2.84 | A 3.61              |
| 3.17–3.48     | 3.09–3.39 | 2.85–3.10 | A 3.95              |
| 3.49–3.83     | 3.40–3.75 | 3.11–3.46 | A 4.32              |
| 3.84–4.24     | 3.76–4.16 | 3.47–3.85 | A 4.79              |
| 4.25–4.62     | 4.17–4.51 | 3.86–4.16 | A 5.30              |
| 4.63–4.92     | 4.52–4.83 | 4.17–4.46 | A 5.78              |
| 4.93–5.61     | 4.84–5.49 | 4.47–5.08 | A 6.20              |
| 5.62–5.85     | 5.50–5.67 | 5.09–5.35 | A 6.99              |
| 5.86–6.36     | 5.68–6.16 | 5.36–5.82 | A 7.65              |
| 6.37–6.99     | 6.17–6.75 | 5.83–6.34 | A 8.38              |
| 7.00–7.67     | 6.76–7.00 | 6.35–6.95 | A 9.25              |
| 7.68–8.15     | —         | 6.96–7.00 | A 9.85              |
| 8.16–9.00     | —         | —         | A 11.0              |

**Thermal Unit Table 13**

(index and instructions: [page 16-132](#) to [page 16-136](#))

| Motor FLC (A)                        |           |           | Thermal Unit Number |
|--------------------------------------|-----------|-----------|---------------------|
| 1 T.U.                               | 2 T.U.    | 3 T.U.    |                     |
| 0.29–0.31                            | 0.29–0.31 | 0.28–0.30 | B 0.44              |
| 0.32–0.34                            | 0.32–0.34 | 0.31–0.34 | B 0.51              |
| 0.35–0.38                            | 0.35–0.38 | 0.35–0.37 | B 0.57              |
| 0.39–0.45                            | 0.39–0.45 | 0.38–0.44 | B 0.63              |
| 0.46–0.54                            | 0.46–0.54 | 0.45–0.53 | B 0.71              |
| 0.55–0.61                            | 0.55–0.61 | 0.54–0.59 | B 0.81              |
| 0.62–0.66                            | 0.62–0.66 | 0.60–0.64 | B 0.92              |
| 0.67–0.73                            | 0.67–0.73 | 0.65–0.72 | B 1.03              |
| 0.74–0.81                            | 0.74–0.81 | 0.73–0.80 | B 1.16              |
| 0.82–0.94                            | 0.82–0.94 | 0.81–0.90 | B 1.30              |
| 0.95–1.05                            | 0.95–1.05 | 0.91–1.03 | B 1.45              |
| 1.06–1.22                            | 1.06–1.22 | 1.04–1.14 | B 1.67              |
| 1.23–1.34                            | 1.23–1.34 | 1.15–1.27 | B 1.88              |
| 1.35–1.51                            | 1.35–1.51 | 1.28–1.43 | B 2.10              |
| 1.52–1.71                            | 1.52–1.71 | 1.44–1.62 | B 2.40              |
| 1.72–1.93                            | 1.72–1.93 | 1.63–1.77 | B 2.65              |
| 1.94–2.14                            | 1.94–2.14 | 1.78–1.97 | B 3.00              |
| 2.15–2.40                            | 2.15–2.40 | 1.98–2.32 | B 3.30              |
| 2.41–2.72                            | 2.41–2.72 | 2.33–2.51 | B 3.70              |
| 2.73–3.15                            | 2.73–3.15 | 2.52–2.99 | B 4.15              |
| 3.16–3.55                            | 3.16–3.55 | 3.00–3.42 | B 4.85              |
| 3.56–4.00                            | 3.56–4.00 | 3.43–3.75 | B 5.50              |
| 4.01–4.40                            | 4.01–4.40 | 3.76–3.98 | B 6.25              |
| 4.41–4.88                            | 4.41–4.88 | 3.99–4.48 | B 6.90              |
| 4.89–5.19                            | 4.89–5.19 | 4.49–4.93 | B 7.70              |
| 5.20–5.73                            | 5.20–5.73 | 4.94–5.21 | B 8.20              |
| 5.74–6.39                            | 5.74–6.39 | 5.22–5.84 | B 9.10              |
| 6.40–7.13                            | 6.40–7.13 | 5.85–6.67 | B 10.2              |
| 7.14–7.90                            | 7.14–7.90 | 6.68–7.54 | B 11.5              |
| 7.91–8.55                            | 7.91–8.55 | 7.55–8.14 | B 12.8              |
| 8.56–9.53                            | 8.56–9.53 | 8.15–8.72 | B 14.0              |
| 9.54–10.6                            | 9.54–10.6 | 8.73–9.66 | B 15.5              |
| 10.7–11.8                            | 10.7–11.8 | 9.67–10.5 | B 17.5              |
| 11.9–13.2                            | 11.9–12.0 | 10.6–11.3 | B 19.5              |
| 13.3–14.9                            | —         | 11.4–12.0 | B 22.0              |
| 15.0–16.6                            | —         | —         | B 25.0              |
| 16.7–18.0                            | —         | —         | B 28.0              |
| Following Selections for Size 1 Only |           |           |                     |
| —                                    | 11.9–13.2 | —         | B 19.5              |
| —                                    | 13.3–14.9 | 11.4–12.7 | B 22.0              |
| —                                    | 15.0–16.6 | 12.8–14.1 | B 25.0              |
| 16.7–18.9                            | 16.7–18.9 | 14.2–15.9 | B 28.0              |
| 19.0–21.2                            | 19.0–21.2 | 16.0–17.5 | B 32.0              |
| 21.3–23.0                            | 21.3–23.0 | 17.6–19.7 | B 36.0              |
| 23.1–25.5                            | 23.1–25.5 | 19.8–21.9 | B 40.0              |
| 25.6–26.0                            | 25.6–26.0 | 22.0–24.4 | B 45.0              |
| —                                    | —         | 24.5–26.0 | B 50.0              |

**Thermal Unit Table 15**

(index and instructions: [page 16-132](#) to [page 16-136](#))

| Motor FLC (A)                        |           |           | Thermal Unit Number |
|--------------------------------------|-----------|-----------|---------------------|
| 1 T.U.                               | 2 T.U.    | 3 T.U.    |                     |
| 0.31–0.33                            | 0.31–0.33 | 0.29–0.31 | B 0.44              |
| 0.34–0.36                            | 0.34–0.36 | 0.32–0.36 | B 0.51              |
| 0.37–0.40                            | 0.37–0.40 | 0.37–0.38 | B 0.57              |
| 0.41–0.48                            | 0.41–0.48 | 0.39–0.46 | B 0.63              |
| 0.49–0.57                            | 0.49–0.57 | 0.47–0.55 | B 0.71              |
| 0.58–0.64                            | 0.58–0.64 | 0.56–0.61 | B 0.81              |
| 0.65–0.70                            | 0.65–0.70 | 0.62–0.66 | B 0.92              |
| 0.71–0.77                            | 0.71–0.77 | 0.67–0.75 | B 1.03              |
| 0.78–0.85                            | 0.78–0.85 | 0.76–0.83 | B 1.16              |
| 0.86–0.99                            | 0.86–0.99 | 0.84–0.93 | B 1.30              |
| 1.00–1.10                            | 1.00–1.10 | 0.94–1.06 | B 1.45              |
| 1.11–1.28                            | 1.11–1.28 | 1.07–1.18 | B 1.67              |
| 1.29–1.41                            | 1.29–1.41 | 1.19–1.31 | B 1.88              |
| 1.42–1.58                            | 1.42–1.58 | 1.32–1.47 | B 2.10              |
| 1.59–1.80                            | 1.59–1.80 | 1.48–1.67 | B 2.40              |
| 1.81–2.03                            | 1.81–2.03 | 1.68–1.83 | B 2.65              |
| 2.04–2.25                            | 2.04–2.25 | 1.84–2.04 | B 3.00              |
| 2.26–2.51                            | 2.26–2.51 | 2.05–2.38 | B 3.30              |
| 2.52–2.83                            | 2.52–2.83 | 2.39–2.60 | B 3.70              |
| 2.84–3.29                            | 2.84–3.29 | 2.61–3.13 | B 4.15              |
| 3.30–3.75                            | 3.30–3.75 | 3.14–3.59 | B 4.85              |
| 3.76–4.22                            | 3.76–4.22 | 3.60–3.94 | B 5.50              |
| 4.23–4.65                            | 4.23–4.65 | 3.95–4.19 | B 6.25              |
| 4.66–5.16                            | 4.66–5.16 | 4.20–4.72 | B 6.90              |
| 5.17–5.53                            | 5.17–5.53 | 4.73–5.21 | B 7.70              |
| 5.54–6.09                            | 5.54–6.09 | 5.22–5.51 | B 8.20              |
| 6.10–6.80                            | 6.10–6.80 | 5.52–6.17 | B 9.10              |
| 6.81–7.60                            | 6.81–7.60 | 6.18–7.07 | B 10.2              |
| 7.61–8.35                            | 7.61–8.35 | 7.08–8.05 | B 11.5              |
| 8.36–9.04                            | 8.36–9.04 | 8.06–8.69 | B 12.8              |
| 9.05–9.99                            | 9.05–9.99 | 8.70–9.32 | B 14.0              |
| 10.0–11.1                            | 10.0–11.1 | 9.33–10.2 | B 15.5              |
| 11.2–12.3                            | 11.2–12.0 | 10.3–11.3 | B 17.5              |
| 12.4–13.7                            | —         | 11.4–12.0 | B 19.5              |
| 13.8–15.4                            | —         | —         | B 22.0              |
| 15.5–18.0                            | —         | —         | B 25.0              |
| Following Selections for Size 1 Only |           |           |                     |
| —                                    | 11.2–12.3 | —         | B 17.5              |
| —                                    | 12.4–13.7 | 11.4–12.1 | B 19.5              |
| —                                    | 13.8–15.4 | 12.2–13.7 | B 22.0              |
| 15.5–17.2                            | 15.5–17.2 | 13.8–15.2 | B 25.0              |
| 17.3–19.4                            | 17.3–19.4 | 15.3–17.2 | B 28.0              |
| 19.5–21.7                            | 19.5–21.7 | 17.3–18.9 | B 32.0              |
| 21.8–23.9                            | 21.8–23.9 | 19.0–21.4 | B 36.0              |
| 24.0–26.0                            | 24.0–26.0 | 21.5–23.7 | B 40.0              |
| —                                    | —         | 23.8–26.0 | B 45.0              |



Thermal Unit Table 16

(index and instructions: [page 16-132](#) to [page 16-136](#))

| Motor FLC (A) |           |           | Thermal Unit Number |
|---------------|-----------|-----------|---------------------|
| 1 T.U.        | 2 T.U.    | 3 T.U.    |                     |
| 16.2–17.5     | 15.1–16.2 | 14.3–15.4 | CC 20.9             |
| 17.6–18.8     | 16.3–17.3 | 15.5–16.4 | CC 22.8             |
| 18.9–20.5     | 17.4–19.5 | 16.5–18.5 | CC 24.6             |
| 20.6–22.2     | 19.6–20.7 | 18.6–19.6 | CC 26.3             |
| 22.3–23.7     | 20.8–22.3 | 19.7–21.1 | CC 28.8             |
| 23.8–25.4     | 22.4–24.0 | 21.2–22.7 | CC 31.0             |
| 25.5–27.3     | 24.1–25.7 | 22.8–24.4 | CC 33.3             |
| 27.4–29.3     | 25.8–27.5 | 24.5–26.1 | CC 36.4             |
| 29.4–31.5     | 27.6–29.6 | 26.2–28.1 | CC 39.6             |
| 31.6–33.9     | 29.7–31.7 | 28.2–30.0 | CC 42.7             |
| 34.0–36.2     | 31.8–33.9 | 30.1–32.1 | CC 46.6             |
| 36.3–39.3     | 34.0–36.6 | 32.2–34.7 | CC 50.1             |
| 39.4–42.3     | 36.7–39.3 | 34.8–37.3 | CC 54.5             |
| 42.4–45.3     | 39.4–42.3 | 37.4–40.1 | CC 59.4             |
| 45.4–48.3     | 42.4–44.9 | 40.2–42.6 | CC 64.3             |
| 48.4–52.0     | 45.0–48.3 | 42.7–45.8 | CC 68.5             |
| 52.1–54.9     | 48.4–50.9 | 45.9–48.3 | CC 74.6             |
| 55.0–59.7     | 51.0–55.5 | 48.4–52.6 | CC 81.5             |
| 59.8–65.4     | 55.6–59.9 | 52.7–56.8 | CC 87.7             |
| 65.5–69.6     | 60.0–64.2 | 56.9–60.9 | CC 94.0             |
| 69.7–74.8     | 64.3–68.7 | 61.0–65.1 | CC 103.0            |
| 74.9–79.7     | 68.8–71.4 | 65.2–67.7 | CC 112.0            |
| 79.8–83.1     | 71.5–74.8 | 67.8–70.9 | CC 121.0            |
| 83.2–86.0     | 74.9–78.0 | 71.0–73.9 | CC 132.0            |
| —             | 78.1–80.7 | 74.0–76.5 | CC 143.0            |
| —             | 80.8–86.0 | 76.6–80.2 | CC 156.0            |
| —             | —         | 80.3–83.1 | CC 167.0            |
| —             | —         | 83.2–86.0 | CC 180.0            |

Thermal Unit Table 17

(index and instructions: [page 16-132](#) to [page 16-136](#))

| Motor FLC (A) |           |           | Thermal Unit Number |
|---------------|-----------|-----------|---------------------|
| 1 T.U.        | 2 T.U.    | 3 T.U.    |                     |
| 0.42–0.46     | 0.39–0.43 | 0.38–0.40 | A .49               |
| 0.47–0.50     | 0.44–0.47 | 0.41–0.44 | A .54               |
| 0.51–0.55     | 0.48–0.52 | 0.45–0.49 | A .59               |
| 0.56–0.62     | 0.53–0.58 | 0.50–0.55 | A .65               |
| 0.63–0.67     | 0.59–0.64 | 0.56–0.60 | A .71               |
| 0.68–0.73     | 0.65–0.68 | 0.61–0.65 | A .78               |
| 0.74–0.81     | 0.69–0.77 | 0.66–0.72 | A .86               |
| 0.82–0.89     | 0.78–0.84 | 0.73–0.79 | A .95               |
| 0.90–0.98     | 0.85–0.93 | 0.80–0.88 | A 1.02              |
| 0.99–1.12     | 0.94–1.05 | 0.89–0.98 | A 1.16              |
| 1.13–1.20     | 1.06–1.13 | 0.99–1.07 | A 1.25              |
| 1.21–1.34     | 1.14–1.25 | 1.08–1.17 | A 1.39              |
| 1.35–1.41     | 1.26–1.33 | 1.18–1.25 | A 1.54              |
| 1.42–1.51     | 1.34–1.42 | 1.26–1.33 | A 1.63              |
| 1.52–1.62     | 1.43–1.52 | 1.34–1.44 | A 1.75              |
| 1.63–1.73     | 1.53–1.63 | 1.45–1.53 | A 1.86              |
| 1.74–1.86     | 1.64–1.75 | 1.54–1.65 | A 1.99              |
| 1.87–2.02     | 1.76–1.90 | 1.66–1.79 | A 2.15              |
| 2.03–2.25     | 1.91–2.13 | 1.80–1.99 | A 2.31              |
| 2.26–2.46     | 2.14–2.33 | 2.00–2.18 | A 2.57              |
| 2.47–2.77     | 2.34–2.73 | 2.19–2.45 | A 2.81              |
| 2.78–2.99     | 2.74–2.86 | 2.46–2.65 | A 3.61              |
| 3.00–3.26     | 2.87–3.14 | 2.66–2.90 | A 3.95              |
| 3.27–3.59     | 3.15–3.47 | 2.91–3.19 | A 4.32              |
| 3.60–3.99     | 3.48–3.83 | 3.20–3.56 | A 4.79              |
| 4.00–4.42     | 3.84–4.16 | 3.57–3.83 | A 5.30              |
| 4.43–4.61     | 4.17–4.43 | 3.84–4.08 | A 5.78              |
| 4.62–5.23     | 4.44–5.00 | 4.09–4.64 | A 6.20              |
| 5.24–5.39     | 5.01–5.16 | 4.65–5.00 | A 6.99              |
| 5.40–5.88     | 5.17–5.56 | 5.01–5.36 | A 7.65              |
| 5.89–6.56     | 5.57–6.22 | 5.37–5.87 | A 8.38              |
| 6.57–7.18     | 6.23–6.89 | 5.88–6.43 | A 9.25              |
| 7.19–7.80     | 6.90–7.00 | 6.44–6.79 | A 9.85              |
| 7.81–9.00     | —         | 6.80–7.00 | A 11.0              |

Thermal Unit Table 18

(index and instructions: [page 16-132](#) to [page 16-136](#))

| Motor FLC (A) |           |           | Thermal Unit Number |
|---------------|-----------|-----------|---------------------|
| 1 T.U.        | 2 T.U.    | 3 T.U.    |                     |
| 15.5–16.4     | 14.4–15.3 | 13.6–14.5 | CC 20.9             |
| 16.5–17.6     | 15.4–16.4 | 14.6–15.5 | CC 22.8             |
| 17.7–19.1     | 16.5–18.4 | 15.6–17.4 | CC 24.6             |
| 19.2–20.4     | 18.5–19.6 | 17.5–18.5 | CC 26.3             |
| 20.5–22.1     | 19.7–21.0 | 18.6–19.9 | CC 28.8             |
| 22.2–23.4     | 21.1–22.7 | 20.0–21.5 | CC 31.0             |
| 23.5–25.6     | 22.8–24.2 | 21.6–22.9 | CC 33.3             |
| 25.7–27.3     | 24.3–25.9 | 23.0–24.5 | CC 36.4             |
| 27.4–29.4     | 26.0–27.8 | 24.6–26.3 | CC 39.6             |
| 29.5–31.5     | 27.9–29.8 | 26.4–28.2 | CC 42.7             |
| 31.6–33.7     | 29.9–31.7 | 28.3–30.0 | CC 46.6             |
| 33.8–36.5     | 31.8–34.2 | 30.1–32.3 | CC 50.1             |
| 36.6–39.1     | 34.3–36.9 | 32.4–34.9 | CC 54.5             |
| 39.2–41.7     | 37.0–39.8 | 35.0–37.6 | CC 59.4             |
| 41.8–44.8     | 39.9–42.3 | 37.7–40.0 | CC 64.3             |
| 44.9–48.0     | 42.4–45.3 | 40.1–42.8 | CC 68.5             |
| 48.1–50.7     | 45.4–47.9 | 42.9–45.3 | CC 74.6             |
| 50.8–54.9     | 48.0–51.9 | 45.4–49.1 | CC 81.5             |
| 55.0–59.9     | 52.0–56.5 | 49.2–53.4 | CC 87.7             |
| 60.0–63.3     | 56.6–60.7 | 53.5–57.4 | CC 94.0             |
| 63.4–67.2     | 60.8–64.8 | 57.5–61.3 | CC 103.0            |
| 67.3–72.4     | 64.9–67.1 | 61.4–63.5 | CC 112.0            |
| 72.5–74.9     | 67.2–70.1 | 63.6–66.3 | CC 121.0            |
| 75.0–77.4     | 70.2–72.9 | 66.4–69.0 | CC 132.0            |
| 77.5–80.7     | 73.0–74.9 | 69.1–70.9 | CC 143.0            |
| 80.8–83.1     | 75.0–77.9 | 71.0–73.7 | CC 156.0            |
| 83.2–86.0     | 78.0–80.9 | 73.8–76.5 | CC 167.0            |
| —             | 81.0–82.9 | 76.6–78.4 | CC 180.0            |
| —             | 83.0–86.0 | 78.5–86.0 | CC 196.0            |

Thermal Unit Table 19

(index and instructions: [page 16-132](#) to [page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 43.6–47.3     | CC 54.5             |
| 47.4–51.3     | CC 59.4             |
| 51.4–54.6     | CC 64.3             |
| 54.7–59.7     | CC 68.5             |
| 59.8–65.1     | CC 74.6             |
| 65.2–70.1     | CC 81.5             |
| 70.2–75.1     | CC 87.7             |
| 75.2–82.2     | CC 94.0             |
| 82.3–89.2     | CC 103.0            |
| 89.3–96.5     | CC 112.0            |
| 96.6–104.     | CC 121.0            |
| 105–113.      | CC 132.0            |
| 114–123.      | CC 143.0            |
| 124–133.      | CC 156.0            |

Thermal Unit Table 20

(index and instructions: [page 16-132](#) to [page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 133–148.      | B 1.30              |
| 149–174.      | B 1.45              |
| 175–195.      | B 1.67              |
| 196–219.      | B 1.88              |
| 220–239.      | B 2.10              |
| 240–271.      | B 2.40              |
| 272–308.      | B 2.65              |
| 309–348.      | B 3.00              |
| 349–397.      | B 3.30              |
| 398–429.      | B 3.70              |
| 430–495.      | B 4.15              |
| 496–520.      | B 4.85              |

Thermal Unit Table 21

(index and instructions: [page 16-132](#) to [page 16-136](#))

| Motor FLC (A) | Thermal Unit Load |
|---------------|-------------------|
| 128–140.      | B 1.30            |
| 141–163.      | B 1.45            |
| 164–179.      | B 1.67            |
| 180–201.      | B 1.88            |
| 202–227.      | B 2.10            |
| 228–251.      | B 2.40            |
| 252–278.      | B 2.65            |
| 279–308.      | B 3.00            |
| 309–346.      | B 3.30            |
| 347–380.      | B 3.70            |
| 381–426.      | B 4.15            |
| 427–454.      | B 4.85            |
| 455–489.      | B 5.50            |
| 490–520.      | B 6.25            |

**Thermal Unit Table 22**

(index and instructions: [page 16-132 to page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 92.0–100.     | DD 112.0            |
| 101.–109.     | DD 121.0            |
| 110.–119.     | DD 128.0            |
| 120.–131.     | DD 140.0            |
| 132.–139.     | DD 150.0            |
| 140.–156.     | DD 160.0            |
| 157.–166.     | DD 185.0            |
| 167.–180.     | DD 213.0            |
| 181.–189.     | DD 220.0            |
| 190.–209.     | DD 230.0            |
| 210.–225.     | DD 250.0            |
| 226.–238.     | DD 265.0            |
| 239.–266.     | DD 280.0            |

**Thermal Unit Table 26**

(index and instructions: [page 16-132 to page 16-136](#))

| Size 7 Type J             | Size 8 Type K | Thermal Unit Number |
|---------------------------|---------------|---------------------|
| Current Transformer Ratio |               |                     |
| 120/5                     | 2000/5        |                     |
| Motor FLC                 |               |                     |
| 166.–187.                 | 277.–312.     | B 1.03              |
| 188.–211.                 | 313.–352.     | B 1.16              |
| 212.–232.                 | 353.–388.     | B 1.30              |
| 233.–267.                 | 389.–445.     | B 1.45              |
| 268.–301.                 | 446.–503.     | B 1.67              |
| 302.–336.                 | 504.–561.     | B 1.88              |
| 337.–383.                 | 562.–640.     | B 2.10              |
| 384.–425.                 | 641.–708.     | B 2.40              |
| 426.–466.                 | 709.–777.     | B 2.65              |
| 467.–522.                 | 778.–870.     | B 3.00              |
| 523.–587.                 | 871.–978.     | B 3.30              |
| 588.–656.                 | 979.–1093.    | B 3.70              |
| 657.–764.                 | 1094.–1215.   | B 4.15              |

**Thermal Unit Table 31**

(index and instructions: [page 16-132 to page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 0.31–0.35     | B 0.44              |
| 0.36–0.39     | B 0.51              |
| 0.40–0.44     | B 0.57              |
| 0.45–0.50     | B 0.63              |
| 0.51–0.61     | B 0.71              |
| 0.62–0.68     | B 0.81              |
| 0.69–0.73     | B 0.92              |
| 0.74–0.82     | B 1.03              |
| 0.83–0.92     | B 1.16              |
| 0.93–1.03     | B 1.30              |
| 1.04–1.19     | B 1.45              |
| 1.20–1.34     | B 1.67              |
| 1.35–1.50     | B 1.88              |
| 1.51–1.74     | B 2.10              |
| 1.75–1.97     | B 2.40              |
| 1.98–2.14     | B 2.65              |
| 2.15–2.47     | B 3.00              |
| 2.48–2.91     | B 3.30              |
| 2.92–3.31     | B 3.70              |
| 3.32–3.75     | B 4.15              |
| 3.76–4.05     | B 4.85              |
| 4.06–4.94     | B 6.25              |
| 4.95–5.52     | B 6.90              |
| 5.53–6.11     | B 7.70              |
| 6.12–6.52     | B 8.20              |
| 6.53–7.31     | B 9.10              |
| 7.32–8.43     | B 10.2              |
| 8.44–9.83     | B 11.5              |
| 9.84–10.7     | B 12.8              |
| 10.8–11.6     | B 14.0              |
| 11.7–12.9     | B 15.5              |
| 13.0–14.3     | B 17.5              |
| 14.4–15.7     | B 19.5              |
| 15.8–17.8     | B 22.0              |
| 17.9–20.3     | B 25.0              |
| 20.4–23.3     | B 28.0              |
| 23.4–26.6     | B 32.0              |
| 26.7–30.3     | B 36.0              |
| 30.4–35.3     | B 40.0              |
| 35.4–41.5     | B 45.0              |
| 41.6–45       | B 50.0              |

**Thermal Unit Table 24**

(index and instructions: [page 16-132 to page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 88.2–95.1     | DD 112.0            |
| 95.2–101.     | DD 121.0            |
| 102.–111.     | DD 128.0            |
| 112.–119.     | DD 140.0            |
| 120.–131.     | DD 150.0            |
| 132.–149.     | DD 160.0            |
| 150.–170.     | DD 185.0            |
| 171.–180.     | DD 220.0            |
| 181.–197.     | DD 240.0            |
| 198.–204.     | DD 250.0            |
| 205.–213.     | DD 265.0            |
| 214.–237.     | DD 280.0            |
| 238.–243.     | DD 300.0            |
| 244.–266.     | DD 320.0            |

**Thermal Unit Table 28**

(index and instructions: [page 16-132 to page 16-136](#))

| Motor FLC (A)   |                 | Thermal Unit Number |
|-----------------|-----------------|---------------------|
| 2 or 3 T.U.     |                 |                     |
| Large Enclosure | Small Enclosure |                     |
| 45.3–48.2       | 40.3–42.8       | CC 64.3             |
| 48.3–52.4       | 42.9–46.2       | CC 68.5             |
| 52.5–56.4       | 46.3–49.8       | CC 74.6             |
| 56.5–61.2       | 49.9–54.9       | CC 81.5             |
| 61.3–66.1       | 55.0–57.9       | CC 87.7             |
| 66.2–71.4       | 58.0–62.5       | CC 94.0             |
| 71.5–77.0       | 62.6–67.3       | CC 103.0            |
| 77.1–80.7       | 67.4–73.4       | CC 112.0            |
| 80.8–87.7       | 73.5–78.9       | CC 121.0            |
| 87.8–94.9       | 79.0–84.9       | CC 132.0            |
| 95.0–102.       | 85.0–91.0       | CC 143.0            |
| 103.–110.       | 91.1–97.2       | CC 156.0            |
| 111.–117.       | 97.3–104.       | CC 167.0            |
| 118.–133.       | 105.–121.       | CC 180.0            |
| —               | 122.–133.       | CC 196.0            |

**Thermal Unit Table 34**

(index and instructions: [page 16-132 to page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 15.1–16.2     | CC 20.9             |
| 16.3–17.5     | CC 22.8             |
| 17.6–19.1     | CC 24.6             |
| 19.2–20.7     | CC 26.3             |
| 20.8–22.2     | CC 28.8             |
| 22.3–24.0     | CC 31.0             |
| 24.1–25.7     | CC 33.3             |
| 25.8–27.8     | CC 36.4             |
| 27.9–30.1     | CC 39.6             |
| 30.2–32.5     | CC 42.7             |
| 32.6–35.1     | CC 46.6             |
| 35.2–38.0     | CC 50.1             |
| 38.1–41.1     | CC 54.5             |
| 41.2–44.0     | CC 59.4             |
| 44.1–47.2     | CC 64.3             |
| 47.3–51.1     | CC 68.5             |
| 51.2–55.8     | CC 74.6             |
| 55.9–59.5     | CC 81.5             |
| 59.6–64.5     | CC 87.7             |
| 64.6–69.5     | CC 94.0             |
| 69.6–75.0     | CC 103.0            |
| 75.1–78.1     | CC 112.0            |
| 78.2–82.3     | CC 121.0            |
| 82.4–86.0     | CC 132.0            |

**Thermal Unit Table 40**

(index and instructions: [page 16-132 to page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 15.3–16.7     | C 20.0              |
| 16.8–19.8     | C 22.0              |
| 19.9–22.8     | C 26.0              |
| 22.9–25.8     | C 30.0              |
| 25.9–30.4     | C 34.0              |
| 30.5–31.9     | C 40.0              |
| 32.0–34.2     | C 42.0              |
| 34.3–38.8     | C 45.0              |
| 38.9–44.2     | C 51.0              |
| 44.3–50.2     | C 58.0              |
| 50.3–57.1     | C 66.0              |
| 57.2–63.2     | C 75.0              |
| 63.3–68.6     | C 83.0              |
| 68.7–78.6     | C 90.0              |
| 78.7–86.0     | C 103.0             |

Thermal Unit Table 41

(index and instructions: [page 16-132](#) to [page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 0.81-0.92     | B 1.16              |
| 0.93-1.07     | B 1.30              |
| 1.08-1.14     | B 1.45              |
| 1.15-1.26     | B 1.67              |
| 1.27-1.49     | B 1.88              |
| 1.50-1.73     | B 2.10              |
| 1.74-1.89     | B 2.40              |
| 1.90-2.16     | B 2.65              |
| 2.17-2.37     | B 3.00              |
| 2.38-2.66     | B 3.30              |
| 2.67-2.99     | B 3.70              |
| 3.00-3.40     | B 4.15              |
| 3.41-3.94     | B 4.85              |
| 3.95-4.15     | B 5.50              |
| 4.16-4.49     | B 6.25              |
| 4.50-5.15     | B 6.90              |
| 5.16-5.77     | B 7.70              |
| 5.78-6.61     | B 8.20              |
| 6.62-7.14     | B 9.10              |
| 7.15-7.97     | B 10.2              |
| 7.98-8.15     | B 11.5              |
| 8.16-9.32     | B 12.8              |
| 9.33-9.97     | B 14.0              |
| 9.98-10.7     | B 15.5              |
| 10.8-12.0     | B 17.5              |
| 12.1-13.9     | B 19.5              |
| 14.0-15.7     | B 22.0              |
| 15.8-18.4     | B 25.0              |
| 18.5-21.6     | B 28.0              |
| 21.7-24.0     | B 32.0              |
| 24.1-28.6     | B 36.0              |
| 28.7-30.7     | B 40.0              |
| 30.8-33.5     | B 45.0              |
| 33.6-36.0     | B 50.0              |

Thermal Unit Table 43

(index and instructions: [page 16-132](#) to [page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 0.41-0.44     | A .49               |
| 0.45-0.49     | A .54               |
| 0.50-0.53     | A .59               |
| 0.54-0.58     | A .65               |
| 0.59-0.65     | A .71               |
| 0.66-0.71     | A .78               |
| 0.72-0.78     | A .86               |
| 0.79-0.85     | A .95               |
| 0.86-0.96     | A 1.02              |
| 0.97-1.04     | A 1.16              |
| 1.05-1.16     | A 1.25              |
| 1.17-1.29     | A 1.39              |
| 1.30-1.37     | A 1.54              |
| 1.38-1.47     | A 1.63              |
| 1.48-1.56     | A 1.75              |
| 1.57-1.65     | A 1.86              |
| 1.66-1.79     | A 1.99              |
| 1.80-1.95     | A 2.15              |
| 1.96-2.15     | A 2.31              |
| 2.16-2.38     | A 2.57              |
| 2.39-2.75     | A 2.81              |
| 2.76-2.84     | A 3.61              |
| 2.85-3.06     | A 3.95              |
| 3.07-3.45     | A 4.32              |
| 3.46-3.70     | A 4.79              |
| 3.71-4.07     | A 5.30              |
| 4.08-4.32     | A 5.78              |
| 4.33-4.90     | A 6.20              |
| 4.91-5.35     | A 6.99              |
| 5.36-5.85     | A 7.65              |
| 5.86-6.41     | A 8.38              |
| 6.42-6.79     | A 9.25              |
| 6.80-7.57     | A 9.85              |
| 7.58-8.15     | A 11.0              |
| 8.16-8.98     | A 11.9              |
| 8.99-9.67     | A 13.2              |
| 9.68-9.95     | A 14.1              |
| 9.96-10.8     | A 14.8              |
| 10.9-12.1     | A 16.2              |
| 12.2-13.1     | A 17.9              |
| 13.2-13.9     | A 19.8              |
| 14.0-15.0     | A 21.3              |
| 15.1-16.0     | A 25.2              |

Thermal Unit Table 44

(index and instructions: [page 16-132](#) to [page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 0.34-0.38     | B 0.44              |
| 0.39-0.43     | B 0.51              |
| 0.44-0.48     | B 0.57              |
| 0.49-0.53     | B 0.65              |
| 0.54-0.62     | B 0.71              |
| 0.63-0.69     | B 0.81              |
| 0.70-0.78     | B 0.92              |
| 0.79-0.88     | B 1.03              |
| 0.89-0.99     | B 1.16              |
| 1.00-1.10     | B 1.30              |
| 1.11-1.26     | B 1.45              |
| 1.27-1.43     | B 1.67              |
| 1.44-1.59     | B 1.88              |
| 1.60-1.81     | B 2.10              |
| 1.82-2.00     | B 2.40              |
| 2.01-2.28     | B 2.65              |
| 2.29-2.52     | B 3.00              |
| 2.53-2.87     | B 3.30              |
| 2.88-3.28     | B 3.70              |
| 3.29-3.75     | B 4.15              |
| 3.76-4.27     | B 4.85              |
| 4.28-4.77     | B 5.50              |
| 4.78-5.27     | B 6.25              |
| 5.28-5.91     | B 6.90              |
| 5.92-6.25     | B 7.70              |
| 6.26-6.83     | B 8.20              |
| 6.84-7.65     | B 9.10              |
| 7.66-8.55     | B 10.2              |
| 8.56-9.56     | B 11.5              |
| 9.57-10.3     | B 12.8              |
| 10.4-11.3     | B 14.0              |
| 11.4-12.4     | B 15.5              |
| 12.5-14.1     | B 17.5              |
| 14.2-15.7     | B 19.5              |
| 15.8-17.9     | B 22.0              |
| 18.0-20.1     | B 25.0              |
| 20.2-22.5     | B 28.0              |
| 22.6-25.0     | B 32.0              |

Thermal Unit Table 49

(index and instructions: [page 16-132](#) to [page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 82.5-88.2     | DD 112.0            |
| 88.3-95.9     | DD 121.0            |
| 96.0-102.     | DD 128.0            |
| 103.-109.     | DD 140.0            |
| 110.-121.     | DD 150.0            |
| 122.-139.     | DD 160.0            |
| 140.-154.     | DD 185.0            |
| 155.-163.     | DD 220.0            |
| 164.-175.     | DD 240.0            |
| 176.-184.     | DD 250.0            |
| 185.-195.     | DD 265.0            |
| 196.-215.     | DD 280.0            |
| 216.-224.     | DD 300.0            |
| 225.-243.     | DD 320.0            |
| 244.-266.     | DD 340.0            |

**Thermal Unit Table 53**

(index and instructions: [page 16-132](#) to [page 16-136](#))

| Motor FLC (A) |           | Thermal Unit Number |
|---------------|-----------|---------------------|
| 1 T. U.       | 3 T. U.   |                     |
| 0.31-0.33     | 0.29-0.31 | B 0.44              |
| 0.34-0.36     | 0.32-0.36 | B 0.51              |
| 0.37-0.40     | 0.37-0.38 | B 0.57              |
| 0.41-0.48     | 0.39-0.46 | B 0.63              |
| 0.49-0.57     | 0.47-0.55 | B 0.71              |
| 0.58-0.64     | 0.56-0.61 | B 0.81              |
| 0.65-0.70     | 0.62-0.66 | B 0.92              |
| 0.71-0.77     | 0.67-0.75 | B 1.03              |
| 0.78-0.85     | 0.76-0.83 | B 1.16              |
| 0.86-0.99     | 0.84-0.93 | B 1.30              |
| 1.00-1.10     | 0.94-1.06 | B 1.45              |
| 1.11-1.28     | 1.07-1.18 | B 1.67              |
| 1.29-1.41     | 1.19-1.31 | B 1.88              |
| 1.42-1.58     | 1.32-1.47 | B 2.10              |
| 1.59-1.80     | 1.48-1.67 | B 2.40              |
| 1.81-2.03     | 1.68-1.83 | B 2.65              |
| 2.04-2.25     | 1.84-2.04 | B 3.00              |
| 2.26-2.51     | 2.05-2.38 | B 3.30              |
| 2.52-2.83     | 2.39-2.60 | B 3.70              |
| 2.84-3.29     | 2.61-3.13 | B 4.15              |
| 3.30-3.75     | 3.14-3.59 | B 4.85              |
| 3.76-4.22     | 3.60-3.94 | B 5.50              |
| 4.23-4.65     | 3.95-4.19 | B 6.25              |
| 4.66-5.16     | 4.20-4.72 | B 6.90              |
| 5.17-5.53     | 4.73-5.21 | B 7.70              |
| 5.54-6.09     | 5.22-5.51 | B 8.20              |
| 6.10-6.80     | 5.52-6.17 | B 9.10              |
| 6.81-7.60     | 6.18-7.00 | B 10.2              |
| 7.61-8.35     | —         | B 11.5              |
| 8.36-9.00     | —         | B 12.8              |

**Thermal Unit Table 56**

(index and instructions: [page 16-132](#) to [page 16-136](#))

| Motor FLC (A) |           | Thermal Unit Number |
|---------------|-----------|---------------------|
| 1 or 2 T. U.  | 3 T. U.   |                     |
| 3.29-3.74     | 3.18-3.40 | B 4.85              |
| 3.75-4.23     | 3.41-3.76 | B 5.50              |
| 4.24-4.68     | 3.77-4.00 | B 6.25              |
| 4.69-5.22     | 4.01-4.57 | B 6.90              |
| 5.23-5.67     | 4.58-5.03 | B 7.70              |
| 5.68-6.13     | 5.04-5.32 | B 8.20              |
| 6.14-6.91     | 5.33-5.97 | B 9.10              |
| 6.92-7.70     | 5.88-6.88 | B 10.2              |
| 7.71-8.56     | 6.89-7.82 | B 11.5              |
| 8.57-9.39     | 7.83-8.47 | B 12.8              |
| 9.40-10.4     | 8.48-9.15 | B 14.0              |
| 10.5-11.6     | 9.16-10.1 | B 15.5              |
| 11.7-12.9     | 10.2-11.2 | B 17.5              |
| 13.0-14.6     | 11.3-12.0 | B 19.5              |
| 14.7-16.5     | 12.1-13.6 | B 22.0              |
| 16.6-18.5     | 13.7-15.2 | B 25.0              |
| 18.6-21.0     | 15.3-17.1 | B 28.0              |
| 21.1-23.6     | 17.2-19.0 | B 32.0              |
| 23.7-26.3     | 19.1-21.5 | B 36.0              |
| 26.4-29.3     | 21.6-24.1 | B 40.0              |
| 29.4-35.1     | 24.2-27.0 | B 45.0              |
| 35.2-36.1     | 27.1-28.7 | B 50.0              |
| 36.2-39.1     | 28.8-30.4 | B 56.0              |
| 39.2-41.5     | 30.5-32.2 | B 62.0              |
| 41.6-45.0     | 32.3-35.4 | B 70.0              |
| —             | 35.5-38.2 | B 79.0              |
| —             | 38.3-45.0 | B 88.0              |

**Thermal Unit Table 54**

(index and instructions: [page 16-132](#) to [page 16-136](#))

| Motor FLC (A) |           | Thermal Unit Number |
|---------------|-----------|---------------------|
| 2 T. U.       | 3 T. U.   |                     |
| 43.6-45.5     | 41.1-43.5 | CC 64.3             |
| 45.6-49.6     | 43.6-46.8 | CC 68.5             |
| 49.7-53.1     | 46.9-50.0 | CC 74.6             |
| 53.2-57.6     | 50.1-54.9 | CC 81.5             |
| 57.7-62.4     | 55.0-57.5 | CC 87.7             |
| 62.5-67.5     | 57.6-61.8 | CC 94.0             |
| 67.6-71.1     | 61.9-66.2 | CC 103.0            |
| 71.2-75.9     | 66.3-72.4 | CC 112.0            |
| 76.0-81.9     | 72.5-78.1 | CC 121.0            |
| 82.0-84.6     | 78.2-80.7 | CC 132.0            |
| 84.7-90.7     | 80.8-86.5 | CC 143.0            |
| 90.8-98.4     | 86.6-93.9 | CC 156.0            |
| 98.5-105.     | 94.0-100. | CC 167.0            |
| 106-117.      | 101-112.  | CC 180.0            |
| 118-123.      | 113-117.  | CC 196.0            |
| 124-133.      | 118-123.  | CC 208.0            |
| —             | 124-133.  | CC 219.0            |

**Thermal Unit Table 58**

(index and instructions: [page 16-132](#) to [page 16-136](#))

| Motor FLC (A) |           | Thermal Unit Number |
|---------------|-----------|---------------------|
| 1 or 2 T. U.  | 3 T. U.   |                     |
| 3.37-3.82     | 3.28-3.51 | B 4.85              |
| 3.83-4.33     | 3.52-3.89 | B 5.50              |
| 4.34-4.79     | 3.90-4.14 | B 6.25              |
| 4.80-5.33     | 4.15-4.73 | B 6.90              |
| 5.34-5.79     | 4.74-5.22 | B 7.70              |
| 5.80-6.27     | 5.23-5.53 | B 8.20              |
| 6.28-7.03     | 5.54-6.21 | B 9.10              |
| 7.04-7.88     | 6.22-7.17 | B 10.2              |
| 7.89-8.73     | 7.18-8.19 | B 11.5              |
| 8.74-9.55     | 8.20-8.90 | B 12.8              |
| 9.56-10.6     | 8.91-9.57 | B 14.0              |
| 10.7-11.8     | 9.58-10.6 | B 15.5              |
| 11.9-13.1     | 10.7-11.8 | B 17.5              |
| 13.2-14.9     | 11.9-12.7 | B 19.5              |
| 15.0-16.9     | 12.8-14.4 | B 22.0              |
| 17.0-18.8     | 14.5-16.1 | B 25.0              |
| 18.9-21.5     | 16.2-18.2 | B 28.0              |
| 21.6-24.1     | 18.3-20.2 | B 32.0              |
| 24.2-26.8     | 20.3-22.8 | B 36.0              |
| 26.9-29.9     | 22.9-25.6 | B 40.0              |
| 30.0-35.5     | 25.7-28.8 | B 45.0              |
| 35.6-36.5     | 28.9-30.6 | B 50.0              |
| 36.6-39.6     | 30.7-32.4 | B 56.0              |
| 39.7-41.5     | 32.5-34.6 | B 62.0              |
| 41.6-45.0     | 34.7-38.6 | B 70.0              |
| —             | 38.7-45.0 | B 79.0              |

Thermal Unit Table 59

(index and instructions: [page 16-132](#) to [page 16-136](#))

| Motor FLC (A) |           | Thermal Unit Number |
|---------------|-----------|---------------------|
| 1 or 2 T. U.  | 3 T. U.   |                     |
| 0.34–0.38     | 0.29–0.31 | B 0.44              |
| 0.39–0.43     | 0.32–0.35 | B 0.51              |
| 0.44–0.47     | 0.36–0.38 | B 0.57              |
| 0.48–0.53     | 0.39–0.46 | B 0.63              |
| 0.54–0.60     | 0.47–0.55 | B 0.71              |
| 0.61–0.68     | 0.56–0.62 | B 0.81              |
| 0.69–0.76     | 0.63–0.67 | B 0.92              |
| 0.77–0.86     | 0.68–0.75 | B 1.03              |
| 0.87–0.97     | 0.76–0.84 | B 1.16              |
| 0.98–1.07     | 0.85–0.95 | B 1.30              |
| 1.08–1.23     | 0.96–1.09 | B 1.45              |
| 1.24–1.39     | 1.10–1.21 | B 1.67              |
| 1.40–1.55     | 1.22–1.35 | B 1.88              |
| 1.56–1.77     | 1.36–1.53 | B 2.10              |
| 1.78–1.96     | 1.54–1.73 | B 2.40              |
| 1.97–2.15     | 1.74–1.90 | B 2.65              |
| 2.16–2.41     | 1.91–2.14 | B 3.00              |
| 2.42–2.71     | 2.15–2.34 | B 3.30              |
| 2.72–3.03     | 2.35–2.67 | B 3.70              |
| 3.04–3.53     | 2.68–3.22 | B 4.15              |
| 3.54–4.01     | 3.23–3.48 | B 4.85              |
| 4.02–4.56     | 3.49–3.87 | B 5.50              |
| 4.57–5.03     | 3.88–4.14 | B 6.25              |
| 5.04–5.59     | 4.15–4.73 | B 6.90              |
| 5.60–5.95     | 4.74–5.28 | B 7.70              |
| 5.96–6.58     | 5.29–5.64 | B 8.20              |
| 6.59–7.31     | 5.65–6.39 | B 9.10              |
| 7.32–8.15     | 6.40–7.43 | B 10.2              |
| 8.16–9.13     | 7.44–8.55 | B 11.5              |
| 9.14–9.91     | 8.56–9.40 | B 12.8              |
| 9.92–10.7     | 9.41–10.0 | B 14.0              |
| 10.8–12.1     | 10.1–11.2 | B 15.5              |
| 12.2–13.5     | 11.3–12.5 | B 17.5              |
| 13.6–15.1     | 12.6–13.5 | B 19.5              |
| 15.2–17.0     | 13.6–15.4 | B 22.0              |
| 17.1–18.9     | 15.5–17.5 | B 25.0              |
| 19.0–21.5     | 17.6–19.9 | B 28.0              |
| 21.6–24.0     | 20.0–22.2 | B 32.0              |
| 24.1–26.0     | 22.3–25.5 | B 36.0              |
| —             | 25.6–26.0 | B 40.0              |

Thermal Unit Table 65

(index and instructions: [page 16-132](#) to [page 16-136](#))

| Motor FLC (A)                         | Thermal Unit Number |
|---------------------------------------|---------------------|
| 0.31–0.35                             | B 0.44              |
| 0.36–0.39                             | B 0.51              |
| 0.40–0.44                             | B 0.57              |
| 0.45–0.50                             | B 0.63              |
| 0.51–0.58                             | B 0.71              |
| 0.59–0.65                             | B 0.81              |
| 0.66–0.73                             | B 0.92              |
| 0.74–0.82                             | B 1.03              |
| 0.83–0.92                             | B 1.16              |
| 0.93–1.03                             | B 1.30              |
| 1.04–1.19                             | B 1.45              |
| 1.20–1.34                             | B 1.67              |
| 1.35–1.50                             | B 1.88              |
| 1.51–1.67                             | B 2.10              |
| 1.68–1.89                             | B 2.40              |
| 1.90–2.14                             | B 2.65              |
| 2.15–2.36                             | B 3.00              |
| 2.37–2.65                             | B 3.30              |
| 2.66–2.97                             | B 3.70              |
| 2.98–3.47                             | B 4.15              |
| 3.48–3.94                             | B 4.85              |
| 3.95–4.44                             | B 5.50              |
| 4.45–4.94                             | B 6.25              |
| 4.95–5.52                             | B 6.90              |
| 5.53–5.88                             | B 7.70              |
| 5.89–6.52                             | B 8.20              |
| 6.53–7.31                             | B 9.10              |
| 7.32–8.21                             | B 10.2              |
| 8.22–9.18                             | B 11.5              |
| 9.19–9.90                             | B 12.8              |
| 10.0–11.0                             | B 14.0              |
| 11.1–12.4                             | B 15.5              |
| 12.5–13.9                             | B 17.5              |
| 14.0–15.7                             | B 19.5              |
| 15.8–17.8                             | B 22.0              |
| 17.9–20.0                             | B 25.0              |
| 20.1–22.9                             | B 28.0              |
| 23.0–25.0                             | B 32.0              |
| Following Selections for Size 2 Only. |                     |
| 23.0–25.7                             | B 32.0              |
| 25.8–28.6                             | B 36.0              |
| 28.7–32.2                             | B 40.0              |
| 32.3–35.8                             | B 45.0              |
| 35.9–40.1                             | B 50.0              |
| 40.2–44.4                             | B 56.0              |
| 44.5–50.0                             | B 62.0              |

Thermal Unit Table 61

(index and instructions: [page 16-132](#) to [page 16-136](#))

| Motor FLC (A) |           | Thermal Unit Number |
|---------------|-----------|---------------------|
| 2 T. U.       | 3 T. U.   |                     |
| 46.8–50.0     | 45.3–48.2 | CC 64.3             |
| 50.1–54.2     | 48.3–52.4 | CC 68.5             |
| 54.3–58.3     | 52.5–56.4 | CC 74.6             |
| 58.4–63.6     | 56.5–61.2 | CC 81.5             |
| 63.7–68.5     | 61.3–66.1 | CC 87.7             |
| 68.6–74.0     | 66.2–71.4 | CC 94.0             |
| 74.1–79.8     | 71.5–77.0 | CC 103.0            |
| 79.9–83.0     | 77.1–79.0 | CC 112.0            |
| 83.1–88.9     | 79.1–84.7 | CC 121.0            |
| 89.0–95.6     | 84.8–91.1 | CC 132.0            |
| 95.7–102.     | 91.2–98.1 | CC 143.0            |
| 103.–109.     | 98.2–104. | CC 156.0            |
| 110.–119.     | 105.–113. | CC 167.0            |
| 120.–133.     | 114.–123. | CC 180.0            |
| —             | 124.–133. | CC 196.0            |

Thermal Unit Table 66

(index and instructions: [page 16-132](#) to [page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 0.31–0.32     | B 0.44              |
| 0.33–0.36     | B 0.51              |
| 0.37–0.41     | B 0.57              |
| 0.42–0.49     | B 0.63              |
| 0.50–0.54     | B 0.71              |
| 0.55–0.61     | B 0.81              |
| 0.62–0.67     | B 0.92              |
| 0.68–0.76     | B 1.03              |
| 0.77–0.87     | B 1.16              |
| 0.88–0.98     | B 1.30              |
| 0.99–1.05     | B 1.45              |
| 1.06–1.25     | B 1.67              |
| 1.26–1.33     | B 1.88              |
| 1.34–1.56     | B 2.10              |
| 1.57–1.71     | B 2.40              |
| 1.72–1.97     | B 2.65              |
| 1.98–2.15     | B 3.00              |
| 2.16–2.42     | B 3.30              |
| 2.43–2.78     | B 3.70              |
| 2.79–3.28     | B 4.15              |
| 3.29–3.88     | B 4.85              |
| 3.89–4.13     | B 5.5               |
| 4.14–4.43     | B 6.25              |
| 4.44–4.96     | B 6.90              |
| 4.97–5.35     | B 7.70              |
| 5.36–5.91     | B 8.20              |
| 5.92–6.79     | B 9.10              |
| 6.80–7.56     | B 10.2              |
| 7.57–7.83     | B 11.5              |
| 7.84–8.09     | B 12.8              |
| 8.10–9.51     | B 14.0              |
| 9.52–10.1     | B 15.5              |
| 10.2–11.3     | B 17.5              |
| 11.4–13.1     | B 19.5              |
| 13.2–14.9     | B 22.0              |
| 15.0–16.1     | B 25.0              |
| 16.2–17.8     | B 28.0              |
| 17.9–19.1     | B 32.0              |
| 19.2–22.4     | B 36.0              |
| 22.5–23.5     | B 40.0              |
| 23.6–26.0     | B 45.0              |

**Thermal Unit Table 67**

(index and instructions: [page 16-132](#) to [page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 3.79-4.14     | B 5.50              |
| 4.15-4.44     | B 6.25              |
| 4.45-5.22     | B 6.90              |
| 5.23-5.29     | B 7.70              |
| 5.30-5.99     | B 8.20              |
| 6.00-6.82     | B 9.10              |
| 6.83-7.68     | B 10.2              |
| 7.69-7.92     | B 11.5              |
| 7.93-8.47     | B 12.8              |
| 8.48-9.99     | B 14.0              |
| 10.0-10.8     | B 15.5              |
| 10.9-12.3     | B 17.5              |
| 12.4-12.9     | B 19.5              |
| 13.0-15.1     | B 22.0              |
| 15.2-16.7     | B 25.0              |
| 16.8-17.9     | B 28.0              |
| 18.0-20.1     | B 32.0              |
| 20.2-23.8     | B 36.0              |
| 23.9-25.8     | B 40.0              |
| 25.9-28.3     | B 45.0              |
| 28.4-29.6     | B 50.0              |
| 29.7-32.1     | B 56.0              |
| 32.2-34.4     | B 62.0              |
| 34.5-38.3     | B 70.0              |
| 38.4-39.9     | B 79.0              |
| 40.0-45.0     | B 88.0              |

**Thermal Unit Table 69**

(index and instructions: [page 16-132](#) to [page 16-136](#))

| Motor FLC (A) |           | Thermal Unit Number |
|---------------|-----------|---------------------|
| 1 or 2 T. U.  | 3 T. U.   |                     |
| 3.46-3.90     | 3.38-3.65 | B 4.85              |
| 3.91-4.44     | 3.66-4.07 | B 5.50              |
| 4.45-4.91     | 4.08-4.36 | B 6.25              |
| 4.92-5.51     | 4.37-5.19 | B 6.90              |
| 5.52-5.84     | 5.20-5.59 | B 7.70              |
| 5.85-6.54     | 5.60-5.98 | B 8.20              |
| 6.55-7.33     | 5.99-6.78 | B 9.10              |
| 7.34-8.31     | 6.79-7.91 | B 10.2              |
| 8.32-9.22     | 7.92-9.12 | B 11.5              |
| 9.23-10.0     | 9.13-10.0 | B 12.8              |
| 10.1-11.2     | 10.1-10.7 | B 14.0              |
| 11.3-12.5     | 10.8-12.0 | B 15.5              |
| 12.6-14.2     | 12.1-13.5 | B 17.5              |
| 14.3-16.1     | 13.6-14.6 | B 19.5              |
| 16.2-18.4     | 14.7-16.7 | B 22.0              |
| 18.5-20.5     | 16.8-18.9 | B 25.0              |
| 20.6-23.2     | 19.0-21.6 | B 28.0              |
| 23.3-26.6     | 21.7-24.1 | B 32.0              |
| 26.7-29.6     | 24.2-27.6 | B 36.0              |
| 29.7-33.5     | 27.7-31.2 | B 40.0              |
| 33.6-37.2     | 31.3-35.5 | B 45.0              |
| 37.3-41.5     | 35.6-37.8 | B 50.0              |
| 41.6-45.0     | 37.9-41.5 | B 56.0              |
| —             | 41.6-45.0 | B 62.0              |

**Thermal Unit Table 68**

(index and instructions: [page 16-132](#) to [page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 14.9-16.1     | CC 20.9             |
| 16.2-17.3     | CC 22.8             |
| 17.4-19.5     | CC 24.6             |
| 19.6-20.7     | CC 26.3             |
| 20.8-22.4     | CC 28.8             |
| 22.5-23.9     | CC 31.0             |
| 24.0-25.8     | CC 33.3             |
| 25.9-27.6     | CC 36.4             |
| 27.7-29.7     | CC 39.6             |
| 29.8-31.8     | CC 42.7             |
| 31.9-34.2     | CC 46.6             |
| 34.3-37.0     | CC 50.1             |
| 37.1-39.6     | CC 54.5             |
| 39.7-42.5     | CC 59.4             |
| 42.6-45.0     | CC 64.3             |
| 45.1-48.6     | CC 68.5             |
| 48.7-51.2     | CC 74.6             |
| 51.3-56.0     | CC 81.5             |
| 56.1-60.1     | CC 87.7             |
| 60.2-64.3     | CC 94.0             |
| 64.4-68.9     | CC 103.0            |
| 69.0-71.9     | CC 112.0            |
| 72.0-75.4     | CC 121.0            |
| 75.5-78.9     | CC 132.0            |
| 79.0-82.1     | CC 143.0            |
| 82.2-86.0     | CC 156.0            |



Thermal Unit Table 72

(index and instructions: [page 16-132](#) to [page 16-136](#))

| Motor FLC (A)                                  |           | Thermal Unit Number |
|------------------------------------------------|-----------|---------------------|
| 1 T. U.                                        | 3 T. U.   |                     |
| 2.38-2.62                                      | 2.38-2.62 | FB 3.33             |
| 2.63-2.94                                      | 2.63-2.94 | FB 3.71             |
| 2.95-3.31                                      | 2.95-3.31 | FB 4.1              |
| 3.32-3.43                                      | 3.32-3.43 | FB 4.5              |
| 3.44-3.81                                      | 3.44-3.81 | FB 4.75             |
| 3.82-4.32                                      | 3.82-4.32 | FB 5.3              |
| 4.33-4.75                                      | 4.33-4.75 | FB 6.1              |
| 4.76-5.38                                      | 4.76-5.38 | FB 6.75             |
| 5.39-5.75                                      | 5.39-5.75 | FB 7.45             |
| 5.76-5.97                                      | 5.76-5.97 | FB 7.8              |
| 5.98-6.30                                      | 5.98-6.30 | FB 8.21             |
| 6.31-6.55                                      | 6.31-6.55 | FB 8.6              |
| 6.56-6.89                                      | 6.56-6.89 | FB 9.0              |
| 6.90-7.14                                      | 6.90-7.14 | FB 9.5              |
| 7.15-7.36                                      | 7.15-7.36 | FB 10.0             |
| 7.37-8.30                                      | 7.37-8.30 | FB 10.6             |
| 8.31-8.59                                      | 8.31-8.59 | FB 11.2             |
| 8.60-9.01                                      | 8.60-9.01 | FB 12.1             |
| 9.02-9.68                                      | 9.02-9.68 | FB 13.1             |
| 9.69-9.99                                      | 9.69-9.99 | FB 13.9             |
| 10.0-10.9                                      | 10.0-10.9 | FB 14.8             |
| 11.0-11.3                                      | 11.0-11.3 | FB 15.6             |
| 11.4-12.4                                      | 11.4-12.0 | FB 16.4             |
| 12.5-12.9                                      | —         | FB 17.6             |
| 13.0-14.0                                      | —         | FB 18.4             |
| 14.1-14.5                                      | —         | FB 19.4             |
| 14.6-15.7                                      | —         | FB 21.1             |
| 15.8-16.6                                      | —         | FB 22.6             |
| 16.7-18.0                                      | —         | FB 23.6             |
| Following Selections for Size M-1 & M-1P Only. |           |                     |
| —                                              | 11.4-12.4 | FB 16.4             |
| —                                              | 12.5-12.9 | FB 17.6             |
| —                                              | 13.0-14.0 | FB 18.4             |
| —                                              | 14.1-14.5 | FB 19.4             |
| —                                              | 14.6-15.7 | FB 21.1             |
| —                                              | 15.8-16.6 | FB 22.6             |
| 16.7-17.6                                      | 16.7-17.6 | FB 23.6             |
| 17.7-18.3                                      | 17.7-18.3 | FB 24.8             |
| 18.4-19.4                                      | 18.4-19.4 | FB 26.7             |
| 19.5-20.5                                      | 19.5-20.5 | FB 28.3             |
| 20.6-21.7                                      | 20.6-21.7 | FB 29.6             |
| 21.8-22.8                                      | 21.8-22.8 | FB 30.5             |
| 22.9-24.3                                      | 22.9-24.3 | FB 32.5             |
| 24.4-24.7                                      | 24.4-24.7 | FB 34.1             |
| 24.8-25.4                                      | 24.8-25.4 | FB 35.0             |
| 25.5-26.0                                      | 25.5-26.0 | FB 36.6             |
| Following Selections for Size M-1P Only.       |           |                     |
| 26.1-27.7                                      | —         | FB 38.3             |
| 27.8-28.9                                      | —         | FB 40.2             |
| 29.0-30.6                                      | —         | FB 42.0             |
| 30.7-32.5                                      | —         | FB 44.0             |
| 32.6-36.0                                      | —         | FB 46.0             |

Thermal Unit Table 73

(index and instructions: [page 16-132](#) to [page 16-136](#))

| Motor FLC (A)                                  |           | Thermal Unit Number |
|------------------------------------------------|-----------|---------------------|
| 1 T. U.                                        | 3 T. U.   |                     |
| 2.42-2.67                                      | 2.42-2.67 | FB 3.33             |
| 2.68-3.00                                      | 2.68-3.00 | FB 3.71             |
| 3.01-3.36                                      | 3.01-3.36 | FB 4.1              |
| 3.37-3.53                                      | 3.37-3.53 | FB 4.5              |
| 3.54-3.91                                      | 3.54-3.91 | FB 4.75             |
| 3.92-4.41                                      | 3.92-4.41 | FB 5.3              |
| 4.42-4.83                                      | 4.42-4.83 | FB 6.1              |
| 4.84-5.45                                      | 4.84-5.45 | FB 6.75             |
| 5.46-5.89                                      | 5.46-5.89 | FB 7.45             |
| 5.90-6.04                                      | 5.90-6.04 | FB 7.8              |
| 6.05-6.55                                      | 6.05-6.55 | FB 8.21             |
| 6.56-6.72                                      | 6.56-6.72 | FB 8.6              |
| 6.73-7.00                                      | 6.73-7.00 | FB 9.0              |
| 7.01-7.39                                      | 7.01-7.39 | FB 9.5              |
| 7.40-7.54                                      | 7.40-7.54 | FB 10.0             |
| 7.55-8.41                                      | 7.55-8.41 | FB 10.6             |
| 8.42-8.91                                      | 8.42-8.91 | FB 11.2             |
| 8.92-9.16                                      | 8.92-9.16 | FB 12.1             |
| 9.17-10.0                                      | 9.17-10.0 | FB 13.1             |
| 10.1-10.3                                      | 10.1-10.3 | FB 13.9             |
| 10.4-11.4                                      | 10.4-11.4 | FB 14.8             |
| 11.5-11.8                                      | 11.5-11.8 | FB 15.6             |
| 11.9-12.9                                      | 11.9-12.9 | FB 16.4             |
| 13.0-13.4                                      | —         | FB 17.6             |
| 13.5-14.2                                      | —         | FB 18.4             |
| 14.3-15.1                                      | —         | FB 19.4             |
| 15.2-18.0                                      | —         | FB 21.1             |
| Following Selections for Size M-1 & M-1P Only. |           |                     |
| —                                              | 11.5-11.8 | FB 15.6             |
| —                                              | 11.9-12.9 | FB 16.4             |
| —                                              | 13.0-13.4 | FB 17.6             |
| —                                              | 13.5-14.2 | FB 18.4             |
| —                                              | 14.3-15.1 | FB 19.4             |
| 15.2-17.1                                      | 15.2-17.1 | FB 21.1             |
| 17.2-18.0                                      | 17.2-18.0 | FB 22.6             |
| 18.1-18.9                                      | 18.1-18.9 | FB 23.6             |
| 19.0-19.7                                      | 19.0-19.7 | FB 24.8             |
| 19.8-20.9                                      | 19.8-20.9 | FB 26.7             |
| 21.0-21.9                                      | 21.0-21.9 | FB 28.3             |
| 22.0-23.1                                      | 22.0-23.1 | FB 29.6             |
| 23.2-24.3                                      | 23.2-24.3 | FB 30.5             |
| 24.4-25.5                                      | 24.4-25.5 | FB 32.6             |
| 25.6-26.0                                      | 25.6-26.0 | FB 34.1             |
| Following Selections for Size M-1P Only.       |           |                     |
| 26.1-26.8                                      | —         | FB 35.0             |
| 26.9-27.3                                      | —         | FB 36.6             |
| 27.4-28.7                                      | —         | FB 38.3             |
| 28.8-30.2                                      | —         | FB 40.2             |
| 30.3-31.9                                      | —         | FB 42.0             |
| 32.0-36.0                                      | —         | FB 44.0             |

**Thermal Unit Table 74**

(index and instructions: [page 16-132 to page 16-136](#))

| Motor FLC (A)                         |           | Thermal Unit Number |
|---------------------------------------|-----------|---------------------|
| 1 T. U.                               | 3 T. U.   |                     |
| 2.23-2.47                             | 2.23-2.47 | FB 3.33             |
| 2.48-2.76                             | 2.48-2.76 | FB 3.71             |
| 2.77-3.04                             | 2.77-3.04 | FB 4.1              |
| 3.05-3.24                             | 3.05-3.24 | FB 4.5              |
| 3.25-3.61                             | 3.25-3.61 | FB 4.75             |
| 3.62-4.19                             | 3.62-4.19 | FB 5.3              |
| 4.20-4.62                             | 4.20-4.62 | FB 6.1              |
| 4.63-5.14                             | 4.63-5.14 | FB 6.75             |
| 5.15-5.39                             | 5.15-5.39 | FB 7.45             |
| 5.40-5.69                             | 5.40-5.69 | FB 7.8              |
| 5.70-5.99                             | 5.70-5.99 | FB 8.21             |
| 6.00-6.29                             | 6.00-6.29 | FB 8.6              |
| 6.30-6.64                             | 6.30-6.64 | FB 9.0              |
| 6.65-6.99                             | 6.65-6.99 | FB 9.5              |
| 7.00-7.39                             | 7.00-7.39 | FB 10.0             |
| 7.40-7.79                             | 7.40-7.79 | FB 10.6             |
| 7.80-7.94                             | 7.80-7.94 | FB 11.2             |
| 7.95-8.49                             | 7.95-8.49 | FB 12.1             |
| 8.50-8.99                             | 8.50-8.99 | FB 13.1             |
| 9.00-9.59                             | 9.00-9.59 | FB 13.9             |
| 9.60-10.1                             | 9.60-10.1 | FB 14.8             |
| 10.2-10.6                             | 10.2-10.6 | FB 15.6             |
| 10.7-11.3                             | 10.7-11.3 | FB 16.4             |
| 11.4-12.0                             | 11.4-12.0 | FB 17.6             |
| 12.0-12.6                             | —         | FB 18.4             |
| 12.7-13.8                             | —         | FB 19.4             |
| 13.9-14.7                             | —         | FB 21.1             |
| 14.8-15.2                             | —         | FB 22.6             |
| 15.3-16.2                             | —         | FB 23.6             |
| 16.3-18.0                             | —         | FB 24.8             |
| Following Selections for Size 1 Only. |           |                     |
| —                                     | 12.0-12.6 | FB 18.4             |
| —                                     | 12.7-13.8 | FB 19.4             |
| 13.9-14.7                             | 13.9-14.7 | FB 21.1             |
| 14.8-15.2                             | 14.8-15.2 | FB 22.6             |
| 15.3-16.2                             | 15.3-16.2 | FB 23.6             |
| 16.3-17.4                             | 16.3-17.4 | FB 24.8             |
| 17.5-18.5                             | 17.5-18.5 | FB 26.7             |
| 18.6-19.6                             | 18.6-19.6 | FB 28.3             |
| 19.7-20.2                             | 19.7-20.2 | FB 29.6             |
| 20.3-21.5                             | 20.3-21.5 | FB 30.5             |
| 21.6-22.4                             | 21.6-22.4 | FB 32.6             |
| 22.5-23.2                             | 22.5-23.2 | FB 34.1             |
| 23.3-24.3                             | 23.3-24.3 | FB 35.0             |
| 24.4-25.4                             | 24.4-25.4 | FB 36.6             |
| 25.5-26.0                             | 25.5-26.0 | FB 38.3             |

**Thermal Unit Table 76**

(index and instructions: [page 16-132 to page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 19.9-20.8     | FB 26.7             |
| 20.9-22.2     | FB 28.3             |
| 22.3-23.8     | FB 29.6             |
| 23.9-25.4     | FB 30.5             |
| 25.5-27.2     | FB 32.6             |
| 27.3-29.2     | FB 34.1             |
| 29.3-31.9     | FB 38.3             |
| 32.0-33.8     | FB 40.2             |
| 33.9-36.1     | FB 42.0             |
| 36.2-38.5     | FB 44.0             |
| 38.6-41.4     | FB 46.0             |
| 41.5-43.6     | FB 48.0             |
| 43.7-45.9     | FB 50.5             |
| 46.0-48.2     | FB 52.5             |
| 48.3-50.7     | FB 55.5             |
| 50.8-53.9     | FB 58.0             |
| 54.0-56.7     | FB 60.0             |
| 56.8-60.8     | FB 63.5             |
| 60.9-67.6     | FB 69.0             |
| 67.7-73.6     | FB 77.0             |
| 73.7-82.9     | FB 84.0             |
| 83.0-86.0     | FB 92.0             |

**Thermal Unit Table 75**

(index and instructions: [page 16-132 to page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 3.22-3.57     | FB 4.75             |
| 3.58-4.14     | FB 5.3              |
| 4.15-4.56     | FB 6.1              |
| 4.57-5.10     | FB 6.75             |
| 5.11-5.39     | FB 7.45             |
| 5.40-5.64     | FB 7.8              |
| 5.65-5.96     | FB 8.21             |
| 5.97-6.25     | FB 8.6              |
| 6.26-6.58     | FB 9.0              |
| 6.59-6.91     | FB 9.5              |
| 6.92-7.41     | FB 10.0             |
| 7.42-7.82     | FB 10.6             |
| 7.83-8.32     | FB 11.2             |
| 8.33-8.89     | FB 12.1             |
| 8.90-9.47     | FB 13.1             |
| 9.48-10.0     | FB 13.9             |
| 10.1-10.5     | FB 14.8             |
| 10.6-11.1     | FB 15.6             |
| 11.2-12.0     | FB 16.4             |
| 12.1-12.7     | FB 17.6             |
| 12.8-13.5     | FB 18.4             |
| 13.6-14.6     | FB 19.4             |
| 14.7-15.7     | FB 21.1             |
| 15.8-16.5     | FB 22.6             |
| 16.6-17.4     | FB 23.6             |
| 17.5-18.8     | FB 24.8             |
| 18.9-20.1     | FB 26.7             |
| 20.2-21.0     | FB 28.3             |
| 21.1-21.6     | FB 29.6             |
| 21.7-23.3     | FB 30.5             |
| 23.4-24.3     | FB 32.6             |
| 24.4-25.0     | FB 34.1             |
| 25.1-26.3     | FB 35.0             |
| 26.4-27.6     | FB 36.6             |
| 27.7-29.1     | FB 38.3             |
| 29.2-30.4     | FB 40.2             |
| 30.5-32.0     | FB 42.0             |
| 32.1-33.3     | FB 44.0             |
| 33.4-35.2     | FB 46.0             |
| 35.3-37.0     | FB 48.0             |
| 37.1-38.5     | FB 50.5             |
| 38.6-40.7     | FB 52.5             |
| 40.8-45.0     | FB 55.5             |

**Thermal Unit Table 77**

(index and instructions: [page 16-132 to page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 48.0-50.9     | FB 50.5             |
| 51.0-53.7     | FB 52.5             |
| 53.8-57.0     | FB 55.5             |
| 57.1-60.4     | FB 58.0             |
| 60.5-64.0     | FB 60.0             |
| 64.1-71.9     | FB 63.5             |
| 72.0-83.9     | FB 69.0             |
| 84.0-93.1     | FB 77.0             |
| 93.2-104      | FB 84.0             |
| 105-109       | FB 92.0             |
| 110-123       | FB 105.0            |
| 124-133       | FB 115.0            |

Thermal Unit Table 78

(index and instructions: [page 16-132](#) to [page 16-136](#))

| Motor FLC (A)                         |                    | Thermal Unit Number |
|---------------------------------------|--------------------|---------------------|
| 1 T. U.                               | 2 T. U. or 3 T. U. |                     |
| 2.26–2.51                             | 2.26–2.51          | FB 3.33             |
| 2.52–2.82                             | 2.52–2.82          | FB 3.71             |
| 2.83–3.09                             | 2.83–3.09          | FB 4.1              |
| 3.10–3.30                             | 3.10–3.30          | FB 4.5              |
| 3.31–3.69                             | 3.31–3.69          | FB 4.75             |
| 3.70–4.27                             | 3.70–4.27          | FB 5.3              |
| 4.28–4.72                             | 4.28–4.72          | FB 6.1              |
| 4.73–5.25                             | 4.73–5.25          | FB 6.75             |
| 5.26–5.53                             | 5.26–5.53          | FB 7.45             |
| 5.54–5.81                             | 5.54–5.81          | FB 7.8              |
| 5.82–6.14                             | 5.82–6.14          | FB 8.21             |
| 6.15–6.44                             | 6.15–6.44          | FB 8.6              |
| 6.45–6.81                             | 6.45–6.81          | FB 9.0              |
| 6.82–7.19                             | 6.82–7.19          | FB 9.5              |
| 7.20–7.59                             | 7.20–7.59          | FB 10.0             |
| 7.60–7.99                             | 7.60–7.99          | FB 10.6             |
| 8.00–8.17                             | 8.00–8.17          | FB 11.2             |
| 8.18–8.74                             | 8.18–8.74          | FB 12.1             |
| 8.75–9.31                             | 8.75–9.31          | FB 13.1             |
| 9.32–9.94                             | 9.32–9.94          | FB 13.9             |
| 9.95–10.5                             | 9.95–10.5          | FB 14.8             |
| 10.6–11.1                             | 10.6–11.1          | FB 15.6             |
| 11.2–11.9                             | 11.2–12.0          | FB 16.4             |
| 12.0–12.4                             | —                  | FB 17.6             |
| 12.5–13.1                             | —                  | FB 18.4             |
| 13.2–14.3                             | —                  | FB 19.4             |
| 14.4–15.3                             | —                  | FB 21.1             |
| 15.4–15.9                             | —                  | FB 22.6             |
| 16.0–18.0                             | —                  | FB 23.6             |
| Following Selections for Size 1 Only. |                    |                     |
| —                                     | 12.0–12.4          | FB 17.6             |
| —                                     | 12.5–13.1          | FB 18.4             |
| —                                     | 13.2–14.3          | FB 19.4             |
| 14.4–15.3                             | 14.4–15.3          | FB 21.1             |
| 15.4–15.9                             | 15.4–15.9          | FB 22.6             |
| 16.0–16.9                             | 16.0–16.9          | FB 23.6             |
| 17.0–18.3                             | 17.0–18.3          | FB 24.8             |
| 18.4–19.5                             | 18.4–19.5          | FB 26.7             |
| 19.6–20.5                             | 19.6–20.5          | FB 28.3             |
| 20.6–21.1                             | 20.6–21.1          | FB 29.6             |
| 21.2–22.6                             | 21.2–22.6          | FB 30.5             |
| 22.7–23.7                             | 22.7–23.7          | FB 32.6             |
| 23.8–24.3                             | 23.8–24.3          | FB 35.0             |
| 24.4–26.0                             | 24.4–26.0          | FB 35.0             |

Thermal Unit Table 80

(index and instructions: [page 16-132](#) to [page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 20.5–21.7     | FB 26.7             |
| 21.8–23.1     | FB 28.3             |
| 23.2–24.8     | FB 29.6             |
| 24.9–26.5     | FB 30.5             |
| 26.6–28.4     | FB 32.6             |
| 28.5–30.4     | FB 34.1             |
| 30.5–32.8     | FB 38.3             |
| 32.9–34.9     | FB 40.2             |
| 35.0–37.3     | FB 42.0             |
| 37.4–39.8     | FB 44.0             |
| 39.9–42.5     | FB 46.0             |
| 42.6–45.8     | FB 48.0             |
| 45.9–48.2     | FB 50.5             |
| 48.3–50.6     | FB 52.5             |
| 50.7–53.1     | FB 55.5             |
| 53.2–56.5     | FB 58.0             |
| 56.6–59.4     | FB 60.0             |
| 59.5–63.4     | FB 63.5             |
| 63.5–71.0     | FB 69.0             |
| 71.1–78.8     | FB 77.0             |
| 78.9–86.0     | FB 84.0             |

Thermal Unit Table 79

(index and instructions: [page 16-132](#) to [page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 3.31–3.67     | FB 4.75             |
| 3.68–4.23     | FB 5.3              |
| 4.24–4.69     | FB 6.1              |
| 4.70–5.21     | FB 6.75             |
| 5.22–5.49     | FB 7.45             |
| 5.50–5.74     | FB 7.8              |
| 5.75–6.07     | FB 8.21             |
| 6.08–6.35     | FB 8.6              |
| 6.36–6.71     | FB 9.0              |
| 6.72–7.03     | FB 9.5              |
| 7.04–7.53     | FB 10.0             |
| 7.54–7.91     | FB 10.6             |
| 7.92–8.53     | FB 11.2             |
| 8.54–9.14     | FB 12.1             |
| 9.15–9.71     | FB 13.1             |
| 9.72–10.2     | FB 13.9             |
| 10.3–10.8     | FB 14.8             |
| 10.9–11.5     | FB 15.6             |
| 11.6–12.3     | FB 16.4             |
| 12.4–13.0     | FB 17.6             |
| 13.1–13.9     | FB 18.4             |
| 14.0–15.1     | FB 19.4             |
| 15.2–16.1     | FB 21.1             |
| 16.2–16.9     | FB 22.6             |
| 17.0–17.9     | FB 23.6             |
| 18.0–19.4     | FB 24.8             |
| 19.5–20.7     | FB 26.7             |
| 20.8–21.7     | FB 28.3             |
| 21.8–22.3     | FB 29.6             |
| 22.4–23.9     | FB 30.5             |
| 24.0–25.1     | FB 32.6             |
| 25.2–25.9     | FB 34.1             |
| 26.0–27.1     | FB 35.0             |
| 27.2–28.6     | FB 36.6             |
| 28.7–30.1     | FB 38.3             |
| 30.2–31.7     | FB 40.2             |
| 31.8–33.3     | FB 42.0             |
| 33.4–34.5     | FB 44.0             |
| 34.6–36.5     | FB 46.0             |
| 36.6–38.5     | FB 48.0             |
| 38.6–39.9     | FB 50.5             |
| 40.0–45.0     | FB 52.5             |

Thermal Unit Table 81

(index and instructions: [page 16-132](#) to [page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 52.2–55.6     | FB 50.5             |
| 55.7–58.8     | FB 52.5             |
| 58.9–62.5     | FB 55.5             |
| 62.6–66.0     | FB 58.0             |
| 66.1–70.1     | FB 60.0             |
| 70.2–78.6     | FB 63.5             |
| 78.7–92.0     | FB 69.0             |
| 92.1–102      | FB 77.0             |
| 103–114       | FB 84.0             |
| 115–123       | FB 92.0             |
| 124–133       | FB 105.0            |

**Thermal Unit Table 82**

(index and instructions: [page 16-132 to page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 2.36-2.63     | FB 3.33             |
| 2.64-2.96     | FB 3.71             |
| 2.97-3.23     | FB 4.1              |
| 3.24-3.45     | FB 4.5              |
| 3.46-3.86     | FB 4.75             |
| 3.87-4.44     | FB 5.3              |
| 4.45-4.95     | FB 6.1              |
| 4.96-5.47     | FB 6.75             |
| 5.48-5.75     | FB 7.45             |
| 5.76-6.09     | FB 7.8              |
| 6.10-6.42     | FB 8.21             |
| 6.43-6.75     | FB 8.6              |
| 6.76-7.16     | FB 9.0              |
| 7.17-7.43     | FB 9.5              |
| 7.44-7.99     | FB 10.0             |
| 8.00-8.46     | FB 10.6             |
| 8.47-9.19     | FB 11.2             |
| 9.20-9.74     | FB 12.1             |
| 9.75-10.3     | FB 13.1             |
| 10.4-10.8     | FB 13.9             |
| 10.9-11.6     | FB 14.8             |
| 11.7-12.2     | FB 15.6             |
| 12.3-13.1     | FB 16.4             |
| 13.2-13.7     | FB 17.6             |
| 13.8-14.3     | FB 18.4             |
| 14.4-15.5     | FB 19.4             |
| 15.6-16.7     | FB 21.1             |
| 16.8-17.6     | FB 22.6             |
| 17.7-18.6     | FB 23.6             |
| 18.7-19.9     | FB 24.8             |
| 20.0-21.1     | FB 26.7             |
| 21.2-25.0     | FB 105.0            |

**Thermal Unit Table 84**

(index and instructions: [page 16-132 to page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 3.38-3.78     | FB 4.75             |
| 3.79-4.37     | FB 5.3              |
| 4.38-4.87     | FB 6.1              |
| 4.88-5.51     | FB 6.75             |
| 5.52-5.73     | FB 7.45             |
| 5.74-6.09     | FB 7.8              |
| 6.10-6.44     | FB 8.21             |
| 6.45-6.75     | FB 8.6              |
| 6.76-7.15     | FB 9.0              |
| 7.16-7.57     | FB 9.5              |
| 7.58-8.07     | FB 10.0             |
| 8.08-8.47     | FB 10.6             |
| 8.48-8.81     | FB 11.2             |
| 8.82-9.46     | FB 12.1             |
| 9.47-10.1     | FB 13.1             |
| 10.2-10.8     | FB 13.9             |
| 10.9-11.4     | FB 14.8             |
| 11.5-12.1     | FB 15.6             |
| 12.2-13.1     | FB 16.4             |
| 13.2-13.8     | FB 17.6             |
| 13.9-14.8     | FB 18.4             |
| 14.9-16.1     | FB 19.4             |
| 16.2-17.4     | FB 21.1             |
| 17.5-18.3     | FB 22.6             |
| 18.4-19.5     | FB 23.6             |
| 19.6-21.0     | FB 24.8             |
| 21.1-22.5     | FB 26.7             |
| 22.6-23.7     | FB 28.3             |
| 23.8-24.5     | FB 29.6             |
| 24.6-26.4     | FB 30.5             |
| 26.5-27.7     | FB 32.6             |
| 27.8-28.7     | FB 34.1             |
| 28.8-29.9     | FB 35.0             |
| 30.0-31.8     | FB 36.6             |
| 31.9-33.5     | FB 38.3             |
| 33.6-35.1     | FB 40.2             |
| 35.2-37.1     | FB 42.0             |
| 37.2-38.8     | FB 44.0             |
| 38.9-41.1     | FB 46.0             |
| 41.2-45.0     | FB 48.0             |

**Thermal Unit Table 83**

(index and instructions: [page 16-132 to page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 2.30-2.60     | FB 3.33             |
| 2.61-2.87     | FB 3.71             |
| 2.88-3.17     | FB 4.1              |
| 3.18-3.37     | FB 4.5              |
| 3.38-3.76     | FB 4.75             |
| 3.77-4.29     | FB 5.3              |
| 4.30-4.75     | FB 6.1              |
| 4.76-5.26     | FB 6.75             |
| 5.27-5.51     | FB 7.45             |
| 5.52-5.78     | FB 7.8              |
| 5.79-6.13     | FB 8.21             |
| 6.14-6.41     | FB 8.6              |
| 6.42-6.75     | FB 9.0              |
| 6.76-7.09     | FB 9.5              |
| 7.10-7.57     | FB 10.0             |
| 7.58-7.90     | FB 10.6             |
| 7.91-8.81     | FB 11.2             |
| 8.82-9.47     | FB 12.1             |
| 9.48-10.0     | FB 13.1             |
| 10.1-10.7     | FB 13.9             |
| 10.8-11.4     | FB 14.8             |
| 11.5-12.1     | FB 15.6             |
| 12.2-13.1     | FB 16.4             |
| 13.2-13.7     | FB 17.6             |
| 13.8-14.7     | FB 18.4             |
| 14.8-16.0     | FB 19.4             |
| 16.1-17.3     | FB 21.1             |
| 17.4-18.2     | FB 22.6             |
| 18.3-19.4     | FB 23.6             |
| 19.5-20.7     | FB 24.8             |
| 20.8-22.3     | FB 26.7             |
| 22.4-23.5     | FB 28.3             |
| 23.6-24.2     | FB 29.6             |
| 24.3-26.0     | FB 30.5             |

**Thermal Unit Table 85**

(index and instructions: [page 16-132 to page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 42.9-45.4     | FB 44.0             |
| 45.6-48.3     | FB 46.0             |
| 48.4-52.4     | FB 48.0             |
| 52.5-55.9     | FB 50.5             |
| 56.0-59.8     | FB 52.5             |
| 59.9-63.8     | FB 55.5             |
| 63.9-67.9     | FB 58.0             |
| 68.0-72.6     | FB 60.0             |
| 72.7-83.2     | FB 63.5             |
| 83.3-94.7     | FB 69.0             |
| 94.8-105      | FB 77.0             |
| 106-116       | FB 84.0             |
| 117-121       | FB 92.0             |
| 122-133       | FB 105.0            |

Thermal Unit Table 86

(index and instructions: [page 16-132](#) to [page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 0.43-0.44     | A .49               |
| 0.45-0.47     | A .54               |
| 0.48-0.53     | A .59               |
| 0.54-0.61     | A .65               |
| 0.62-0.65     | A .71               |
| 0.66-0.71     | A .78               |
| 0.72-0.79     | A .86               |
| 0.80-0.86     | A .95               |
| 0.87-0.96     | A 1.02              |
| 0.97-1.04     | A 1.16              |
| 1.05-1.17     | A 1.25              |
| 1.18-1.31     | A 1.39              |
| 1.32-1.38     | A 1.54              |
| 1.39-1.47     | A 1.63              |
| 1.48-1.57     | A 1.75              |
| 1.58-1.65     | A 1.86              |
| 1.66-1.77     | A 1.99              |
| 1.78-1.93     | A 2.15              |
| 1.94-2.18     | A 2.31              |
| 2.19-2.46     | A 2.57              |
| 2.47-2.68     | A 2.81              |
| 2.69-2.87     | A 3.61              |
| 2.88-3.07     | A 3.95              |
| 3.08-3.59     | A 4.32              |
| 3.60-3.79     | A 4.79              |
| 3.80-4.27     | A 5.30              |
| 4.28-4.59     | A 5.78              |
| 4.60-4.90     | A 6.20              |
| 4.91-5.06     | A 6.99              |
| 5.07-5.44     | A 7.65              |
| 5.45-6.24     | A 8.38              |
| 6.25-7.21     | A 9.25              |
| 7.22-7.69     | A 9.85              |
| 7.70-8.24     | A 11.0              |
| 8.25-8.81     | A 11.9              |
| 8.82-9.32     | A 13.2              |
| 9.33-9.99     | A 14.1              |
| 10.0-10.5     | A 14.8              |
| 10.6-11.5     | A 16.2              |
| 11.6-12.2     | A 17.9              |
| 12.3-13.3     | A 21.3              |
| 13.4-15.8     | A 25.2              |
| 15.9-18.4     | A 27.1              |
| 18.5-20.5     | A 29.5              |
| 20.6-21.5     | A 31.9              |
| 21.6-23.9     | A 33.8              |
| 24.0-26.8     | A 35.9              |
| 26.9-28.2     | A 40.0              |
| 28.3-29.8     | A 42.3              |
| 29.9-32.0     | A 44.7              |

Thermal Unit Table 88

(index and instructions: [page 16-132](#) to [page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 0.39-0.40     | A .49               |
| 0.41-0.44     | A .54               |
| 0.45-0.49     | A .59               |
| 0.50-0.57     | A .65               |
| 0.58-0.61     | A .71               |
| 0.62-0.66     | A .78               |
| 0.67-0.73     | A .86               |
| 0.74-0.80     | A .95               |
| 0.81-0.90     | A 1.02              |
| 0.91-0.97     | A 1.16              |
| 0.98-1.09     | A 1.25              |
| 1.10-1.23     | A 1.39              |
| 1.24-1.57     | A 1.86              |
| 1.58-1.66     | A 1.99              |
| 1.67-1.79     | A 2.15              |
| 1.80-1.99     | A 2.31              |
| 2.00-2.31     | A 2.57              |
| 2.32-2.50     | A 2.81              |
| 2.51-2.66     | A 3.61              |
| 2.67-2.85     | A 3.95              |
| 2.86-3.26     | A 4.32              |
| 3.27-3.49     | A 4.79              |
| 3.50-3.92     | A 5.30              |
| 3.93-4.20     | A 5.78              |
| 4.21-4.49     | A 6.20              |
| 4.50-4.64     | A 6.99              |
| 4.65-4.94     | A 7.65              |
| 4.95-5.62     | A 8.38              |
| 5.63-6.39     | A 9.25              |
| 6.40-6.82     | A 9.85              |
| 6.83-7.27     | A 11.0              |
| 7.28-7.71     | A 11.9              |
| 7.72-8.13     | A 13.2              |
| 8.14-8.64     | A 14.1              |
| 8.65-9.15     | A 14.8              |
| 9.16-9.97     | A 16.2              |
| 9.98-11.0     | A 17.9              |

Thermal Unit Table 87

(index and instructions: [page 16-132](#) to [page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 0.40-0.41     | A .49               |
| 0.42-0.45     | A .54               |
| 0.46-0.51     | A .59               |
| 0.52-0.58     | A .65               |
| 0.59-0.63     | A .71               |
| 0.64-0.68     | A .78               |
| 0.69-0.76     | A .86               |
| 0.77-0.83     | A .95               |
| 0.84-0.93     | A 1.02              |
| 0.94-1.01     | A 1.16              |
| 1.02-1.14     | A 1.25              |
| 1.15-1.28     | A 1.39              |
| 1.29-1.34     | A 1.54              |
| 1.35-1.44     | A 1.63              |
| 1.45-1.55     | A 1.75              |
| 1.56-1.61     | A 1.86              |
| 1.62-1.71     | A 1.99              |
| 1.72-1.85     | A 2.15              |
| 1.86-2.04     | A 2.31              |
| 2.05-2.38     | A 2.57              |
| 2.39-2.60     | A 2.81              |
| 2.61-2.77     | A 3.61              |
| 2.78-2.98     | A 3.95              |
| 2.99-3.40     | A 4.32              |
| 3.41-3.64     | A 4.79              |
| 3.65-4.08     | A 5.30              |
| 4.09-4.38     | A 5.78              |
| 4.39-4.68     | A 6.20              |
| 4.69-4.79     | A 6.99              |
| 4.80-5.11     | A 7.65              |
| 5.12-5.84     | A 8.38              |
| 5.85-6.70     | A 9.25              |
| 6.71-7.18     | A 9.85              |
| 7.19-7.70     | A 11.0              |
| 7.71-8.14     | A 11.9              |
| 8.15-8.56     | A 13.2              |
| 8.57-9.15     | A 14.1              |
| 9.16-9.80     | A 14.8              |
| 9.81-10.6     | A 16.2              |
| 10.7-11.0     | A 17.9              |

Thermal Unit Table 89

(index and instructions: [page 16-132](#) to [page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 10.0-11.1     | B 17.5              |
| 11.2-12.0     | B 19.5              |
| 12.1-13.3     | B 22.0              |
| 13.4-15.1     | B 25.0              |
| 15.2-17.1     | B 28.0              |
| 17.2-18.6     | B 32.0              |
| 18.7-21.4     | B 36.0              |
| 21.5-25.7     | B 40.0              |
| 25.8-28.2     | B 45.0              |
| 28.3-29.7     | B 50.0              |
| 29.8-31.2     | B 56.0              |
| 31.3-32.1     | B 62.0              |
| 32.2-35.7     | B 70.0              |
| 35.8-40.7     | B 79.0              |
| 40.8-48.0     | B 88.0              |

Thermal Unit Table 90

(index and instructions: [page 16-132](#) to [page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 4.88-5.13     | A 7.65              |
| 5.14-5.85     | A 8.38              |
| 5.86-6.67     | A 9.25              |
| 6.68-7.09     | A 9.85              |
| 7.10-7.62     | A 11.0              |
| 7.63-8.04     | A 11.9              |
| 8.05-8.46     | A 13.2              |
| 8.47-9.11     | A 14.1              |
| 9.12-9.69     | A 14.8              |
| 9.70-10.5     | A 16.2              |
| 10.6-11.6     | A 17.9              |
| 11.7-12.3     | A 21.3              |
| 12.4-14.6     | A 25.2              |
| 14.7-16.8     | A 27.1              |
| 16.9-17.9     | A 29.5              |
| 18.0-18.7     | A 31.9              |
| 18.8-19.8     | A 33.8              |
| 19.9-21.4     | A 35.9              |
| 21.5-22.8     | A 40.0              |
| 22.9-23.8     | A 42.3              |
| 23.9-26.0     | A 44.7              |

**Thermal Unit Table 91**

(index and instructions: [page 16-132 to page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 4.80-5.07     | A 7.65              |
| 5.08-5.73     | A 8.38              |
| 5.74-6.48     | A 9.25              |
| 6.49-6.90     | A 9.85              |
| 6.91-7.25     | A 11.0              |
| 7.26-7.81     | A 11.9              |
| 7.82-8.29     | A 13.2              |
| 8.30-8.81     | A 14.1              |
| 8.82-9.40     | A 14.8              |
| 9.41-10.0     | A 16.2              |
| 10.1-11.1     | A 17.9              |
| 11.2-11.7     | A 21.3              |
| 11.8-13.7     | A 25.2              |
| 13.8-16.0     | A 27.1              |
| 16.1-16.9     | A 29.5              |
| 17.0-17.7     | A 31.9              |
| 17.8-18.7     | A 33.8              |
| 18.8-20.2     | A 35.9              |
| 20.3-21.4     | A 40.0              |
| 21.5-22.5     | A 42.3              |
| 22.6-23.8     | A 44.7              |
| 23.9-26.0     | A 48.0              |

**Thermal Unit Table 93**

(index and instructions: [page 16-132 to page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 23.8-25.2     | CC 36.4             |
| 25.3-26.8     | CC 39.6             |
| 26.9-28.4     | CC 42.7             |
| 28.5-30.3     | CC 46.6             |
| 30.4-32.1     | CC 50.1             |
| 32.2-34.2     | CC 54.5             |
| 34.3-36.3     | CC 59.4             |
| 36.4-40.2     | CC 64.3             |
| 40.3-43.1     | CC 68.5             |
| 43.2-45.9     | CC 74.6             |
| 46.0-49.2     | CC 81.5             |
| 49.3-51.6     | CC 87.7             |
| 51.7-54.2     | CC 94.0             |
| 54.3-55.7     | CC 103.0            |
| 55.8-60.3     | CC 112.0            |
| 60.4-63.5     | CC 121.0            |
| 63.6-67.1     | CC 132.0            |
| 67.2-70.3     | CC 143.0            |
| 70.4-74.1     | CC 156.0            |
| 74.2-78.3     | CC 167.0            |
| 78.4-83.3     | CC 180.0            |
| 83.4-86.0     | CC 196.0            |

**Thermal Unit Table 95**

(index and instructions: [page 16-132 to page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 42.5-44.7     | CC 64.3             |
| 44.8-47.9     | CC 68.5             |
| 48.0-51.2     | CC 74.6             |
| 51.3-55.2     | CC 81.5             |
| 55.3-59.4     | CC 87.7             |
| 59.5-63.8     | CC 94.0             |
| 63.9-68.8     | CC 103.0            |
| 68.9-73.8     | CC 112.0            |
| 73.9-77.7     | CC 121.0            |
| 77.8-82.5     | CC 132.0            |
| 82.6-86.6     | CC 143.0            |
| 86.7-91.9     | CC 156.0            |
| 92.0-97.2     | CC 167.0            |
| 97.3-104      | CC 180.0            |
| 105-114       | CC 196.0            |
| 115-123       | CC 208.0            |
| 124-150       | CC 219.0            |

**Thermal Unit Table 92**

(index and instructions: [page 16-132 to page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 10.5-11.7     | B 17.5              |
| 11.8-12.5     | B 19.5              |
| 12.6-14.0     | B 22.0              |
| 14.1-15.8     | B 25.0              |
| 15.9-18.0     | B 28.0              |
| 18.1-19.6     | B 32.0              |
| 19.7-23.5     | B 36.0              |
| 23.6-27.4     | B 40.0              |
| 27.5-30.5     | B 45.0              |
| 30.6-32.2     | B 50.0              |
| 32.3-34.0     | B 56.0              |
| 34.1-35.2     | B 62.0              |
| 35.3-39.5     | B 70.0              |
| 39.6-43.9     | B 79.0              |
| 44.0-48.0     | B 88.0              |

**Thermal Unit Table 94**

(index and instructions: [page 16-132 to page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 25.8-27.5     | CC 36.4             |
| 27.6-29.4     | CC 39.6             |
| 29.5-31.4     | CC 42.7             |
| 31.5-33.2     | CC 46.6             |
| 33.3-36.2     | CC 50.1             |
| 36.3-38.8     | CC 54.5             |
| 38.9-41.6     | CC 59.4             |
| 41.7-44.7     | CC 64.3             |
| 44.8-47.9     | CC 68.5             |
| 48.0-50.9     | CC 74.6             |
| 51.0-54.4     | CC 81.5             |
| 54.5-57.4     | CC 87.7             |
| 57.5-60.6     | CC 94.0             |
| 60.7-63.9     | CC 103.0            |
| 64.0-68.4     | CC 112.0            |
| 68.5-73.4     | CC 121.0            |
| 73.5-78.7     | CC 132.0            |
| 78.8-83.8     | CC 143.0            |
| 83.9-86.0     | CC 156.0            |

**Thermal Unit Table 96**

(index and instructions: [page 16-132 to page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 49.5-52.0     | CC 64.3             |
| 52.1-54.8     | CC 68.5             |
| 54.9-58.7     | CC 74.6             |
| 58.8-63.3     | CC 81.5             |
| 63.4-68.3     | CC 87.7             |
| 68.4-73.6     | CC 94.0             |
| 73.7-79.4     | CC 103.0            |
| 79.5-85.5     | CC 112.0            |
| 85.6-89.7     | CC 121.0            |
| 89.8-94.8     | CC 132.0            |
| 94.9-99.9     | CC 143.0            |
| 100-105       | CC 156.0            |
| 106-111       | CC 167.0            |
| 112-126       | CC 180.0            |
| 127-131       | CC 196.0            |
| 132-141       | CC 208.0            |
| 142-150       | CC 219.0            |



Thermal Unit Table 103

(index and instructions: [page 16-132](#) to [page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 40.8–45.5     | B 1.03              |
| 45.6–49.9     | B 1.16              |
| 51.0–57.5     | B 1.30              |
| 57.6–65.9     | B 1.45              |
| 66.0–73.1     | B 1.67              |
| 73.2–81.5     | B 1.88              |
| 81.6–92.3     | B 2.10              |
| 92.4–104      | B 2.40              |
| 105–114       | B 2.65              |
| 115–128       | B 3.00              |
| 129–140       | B 3.30              |
| 141–160       | B 3.70              |
| 161–193       | B 4.15              |
| 194–209       | B 4.85              |
| 210–232       | B 5.50              |
| 233–248       | B 6.25              |
| 249–266       | B 6.90              |

Thermal Unit Table 104

(index and instructions: [page 16-132](#) to [page 16-136](#))

| Motor FLC (A) | Thermal Unit Number | Max. Fuse Rating (A)  |
|---------------|---------------------|-----------------------|
| 0.65–0.73     | B 1.03              | 1.50                  |
| 0.74–0.82     | B 1.16              | 1.50                  |
| 0.93–0.91     | B 1.30              | 1.60                  |
| 0.92–1.04     | B 1.45              | 2.00                  |
| 1.05–1.16     | B 1.67              | 2.00                  |
| 1.17–1.26     | B 1.88              | 2.25                  |
| 1.27–1.47     | B 2.10              | 2.60                  |
| 1.48–1.65     | B 2.40              | 3.00                  |
| 1.66–1.89     | B 2.65              | 3.50                  |
| 1.90–2.17     | B 3.00              | 4.00                  |
| 2.18–2.49     | B 3.30              | 4.50                  |
| 2.50–2.79     | B 3.70              | 5.00                  |
| 2.80–3.13     | B 4.15              | 5.60                  |
| 3.14–3.36     | B 4.85              | 6.00                  |
| 3.37–3.69     | B 5.50              | 7.00                  |
| 3.70–3.92     | B 6.25              | 7.00                  |
| 3.93–4.42     | B 6.90              | 8.00                  |
| 4.43–4.99     | B 7.70              | 9.00                  |
| 5.00–5.27     | B 8.20              | 10.0                  |
| 5.28–5.84     | B 9.10              | 12.0                  |
| 5.85–6.61     | B 10.2              | 12.0                  |
| 6.62–7.42     | B 11.5              | 15.0                  |
| 7.43–8.02     | B 12.8              | 15.0                  |
| 8.03–8.53     | B 14.0              | 15.0                  |
| 8.54–9.34     | B 15.5              | 17.5                  |
| 9.35–10.1     | B 17.5              | 17.5                  |
| 10.2–10.8     | B 19.5              | 20.0                  |
| 10.9–12.0     | B 22.0              | 25.0                  |
| 12.1–13.0     | B 25.0              | 25.0                  |
| 13.1–15.5     | B 28.0              | 30.0                  |
|               |                     | 600 V Max. 250 V Max. |
| 15.6–17.9     | B 32.0              | 30 30                 |
| 18.0–21.4     | B 36.0              | 30 40                 |
| 21.5–25.1     | B 40.0              | 30 40                 |
| 25.2–27.0     | B 45.0              | 30 40                 |

Thermal Unit Table 105

(index and instructions: [page 16-132](#) to [page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 105–112       | CC 74.6             |
| 113–122       | CC 81.5             |
| 123–131       | CC 87.7             |
| 132–142       | CC 94.0             |
| 143–153       | CC 103.0            |
| 154–157       | CC 112.0            |
| 158–169       | CC 121.0            |
| 170–181       | CC 132.0            |
| 182–195       | CC 143.0            |
| 196–209       | CC 156.0            |
| 210–227       | CC 167.0            |
| 228–247       | CC 180.0            |
| 248–266       | CC 196.0            |

Thermal Unit Table 109

(index and instructions: [page 16-132](#) to [page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 0.56–0.63     | B 0.81              |
| 0.64–0.68     | B 0.92              |
| 0.69–0.77     | B 1.03              |
| 0.78–0.85     | B 1.16              |
| 0.86–0.97     | B 1.30              |
| 0.98–1.09     | B 1.45              |
| 1.10–1.21     | B 1.67              |
| 1.22–1.33     | B 1.88              |
| 1.34–1.53     | B 2.10              |
| 1.54–1.73     | B 2.40              |
| 1.74–1.89     | B 2.65              |
| 1.90–2.17     | B 3.00              |
| 2.18–2.53     | B 3.30              |
| 2.54–2.87     | B 3.70              |
| 2.88–3.22     | B 4.15              |
| 3.23–3.49     | B 4.85              |
| 3.50–3.85     | B 5.50              |
| 3.86–4.11     | B 6.25              |
| 4.12–4.70     | B 6.90              |
| 4.71–5.21     | B 7.70              |
| 5.22–5.53     | B 8.20              |
| 5.54–6.17     | B 9.10              |
| 6.18–7.02     | B 10.2              |
| 7.03–7.92     | B 11.5              |
| 7.93–8.61     | B 12.8              |
| 8.62–9.17     | B 14.0              |
| 9.18–10.0     | B 15.5              |
| 10.1–11.0     | B 17.5              |
| 11.1–11.8     | B 19.5              |
| 11.9–13.5     | B 22.0              |
| 13.6–15.3     | B 25.0              |
| 15.4–17.4     | B 28.0              |
| 17.5–19.4     | B 32.0              |
| 19.5–22.2     | B 36.0              |
| 22.3–25.1     | B 40.0              |
| 25.2–27.0     | B 45.0              |

**Thermal Unit Table 110**

(index and instructions: [page 16-132 to page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 3.94–4.45     | B 6.90              |
| 4.46–4.97     | B 7.70              |
| 4.98–5.28     | B 8.20              |
| 5.29–5.97     | B 9.10              |
| 5.98–6.89     | B 10.2              |
| 6.90–7.92     | B 11.5              |
| 7.93–8.71     | B 12.8              |
| 8.72–9.27     | B 14.0              |
| 9.28–10.2     | B 15.5              |
| 10.3–11.4     | B 17.5              |
| 11.5–12.3     | B 19.5              |
| 12.4–13.9     | B 22.0              |
| 14.0–15.8     | B 25.0              |
| 15.9–17.9     | B 28.0              |
| 18.0–19.9     | B 32.0              |
| 20.0–22.8     | B 36.0              |
| 22.9–25.4     | B 40.0              |
| 25.5–28.9     | B 45.0              |
| 29.0–30.8     | B 50.0              |
| 30.9–32.5     | B 56.0              |
| 32.6–34.9     | B 62.0              |
| 35.0–39.7     | B 70.0              |
| 39.8–44.7     | B 79.0              |

**Thermal Unit Table 112**

(index and instructions: [page 16-132 to page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 44.0–46.8     | CC 64.3             |
| 46.9–50.6     | CC 68.5             |
| 50.7–54.5     | CC 74.6             |
| 54.6–58.4     | CC 81.5             |
| 58.5–62.9     | CC 87.7             |
| 63.0–67.7     | CC 94.0             |
| 67.8–72.9     | CC 103.0            |
| 73.0–78.1     | CC 112.0            |
| 78.2–83.9     | CC 121.0            |
| 84.0–91.1     | CC 132.0            |
| 91.2–97.5     | CC 143.0            |
| 97.6–104      | CC 156.0            |
| 105–113       | CC 167.0            |
| 114–133       | CC 180.0            |

**Thermal Unit Table 114**

(index and instructions: [page 16-132 to page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 133–148       | B 1.30              |
| 149–174       | B 1.45              |
| 175–195       | B 1.67              |
| 196–219       | B 1.88              |
| 220–239       | B 2.10              |
| 240–271       | B 2.40              |
| 272–308       | B 2.65              |
| 309–348       | B 3.00              |
| 349–397       | B 3.30              |
| 398–429       | B 3.70              |
| 430–495       | B 4.15              |
| 496–520       | B 4.85              |

**Thermal Unit Table 116**

(index and instructions: [page 16-132 to page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 81.6–91.1     | B 1.03              |
| 91.2–101      | B 1.16              |
| 102–115       | B 1.30              |
| 116–131       | B 1.45              |
| 132–146       | B 1.67              |
| 147–163       | B 1.88              |
| 164–184       | B 2.10              |
| 185–209       | B 2.40              |
| 210–229       | B 2.65              |
| 230–257       | B 3.00              |
| 258–281       | B 3.30              |
| 282–321       | B 3.70              |
| 322–387       | B 4.15              |
| 388–419       | B 4.35              |
| 420–465       | B 5.60              |
| 466–497       | B 6.25              |
| 498–532       | B 6.90              |

**Thermal Unit Table 111**

(index and instructions: [page 16-132 to page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 14.0–14.9     | CC 20.9             |
| 15.0–16.2     | CC 22.8             |
| 16.3–17.2     | CC 24.6             |
| 17.3–18.7     | CC 26.3             |
| 18.8–20.2     | CC 28.8             |
| 20.3–21.7     | CC 31.0             |
| 21.8–23.3     | CC 33.3             |
| 23.4–25.2     | CC 36.4             |
| 25.3–27.1     | CC 39.6             |
| 27.2–29.4     | CC 42.7             |
| 29.5–31.6     | CC 46.6             |
| 31.7–34.0     | CC 50.1             |
| 34.1–36.8     | CC 54.5             |
| 36.9–39.8     | CC 59.4             |
| 39.9–42.3     | CC 64.3             |
| 42.4–45.7     | CC 68.5             |
| 45.8–49.2     | CC 74.6             |
| 49.3–52.8     | CC 81.5             |
| 52.9–56.8     | CC 87.7             |
| 56.9–61.2     | CC 94.0             |
| 61.3–66.1     | CC 103.0            |
| 66.2–71.2     | CC 112.0            |
| 71.3–76.7     | CC 121.0            |
| 76.8–82.9     | CC 132.0            |
| 83.0–90.0     | CC 143.0            |

**Thermal Unit Table 113**

(index and instructions: [page 16-132 to page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 88.2–95.1     | DD 112.0            |
| 95.2–101      | DD 121.0            |
| 102–111       | DD 128.0            |
| 112–119       | DD 140.0            |
| 120–131       | DD 150.0            |
| 132–149       | DD 160.0            |
| 150–170       | DD 185.0            |
| 171–180       | DD 220.0            |
| 181–197       | DD 240.0            |
| 198–204       | DD 250.0            |
| 205–213       | DD 265.0            |
| 214–237       | DD 280.0            |
| 238–243       | DD 300.0            |
| 244–266       | DD 320.0            |

**Thermal Unit Table 115**

(index and instructions: [page 16-132 to page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 176–190       | DD 112.0            |
| 191–203       | DD 121.0            |
| 203–223       | DD 128.0            |
| 224–239       | DD 140.0            |
| 240–253       | DD 150.0            |
| 254–299       | DD 160.0            |
| 300–341       | DD 185.0            |
| 342–361       | DD 220.0            |
| 362–395       | DD 240.0            |
| 396–409       | DD 250.0            |
| 410–427       | DD 265.0            |
| 428–475       | DD 289.0            |
| 476–487       | DD 300.0            |
| 488–532       | DD 320.0            |

Thermal Unit Table 127

(index and instructions: [page 16-132 to page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 1.12-1.27     | B 0.81              |
| 1.28-1.37     | B 0.92              |
| 1.38-1.55     | B 1.03              |
| 1.56-1.71     | B 1.16              |
| 1.72-1.95     | B 1.30              |
| 1.96-2.19     | B 1.45              |
| 2.20-2.43     | B 1.67              |
| 2.44-2.67     | B 1.88              |
| 2.68-3.07     | B 2.10              |
| 3.08-3.47     | B 2.40              |
| 3.48-3.79     | B 2.65              |
| 3.80-4.35     | B 3.00              |
| 4.36-5.07     | B 3.30              |
| 5.08-5.75     | B 3.70              |
| 5.76-6.45     | B 4.15              |
| 6.46-6.99     | B 4.85              |
| 7.00-7.71     | B 5.50              |
| 7.72-8.23     | B 6.25              |
| 8.24-9.41     | B 6.90              |
| 9.42-10.43    | B 7.70              |
| 10.44-11.07   | B 8.20              |
| 11.08-12.35   | B 9.10              |
| 12.36-14.05   | B 10.2              |
| 14.06-15.85   | B 11.5              |
| 15.86-17.23   | B 12.8              |
| 17.24-18.35   | B 14.0              |
| 18.36-20.1    | B 15.5              |
| 20.2-22.1     | B 17.5              |
| 22.2-23.7     | B 19.5              |
| 23.8-27.1     | B 22.0              |
| 27.2-30.7     | B 25.0              |
| 30.8-34.9     | B 28.0              |
| 35.0-38.9     | B 32.0              |
| 39.0-44.5     | B 36.0              |
| 44.6-50.3     | B 40.0              |
| 50.4-54.0     | B 45.0              |

Thermal Unit Table 129

(index and instructions: [page 16-132 to page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 28.0-29.9     | CC 20.9             |
| 30.0-32.5     | CC 22.8             |
| 32.6-34.5     | CC 24.6             |
| 34.6-37.5     | CC 26.3             |
| 37.6-40.5     | CC 28.8             |
| 40.6-43.5     | CC 31.0             |
| 43.6-46.7     | CC 33.3             |
| 46.8-50.5     | CC 36.4             |
| 50.6-54.3     | CC 39.6             |
| 54.4-58.9     | CC 42.7             |
| 59.0-63.3     | CC 46.6             |
| 63.4-68.1     | CC 50.1             |
| 68.2-73.7     | CC 54.5             |
| 73.8-79.7     | CC 59.4             |
| 79.8-84.7     | CC 64.5             |
| 84.8-91.5     | CC 68.5             |
| 91.6-98.5     | CC 74.6             |
| 98.6-105.7    | CC 81.5             |
| 105.8-113.7   | CC 87.7             |
| 113.8-122.5   | CC 94.0             |
| 122.6-132.3   | CC 103.0            |
| 132.4-142.5   | CC 112.0            |
| 142.6-153.5   | CC 121.0            |
| 153.6-165.9   | CC 132.0            |
| 166.0-180.0   | CC 143.0            |

Thermal Unit Table 134

(index and instructions: [page 16-132 to page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 4.30-4.98     | B 6.90              |
| 4.99-5.57     | B 7.70              |
| 5.58-5.94     | B 8.20              |
| 5.95-6.71     | B 9.10              |
| 6.72-7.79     | B 10.2              |
| 7.80-8.93     | B 11.5              |
| 8.94-9.77     | B 12.8              |
| 9.78-10.5     | B 14.0              |
| 10.6-11.7     | B 15.5              |
| 11.8-13.0     | B 17.5              |
| 13.1-14.0     | B 19.5              |
| 14.1-15.0     | B 22.0              |
| 15.1-17.2     | B 25.0              |
| 17.3-19.9     | B 28.0              |
| 20.0-22.3     | B 32.0              |
| 22.4-26.0     | B 36.0              |
| 26.1-29.8     | B 40.0              |
| 29.9-34.0     | B 45.0              |
| 34.1-36.7     | B 50.0              |
| 36.8-39.5     | B 56.0              |
| 39.6-42.1     | B 62.0              |
| 42.2-46.6     | B 70.0              |
| 46.7-51.5     | B 79.0              |
| 51.6-54.0     | B 88.0              |

Thermal Unit Table 128

(index and instructions: [page 16-132 to page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 7.88-8.91     | B 6.90              |
| 8.92-9.95     | B 7.70              |
| 9.96-10.57    | B 8.20              |
| 10.58-11.95   | B 9.10              |
| 11.96-13.79   | B 10.2              |
| 13.80-15.85   | B 11.5              |
| 15.86-17.43   | B 12.8              |
| 17.44-18.55   | B 14.0              |
| 18.56-20.5    | B 15.5              |
| 20.6-22.9     | B 17.5              |
| 23.0-24.7     | B 19.5              |
| 24.8-27.9     | B 22.0              |
| 28.0-31.7     | B 25.0              |
| 31.8-35.9     | B 28.0              |
| 36.0-39.9     | B 32.0              |
| 40.0-45.7     | B 36.0              |
| 45.8-50.9     | B 40.0              |
| 51.0-61.7     | B 45.0              |
| 61.8-65.1     | B 50.0              |
| 65.2-69.9     | B 56.0              |
| 70.0-79.5     | B 62.0              |
| 79.6-89.4     | B 70.0              |

Thermal Unit Table 133

(index and instructions: [page 16-132 to page 16-136](#))

| Motor FLC (A) | Thermal Unit Number |
|---------------|---------------------|
| 4.60-5.23     | B 6.90              |
| 5.24-5.86     | B 7.70              |
| 5.87-6.25     | B 8.20              |
| 6.26-7.09     | B 9.10              |
| 7.10-8.25     | B 10.2              |
| 8.26-9.49     | B 11.5              |
| 9.50-10.3     | B 12.8              |
| 10.4-11.2     | B 14.0              |
| 11.3-12.5     | B 15.5              |
| 12.6-13.8     | B 17.5              |
| 13.9-15.0     | B 19.5              |
| 15.1-16.9     | B 22.0              |
| 17.0-19.1     | B 25.0              |
| 19.2-22.0     | B 28.0              |
| 22.1-24.4     | B 32.0              |
| 24.5-28.0     | B 36.0              |
| 28.1-31.8     | B 40.0              |
| 31.9-36.0     | B 45.0              |
| 36.1-38.5     | B 50.0              |
| 38.6-41.2     | B 56.0              |
| 41.3-44.4     | B 62.0              |
| 44.5-50.3     | B 70.0              |
| 50.4-56.9     | B 79.0              |
| 57.0-59.0     | B 88.0              |

**Thermal Unit Table 135**

(index and instructions: [page 16-132 to page 16-136](#))

| Motor FLC (A)                                                                          |           | Thermal Unit Number |
|----------------------------------------------------------------------------------------|-----------|---------------------|
| 1 T.U.                                                                                 | 3 T.U.    |                     |
| 0.77-0.88                                                                              | 0.85-0.95 | B 1.30              |
| 0.89-1.02                                                                              | 0.96-1.09 | B 1.45              |
| 1.03-1.19                                                                              | 1.10-1.21 | B 1.67              |
| 1.20-1.37                                                                              | 1.22-1.35 | B 1.88              |
| 1.38-1.62                                                                              | 1.36-1.56 | B 2.10              |
| 1.63-1.90                                                                              | 1.57-1.76 | B 2.40              |
| 1.91-2.12                                                                              | 1.77-1.94 | B 2.65              |
| 2.13-2.46                                                                              | 1.95-2.22 | B 3.00              |
| 2.47-2.83                                                                              | 2.23-2.57 | B 3.30              |
| 2.84-3.19                                                                              | 2.58-2.87 | B 3.70              |
| 3.20-3.61                                                                              | 2.88-3.21 | B 4.15              |
| 3.62-3.89                                                                              | 3.22-3.50 | B 4.85              |
| 3.90-4.32                                                                              | 3.51-3.79 | B 5.50              |
| 4.33-4.57                                                                              | 3.80-4.04 | B 6.25              |
| 4.58-5.19                                                                              | 4.05-4.53 | B 6.90              |
| 5.20-5.79                                                                              | 4.54-5.03 | B 7.70              |
| 5.80-6.16                                                                              | 5.04-5.36 | B 8.20              |
| 6.17-6.94                                                                              | 5.37-5.97 | B 9.10              |
| 6.95-7.99                                                                              | 5.98-6.89 | B 10.2              |
| 7.80-8.99                                                                              | 6.90-7.79 | B 11.5              |
| 9.00-9.98                                                                              | 7.80-8.53 | B 12.8              |
| 9.99-10.6                                                                              | 8.54-9.09 | B 14.0              |
| 10.7-11.6                                                                              | 9.10-9.99 | B 15.5              |
| 11.7-13.1                                                                              | 10.0-10.9 | B 17.5              |
| 13.2-14.2                                                                              | 11.0-11.7 | B 19.5              |
| 14.3-15.4                                                                              | 11.8-13.4 | B 22.0              |
| 15.5-17.6                                                                              | 13.5-15.4 | B 25.0              |
| 17.7-20.0                                                                              | 15.5-17.9 | B 28.0              |
| -                                                                                      | 18.0-20.0 | B 32.0              |
| For Type DPSG12 & DPSG13, 20 A Starter.<br>Select Thermal Units from above.            |           |                     |
| 20.1-22.7                                                                              | 18.0-20.2 | B 32.0              |
| 22.8-25.0                                                                              | 20.3-23.2 | B 36.0              |
| -                                                                                      | 23.3-25.0 | B 40.0              |
| For Type DPSG22 & DPSG23, 25 A Starter.<br>Select any of the Thermal Units from above. |           |                     |
| 22.8-26.1                                                                              | -         | B 36.0              |
| 26.2-29.6                                                                              | 23.3-25.8 | B 40.0              |
| 29.7-30.0                                                                              | 25.9-28.6 | B 45.0              |
| For Type DPSG32 & DPSG33, 30 A Starter.<br>Select any of the Thermal Units from above. |           |                     |

**Thermal Unit Table 145**

(index and instructions: [page 16-132 to page 16-136](#))

| Motor FLC (A)                                                                          |           | Thermal Unit Number |
|----------------------------------------------------------------------------------------|-----------|---------------------|
| 1 T.U.                                                                                 | 3 T.U.    |                     |
| 1.00-1.11                                                                              | 0.91-1.02 | B1.30               |
| 1.12-1.27                                                                              | 1.03-1.15 | B1.45               |
| 1.28-1.36                                                                              | 1.16-1.27 | B1.67               |
| 1.37-1.53                                                                              | 1.28-1.39 | B1.88               |
| 1.54-1.78                                                                              | 1.40-1.61 | B2.10               |
| 1.79-2.02                                                                              | 1.62-1.84 | B2.40               |
| 2.03-2.20                                                                              | 1.85-2.03 | B2.65               |
| 2.21-2.52                                                                              | 2.04-2.34 | B3.00               |
| 2.53-2.94                                                                              | 2.35-2.69 | B3.30               |
| 2.95-3.30                                                                              | 2.70-3.02 | B3.70               |
| 3.31-3.70                                                                              | 3.03-3.39 | B4.15               |
| 3.71-4.02                                                                              | 3.40-3.65 | B4.85               |
| 4.03-4.46                                                                              | 3.66-4.04 | B5.50               |
| 4.47-4.69                                                                              | 4.05-4.28 | B6.25               |
| 4.70-5.37                                                                              | 4.29-4.85 | B6.90               |
| 5.38-5.94                                                                              | 4.86-5.38 | B7.70               |
| 5.95-6.34                                                                              | 5.39-5.71 | B8.20               |
| 6.35-7.09                                                                              | 5.72-6.39 | B9.10               |
| 7.10-8.46                                                                              | 6.40-7.53 | B10.2               |
| 8.47-9.32                                                                              | 7.54-8.34 | B11.5               |
| 9.33-10.2                                                                              | 8.35-9.14 | B12.8               |
| 10.3-10.9                                                                              | 9.15-9.74 | B14.0               |
| 11.0-12.1                                                                              | 9.75-10.7 | B15.5               |
| 12.2-13.4                                                                              | 10.8-11.8 | B17.5               |
| 13.5-14.2                                                                              | 11.9-12.2 | B19.5               |
| 14.3-16.0                                                                              | 12.3-14.4 | B22.0               |
| 16.1-18.1                                                                              | 14.5-16.4 | B25.0               |
| 18.2-20.5                                                                              | 16.5-18.9 | B28.0               |
| 20.6-23.5                                                                              | 19.0-21.3 | B32.0               |
| 23.6-27.2                                                                              | 21.4-23.3 | B36.0               |
| 27.3-30.8                                                                              | 23.4-27.9 | B40.0               |
| 30.9-35.0                                                                              | 28.0-31.4 | B45.0               |
| 35.1-37.2                                                                              | -         | B50.0               |
| 37.3-40.0                                                                              | -         | B56.0               |
| For Type DPSG42 & DPSG43, 40 A Starter.<br>Select any of the Thermal Units from above. |           |                     |

**Thermal Unit Table 136**

(index and instructions: [page 16-132 to page 16-136](#))

| Motor FLC (A)                                                                          |           | Thermal Unit Number |
|----------------------------------------------------------------------------------------|-----------|---------------------|
| 1 T.U.                                                                                 | 3 T.U.    |                     |
| 0.98-1.09                                                                              | 0.88-0.98 | B 1.30              |
| 1.10-1.24                                                                              | 0.99-1.13 | B 1.45              |
| 1.25-1.41                                                                              | 1.14-1.26 | B 1.67              |
| 1.42-1.59                                                                              | 1.27-1.38 | B 1.88              |
| 1.60-1.81                                                                              | 1.39-1.62 | B 2.10              |
| 1.82-2.04                                                                              | 1.63-1.82 | B 2.40              |
| 2.05-2.19                                                                              | 1.83-2.04 | B 2.65              |
| 2.20-2.52                                                                              | 2.05-2.36 | B 3.00              |
| 2.53-2.90                                                                              | 2.37-2.72 | B 3.30              |
| 2.91-3.29                                                                              | 2.73-3.07 | B 3.70              |
| 3.30-3.69                                                                              | 3.08-3.44 | B 4.15              |
| 3.70-3.99                                                                              | 3.45-3.69 | B 4.85              |
| 4.00-4.42                                                                              | 3.70-4.11 | B 5.50              |
| 4.43-4.69                                                                              | 4.12-4.34 | B 6.25              |
| 4.70-5.37                                                                              | 4.35-4.89 | B 6.90              |
| 5.38-5.94                                                                              | 4.90-5.44 | B 7.70              |
| 5.95-6.34                                                                              | 5.45-5.80 | B 8.20              |
| 6.35-7.05                                                                              | 5.81-6.47 | B 9.10              |
| 7.06-8.14                                                                              | 6.48-7.45 | B 10.2              |
| 8.15-9.39                                                                              | 7.46-8.49 | B 11.5              |
| 9.40-10.3                                                                              | 8.50-9.29 | B 12.8              |
| 10.4-11.1                                                                              | 9.30-9.99 | B 14.0              |
| 11.2-12.2                                                                              | 10.0-10.8 | B 15.5              |
| 12.3-13.5                                                                              | 10.9-12.1 | B 17.5              |
| 13.6-14.7                                                                              | 12.2-13.1 | B 19.5              |
| 14.8-16.1                                                                              | 13.2-14.6 | B 22.0              |
| 16.2-18.3                                                                              | 14.7-16.4 | B 25.0              |
| 18.4-20.0                                                                              | 16.5-18.9 | B 28.0              |
| -                                                                                      | 19.0-20.0 | B 32.0              |
| For Type DPSO12 & DPSO13, 20 A Starter.<br>Select Thermal Units from above.            |           |                     |
| 18.4-20.9                                                                              | -         | B 28.0              |
| 21.0-23.6                                                                              | 19.0-20.9 | B 32.0              |
| 23.7-25.0                                                                              | 21.0-24.1 | B 36.0              |
| -                                                                                      | 24.2-25.0 | B 40.0              |
| For Type DPSO22 & DPSO23, 25 A Starter.<br>Select any of the Thermal Units from above. |           |                     |
| 23.7-27.2                                                                              | -         | B 36.0              |
| 27.3-30.0                                                                              | 24.2-27.2 | B 40.0              |
| -                                                                                      | 27.3-30.0 | B 45.0              |
| For Type DPSO32 & DPSO33, 30 A Starter.<br>Select any of the Thermal Units from above. |           |                     |

**Thermal Unit Table 146**

(index and instructions: [page 16-132 to page 16-136](#))

| Motor FLC (A)                                                                          |           | Thermal Unit Number |
|----------------------------------------------------------------------------------------|-----------|---------------------|
| 1 T.U.                                                                                 | 3 T.U.    |                     |
| 3.90-4.22                                                                              | 3.60-3.89 | B5.50               |
| 4.23-4.49                                                                              | 3.90-4.15 | B6.25               |
| 4.50-5.14                                                                              | 4.16-4.76 | B6.90               |
| 5.15-5.78                                                                              | 4.77-5.30 | B7.70               |
| 5.79-6.23                                                                              | 5.31-5.70 | B8.20               |
| 6.24-7.03                                                                              | 5.71-6.46 | B9.10               |
| 7.04-8.23                                                                              | 6.47-7.65 | B10.2               |
| 8.24-9.31                                                                              | 7.66-8.55 | B11.5               |
| 9.32-10.1                                                                              | 8.56-9.36 | B12.8               |
| 10.2-10.7                                                                              | 9.37-9.9  | B14.0               |
| 10.8-11.9                                                                              | 10.0-10.9 | B15.5               |
| 12.0-13.1                                                                              | 11.0-12.0 | B17.5               |
| 13.2-13.9                                                                              | 12.1-12.8 | B19.5               |
| 14.0-15.9                                                                              | 12.9-14.2 | B22.0               |
| 16.0-18.0                                                                              | 14.3-16.0 | B25.0               |
| 18.1-20.8                                                                              | 16.1-18.5 | B28.0               |
| 20.9-23.1                                                                              | 18.6-21.2 | B32.0               |
| 23.2-26.9                                                                              | 21.3-24.9 | B36.0               |
| 27.0-31.4                                                                              | 25.0-28.0 | B40.0               |
| 31.5-36.0                                                                              | 28.1-31.7 | B45.0               |
| 36.1-38.8                                                                              | 31.8-34.6 | B50.0               |
| 38.9-41.7                                                                              | 34.7-37.4 | B56.0               |
| 41.8-46.3                                                                              | 37.5-40.0 | B62.0               |
| 46.4-50.0                                                                              | 40.1-46.4 | B70.0               |
| -                                                                                      | 46.5-50.0 | B79.0               |
| For Type DPSG52 & DPSG53, 50 A Starter.<br>Select any of the Thermal Units from above. |           |                     |

Thermal Unit Table 147

(index and instructions: [page 16-132](#) to [page 16-136](#))

| Motor FLC (A)                                                                          |           | Thermal Unit Number |
|----------------------------------------------------------------------------------------|-----------|---------------------|
| 1 T.U.                                                                                 | 3 T.U.    |                     |
| 1.04–1.14                                                                              | 0.93–1.04 | B1.30               |
| 1.15–1.29                                                                              | 1.05–1.18 | B1.45               |
| 1.30–1.43                                                                              | 1.19–1.33 | B1.67               |
| 1.44–1.56                                                                              | 1.34–1.43 | B1.88               |
| 1.57–1.79                                                                              | 1.44–1.67 | B2.10               |
| 1.80–2.03                                                                              | 1.68–1.88 | B2.40               |
| 2.04–2.26                                                                              | 1.89–2.09 | B2.65               |
| 2.27–2.51                                                                              | 2.10–2.41 | B3.00               |
| 2.52–3.03                                                                              | 2.42–2.79 | B3.30               |
| 3.04–3.31                                                                              | 2.80–3.15 | B3.70               |
| 3.32–3.73                                                                              | 3.16–3.54 | B4.15               |
| 3.74–4.07                                                                              | 3.55–3.75 | B4.85               |
| 4.08–4.49                                                                              | 3.76–4.22 | B5.50               |
| 4.50–4.76                                                                              | 4.23–4.46 | B5.25               |
| 4.77–5.44                                                                              | 4.47–5.09 | B6.90               |
| 5.45–6.04                                                                              | 5.10–5.61 | B7.70               |
| 6.05–6.46                                                                              | 5.62–5.99 | B8.20               |
| 6.47–7.24                                                                              | 6.00–6.70 | B9.10               |
| 7.25–8.64                                                                              | 6.71–8.19 | B10.20              |
| 8.65–9.59                                                                              | 8.20–8.79 | B11.5               |
| 9.60–10.5                                                                              | 8.80–9.66 | B12.8               |
| 10.6–11.3                                                                              | 9.67–10.2 | B14.0               |
| 11.4–12.6                                                                              | 10.3–11.4 | B15.5               |
| 12.7–13.9                                                                              | 11.5–12.6 | B17.5               |
| 14.0–14.9                                                                              | 12.7–13.5 | B19.5               |
| 15.0–16.5                                                                              | 13.6–15.1 | B22.0               |
| 16.6–18.9                                                                              | 15.2–17.2 | B25.0               |
| 19.0–22.2                                                                              | 17.3–19.9 | B28.0               |
| 22.3–24.6                                                                              | 20.0–22.5 | B32.0               |
| 24.7–28.6                                                                              | 22.6–26.2 | B36.0               |
| 28.7–32.4                                                                              | 26.3–29.9 | B40.0               |
| 32.5–37.3                                                                              |           | B45.0               |
| 37.4–39.5                                                                              |           | B50.0               |
| 39.6–40.0                                                                              |           | B56.0               |
| For Type DPSO42 & DPSO43, 40 A Starter.<br>Select any of the Thermal Units from above. |           |                     |

Thermal Unit Table 148

(index and instructions: [page 16-132](#) to [page 16-136](#))

| Motor FLC (A)                                                                          |           | Thermal Unit Number |
|----------------------------------------------------------------------------------------|-----------|---------------------|
| 1 T.U.                                                                                 | 3 T.U.    |                     |
| 4.14–4.45                                                                              | 3.70–4.09 | B5.50               |
| 4.46–4.88                                                                              | 4.10–4.35 | B6.25               |
| 4.89–5.44                                                                              | 4.36–5.07 | B6.90               |
| 5.45–6.08                                                                              | 5.08–5.79 | B7.70               |
| 6.09–6.42                                                                              | 5.80–6.27 | B8.20               |
| 6.43–7.28                                                                              | 6.28–7.16 | B9.10               |
| 7.29–8.42                                                                              | 7.17–8.58 | B10.2               |
| 8.43–9.64                                                                              | 8.59–9.55 | B11.5               |
| 9.65–10.4                                                                              | 9.56–10.2 | B12.8               |
| 10.5–11.2                                                                              | 10.3–10.9 | B14.0               |
| 11.3–12.3                                                                              | 11.0–11.9 | B15.5               |
| 12.4–13.7                                                                              | 12.0–13.1 | B17.5               |
| 13.8–14.8                                                                              | 13.2–14.0 | B19.5               |
| 14.9–16.5                                                                              | 14.1–14.8 | B22.0               |
| 16.6–18.7                                                                              | 14.9–17.0 | B25.0               |
| 18.8–21.4                                                                              | 17.1–19.6 | B28.0               |
| 21.5–24.3                                                                              | 19.7–22.1 | B32.0               |
| 24.4–28.0                                                                              | 22.2–26.0 | B36.0               |
| 28.1–33.3                                                                              | 26.1–29.4 | B40.0               |
| 33.4–37.6                                                                              | 29.5–34.0 | B45.0               |
| 37.7–41.1                                                                              | 34.1–36.4 | B50.0               |
| 41.2–44.1                                                                              | 36.5–39.2 | B56.0               |
| 44.2–47.8                                                                              | 39.3–42.4 | B62.0               |
| 47.9–50.0                                                                              | 42.5–49.3 | B70.0               |
| —                                                                                      | 49.4–50.0 | B79.0               |
| For Type DPSO52 & DPSO53, 50 A Starter.<br>Select any of the Thermal Units from above. |           |                     |