

Automation and control  
**Ethernet TCP/IP and  
Web technologies**  
*Navigate* freely across a  
universal network

Catalogue  
July

04

Transparent  
*Ready*<sup>™</sup>



---

<b>1 – Presentation</b>	
Introduction	page 1/2
Service classes offered	page 1/5
<i>Panorama of Transparent Ready products</i>	<i>page 1/8</i>
<b>2 – System approach</b>	
<i>Contents</i>	<i>page 2/1</i>
Embedded Web servers, FactoryCast offer	page 2/2
Ethernet TCP/IP communication service	page 2/12
Performances of Ethernet TCP/IP network	page 2/24
Ethernet ConneXium wiring system	page 2/24
System approach	
Application to electrical distribution	page 2/34
Modicon Quantum Hot Standby	page 2/36
Unity Studio software suite	page 2/37
Integration of Transparent Ready products	page 2/40
<b>3 – Field devices</b>	
<i>Contents</i>	<i>page 3/1</i>
Modicon Momentum distributed I/O	page 3/2
Advantys STB distributed I/O	page 3/3
Advantys OTB distributed I/O	page 3/4
ATV 38/58 variable speed drives	page 3/5
Inductel identification system	page 3/6
<b>4 – Electrical Distribution products</b>	
<i>Contents</i>	<i>page 4/1</i>
MV and LV protection and metering	page 4/2
Advanced electrical circuit monitors	page 4/3
Electrical power management software	page 4/4
<b>5 – Controller and PLCs</b>	
<i>Contents</i>	<i>page 5/1</i>
Modicon Momentum M1E processor adapters	page 5/2
Twido programmable controller	page 5/3
Modicon TSX Micro platform	page 5/4
Modicon Premium/Atrium platform	page 5/5
Modicon Quantum platform	page 5/8

---

<b>6 – Humain/Machine Interface products</b>	
<b>Contents</b> .....	<b>page 6/1</b>
<b>Magelis XBT graphic terminals</b> .....	<b>page 6/2</b>
<b>Magelis iPC industrial PCs</b> .....	<b>page 6/3</b>
<b>FactoryCast HMI application development software</b> .....	<b>page 6/5</b>
<b>Vijeo Look supervisory software</b> .....	<b>page 6/6</b>
<b>Monitor Pro supervisory software</b> .....	<b>page 6/7</b>
<b>OFS data server software</b> .....	<b>page 6/8</b>
<b>7 – Cabling system</b>	
<b>Contents</b> .....	<b>page 7/1</b>
<b>ConneXium hubs</b> .....	<b>page 7/2</b>
<b>ConneXium transceivers</b> .....	<b>page 7/3</b>
<b>ConneXium switches</b> .....	<b>page 7/4</b>
<b>ConneXium gateways</b> .....	<b>page 7/6</b>
<b>Connection cables</b> .....	<b>page 7/7</b>
<b>8 – Modbus-IDA organisation and Collaborative Automation Partner Program</b>	
<b>Sommaire</b> .....	<b>page 8/1</b>
<b>Modus-IDA organisation</b> .....	<b>page 8/2</b>
<b>Collaborative Automation Partner Program presentation</b> .....	<b>page 8/3</b>
<b>Examples of partner offer</b>	
Prosoft Technology .....	<b>page 8/4</b>
ConnectBlue .....	<b>page 8/6</b>
ACKSYS .....	<b>page 8/7</b>
DATA-LINC Group .....	<b>page 8/8</b>
Senside .....	<b>page 8/9</b>
<b>9 – Services</b>	
<b>Sommaire</b> .....	<b>page 9/1</b>
<b>Transparent Ready product certifications</b> .....	<b>page 9/2</b>
<b>Schneider Electric worldwide</b> .....	<b>page 9/4</b>
<b>Index</b> .....	<b>page 9/11</b>



---

## 1 - Presentation

- Introduction ..... page 1/2
- Service classes offered ..... page 1/5
- Panorama of Transparent Ready products..... page 1/8*

# Transparent Ready


Universal technologies for a world without restrictions

## Presentation

Transparent Ready making collaborative architectures a reality

Company environments are constantly changing due to the pressure of competition and the need for profitability. It is vital to take opportunities quickly. The challenge of today's world is therefore agility, which means adopting a **collaborative approach** to share data in real-time.

Schneider Electric's Transparent Ready products, based on universal Ethernet TCP/IP and Web technologies, meet this requirement. These industrial automation products (Trademark Telemecanique) and Electrical Distribution products (Trademark Merlin-Gerin) can be integrated into real-time data-sharing systems, with no need for interfaces.

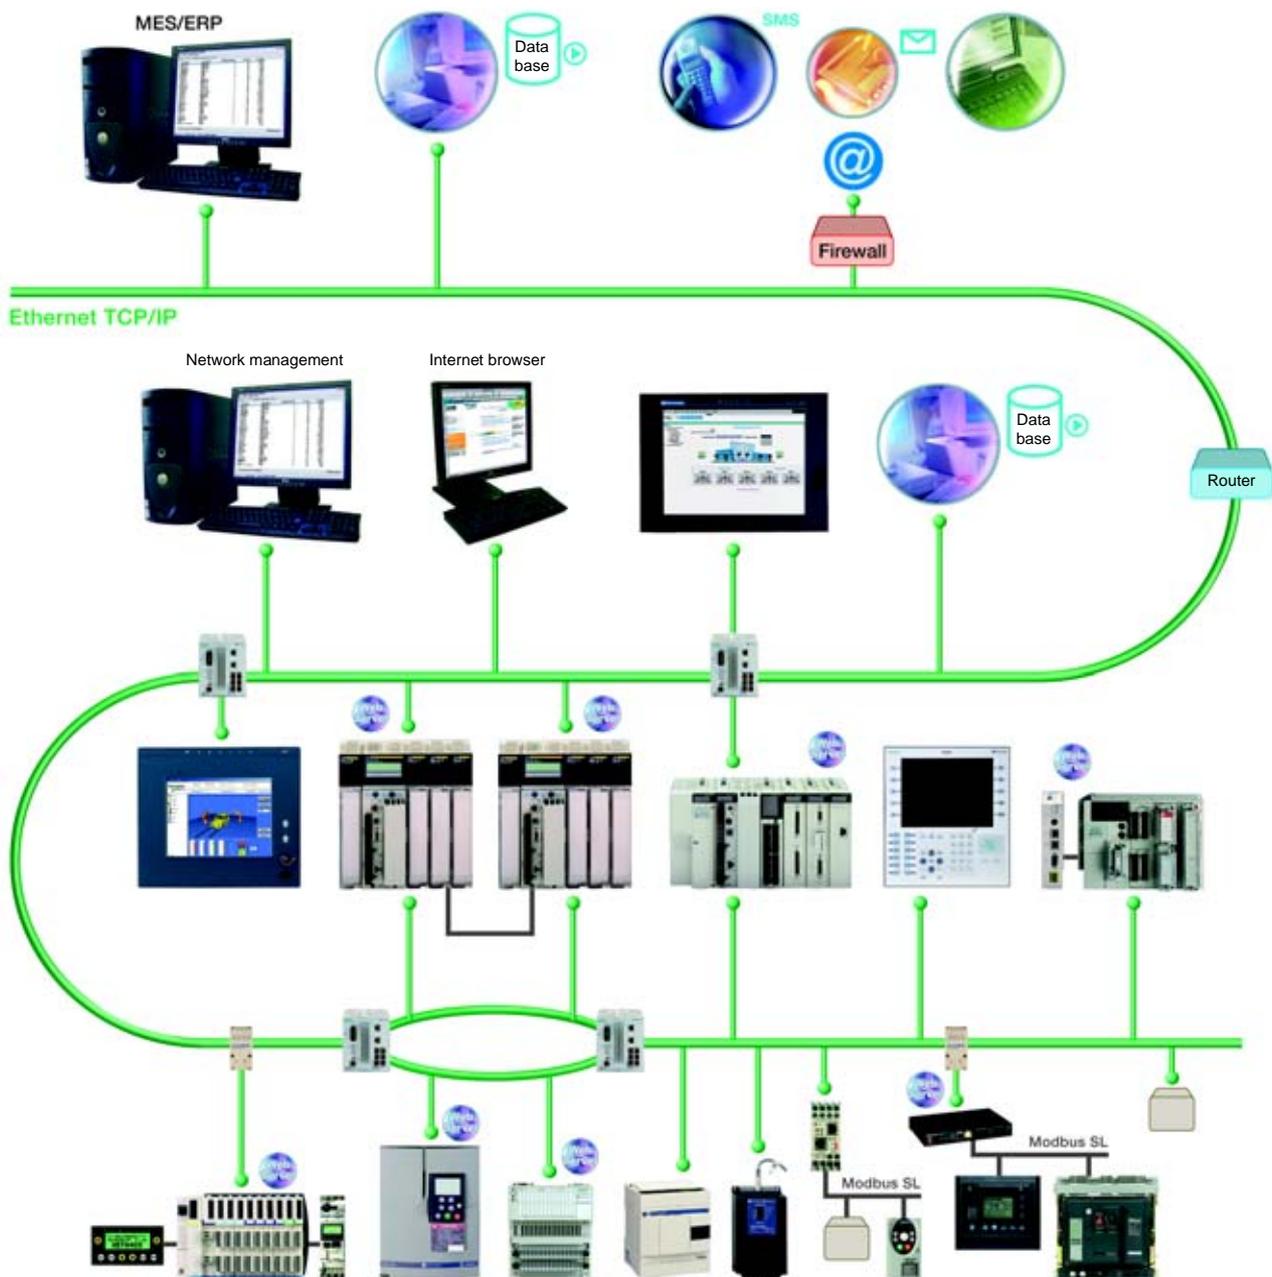

# Transparent Ready

## Universal technologies for a world without restrictions

### Presentation (continued)

#### The universal communication standard: Ethernet TCP/IP

The recognition of Ethernet TCP/IP, both in organizations and on the Internet, has made it the **communication standard** of today. Its wide use is leading to a reduction in connection costs, increased performance and the addition of new functions, which all combine to ensure its durability.

Ethernet TCP/IP meets the connection requirements of every application:

- Twisted pair copper cables for simplicity and low cost.
- Optical fiber for immunity to interference and for long distances.
- Communication redundancy, inherent in the IP protocol.
- Radio or satellite to overcome wiring restrictions.
- Remote point-to-point access via the telephone network or the Internet for the cost of a local call.

Ethernet TCP/IP, a truly open technology, supports all types of communication:

- Web pages
- File transfer
- Industrial messaging, etc

With its high speed, the network no longer limits the performance of the application. The architecture can evolve without any difficulty. The products remain compatible, ensuring the long-term durability of the system.

#### Modbus messaging: a standard technology adapted for the world of automation

Modbus has been the de facto standard for serial link protocols in industry since 1979. It is used for the communication of millions of automation devices. As a result of this success, the Internet community has reserved the TCP 502 port for Modbus. Modbus can thus be used for exchanging automation data on both Ethernet TCP/IP and the Internet, as well as for all other applications (file exchange, Web pages, e-mail, etc).

The simple structure of Modbus is bringing it ever-increasing success. Users can download the specifications and source code for numerous products that use the Modbus/TCP protocol, free of charge from the Modbus-IDA website [www.modbus-ida.org](http://www.modbus-ida.org).

Building on its industrial expertise, Telemecanique now has a complete offer of highly user-friendly services on Ethernet TCP/IP that are dedicated to the world of automation: Modbus TCP messaging, optimized I/O Scanning, publication and subscription of variables between Controllers and PLCs (Global Data), automatic product reconfiguration (Faulty Device Replacement), pass band monitoring, system diagnostics (Web), etc.


The single network, requiring no interfaces between the worlds of information technology and automation, is now a reality.

# Transparent Ready

## Universal technologies for a world without restrictions

### Presentation (continued)

#### Free navigation on the Web Automation

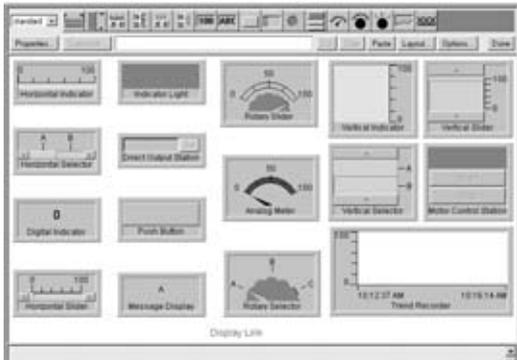

Schneider Electric broke new ground in 1998 with the first Web servers embedded in automation products. These servers provide remote access, using a simple Internet browser, to process information and equipment diagnostics.

With FactoryCast HMI, Telemecanique was once again the first, making the Web servers in Controllers and PLCs "active". Not only does the Web server provide pages containing the system and process variables, but it also executes tasks totally autonomously, without making use of the PLC processor: management of a real-time HMI database, e-mail transmission, calculations, connectivity with databases, etc.

With its functions embedded in a PLC, the FactoryCast HMI active Web server:

- Simplifies or removes the need for conventional HMI/SCADA (Supervision Control And Data Acquisition) solutions, reducing communication via polling to update HMI/SCADA databases.
- Provides remote multistation "nomadic" control, without any special software on the client stations.
- Provides a direct link to a company's information systems, without the need for an interface.

#### Transparent Ready for a world without restrictions




Telemecanique has a wide range of Transparent Ready products: Controllers and PLCs, industrial PCs, HMI devices, variable speed drives, I/O modules, gateways, servers, switches, SCADA software, inductive identification systems, etc.

These products provide different levels of Web services and communication services on Ethernet TCP/IP, according to users' requirements. In order to simplify choice and ensure their interoperability within a system, each Transparent Ready product is now identified by the class of services it provides.

#### Are you Transparent Ready?

With Transparent Ready you can:

- Use** → a common Ethernet TCP/IP infrastructure, covering all levels, from automation to company management.
- Benefit** → from the competitive advantages of proven high performance levels.
- Reduce** → downtime thanks to remote diagnostics via the Web.
- Create** → secure connections throughout the world.
- Minimize** → training costs by using tools everyone is familiar with (Internet browser, etc).
- Control** → costs by using open universal standards that do not require any special interfaces.

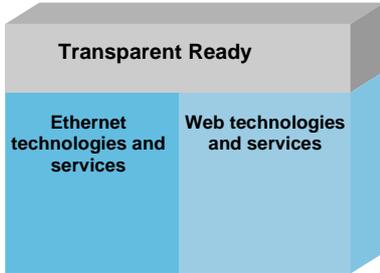

### Presentation

The Transparent Ready service classes make it possible to identify the services provided by each product:

- Diagnostic, display and control services via Web technologies
- Ethernet communication services

The Transparent Ready service classes thus simplify the choice of products and ensure their interoperability within an architecture.

### Web service classes

The service level of a Web server is defined by 4 service classes identified by a letter:

- Class **A**: No Web service
- Class **B**: Standard Web services
- Class **C**: Configurable Web services
- Class **D**: Active Web services

Transparent Ready products with an embedded Web server can provide 4 types of Web service:

- Maintenance Web services
- Control Web services
- Diagnostic Web services
- Optional Web services such as documentation or configuration

The following table specifies the services provided by each Web service class (A, B, C or D).

Web server class		Web services			
		Maintenance	Control	Diagnostics	Optional
<b>D</b>	Active Web server	- User website update	- Autonomous execution of specific services (for example, e-mail transmission, data transmission, calculations, etc)	- User-defined states	- User documentation
<b>C</b>	Configurable Web server		- PLC variables editor - Remote commands - User Web pages	- Communication service diagnostics - State of internal product resources	
<b>B</b>	Standard Web server	- Remote product software update - Remote auto-tests	- Product description	- Product status	- Configuration of network parameters and Ethernet communication services - Product documentation
<b>A</b>	No Web server	- No Web service			

# Transparent Ready

## Service classes offered

### Ethernet communication service classes

The Ethernet communication services provided by a product are defined by 3 classes, identified by a number:

- Class 10: standard Ethernet communication services
- Class 20: Ethernet communication management services (network level and product level)
- Class 30: advanced Ethernet communication services

Transparent Ready products can provide eight types of Ethernet communication service:

- Modbus TCP messaging service
- I/O Scanning service
- FDR (*Faulty Device Replacement*) service
- Network management service SNMP
- Global Data service
- Pass band management service
- Time synchronization service NTP
- (E-mail) event notification service, SMTP

These Ethernet communication services are described in chapter 2, "System approach", see pages 2/12 to 2/23.

The following table specifies the services provided for each Ethernet communication service class.

Ethernet communication service classes		Ethernet communication services							
		Modbus messaging	I/O Scanning	FDR	Network management SNMP	Global Data	E-mail SMTP	Bandwidth management	Time synchronization NTP
30	Advanced services	- Direct reading/writing of I/O	- Periodic reading/writing of I/O - Configuration of the list of products scanned	- Automatic control and updating of the product parameters configuration	- Use of the MIB library by an SNMP manager	- Publication and subscription of network variables	- Notification of events by e-mail	- Monitoring of load level	- Synchronization of product clocks
	Communication management services			- Automatic assignment of the IP address and network parameters - Control and updating of the configuration and product parameters by the user	- Detection of products by an SNMP manager				
10	Standard services	- Reading/writing of data words		- Local assignment of the IP address Verification of duplicate IP addresses					

# Transparent Ready

## Service classes offered

### Choice of Transparent Ready products

The services provided by a Transparent Ready product are identified by a letter defining the level of Web service, followed by a number defining the level of Ethernet communication service. For example:


- A class **A10** product is a product with no Web service and standard Ethernet services.
- A class **C30** product is a product with a configurable Web server and advanced Ethernet communication services.

**The services provided by a higher class include all the services supported by a lower class.**

Transparent Ready products are chosen from 4 main families:

- Sensor and preactuator type field products (simple or intelligent)
- Controllers and PLCs
- Human Machine Interface (HMI) applications
- Dedicated gateways and servers

The selection table on the following pages can be used for choosing Transparent Ready products according to the required service classes.

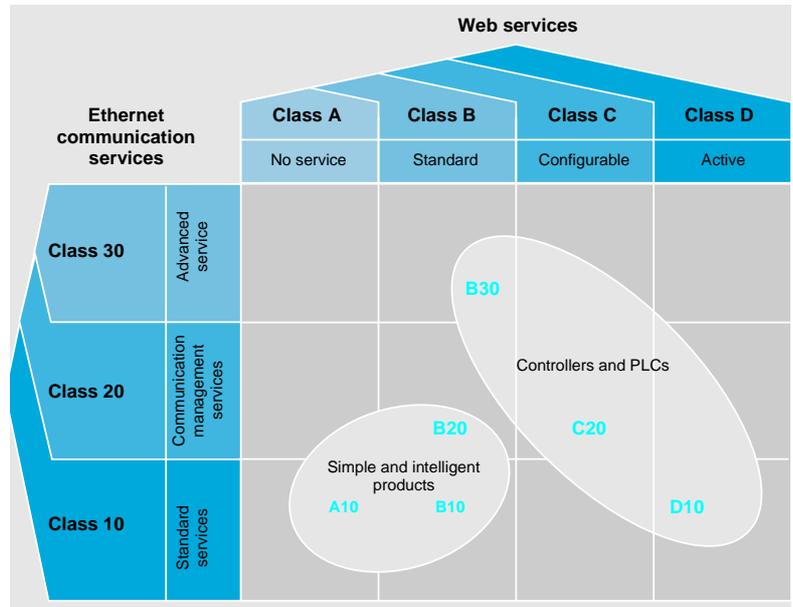

1

Ethernet TCP/IP communication services

Web services

No Web server  
Class A  
No Web service

Advanced services  
Class 30

- FDR (product replacement), automatic checking of network parameters
- SNMP (network administration), use of the MIB library by an SNMP tool
- Global Data
- Pass band management
- NTP (clock synchronization)
- SMTP (e-mail notification)



TSX ETY



TSX P57



140 NOE



140 CPU

Communication management services  
Class 20

- Modbus TCP messaging (read/write I/O)
- I/O Scanning
- FDR (product replacement), automatic assignment of network parameters
- SNMP (network administration), product detection



TSX ETZ



170 ENT



STB NIP

Standard communication services  
Class 10

- Modbus TCP messaging
- FDR (product replacement), verification of duplicate IP address



TWD LCAE



170 ENT



XGKS



OTB 1E0



TSX PCI



EGX

- Premium module TSX ETY 110
- Twido compact base TWD LCAE 40DRF
- Momentum adapter 170 ENT 110 02
- Advantys OTB interface OTB 1E0 DM9LP
- Ositrack station XGK S1715503
- Atrium coprocessor TSX PCI 57 204/454M

Human-Machine Interface products and software

Graphic terminals  
See page 6/2



XBT G



MPC ST5

- Magelis XBT G2●30/4330/5●30/6330
- Magelis XBT F024610/034610

iPC industrial PCs  
See pages 6/3 and 6/4

- Magelis Smart iPC MPC ST5 2NDJ 00T
- Magelis Compact iPC MPC KT5 ●NAA 00●
- Magelis Modular iPC MPC ●N0 ●ND● 00N

FactoryCast HMI development software  
See page 5/7



FactoryCast HMI TLX CD FCHMI V1M

Control and supervisory software  
See pages 6/5 to 6/7



- Vijeo Look control VJL SMD BT●RT● V25M
- Monitor Pro supervisory MP72 ●●●●
- OFS data server TLX CD ●●OFS 30M

See page

**Standard Web server Class B**

- View product description and status
- Remote software update

**Configurable Web server Class C**

- Variables editor
- Remote commands
- User Web pages
- Communication service diagnostics

**Active Web server Class D**

- Autonomous execution of services
- Diagnostics of user-defined states

Premium module TSX ETY 4103  
 Premium processor TSX P57 1634M  
 Premium processor TSX P57 2623/34M  
 Premium processor TSX P57 2823  
 Premium processor TSX P57 3623/34M  
 Premium processor TSX P57 4823  
 Premium processor TSX P57 4634/5634M  
 Quantum module 140 NOE 171 01  
 Quantum processor 140 CPU 65150  
 Quantum processor 140 CPU 65160

Premium module TSX ETY 5103  
 Quantum module 140 NOE 171 11

TSX Micro module TSX ETZ 410  
 Momentum adapter 170 ENT 110 01  
 Advantys STB module STB NIP 2212

TSX Micro module TSX ETZ 510

Momentum M1E 171 CCC 980 ●0  
 Momentum M1E 171 CCC 960 ●0  
 Altivar 38/58 VW3 A58 310  
 Modbus gateway EGX 200MG (1)

Premium module TSX ETY 110 WS  
 Modbus server EGX 400MG (1)  
 Circuit Monitor card ECC 21

Premium module TSX WMY 100  
 Quantum module 140 NWM 100 00

**ConneXium cabling system**

- Hubs
- Transceivers
- Switches
- Gateways
- Cables



499 NOH



499 NMS



174 CEV 300 20



174 CEV 200 40

Twisted pair 499 NEH 1●●  
 Fiber optic 499 NOH 1●●

499 NTR 10● ●0

Low cost 499 NES 251 00  
 Twisted pair 499 NES 181/271 00  
 Fiber optic 499 NOS 171 00  
 Fiber optic 499 NMS/NSS 251 01/02

Modbus SL 174 CEV 300 20  
 Modbus Plus 174 CEV 200 30/40

Twisted pair 490 NTV/NTC 000 ●●  
 Fiber optic 490 NO● 05

(1) Dedicated to Sepam protection relays, to Micrologic protection units for Masterpact circuits-breakers, to Power Logic PM et CM power meters.



**2.1 Embedded Web servers**

- FactoryCast presentation ..... page 2/2
- Standard Web services ..... page 2/4
- FactoryCast Web server ..... page 2/6
- FactoryCast HMI Web server ..... page 2/8

**2.2 Ethernet TCP/IP communication service**

- Standard Ethernet services ..... page 2/12
- Modbus communication standard ..... page 2/15
- I/O Scanning service ..... page 2/16
- FDR replacement service for faulty devices ..... page 2/17
- Global Data service in real time between stations ..... page 2/18
- NTP time synchronization service ..... page 2/19
- SMTP electronic mail notification service ..... page 2/20
- SNMP network management protocol service ..... page 2/21
- TCP Open optional service ..... page 2/22

**2.3 Performance of Ethernet TCP/IP network**

- Processing capacity in terms of volume of exchanges ..... page 2/24
- Application response time ..... page 2/26

**2.4 Ethernet ConneXium wiring system**


- Architectures in a same collision domain (hubs and transceivers) ..... page 2/28
- Architectures with several collision domains (switches) ..... page 2/32
- Redundancy ..... page 2/33

**2.5 System approach**

- Application to electrical distribution ..... page 2/34
- Modicon Quantum Hot Standby on Ethernet TCP/IP ..... page 2/36
- Unity Studio software suite ..... page 2/37

**2.6 Integration of Transparent Ready products**

- Company level ..... page 2/40
- Inter-PLC level ..... page 2/41
- Field level ..... page 2/42
- Remote communication (Internet, telephone, radio) ..... page 2/43
- Other requirements (diagnostic, interoperability, security)..... page 2/44

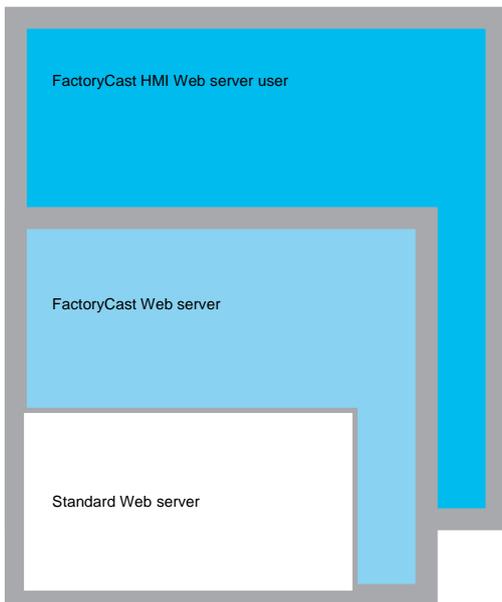

Ethernet TCP/IP PLC module services

### Presentation

In line with the Transparent Ready approach, TSX Micro, Premium, Quantum, Momentum, Advantys STB distributed I/O and ATV drive automation platforms provide transparent access to data in realtime using Web-based technologies via their Ethernet TCP/IP or FactoryCast communication module.

The Transparent Ready communication modules in automation platforms integrate Ethernet TCP/IP services (Modbus TCP/IP messaging, SNMP network management functions, etc.) and provide the following Web functions:

- Standard Web server
- FactoryCast Web server
- FactoryCast HMI Web service

### Standard Web server

Standard Web services can be used to execute diagnostic and maintenance functions on automation system installations locally or remotely using a simple Internet browser:

- PLC system and I/O module diagnostics, PLC error display ("Rack Viewer" pages ready to use)
- Display and adjustment of PLC variables ("Data Editor" pages ready to use)

The embedded Web server is a realtime PLC data server. All the data can be presented in the form of standard Web pages in HTML format and can therefore be accessed using any Internet browser that supports the integrated Java code. The standard functions provided by the Web server are supplied "ready to use" and therefore do not require any programming at either PLC level or at the level of the PC device supporting the Internet browser.

### FactoryCast Web server

In addition to providing standard Web services, the FactoryCast Web server can be used to control and monitor automation system installations both locally and remotely. The following functions are available:

- Management of system alarms and PLC application with partial or global acknowledgment ("ready to use" pages for the "Alarm Viewer" function)
- Application graphics diagnostics (customized graphical views created by the user using the "Graphic Data Editor" function)
- Graphics control via animated Web pages created by the user and stored in the FactoryCast module

FactoryCast Web servers can also be used to customize control, diagnostics and maintenance interfaces via user-defined Web pages and Web pages transferred to the module using FactoryCast configuration software (maximum available memory required is 8 Mb).

### FactoryCast HMI Web server

In addition to the FactoryCast Web functions, the FactoryCast HMI Web server provides HMI Web functions, which are executed in the module itself:

- Realtime HMI database management, independent of the PLC processor
- Arithmetic and logical calculations based on HMI data
- Connectivity with relational databases
- Transmission of electronic messages (e-mail)

FactoryCast HMI is an active Web server, which can be used to execute HMI functions integrated in a PLC module. This eliminates the need for communication via polling to update the HMI/SCADA database.

In FactoryCast HMI modules, the HMI functions are executed without affecting the PLC application program and therefore the cycle time.

### Selection of Telemecanique Transparent Ready modules (1)

Products	Reference	Web server integrated		
		Standard Class B20	FactoryCast Class C20/C30	FactoryCast HMI Class D10
Quantum automation platform	Processors	140 CPU 651 50		
		140 CPU 651 60		
	Modules	140 NOE 771 01		
		140 NOE 771 11		
		140 NWM 100 00		
Premium automation platform	Processors	TSX P57 2623 M		
		TSX P57 2823 M		
		TSX P57 3623 M		
		TSX P57 4823 M		
		TSX P57 1634 M		
		TSX P57 2634 M		
		TSX P57 3634 M		
		TSX P57 4634 M		
		TSX P57 5634 M		
	Modules	TSX ETY 4103		
		TSX ETY 110WS		
		TSX ETY 5103		
		TSX WMY 100		
		TSX ETZ 410		
TSX Micro automation platform	Modules	TSX ETZ 410		
		TSX ETZ 510		
Momentum automation platform	M1E processors	171 CCC 960 20		
		171 CCC 960 30		
		171 CCC 980 20		
		171 CCC 980 30		
	Modules	170 ENT 110 01		
		170 ENT 110 02		
Advantys STB distributed I/O	Network interface module	STB NIP 2212		
Altivar ATV 38/58 variable speed drive	Card	VW3 A58310		

FactoryCast is a range of PLC modules associated with their configuration software and combines the following features:

- Realtime communication functions based on Ethernet TCP/IP
- Predefined Web pages, which enable advanced installation diagnostics
- The capacity to store dynamic user-defined Web pages

(1) Electrical Distribution products of Merlin Gerin, see pages 4/2 to 4/4.


# Transparent Ready

System approach

Embedded Web servers, standard Web services

2  
2.1

## Standard Web services

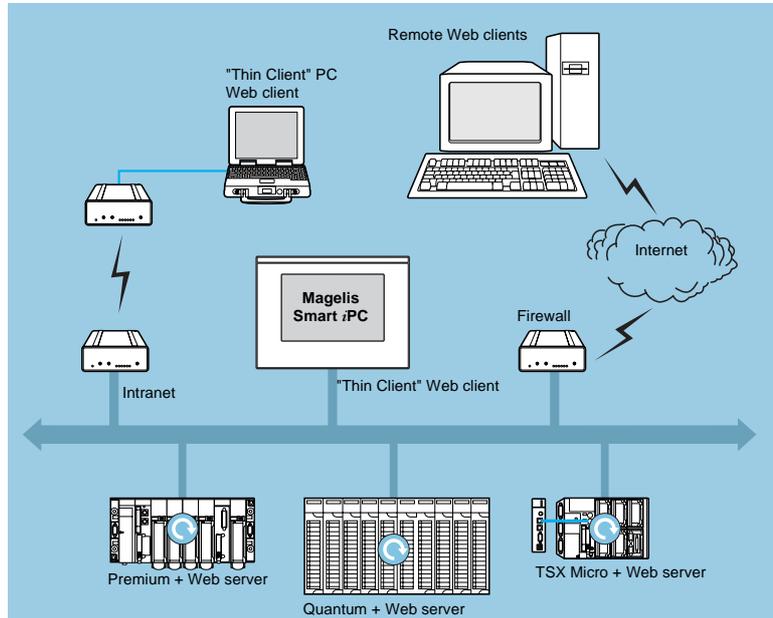

"Rack Viewer" and "Data Editor" functions are supported by the Ethernet TCP/IP modules of the following:

- TSX Micro platform
- Premium platform
- Quantum platform
- Momentum platform
- Advantys STB distributed I/Os
- FactoryCast modules

See module reference on page 2/3.

These functions can be accessed using a standard Internet browser connected to the network. They are "ready to use" and secure (password-protected).

They can be used locally or remotely via:

- Intranet
- A modem and RAS server
- Internet.

**"Rack Viewer" PLC diagnostics function**



Quantum hardware configuration

The "Rack Viewer" function (PLC rack display) can be used for PLC system and I/O diagnostics. It displays the following in realtime:

- LED status on the front panel of the PLC
- The PLC version
- The hardware configuration of the PLC including the status of the system bits and words
- Detailed diagnostics of all I/O module channels or application-specific channels in the configuration

**"Data Editor" read/write function for PLC data and variables**




Premium main rack hardware configuration

The "Data Editor" function can be used to create tables of animated variables for realtime read/write access to lists of PLC data.

The variables to be displayed can be entered and displayed either symbolically (S\_Pump 234) or by their address (%MW99).

These variables only support write access if this option has been enabled using the FactoryCast configuration software. A second password must be entered and verified when writing a value to a variable.

Various animation tables containing specific application variables to be monitored or modified can be created by the user and saved in the Ethernet TCP/IP module.

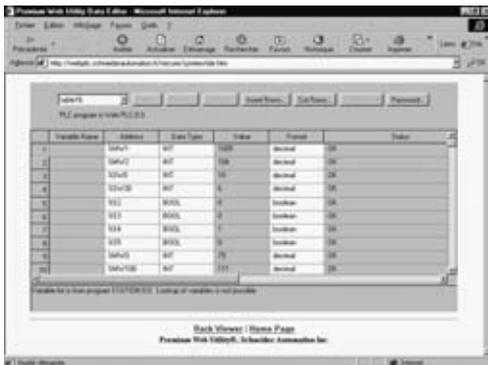


Variables table

# Transparent Ready

System approach

Embedded Web servers, FactoryCast Web server

## FactoryCast Web server

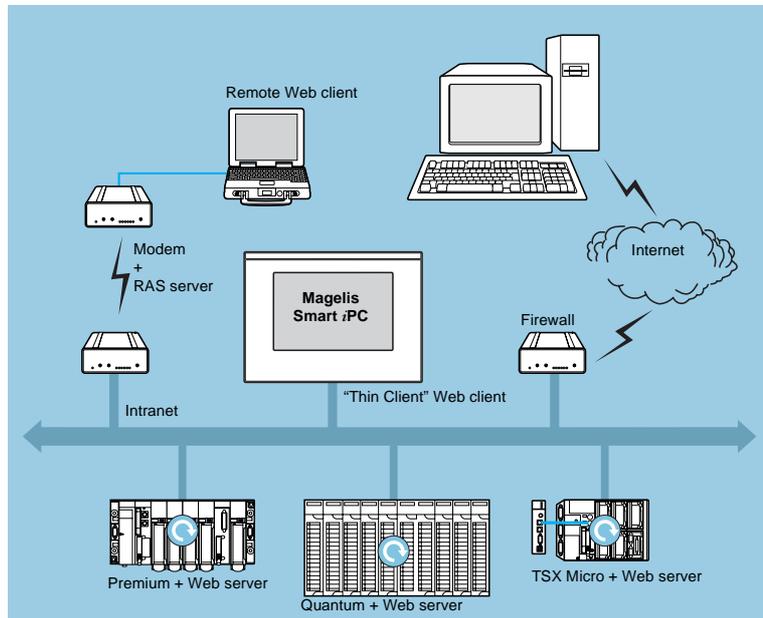

In addition to standard Web services, FactoryCast modules (see selection table on page 2/3) support the following functions:

- Alarm Viewer
- Creation and display of graphical views via an online graphics editor (Graphic Data Editor supplied)
- Hosting and display of Web pages created by the user

FactoryCast configuration software (supplied with FactoryCast modules) is required for the last 2 functions.



## Alarm Viewer function

"Alarm Viewer" is a ready-to-use password-protected function. Based on the diagnostics buffer managed in the PLCs (specific memory area used to store all diagnostic events), this function is available with the Premium/Atrium platforms (with PL7 or Unity software) and the Quantum platform (with Unity software).

This function can be used to process alarms (display, acknowledgment and deletion) managed at PLC level by the system or using diagnostic function blocks known as DFBs (system-specific diagnostic function blocks and application-specific diagnostic function blocks created by the user).

## Alarm Viewer page

The diagnostics viewer is a Web page comprising a list of messages, which displays the following information for each alarm:


- Its state
- The type of associated diagnostic function block (DFB)
- Its geographical area
- The dates and times of the occurrence/removal of a fault.

# Transparent Ready System approach

## Embedded Web servers, FactoryCast Web server

### FactoryCast Web server (continued)

#### Graphic Data Editor function

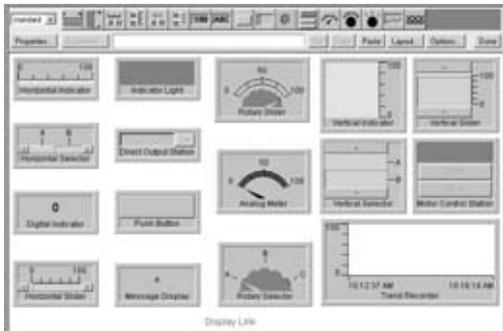

This function can be used to create graphical views online, animated by PLC variables.

These views are created using a library of graphic objects, which are predefined by simple copy/paste operations. The object parameters are set according to user requirements (color, PLC variables, labels, etc.). The graphic objects provided, which are the basic elements of the view, are as follows:

- Analog and digital indicators
- Horizontal and vertical bar charts
- Boxes for displaying messages and entering values
- Pushbutton boxes
- Functions for recording trends
- etc.

The views created can be saved in the FactoryCast modules.

These customized graphic objects can be reused in user Web pages that have been created using standard software for editing HTML pages.

#### Function for hosting and displaying user Web pages

In addition, FactoryCast Web modules have 8 Mbytes of memory (1), which is accessed in the same way as a hard drive and can be used to host user-defined Web pages.

These Web pages can be created using any standard tool (2) that enables creation and editing in HTML format. These pages can be enhanced by inserting animated graphic objects linked to PLC variables. These animated objects are provided in the Graphic Data Editor supplied with FactoryCast.

The Web pages created can be used, for example, to:

- Display and modify all PLC variables in realtime
- Create hyperlinks to other external Web servers (documentation, suppliers, etc.)

This function is particularly suitable for creating graphic screens used for the following purposes:

- Display, monitoring, diagnostics
- Generation of realtime production reports
- Maintenance help
- Operator guides

#### Configuration software for FactoryCast Web servers


The configuration software for FactoryCast Web servers is supplied on CD-Rom with every FactoryCast module (TSX Micro, Premium or Quantum).

The software is used for the configuration and administration of the Web server embedded in these modules. The software is compatible with Windows 95/98, Windows 2000, Windows NT 4.0 and Windows XP operating systems. It offers the following functions:

- Access security management
- Definition of user names and associated passwords for accessing Web pages
- Definition of access to variables authorized for modification
- Saving/restoration of an entire website
- Transfer of Web pages created locally by the user on their PC workstation to the FactoryCast module and vice versa.

(1) Memory is not affected in the event of power outages or if the PLC is reinitialized.

(2) For example, Microsoft FrontPage.

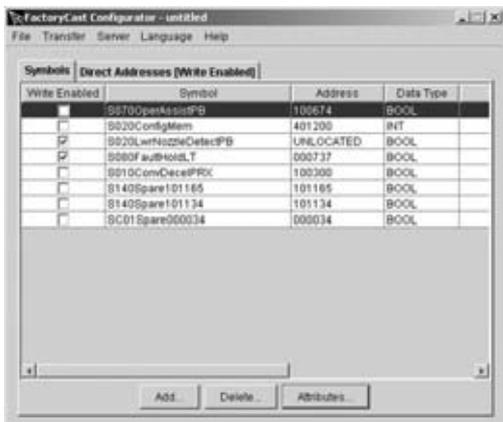

#### FactoryCast HMI Web services

The FactoryCast HMI range comprises two Web server modules embedded in the PLC (one for the Premium platform and one for the Quantum platform) and FactoryCast HMI application development software (to be ordered separately).

These modules have the same Web functions as FactoryCast modules, namely:

■ Ethernet TCP/IP communication functions:

- TCP/IP messaging service with Modbus TCP and Uni-TE TCP protocols
- SNMP agent for standardized network management, which supports standard MIB II and private Transparent Ready MIB.

■ Standard Web and FactoryCast services:

- "Rack Viewer" PLC diagnostics functions, see page 2/5
- "Data Editor" read/write functions for PLC variables, see page 2/5
- "Alarm Viewer" alarm display functions, see page 2/6
- "Graphic Data Editor" online graphical editor functions, see page 2/7
- Function for hosting and displaying user Web pages, see page 2/7

FactoryCast HMI modules also provide the following specialized HMI Web services:

■ Realtime database management specific to the module, combining PLC data acquisition and the management of local internal variables.

■ Arithmetic and logical calculations for pre-processing data.

■ E-mail with automatic transmission triggered by a specific process event.

■ Connection to the SQL Server, MySQL and Oracle relational databases for archiving data for tracking or logging.

By simply setting parameters, the FactoryCast HMI application development software can be used to set up these functions in an intuitive and user-friendly way. A simulation mode, which is integrated in the software, can be used to test the operation of the FactoryCast HMI application without a module and without the need for a physical connection to a PLC, thereby simplifying debugging.

#### Architectures

FactoryCast HMI Web servers can be integrated in various architectures:

- Installations that require a flexible and cost-effective HMI solution
- "Hybrid" architectures supplementing conventional SCADA systems
- Architectures where a direct link is required between automation systems and information management levels (IT link).

#### Flexible Web HMI solution

The use of Web-based technologies means that FactoryCast HMI can replace conventional HMI or SCADA solutions in applications where architectures require a flexible multistation HMI, thus providing a temporary "nomadic" remote control function.

These architectures consist of:

- Several PLCs networked on Ethernet, which have FactoryCast HMI Web server modules.
- One or more PC terminals with "Thin Client" interface equipped with a simple Web browser.
- If necessary, a relational database in which FactoryCast HMI can archive data directly from the automation system.

FactoryCast HMI modules read PLC data and execute HMI services (E-mail, interpreted calculations, connection to relational databases, updating Web pages) at source in the PLC, without affecting the PLC program or the scan time.

This solution provides:



- A reliable HMI application, which is executed at source in a robust PLC device.
- An integrated multistation interface and remote access that is easy and cost-effective to set up ("Thin Client" terminal).
- An HMI application that is easy to maintain (the application is housed in a single location on the server side).
- Preventive maintenance via E-mail.
- Greater availability of data archiving done from source.

#### Hybrid architectures

In this type of architecture, FactoryCast HMI supplements conventional SCADA systems. SCADA Vijeo Look or Monitor Pro software meets the requirement for centralizing information for global supervision from a central site.

Combining a FactoryCast HMI solution and a conventional SCADA solution enables:

- Simplification of the SCADA application by locating some of the SCADA processing at source, at PLC level.
- Increased availability of the traceability function due to the direct connection between FactoryCast HMI modules and relational databases.
- Powerful "ready to use" remote diagnostics capacities.
- "Nomadic" stations to be connected to the Intranet or Internet via "Thin Client" PC or PDA devices.

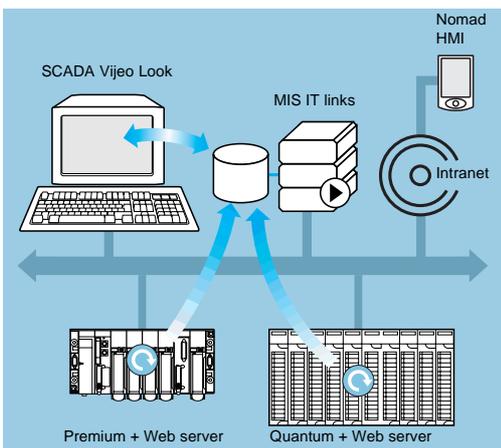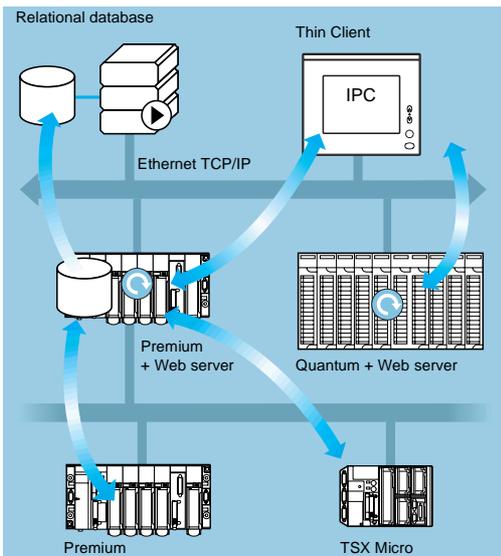


# Transparent Ready

## System approach

Embedded Web servers, FactoryCast HMI Web server

2

2.1

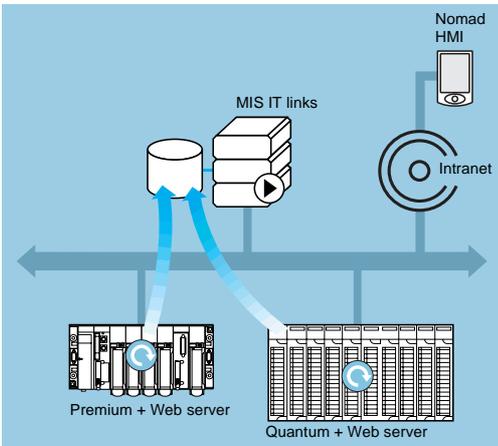


### Direct links with the information management levels

In this type of architecture FactoryCast HMI eliminates the need for intermediate devices (gateways), which are expensive to install and maintain, by establishing a direct link between the automation levels and the global information management levels (MES, ERP, etc).

The PLC directly archives information from the automation system in relational databases, which allows a "collaborative" automation system to be set up, making it easier to share data in real time.

This solution results in:

- Simplified architectures
- Lower installation, development and maintenance costs
- Increased reliability of information (the data is collected at source)
- Greater availability of data archiving

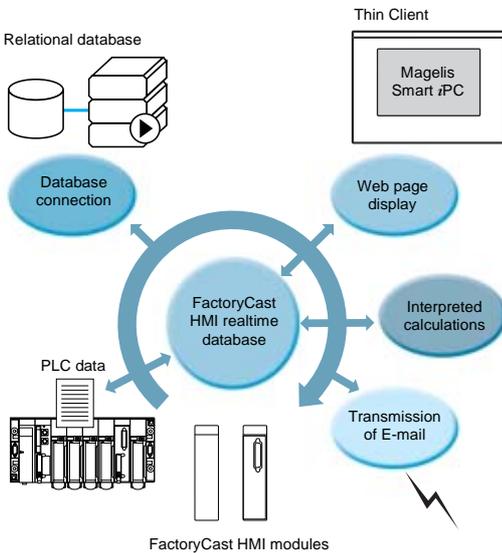

### Specialized HMI services

#### PLC acquisition and realtime database

With an internal architecture similar to that of an HMI/SCADA system, FactoryCast HMI modules manage their own variable database in realtime, independently of the PLC program. It is this variable database that is used to execute various functions, including internal processing, archiving, alarm, E-mail, etc.

Variables in this realtime database are updated using the automation system data acquisition service.

This service becomes operational once the following parameters have been set in the FactoryCast HMI software:

- Direct import of PLC variable/symbol databases (no double entry).
- Definition of the frequency of acquisition (period at which this variable is updated).

**Note:** A FactoryCast HMI application running in a Premium configured FactoryCast HMI module can access also the remote PLC variables in the architecture via a transparent network (X-Way/Uni-TE transparent protocols).

#### Characteristics:

- Maximum number of I/O variables per application: 1000 variables from PLCs
- Maximum number of internal variables per application: 100
- Acquisition frequency: 500 ms, minimum

### Specialized HMI services (continued)

#### E-mail transmission



The FactoryCast HMI module can, on a specific event, send E-mail completely autonomously to a predefined list of E-mail addresses. This function is executed independently of the PLC program.

The event that triggers the E-mail may be associated with the following:

- A PLC variable (I/O, internal variable)
- An alarm, a threshold overshoot
- A machine or process state
- An operator action, etc.




When an E-mail is sent to a destination E-mail address, it must pass through an SMTP (*Simple Mail Transfer Protocol*) server. This server receives the E-mail and waits for the recipient to acknowledge it. The E-mail service is compatible with all SMTP servers. A return address can be defined should delivery to the destination address fail.

#### Characteristics:

- Configuration of the SMTP server: Compatible with all SMTP servers
- Maximum number of E-mail: 100
- Contents of E-mail messages: Free text with embedded dynamic variable values (from the PLC) and hypertext links (unlimited)

#### Connection to relational databases

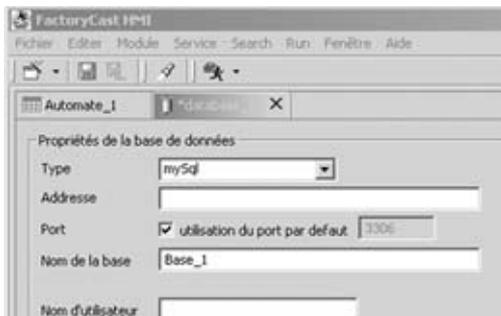

The FactoryCast HMI module can be connected directly and completely autonomously to the following remote relational databases:

- SQL Server
- MySQL
- Oracle


This connection enables all internal or process data to be archived so that it can be logged and traced.

The data can be archived (written) periodically and/or on a specific event. These variables can either be from PLCs (I/O bits, internal bits, internal words and registers) or local to the module. The FactoryCast HMI "Roll Over" function checks the size of tables by managing the maximum number of records. This circular data archiving function automatically deletes the oldest data and can be accessed by simply setting parameters in the FactoryCast HMI software.

#### Characteristics:

- Number of databases that can be connected: 3
- Number of tables that can be written per database: 10, maximum
- Number of columns per table: 50, maximum
- Type of database supported: Oracle, SQL Server and MySQL
- Automatic table creation: The FactoryCast HMI server automatically creates a table in the database if one does not already exist

#### Calculation functions

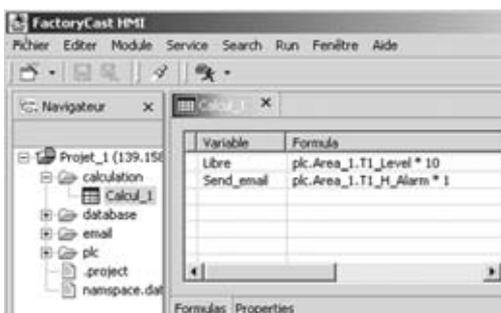

The FactoryCast HMI server can carry out various arithmetic and logical operations on a combination of variables from the HMI database and does this independently of the PLC processor. These calculations include, for example, scaling, formatting, logic processing for event triggering, etc.

This calculation function is provided in the form of spreadsheets where the formulae are defined in cells. The spreadsheets are interpreted and processed by the server. The result of each formula is associated with a new internal variable. The processing of each spreadsheet is initiated by a trigger.

# Transparent Ready


## System approach

### Ethernet TCP/IP communication service

#### Presentation

Transparent Ready products allow transparent communication on a single Ethernet TCP/IP network.

2  
2.2

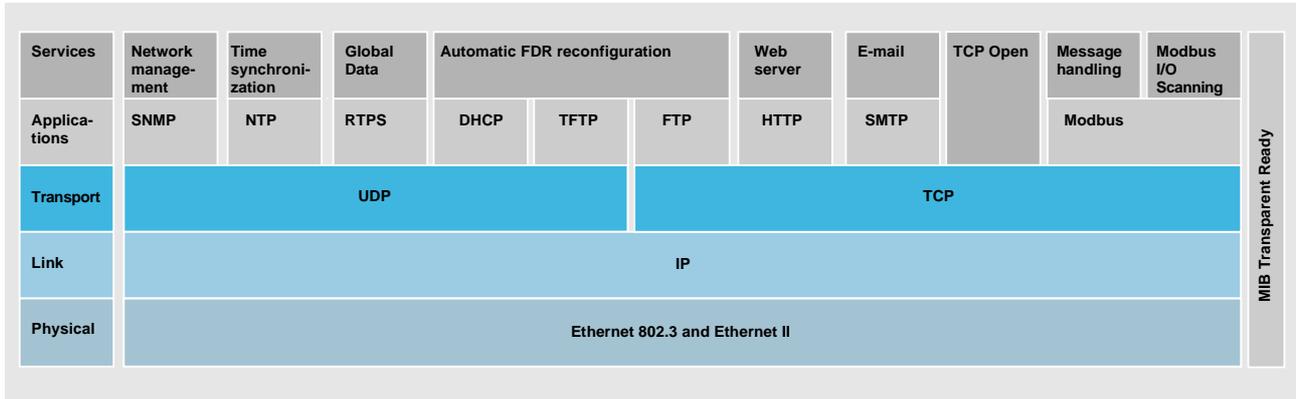

In addition to universal Ethernet services (HTTP, BOOTP/DHCP, FTP, etc), the Transparent Ready device communication services designed for use in automation applications include:

- Modbus TCP messaging for class 10, 20 or 30 devices.
- I/O Scanning service for class 30 devices.
- FDR (Faulty Device Replacement) for class 10, 20 or 30 devices.
- SNMP (Simple Network Management Protocol) network administration for class 20 or 30 devices.
- Global Data, for class 30 devices.
- Pass band management for class 30 devices (see performance levels on pages 2/24 to 2/27).
- NTP (Network Time Protocol) time synchronization for class 30 devices.
- Notification of SMTP events via E-mail for class 30 devices.
- TCP Open, optional, for class 30 devices.

The following pages present the various options available through all of these services in order to facilitate the optimum choice of solutions when defining a system integrating Transparent Ready devices.

#### Functions

##### Standard Ethernet services

##### HTTP "Hypertext Transfer Protocol" (RFC1945)

The HTTP protocol (Hypertext Transfer Protocol) is used for transmitting Web pages between a server and a browser. HTTP has been used on the Web since 1990.

*Web servers embedded into Ethernet TF devices are at the heart of the Transparent Ready concept, and are used to provide easy access to devices anywhere in the world from a standard browser such as Internet Explorer or Netscape Navigator.*

##### BOOTP/DHCP (RFC1531)

BOOTP/DHCP is used to automatically provide the devices with the IP parameters. This avoids having to manage the addresses of each device individually. Management is instead performed in a dedicated IP address server.

DHCP protocol (Dynamic Host Configuration Protocol) is used to automatically assign the devices their configuration parameters. DHCP is an extension of BOOTP. DHCP protocol is made up of 2 components:

- One for providing the IP network address,
- One for providing the IP parameters specific to the device from a DHCP server.

*Telemecanique devices can be:*

- *BOOTP clients allowing automatic recovery of an IP address from a server,*
- *BOOTP servers enabling a device to distribute IP addresses to the network stations.*

*Telemecanique uses standard BOOTP/DHCP protocols for its Faulty Device Replacement service (FDR).*

##### FTP "File Transfer Protocol" (RFCs 959, 2228, et 2640)

File Transfer Protocol (FTP) provides basic file sharing elements. Many systems use FTP protocol to exchange files between devices.

*Transparent Ready devices implement FTP for transferring certain data to or from devices, in particular when downloading firmware or user Web pages.*

#### Functions (continued)

##### Standard Ethernet services (continued)

###### NTP "Network Time Protocol" (RFC 1305)

NTP (Network Time Protocol) is used to synchronize the time of a client or server device from a time server. Depending on the network used, it provides the following time precisions based on the UTC:

- Several milliseconds on a local area network (LAN).
- Several tens of milliseconds on a wide area network (WAN).

###### SMTP "Simple Mail Transfer Protocol" (RFC 0821)

SMTP (Simple Mail Transfer Protocol) is an E-mail transmission service. It is used to send E-mail between a sender and a recipient via an SMTP E-mail server.

###### SNMP "Simple Network Management Protocol" (RFCs 1155, 1156 et 1157)

The Internet community developed standard SNMP for managing the different components of a network through a single system. The network management system can exchange data with SNMP agent devices. This function enables the manager to view the status of the network and devices, modify their configuration and feed back alarms in the event of failure.

*Transparent Ready devices are SNMP-compatible and can be integrated naturally in a network managed via SNMP.*

###### COM/DCOM "Distributed Component Object Model"

COM/DCOM (Distributed Component Object Model) or OLE (Object Linking and Embedding) is the name of the technology used in Windows components. This enables Windows applications to communicate transparently.

*These technologies are used in the OFS Data server software.*

Modbus TCP/IP function codes	dec	hexa
<b>Bits access</b> Read of n input bits	02	02
Read of n output bits	01	01
Exceptional read status	07	07
Write 1 output bit	05	05
Write of n output bits	15	0F
Read of 1 input word	04	04
Read of n input words	03	03
Write 1 output word	06	06
Write of n output words	16	10
Read device ID	43/14	2B/0E

Example of Modbus TCP/IP function codes supported for accessing data and diagnostics

#### Functions (continued)

##### Modbus communication standard

Modbus, the industrial communication standard since 1979, has been combined with Ethernet TCP/IP, which supports the Internet revolution, to make Modbus TCP/IP, a completely open Ethernet protocol. The development of a connection to Modbus TCP/IP requires no proprietary component or license purchase. This protocol may be easily combined with any device supporting a standard TCP/IP communication stack. Specifications can be obtained free of charge from the website: [www.modbus-ida.org](http://www.modbus-ida.org).

##### Modbus TCP, simple and open

The Modbus application layer is very simple and universally recognized. Thousands of manufacturers are already implementing this protocol. Many have already developed a Modbus TCP/IP connection and many products are currently available. The simplicity of Modbus TCP/IP enables any small field team, such as an I/O module, to communicate over Ethernet without the need for a powerful micro-processor or a lot of internal memory.

##### Modbus TCP, high-performance

Because of the simplicity of its protocol and the high speed of 100 M bits/s Ethernet, Modbus TCP/IP delivers excellent performance. This means it is possible to use this type of network in real-time applications such as I/O Scanning.

##### Modbus TCP/IP, one standard

An identical application protocol is used for Modbus serial link, Modbus Plus or Modbus TCP. This therefore makes it possible to route messages from a network to another without changing protocol. As Modbus is implemented above the TCP/IP layer, users can also benefit from the IP routing which enables devices located anywhere in the world to communicate without having to worry about the distance between them. Schneider offers an entire range of gateways for interconnecting a Modbus TCP/IP network to already existing Modbus Plus or Modbus serial link networks. For further details, consult our regional sales office. The IANA institute (Internet Assigned Numbers Authority) has assigned Schneider port TCP 502 (Well known port), which is reserved for the Modbus protocol. This protocol will shortly be also subject to an RFC (Request For Comments), documents which form standard references within the Internet community.


##### Modbus TCP/IP characteristics

- Maximum size of data:
- Read: 125 words or registers.
  - Write: 100 words or registers.

2

2.2

**Functions (continued)**  
**I/O Scanning service**

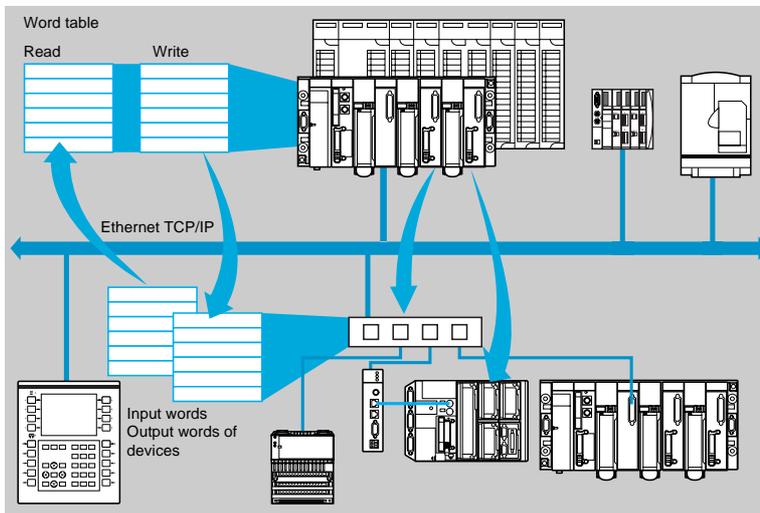

The I/O Scanning service can be used to manage the exchange of distributed I/Os on the Ethernet network after a simple configuration operation, with no need for special programming.

The I/Os are scanned transparently by means of read/write requests according to the Modbus Master/Slave protocol on the TCP/IP profile. This principle of scanning via a standard protocol enables communication with any device which supports a Modbus server on TCP/IP.

This service can be used to define:

- An %MW word zone reserved for reading inputs.
- An %MW word zone reserved for writing outputs.
- Refresh periods independent of the PLC scan.

During operation, the module:

- Manages the TCP/IP connections with each of the distributed devices.
- Scans the devices and copies the I/Os into the configured %MW word zone.
- Feeds back status words so that correct operation of the service can be monitored from the PLC application.
- Applies the preconfigured fallback values in the event of a communication problem.

An offer of hardware and software products which enable the I/O Scanning protocol to be implemented on any type of product which can be connected to the Ethernet network (please consult: [www.modbus-ida.org](http://www.modbus-ida.org)).


**Characteristics:**

- Each station can exchange a maximum of 120 words.
- Maximum size in the PLC managing the service:
  - 2 K words %MW in inputs and 2 K words %MW in outputs with manager PLC (64 stations max.),
  - 4 K words %MW in inputs and 4 K words %MW in outputs with manager PLC (128 stations max.).

**I/O Scanning service diagnostics**

I/O Scanning service diagnostics can be performed in 3 ways:

- By the application program from a data field specific to the PLC.
- From the debugging screen in the installation software.
- From the PLC system diagnostics function viewed with the Internet browser on a PC station.

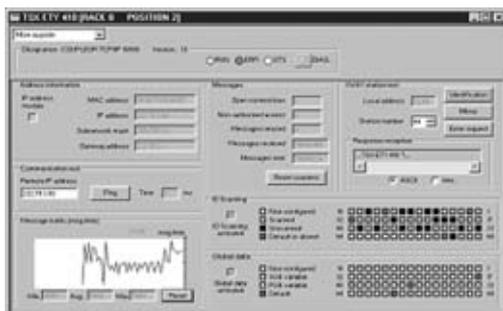

#### Functions (continued)

##### Replacement service for faulty devices (*Faulty Device Replacement*)

The Faulty Device Replacement service uses the standard BOOTP, DHCP, file management and TFTP technologies with the objective of simplifying Ethernet device maintenance.

It enables a faulty device to be replaced by a new product while guaranteeing its detection, reconfiguration, and automatic restart by the system, without difficult manual intervention.

The principal steps are:


- A device using the FDR service is faulty.
- Another similar device is taken from the maintenance pool, preconfigured with the "role\_name" (or identifier) of the device that is out of service, then reinstalled on the network.
- The FDR server can be:
  - Premium processor with embedded Ethernet,
  - Quantum processor with embedded Ethernet,
  - Premium Ethernet module: TSX ETY,
  - Quantum Ethernet module: 140 NOE 771,detects the new addition, configures its IP address and transfers all configuration parameters to it.

The substituted device verifies if all the parameters are indeed compatible with its own characteristics, then switches to operating mode.

2

2.2

**Functions (continued)**  
**Global Data service**

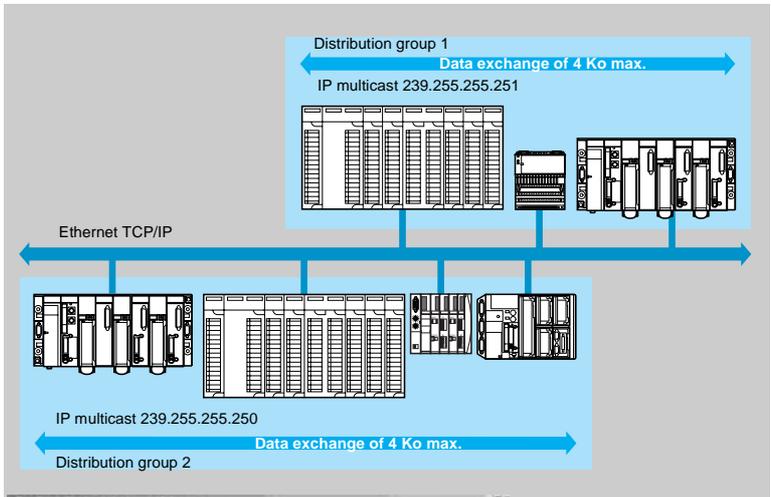

The Global Data service ensures data exchanges in real time between stations belonging to the same distribution group. It is used to synchronize remote applications, or share a common database among several distributed applications. The exchanges are based on a standard producer/consumer protocol, guaranteeing optimal performance while maintaining a minimum network load. This RTPS (Real Time Publisher Subscriber) protocol is promoted by the IDA (Interface For Distributed Automation) organization, and has already been adopted as a standard by several manufacturers.



**Characteristics:** A maximum of 64 stations can participate in Global Data within the same distribution group. Each station can:

- Publish one 1024-byte variable. The publication period can be configured from 1 to n periods of the MAST task of the processor.
- Subscribe to between 1 and 64 variables. Validity for each variable is controlled by Health Status Bits, linked to a refresh timeout configurable between 50 ms and 1 s. Access to a variable element is not possible. The total size of the subscribed variables reaches 4 K contiguous bytes.

In order to optimize Ethernet network performance further still, Global Data can be configured with the "multicast filtering" option, which together with switches in the ConneXium range, perform data broadcasting only on Ethernet ports, where there is a Global Data service subscriber station. If these switches are not used, Global Data is transmitted in "multicast" on all switch ports

**Global Data service diagnostics**

The diagnostics screens use a color code to show Global Data status:

- Configured/not configured/faulty.
- Published/subscribed.



Editeur de Global Data

**Unity Studio software suite: single Global Data entry point**

The Unity Studio software suite is the key component required on design office workstations used for designing and structuring distributed industrial automation projects.

The Unity Studio Global Data view enables the definition of Global Data distribution groups and the configuration of settings for published and subscribed station variables. During generation at each station level, this setting configuration is saved automatically to station files, thereby ensuring:

- Guaranteed consistency of communication between the distributed applications in question.
- Maximum productivity with respect to station configuration tasks.
- Minimized risk of errors.


# Transparent Ready System approach

## Ethernet TCP/IP communication service

**Functions (continued)**

**NTP time synchronization service**

**Presentation**

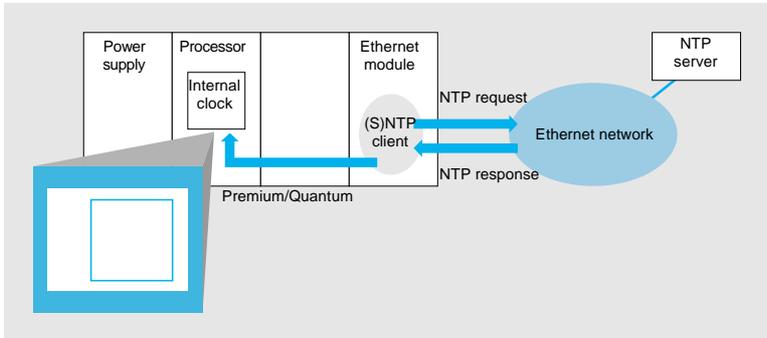

The time synchronization service is based on the NTP (*Network Time Protocol*) which is used to synchronize the time of a client or a server on Ethernet TCP/IP from a server or another reference time source (radio, satellite, etc).

**Operation**

The Ethernet TCP/IP communication modules in the Modicon Quantum Unity V2 and Premium Unity V2 automation platforms have an NTP client component. These modules can connect to an NTP server using a client request (unicast), in order to update their local time. The module clock is updated periodically (1 to 120 seconds) with an error of less than 10 ms for standard processors and less than 5 ms for high performance processors. If the NTP server cannot be reached, the Ethernet TCP/IP module switches to a standby NTP server.

Unity module and processor used		Predicted typical time service precision		
Ethernet modules	Ethernet modules with Unity processor	Clock synchronisation (1)	Event synchronisation	Time stamping (2)
TSX ETY 4103 TSX ETY 5103	TSX P57 0244M TSX P57 104M TSX P57 204M TSX P57 304M	± 1 ms typical ± 10 ms max.	= Clock synchronisation precision	= Clock synchronisation precision
	TSX P57 404M TSX P57 504M	± 1 ms typical ± 5 ms max.	+ Fast task time	+ I/O time
140 NOE 771 01 140 NOE 771 11	140 CPU 311 10 140 CPU 434 12U 140 CPU 534 14U	± 1 ms typical ± 10 ms max.	+ I/O time	
	140 CPU 651 50 140 CPU 651 60 140 CPU 671 60	± 1 ms typical ± 5 ms max.		

(1) Time difference between field input and central NTP server.  
 (2) Assuming input connected to the interrupt module.



The PLC processor clock is therefore itself updated with a precision of 5 ms for standard processors and 1 ms for high performance processors. A function block is available for reading this clock. In each PLC application, events or variables can be time-stamped.

The Ethernet module is configured via a Web page. The time zone can be configured. A time synchronization service (NTP) diagnostic Web page is also available.

Information on the time synchronization service (NTP) is also available in the Transparent Ready private MIB, which can be accessed via the SNMP network management service (see above).

**Functions (continued)**

**Electronic mail notification SMTP service**

**Introduction**

This simple mail notification service is a programmed service that allows PLC applications to report by exception conditions monitored by the PLC. The automation controller can automatically and dynamically create electronic mail to alert specified users with data, alarms and events - whether the recipients are local or remote.

Note: This service is available on the latest Premium and Quantum Ethernet modules & CPUs, when operating with Unity Pro software. A more comprehensive mail service, independent of the PLC application, is available on the FactoryCast HMI active web server modules (see page 2/11)

**Usage**

A simple yet powerful mechanism is used. Predefined email headers are linked together with the body of the mail which is created dynamically from the latest information in the automation application.

The user logic program can trigger the message based on a predefined event or condition. Using a function block, one of 3 predefined headers is selected and an email message with variable information and text (up to a maximum of 240 bytes) is created and sent directly from the PLC.

Each of the three mail headers contains these common predefined items –email recipient list, sender name and subject. This information can be defined and updated by an authorized administrator using the configuration web pages.



**Message creation and delivery**

The PLC application selects the appropriate header. The system architect may define the mail headers to indicate differing importance levels. For example :  
 ■ Header 1 could be "URGENT problem reported by PLC 10",  
 ■ Header 2 might be "WARNING at substation 10",  
 ■ Header 3 could be "INFO message from water system".

Differing lists of recipients between the three headers help to ensure that the right information quickly flows to the right recipients. The application can then add pertinent information to the body of the mail message such as the specific device, process or location.

Completed mail is then sent to an electronic mail server for expeditious distribution to the interested parties. These recipients could be engineers, managers, process owners etc.

**Security**

Each mail message can be protected by an optional login and password that is authenticated by the SMTP mail server. If, for additional security, the site's mail installation has changed the TCP port number from the default of 25, the port number can be changed in the PLC email configuration (via secured web page access).

**Configuration**

An authorized administrator can use a web page to easily configure the mail service. For each of the three mail headers, the sender; recipient list and subject message can be defined. The electronic mail server connection information such as IP address and security information can also be set from the web page.

**Diagnostics**

As all other Ethernet services in Premium and Quantum systems, the Mail Service has a Diagnostic Web page showing the complete, up to the second, status.

**Remote Monitoring**

These products provide diagnostic information for remote management applications following the SNMP network management standard. Information for the mail service is included in the Schneider Electric private MIB which is publicly available.



#### Functions (continued)

##### SNMP service protocol

The SNMP (Simple Network Management Protocol) protocol is used, from a network management station, to monitor and control all Ethernet architecture components and thus ensure rapid diagnostics if a problem occurs.

It is used to:

- Query devices such as computer stations, routers, switches, bridges or terminal devices (DTE) in order to view their status.
- Obtain statistics for the network on which the devices are connected.

This management software respects the traditional Client/Server model. However, in order to avoid confusion with other communication protocols using this terminology, we prefer to use the expression:

- Network manager for the Client application running on the computer station.
- SNMP agent for the server application that runs on the device.

Transparent Factory can be managed by any SNMP network manager, including HP Openview or IBM Netview.

Standard SNMP (Simple Network Management Protocol) is used to access configuration and management objects included in the MIB (Management Information Base) for the devices. These MIBs must comply with certain standards in order to be accessed by all managers on the market. However, depending on the device complexity, manufacturers can add certain objects to the private databases.

The Transparent Factory private MIB includes management objects specific to the Telemecanique offer. These objects simplify installation, implementation, and maintenance for Transparent Factory products in an open environment using standard network management tools.


The Transparent Factory products support 2 SNMP network management levels:

- Standard MIB II, a first level of network management, can be accessed via this interface. It lets the manager identify the devices forming the architecture and retrieve general information on the configuration and operation of the Ethernet TCP/IP interfaces.
- MIB Transparent Factory interface; management of the Transparent Factory devices is improved via this interface. This MIB includes a set of data that enables the network management system to supervise all the Transparent Factory services. The Transparent Factory private MIB can be downloaded from the Web server from any Ethernet Transparent Factory module in a PLC.

#### TCP Open optional service

##### Presentation

TSX ETY 110 WS/5103 Premium platform Ethernet modules support a number of communication protocols based on the TCP/IP standard. Among these, the Modbus protocol has public specifications and its simplicity recommends it for the needs of communication with third-party devices.

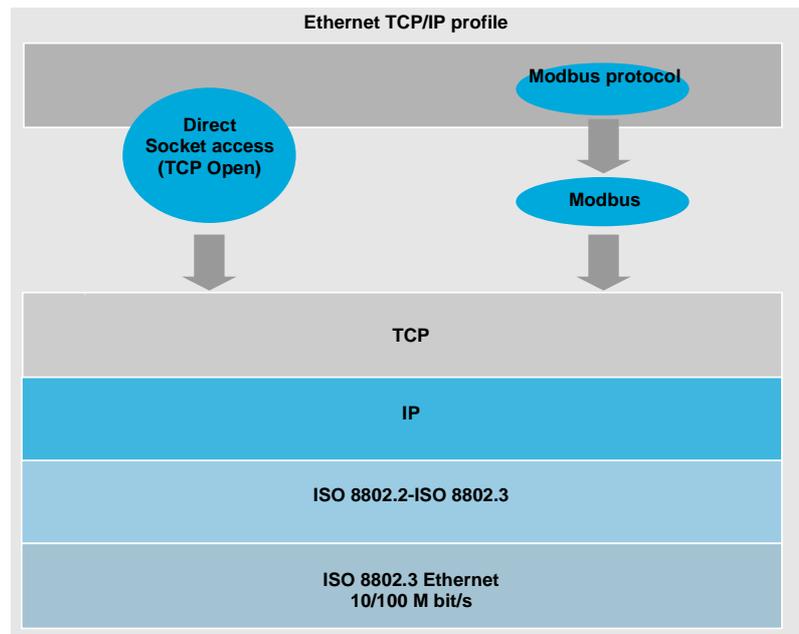

However, for certain applications, it may prove necessary to use other protocols. This is the case when, for example, users wish to integrate Premium platforms into existing architectures which use a particular communication protocol, possibly a proprietary one.

To meet these needs for open access, 2 interface levels are included in the Telemecanique offer:

- A library of basic functions, which can be used in C language, enables direct access to the socket interface on TCP. The user can thus create his own communication functions using SDKC development software and take advantage of the ease of use which this program offers in terms of development and debugging. Once generated, these function blocks are used in the application like any standard PL7 programming software function block.
- A library of basic function blocks known as EFs, which can be used directly in the application programs with PL7 language. These are the same as functions developed in C language seen earlier, but are designed for use by non-computer specialists. These EF function blocks are not modifiable.

##### Functions

Operating in TCP connection client/server mode, the basic functions on the Berkeley socket interface enable:

- Management of 16 connections on the Open profile out of a maximum of 32
- Creation of sockets and their attachment to any TCP port.
- Switching of these sockets to "listen for a connection request from a remote client" mode.
- Opening of a connection.
- Transmission and reception of data on these connections (8 bytes max.).
- Closing this connection.

#### TCP Open optional service (continued)

##### Description

The TCP Open offer consists of a CD-ROM containing the TCP/IP function libraries. Open access on TCP is only possible via TSX ETY 110WS (1) and TSX ETY 5103 Ethernet modules. With open access on TCP, all the basic functions of these modules can be used.

The TCP/IP **TLX CD TCP 50M** function library comprises:

- The SDKC program enhancement library that provides access to the module TCP/IP socket functions
- The user's manual in English (no printed version)
- EF elementary communication function blocks (Socket/Bind/Listen/Accept/Shutdown/Close/Send/Receive/Select/Set\_Socket Option/Connect) for installation using PL7 software (version ≥ V3.3)
- Higher level EF function blocks, provided by way of example, which can perform more advanced functions such as the complete sequence for establishing or closing a connection, or sending or receiving data. The source files for all these EF blocks are also supplied
- An example of a PL7 application communicating with a TELNET application on a PC

If customised function blocks are needed both the SDKC program for C language **TLX L SDKC PL741M** (with PL7) or **UNY SPU ZU CD 20E** (with Unity Pro) and the library of function blocks TCP Open **TLX CD TCPA33E** should be installed on the development station.

##### Setup precautions

The development of C language functions requires compliance with certain setup precautions:

- To set up these services, the user should be familiar with the TCP/IP profile
- In addition, since the SDKC program enables access to all the PLC internal resources, all the necessary precautions should be taken when developing EF communication blocks to avoid endangering the PL7 application, especially on the commonly fragile operating modes such as cold/warm restarts, response to a fault, etc
- The user should also take care to maintain the requests from the different communication profiles at a level compatible with the performance required by the application
- Finally, it is the responsibility of the client application software (PL7 or C program) to manage the operating modes for communication which may be specific to the application, for example the behavior if a remote device fails to respond or in the event of a break in connection

For these different reasons, we recommend that you consult your Regional Sales Office to ensure that your TCP protocol open access project is feasible.

(1) Open access on TCP requires TSX ETY 110 WS modules, version ≥ PV 03 and SV 2.9. In addition, it should be integrated on a configuration with a TSX P57 ●●3 processor (or TSX P57 ●●2 version > V3.3).

**Selecting the communication architecture**

When selecting an architecture, it is advisable to take performance into account at the earliest possible stage.

For this, the designer must:

- 1 Have a clear idea of his needs as regards:
  - quantity and type of devices to be interconnected,
  - volume and type of exchanges,
  - expected response times,
  - environment.
- 2 Compare his needs with the characteristics of the offers available and be aware that the precise performance level between any 2 points on an architecture is dependent on the weakest link in the chain, which can be:
  - a function of the hardware,
  - but also a function of the applications (size, architecture, OS, machine power, etc.) which are often poorly defined at this stage of project.
- 3 Select the most suitable architecture.

The objective of the following pages is to answer the second point by explaining the performance of the different components which constitute an Ethernet architecture, concentrating on the following 2 aspects:

- Processing capacity in terms of volume of exchanges (see pages 2/25 and 2/26).
- Application response time (see page 2/27).

**Introduction**

As in any communication system, the performance of an Ethernet architecture is linked to numerous parameters which depend on the:

- Hardware used:
  - network bandwidth,
  - resources of module or CPU with Ethernet embedded,
  - processor resources (PLC, PC or other CPUs).
- Application services used:
  - Modbus (or Uni-TE) industrial messaging handling service,
  - Global Data service, data scanning between PLC,
  - I/O Scanning service, data scanning of distributed I/O,
  - Others (Web access, TCP Open communication).

The difficulty in determining the correct size of an architecture is due to the fact that the majority of these parameters are linked.

*Nota : For purposes of simplification, the values shown in the tables which follow have been reduced. If these are adhered to, correct operation of the architecture is ensured. If the performance levels obtained are not sufficient, please consult our Regional Sales Office for a more detailed study.*

*Nota : The performance levels indicated depend relatively little on the size of messages. Limiting factors have much more to do with the number of messages. It is therefore necessary to group as much useful information as possible within the same message using the most suitable Modbus request.*

**Processing capacity in terms of volume of exchanges**

The methodology presented below in 4 steps can be used to determine the message processing capacity on Ethernet TCP/IP.

**Step 1: calculation of exchanges necessary for the application**

Using the tables below, calculate the exchanges necessary for the application, i.e. for each station on the architecture and for each service used, the number of messages to be transmitted and received per second.

Messages transmitted per second from		Station A	Station B	Station N	Total number of messages received per station
Messages per second sent to	Station A				R1
	Station B				R2
	Station N				Ri
Total number of messages transmitted per station		E1	E2	Ei	Network load $Cru = \sum [R1...Ri, E1...Ei]$
		Not applicable			

# Transparent Ready

## System approach

### Premium/Quantum platform performance

#### Ethernet TCP/IP network

2

#### Step 2: station processor processing capacity, system requests

Using the table below, compare the total number of messages received via the Modbus and Uni-TE service for each station (value R1, R2 or Ri) with the station processor processing capacity.

If the result of this initial calculation is positive, go to step 3.

Premium or Atrium platform	Messages being received	Messages being transmitted
<b>Communication by EFs or EFBs (PL7 or Unity Pro)</b>		
<b>Modbus requests</b>	<b>TSX 57 10</b>	4 mes/cyc
(1)	<b>TSX 57 20</b>	8 mes/cyc
	<b>TSX 57 30</b>	12 mes/cyc
	<b>TSX 57 40</b>	16 mes/cyc
	<b>TSX 57 50 (2)</b>	16/20 mes/cyc
<b>Quantum platform</b>	<b>Messages being received</b>	<b>Messages being transmitted</b>
<b>Communication by EFs or EFBs (Concept, ProWORX or Unity Pro)</b>		
<b>Modbus requests</b>	<b>CPU 113 02/03 (3)</b>	1 mes/cyc
(1)	<b>CPU 311 10 (2)</b>	1 mes/cyc
	<b>CPU 434 12●</b>	1 mes/cyc
	<b>CPU 534 14●</b>	1 mes/cyc
	<b>CPU 651 ●0 (2)</b>	16 mes/cyc (4)
	<b>CPU 671 60 (2)</b>	16 mes/cyc (4)

Does not constitute a limiting factor


2.3

mes/cyc: number of messages being received per cycle from the PLC master task (typical cycle from 50 to 100 ms).

#### Step 3: bus or network module processing capacity

For each station, compare the total number of messages received ( $\Sigma$  [values Ri, Rj] and the total number of messages transmitted ( $\Sigma$  [values Ei, Ej] for station N, for example) with the bus or network processing capacity shown below. If the result of this second calculation is positive, go to step 4.

Processing capacity of Ethernet connections	Premium Ethernet TCP/IP			Quantum Ethernet TCP/IP	
	TSX ETY 110/210 TSX ETY 110WS	TSX ETY 4103/5103 TSX WMY 100 (5) TSX P57 10/20/30/40	TSX P57 50	140 NOE 771 ●● 140 NWM 100 00 (5)	140 CPU 65 150/160 140 CPU 67 160
Message transactions	60 transactions/s	450 transactions/s	500 transactions/s	350 transactions/s	350 transactions/s
Scanning I/O polling	Service not available	2000 transactions/s	2000 transactions/s	2000 transactions/s	2000 transactions/s
Global Data subscriptions		800 transactions/s	800 transactions/s	800 transactions/s	800 transactions/s

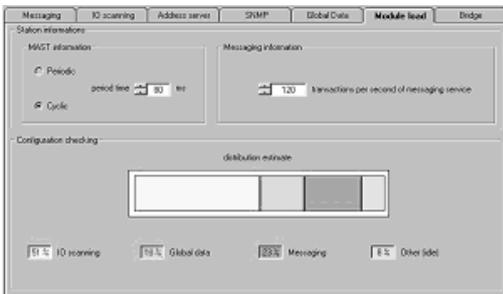

#### Characteristics summary

- Modbus requests:
  - 125 words or registers in read access,
  - 100 words or registers in write access.
- Global Data: 1024-word published variable, subscription to a maximum of 64 variables, with a maximum size of 2 K %MW.
- I/O Scanning with maximum size in the PLC managing the service:
  - 2 K %MW in inputs and 2 K %MW in outputs with manager PLC limited to 64 stations,
  - 4 K %MW in inputs et 4 K %MW in outputs with manager PLC limited to 128 stations (TSX P57 50, 140 CPU 65 150/160 et 140 CPU 67 160).

(1) A temporary overload on several PLC cycles, due, for example, to an adjustment terminal or the temporary connection of an Internet browser, is acceptable.  
 (2) Only with Unity Pro.  
 (3) Only with Concept/ProWORX.  
 (4) With Unity Pro version V2.0, 1 message/cycle with version V1.0.  
 (5) I/O Scanning and GobaI Data services are not available for TSX WMY 100 and 140 NWM 100 00 modules.

# Transparent Ready

## System approach

### Premium/Quantum platform performance

#### Ethernet TCP/IP network

2

2.3

#### Step 3: bus or network module processing capacity (continued)

##### Network bandwidth management in the Ethernet TCP/IP modules

The bandwidth management service shows load level for the Ethernet module. This enables the user to monitor any drift and anticipate possible problems. Ethernet module load is indicated in 3 ways:

- Anticipated load in the PL7 configuration screen.
  - Actual load in the PL7 diagnostics/debugging screen, as well as in Web diagnostics pages. The load is displayed as a bar graph, animated in real time.
  - In the SNMP interface for access to the SNMP network manager.
- The bandwidth is shown as a percentage for each of the following services:
- Modbus (and Uni-TE) message handling.
  - I/O Scanning.
  - Global Data.
  - Other.



#### Step 4: network load


In spite of the large bandwidth of an Ethernet Network (100 Mbit/s), the user must ensure that the actual application load does not exceed 25 to 30 % of the hypothetical network capacity. If this should occur, this load must be reduced via a switched architecture (use of switches). See page 2/32.

#### Application response time

##### For the Modbus (or Uni-TE) messaging handling service

PLC-module processor exchanges are synchronous with the PLC cycle, in the same manner as the input/output exchanges. When an event appears, (input switching to 1 for example), a message can only be transmitted after this input has been taken into consideration (start of the following cycle) and the PLC program has been executed, i.e. approximately 1.5 cycles after the event has appeared.

Network access time (NAT) shown in the table below as ms, totals the module transit time and the delay before the message can be transmitted across the network.

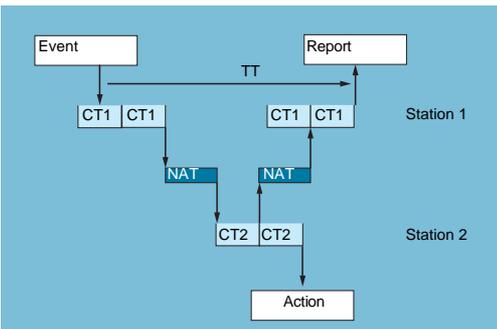

Processing Modbus message requests	Premium Ethernet TCP/IP		Quantum Ethernet TCP/IP	
	TSX ETY 110/210 TSX ETY 110WS	TSX ETY 4103/5103 TSX WMY 100 TSX P57 10...57 50	140 NOE 771 ●● 140 CPU 113/311 ●● 140 CPU 434/534 1●	140 CPU 65 150/160 140 CPU 67 160
Network access time NAT	< 25 ms	< 10 ms	< xx ms	< 10 ms

Transaction time TT includes the delay between the transmission of a message from a client station 1, its reception by a server station 2, processing the request, sending back the response and its acceptance by station 1 (update of an output for example). As the block diagram above shows:


- The duration of the transaction will be between:
 
$$TT = 2 \times CT1 + 2 \times NAT < TT < 4 \times CT1 + CT2 + 2 \times NAT$$
- Average duration is:
 
$$TT_{ave} = 3 \times CT1 + 0.5 \times CT2 + 2 \times NAT$$

#### For the Global Data service

The transaction time (TT) includes the delay between publication of a Global Data by station 1, its reception and processing by remote station 2 and its retransmission to the initial station 1:

For an exchanged variable:

- If  $CT < 5$  ms, transaction time:  $TT = 5$  to  $6 \times CT$
- If  $CT \geq 10$  ms, transaction time:  $TT = 3 \times CT$

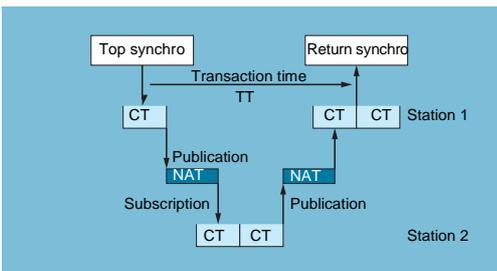


# Transparent Ready

## System approach

### Premium/Quantum platform performance

### Ethernet TCP/IP network

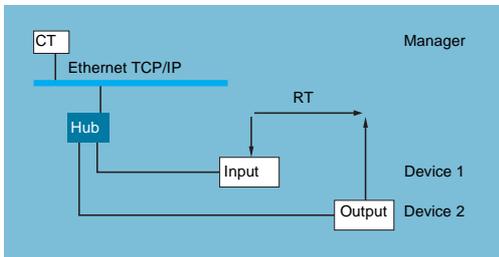


#### Application response time (continued)

#### I/O Scanning service

The RT application response time include the delay between getting data from a remote input and up dating remote output. It includes PLC application treatment time.

This RT response time is composed of following parameters:

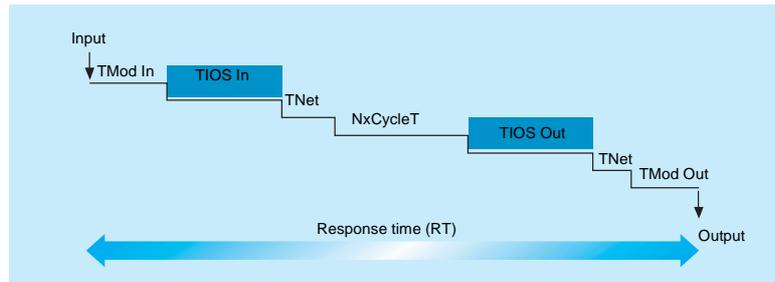

- TMod In and TMod Out: response time of the read/written device excluding the input circuit transition (TMod depends of the device, but commonly between 1 to 8 ms).
- TIOS In and TIOS Out: time between two scanning of the same read device (0.3 ms x number of device scanned and at least the pooling rate configured. TIOS is executed in parallel of the CPU cycle time, so could be hidden for the RT response time).
- N: number of PLC CPU cycles.
- CycleT: CPU cycle time.
- Tnet: propagation time on the network (depending of the application, but commonly Tnet is 0.05 ms at 10 Mbit/s and 0.005ms at 100 Mbit/s).

The RT response time could be estimated using the following formulas:

■ TRmin, minimal response time with TIOS hidden and 1 CycleT:  
 $TR_{min} = T_{mod\ In} + 0 \times T_{IOS\ In} + T_{net} + 1 \times CycleT + 0 \times T_{IOS\ Out} + T_{net} + T_{mod\ Out}$


■ TRtypic, typical response time (with 0,5 TIOS hidden and 2 CycleT:  
 $TR_{typic} = T_{mod\ In} + 0.5 \times T_{IOS\ In} + T_{net} + 2 \times CycleT + 0.5 \times T_{IOS\ Out} + T_{net} + T_{mod\ Out}$

■ TRmax, maximal response time with TIOS not hidden and 3 CycleT:  
 $TR_{max} = T_{mod\ In} + T_{IOS\ In} + T_{net} + 3 \times CycleT + T_{IOS\ Out} + T_{net} + T_{mod\ Out}$

The TMod In and TMod out response time are shown below:

Type of distributed I/O	Response time	Mini	Typical	Maxi
Momentum 170 ENT 110 02	TMod In	1 ms	1 ms	1 ms
	TMod Out	5 ms	5 ms	5 ms
Momentum 170 ENT 110 01	TMod In or TMod Out	4 ms	6 ms	8 ms
Advantys STB NIP 2212	TMod In or TMod Out	2 ms	3 ms	4 ms

The TIOS In and TIOS Out times measured between two scanning are shown below:

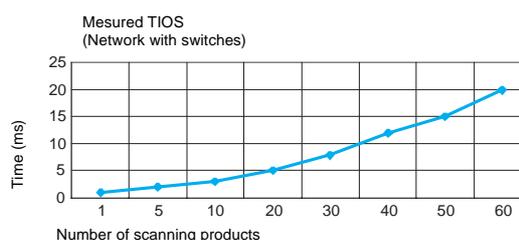

### Presentation

Industrial Ethernet networks can use various standards. In each case, a set of rules must be respected when determining what topology will be produced and with what performance level.

The ConneXium offer comprises a complete family of industrial products used to build a network architecture: hubs, switches, transceivers and cables. Wiring rules pertaining to the ConneXium offer are described on pages 2/28 to 2/33.

### Characteristics

#### General characteristics for industrial Ethernet standards

Standard	Date rate (Mbit/s)	Medium	Type of connector	Useable bandwidth (on automation network)	Advantages
10BASE5	10	Thick coaxial cable (yellow)	15-way SUB-D (AUI)	8 %, i.e. 800 Kbit/s	Cost, Ethway compatibility
10BASE-T	10	Twisted shielded pair (SFTP) (1)	RJ45	8 %, i.e. 800 Kbit/s	Cost
10BASE-FL	10	Fibre optic (generally 62.5/125 multimode 1300 µm (2))	ST or MT-RJ	8 %, i.e. 800 Kbit/s	Immunity, confidentiality
100BASE-TX	100	Shielded twisted pair (SFTP)	RJ45	40 %, i.e. 40 Mbit/s	Data rate (x 50)
100BASE-FX	100	Fibre optics	SC or MT-RJ	40 %, i.e. 40 Mbit/s	Immunity

(1) SFTP cables (Shielded and Foiled Twisted Pair) are available in 2 versions:

- UL 1581 vertical tray, NFC 32070 level C1, IEC 332-1.
- Reaction to fire compliant with NFC 32 070 # class C2 and IEC 332-1, Low Smoke Zero Halogen (LSZH) and UL 1581 VW1.

(2) The multimode fiber is Low Smoke Zero Halogen as per HD.624-7, with reaction to fire complying with NFC 32 070 # class C2 and IEC 332-1.

### Installation principles

The Ethernet 802.3 Link Layer is based on a collision detection mechanism (CSMA CD). Each station (DTE, Data Terminal Equipment) sends its data when necessary and verifies if the frame has been correctly propagated. If a collision with a frame sent by another station is detected, the station repeats the message after a timeout, which increases the network load and thus the probability that another collision will occur.

The transceivers or hubs (repeaters) are used to regenerate the signal once the physical limits of the medium have been reached. They also propagate collisions, if there are any.

Because of the transmission time needed to send data from one end of the network to the other, a maximum network length exists, beyond which collisions might not be detected by the sender. For this reason, and for each technology, a network size limit has been set. This is described as the "maximum network diameter" within a same collision domain.

#### Architectures in a same collision domain


Various architectures may exist, depending on each standard:

- Line or bus topology, using transceivers.
- Star network topology, using hubs.
- Tree network topology, using hubs.

Transceivers are also used for transmitting signals between 2 dissimilar media such as fiber optic and twisted pair cables.

In addition, the hubs (or concentrators) are also used to transmit signals among several media (ports).

The transceivers and hubs are “plug and play” devices.

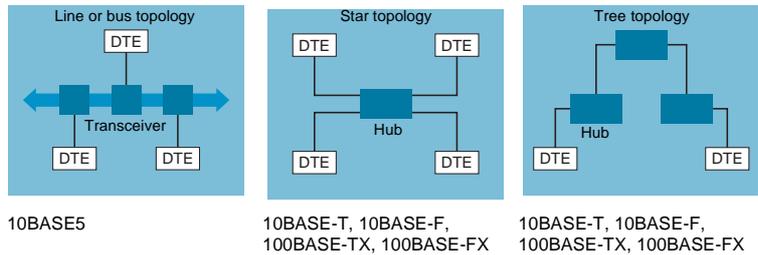

Note: in the information that follows, the terms “hubs” and “repeaters” are used interchangeably.

#### Rule 1: to respect the “maximum network diameter” within a same collision domain

Depending on the Ethernet standard employed, the network size can vary. To define the correct architecture, the 2 constraints of maximum segment length and maximum network diameter must be respected. The Schneider Electric ConneXium performances make it possible, in some situations, to surpass the limits of the 802.3 standard.

Ethernet standard	Maximum segment length (physical limit)		Maximum network diameter (limited by collisions)	
	According to standard 802.3	With ConneXium products	According to standard 802.3	With ConneXium products
10BASE5	500 m (50 m for a drop cable)		1.800 m (2.800 m with fiber optic segment)	
10BASE-T	100 m		500 m	1.000 m
10BASE-FL or mixed (FL and T)	2.000 m	3.100 m (1)	2.500 m	3.100 m (1)
100BASE-TX	100 m		200 m	
100BASE-FX in Half Duplex	412 m		228 m or 412 m between 2 DTE devices	
100BASE-FX in Full Duplex	2.000 m	3.000 m with multimode 15.000 m with monomode (1)	228 m or 412 m between 2 DTE devices	

(1) Depends on the optical budget and fiber attenuation.

**Installation rules (continued)**

**Rule 2: for each technology, respect the following rules within the same collision domain**


**10BASE5**

Between 2 DTE (Data Terminal Equipment) devices, a maximum of 2 repeaters or 1 repeater with 2 half-repeaters (half-repeaters ensure transmission between a copper and a fiber optic medium):


- Drop cable, 50 m length max.,
- One segment, 500 m length max.,
- Between 2 fiber optic half-repeaters, 1000 m length max.

Examples:

- All copper, 1,800 m length max.

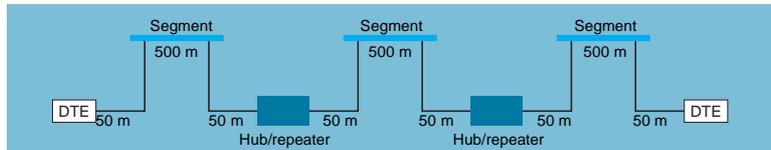

- Mixed copper/fiber optic, 2,800 m length max.

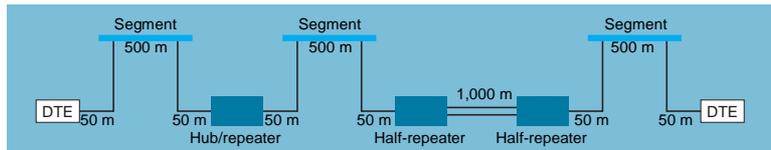


**10BASE-T/10BASE-F**

Between 2 DTE devices, a maximum of 5 segments and 4 hubs (or repeaters).


- Topology of 5 segments and 4 hubs (or repeaters): each 10BASE-FL segment must have a length of < 500 m.
- Topology of 4 segments and 3 hubs (or repeaters): the 10BASE-FL inter-repeater segments must have a length of < 1,000 m, and the 10BASE-FL segments between hub and DTE devices must have a length of < 400 m.

Examples:

In the following 2 topologies, distances are usually given for the 10BASE-T standard, with distances for the 10BASE-F standard within parentheses.

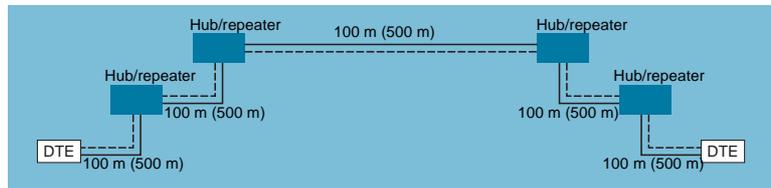

Maximum 500 m in 10BASE-T, 2,500 m in 10BASE-F.

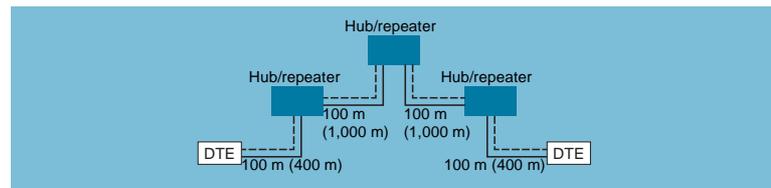

Maximum 400 m in 10BASE-TX, 2,800 m in 10BASE-FX

**Installation rules (continued)**

**Rule 2: for each technology, respect the following rules within the same collision domain (continued)**


**100BASE-TX/100BASE-FX**

This Ethernet standard defines 2 classes of hubs (or repeaters):


- Class 1 hubs: Maximum of 1 hub in a same collision domain.
- Class 2 hubs (for ConneXium repeaters): Maximum of 2 hubs in a same collision domain.

Examples:


In the following 4 topologies, distances are usually given for the 100BASE-TX standard, with distances for the 100BASE-FX standard within parentheses.

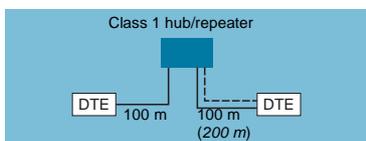

200 m max. in 100BASE-TX, 300 m in mixed

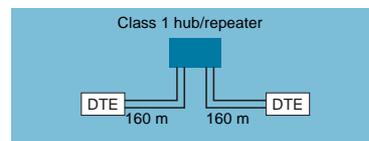

320 m max. in 100BASE-FX

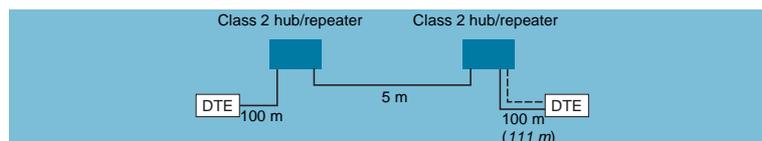

205 m max. in 100BASE-TX, 216 m in mixed



228 m max. in 100BASE-FX

#### Architectures with several collision domains

Switched devices enable the limits of the above-described architectures to be increased. Switches are used for communicating between 2 or more collision domains. Communication for the upper layers is guaranteed among the different ports and collisions at the link layer level are not propagated (filtering).

Switches are “plug and play” devices that can be remotely administered via SNMP or HTTP. They essentially contribute 2 functions:


- Extension of the architecture to surpass the “maximum network diameter”.
- Improvement of performance by a better allocation of bandwidth due to reduction in collisions and network load. In addition, switches in the ConneXium range support multicast filtering via the standard GARP/GMRP protocol, which optimizes performances of the Global Data service. With these products, multicast frames are transmitted only on switch ports where stations subscribing to the Global Data service are connected. ConneXium switches also support the Faulty Device Replacement (FDR) service, as well as the Transparent Ready private MIB for managing devices via the SNMP network management protocol.

#### Rule 3: to be respected when switches are used


- Switches are DTE devices that can be connected to hubs or directly connected to devices. Rules 1 and 2, mentioned previously, thus apply.
- When 2 switches are connected, the line can be in Full Duplex, which removes the risk of collisions and allows the effective data rate to be doubled. The rules related to the collision domain thus do not apply, and only those imposed by the physical limits should be observed.

For example, 2 switches may be connected on their 100BASE-FX ports via a fiber optic cable 3,000 m in length.

Examples:

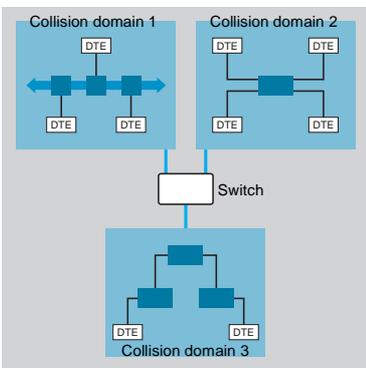

Switch used to isolate several collision domains (reduction of the network load in order to improve performance).

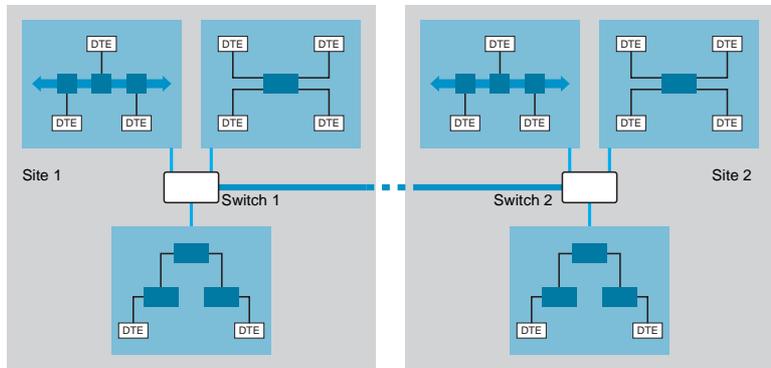

Switches used to extend the architecture to provide a link between 2 buildings, for example.

Maximum distances:

- 100BASE-TX: 100 m between 2 switches.
- 100BASE-FX: 2,000 m between 2 switches, 3,000 m with ConneXium switches and up to 40 km using monomode optical fiber (outside supply).

#### Routers

In general, routers are used at the Enterprise's network level, in order to link different units or sites. They are sometimes associated with security functions such as firewalls for filtering remote access.

A router must be configured to enable it to recognize where messages must be routed. Routing mechanisms are based on the IP address. Stations are grouped on the same subnet according to their IP addresses and their subnet mask.

Every message addressed to a remote network will be transmitted to the router, which ensures routing to the correct destination.

All of our Ethernet modules can be configured with a default gateway address and a subnet mask, complying with the IP standard.

On the factory floor level, a switch is less expensive than a router, performs better, and is easier to install ("plug and play").


#### Redundancy

The architectures previously described can be created to have greater availability by using hubs or specific switches, linked to redundant copper or fiber optic rings. If the ring is broken, communication is seamlessly restored in less than 500 ms. These products are available with the possibility to create a redundant power supply.


Associated with the Warm or Hot Standby offers, they guarantee maximum availability of the automation installations.

The various possible redundant topologies are:


- 1 10 Mbit/s copper or fiber optic redundant ring topology, with redundant hubs.
- 2 100 Mbit/s fiber optic ring redundant topology with redundant switches: maximum commutation time from the "normal" line to the "emergency" line of 500 ms for a redundant ring with 50 switches.
- 3 100 Mbit/s redundant fiber optic multiple ring topology with redundant switches: maximum commutation time from the "normal" line to the "emergency" line of 500 ms.

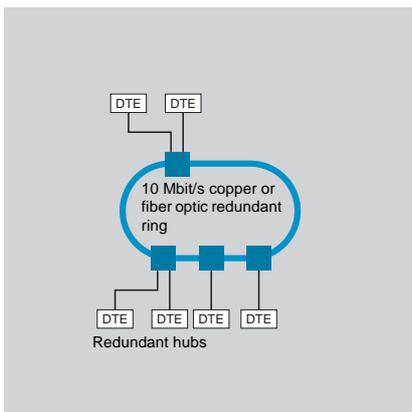

1

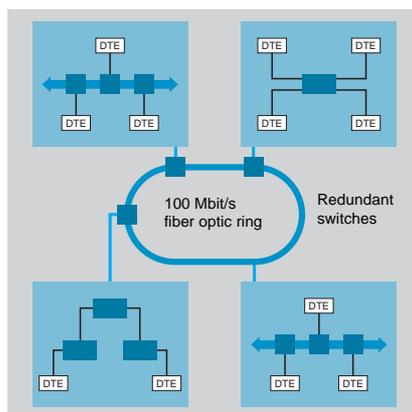

2

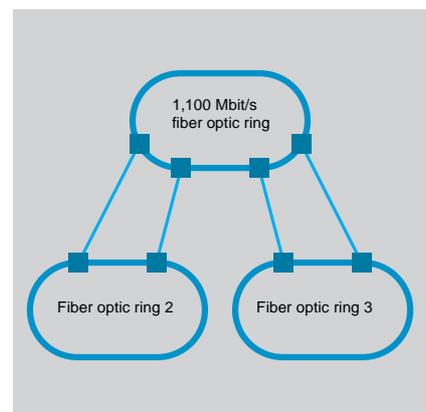

3

#### Transparent Ready Power Equipment


The application of Transparent Ready to electrical distribution power equipment is based on the concept of the Transparent Ready Power Equipment offer.

This is an optimized architecture in which the Transparent Ready services are mutualized within the EGX gateway, while providing communicating products built into the electrical equipment (switchboard) with transparent connectivity for any Modbus client on TCP/IP.

Once the parameters of the EGX gateway have been set, the user therefore has the benefit of very simple (see below) ready-to-use functions such as:

- The display of summary pages on instantaneous measurements and the status of the electrical equipment.
- The display of detailed electrical data on all circuits (rms current (A), actual power (kW), power factor, active and reactive powers, etc).
- The logging of standard data, power, trends, etc.
- The display of logs.
- Exporting data tables in standard Windows format.

The Web server embedded in the electrical equipment does not interfere with the Modbus communication flows from the Modbus clients on the Ethernet network.

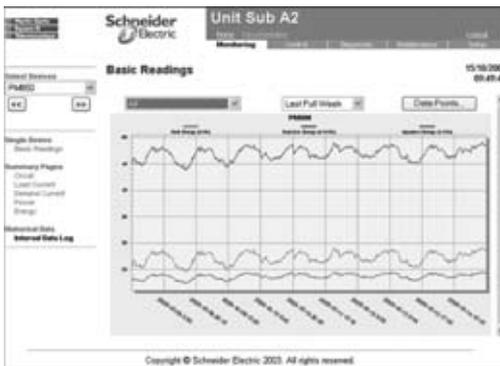

#### Web Page Generator

The Web Page Generator is a software tool for creating Web pages, designed for the installer of the Transparent Ready Power Equipment. Its purpose is the automatic creation of Web pages, according to the actual configuration of the electrical switchboard.

It includes a library of electrical distribution and motor control products such as:

- PM 800/500 power meters.
- Micrologic digital protection relays (Masterpact).
- Sepam 2000 and Sepam 20/40/80 digital protection relays.
- CM 3000/4000 circuit monitors for measuring and analyzing power quality.

It automatically creates the corresponding Web pages for each of the products connected on the Modbus (SL) serial link built into the electrical equipment and declared by the installer. It also automatically produces summary pages, providing the operator with an overall view of the status of his equipment. It also integrates an FTP client in the EGX gateway, which authorizes the immediate downloading of the HTML pages that have been created.


The level of knowledge required to carry out these operations has been set at a deliberately low level.

The operating mechanisms of the Web pages created in this way are described on page 2/42. The HTML pages produced are standard format which can be edited further if necessary, using standard word processing or HTML tools.

# Transparent Ready System approach


## Application to electrical distribution

### Mechanism for dynamic reading via the Web

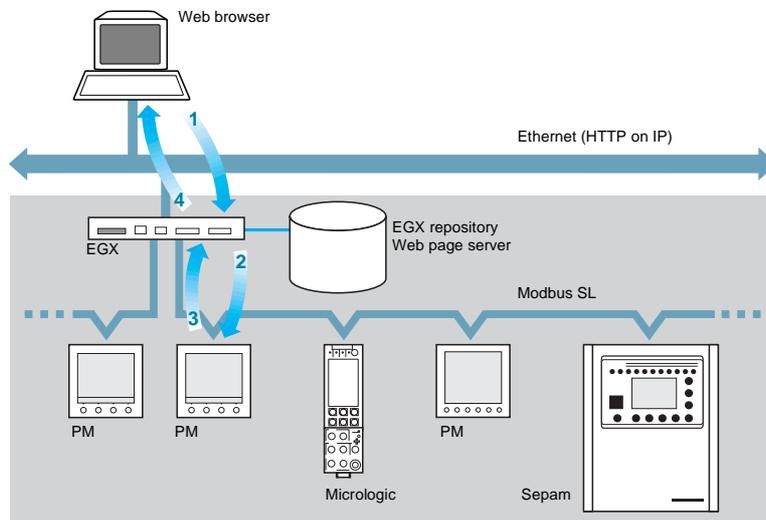

2

The EGX gateway uses HTML language for serving the Web pages containing dynamic values associated with the products on the Modbus SL link, and is thus compatible with all Web browsers. This mechanism is totally transparent for the user.

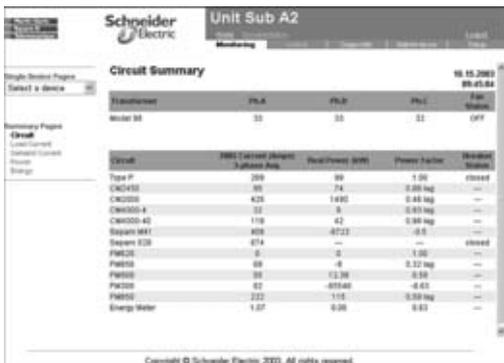


When HTML pages are created, each dynamic data location in the page causes a "<PL>tag" to be inserted which specifies the characteristics of the Modbus service required for finding the value of this variable, as well as presentation data for this variable (Modbus function code, Modbus address, register no., LSB order, unit). When the Web page is viewed (action 1, reception of an HTTP request from the Web client), the EGX gateway analyzes the contents of the requested Web page, detects any "<PL> tags", then executes the Modbus services required for reading the dynamic variables (actions 2 and 3), fills in the HTML page accordingly and sends it all back as if it were a static page (action 4). The HTML page is displayed on the browser screen.

2.5

The page is automatically updated by the browser every 5 seconds.

### Transparent access mechanism via Modbus messaging

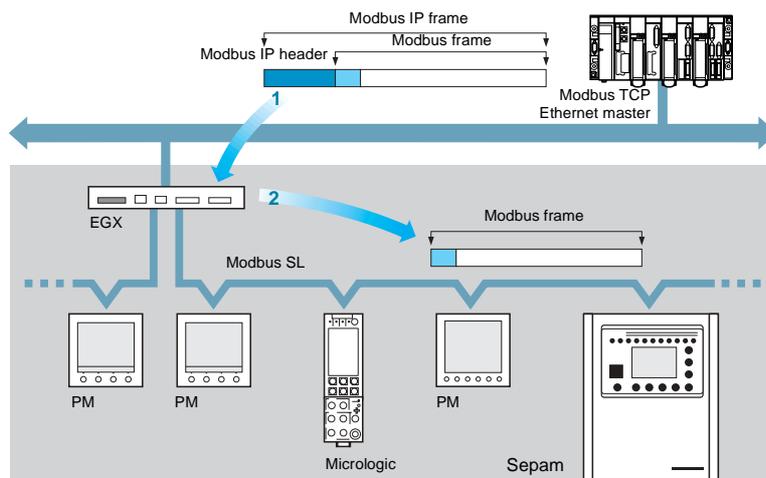

When accessing product data on the Modbus SL link, via Modbus messaging, the gateway has no added value other than translating addresses, encapsulating and unencapsulating Modbus frames, whatever function code is used.

The gateway thus provides products on the Modbus SL serial link with the Ethernet pass band and a multi-master operating capability. The latter function is also effective when the Modbus master is connected directly to one of the two Modbus SL ports on the EGX gateway (configured this way).



## Unity Studio for the development of a distributed project

The Unity Studio software suite is the key component required on design office workstations used for designing and structuring distributed industrial automation projects.

Distributed automation projects require the involvement of experts from many different domains (electrical, mechanical and hydraulic engineering, instrumentation, P&ID, communication, HVAC/climate control, etc.) in turn requiring various specialist software applications.

The Unity Studio software suite offers designers of industrial distributed automation projects the possibility of using all these tools in conjunction.

**The objective of the Unity Studio software suite is to:**

- Provide a unique structural representation of the project shared by experts in all specific domains.
- Increase the productivity of each expert.


## “All-in-one” software suite

Unity Studio is an all-in-one software suite based on Microsoft's graphic design tool Visio 2002 Professional. It is supplied with the following software as standard:

- MS Visio 2002.
- Unity Studio manager for the management of distributed applications.
- Unity Pro XL for the programming of Atrium, Premium and Quantum platforms.
- OPC Factory Server (OFS) for accessing and exchanging data in the architecture.
- PowerSuite for the setup of Altivar speed drives.
- XBT-L1000 for creating Magelis HMI applications.
- Microsoft Visual Basic for Applications (VBA) for the development of customized functions.

Unity Studio Manager tools allow you to create direct links with other Schneider Electric applications, or with third-party software applications.

In addition to this, the Unity Developer's Edition (UDE) software package provides an advanced open development solution for the programming of user functions and the development of interactive interfaces with other software applications (programming in C++, VBA, VBA macros, etc.).

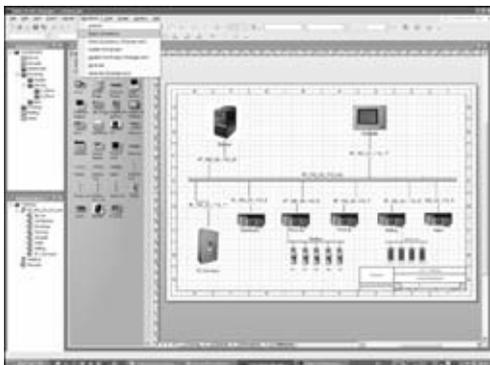

## Project views

### Graphical project views


The Unity Studio software suite, using the Visio 2002 Professional graphical engine, enables you to create project views in specific pages:

- **Process or machine view**, a unique representation shared by all specialist experts/consultants working on the project (mechanical, hydraulic and electrical engineering, etc.).
- **View of the distributed automation architecture**, graphical representation of the project's automation devices and communication networks.


These views are composed using components classified by specific application (construction, mechanical, hydraulic, electrical engineering, etc.). Visio libraries are enhanced with Schneider components. The creation of graphical views is achieved by dragging and dropping shapes from the libraries to the tabbed pages.

Components, their links and related properties composing the project views are entered once into the graphical views and shared with:

- other views,
- other Unity Studio suite software, and external software applications.

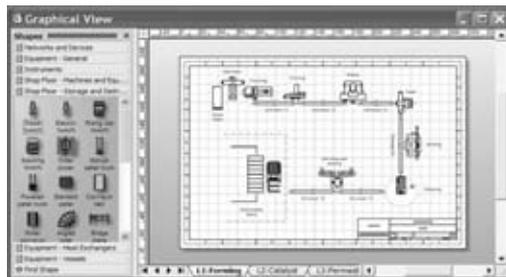


Graphical view of the process or machine

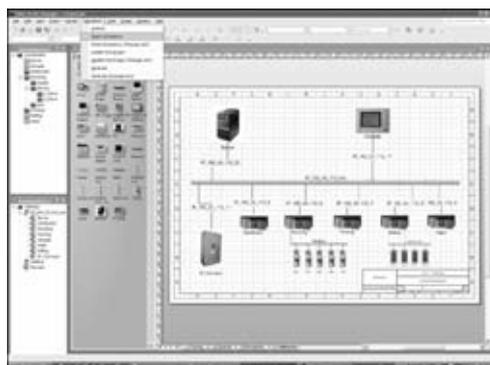


Graphical view of the distributed automation architecture

2

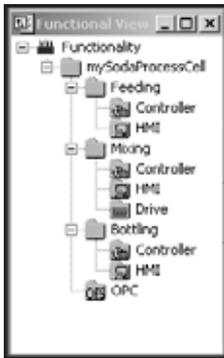

Functional view



Topological view

### Project views (continued)

#### Functional view

The functional view is a structured tree diagram of the entire set of machine or process functions. It is taken from the graphical view of the process or machine.

#### Topological view

The topological view is composed using the control architecture graphical view. This topological view displays the communication networks and connected devices in a folder structure.

### Object libraries

The Unity Studio software suite supplies open libraries of objects that can be re-used in graphical views:

- Visio 2002 Professional libraries.
- Teleanique automation product library.

Each object can be given its own parameters (type of valve, etc.) by using predefined properties, or be enhanced by applying customized properties.

### Adding new objects

The numerous libraries supplied can be expanded as needed by:

- Downloading Visio objects available online, covering all industrial fields (Microsoft Visio site, product reseller sites or sites specialized in Visio objects).
- Creation of objects by the user.

2.5



Process library



Schneider Electric automation product library

### Direct-access hyperlinks


From the Unity Studio project views, it is possible, at any time, to create hyperlinks to:

- All document types in .xls, .doc, .pdf formats, etc.
- Web pages via a URL.
- Software tools for configuration, network diagnostics, production management, etc.

### Graphical view of the distributed automation architecture

The application view of the Unity Studio software suite is used for centralized management of information related to the distributed applications.

- 1 Assignment of an automation application to each station in the architecture.
- 2 Assignment of the settings or programming tool for each station.
- 3 Creation and location of files for each station.
- 4 Assignment of functional entities of the process or the machine to station applications.

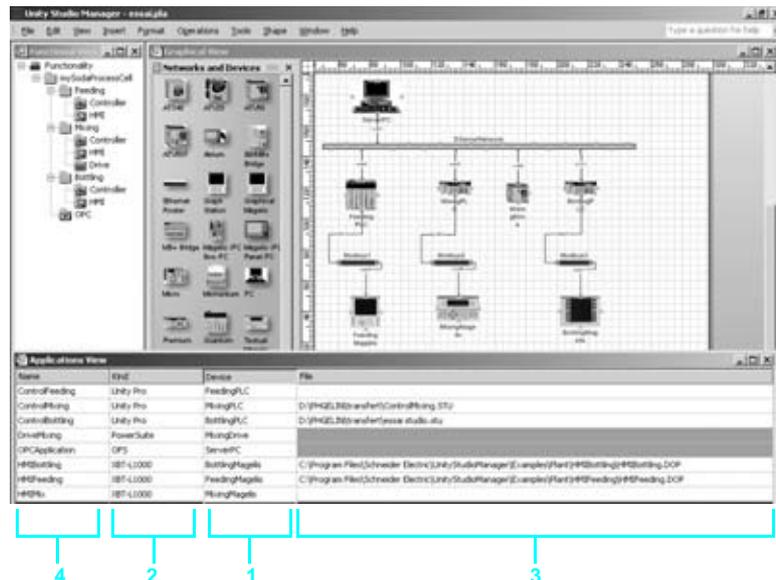



### Project analysis operations


In order to detect any errors as early as possible, Unity Studio analyzes applications automatically. A report signals any possible errors in the form of alerts.

### Generation for each individual station

Following the analysis (and after any corrections are made to render the application compliant), performing generation using Unity Studio enables you to create settings specific to each station in each corresponding station file.

### Consistency check and update operation

**This check** verifies the consistency of project settings with the files of each station. **The update operation** raises station file settings to the level of the Unity Studio project. Any modifications made on the stations are checked and reapplied at all other project levels. Existing settings of a station added to the project are updated in Unity Studio (in the event of re-use of an existing station).

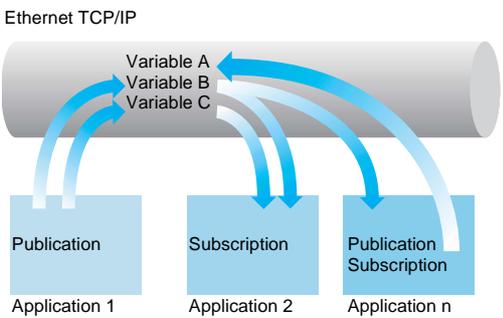

### Global Data view

The "Global Data" service of Ethernet TCP/IP communication networks ensures real-time data exchanges between connected stations. See page 2/18. The Unity Studio Global Data view enables the definition of Global Data distribution groups and the configuration of settings for published and subscribed station variables. During generation at each station level (see page 2/18), this setting configuration is saved automatically to station files, thereby ensuring:

- Guaranteed consistency of communication between the distributed applications in question.
- Maximum productivity with respect to station configuration tasks.
- Minimized risk of errors.

### Overall project documentation

The Unity Studio software suite is a single publishing resource for the creation of overall project documentation including information about the various levels.

### Unity Studio software suite open development

#### Integrated open development

The Unity Studio software suite offers a great degree of open development:

- Use of diagrams or drawings from CAD tools.
- Enhancement of the object catalog (integration of Visio objects, creation of objects using XML, etc.).
- Establishment of hypertext links to documents and third-party software applications (MES, ERP, Web, configuration tools, maintenance guides, etc.).
- Launching of VBA macros.
- Import/export at all levels, in standard XML format.

#### Advanced open development, reserved for experienced IT specialists

In conjunction with the Unity Studio software suite, Unity Developer's Edition (UDE) enables the development of these custom solutions. It includes, in addition to the development kit, Unity servers, training, documentation and technical support. This is supplied only after a special contract has been signed with Schneider Electric. Consult your Regional Sales Office.



### References


Description	Type of license	Language (1)	Reference number	Weight kg
Unity Studio development software suite	Single station	French	UNY SEW XFU CD10F	–
		English	UNY SEW XFU CD10E	–
		German	UNY SEW XFU CD10D	–
		Spanish	UNY SEW XFU CD10S	–

(1) Defines the Visio 2002 Professional language and the electrical documentation language.

2

#### Presentation of integration into architectures

Transparent Ready industrial products can be integrated into architectures based on the universal Ethernet TCP/IP network, with no need for any interface. The basic architecture below shows the various communication levels and functions required by industrial applications to meet data exchange requirements:

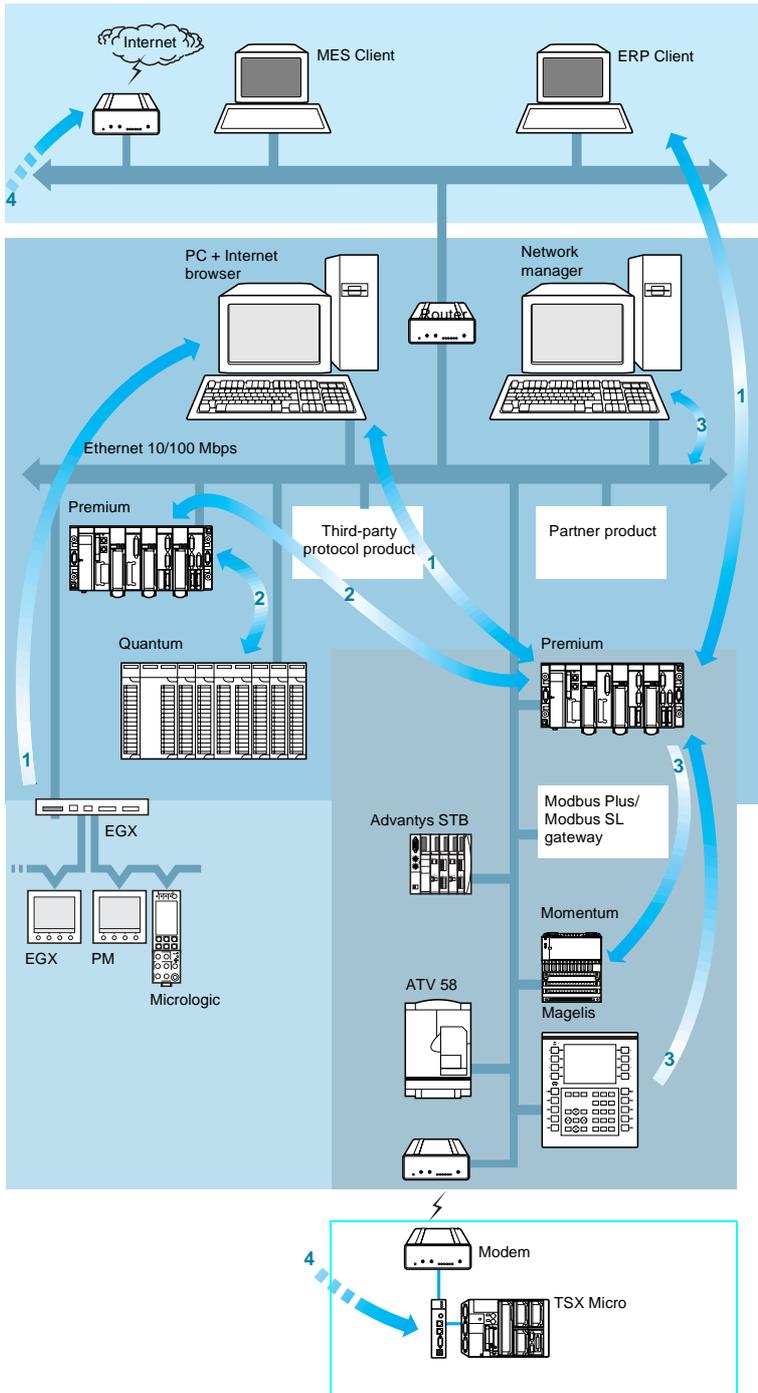

- 1 Company level: Communication between the control system products and the MES (Manufacturing Execution System) or ERP (Enterprise Resource Planning) supervision or information systems.
- 2 Inter-PLC level: Communication to PLCs for programming, diagnostics and data transfer, as well as communication between PLCs for synchronizing applications.
- 3 Field level: Communication between PLCs, PC and field devices.
- 4 Transparent remote communication: Remote communication via the Internet, or via telephone or radio link.

For a complete approach, the following requirements must also be taken into account:

- System diagnostic services
- Interoperability with third-party products or protocols
- Ethernet TCP/IP network security

The various communication requirements of the architecture are summarized below in order to:

- Present the data exchanges required by each level
- Choose the Transparent Ready services and standard solutions on Ethernet TCP/IP that are most appropriate for each type of communication

2.6

# Transparent Ready

## System approach

### Integration of Transparent Ready products

#### 1 Company level

##### Communication between MES/ERP system and PLCs

The requirements at this level are for communication using standard infrastructure and protocols for exchanging high volumes of data with production management systems. In some cases, the PLC must be able to adapt to the protocol specific to the connected system. Response times are not critical.

The Transparent Ready services used are mainly:

- HTTP communication, displaying data and sending commands via Web pages
- Data exchange using the OPC (OLE for Process Control) standard via an OFS data server
- Modbus TCP/IP messaging
- TCP Open
- E-mail transmission
- Direct publication in relational databases (via the FactoryCast HMI active Web server)

##### Communication between supervision systems and PLCs

For this type of communication, it is also necessary to transfer high volumes of data to a group of PLCs.

The required response times are in the region of 0.5 to 2 s.

The following Transparent Ready services are used:

- Mainly data exchanges using the OPC standard via an OFS data server
- Modbus TCP/IP messaging
- TCP Open
- HTTP communication integrated in the supervision system, for displaying Web pages from the field devices in supervision pages

##### Communication between HMI application and PLCs/field devices

A basic HMI (Human/Machine Interface) application must allow maintenance personnel to be notified of an event and to view the status of a field device.

The Transparent Ready services used are:

- Notification of events by e-mail
- Display of data and sending commands via Web pages

#### 2 Inter-PLC level

##### Communication for data transfer

When data is sent in point-to-point mode according to PLC programming algorithms and the required response times are in the region of 200 ms to 1 s, the main Transparent Ready service to be used is Modbus TCP/IP messaging.

##### Inter-PLC communication for synchronizing applications

Broadcast communication must enable several applications to be synchronized via real-time exchanges. In this case a low volume of data is exchanged.

The required response times are in the region of 10 to 500 ms.

The Transparent Ready Global Data service is particularly suitable for this type of data exchange.

2

### 3 Field level


#### Communication between PLCs and field devices for controlling the automation process

PLC applications are essentially responsible for controlling the I/O of peripheral devices. Data must be transferred to all devices quickly, deterministically and repetitively.

The required response times are in the region of 10 to 100 ms.

The Transparent Ready I/O Scanner service meets these requirements.

#### Communication with field products Modbus SL

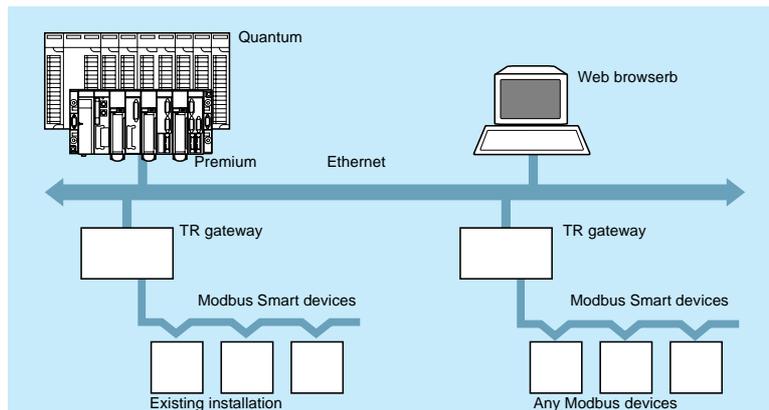


Modbus serial line (Modbus SL) protocol is a world-wide de facto standard. Its simplicity, reliability and low cost enabled it to have today, probably the most important installed base of communicating industrial products.

It is still the best technical/cost compromise for products without needs of high end communication performances.

Modbus SL products connection into Transparent Ready architectures with 174 CEV 300 20 or EGX 200/400MG gateways, is deliberately easy to manage and provides:

- Large openness capabilities at low cost, to all Modbus compliant devices of the market place
- Connection capabilities to existing applications
- A point of entry into Transparent Ready at an optimised cost
- Same application layer over a serial line than Ethernet TCP/IP, enabling transparent message routing.

2.6

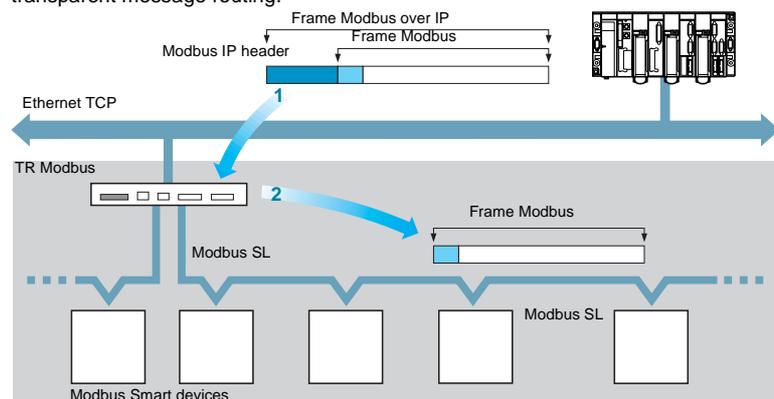

#### Mechanism of transparent data access with Modbus messaging

In case of data access to Modbus SL devices with Modbus messaging, the gateway adds no more value than the address translation, encapsulated and desencapsulated Modbus frames, whatever Modbus function code used.

This feature is totally transparent for the system, that makes no real difference from an Modbus SL device connected via a gateway and a device directly connected to Ethernet TCP/IP. The only difference should be performance.

Modbus SL devices connected via a gateway benefit both of Ethernet bandwidth & multi-master feature.



#### Communication between field PCs or operator terminals, PLCs and field devices

This type of communication is used to configure, monitor and maintain field level devices. It must be simple so that less qualified personnel can access first level diagnostics from a standard PC. The most suitable Transparent Ready service for this is the display of diagnostic and customized Web pages. See pages 2/4 to 2/7. All the functions of Magelis XBT F and XBT G graphic display terminals are also available on Ethernet TCP/IP. The SNMP standard network management protocol can also be used from a network management station to monitor, control and perform diagnostics on all the components of the Ethernet architecture.

#### Choice of Transparent Ready services

The following table can be used to select the Transparent Ready service according to the required type of communication.

Communication	Company level 1			Inter-PLC level 2		Field level 3		See page
	Communication with MES/ERP	Supervision	Basic HMI application	Inter-PLC communication	Inter-PLC synchronization	Communication with peripherals (I/O)	Diagnostics	
<b>Transparent Ready services</b>								
Modbus TCP/IP								2/15
Web/FactoryCast servers								2/6
I/O Scanning								2/16
Global Data								2/18
SNMP network management								2/21
TCP Open								2/22
OFS server								6/8

## 4 Transparent remote communication

### Using remote communication

Transparent remote communication is possible, with no need for any special interface, for programming, diagnostics, data exchanges, viewing and adjustment, in a similar way to connecting to a local area network.

This type of connection is used for remote access to automation products via the PLC programming tool, or by viewing Web pages with a simple Internet browser. Transparent remote access can also be used for the other Transparent Ready services.

#### Remote communication on the Internet

Transparent remote communication on the Internet is possible without the need for any special interfaces. For this, an Internet connection must be available. If not, contact a local Internet service provider.

This type of connection is used for remotely accessing automation products at a lower communication cost and over very long distances, using:

- The PLC programming tool
- A simple Internet browser for viewing the Web pages of the automation products that have an embedded Web server

As use of the Internet involves security risks for the system, this type of access must be made secure by a Firewall. The use of a VPN (Virtual Private Network) is also possible. This type of function must be provided by the Firewall or by an additional device.

For further information on remote management services, see "Partnership Program" page 8/3.

#### 4 Transparent remote communication (continued)

##### Remote communication via telephone networks

Transparent point-to-point communication on the telephone network is possible using a remote access router or RAS (Remote Access Server). Since TSX ETZ410/510 Ethernet Web server modules for Modicon TSX Micro PLCs incorporate this function themselves, there is no need to use an external server/router.

A modem for wired telephone link or GSM is also necessary for telephone communication.

As with any connection via a telephone network, access must be made secure by identification functions, or filtering by a Firewall, automatic callback by the access server or VPN server.

For further information on remote telephone connections, please consult your Regional Sales Office.

##### Remote communication by radio

Transparent remote communication by radio is also possible on Ethernet TCP/IP, both for communication between products and for links with HMI terminals which can thus be mobile.

Various types of radio technology are compatible with Ethernet TCP/IP:

- Bluetooth
- Wi-Fi
- Special wireless industrial systems, based on the 2.4 GHz frequency

Further information on this field, and details of partners supplying these types of technology for use with Transparent Ready products, are given on pages 8/2 to 8/9.

##### Other requirements of Ethernet TCP/IP architectures

###### Diagnostic services

Diagnostic services are available from the PLC programming tools, which provide in particular:

- Display of the PLC system status
- Diagnostics of the communication services on Ethernet TCP/IP (Modbus TCP/IP messaging, I/O Scanning and Global Data services)
- Display of the pass band in Ethernet TCP/IP modules (module load level)

Similar or additional services are also available using a simple Internet browser by viewing the PLC Web pages:



- "Ready to use" pages for displaying the PLC status, "Rack Viewer" function
- Communication and Ethernet TCP/IP services diagnostics pages (communication statistics, I/O Scanning service and Global Data service)
- Access to the PLC variables and data via the "Data Editor" function
- "Alarm viewer" function for displaying alarms on Modicon Premium and Quantum PLCs
- User Web pages created with the "Graphic Data Editor" function or created using a standard tool, such as Microsoft Frontpage

In addition to these diagnostics functions there are also the services provided by the standard SNMP protocol (Simple Network Management Protocol). A network management station can also monitor, control and perform diagnostics on all the components of the Ethernet architecture and can in particular access the objects specific to the Transparent Ready offer contained in the private MIB (Management Information Base) of the PLC communication module.

# Transparent Ready

## System approach

### Integration of Transparent Ready products

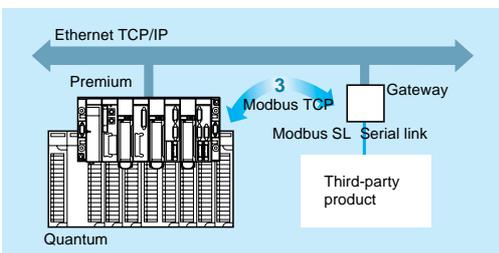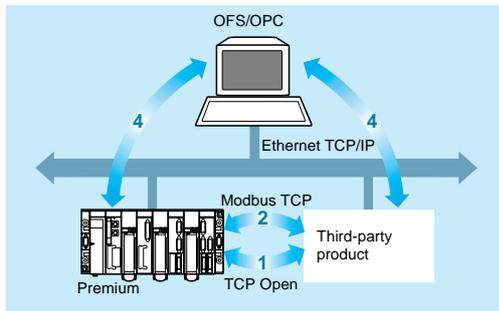

#### Interoperability with third-party products or protocols

Some applications require communication on Ethernet TCP/IP with products from other suppliers. If these products do not have the Modbus TCP protocol, it is possible to use one of the following 4 solutions:

- 1 Use TCP Open for managing communication with the third-party product directly on the TCP layer in accordance with a specific protocol.
- 2 Develop the Modbus TCP protocol on the third-party product, if it provides open access to the TCP layer. This development is made easy by the simplicity of the Modbus TCP protocol. The specifications are available on the Internet from Modbus-IDA (see page 8/3).
- 3 If the third-party product has a Modbus serial link, use the 174 CEV 30020 gateway to the Modbus protocol on TCP/IP.
- 4 If the product is compatible with an OPC server, it is possible to create an interface on Ethernet TCP/IP between this product and Telemecanique brand PLCs via an OPC client/server PC (equipped with Telemecanique OFS data server software).

2

#### Other requirements of Ethernet TCP/IP architectures

(continued)

##### Ethernet TCP/IP network security

Security risks on Ethernet TCP/IP are higher than when using proprietary networks, for the following reasons:

- Ethernet TCP/IP is a universal communication network that is familiar and accessible to a huge number of users.
- The use of Ethernet TCP/IP for automation products enables external connection without the need for any interfaces.

There are three main risks:

- Multiple "PING" requests with the ICMP protocol to create a denial of service to the module.
- Reading/modification of Web server pages with the FTP protocol
- Modification of PLC variables with TCP modems

2.6

Virus risks are extremely limited at control system product level, as they are based on special operating systems.

The risks must be dealt with at each level:

- Company level 1: Possibility of using a router as access manager to the lower levels, by filtering the IP addresses and permitted communication protocols. (Please consult your Regional Sales Office for any additional information).
- Inter-PLC level 2 and field level 3: Set up an internal security policy, ensuring that only authorized people can connect to the network locally. Use the authentication, password and IP address filtering functions available at control system product level.
- Transparent remote communication 4: See page 2/43.



---

## 3 - Product data sheets


- Modicon Momentum distributed I/O ..... page 3/2
- Advantys STB distributed I/O ..... page 3/3
- Advantys OTB distributed I/O ..... page 3/4
- ATV 38/58 variable speed drives ..... page 3/5
- Inductel identification system ..... page 3/6
- Modbus and Modbus Plus gateways ..... page 3/6

# Transparent Ready

## Field devices

### Modicon Momentum distributed I/O

### Ethernet network communication adapters



#### Presentation

Momentum I/O bases equipped with 170 ENT 110 0 Ethernet communication adapters create a distributed I/O system on an Ethernet TCP/IP network. Each I/O base and communicator assembly constitutes a device on the network. Types of base available:

- Discrete: inputs or outputs (32 channels max.), mixed I/O (20 channels max.).
  - Analog: current or voltage inputs or outputs, Pt/Ni thermocouple or temperature probe inputs.
  - Mixed, up to 10 discrete I/O and 10 analog I/O.
  - Application-specific: 200 kHz 2-channel counter, Modbus port with 9 discrete I/O
- Sensors and preactuators are connected on removable screw or spring terminals.

#### Description

Ethernet TCP/IP 170 ENT 110 02/01 communication adapters comprise:

- 1 Standard connector for 10BASE-T or 10BASE-T/100BASE-TX interface depending on model (RJ45).
- 2 Area for identification label (supplied with each I/O base).
- 3 LED status indicators.

All the communication adapters can be fitted on any type of I/O base (discrete, analog or application-specific).

#### Characteristics

Type of communicator		170 ENT 110 02	170 ENT 110 01	
Transparent Ready services	Class	A10	B20	
	Standard Web server	–	"Rack Viewer" access to the product description and status and to base unit diagnostics "Data editor" access to the configuration functions and variables	
Standard Ethernet TCP/IP communication services		Modbus Messaging (read/write data words)		
		–	FDR client for automatic assignment of the IP address and network parameters SNMP agent, detection of the product by an SNMP manager	
Structure	Physical interface	RJ45 standard 10BASE-T connector	RJ45 standard 10BASE-T/100BASE-TX connector	
	Data rate	10 Mbps	10/100 Mbps with automatic recognition	
	Medium	Twisted pair		
Ethernet communication adapter	Operating temperature	0...+ 60°C		
	Relative humidity	5...95% non condensing		
	Degree of protection	IP 20		
	Power supply	Via I/O base		
	I/O bases	Discrete inputs	= 24 V (16 or 32 channels), ~ 120 V and 230 V (16 channels)	
		Discrete solid state outputs	= 24 V/0.5 A (16 or 32 channels), ~ 120 and 230 V/0.5 or 2 A (8 or 16 channels)	
		Discrete solid state mixed I/O	Inputs = 24 V (16 channels) and Outputs = 24 V/0.5 or 2 A (8, 12 or 16 channels) Inputs ~ 120 V (10 channels) and Outputs ~ 120 V/0.5 A (8 channels)	
		Relay mixed I/O	Inputs = 24 V (10 channels) and Relay outputs = 20...115 V or Outputs ~ 24...230 V/2 A (8 N/O channels)	
		Analog inputs	Voltage/current (8 or 16 channels), thermocouple/temperature probe (4 channels)	
		Analog outputs	- 10 V...+ 10 V, 0...20 mA or - 10 V...+ 10 V, 4...20 mA (4 channels)	
	Mixed discrete and analog I/O	4I/2Q analog voltage/current and 4I/2Q = 24V 6I/4Q analog 0...10 V and 8I/8Q = 24 V, 6I/4Q analog. - 10...+ 10 V and 8I/8Q = 24 V		
	Application-specific	200 kHz 2 channel counter, module 6I/3Q ~ 120 V with 1 RS 485 Modbus port		
Conformity to standards		UL, CSA, CE, FM Class 1 Division 2	UL, CSA, CE	
LED indicators		Ethernet network status (LAN Active) Module status (RUN)	Ethernet network status (ST), data rate (10T, 100T) Module status (RUN)	

#### References



Transparent Ready

170 ENT 110 02/01

Description	Transparent Ready class	Data rate	Reference	Weight kg
Ethernet communication adapters	A10	10 Mbps	170 ENT 110 02	0.070
	B20	10/100 Mbps	170 ENT 110 01	0.070


(1) I/O bases and separate parts: Please consult our "Modicon Momentum automation platform" catalog.

# Transparent Ready

## Field devices

### Advantys STB distributed I/O

### Ethernet network interface modules



#### Presentation

The Advantys STB distributed I/O solution is an open, modular I/O system. It can be used to design industrial automation islands managed by a master controller connected to various buses and networks, including Ethernet TCP/IP. Each island comprises a set of modules mounted on a DIN rail to make up one or more segments in which the power supplies (logic  $\approx$  5 V, sensors and preactuators  $\approx$  24 V or  $\sim$  115/230 V) are distributed automatically.

Sensors and preactuators are connected on removable screw or spring terminals. The Advantys STB configuration software is used to set the parameters of the numerous I/O module functions (logic of each channel, behavior in the event of a short-circuit or overload, fallback position, reflex functions, etc)

#### Description

The STB NIP 2212 Ethernet TCP/IP network interface module has the following on the front panel:

- 1 A standard connector for 10BASE-T interface (RJ45)
- 2 Two rotary selector switches for addressing nodes on the bus or the network
- 3 A  $\approx$  24 V external power supply connector for the removable screw-type (STB XTS 1120) or spring-type (STB XTS 2120) terminals
- 4 An LED display block
- 5 A screw for unlocking the module from the DIN rail
- 6 A slot for an STB XMP 4440 removable memory card
- 7 Cover for access to: a port for connecting the island setup and configuration PC or an HMI terminal (read/write data), and the Reset button

On the right-hand side panel:

A bus connector for connecting (via base units) to the power distribution module and to the I/O modules (max. 32 modules on 7 segments).

#### Characteristics

<b>Transparent Ready services</b>	Class	B20
	Standard Web server	"Rack Viewer" access to the product description and status and to the island diagnostics "Data editor" access to the configuration functions and variables
<b>Ethernet communication adapter</b>	Ethernet TCP/IP communication management service	Modbus messaging (read/write data words) FDR client for automatic assignment of the IP address and network parameters SNMP agent, detection of the product by an SNMP manager
	Physical interface	RJ45 standard 10BASE-T connector
	Data rate	10 Mbps
	Medium	Twisted pair
	Operating temperature	0...+60°C
	Relative humidity	95% non condensing at 60°C
	Degree of protection	IP 20
Power supply	$\approx$ 24 V (limits $\approx$ 19.2...30 V), 400 mA	
Max. number of I/O modules	32 per island (16 per segment)	
Number of segments	1 primary and 6 extensions	
I/O modules	Discrete inputs	$\approx$ 24 V (2, 4 or 6 channels), $\sim$ 115 V and 230 V (2 channels)
	Discrete solid state outputs	$\approx$ 24 V/0.5 A (2, 4 or 6 channels), $\approx$ 24 V/2 A (2 channels), $\sim$ 115...230 V/2 A (2 channels)
	Relay outputs	$\approx$ 24 V or $\sim$ 115...230 V 2 "C/O"/2 A, 2 "N/C" + "N/O"/7A
	Analog inputs	- 10 V...+ 10 V, 0...20 mA, multi-range (2 channels)
	Analog outputs	- 10 V...+ 10 V, 0...20 mA (2 channels)
	Application-specific	16 Tego Power motor starter inputs, 12 TeSys model U controller-starter inputs 40 kHz 1 channel counter
Conformity to standards	IEC/EN 61131-2, UL 508, CSA 1010-1, FM Class 1 Division 2, C $\epsilon$	
LED indicators	Ethernet network status (10T ACT, LAN ST) Module and island status (POWER, RUN, ERROR and TEST)	

#### References



STB NIP 2212

Description	Use	Reference	Weight kg
<b>Ethernet "NIM" network interface modules</b> Class B20	$\approx$ 24 V power supply	<b>STB NIP 2212</b>	0.130
<b>Removable power supply terminals (pack of 10)</b>	Screw	<b>STB XTS 1120</b>	0.003
	Spring	<b>STB XTS 2120</b>	0.003
<b>32 Kb removable memory card</b>	Application memory backup	<b>STX XMP 4440</b>	-


(1) Power distribution modules, I/O modules, bases, configuration software and separate parts:  
Please consult our "Advantys STB I/O, the open solution" catalog.

# Transparent Ready

## Field devices

### Advantys OTB distributed I/O

#### Ethernet network interface with discrete I/O



3

### Presentation

The Advantys OTB distributed I/O solution, which complements the Advantys STB offer, consists of a compact system (network interface and integrated I/O) with the addition of Twido I/O expansion modules. Each island has, on a DIN rail:

- A network interface module (including Ethernet TCP/IP) with 12  $\sim$  24 V inputs, 6 relay outputs and 2 solid state outputs  $\sim$  24 V 0.3 A.
- As an extension, up to 7 discrete or analog I/O expansion modules.

This structure, created using IP 20 modules, can thus be used to manage 20 to 244 I/O per island over a maximum length of 328.7 mm (height 94.5 mm).

### Description

The OTB 1E0 DM9LP Ethernet TCP/IP network interface module with integrated I/O has the following on the front panel:

- 1 A pivoting door for accessing a standard connector for 10BASE-T/100BASE-TX physical interface (RJ45).
- 2 An LED display block.
- 3 Screw terminals for the  $\sim$  24 V sensor power supply and for connecting the input sensors (with 1 common).
- 4 Screw terminals for connecting the output preactuators (with 4 commons).

On the right-hand side panel:

A connector for TWD D●●/A●● I/O expansion modules (7 modules max.).

### Characteristics

Transparent Ready services	Class	A10
	Standard Web server	None
	Standard Ethernet TCP/IP communication service	Modbus messaging (read/write data words)
Structure	Physical interface	RJ45 standard 10BASE-T/100BASE-TX connector
	Data rate	10/100 Mbps with automatic recognition
	Medium	Twisted pair
Ethernet communication adapter	Operating temperature	0...+ 55°C
	Relative humidity	30...95% non condensing
	Degree of protection	IP 20
	Power supply	$\sim$ 24 V (limits $\sim$ 20.4...26.4 V)
	Inputs	12 inputs $\sim$ 24 V, 5 and 7.7 mA, 1 common point (positive or negative logic) Connection via removable screw terminals
	Outputs	6 $\sim$ 230 V or $\sim$ 30 V, 2 A relay outputs, 3 common points (1 x 3, 1 x 2 and 1 x 1) 2 $\sim$ 24 V, 0.3 A transistor outputs, 1 common point (positive logic) Connection via removable screw terminals
	Conformity to standards	IEC 61131-2, UL 508 CSA C22.2 No. 213 (Class 1 Division 2 Groups A, B, C, D), CE
LED indicators	Controller status (PWR and STAT), I/O (I●/Q●) Ethernet network status/10 or 100 Mbps data rate (10 T and 100T)	

### References



OTB 1E0 DM9LP

Description	No. of discrete I/O	Reference	Weight kg
Ethernet network interface module $\sim$ 24 V power supply Class A10	12 $\sim$ 24 V inputs 6 relay outputs 2 $\sim$ 24 V solid state outputs	OTB 1E0 DM9LP ▲	0.205

▲ Available soon. Please consult your Regional Sales Office.

### Discrete I/O expansion modules

Number of channels	8	16	4 I/4 Q	16 I/8 Q
$\sim$ 120 V inputs	TWD DAI 8DT	–	–	–
$\sim$ 24 V inputs	TWD DDI 8DT	TWD DDI 16DT	TWD DMM 8DRT	TWD DMM 24DRF
2 A relay outputs	TWD DRA 8RT	TWD DRA 16RT	–	–
$\sim$ 24 V 0.3 A transistor outputs	TWD DDO 8TT	–	–	–


### Analog I/O expansion module

Number of channels	1	2	4	8	2 I/1 Q
0...10 V, 0...20 mA inputs	–	–	TWD AMI 4LT	TWD AMI 8HT	–
Thermocouple/Pt temp. probe inputs	–	–	–	TWD ARI 8HT	TWD ALM 3LT
0...10 V, 4...20 mA outputs	TWD AMO 1HT	–	–	–	TWD AMM 3HT
0...10 V, 4...20 mA inputs	–	TWD AMI 2HT	–	–	–
+/- 0...10 V outputs	–	TWD AVO 2HT	–	–	–

For further information, please consult our "Automation and control, automation and relay functions" catalog.



ATV 58HU18M2



**Presentation**

Altivar 38 and Altivar 58 variable speed drives are frequency inverters for asynchronous motors, with the following features, depending on the model:

- ATV 38 drive, three phase 380 V...480 V for 0.75 kW...315 kW ratings. This is specifically designed for fluid management applications in industrial buildings.
  - ATV 58 drive with the following power supplies:
    - single phase 200...240 V for 0.37 kW...5.5 kW ratings
    - three phase 200...230 V for 1.5 kW...7.5 kW ratings
    - three phase 380 V...4500 V for 0.75 kW...75 kW ratings
- This is designed for industrial materials handling, packing and packaging applications, pumps, compressors and special machines.

**Description**

Altivar 38/58 drives connect to the Ethernet TCP/IP network via the VW3 A58310 communication card.

- 1 An Ethernet TCP/IP communication card is built into the ATV drive.
- 2 A standard connector for 10BASE-T/100BASE-TX interface (RJ45)

3

**Characteristics**


<b>Transparent Ready services</b>	Class	B20
	Standard Web services	"Altivar Viewer" drive diagnostics "Data editor" access to the configuration, adjustment and signaling functions "Statistics" product status and communication statistics
	Ethernet communication management services	Modbus messaging FDR client for automatic assignment of the IP address and network parameters SNMP agent, detection of the product by an SNMP manager
<b>Structure</b>	Physical interface	RJ45 standard 10BASE-T/100BASE-TX connector
	Data rate	10/100 Mbps with automatic recognition
	Medium	Twisted pair
<b>Drive</b>	Operating temperature	- 10...+ 40°C or - 10...+ 50°C depending on model, please consult our "Variable speed drives and soft starters" catalog
	Relative humidity	93% non condensing, no dripping water, conforming to IEC 60068-2-3
	Degree of protection	That of the drive: IP 21 and IP 41 on upper part
	Conformity to standards	ISO/IEC 8802.3, ANSI/IEE Std 802.3, UL 508C, CSA C22.2 N14 M95, Cc Drive standards NF-EN 50178, IEC 61800 class A
	LED indicators	Collision detection, transmission and reception activity, data rate (10 or 100 Mbps)

**References**



VW3 A58310

Description	For drive	Reference	Weight kg
<b>Communication card</b> Ethernet Modbus TCP/IP 10/100 Mbps	ATV 38 ATV58/58F All ratings	<b>VW3 A58310</b>	0.300
Class B20			

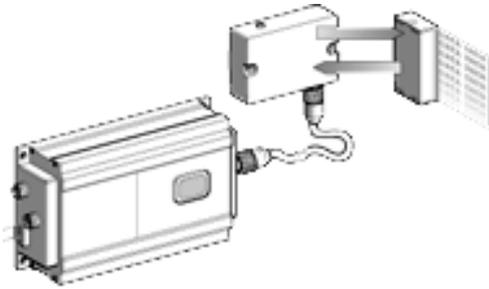

Read/write station with antenna and updatable code badge

3



### Presentation

Inductive technology is based on the use of a medium frequency electromagnetic signal (carrier), for contactless transmission between two electronic devices. It is used for identifying products during manufacture and improving the management of product-related data flows.

The system consists of:

- Updatable code badges, with decentralized memory (ferroelectric memory or EEPROM), accessible in read and write mode for use with the product to be identified.
- The read/write station with remote antenna, a bidirectional communication device that manages the data transmitted between the badge and the processor via the Ethernet TCP/IP network.

### Description

The XGKS1715503 read/write station is in the form of a dust and damp proof metal box comprising:

- 1 A 5-way female M12 connector for connection to the antenna (XGLA... or XGPA...).
- 2 A display block consisting of 5 LEDs indicating the station status.
- 3 A removable cover for accessing the station configuration switches.
- 4 A 20UNF 3 1/2" 3-pin male connector for connecting the --- 24 V station power supply (female connector to be ordered separately).
- 5 An IP 65 shielded base for connection to the Ethernet network.

The special connector supplied with the station is used to form a dust and damp proof connection using any standard RJ45 cable.

This station (210 x 60 x 235), is fixed onto a frame or panel using 4 screws (4 x Ø 8 holes).

### Characteristics

<b>Transparent Ready services</b>	Class	A10	
	Standard Web server	No Web server	
	Standard Ethernet TCP/IP communication service	Modbus messaging (read/write I/O words)	
<b>Structure</b>	Physical interface	10BASE-T/100BASE-TX, standard RJ45 connector with IP 65 shielded base	
	Data rate	10/100 Mbps with automatic recognition	
	Medium	Double twisted pair	
<b>Network interface module controller</b>	Operating temperature	0...+ 50°C	
	Relative humidity	30...95% non condensing	
	Degree of protection	IP 65	
	Power supply	--- 24 V (limits --- 21...29 V)	
	External antenna	5-way female M12 connector (antenna/station link 2 m max.)	
	Communication	Requests	Modbus TCP/IP 124 words max.
		Data rate	500 words/s max. depending on antenna used
	Conformity to standards	UL, CE	
	LED indicators	Electromagnetic interference, level 3 according to IEC 61000-4-2/4-3/4-3	
		On (green), badge present (yellow), badge and communication port faults (red)	
		Ethernet network activity (RUN, green), collision detection (COL, red), diagnostics (STS, yellow) and fault (ERR, red)	

### References



XGKS1715503

Description	Integrated Ethernet port	Reference	Weight kg
Read/write station --- 24 V power supply	10/100 Mbps	<b>XGK S1715503</b>	1.120
Class A10			

Antennae, updatable code badges, connection accessories: please consult our "Inductive identification system" catalog.


---

## 4 - Product data sheets

- MV and LV protection and metering products . . . . . *page 4/2*
- Advanced electrical circuit monitors . . . . . *page 4/3*
- PowerLogic SMS electrical power management software . . . . . *page 4/4*



Sepam/Masterpact/CM●000/PM●00

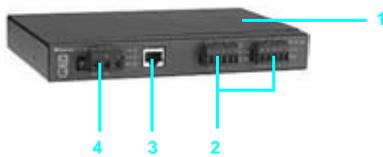

4

### Presentation

Merlin Gerin communicating electrical distribution protection and measurement products are ideal for integration in Transparent Ready architectures.

This range includes in particular:

- Sepam series 20, 40 and 80 Medium Voltage (MV) protection relays.
- Masterpact Low Voltage (LV) circuit-breakers used with their Micrologic A, P or H protection units.
- Power Logic power meters (PM), such as the PM500, PM700 and PM800, that can be used for both MV and LV.
- The advanced Power Logic Circuit Monitors (CM), such as the CM2000, CM3000 and CM4000.

### Description

These products are connected to Ethernet via an EGX gateway or server that is generally mutualized for a number of electrical distribution products:

- 1 An EGX gateway/server with, depending on the model:
  - EGX 200 gateway if the only requirement is to have transparent connectivity on Ethernet (and thus multi-master openness).
  - EGX 400 server to also have the Web services associated with the above products, for easy monitoring of the electrical network.
- 2 2 Modbus serial ports for connection to the above product(s).
- 3 A standard connector for 10BASE-T/100BASE-TX (RJ45) interface with, for the EGX 400 server, a standard connector for 100BASE FX interface.
- 4 A  $\sim$  24 V power supply.

The EGX also provides Modbus serial link (SL)/Modbus TCP gateway services for all Modbus SL products.

The EGX can also take a Modbus master product on one of its ports (configured for this purpose) that will then have access to the Modbus products on the other port. EGX are specifically designed to withstand harsh thermal or electrical environments.

### Characteristics

Type of communicator		EGX 200	EGX 400
Transparent Ready services	Class	B10	C10
	Standard Web server	Configuration of the gateway communication functions Monitoring/diagnostics pages associated with the products connected downstream	
	Configurable Web server	–	Summary Web pages, and ability to record variables. Web pages are created using the WPG tool
Ethernet connection	Ethernet TCP/IP communication management service	Modbus messaging SNMP agent, SNTP time synchronization, HTTP protocol, FTP file sharing	
	Physical interface	10BASE-T/100BASE-TX (RJ45)	
	Medium	–	100BASE-FX
Modbus SL connections	Number of ports	Twisted pair	
	Types of port	Twisted pair or optical fiber	
	Types of port	Port 1, RS 485 (2 or 4-wire) Port 2, RS 232 or RS 485 (2 or 4-wire)	
	Protocol	Modbus	
	Transmission speed	38.4 Kbps	
Other characteristics	Recommended max. number of devices	32 per port, ie. 64 in total	
	Operating temperature	- 30°C to + 80°C	
	Relative humidity	5...95% non condensing at 40°C	
	Power supply	$\sim$ 24 V ( $\sim$ 100-240 V socket adapter supplied), 8 W	
	Conformity to standards	cUL (conforming to CSA C22-2 no. 14-M91), UL508, C€	
	Environmental resistance	EN 61000-6-2, EN 61000-4-2/3/4/5/8/11, EN 55022/FCC class A	
	Mounting	On symmetrical or asymmetrical DIN rail	

### References




EGX 200/EGX 400



For	Description	Transparent Ready class	References	Weight Kg
Sepam, Masterpact/Micrologic, PM, CM or other Modbus SL products	Modbus Ethernet gateway	Class B10	EGX 200MG	0.700
	Modbus Ethernet server	Class C10	EGX 400MG	0.700



CM 3000/CM 4000



## Presentation

CM 3000 and 4000 Circuit Monitors are high-performance monitoring units that provide a large number of possibilities. Installed on the incoming feeder, on the Medium Voltage (MV) or Low Voltage (LV) switchboard incoming supply or on sensitive outgoing feeder, the Circuit Monitors record the electrical parameters of the installation. They provide relevant information for controlling costs, improving power quality and minimizing production downtime. They offer the possibility of detailed recording of the conditions of any detected interference.

Depending on the model and the options, they also perform the following:

- Detection and recording of voltage dips and jumps which cause production stoppages on some sensitive processes.
- Precise (1 ms) time synchronization by GPS.

They provide current and voltage measurement precisions from 0.04% to 0.1%.

## Description

These products are connected to Ethernet via their ECC21 option card. This card also provides an integrated Web gateway/server function to Modbus on Ethernet TCP/IP for Modbus Serial Link (SL) communicating products connected downstream:

- 1 ECC 21 Ethernet option card for Circuit Monitor.
- 2 A standard connector for 10BASE-T/100BASE-TX interface (RJ45) with, for the EGX 400, a 100BASE-FX connector.
- 3 Modbus (SL) serial port for gateway/server function for connecting Modbus products downstream.

The gateway/server function provided by the ECC 21 card is similar to that of the EGX server, but with a lower capacity.

4

## Characteristics

<b>Type of communicator</b>		<b>ECC 21</b>
<b>Transparent Ready services</b>	Class	C10
	Configurable Web server	Configuration of the CM communication functions and the Modbus TCP gateway function 6 monitoring pages, 5 of which are customizable One page displays details of the electrical values of the host CM The other 5 Web pages (created using the WPG tool) can provide displays of the main electrical values of the Modbus SL products connected downstream
<b>Ethernet connection</b>	Ethernet TCP/IP standard communication management service	Modbus messaging SNMP agent, SNTP time synchronization, SMTP e-mail notification (transmission according to alarms), HTTP protocol, FTP file sharing
	Physical interface	10BASE-T/100BASE-TX (RJ45) 100BASE-FX
<b>Modbus SL connections</b>	Medium	Twisted pair or optical fiber
	Number of ports	1
	Type of ports	RS 485 (2 or 4-wire)
	Protocol	Modbus
	Transmission speed	38.4 Kbps
<b>Other characteristics</b>	Recommended max. number of devices	32
	Operating temperature	- 25°C to + 70°C
	Relative humidity	5...95% non condensing at 40°C
	Conformity to standards	CE, UL508
Environmental resistance	EN 61000-6-2, EN 61000-4-2/3/4/5/8/11, EN 55022/FCC class A	

## References




ECC 21

Description	For Circuit Monitor metering unit	Reference	Weight kg
Ethernet option card	CM3000 CM4000	ECC21	-
Class C10			

# Transparent Ready

## Electrical distribution products

### PowerLogic SMS electrical power management software



#### Presentation

PowerLogic SMS software is a set of software tools specially designed to help the user of an electrical network to control this network and reduce the costs connected with electrical power.

The tools are deliberately simple to configure, and incorporate the library of electrical distribution communicating components, such as Power Meter, Circuit Monitor, Masterpact or Sepam, as standard. They are also open, so that they can handle any type of Transparent Ready product (using Modbus TCP messaging).

The software offers a large number of pre-defined screens, enabling users to quickly access the electrical data they require. These screens can also be customized.

Using such a tool the user can:

- Ascertain the status of his network
- View the load curves.
- Optimize his contract with his energy supplier.
- Use submetering and thus accurately re-allocate energy costs.
- Optimize his investment.
- Monitor electricity quality for optimum operation of the network and the process being supplied.

#### Description

The SMS software range covers various needs according to functional requirements and type of electrical installation.

#### Characteristics

Type	PowerLogic SMS, "electrical engineer" supervisory software		
Compatibility	All Merlin Gerin and SquareD electrical distribution products and other Transparent Ready products		
Operating system	Windows 98, Windows 2000 and Windows XP		
Type of software license		Single product	Multi-product
Reference	Electrical Measurement oriented	–	PMX 1500
	ED Network management oriented	SMS 121	SMS 1500

4

---

## 5 - Product data sheets


- Modicon Momentum M1E processor adapters ..... *page 5/2*
- Twido programmable controller ..... *page 5/3*
- Modicon TSX Micro Ethernet modules ..... *page 5/4*
- Modicon Premium platform
  - Processors with integrated Ethernet port ..... *page 5/5*
  - Atrium coprocessors and TCP/IP gateway ..... *page 5/6*
  - Ethernet modules ..... *page 5/7*
- Modicon Quantum platform
  - Processors with integrated Ethernet port ..... *page 5/8*
  - Ethernet modules ..... *page 5/9*

# Transparent Ready

## Controllers and PLCs

### Modicon Momentum

#### M1E processor adapter



M1E processor adapter on Momentum I/O base



### Presentation

M1 processor adapters are based on the Modicon Momentum distributed I/O family of products.

They are designed to be stand alone for mounting on any discrete, analog or application-specific I/O base. Depending on the type, they take one of the following:

- Remote I/O via the I/O bus port.
- Connection of a Modbus master/slave bus.

An optional module inserted between the M1 processor and the I/O base enables these units for network connection. The Flash memory can also be used to back up the applications, creating a local copy of the program to be loaded in the RAM.

Either ProWORX 32 software (LL984 programming) or Concept software (5 IEC languages) is required for programming M1 processor adapters, depending on the model.

### Description

M1E 171 CCC 960 20/30 and 171 CCC 980 20/30 processor adapters have the following on the front panel:

- 1 A standard connector for 10BASE-T interface (RJ45).
- 2 A 9-way female SUB-D connector for Modbus or I/O bus connection (depending on the model).
- 3 Three LED indicators.

### Characteristics

Type of adapter	171 CCC 980 20	171 CCC 980 30	171 CCC 960 20	171 CCC 960 30
<b>Transparent Ready services</b>	Class B10			
Web server	"Rack Viewer" access to the product description and status, and to the island diagnostics "Data editor" access to the configuration functions and variables "Web page loader" software tool			
Ethernet TCP/IP communication management services	Modbus Messaging (read/write data words) I/O Scanning			
<b>Structure</b>	Physical interface 10BASE-T			
Data rate	10 Mbps			
Medium	Twisted pair			
<b>Network module</b>	Operating temperature 0...+ 60°C			
Relative humidity	10...95% non condensing during operation			
Degree of protection	IP 20			
Power supply	Supplied by the 170 A●● I/O base on which the processor is mounted			
Processor scan time	0.3 ms per Kinstruction			
RAM/Flash memory	512 K/512 K	544 K/1 M	512 K/512 K	544 K/1 M
User memory/data memory	18 K/24 K			
Programming software	ProWORX 32	Concept, ProWORX 32	ProWORX 32	Concept, ProWORX 32
Other communication ports	1 RS 485 Modbus port		1 I/O bus (derived from INTERBUS)	
Communication extension ports	Via optional modules (1 Modbus Plus port, 1 redundant Modbus Plus port, 1 serial link)			
Conformity to standards	UL, cUL, FM Class 1 Division 2, NEMA type 250, CE			
LED indicators	Adapter operating (RUN) Ethernet network status (LAN Act), Ethernet network activity (LAN STS)			

### References




171 CCC 980/960 ●0

Description	Communication ports	Programming	Reference	Weight kg
<b>M1E processors</b>	1 Ethernet,	ProWORX 32	<b>171 CCC 980 20</b>	0.042
	1 Modbus	Concept, ProWORX 32	<b>171 CCC 980 30</b>	0.042
Class B10	1 Ethernet, 1 I/O bus	ProWORX 32	<b>171 CCC 960 20</b>	0.042
		Concept, ProWORX 32	<b>171 CCC 960 30</b>	0.042

Accessories and separate parts: Please consult the "Modicon Momentum automation platform" catalog.



Compact base Twido with digital display

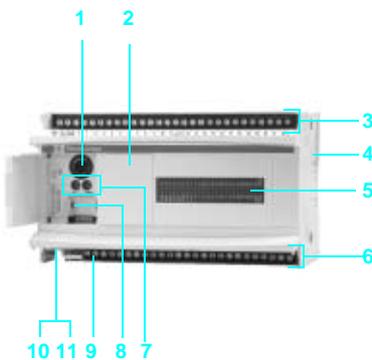

## Presentation

The Twido range of PLCs provides a compact base with integrated Ethernet port. The TWD LCAE 40DRF base is a compact-sized (95 x 90 x 70 mm), "all-in-one" solution. It uses a ~ 100...240 V power supply and has the following discrete I/O:

- 24 ~ 24 V inputs
- 14 relay outputs
- 2 ~ 24 V transistor outputs

This base can take:

- Up to 7 I/O expansion modules, thus increasing the I/O capacity to 152 (with screw terminal version) or 264 (with HE 10 connector version).
- All Twido range separate parts (memory cartridge or real-time clock, serial link adaptors, digital display).

## Description

The TWD LCAE 40DRF Twido compact PLC base with integrated Ethernet port consists of:

- 1 An RS 485 serial link port mini-DIN connector (for connecting the programming terminal).
- 2 A slot for diagnostics/maintenance digital display unit.
- 3 Screw terminals for ~ 24 V sensor power supply and for connecting the input sensors (protected by hinged terminal covers).
- 4 A connector for expansion modules (7 modules max. discrete I/O, analog I/O, AS-Interface bus).
- 5 An LED display block.
- 6 Screw terminals for connecting the output preactuators (protected by hinged terminal covers).
- 7 Two analog adjustment points.
- 8 A connector for the extension of the RS 232C/RS 485 2nd serial link port.
- 9 Screw terminals for connecting the ~ 100...240 V power supply.


Accessible from beneath the controller:

- 10 A connector for memory cartridge or real-time clock
- 11 A standard connector for 10BASE-T/100BASE-TX interface (RJ45)

## Characteristics

<b>Transparent Ready services</b>	Class	A10
	Web server	None
	Standard Ethernet TCP/IP communication services	Modbus messaging (read/write data words)
<b>Structure</b>	Physical interface	RJ45 standard 10BASE-T/100BASE-TX connector
	Data rate	10/100 Mbps with automatic recognition
	Medium	Twisted pair
<b>Drive</b>	Operating temperature	- 0...+ 55°C
	Relative humidity	30...90% non condensing
	Degree of protection	IP 20
	Power supply	~ 100...240 V, 50/60 Hz (limits ~ 85...264 V, 47...63 Hz)
	~ 24 V sensor power supply	250 mA
	Inputs	24 ~ 24 V, 11 and 7 mA, type 1 inputs (positive or negative logic)
	Outputs	14 ~ 230 V or ~ 30 V, 2 A relay outputs 2 ~ 24 V, 1 A (positive logic) transistor outputs
	Counting	2 ~ 24 V 5 kHz channels, 2 ~ 24 V 20 kHz channels
	Programming	TwidoSoft (Ladder language, Instruction List), 3000 instructions (6000 with memory cartridge)
	Application memory	3000 instructions (6000 with memory extension cartridge)
Conformity to standards	IEC 61131-2, UL 508, UL 1604/CSA C22.2 No. 213 (Class 1 Division 2 Groups A, B, C, D), CE and TuV	
LED indicators	Controller status (PWR, RUN, ERR and STAT), I/O (IN <sup>P</sup> /OUT <sup>●</sup> ) Ethernet network status (LAN ST), 10 or 100 Mbps data rate (L ACT)	

## References



TWD LCAE 40DRF

Description	No. of discrete I/O	Reference	Weight kg
<b>Compact base with integrated Ethernet port</b> ~ 100...240 V power supply	24 ~ 24 V inputs 14 relay outputs 2 solid state outputs ~ 24 V	<b>TWD LCAE 40DRF</b>	-
Class A10			

Separate parts, I/O expansion modules, extension modules, prewired system and TwidoSoft programming software: Please consult our "Automation and relay functions" catalog.

# Transparent Ready


## Controllers and PLCs

### Modicon TSX Micro

### Ethernet network modules



TSX 37 20 TSX Micro platform



#### Presentation

Modicon TSX Micro is the automation platform designed for small machines and mobile systems. It is flexible and modular, offering connections using removable screw terminals or HE10 connectors, and is suitable for applications with up to 248 discrete I/O.

TSX Micro supports the following:

- 4 application-specific functions: counting, position control, analog/process control and safety.

- AS-Interface, CANopen, Fipio, Modbus and Uni-Telway buses, and Ethernet, Fipway and Modbus Plus networks.

TSX Micro offers a choice of supply voltages:  $\text{---} 24 \text{ V}$  or  $\sim 230 \text{ V}$ .

#### Description

TSX ETZ 410/510 Ethernet modules are autonomous. They are mounted outside the TSX Micro PLC rack, on DIN rails or on AM1-PA pre-slotted plates.

TSX ETZ 410/510 modules have the following on the front panel:

- 1 Three LEDs indicating the module status (RUN, ERR, RX/TX).
- 2 The module MAC address (default factory-set address).
- 3 A mini-DIN connector for connection to the terminal port (marked TER).
- 4 An RJ45 connector for Uni-Telway auxiliary connector RS 485 serial link (marked RS 485).
- 5 A standard RJ45 connector for connection to the Ethernet network (marked 10BASE-T/100BASE-TX).
- 6 A 9-pin male SUB-D connector for RS232 serial link (Modem).
- 7 Screw terminals for connecting the  $\text{---} 24 \text{ V}$  external power supply.
- 8 A support plate for fixing the module.

5

#### Characteristics

Type of module	TSX ETZ 410	TSX ETZ 510
<b>Transparent Ready services</b>		
Class	B20	C20
Standard Web server	"Rack Viewer" access to the product description and status and to the PLC diagnostics "Data editor" access to the configuration functions and variables	
FactoryCast configurable Web server	–	Editor for creating Web page mimics User Web page hosting (8 Mb available)
Ethernet TCP/IP communication management services	Modbus messaging (read/write data words) FDR client for automatic assignment of the IP address and network parameters SNMP agent, detection of the device by an SNMP manager	
<b>Structure</b>		
Physical interface	RJ45 standard 10BASE-T/100BASE-TX connector	
Data rate	10/100 Mbps with automatic recognition	
Medium	Twisted pair	
<b>Network module</b>		
Operating temperature	0...+ 60°C	
Relative humidity	10...95% non condensing during operation	
Degree of protection	IP 20	
Power supply	$\text{---} 24 \text{ V}$ (limits $\text{---} 19.2...30 \text{ V}$ ), 100 mA	
Other TCP/IP communication service	Uni-TE messaging (client/server requests: 128 bytes in synchronous mode and 1 Kb in asynchronous mode)	
Modem connection	RS 232C link, PPP protocol, Half or Full-Duplex, 56 Kbps	
Conformity to standards	IEC/EN 61131-2, UL 508, CSA 1010-1, FM Class 1 Division 2, Cc	
LED indicators	Ethernet network status (RUN), transmission/reception activity (TX/RX) Ethernet port fault (ERR)	

#### References





TSX ETZ 410/510

Description	Transparent Ready class	Reference	Weight kg
Autonomous Ethernet modules for TSX Micro PLC	B20	<b>TSX ETZ 410</b>	0.280
TSX 37 10/20/30	C20	<b>TSX ETZ 510</b>	0.280

For further information: Please consult our "Modicon TSX Micro and PL7 software automation platform" catalog.

# Transparent Ready Controllers and PLCs Modicon Premium Processors with integrated Ethernet port

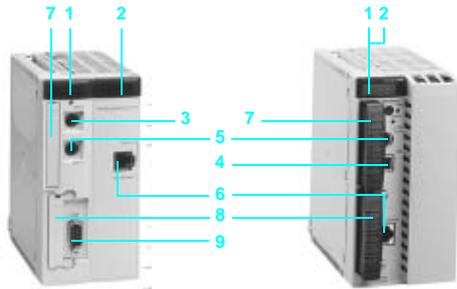

## Presentation

Modicon Premium is the optimized automation platform for complex machines, manufacturing and discrete automation. These processors are open to the latest technologies, with built-in universal Ethernet TCP/IP connections. Premium also has numerous advanced automation functions (counting, electronic cam, position control, weighing, control data storage and machine safety).

## Description

TSX P57 1634M, TSX P 26●●/2823/36●●/4634/4823/5634M double format processors (1) with built-in Ethernet port include the following on the front panel:

- 1 A display block with 5 LEDs relating to the processor.
- 2 A display block relating to the built-in Ethernet port.
- 3 An 8-way female mini-DIN connector marked TER for connecting a programming or adjustment terminal.
- 4 A USB connector marked TER for connecting a programming or adjustment terminal.
- 5 An 8-way female mini-DIN connector marked AUX for connecting an RS 485 peripheral device.
- 6 A standard (RJ45) connector for 10BASE-T/100BASE-TX interface.
- 7 A slot for a PCMCIA memory extension card.
- 8 A slot for a PCMCIA communication or data storage memory extension card.
- 9 A 9-way SUB-D connector (on TSX P57 2823/4823M models) for Fipio bus manager link.

## Characteristics

Type of module	Unity Pro software PL7 Pro software	TSX P57 1634M	TSX P57 2634M TSX P57 2●23M	TSX P57 3634M TSX P57 3624M	TSX P57 4634M TSX P57 4823M	TSX P57 5634M	
Transparent Class		B30					
Ready services	Standard Web server	"Rack Viewer" access to the product description and status and to the PLC diagnostics "Data editor" access to the configuration functions and PLC variables					
	Standard Ethernet TCP/IP communication service	Modbus TCP messaging (read/write data words)					
	Ethernet TCP/IP advanced communication services	I/O Scanning	Yes (between 64 stations)				Yes (128 stations)
		Global Data	Yes				
		FDR server	Automatic assignment of IP address and network parameters				
		SMTP E-mail notification	Yes				
		SNMP network administrator	Yes				
		Pass band management	Yes				
Structure	Physical interface	10BASE-T/100BASE-TX (RJ45)					
	Data rate	10/100 Mbps with automatic recognition					
	Medium	Twisted pair					
Premium processor	No. of discrete I/O	512	1024		2048		
	No. of analog I/O	24	80	128	256	512	
	No. of application-specific channels	8	24	32	64		
	Max. no. of network connections (including integrated link)	1		3	4	5	
	Other TCP/IP communication service	Uni-TE TCP	Client/server requests: 128 bytes in synchronous mode and 1 Kb in asynchronous mode				
		X-Way	Yes				
	Operating temperature	0...+60°C					
	Relative humidity	10...95% non condensing during operation					
	Degree of protection	IP 20					
	Power supply	Via the power supply of the rack supporting the processor					
Conformity to standards	IEC/EN 61131-2, UL 508, CSA 1010-1, FM Class 1 Division 2 Group A/B/C/D, C€						
LED indicators	Ethernet network status (RUN), transmission/reception activity (TX/RX) Collision detection (COL), Ethernet link diagnostics (STS), Ethernet port fault (ERR) 5 LEDs specific to the operation of the processor (RUN, ERR, I/O, TER and FIP)						

5

## References



TSX P57 4634/5634M

TSX P57 26/28/36/48●●M

Description	Discrete I/O Analog I/O App-sp. chann.	Reference		Weight kg
		Unity software	PL7 software	
Processors with integrated Ethernet link	512 / 24 / 8	TSX P57 1634M	–	0.042
	1024 / 80 / 24	TSX P57 2634M	TSX P57 2623M	0.042
		–	TSX P57 2823M	(2)
Class B30	1024 / 128 / 32	TSX P57 3634M	TSX P57 3623M	0.042
	2048 / 256 / 64	TSX P57 4634M	TSX P57 4823M	(2) 0.042
	2048 / 512 / 64	TSX P57 5634M	–	
		–	–	

(1) Except TSX P57 1634M processor, single format.  
(2) Also has an integrated Fipio bus manager link.




For further information: Please consult our "Modicon Premium automation platform, Unity & PL7" catalog.

# Transparent Ready

## Controllers and PLCs

### Modicon Atrium

### Coprocessors and TCP/IP gateway

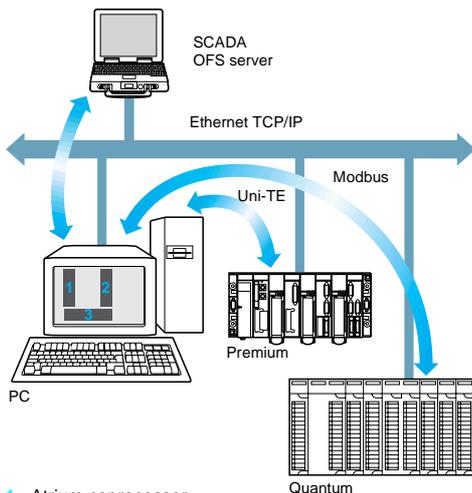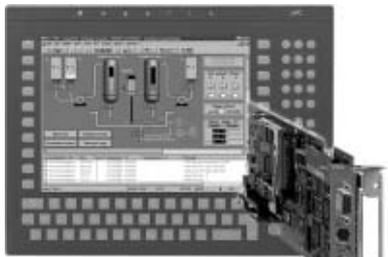

- 1 Atrium coprocessor
- 2 Ethernet TCP/IP card or integrated port
- 3 TCP/X-Way software gateway

#### Presentation

The Atrium coprocessor (PCI bus card), combined with a Magelis iPC industrial PC, provides a PC with a built-in PLC and supervisory software. This type of configuration is designed for installations that require a high level of interaction between the automation functions and the HMI applications. The software gateway enables Atrium PLCs to communicate using Modbus (or Uni-TE) Ethernet TCP/IP via the integrated Ethernet port in the industrial PC.

#### Description of the Atrium coprocessor

TSX PCI 57 204/354M coprocessors occupy two consecutive slots on the PC PCI bus but only use one electrically. They comprise:

- On the faceplate:
  - 1 A slot for a PCMCIA communication or data storage memory extension card.
  - 2 A 9-way female SUB-D connector for connecting Bus X to the first Premium rack supporting the I/O modules and application-specific modules.
  - 3 An 8-way female mini-DIN connector marked TER for connecting a programming terminal.
  - 4 An ERR LED (coprocessor or embedded equipment fault).
  - 5 A 9-pin male SUB-D connector (on TSX PCI 57 354M model) for Fipio bus manager communication.
- On the card, component side:
  - 4 or 5 LEDs indicating the operating status.
  - A slot for the coprocessor internal RAM backup battery.
  - A slot for a PCMCIA memory extension card.

#### Description of the TCP/IP gateway

The TCP/X-Way software gateway performs 2 main functions for Atrium coprocessors:

- Communication using the Modbus (or Uni-TE) TCP/IP protocol via the Ethernet TCP/IP card integrated in the PC.
- Data exchange in both directions with remote stations via the telephone modem in the PC.

This software interfaces with the Atrium coprocessor PCIway driver and automatically routes messages. The most common configurations are:

- Via Ethernet network (diagram opposite). Access is made secure by checking incoming IP addresses, in a similar way to the Premium PLC Ethernet TSX ETY 4103 module. The Global Data and I/O Scanning services are not supported.
- Via modem link. Incoming calls are checked via the standard Windows password checking mechanisms. In addition to remote access with Unity Pro, the TCP/IP gateway enables communication with other stations that can be connected to a local Ethernet network (RAS (*Remote Access Server*) function).

#### Characteristics

Type of module	Unity Pro software	TSX PCI 57 204M	TSX PCI 57 354M
Transparent Ready services	Class	A10	
	Standard Web server	None	
	Standard Ethernet TCP/IP communication service	Modbus TCP messaging (read/write data words)	
Structure		That of the Ethernet link integrated in the host PC	
Atrium coprocessor	See characteristics of the Premium processor	TSX P57 2●●●M, page 5/5	TSX P57 3●●●M, page 5/5

#### References

Description	Discrete I/O Analog I/O App-sp. chann.	Type of license	Reference	Weight kg
Coprocessors	1024 / 80 / 24	–	TSX PCI 57 204M	0.310
	2048 / 128 / 32	–	TSX PCI 57 354M	0.340
TCP/IP gateway software	–	Single station	TLX CD GTW 10M	–
	–	10 stations	TLX CD10 GTW 10M	–
	–	200 stations	TLX CDUNT GTW 10M	–




TSX PCI 57 204M



TSX PCI 57 354M

For further information: Please consult our "Modicon Premium automation platform Unity & PL7" catalog.

# Transparent Ready Controllers and PLCs Modicon Premium Ethernet network module



## Presentation

TSX ETY ●●● modules are single format modules which are installed in a rack slot on Modicon Premium PLC stations or Modicon Atrium coprocessors. A configuration can take from 1 to 4 network modules, depending on the type of processor. TSX ETY 110/110 WS/4103/5103 Ethernet modules route X-Way and Uni-TE messages transparently from a TCP/IP network to an X-Way network and vice versa.

## Description

The front panel of TSX ETY ●●● modules comprises:

- 1 A display block indicating the state of the module.
- 2 A standard connector for 100BASE-TX and/or /100BASE-T interface (RJ45) depending on the model.
- 3 A standard connector for 10BASE5 interface (AUI).
- 4 Four thumbwheels for defining the station number and network number.

## Characteristics

Type of module	TSX ETY 110	TSX ETY 110 WS	TSX ETY 4103	TSX ETY 5103	TSX WMY 100M	
<b>Transparent Ready services</b>	Class	A10	C10	B30	C30	D10
	Standard Web server	–	"Rack Viewer" access to the product description and status and to the PLC diagnostics "Data editor" access to the configuration functions and variables			
	FactoryCast configurable Web server	–	Yes	–	Yes	
	User Web pages (available size)	–	Yes (1.4 Mb)	–	Yes (8 Mb)	
	FactoryCast HMI active Web server	–	–	–	Yes (1)	
	Standard Ethernet TCP/IP communication services	Modbus TCP messaging (read/write data words)				
	Ethernet TCP/IP advanced communication services	I/O Scanning	–	Yes (between 64 stations)	–	
		Global Data	–	Yes	–	
		FDR server	–	Automatic assignment of IP address and network parameters	–	
		NTP time synchronization	–	Yes	–	
		SMTP e-mail notification	–	Yes	–	
		SNMP network administrator	SNMP agent			
		TCP Open	–	Option	–	
		Pass band management	–	Yes	–	
<b>Structure</b>	Physical interface	10BASE-T (RJ45)/10BASE5 (AUI)		10BASE-T/100BASE-TX (RJ45)		
	Data rate	10 Mbps		10/100 Mbps with automatic recognition		
	Medium	Twisted pair/AUI cable		Twisted pair		
<b>Network module</b>	Operating temperature	0...+60°C				
	Relative humidity	10...95% non condensing during operation				
	Degree of protection	IP 20				
	Power supply	Via the power supply of the rack supporting the processor				
	Other TCP/IP communication service	Uni-TE TCP	Client/server requests: 128 bytes in synchronous mode and 1 Kb in asynchronous mode		–	
		Ethway/X-Way	Uni-TE, common words		–	
	Conformity to standards	IEC/EN 61131-2, UL 508, CSA 1010-1, FM Class 1 Division 2 Group A/B/C/D, CE				
	LED indicators	Ethernet network status (RUN), transmission/reception activity (TX/RX) Collision detection (COL), Ethernet port fault (ERR)				

## References



TSX ETY 110/110 WS

TSX ETY ●103/WMY 100

Description	Data rate	Transparent Ready class	Reference	Weight kg
<b>Ethernet TCP/IP modules</b>	10 Mbps	A10	<b>TSX ETY 110</b>	0.370
		C10	<b>TSX ETY 110 WS</b>	0.370
	10/100 Mbps	B30	<b>TSX ETY 4103</b>	0.340
		C30	<b>TSX ETY 5103</b>	0.340
		D10	<b>TSX WMY 100</b>	0.340
<b>FactoryCast HMI software</b>	HMI application development and debugging in TSX WMY 100		<b>TLX CD FCHMI V1M</b>	–
<b>TCP Open software (2)</b>	SDKC, C language development		<b>TLX LSDKC PL741M</b>	–
	TCP Open function block library		<b>TLX CD TCPA33E</b>	–

- (1) Database management, arithmetic and logic calculations, automatic e-mail transmission on process event, connection to relational databases.  
(2) With TSX ETY 110 WS and TSX ETY 5103 modules.


For further information: Please consult our "Modicon Premium automation platform Unity & PL7" catalog.

# Transparent Ready

## Controllers and PLCs

### Modicon Quantum

#### Processors with integrated Ethernet port



### Presentation

Equipped with a high performance processor, Modicon Quantum is optimized for process control and high-availability needs.

The Quantum platform meets the requirements of the agribusiness, pharmaceutical, metallurgy, chemical-petrochemical and energy-infrastructure sectors.

The new Quantum processors are open to the latest technologies with built-in Ethernet TCP/IP connections, data storage, and a LCD keypad for local monitoring.

### Description

The 140 CPU 651 50 and 140 CPU 651 60 processors have the following on the front panel:

- 1 An LCD display cover, providing access to:
  - A key switch for locking system operations that may be requested and all the permitted parameters that may be modified via the LCD display (2) and 5-button keypad (3).
  - A slot for the backup battery.
  - A "Restart" pushbutton.
- 2 An LCD display (2 lines of 16 characters) with brightness and contrast controls.
- 3 A 5-button keypad with LEDs (ESC, ENTER, MOD, Î, =>).
- 4 An RJ45 connector for connection to the Modbus bus.
- 5 A type B female USB connector for connecting the programming PC.
- 6 A 9-way female SUB-D connector for connection to the Modbus Plus network.
- 7 Two slots for PCMCIA memory extension cards.
- 8 Two LEDs marked COM and ERR.
- 9 An RJ45 connector for connection to the Ethernet network.

### Characteristics

Type of module	Unity Pro software	140 CPU 651 50	140 CPU 651 60	
<b>Transparent Ready services</b>	Class	B30		
	Standard Web server	"Rack Viewer" access to the product description and status and to the PLC diagnostics "Data editor" access to the configuration functions and PLC variables		
	Standard Ethernet TCP/IP communication service	Modbus TCP messaging (read/write data words)		
	Ethernet TCP/IP advanced communication services	I/O Scanning	Yes (between 128 stations)	
		Global Data	Yes	
		FDR client	Automatic assignment of IP address and network parameters	
		SMTP e-mail notification	Yes	
SNMP network administrator	SNMP network administrator	Yes		
	Pass band management	Yes		
<b>Structure</b>	Physical interface	10BASE-T/100BASE-TX (RJ45)		
	Data rate	10/100 Mbps with automatic recognition		
	Medium	Twisted pair		
<b>Quantum processor</b>	No. of discrete I/O	Local: 26 slots, decentralized: 31744 I/31744 Q, distributed: 8000 I/8000 Q/network		
	No. of analog I/O	Local: 26 slots, decentralized: 1984 I/31984 Q, distributed: 500 I/500 Q/network		
	Max. no. of communication modules	6 in local rack		
	Max. memory capacities	Program	7168 Kb	
		Localized/non-localized data	512 Kb	1024 Kb (768 Kb with no PCMCIA card)
		Data storage	8192 Kb	
	Operating temperature	0...+ 60°C		
	Relative humidity	10...95% non condensing during operation		
	Degree of protection	IP 20		
Power supply	Via the power supply of the rack supporting the processor			
Conformity to standards	UL 508, cUL, CSA 22.2-142, FM Class 1 Division 2, C€			
LED indicators	Activity on the Ethernet port (COM), collision detection (ERR)			

### References



140 CPU 651 50/60

Description	Processor clock frequency	Program/data capacity (1)	Reference	Weight kg
<b>Processors with integrated Ethernet link</b> Class B30	166 MHz	7168 Kb/512 Kb	<b>140 CPU 651 50</b>	-
	266 MHz	7168 Kb/1024 Kb	<b>140 CPU 651 60</b>	-

(1) With PCMCIA card.

For further information: Please consult our "Modicon Quantum automation platform, Unity, Concept & ProWORX" catalog.



### Presentation

Ethernet 140 NOE 771 ●1/NWM 100 00 Ethernet network modules are single format modules for installing in the local rack slots of a Modicon Quantum PLC configuration.

A configuration can take from 2 to 6 application-specific modules, including network modules, depending on the type of processor.

### Description

The front panel of TCP/IP 140 NOE 771 01/771 11 and 140 NWM10000 Ethernet modules comprises:

- 1 A display block, which indicates the module status and the transmission status on the network.
- 2 A hinged cover for access to:
  - A standard (RJ45) connector for 10BASE-T/100BASE-TX interface.
  - A connector for 100BASE-FX optical interface (MT-RJ).

### Characteristics

Type of module	140 NOE 771 01	140 NOE 771 11	140 NWM 100 00
<b>Transparent Class</b>	B30	C30	D10
<b>Ready services</b>	Standard Web server		
	"Rack Viewer" access to the product description and status and to the PLC diagnostics "Data editor" access to the configuration functions and variables		
FactoryCast configurable Web server	Editor for creating Web page mimics	Yes	
	User Web page hosting (available size)	Yes (8 Mb)	
FactoryCast HMI active Web server			Yes (1)
Standard Ethernet TCP/IP communication services	Modbus TCP messaging (read/write data words)		
Ethernet TCP/IP advanced communication services	I/O Scanning	Yes (between 128 stations)	–
	Global Data	Yes	–
	FDR server	Automatic assignment of IP address and network parameters	–
	NTP time synchronization	Yes	–
	SMTP e-mail notification	Yes	–
	SNMP network administrator	Yes	SNMP agent
	Pass band management	Yes	–
<b>Redundancy service</b>	Compatible with Hot Standby redundant architecture		
<b>Structure</b>	Physical interface	10BASE-T/100BASE-TX (RJ45) or 100BASE-FX (MT/RJ)	
	Data rate	10/100 Mbps	
	Medium	Twisted pair/optical fiber	
<b>Network module</b>	Operating temperature	0...+ 60°C	
	Relative humidity	10...95% non condensing during operation	
	Degree of protection	IP 20	
	Power supply	Via the power supply of the rack supporting the processor	
	Conformity to standards	UL 508, cUL, CSA 22.2-142, FM Class 1 Division 2, C€	
	LED indicators	Rack operational (Active), module ready (Ready), network active (Link) Ethernet network status (Run), download mode (Kernel), Full-duplex mode (Fduplex) Transmission/reception activity (TxAct/RxAct), 10 Mbps or 100 Mbps data rate (10MB/100MB) Collision detection (Coll), Ethernet module fault (Fault)	

(1) Database management, arithmetic and logic calculations, automatic e-mail transmission on process event, connection to relational databases.

### References



140 NOE 771 ●1/NWM 100 00

Description	Data rate	Transparent Ready class	Reference	Weight kg
Ethernet TCP/IP modules	10/100 Mbps	B30	140 NOE 771 01	0.345
		C30	140 NOE 771 11	0.345
		D10	140 NWM 100 00	0.345

For further information: Please consult our "Modicon Quantum automation platform, Unity, Concept & ProWORX" catalog.



## 6 - Human/Machine Interface products

---

### 6 - Product data sheets

■ Magelis XBT graphic terminals .....	page 6/2
■ Magelis iPC industrial PCs	
□ Smart and Compact .....	page 6/3
□ Modular .....	page 6/4
■ FactoryCast HMI application development software .....	page 6/5
■ Vijeo Look SCADA software .....	page 6/6
■ Monitor V7.2 SCADA software .....	page 6/7
■ OFS data server software .....	page 6/8


#### Presentation

Magelis XBT G (with 5.7" to 12.1" LCD touch screen) and Magelis XBT F (with keypad or 10.4" touch screen) graphic terminals provide simple access to communication solutions via their direct connection to the Ethernet TCP/IP network.

#### Characteristics and references



Magelis XBT G touch screen graphic terminals					
<b>Display</b>	LCD screen size	5.7"	7.4"	10.4"	12.1"
<b>Functions</b>	Representation of variables	Alphanumeric, bitmap, bargraph, gauge, button, light, clock, flashing light, keypad			
	Curves	Yes, with log			
	Alarm log	Yes, incorporated			
<b>Communication</b>	Integrated Ethernet	10BASE-T (RJ45)			
	Downloadable protocols	Uni-Telway, Modbus, Modbus TCP/IP			
<b>Compatibility with PLCs</b>		Twido, Nano, Modicon TSX Micro, Modicon Premium, Modicon Quantum			
<b>Configuration software</b>		Vijeo Designer <b>VJD SPU LFUCD V10M</b> (on Windows 2000 and XP)			
<b>Compact Flash card slot</b>		–	Yes		
<b>Dimensions</b>		171 x 60 x 138 mm (1) 132 x 74 x 78 mm (2)	215 x 60 x 170 mm	317 x 58 x 243 mm	
<b>Supply voltage</b>		— 24 V			
<b>References</b>	Back-lit black and white monochrome STN screen	<b>XBT G2130 (1)</b>	–	–	–
	64-color STN screen	–	–	<b>XBT G5230</b>	–
	256-color TFT screen	<b>XBT G2330 (2)</b>	<b>XBT G4330</b>	<b>XBT G5530</b>	<b>XBT G6330</b>

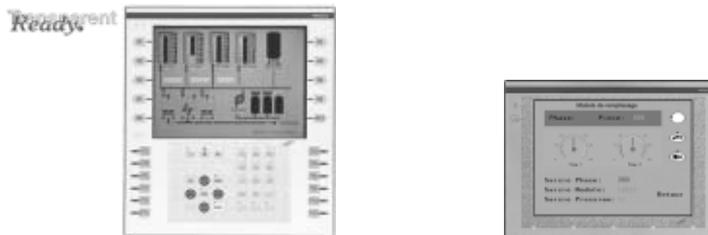

Magelis XBT F graphic terminals			
<b>Display</b>	LCD screen size	10.4"	
	Format	256-color TFT	
<b>Data entry keypad</b>	Soft function keys with LED	10	–
	Static function keys with LED	12 + legends	–
	Service keys	12	–
	Alphanumeric keys	12 + 3 alphanumeric access	–
<b>Touchscreen data entry</b>		–	Yes
<b>Functions</b>	Representation of variables	Alphanumeric, bitmap, bargraph, gauge, potentiometer, selector	
	Recipes	125 records maximum with 5000 values	
	Curves	16	
	Alarm log	Yes	
<b>Communication</b>	Integrated Ethernet	10BASE-T/100BASE-TX (RJ45)	
	Buses and networks	Fipway, Modbus Plus, and third-party protocols	
	Downloadable protocols	Uni-Telway, Modbus, Modbus TCP/IP	
<b>Compatibility with PLCs</b>		Twido, Nano, Modicon TSX Micro, Modicon Premium, Modicon Quantum	
<b>Configuration software</b>		<b>XBT L1003M</b> (on Windows 98, 2000 and XP)	
<b>Dimensions</b>		296 x 91 x 322 mm	296 x 91 x 222 mm
<b>Supply voltage</b>		— 24 V	
<b>References</b>	256-color TFT screen	<b>XBT F024610</b>	<b>XBT F034610</b>

#### Separate parts

<b>Magelis XBT G graphic terminals</b>	16 Mb Compact Flash memory	32 Mb Compact Flash memory	
<b>References</b>	<b>XBTZGM16</b>	<b>XBTZGM32</b>	
<b>Magelis XBT F graphic terminals</b>	16 Mb PCMCIA memory card	Modbus Plus network PCMCIA card	Fipway network PCMCIA card
<b>References</b>	<b>XBT MEM16</b>	<b>TSX MBP 100</b>	<b>TSX FPP 20</b>

For further information, please consult our "Human-Machine Interfaces, The essential guide" brochure or our "Human-Machine Interface" catalog.

# Transparent Ready

## Human-Machine Interface products

### Magelis Smart iPC/Compact iPC industrial PCs

#### Presentation

Magelis Smart iPC and Compact iPC industrial PCs are characterized by their compact size, their simplicity and their speed of setup. They use the latest Ethernet TCP/IP and Web client connection technologies.

Smart iPC and Compact iPC industrial PCs have a 15" TFT active matrix back-lit color LCD touchscreen. They include:

- An Ethernet 10BASE-T/100BASE-TX port (RJ45 connector)
- Web browser software tools (Internet/Intranet)

Also included, depending on the model:

- Smart iPC, a hardened PC with no vulnerable components (hard disk, CD-ROM drive, etc.), includes:
  - Windows XPe operating system
  - A client for Windows Terminal Services client/server architectures
  - Software (Readers) for reading Word (.doc), Excel (.xls), PowerPoint (.ppt) and Acrobat (.pdf) files.
- Compact iPC, an industrial PC with a hard disk (> 20 MB) and CD-ROM and floppy disk drives.

#### Characteristics and references



Compact industrials PCs		Smart iPC	Compact iPC
Display	Size	15" active matrix XGA (1024 x 768)	
	Format	TFT active matrix back-lit color LCD (262,144 colors)	
Data entry		Via touchscreen	
Processor	Format	VIA	Intel Pentium 4 Mobile
	Frequency	667 MHz	1.7 GHz
Internal hard disk		–	≥ 20 Gb IDE, 2½"
RAM		250 Mb expandable up to 512 Mb	250 Mb expandable to 512 Mb (1 memory slot max.)
CD-ROM drive		–	Yes, 24x
Expansion slots		2 PCMCIA slots	1 PCI bus slot, 2 PCMCIA slots 1 Compact Flash slot
Ethernet TCP/IP network		1 x 10BASE-T/100BASE-TX (RJ45)	
Operating system		Windows Xpe integrated	Windows 2000 preinstalled
I/O ports		2 x USB, 1 x COM1, 1 x COM2, 1 x LPT1 (parallel), 1 x PS/2 keyboard	2 x USB, 1 x COM1, 1 x COM2, 1 x LPT1 (parallel), 1 x PS/2 keyboard and 1 x PS/2 mouse
	On front panel	–	1 x USB
Fixing		Fixings included with each product for mounting on panel or enclosure door	
Dimensions W x D x H		395 x 62 x 294 mm	395 x 100 x 294 mm
Power supply		24 VDC	115...230 VAC
References		MPC ST5 2NDJ 00T	MPC KT5 2NAA 00N MPC KT5 5NAA 00N

Compact iPC and Vijeo Look software combined offer			
Type of processor	VIA 667 MHz	Pentium 4 Mobile 1.7 GHz	
Vijeo Look supervisory software(1)	Run Time (RT)		Build Time/Run Time (BT/RT)
References	MPC KT5 2NAA 00A	MPC KT5 5NAA 00A	MPC KT5 5NAA 00B

Separate parts			
Description	512 Mb Compact Flash memory	512 Mb memory extension for VIA 667 MHz	512 Mb memory extension for Pentium 4 Mobile 1.7 GHz
References	MPC YN0 0CFE 00N	MPC YN0 2RAM 512	MPC YN0 5RAM 512

(1) See page 6/5.

For further information, please consult our "Human-Machine Interface, The essential guide" brochure or our "Human-Machine Interface" catalog.

# Transparent Ready

## Human-Machine Interface products

### Magelis Modular iPC industrial PCs

#### Presentation

The modularity and flexibility of the Magelis Modular iPC range enables you to choose the ideal solution for your HMI requirements on a PC base, with easy upgrading and fast maintenance:

- IP 65 front panels: 12" or 15" color TFT LCD screen, with or without touchscreen capability, and with or without QWERTY keyboard.
- Control boxes, with varying power and expansion capabilities.

As standard, the Control boxes include an Ethernet 10/100 Mbps port, two USB ports, the various standard serial and parallel ports, and up to 6 PCI/ISA bus slots.

#### Characteristics and references



Screens for Modular iPC industrial PCs (any screen can be used with any type of Control box)

<b>Display</b>	LCD screen size	TFT active matrix back-lit (262,144 colors)		
<b>Data entry</b>	By	Keypad	Keypad and touchscreen	Touchscreen
	Alphanumeric keys	70 standard IBM keys		–
	User function keys	2 x 10 keys		–
<b>Input/output ports and device on front panel</b>		1 IrDA infrared port, 1 PS/2 port for keyboard/mouse and pointing device		
<b>Combination</b>		With any of the Control boxes listed below		
<b>Dimensions</b>	Screen size 12"	410 x 52.7 x 330 mm		380 x 52.7 x 330 mm
	Screen size 15"	480 x 52.7 x 370 mm		460 x 52.7 x 340 mm
<b>References</b>	Screen size 12"	MPC NA2 0NNN 00N	MPC NB2 0NNN 00N	MPC NT2 0NNN 00N
	Screen size 15"	MPC NA5 0NNN 00N	MPC NB5 0NNN 00N	MPC NT5 0NNN 00N

Ready



6

Control boxes	Small	Medium	Large		
<b>Processor</b>	Intel Celeron 566 MHz	Intel Pentium III 850 MHz	Intel Celeron 566 MHz	Intel Pentium III 850 MHz	
<b>Internal hard disk</b>	> 20 Gb	> 20 Gb, removable			
<b>RAM</b>	SDRAM 256 Mb, expandable to 512 Mb (2 memory slots maximum)				
<b>CD-ROM drive</b>	Optional	Removable, 24x			
<b>Floppy disk drive</b>	3½", 1.44 Mb	3½", 1.44 Mb, removable			
<b>Expansion slots</b>	–	3 slots (1 ISA bus, 1 PCI bus and 1 PCI/ISA bus)	6 slots (2 ISA bus, 3 PCI bus and 1 PCI/ISA bus)		
<b>Integrated Ethernet TCP/IP port</b>	1 x 10BASE-T/100BASE-TX (RJ45)				
<b>I/O ports</b>	2 x USB, 2 x COM, 1 x parallel, 1 x external VGA screen, 1 x PS/2 keyboard, 1 x PS/2 pointing device				
<b>Combination</b>	With any of the above types of screen or for use on its own (in this case, use the MPC NP0 0NNN 00N mounting panel)				
<b>Operating system</b>	Windows 2000 or Windows XPe pre-installed				
<b>Dimensions</b>	310x94.2x310mm	310 x 184.5 x 310 mm	310 x 258 x 310 mm		
<b>References</b>	~ 115...230 V power supply	MPC AN0 2NA● 00N	MPC BN0 2NA● 00N	MPC CN0 2NA● 00N	MPC CN0 5NA● 00N
	~ 24 V power supply	MPC AN0 2ND● 00N	MPC BN0 2ND● 00N	MPC BN0 2ND● 00N	MPC CN0 5ND● 00N


Replace ● with A for Windows 2000, and with J for Windows XPe

Modular Magelis iPC-Vijeo Look software combined offers	Small	Medium	Large
<b>Processor</b>	Intel Celeron, 566 MHz		
<b>Vijeo Look supervisory software</b> (see page 6/5)	Run Time (RT)		Build Time/Run Time (BT/RT)
<b>References</b> ~ 115...230 V power supply	MPC AN0 2NAA 00A	MPC BN0 2NAA 00B	MPC BN0 2NAA 00C
<b>Separate parts</b>			
<b>Description</b>	RAM memory extension		Front panel remote connection kit (with 10 m cable)
	64 MB	128 MB	
		256 MB	
<b>References</b> ~ 115...230 V power supply	MPC YN0 0RAM 064	MPC YN0 0RAM 128	MPC YN0 0RAM 256
			MPC YN0 0RFP KIT

# Transparent Ready

## Human-Machine Interface products

### Software for FactoryCast HMI applications

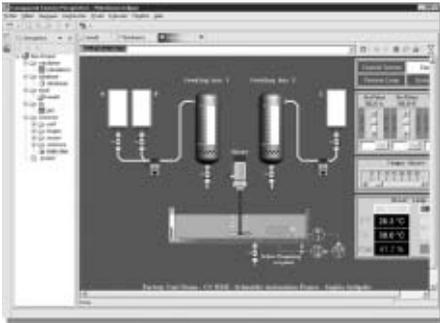

#### FactoryCast HMI application development software

FactoryCast HMI application development software, referenced TLX CD FCHMI V1M, provides multiproject management and complete control of FactoryCast HMI applications, during both the development and the debugging phases, thanks to the online mode and simulation mode (operational when the system is offline) options.

This software enables the intuitive and user-friendly setup of HMI functions by simply setting parameters using a tree structure of the application and can be used for complete management of the Web site:

- Setting parameters for HMI functions:
  - Configuration of PLC interfaces: Import symbol databases and set parameters for the acquisition period
  - Configuration of spreadsheets
  - Configuration of E-mail
  - Configuration of connections to databases
- Management of the Web site:
  - Management of the Web site tree structure (creation/deletion of HTML folders and files)
  - Management of default Web site pages
  - Management of user Web site pages (1)
  - Graphic object editor for animating Web pages
  - Launch of the system editor for HTML pages (FrontPage or similar)
  - Up/downloading/comparison of Web pages in online mode
  - Debugging of Web pages in online mode or in simulation mode (including animations and Java beans)

■ Simulation mode  
 The application and the Web site (including animations and Java beans) can be debugged in either online or simulation mode, which enables operation to be tested without a FactoryCast HMI module and without a physical connection to a PLC, thus simplifying debugging.

An integrated graphics editor in the FactoryCast HMI software can be used to easily customize the following graphic objects: bar charts, gauges, LEDs, curves, cursors, operator input fields, alphanumeric display fields, buttons, etc. User Web pages are created graphically using an external HTML editor (FrontPage or similar, not supplied). FactoryCast HMI includes a plug-in for FrontPage 2000. This plug-in makes it easier to set up animations, which enable PLC variables to be accessed in realtime in the HTML pages created by the user. They are created in the HTML editor by simply inserting customized graphic objects (FactoryCast Java beans).

(1) Creation of user Web pages: User Web pages created in the FactoryCast HMI environment are actual animated supervision screens and can be used to monitor your process. Based on HMI Web technology, they enable realtime access to PLC variables thanks to the FactoryCast graphic objects library (FactoryCast Java beans).

#### References


##### Ethernet TCP/IP Transparent Ready modules

Embedded Web server	Name and description	Speed	Reference	Weight kg
FactoryCast HMI	FactoryCast HMI Premium module	10/100 Mbit/s	<b>TSX WMY 100</b>	0.340
	FactoryCast HMI Quantum module	100 Mbit/s	<b>140 NWM 100 00</b>	-

##### FactoryCast HMI installation software (to be ordered separately)

Name and description	Use	Operating system	Reference	Weight kg
<b>Multilingual FactoryCast HMI (1)</b>	Development and debugging of the HMI application	Windows 2000, Windows XP	<b>TLX CD FCHMI V1M</b>	0.340

(1) Includes documentation in electronic format.

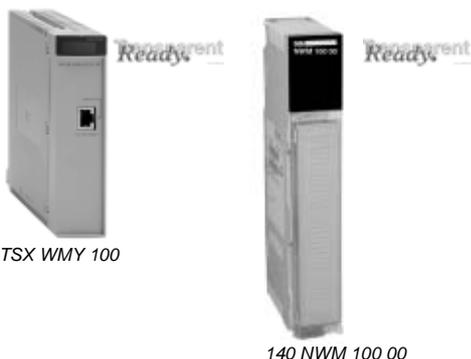

TSX WMY 100

140 NWM 100 00

# Transparent Ready

## Human-Machine Interface products

### Vijeo Look control software



#### Presentation

Vijeo Look version 2.5 is a SCADA (Supervisory Control And Data Acquisition) software package designed for standalone stations. It is based on open, standardized technologies, similar to Transparent Ready products. For example, it provides the ability to display pages in Modicon PLC embedded Web servers.

It is easy to implement and offers all the standard functions of a graphic supervision tool. Vijeo Look is supplied with a pre-configured OFS (*OPC Factory Server*, see page 0/7) data server. It is compatible with PCs running Windows 2000 Professional or Windows XP Professional, and is used for creating applications based on Telemecanique Twido, Modicon TSX Micro, Modicon Premium/Atrium/Momentum/Quantum PLCs.


The functions of Vijeo Look supervisory software can be used for:

- Acquisition of PLC tags
- Visualization of these tags
- Process supervision and control
- Recording the values of PLC tags or internal process tags in a database
- Embedded software processing

PLC tags are acquired exclusively by connecting to the PLCs via the OPC server, supplied with the OFS data server software included with Vijeo Look.

In the case of discrete and analog I/O tags from TSX Micro/Premium/Quantum PLCs (and Advantys STB/Momentum/TBX remote I/O), the acquisition process in the Vijeo Look database takes place in an implicit, transparent manner.

As an OPC server, Vijeo Look enables you to create and enhance tags, as well as make them available.

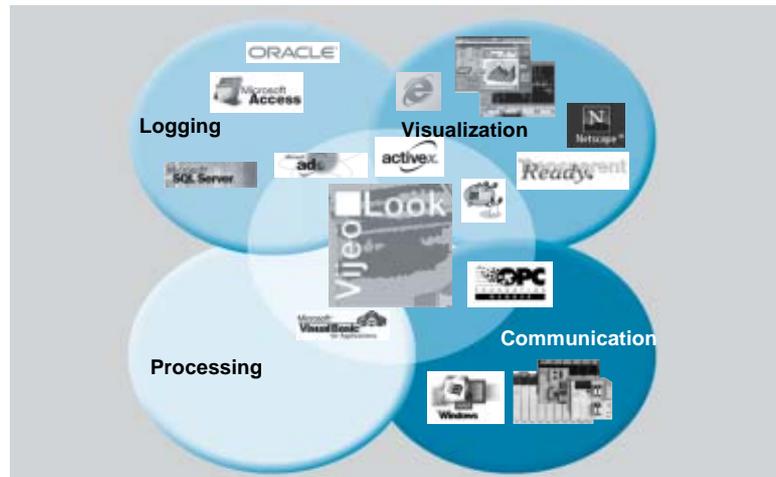

#### Structure of the offer

The Vijeo Look offer includes 2 types of software license:

- Build Time/Run Time license (*BT/RT*) allowing the application to be built and run
- Run Time license (*RT*) allowing the application built with the RT/BT license to run

There are three I/O sizes offered for each license type: Small (128 I/O), Medium (512 I/O) and Large (1024 I/O).

#### References


##### Vijeo Look software

<b>Compatibility</b>	Twido, Modicon TSX Micro/Momentum/Premium/Atrium/Quantum PLCs			
<b>Operating system</b>	Windows 2000 Professional or Windows XP Professional			
<b>Type of license</b>	Small, 128 I/O	Medium, 512 I/O	Large, 1024 I/O	
<b>References</b>	Build Time/Run Time (BT/RT)	VJL SMD BTS V25M	VJL SMD BTM V25M	VJL SMD BTL V25M
	Run Time (RT)	VJL SMD RTS V25M	VJL SMD RTM V25M	VJL SMD RTL V25M

# Transparent Ready

## Human-Machine Interface products

### Monitor Pro SCADA software

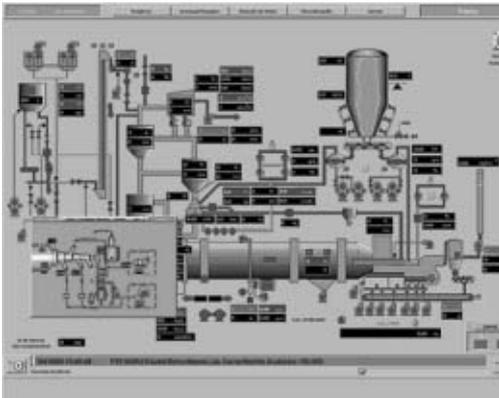


#### Description

Monitor Pro V7.2 is a SCADA (Supervisory Control and Data Acquisition) software solution. Its high-performance real-time server offers excellent processing capability, mainly due to the application objects. In addition, its client-server architecture on Ethernet TCP/IP enables it to be easily integrated in architectures based on Transparent Ready products: multi-server for sharing processing, multi-user for wide distribution of information, or in redundancy mode for your "high availability" applications.

- **The graphic interface** offers a library of graphic objects. Based on Windows technology, the interface is easy to customize.
- **Configuration Explorer**: an intuitive environment for configuring the real-time data server and for object-oriented configuration.
- **The relational database access interface**, supplied with SQL Server 2000. Monitor Pro V7.2 makes it easy to record production data or access stored information. Monitor Pro V7.2 also operates with Oracle, Sybase, Dbase IV and all other databases that support the ODBC standard.
- **Improved availability**: Monitor Pro incorporates redundancy services ensuring a high level of architecture availability.
- **Integrated traceability functions**, for real-time monitoring of the quality of your production as well as logging all the actions of the operators.

Monitor Pro V7.2 is the supervisory software package that adapts to your needs. It offers you real-time production monitoring and enables you to optimize the use of your equipment.

#### Multi-level architecture

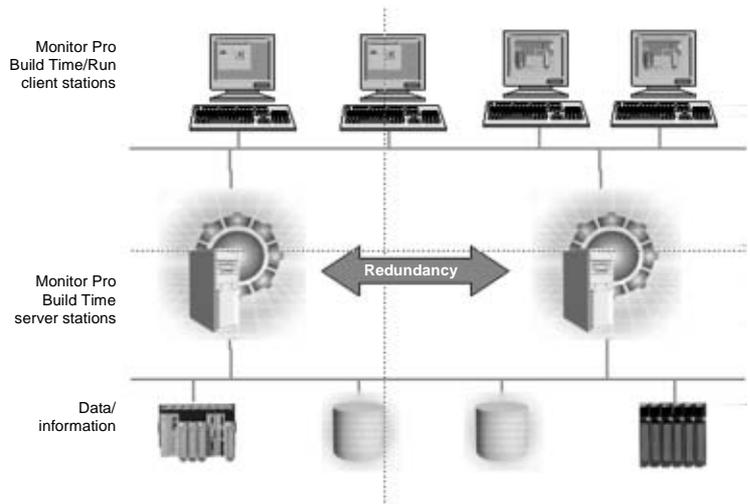

#### Characteristics


<b>Format</b>	<b>Control software</b>
<b>Compatibility</b>	All Telemecanique PLCs and all automation systems on the market via communication drivers or using the OPC standard
<b>Operating system</b>	Windows 2000 service Pack 3 or Windows XP
<b>Input/Output size</b>	11 sizes, from 300 I/O to an unlimited number of I/O (from 4800 tags to an unlimited number)
<b>Version</b>	Build Time/Run Time (BT/RT) or Run Time (RT)
<b>PC CD-ROM references</b>	Please contact your Regional Sales Office

# Transparent Ready

## Human-Machine Interface products

### OFS data server software

#### Description

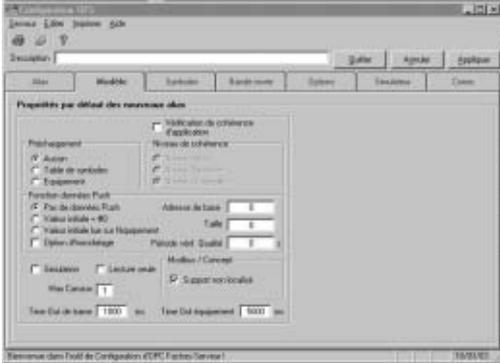

OFS (OPC Factory Server) version 3.0 software uses the OPC (*OLE for Process Control*) standard that allows "Client" applications (supervisors, databases, spreadsheets) to access control system data:


- Modicon Premium/Quantum PLC internal variables (words, bits) and I/O.
- Internal variables (words, bits) only on Modicon TSX Micro, Modicon Momentum/Quantum (with Concept/ProWORX software), TSX Series 7 and April PLCs.

OFS software is a multi-PLC data server, that enables several communication protocols to be used, by providing client applications with a set of services for accessing automation system variables.

This software is aimed at two types of user in particular:

- "End" users who want to develop applications on PCs and require access to PLC data. In this context it is possible, for example, to create client applications (supervisory control screens, Excel spreadsheets, etc) with access to a number of PLCs connected via Ethernet to the PC supporting these applications.
- Developers of industrial automation or IT products (supervision, human-machine interfaces, etc) who wish to develop client applications in their products to access the data contained in Telemecanique PLCs via the OPC server.

OFS software can be integrated in control system architectures as shown below:

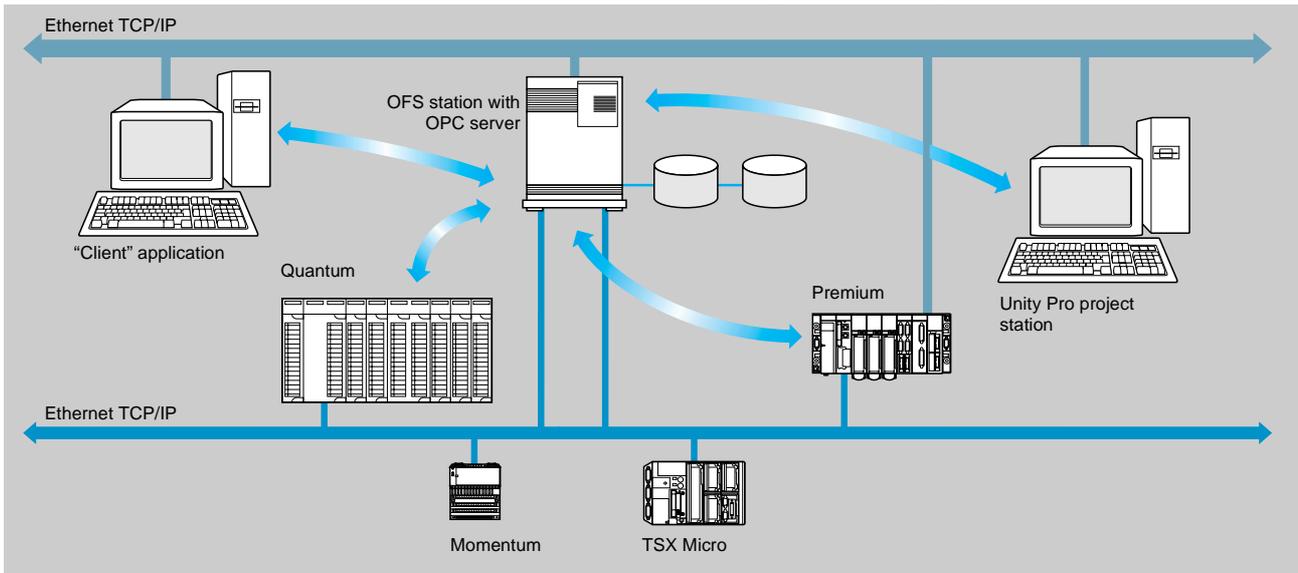

#### Structure of the offer

The OFS offer comprises:

- An OPC server configuration tool.
- OPC server software that receives requests from an OPC client and re-transmits them using Ethernet TCP/IP to the PLCs.
- Drivers for communication with Modicon PLCs.
- An OPC client for verifying the client/server communication between the various connected elements.
- A simulator for verifying the operation of the client(s) without a connected PLC.
- Setup documentation in electronic format.

#### References

OFS data server software

<b>Compatibility</b>	All Modicon TSX Micro/Momentum/Premium/Quantum and TSX Series 7/April PLCs		
<b>Operating system</b>	Windows 2000 Professional or Windows XP		
<b>Type of license</b>	Single station	10 stations	200 stations
<b>References</b>	Development of client applications accessing data on Telemecanique PLCs via OPC	TLX CD OFS 30M	TLX CD 10OFS 30M
			TLX CD UNOFS 30M

---


## 7 - ConneXium product data sheets

- Hubs ..... page 7/2
- Transceivers ..... page 7/3
- Switches ..... page 7/4
- Modbus and Modbus Plus gateways ..... page 7/6
- Shielded twisted pair and fiber optic cables ..... page 7/7


### Presentation

Hubs (or concentrators) are used for transmitting signals between several media (ports). Hubs are “plug and play” devices that do not need any configuration. The use of hubs (or concentrators) makes it possible to create the following topologies:


- Star topology using hubs.
  - Tree topology using hubs.
- See “Cabling system” page 2/29.



Star topology



Tree topology



Ring topology  
(with 499 NOH 105 10)

### Characteristics and references

Transparent Ready



Hubs					
<b>Interfaces</b>	Copper cable ports	Number and type	4 x 10BASE-T ports	4 x 100BASE-TX ports	
		Shielded connectors	RJ45		
		Medium	Shielded twisted pair		
		Line length	100 m		
	Optical fiber ports	Number and type	–		
		Connectors	–		
		Medium	–		
		Line length	–		
		Optical budget	–		
<b>Topology</b>	Number of cascaded hubs	4 max.	2 max.	4 max.	
	Number of hubs in a ring	–			
<b>Redundancy</b>		P1 and P2 redundant power supplies		P1 and P2 redundant power supplies, redundant optical ring	
<b>Power supply</b>	Voltage	~ 24 V (18...32 V), safety extra low voltage (SELV)			
	Power consumption	80 mA (130 max. at ~ 24 V)	210 mA (270 max. at ~ 24 V)	160 mA (350 max. at ~ 24 V)	
	Removable terminal	5-pin			
<b>Operating temperature</b>		0...+ 60 °C (32...140 °F)			
<b>Relative humidity</b>		10...95% non condensing			
<b>Degree of protection</b>		IP 30	IP 20	IP 30	
<b>Dimensions W x H x D</b>	mm (in)	40 x 125 x 80 (1.57 x 4.92 x 3.14)	47 x 135 x 111 (3.15 x 5.51 x 3.35)	80 x 140 x 85 (1.85 x 5.31 x 4.37)	
		Weight	kg (lbs)	0.530 (1.17)	0.240 (0.53)
<b>Conformity to standards</b>		cUL 60950, UL 508 and CSA 142, UL 1604 and CSA 213 Class 1 Division 2, CE, GL			
		FM 3810, FM 3611 Class 1 Division 2	–	FM 3810, FM 3611 Class 1 Division 2	
<b>LED indicators</b>		Power, activity, link	Power, activity, link, error	Power, activity, link, collision	
<b>Alarm contact</b>		Power supply failure, permanent fault in hub, faulty link status of TP port (volt-free contact 1 A max. under ~ 24 V)			
<b>Reference</b>		499 NEH 104 10	499 NEH 141 00	499 NOH 105 10	

(1) Depends on the optical budget and fiber attenuation.

7


#### Presentation

The use of ConneXium transceivers makes it possible to perform the following:

- Creation of linear fiber optic bus topologies, for products with twisted pair cable Ethernet connection.
- Interfacing products with twisted pair cable Ethernet connection with fiber optic cable.

Transceivers are “plug and play” devices that do not need any configuration. See “Cabling system” page 2/29.

ConneXium transceivers provide fiber optic connections for transmission in areas subject to interference (high levels of electromagnetic interference) and for long distance communications.



Linear topology on optical fiber

#### Characteristics and references

Transparent



Transceivers					
<b>Interfaces</b>	Copper cable port	Number and type	1 x 10BASE-T port	1 x 100BASE-TX port	
		Shielded connectors	RJ45		
		Medium	Shielded twisted pair		
		Line length	100 m (328 ft)		
	Optical fiber ports	Number and type	1 x 10BASE-FL port	1 x 100BASE-FX port	
		Connectors	ST (BFOC)	SC	
		Medium	Multimode optical fiber		
	Line length	3100 m (10 170 ft) (1)			
	Signal attenuation	11.5 dB with 50/125 µm fiber 11.5 dB with 62.5/125 µm fiber	8 dB with 50/125 µm fiber 11 dB with 62.5/125 µm fiber		
<b>Redundancy</b>	P1 and P2 redundant power supplies				
<b>Power supply</b>	Voltage	--- 24 V (18...32), safety extra low voltage (SELV)			
	Power consumption	80 mA (100 max. at --- 24 V)	160 mA (190 max. at --- 24 V)		
	Removable terminal	5-pin			
<b>Operating temperature</b>	0...+ 60 °C (32...140 °F)				
<b>Relative humidity</b>	10...95% non condensing				
<b>Degree of protection</b>	IP30		IP20		
<b>Dimensions W x H x D</b>	mm (in)	40 x 134 x 80 (1.57 x 5.47 x 3.14)	47 x 135 x 111 (3.15 x 5.51 x 3.35)		
<b>Weight</b>	kg (lbs)	0.520 (1.15)	0.230 (0.50)		
<b>Conformity to standards</b>	cUL 60950, UL 508 and CSA 142, UL 1604 and CSA 213 Class 1 Division 2, C€, GL				
	FM 3810, FM 3611 Class 1 Division 2		-		
<b>LED indicators</b>	P1 and P2 power supplies, Ethernet link/port status				
<b>Alarm contact</b>	Power supply failure, permanent fault in hub, faulty link status of TP port (volt-free contact 1 A max. under --- 24 V)				
<b>Reference</b>	499 NTR 100 10		499 NTR 101 00		

(1) Depends on the optical budget and fiber attenuation.


7

# Transparent Ready

## Cabling systems

### ConneXium switches

### Presentation

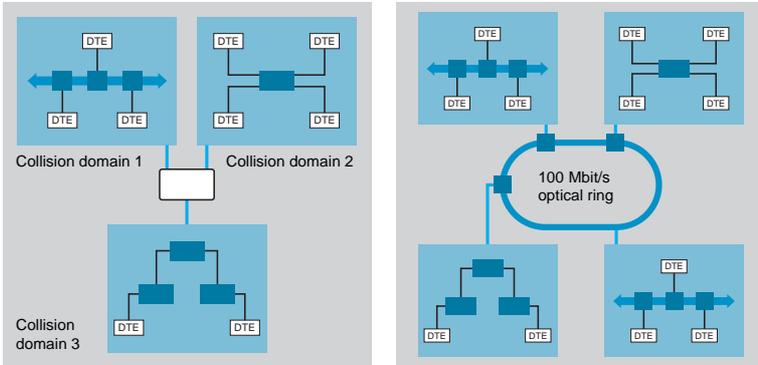

Switches (see “Cabling system” page 2/32) are used to increase the limits of architectures based on hubs or transceivers, by separating collision domains. Higher layer communication is provided between the ports, and collisions at link layer are not propagated (filtering). They therefore improve performance by better allocation of the pass band due to the reduction of collisions and the network load. Certain ConneXium switches also enable redundant architectures to be created on twisted pair copper or fiber optic ring. Switches are “plug & play” devices that do not need any configuration. They can also be administered remotely via the SNMP or HTTP protocols for monitoring and diagnostics purposes.

### Characteristics and references



Switches			Unmanaged basic	Shielded twisted pair and optical fiber, unmanaged				
Interfaces	Copper cable ports	Number and type	5 x 10BASE-T/ 100BASE-TX ports	4 x 10BASE-T/ 100BASE-TX ports	3 x 10BASE-T/ 100BASE-TX ports	4 x 10BASE-T/ 100BASE-TX ports	3 x 10BASE-T/ 100BASE-TX ports	
		Shielded connectors	RJ45					
		Medium	Shielded twisted pair					
		Max. distances	100 m (328 ft)					
	Optical fiber ports	Number and type	–	1 x 100BASE-FX port	2 x 100BASE-FX ports	1 x 100BASE-FX port	2 x 100BASE-FX ports	
		Connectors	–	SC				
Medium		–	Multimode fiber			Monomode fiber		
Fiber length		–	3100 m (10 170 ft) (1)			15 000 m (49 210 ft) (1)		
	Optical budget	–	8 dB with 50/125 µm fiber 11 dB with 62.5/125 µm fiber		16 dB with 50/125 µm fiber			
Topology	Number of switches	Cascaded	Any					
		Redundant in a ring	–					
<b>Power supply redundancy</b>			–	P1 and P2 redundant power supplies				
Power supply	Voltage		– 24 V (19.2...30 V)	– 24 V (18...32 V), safety extra low voltage (SELV)				
		Power consumption	100 mA (120 max.)	5.4 W	5.9 W	5.4 W	5.9 W	
		Removable terminals	3-pin	5-pin				
<b>Operating temperature</b>			0...+ 60°C (32...140 °F)					
<b>Relative humidity</b>			10...95% non condensing	Max. 95% non condensing				
<b>Degree of protection</b>			IP20					
<b>Dimensions W x H x D</b>	mm (in)		75.2 x 143 x 43 (2.96 x 5.63 x 1.69)	47 x 135 x 111 (3.15 x 5.51 x 3.35)				
		Weight	kg (lbs)	0.190 (0.42)	0.330 (0.72)	0.335 (0.74)	0.330 (0.72)	0.335 (0.74)
<b>Conformity to standards</b>			UL508, CSA 1010, EN 61131-2				cUL 60950, UL 508 and CSA 142, UL 1604 and CSA 213 Class 1 Division 2, C€, GL	
<b>LED indicators</b>			Power supply, ETH link status, 10/100 Mbps	P1 and P2 power supplies, Ethernet link status, transmission activity				
<b>Alarm contact</b>			–	Activity, power supply failure, permanent fault in hub, faulty link status of TP port (volt-free contact 1 A max. under – 24 V)				
<b>Reference</b>			499 NES 251 00	499 NMS 251 01	499 NMS 251 02	499 NSS 251 01	499 NSS 251 02	

▲ Available later

(1) Depends on the optical budget and fiber attenuation.

7

#### Characteristics and references (continued)

Transparent Ready



Switches			Unmanaged, copper	Managed, copper	Managed, copper + fiber	
<b>Interfaces</b>	Copper cable ports	Number and type	8 x 10BASE-T/ 100BASE-TX ports	5 x 10BASE-T/ 100BASE-TX ports 2 x 100BASE-TX ports	5 x 10BASE-T/100BASE-TX ports	
		Shielded connectors	RJ45			
		Medium	Shielded twisted pair			
		Max. distances	100 m (328 ft)			
	Optical fiber ports	Number and type	–			2 x 100BASE-FX ports
		Connectors	–			SC
		Medium	–			Multi mode optical fiber
		Fiber length	–			3100 m (10 170 ft) (1)
		Optical budget	–			8 dB with 50/125 µm fiber 11 dB with 62.5/125 µm fiber
		Ethernet services	–	FDR client, SNMP, multicast filtering for optimization of the Global Data protocol, Web based configuration		
<b>Topology</b>	Number of switches	Cascaded	Any			
		Redundant in a ring	–	50 max.		
<b>Redundancy</b>			P1 and P2 redudant power supplies			
<b>Power supply</b>	Voltage		--- 18...32 V, safety extra low voltage (SELV)			
	Power consumption		125 mA (290 max.)	7.5 W	9 W	
	Removable terminals		5-pin			
<b>Operating temperature</b>			0...+ 60°C	0...+ 55°C		
<b>Relative humidity</b>			10...95% non condensing			
<b>Degree of protection</b>			IP20			
<b>Dimensions W x H x D</b>		mm (in)	47 x 135 x 111 (3.15 x 5.51 x 3.35)	110 x 131 x 111 mm (4.33 x 5.16 x 4.37)		
<b>Weight</b>		kg (lbs)	0.230 (0.72)	0.460 (1.00)		
<b>Conformity to standards</b>			cUL 60950, UL 508 and CSA 14, UL 1604 and CSA 213 Class 1 Division 2, CE, GL			
<b>LED indicators</b>			P1 and P2 power supplies, Ethernet link status,	P1 and P2 power supplies, Ethernet link status, redundancy management		
<b>Alarm contact</b>			Power supply failure, permanent fault in switch, faulty link status of TP port (volt-free contact 1 A max. under --- 24 V)			
			–	Redundancy health		
<b>Reference</b>			499 NES 181 00	499 NES 171 00	499 NOS 171 00	

(1) Depends on the optical fiber budgt and fiber attenuation.

### Presentation

ConneXium communication gateways are used for interconnecting the following:

- Modbus/Ethernet TCP/IP
  - Modbus Plus/Ethernet TCP/IP
- by providing multiple ports to adapt to the different architectures.

### Characteristics and references

Transparent Ready



Gateways					
<b>Functions</b>	Communication gateway		Ethernet/Modbus serial link	Ethernet/Modbus Plus	
	Interface for programming		Ethernet/Modbus	Ethernet	Ethernet/Modbus Plus
	Standard Ethernet TCP/IP communication services		Modbus TCP messaging SNMP Agent	Modbus TCP messaging	Modbus TCP messaging SNMP Agent
	Modbus SL (RS 232/RS 485 serial link)		RTU/ASCII frame Data rate 0.3 K...115.2 Kbps	-	
	Modbus Plus (RS 485 network)		-	Token bus, HDLC synchronous mode Data rate 1 Mbps	
	Configuration		Local or remote by Telnet in hyper terminal mode	Local using DOS	Local or remote (1)
	<b>Interfaces</b>	Ethernet TCP/IP port	Type	1 x 10BASE-T/100BASE-TX	1 x 10BASE-T 1 x 10BASE2 1 x 10BASE5
Shielded connectors			RJ45	RJ45, BNC and AUI	RJ45
Medium			Shielded twisted pair		
Serial port		Max. distances	100 m (327 ft)		
		Type	1 x Modbus SL	1 x Modbus Plus	
		Shielded connectors	RJ45	9-way SUB-D connector	
		Medium	Shielded twisted pair	Shielded twisted pair (single or double)	
<b>Power supply</b>	Voltage	--- 9...30 V, ~ 9 ...24 V	~ 110/220 V (~ 93.5 V...242 V), 47...63 Hz		
	Power consumption	3 W	1 A		
<b>Operating temperature</b>		0...+ 60°C	0...+ 50°C		
<b>Relative humidity</b>		20...90% non condensing	10...95% non condensing		
<b>Degree of protection</b>		IP20			
<b>Dimensions W x H x D</b>	mm (in)	35 x 95 x 60 (1.38 x 3.74 x 2.36)		122 x 229 x 248 (4.80 x 9.0 x 9.80)	
		0.500 (1.10)		4.260 (9.40)	
<b>Weight</b>	kg (lbs)	0.500 (1.10)		4.260 (9.40)	
<b>Conformity to standards</b>		UL, CSA, FM 3611 Class 1 Division 2		UL 508, CSA 142, C€	
<b>LED indicators</b>		Activity, status, diagnostics		Power	
<b>Reference</b>		174 CEV 300 20		174 CEV 200 30	174 CEV 200 40 ▲

▲ Available later

(1) Local with additional keyboard and monitor, via a dedicated screen for basic diagnostic and configuration. Remote, via intuitive Web pages for full configuration and diagnostic.

# Transparent Ready

## Cabling system

### ConneXium connection cables

#### Presentation

ConneXium shielded connection cables are available in two versions to meet current standards and approvals:

- Standard EIA/TIA 568 shielded twisted pair cables:  
These cables conform to the EIA/TIA-568 standard, category 5, IEC 11801/EN 50173 class D. Their fire behavior conforms to NFC 32070# class C2 and IEC 322/1, Low Smoke Zero Halogen (LSZH).
- UL and CSA 22.1 approved shielded twisted pair cables:  
These cables are UL and CSA 22.1 approved. Their fire resistance conforms to NFPA 70.



490 NT●000 ●●



490 NOC 000 05



490 NOT 000 05



490 NOR 000 05

#### References

##### Standard EIA/TIA 568 shielded twisted pair cables

Description	Pre-equipped at both ends	Length m (ft)	Reference	Weight kg
<b>Straight-through shielded twisted pair cables</b>	2 RJ45 connectors	2 (6.56)	<b>490 NTW 000 02</b>	–
	For connection to terminal devices (DTE)	5 (16.4)	<b>490 NTW 000 05</b>	–
		12 (39.4)	<b>490 NTW 000 12</b>	–
		40 (131.2)	<b>490 NTW 000 40</b>	–
		80 (262.5)	<b>490 NTW 000 80</b>	–

Description	Pre-equipped at both ends	Length	Reference	Weight kg
<b>Crossed cord shielded twisted pair cables</b>	2 RJ45 connectors	5 (16.4)	<b>490 NTC 000 05</b>	–
	For connections between hubs, switches and transceivers	15 (49.2)	<b>490 NTC 000 05</b>	–
		40 (131.2)	<b>490 NTC 000 40</b>	–
		80 (262.5)	<b>490 NTC 000 80</b>	–

##### UL and CSA 22.1 approved shielded twisted pair cables

Description	Pre-equipped at both ends	Length	Reference	Weight kg
<b>Straight-through shielded twisted pair cables</b>	2 RJ45 connectors	2 (6.56)	<b>490 NTW 000 02U</b>	–
	For connection to terminal devices (DTE)	5 (16.4)	<b>490 NTW 000 05U</b>	–
		12 (39.4)	<b>490 NTW 000 12U</b>	–
		40 (131.2)	<b>490 NTW 000 40U</b>	–
		80 (262.5)	<b>490 NTW 000 80U</b>	–

Description	Pre-equipped at both ends	Length	Reference	Weight kg
<b>Crossed cord shielded twisted pair cables</b>	2 RJ45 connectors	5 (16.4)	<b>490 NTC 000 05U</b>	–
	For connections between hubs, switches and transceivers	15 (49.2)	<b>490 NTC 000 05U</b>	–
		40 (131.2)	<b>490 NTC 000 40U</b>	–
		80 (262.5)	<b>490 NTC 000 80U</b>	–

##### Fiber optic cables

Description	Pre-equipped at both ends	Length m (ft)	Reference	Weight kg
<b>Glass fiber optic cables for terminal devices (DTE) to hubs, switches and transceivers</b>	1 SC connector and 1 MT-RJ connector	5 (16.4)	<b>490 NOC 000 05</b>	–
	1 ST (BFOC) connector and 1 MT-RJ connector	5 (16.4)	<b>490 NOT 000 05</b>	–
	2 MT-RJ connectors	5 (16.4)	<b>490 NOR 000 05</b>	–





# 8 - Modbus-IDA organisation and Collaborative Automation Partner Program

---

## 8 - Presentations and partner data sheets

- Modbus-IDA organisation ..... page 8/2
- Program presentation
  - Collaborative Automation Partner Program ..... page 8/3
- Examples of partner offer
  - ProSoft Technology ..... page 8/4
  - ConnectBlue ..... page 8/6
  - ACKSYS ..... page 8/7
  - DATA-LINC GROUP ..... page 8/8
  - Senside ..... page 8/9

## Modbus-IDA



### Modbus-IDA presentation Modbus-IDA organisation mission statement

Modbus-IDA is a group of independent users and suppliers of automation devices that seeks to drive the adoption of the Modbus communication protocol suite and the evolution to address architectures for distributed automation systems across multiple market segments. Modbus-IDA will also provide the infrastructure to obtain and share information about the protocols, their application and certification to simplify implementation by users resulting in reduced costs (e.g. the specifications of the Modbus suite of protocols are available on line, free of charge).

### Modbus-IDA Provides Visibility to Modbus and Modbus related Products


Modbus products are the solutions to Modbus users worldwide. Modbus-IDA helps users find suppliers through a visibility program that includes:

- Member listing on the Modbus-IDA.org web site.
  - Product highlights in the Modbus newsletter and on the web.
- Join the discussion as Modbus-IDA embraces new technologies, and help guide the future of Modbus-IDA as part of the technical working groups. You can join on-line at [www.Modbus-IDA.org](http://www.Modbus-IDA.org)

### Benefits for component suppliers, Integrators and Users

Your Membership in Modbus-IDA helps provide a myriad of open technology benefits to you and your employees. An extract of the benefits includes:

- Access to a rich library of shared users and implementers experiences.
- Participation in a dynamic resourceful User Forum.
- Access to a consultant referral directory that brings together users and experts.
- Newsletters and technical training programs.

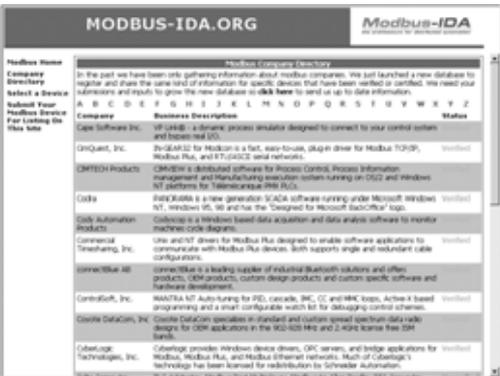

### Modbus protocol Conformance Testing Program

The true benefit of any open standard is the assurance it provides to users that the products they buy will interoperate seamlessly. Unfortunately, any specification, no matter how carefully written, is subject to interpretation and occasional misunderstanding. That's where conformance testing becomes valuable.

The Modbus Conformance Testing Program provides independent verification that a broad array of qualifications has been met in compliance with Modbus specifications. It provides end users with the comfort that their design and configuration process will proceed smoothly and assures suppliers that their products were developed in accordance with key Modbus criteria.

This program is administered by Modbus-IDA.org and is performed at an independent service provider, the Modbus/TCP Conformance Test Laboratory at the University of Michigan.

### TCP/IP Modbus toolkit available through Modbus-IDA.org

The first edition of the **TCP/IP MODBUS CD TOOLKIT v1.0** is a great collection of resources, selected to assist users and developers in implementing Ethernet TCP/IP Modbus servers or clients. This toolkit targets essential messaging services. Additional toolkits will be made available in the future to facilitate the deployment of other Transparent Ready services such as Global Data, etc.

This resources toolkit provides **Specifications, Implementation Guides, diagnostics, test tools** and **examples source code**. Also included the certification test suite as developed and used by the Modbus Certification Laboratory at the University of Michigan.

### Become involved with the Modbus-IDA.org

Take advantages of the Modbus-IDA.org web site: [www.modbus-ida.org](http://www.modbus-ida.org)



# Transparent Ready

## Collaborative Automation Partner Program

### Transparent Ready Partners

Collaborative Automation  
Partner Program



#### Presentation of the partner program

##### Overview

The Collaborative Automation approach is a way of sharing data, interconnecting software tools, accessing information in real time at any point within an architecture... all with the aim of maximizing productivity.

The "Collaborative Automation Partner Program" is a program for sharing technology. Its aim is to follow a collaborative approach to promote partner products and solutions that complement the Telemecanique offer within the world of industrial control systems. The products promoted in this program use technologies developed either by our partner organizations, or by Telemecanique (Modbus Plus or Fip networks, Modicon Quantum or Modicon Premium PLCs, Unity interfaces to name but a few examples), or they use standard technologies (Ethernet Modbus TCP, OPC, etc).

##### The program partners

There are currently more than 100 member organizations in the "Collaborative Automation Partner Program" offering more than 700 products in total. There are 3 categories of partner:

- Technology partners
- Unity partners
- Transparent Ready partners

The Transparent Ready partner offers are principally in the areas of wireless communication TCP/IP based, gateways, servers, modems, bridges and remote management solutions.

##### Examples of Transparent Ready partners

This chapter details several examples of Transparent Ready partner offers to help you build a complete system:

- ConnectBlue (Bluetooth wireless communication)
- ProSoft Technology (frequency hopping or Wi-Fi type wireless communication)
- ACKSYS (Wi-Fi IEEE 802.11b wireless communication)
- Data-Linc Group (Ethernet wireless communication based on standard IEEE 802.11b, Wi-Fi compatible)
- Sensitive (remote management services).

Complete list of Transparent Ready Partners available on the Web site of the program (see below).

##### Contacts

Find out more about the "Collaborative Automation Partner Program" at:

[www.collaborativeautomation.schneider-electric.com](http://www.collaborativeautomation.schneider-electric.com)

For any additional information, contact:



Mail: Collaborative Automation Partner Program - One High Street North Andover, MA 01845 USA

E-mail: [info.capp6us.schneider-electric.com](mailto:info.capp6us.schneider-electric.com)

Fax: +1 978 975 9321

More information on how to join the partner program can be found on the Collaborative Automation website (address above).



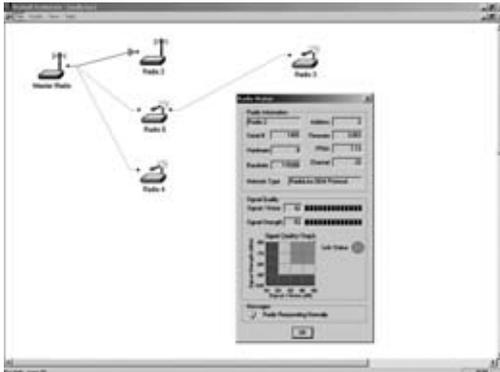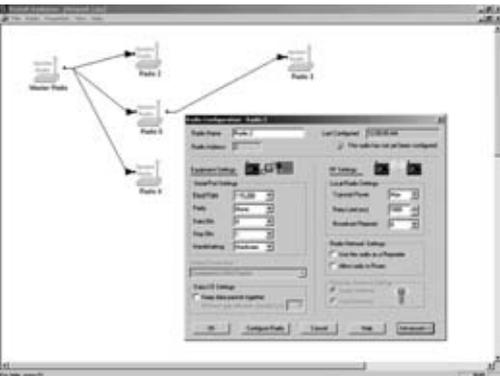

### Wireless industrial Ethernet

#### Popularity of wireless Ethernet

The opening up of the 2.4 GHz band ( $2.4 \times 10^9$  Hz) makes it simple to set up wireless solutions in industry (no license or declaration for private use). The wide pass band provides high speeds. Standards such as WiFi IEEE 802.11b and Bluetooth are emerging.

The press and television are playing an important part in promoting these new technologies for “general public” and office applications. Industrial solutions are also available, and currently offer secure transmission and availability of wireless networks.

#### Main points of the theory

The “2.4 GHz band” ranges between 2,400 and 2,483.5 MHz (with some variations according to the country). The waves emitted by this band are reflected by obstacles (metal, etc) and are significantly attenuated by water and vegetable matter. Radio waves are propagated in straight lines and are polarized. An absorbent object “screens” points located behind it.

#### An antenna is characterized by:

- The shape of the transmission/reception field (the “pattern” which defines the direction(s) in which the transmitted/received power is the strongest).
- Its gain (its capacity to amplify the transmitted/received power when the signal passes between copper and air or air and copper).
- Its azimuth (which specifies the focusing of the field in relation to the vertical plane).

#### The units of measurement used for the transmitted/received power are:

- **mW**: Unit of measurement of power. The maximum transmission power (at 2.4 GHz) is regulated: North America, Pacific: 250 mW. Europe, Asia, Latin America: generally 100 mW.
- **dB**: Conventional unit for the ratio of two values of the same type. In this case, radio-frequency powers. By convention the  $10 \times \log_{10}(P_{\text{variable}}/P_{\text{ref}})$  relationship is used. As a matter of interest, adding/subtracting 3 dB corresponds to multiplying/dividing the signal amplitude by 2.
- **dBm**: Unit for the ratio between a power measured in mW and 1 mW.
- **dBi**: Unit for the ratio between [power measured at antenna output in a given direction] and [measurement that would be taken at the same point if the power were dispersed over the whole sphere of the isotropic antenna (theoretical)]. This ratio is used to qualify the gain of an antenna in its principal direction.

An isotropic antenna is in theory totally omnidirectional. The greater the radius of the sphere centered on the antenna, the lower the power measured at one point on this sphere. In practice, the sphere is “squashed” for “omnidirectional” antennae used at 2.4 GHz, and forms a very flat toroid in the plane perpendicular to the axis of the antenna.

For long distances, “directive” antennae concentrate the power in one direction rather than diffusing it over 360°. Antennae are placed at high points so that they are free from absorbent objects close to the ground.



The waves emitted by one source may be reflected on items in the environment (machine frame, girders in buildings, metal doors, vehicles, etc). The composite wave resulting from the mixture of reflected waves may return to the initial transmitter with a higher amplitude and cause interference on this transmitter.

In the band we are interested in here, the wavelengths ( $\lambda = c/f$ ) are between approximately 12.08 cm and 12.5 cm.

With radio transmission, data is transported in the modulation (phase, frequency, etc) of the “carrier” wave. Using all the carrier waves in a frequency band (or spectrum) considerably increases the transmission speed. This is the “**Spread Spectrum**”:

- **DSSS** technologies operate using “direct transmission” in the frequency band (“**D**irect **S**ignal”). Each data packet occupies the whole spectrum.
- **FHSS** technologies operate in “frequency hops” within the spectrum (“**F**requency **H**opping”). Data is transmitted in smaller packets, sent one after the other in narrow sub-bands within the overall band.

**DSSS** and **FHSS** were developed one after the other from military applications in the Second World War. FHSS is a little slower, but offers greater reliability and security for data transfers.

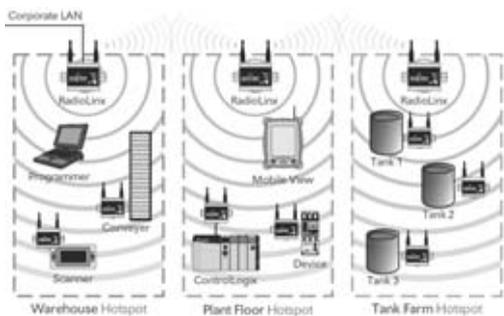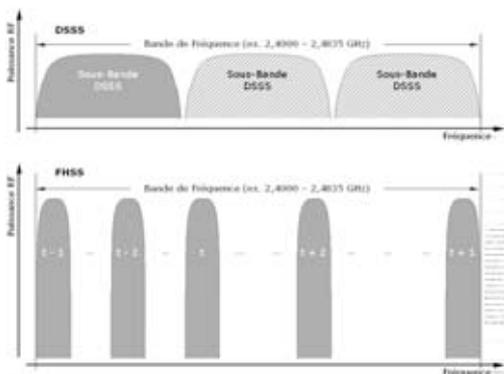

#### Presentation (continued)

The 802.11b standard uses DSSS technology. Each transmission band is spread over 22 MHz. This means there are 3 channels (from a choice of 11 or 13) in the 83.5 MHz band that do not overlap one another.

This 22 MHz pass band offers high speeds (1 to 11 Mbps). But it is relatively sensitive to interference (reflected waves, other networks, miscellaneous equipment transmitting in the free band). This means precautions should be taken, in particular in industrial environments.

A single-frequency interfering signal can block the use of the entire 22 MHz band. Its effect is similar to that of a collision signal on Ethernet (several subscribers talking on the network simultaneously): the "line" is temporarily blocked. The site must be "audited" to anticipate this type of problem.

The RLX-FH uses FHSS technology. Each of the transmission sub-bands is reduced to around 300 kHz. Up to 32 networks can simultaneously share the entire 83.5 MHz spectrum (they use each sub-band one after the other). The individual speed of each of the 32 channels is 250 Kbps.

Amongst other advantages, narrowband transmission makes it easier to "reject" interference outside the band being used. This significantly improves the signal/noise level and limits reductions (even stopping) in transmission speed. In addition, a data packet that cannot be transmitted correctly in one sub-band is automatically re-transmitted in the next channel sub-band. Observed from the outside of the wireless network, the sequence of sub-bands seems to be random.

#### RadioLinX wireless industrial offer

##### RadioLinX RLX-FH (frequency hopping) Ethernet

The RLX-FH radio modem is compatible with Modbus TCP messaging and program loading.

- Operating temperature: - 40...+75°C.
- Shock and vibration: IEC 60068-2-6 and IEC 60068-2-27.
- Power supply:  $\approx$  6...28 V.
- Industrial unit: hardened, for mounting on DIN rail.
- 32 channels (wireless networks) simultaneously on one site.
- Each radio can be configured as Master/Keeper, Remote or Repeater station.
- Repeaters can also take field devices.
- Useful data rate of each channel: 250 Kbps.
- Serial link or Ethernet TCP/IP version.
- Network security (protection against intrusion) and communication reliability (no data loss, no network power outage).
- Double antenna and special signal processing algorithms (in order to avoid problems connected with multiple reflections and attenuation).
- Applications possible in hazardous areas (ATEX for Europe under development).
- Low cost and 3 year warranty as standard.

##### RadioLinX RLX-IH (Industrial Hotspot™) IEEE 802.11b

The RLX-IH radio modem is compatible with Modbus TCP messaging, program loading and FactoryCast Web page viewing.

- Operating temperature: - 30...+60°C, humidity: 90%.
- Power supply:  $\approx$  10...24 V.
- Compact extruded aluminum unit, for mounting on DIN rail.
- "Industrial Hotspot" function for mobile equipment.
- "Inter-Hotspot" wireless links.
- Transfers at 11, 5.5, 2 and 1 Mbps (11 or 13 channels depending on the region).
- Redundant Master/Keeper radio and automatic network overlap function for better network reliability.
- Encoding, authentication and checking of MAC ID address for better network security (TKIP, WEP, 802.11X, MAC White list).
- Embedded configuration and diagnostic software (html pages).

#### Contact

Installing radio solutions requires specialist expertise. Please contact our partner:

ProSoft Technology, Inc.  
 Tel: +1 (661) 716 5100  
 Fax: +1 (661) 716 5101  
 E-mail: [prosoft@prosoft-technology.com](mailto:prosoft@prosoft-technology.com)  
 Website: [www.prosoft-technology.com](http://www.prosoft-technology.com) and [www.radiolinx.com](http://www.radiolinx.com)  
 Worldwide distributors: <http://www.radiolinx.com/distributors>





#### Presentation connectBlue Wireless offer

##### Bluetooth Serial Port Adapter (RS232, RS422 or RS485)

The Bluetooth Serial Port Adapter enables replacement of serial cables with Bluetooth wireless technology. Bluetooth is robust, proven and well suited for industrial applications and is license free to use.

The Serial Port Adapter connected to the RS232/RS422/RS485 port of the industrial device acts like a wireless connection point to the device. A PC, laptop, PDA or any other serial device may connect wirelessly to the industrial device for ranges up to > 100m. It supports both point-to-point and point-to-multipoint configurations. The Serial Port Adapter is configured using a PC Configuration Wizard or by use of AT commands.

The Serial Port Adapter is available in wall/DIN-rail mounted IP22 or wall mounted IP 65.

##### Use Cases - Serial Port Adapter (RS 232, RS 422 or RS 485)

- 1 Operators, programmers etc. are provided wireless access to an industrial device for configuration, programming, diagnostics using a standard computer, laptop or PDA.
- 2 The Serial Port Adapter supports Wireless Multidrop. It is used to replace an RS 422/RS 485 multidrop network (running e.g. Modbus protocol) with Bluetooth.

##### Contact

Installing radio solutions requires specialist expertise. Please contact our partner:

*connectBlue*


Martin Engdahl – Product Manager  
ConnectBlue AB, Isbergs gata 3, Malmö, SE-21119, Sweden  
Tel: +46 (0)40 6307100  
Fax: +46 (0)40-237137  
E-mail: [sales@connectblue.se](mailto:sales@connectblue.se)  
Site Web: [www.connectblue.se](http://www.connectblue.se)



WL-COMETH



WL-COMETH, IP 65

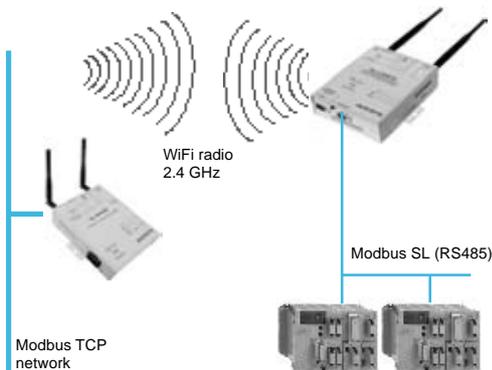


Serial Modbus to Modbus TCP connection



WL-BRIDGE



WL-ACCESS

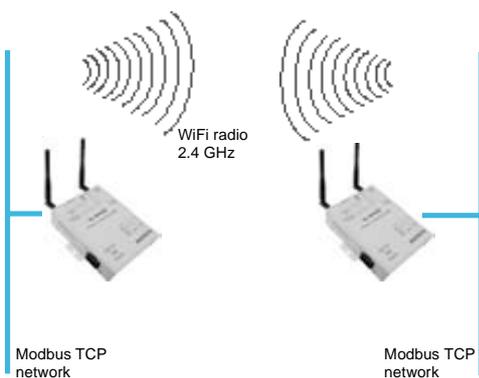

Modbus TCP network interconnection

### ACKSYS wireless solutions

#### ACKSYS

ACKSYS is a French company specializing in telecommunication solutions for all industrial sectors where high performance, reliability and longevity are major requirements (industrial control systems, telecommunications, aviation, military, transport and healthcare).

#### Wireless solutions for industry (WiFi IEEE 802.11b)

ACKSYS also offers a range of wireless equipment based on the WiFi standard IEEE 802.11b. This range comprises an Ethernet/WiFi access point, an Ethernet/WiFi bridge and an RS 232, RS 422/RS 485 serial link server on Ethernet WiFi that also operates as a gateway between serial Modbus devices and the Modbus TCP network.

These devices can be used to:

- Build a wireless Ethernet network infrastructure (WL-ACCESS devices and WL-BRIDGE devices).
- Connect two separate Ethernet networks without using any additional wiring (WL-BRIDGE).
- Connect serial link devices to the wireless Ethernet network.
- Connect an RTU serial Modbus device to a wireless Modbus TCP Ethernet network (WL-COMETH device in gateway mode).
- Create a wireless connection between two serial link devices (WL-COMETH device in full duplex radio modem mode).

Unlike conventional, non-WiFi radio modems, which require same brand devices at both ends of the connection, WL-COMETH offers total interoperability of all devices conforming to standard IEEE 802.11b within the network, meaning that a single access point can communicate with more than 100 WL-COMETH devices. It is also possible to replace a wired full duplex serial link using two WL-COMETH radio devices.

IP65 weatherproof versions are also available for outdoor applications or applications in damp or dusty environments.

WL-COMETH is available in versions with 1, 2 and 4 RS232, RS422/RS485 serial channels. All WL range devices have a built-in 85/264VAC & 100/370VDC or low voltage 9/36VDC power supply.

They have universal mounting options (in enclosure, or wall or din rail mounting). Antennas are mounted on RSMA screw connectors allowing the use of high gain antennae for long distance applications.

#### Contact

Installing radio solutions requires specialist expertise. Please contact our partner:

Eric CARIOU  
 3-5 rue du Stade PO BOX 4580  
 POISSY CEDEX 78302 France  
 Tel: 33 1 39 11 62 81  
 Fax: 33 1 39 11 47 96  
 E-mail: [eric.cariou@acksys.fr](mailto:eric.cariou@acksys.fr)  
 Website: [www.acksys.fr](http://www.acksys.fr)



SRM Long Range Radio Modems



#### Wireless solutions DATA-LINC

##### DATA-LINC

Founded in 1988, Data-Linc Group is the leading provider of industrial data communication solutions. Data-Linc Group designs and manufactures high performance, superior quality modems for a broad range of industrial applications. Their complete line of industrial grade modems and networking products consistently provide reliable, robust data communications even in the harshest environments.

#### SRM6210E & SRM6310E Wireless Ethernet Modems

Wireless Ethernet Modems offer superior range (SRM6210E up to 40 kilometres & SRM6310E up to 16 kilometres without repeaters and multiples of this distance with repeaters), features and benefits. The modems utilize advanced frequency hopping spread spectrum technology to insure the ultimate in data reliability and integrity in challenging industrial environments. The modems are factory pre-configured for easy, hassle-free installation. see [www.data-linc.com/products.htm](http://www.data-linc.com/products.htm)

#### FastLinc wireless Ethernet 802.11b modem (Wi-Fi compliant)


FastLinc Industrial Ethernet Wireless Modems are a high-speed, secure wireless solution using 2.4 GHz direct sequence technology. FastLinc modems have a rated range of 5 miles with unobstructed line-of-sight, farther using repeaters and/or higher gain antennas. With an output power much higher than commercial IEEE 802.11b products, they provide longer outdoor range and broader indoor coverage.

#### Contact

Installing radio solutions requires specialist expertise. Please contact our partner:

Jim Steffey  
3535 Factoria Blvd. SE Bellevue, WA 98006 USA  
Tel: 425 882 2206  
Fax: 425 867 0865  
E-mail: [Jsteffey@data-linc.com](mailto:Jsteffey@data-linc.com)  
DATA-LINC web site: [www.data-linc.com](http://www.data-linc.com)

Direct access to the DATA-LINC offer in partnership with Schneider Electric, including applications examples: [www.data-linc.com/saally.htm](http://www.data-linc.com/saally.htm)

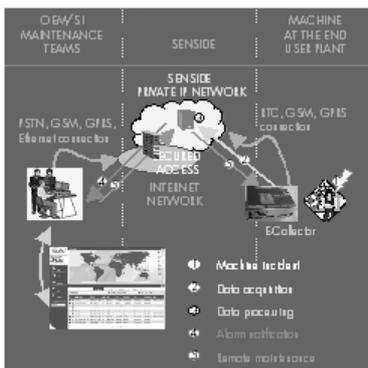

### Senside Presentation

Senside offers solutions that are innovative and complete for remote access and management of machines' installed base, to machines builders and system integrators.

Senside solution enables optimisation of after-sales service for machine builders or integrators and the development of value added services for machines and systems users.

Senside is a subsidiary of **Schneider Electric** (80%), in partnership with **France Telecom**: this alliance brings together, within Senside, a unique expertise in industrial automation and telecommunications.

### Senside Pack, the principles

#### A turnkey solution:

- Simple to set up and easy to use, reliable and secured.
- Available worldwide through the Equant (France Telecom) private IP network (140 countries).

#### A multi-protocol solution:

- Available on the whole Telemecanique PLC (Twido, Micro, Premium, Momentum, Quantum) and drives (Altivar) product families.
- Compatible as well with MPI, DF-1, Ethernet protocols.

#### A complete solution, provided on the basis of a yearly subscription including:

- e-Collecto (server connected to the machine control system, shipped with cabling and installation guide).
- Machines access portal, operated by Senside and accessible via Internet .
- Private IP network ensuring a reliable and secure connection to the machines (via a standard local telephone line).
- Training, maintenance and support.

### Senside pack, detailed features

#### Remote access to machines or Installations:

- Remote viewing and/or modification of machine control device programmes.
- Remote control of SCADA PCs.
- Remote access to local Web servers.

#### Web Portal:

- Global view of the machine installed base and its status.
- Automatic set up of the remote connection to a given machine .

#### Access rights management:

- Users authentication via Personal Login/password.
- Users profiles management: machine perimeter (geographic criteria, machine user name, machine model...) and applications features (consultation, programming...).

#### Remote access security:

- No access to the Machine telephone line from outside Senside network.
- Physical key provided to the machine local operator for locking/unlocking access to the control programmable devices.

#### Monitoring of status and variables:

- Definition by the customer of the status or variables to be monitored.
- Alarm notification sent by SMS, FAX or E-mail in case of drift (modification on the portal of alarm threshold and notification list).

#### Connection continuity checking:

- To the Senside e-Collector.
- To the machine control devices (PLC, PC).

#### Options:

- Data logging and history storing.
- Online documentation sharing.
- Brand labelling (portal personalisation with customer logo and brand).

### Benefits

- A yearly subscription, no initial investment.
- A turnkey platform "ready to use".
- A better control over installation and process tuning.
- A common diagnostic tool, to be shared between machine builder/system integrator and user.
- A continuous feedback on the performances of the installed base.

### Contact

Laurent Perrin, Head of Marketing  
 Tel: + 33 1 41 29 84 08  
 E-mail: [laurent.perrin@senside.com](mailto:laurent.perrin@senside.com)  
 Web: [www.senside.com](http://www.senside.com)



The installed base Global view



The Alarm view



---

## 9 - Technical information

- Automation product certifications ..... page 9/2

## Schneider Electric worldwide

- Addresses ..... page 9/4

## Index

- Product reference index ..... page 9/10

# Transparent Ready

## Automation product certifications

In some countries, certification of certain electrical components is enforced by law. A standard conformity certificate is then issued by the official organization. Each certified product must carry approval symbols when enforced.

Use on board merchant navy vessels generally requires prior approval (= certification) of an electrical device by certain marine classification authorities.

Key	Certification body	Country
CSA	Canadian Standards Association	Canada
C-Tick	Australian Communication Authority	Australia
GOST	Institut de recherche Scientifique Gost Standardt	C.I.S., Russia
UL	Underwriters Laboratories	USA
Key	Classification authority	Country
ABS	American Bureau of Shipping	USA
BV	Bureau Veritas	France
DNV	Det Norske Veritas	Norway
GL	Germanischer Lloyd	Germany
LR	Lloyd's Register	United-Kingdom
RINA	Registro Italiano Navale	Italy
RMRS	Register of Shipping	C.I.S.

The table below shows the situation as of the 01.06.2004 for certifications obtained or pending from organizations for base PLCs. An overview of certificates for Telemecanique products is available on our Internet web site :

[www.telemecanique.com](http://www.telemecanique.com)

### Product certifications

		Certifications					
							Hazardous locations Class I, div 2 (1)
		UL	CSA	ACA	SIMTARS	GOST	
		USA	Canada	Australia	Australia	CEI, Russia	US
Advantys STB							
Altivar ATV 38/58							
ConneXium							(2)
ECC21 for CM 3000/CM 4000							
EGX gateways							
Inductel XGK S							
Magelis iPC							
Magelis XBT F							
Magelis XBT G							
Momentum							FM
Premium	PL7						CSA
	Unity						CSA
Quantum	Concept						FM
	Unity						FM
TSX Micro							
Twido		(3)					CSA

(1) **Hazardous locations** : CSA 22.2 N° 213 ou FM 3611, certified products are suitable for use in Class I, division 2, groups A, B, C et D or non-hazardous locations only

(2) Depending on product, see pages 7/2 à 7/6.

(3) cULus north-american certification (Canada and US).

Local certifications		
BG	Germany	TSX DPZ 10D2A safety module (TSX Micro) TSX PAY 262/282 safety modules (Premium)
AS-Interface	Europe	TSX SAZ 10 master module (TSX Micro) TSX SAY 100/1000 master modules (Premium) TBX SAP 10 Fipio bus/AS-Interface bus gateway

# Transparent Ready

## Automation product certifications

### Community regulations

#### Marine classification

		Marine classification des autorités						
								
		ABS	BV	DNV	GL	LR	RINA	RMRS
		USA	France	Norway	Germany	Unit.-Kingdom	Italy	C.I.S.
	Certified							
	Pending certification							
Advantys STB								
Altivar ATV 38/58								
ConneXium					(1)			
ECC21 for CM 3000/CM 4000								
EGX gateways								
Inductel XGK S								
Magelis iPC								
Magelis XBT F								
Magelis XBT G								
Momentum								
Premium	PL7							
	Unity	(2)						
Quantum	Concept							
	Unity	(2)						
TSX Micro								
Twido								

(1) Depending on products, see pages 7/2 à 7/6.

(2) Request for Marine certifications forecast 4<sup>th</sup> quarter 2004.

#### Community regulations

##### European directives

The opening of European markets implies a harmonization of regulations in the various European Union member states. European Directives are documents used to remove obstacles to the free movement of goods and their application is compulsory in all states of the European Union. Member states are obliged to transcribe each Directive into their national legislation and, at the same time, to withdraw any conflicting regulations. The Directives, particularly those of a technical nature with which we are concerned, only set objectives, called "general requirements". The manufacturer must take all necessary measures to ensure that his products conform to the requirements of each Directive relating to his equipment. As a general rule, the manufacturer affirms that his product conforms to the necessary requirements of the Directive(s) by applying the **CE** label to his product. **CE** marking is applied to Telemecanique products where relevant.

##### The significance of CE marking

- **CE** marking on a product means that the manufacturer certifies that his product conforms to the relevant European Directives ; it is necessary in order that a product which is subject to a Directive(s) can be marketed and freely moved within the European Union.
- **CE** marking is intended solely for the national authorities responsible for market regulation.

For electrical equipment, only conformity of the product to standards indicates that it is suitable for use, and only a guarantee by a recognised manufacturer can ensure a high level of quality.

One or more Directives, as appropriate, may apply to our products, in particular :

- The Low Voltage Directive 72/23/EEC amended by Directive 93/68/EEC : **CE** marking under the terms of this Directive is compulsory as of 1 January 1997.
- The Electromagnetic Compatibility Directive 89/336/EEC, amended by Directives 92/31/EEC and 93/68/EEC : **CE** marking on the products covered by this Directive has been compulsory since 1 January 1996.



# Schneider Electric worldwide

Up-dated: 30-07-2003

<b>Afghanistan</b>	Contacts are assured by	<b>Schneider Electric India</b>	
<b>Albania</b>	Contacts are assured by	<b>Schneider Electric Austria</b>	
<b>Algeria</b>	■ Schneider Electric	voie A Lot C22 Zone industrielle Rouiba - Alger	Tel.: +213 21 92 97 02 à 09 Fax: +213 21 92 97 00 à 01
<b>Andorra</b>	Contacts are assured by	<b>Schneider Electric France</b>	
<b>Angola</b>	Contacts are assured by	<b>Schneider Electric South Africa</b>	
<b>Anguilla</b>	Contacts are assured by	<b>Schneider Electric Dominican Rep.</b>	
<b>Antartica</b>	Contacts are assured by	<b>Schneider Electric Brazil</b>	
<b>Antigua &amp; Barbuda</b>	Contacts are assured by	<b>Schneider Electric Dominican Rep.</b>	
<b>Argentina</b>	■ Schneider Argentina	Viamonte 2850 - 1678 Caseros (provincia Buenos Aires)	Tel.: +54 1 716 88 88 Fax: +54 1 716 88 33 <a href="http://www.schneider-electric.com.ar">www.schneider-electric.com.ar</a>
<b>Armenia</b>	Contacts are assured by	<b>Schneider Electric Russian Fed.</b>	
<b>Aruba</b>	Contacts are assured by	<b>Schneider Electric Dominican Rep.</b>	
<b>Australia</b>	■ Schneider Electric (Australia) Pty. Limited	2 Solent Circuit Norwest Business Park Baulkham Hill _ NSW 2153	Tel.: +61 298 51 28 00 Fax: +61 296 29 83 40 <a href="http://www.schneider.com.au">www.schneider.com.au</a>
<b>Austria</b>	■ Schneider Austria Ges.m.b.H.	Birostrasse 11 1239 Wien	Tel.: +431 610 540 Fax: +431 610 54 54 <a href="http://www.schneider-electric.at">www.schneider-electric.at</a>
<b>Azerbaijan</b>	Contacts are assured by	<b>Schneider Electric Russian Fed.</b>	
<b>Bahamas</b>	■ Schneider Electric	Union Village PO Box 3901 - Nassau	Tel.: +1 242 327 42 91 Fax: +1 242 327 42 91 <a href="http://www.squared.com">www.squared.com</a>
<b>Bahrain</b>	■ Schneider Electric	Floor 1 - Juma Building Abu Horaira Avenue PO Box 355 - 304 Manama	Tel.: +97 322 7897 Fax: +97 321 8313
<b>Bangladesh</b>	Contacts are assured by	<b>Schneider Electric India</b>	
<b>Barbados</b>	Contacts are assured by	<b>Schneider Electric Dominican Rep.</b>	
<b>Belarus</b>	■ Schneider Electric Industries SA	Prospect Macherova 5, of. 202 220004 Minsk	Tel.: +375 172 23 75 50 Fax: +375 172 23 97 61
<b>Belgium</b>	■ Schneider Electric nv/sa	Dieweg 3 B - 1180 Brussels	Tel.: +3223737711 Fax: +3223753858 <a href="http://www.schneider-electric.be">www.schneider-electric.be</a>
<b>Belize</b>	Contacts are assured by	<b>Schneider Electric USA</b>	
<b>Benin</b>	Contacts are assured by	<b>Schneider Electric Ivory Coast</b>	
<b>Bermuda</b>	Contacts are assured by	<b>Schneider Electric Dominican Rep.</b>	
<b>Bhutan</b>	Contacts are assured by	<b>Schneider Electric India</b>	
<b>Bolivia</b>	Contacts are assured by	<b>Schneider Electric Chile</b>	
<b>Bosnia and Herzegovina</b>	Contacts are assured by	<b>Schneider Electric Croatia</b>	
<b>Botswana</b>	Contacts are assured by	<b>Schneider Electric South Africa</b>	
<b>Bouvet island</b>	Contacts are assured by	<b>Schneider Electric Dominican Rep.</b>	
<b>Brazil</b>	■ Schneider Electric Brazil Ltda.	Avenida Das Nações Unidas 23223 Jurubatuba - CEP 04795-907 São Paulo-SP	Tel.: +55 55 24 52 33 Fax: +55 55 22 51 34 <a href="http://www.schneider-electric.com.br">www.schneider-electric.com.br</a>
<b>Brunei (Darussalam)</b>	Contacts are assured by	<b>Schneider Electric Singapore</b>	
<b>Bulgaria</b>	■ Schneider Electric	Expo 2000, Boulevard Vaptzarov 1407 Sofiav	Tel.: +3592 919 42 Fax: +3592 962 44 39 <a href="http://www.schneiderelectric.bg">www.schneiderelectric.bg</a>
<b>Burkina Faso</b>	Contacts are assured by	<b>Schneider Electric Ivory Coast</b>	
<b>Burundi</b>	Contacts are assured by	<b>Schneider Electric Kenya</b>	
<b>Cambodia</b>	Contacts are assured by	<b>Schneider Electric Viet Nam</b>	
<b>Cameroon</b>	■ Schneider Electric Cameroon	166, rue de l'Hôtel de Ville BP12087 - Douala	Tel.: +237 343 38 84 Fax: +237 343 11 94
<b>Canada</b>	■ Schneider Canada	19, Waterman Avenue M4 B1Y2 Toronto - Ontario	Tel.: +1 416 752 8020 Fax: +1 416 752 4203 <a href="http://www.schneider-electric.ca">www.schneider-electric.ca</a>
<b>Cape Verde</b>	Contacts are assured by	<b>Schneider Electric Senegal</b>	
<b>Caribee</b>	Contacts are assured by	<b>Schneider Electric Dominican Rep.</b>	
<b>Cayman islands</b>	Contacts are assured by	<b>Schneider Electric Dominican Rep.</b>	
<b>Central African Republic</b>	Contacts are assured by	<b>Schneider Electric Cameroon</b>	
<b>Chad</b>	Contacts are assured by	<b>Schneider Electric Cameroon</b>	
<b>Chile</b>	■ Schneider Electric Chile S.A.	Avda. Pdtte Ed. Frei Montalva, 6001-31 Conchalí - Santiago	Tel.: +56 2 444 3000 Fax: +56 2 423 9335 <a href="http://www.schneider-electric.co.cl">www.schneider-electric.co.cl</a>
<b>China</b>	■ Schneider Beijing	Landmark bldg-Room 1801 8 North Dong Sanhuan Rd Chaoyang District 100004 Beijing	Tel.: +86 10 65 90 69 07 Fax: +86 10 65 90 00 13 <a href="http://www.schneider-electric.com.cn">www.schneider-electric.com.cn</a>



# Schneider Electric worldwide

Up-dated: 30-07-2003

<b>Christmas island</b>	Contacts are assured by	<b>Schneider Electric Australia</b>		
<b>Cocos (Keeling) islands</b>	Contacts are assured by	<b>Schneider Electric Australia</b>		
<b>Colombia</b>	■ Schneider Electric de Colombia S.A.	Calle 45A #102-48 Bogota DC	Tel.: +57 1 426 97 00 Fax: +57 1 426 97 40	
<b>Comoros</b>	Contacts are assured by	<b>Schneider Electric la Reunion</b>		
<b>Congo</b>	Contacts are assured by	<b>Schneider Electric Cameroon</b>		
<b>Cook islands</b>	Contacts are assured by	<b>Schneider Electric Australia</b>		
<b>Costa Rica</b>	■ Schneider Centroamérica Ltda.	1.5 kmts oeste de la Embajada Americana, Pavas, San José, Costa Rica C.A. Apartado: 4123-1000 San Jose	Tel.: +506 232-60-55 Fax: +506 232-04-26	<a href="http://www.schneider-ca.com">www.schneider-ca.com</a>
<b>Croatia</b>	■ Schneider Electric SA	Fallerovo Setaliste 22 HR - 10000 Zagreb	Tel.: +385 1 367 100 Fax: +385 1 367 111	
<b>Cuba</b>	■ Schneider Electric	Bureau de Liaison de La Havane Calle 36- N°306-Apto1 Entre 3ra y 5ta Avenida Miramar Playa Habana	Tel.: +53 724 15 59 Fax: +53 724 12 17	
<b>Cyprus</b>	■ Schneider Electric Cyprus	28 General Timayia Avenue Kyriakos Building, Block #A301 Larnaca 6046	Tel.: +00357 248 12646 Fax: +00357 246 37382	
<b>Czech Republic</b>	■ Schneider Electric CZ, s.r.o.	Thámova 13 Praha 8 - 186 00	Tel.: +420 2 810 88 111 Fax: +420 2 24 81 08 49	<a href="http://www.schneider-electric.cz">www.schneider-electric.cz</a>
<b>Democratic Rep. of Congo</b>	Contacts are assured by	<b>Schneider Electric Cameroon</b>		
<b>Denmark</b>	■ Schneider Electric A/S	Baltorpbakken 14 DK-2750 Ballerup	Tel.: +45 44 73 78 88 Fax: +45 44 68 5255	<a href="http://www.schneider-electric.dk">www.schneider-electric.dk</a>
<b>Djibouti</b>	Contacts are assured by	<b>Schneider Electric Egypt</b>		
<b>Dominican Republic</b>	■ Schneider Electric	Calle Jacinto Manon Esq. Federico Geraldino Edificio D' Roca Plaza Suite 402, Ens. Paraiso - Santo Domingo	Tel.: +1 809 334 66 63 Fax: +1 809 334 66 68	
<b>Ecuador</b>	■ Schneider Electric Ecuador SA	Av. Republica del Salvador 1082 y Nac Edificio Mansion Blanca-Quito	Tel. : +593 2 224 42 42 Fax : +593 2 224 42 94	
<b>Egypt</b>	■ Schneider Electric Egypt sae	68, El Tayaran Street Nasr City, 11371 - Cairo	Tel.: +20 24 01 01 19 Fax: +20 24 01 66 87	<a href="http://www.schneider.com.eg">www.schneider.com.eg</a>
<b>El Salvador</b>	Contacts are assured by	<b>Schneider Electric USA</b>		
<b>Equatorial Guinea</b>	Contacts are assured by	<b>Schneider Electric Cameroon</b>		
<b>Eritrea</b>	Contacts are assured by	<b>Schneider Electric Egypt</b>		
<b>Estonia</b>	■ Lexel Electric	Ehitajate tee 110 EE 12618 Tallinn	Tel. : +372 650 97 00 Fax : +372 650 97 22	
<b>Ethiopia</b>	Contacts are assured by	<b>Schneider Electric Egypt</b>		
<b>Falkland islands</b>	Contacts are assured by	<b>Schneider Electric Brazil</b>		
<b>Faroe islands</b>	Contacts are assured by	<b>Schneider Electric Australia</b>		
<b>Fiji</b>	Contacts are assured by	<b>Schneider Electric Australia</b>		
<b>Finland</b>	■ Schneider Electric Oy	Sinimäentie 14 02630 Espoo	Tel. : +358 9 527 000 Fax : +358 9 5270 0376	<a href="http://www.schneider-electric.fi">www.schneider-electric.fi</a>
<b>France</b>	■ Schneider Electric SA	5, rue Nadar 92500 Rueil Malmaison	Tel.: +33 (0)1 41 29 82 00 Fax: +33 (0)1 47 51 80 20	<a href="http://www.schneider-electric.fr">www.schneider-electric.fr</a>
<b>French Polynesia</b>	Contacts are assured by	<b>Schneider Electric Australia</b>		
<b>French West Indies</b>	Contacts are assured by	<b>Schneider Electric Dominican Rep.</b>		
<b>Gabon</b>	Contacts are assured by	<b>Schneider Electric Cameroon</b>		
<b>Gambia</b>	Contacts are assured by	<b>Schneider Electric Senegal</b>		
<b>Georgia</b>	Contacts are assured by	<b>Schneider Electric Russian Fed.</b>		
<b>Germany</b>	■ Schneider Electric GmbH	Gothaer Straße 29 D-40880 Ratingen	Tel.: +49210 240 40 Fax: +492 10 240 49 256	<a href="http://www.schneiderelectric.de">www.schneiderelectric.de</a>
<b>Ghana</b>	■ Schneider Electric Ghana	PMB Kia 3rd Floor Opeibea House Airport Commercial Center Liberation road - Accra	Tel. : +233 21 70 11 687 Fax : +233 21 77 96 22	
<b>Gibraltar</b>	Contacts are assured by	<b>Schneider Electric Spain</b>		
<b>Greece</b>	■ Schneider Electric AE	14th km - RN Athens-Lamia GR - 14564 Kifissia	Tel.: +302 106 29 52 00 Fax: +302 106 29 52 10	<a href="http://www.schneider-electric.com.gr">www.schneider-electric.com.gr</a>
<b>Greenland</b>	Contacts are assured by	<b>Schneider Electric United States</b>		
<b>Grenada</b>	Contacts are assured by	<b>Schneider Electric Dominican Rep.</b>		
<b>Guadeloupe</b>	Contacts are assured by	<b>Schneider Electric Martinique</b>		
<b>Guam</b>	Contacts are assured by	<b>Schneider Electric Australia</b>		



# Schneider Electric worldwide

Up-dated: 30-07-2003

<b>Guatemala</b>	Contacts are assured by	<b>Schneider Electric United States</b>		
<b>Guinea-Bissau</b>	Contacts are assured by	<b>Schneider Electric Sénégal</b>		
<b>Guinea</b>	Contacts are assured by	<b>Schneider Electric Ivory Coast</b>		
<b>Guyana</b>	Contacts are assured by	<b>Schneider Electric United States</b>		
<b>Haiti</b>	Contacts are assured by	<b>Schneider Electric Dominican Rep.</b>		
<b>Heard &amp; Mac Donald isl.</b>	Contacts are assured by	<b>Schneider Electric Australia</b>		
<b>Honduras</b>	Contacts are assured by	<b>Schneider Electric United States</b>		
<b>Hong Kong</b>	■ Schneider Electric (Hong Kong) Ltd	Room 3108-28, 31th Floor, Sun Hung Kai Centre, 30 Harbour Road, Wanchai	Tel.: +852 25 65 06 21 Fax: +852 28 11 10 29	
<b>Hungary</b>	■ Schneider Electric Hungária Villamossági Rt.	Fehérvári út 108 – 112 H-1116 Budapest	Tel.: +36 1 382 26-06 Fax: +36 1 206 1429	<a href="http://www.schneider-electric.hu">www.schneider-electric.hu</a>
<b>Iceland</b>	Contacts are assured by	<b>Schneider Electric Denmark</b>		
<b>India</b>	■ Schneider Electric India	Max House, 1 Dr. Jha Marg, Okhla 110 020 New Dehli	Tel.: +91 11 631 85 84 Tel.: +91 11 631 71 61	<a href="http://www.schneider-electric-in.com">www.schneider-electric-in.com</a>
<b>Indonesia</b>	■ P.T. Schneider Indonesia	Ventura Building 7th Floor Jalan R.A. Kartini Kav.26 Cilandak - 12430 Jakarta	Tel.: +62 +21 750 44 06 Fax: +62 +21 750 44 15/ 16	<a href="http://www.schneider-electric.co.id">www.schneider-electric.co.id</a>
<b>Iran (Islamic Republic of)</b>	■ Telemecanique Iran	1047 Avenue VALI ASSR P.O. Box 15875-3547 15116 Teheran	Tel.: +98 218 71 01 42 Fax: +98 218 71 81 87	
<b>Irak</b>	■ Schneider Electric Industries SA	38050 Grenoble Cedex 9	Tel.: +33 04 76 60 54 27 Fax: +33 04 76 60 56 60	
<b>Ireland</b>	■ Schneider Electric Ireland	Maynooth Road Cellbridge - Co. Kildare	Tel.: +353+0 1 6012200 Fax: +353+0 1 6012201	<a href="http://www.schneider-electric.ie">www.schneider-electric.ie</a>
<b>Italy</b>	■ Schneider Electric S.p.A.	Centro Direzionale Colleoni Palazzo Sirio - Viale Colleoni, 7 20041 Agrate Brianza (Mi)	Tel.: +39 39 655 8111 Fax: +39 39 605 6237	<a href="http://www.schneider-electric.it">www.schneider-electric.it</a>
<b>Ivory Coast</b>	■ Schneider Electric Afrique de l'Ouest	Rue Pierre et Marie Curie 18 BP 2027 Abidjan 18	Tel.: +225 21 75 00 10 Fax: +225 21 75 00 30	
<b>Jamaica</b>	■ Schneider Electric	Shop#5, Plaza Dunrobin 30 Dunrobin Avenue - Kingstown	Tel.: +1876 755 41 27 Tel.: +931 87 74	
<b>Japan</b>	■ Schneider Electric Japan Ltd	Torigoe F. Bldg 1-8-2, Torigoe Taito-Ku - 111-0054 Tokyo	Tel.: +81 358 35 35 81 Fax: +81 358 35 35 85	<a href="http://www.schneider-electric.co.jp">www.schneider-electric.co.jp</a>
<b>Jordan</b>	■ Schneider Electric Industr. Jordan	Jordan University Street Abu Al Haj Commercial Complex 2nd Floor - Office # 202 - Amman	Tel.: 962 65 16 78 87 Fax: 962 65 16 79 1	
<b>Kazakstan</b>	■ Schneider Electric Kazakhstan Liaison Office	Prospekt Abaia 157 off 9 480009 Almaty	Tel.: +7 327 250 93 88 Tel.: +7 327 250 63 70	
<b>Kenya</b>	■ Schneider East Africa	Power Technics Complex Monbasa Road - PO Box 46345 Nairobi	Tel.: +254 2.824.156 Fax: +254 2.824.157	
<b>Kiribati</b>	Contacts are assured by	<b>Schneider Electric Australia</b>		
<b>Korea</b>	■ Schneider Electric Korea Ltd	3Floor, Cheil Bldg., 94-46, 7-Ka Youngdeungpodong, Youngdeungpo-ku 150-037 Seoul	Tel.: +82 2 2630 9700 Fax: +82 2 2630 9800	<a href="http://www.csinfo.co.kr/schneider/">www.csinfo.co.kr/schneider/</a>
<b>Kuwait</b>	■ Schneider Electric Kuwait	Al Gaas Tower - Sharq 2nd Floor PO Box 20092 - 13 061 Safat	Tel.: +965 240 75 46 Fax: +965 240 75 06	
<b>Kyrgyz Republic</b>	Contacts are assured by	<b>Schneider Electric Russian Fed.</b>		
<b>Laos</b>	Contacts are assured by	<b>Schneider Electric Thailand</b>		
<b>Latvia</b>	■ Lexel Electric	60A A.Deglava str. LV1035 Riga	Tel.: +371 780 23 74/75 Fax: +371 754 62 80	
<b>Lebanon</b>	■ Schneider Electric Liban	Tabaris, Avenue Charles Malek Immeuble Ashada, 8 P.O. Box 166223 - Beyrouth	Tel.: +961 1 20 46 20 Tel.: +961 1 20 31 19	
<b>Lesotho</b>	Contacts are assured by	<b>Schneider Electric South Africa</b>		
<b>Liberia</b>	Contacts are assured by	<b>Schneider Electric Ghana</b>		
<b>Libya</b>	Contacts are assured by	<b>Schneider Electric Tunisia</b>		
<b>Liechtenstein</b>	Contacts are assured by	<b>Schneider Electric Switzerland</b>		
<b>Lithuania</b>	■ Lexel Electric	44, Verkiu str. LT-2012 Vilnius	Tel.: +370 278 59 59/61 Fax: +370 278 59 60	
<b>Loro Sae</b>	Contacts are assured by	<b>Schneider Electric Australia</b>		
<b>Luxembourg</b>	■ Schneider Electric Industrie SAS	Agence de Metz 1, Rue Graham Bell - BP n° 35190 57075 Metz cedex 3 - France	Tel.: 33 03 87 39 06 03 Fax: 33 03 87 74 25 96	<a href="http://www.schneider-electric.fr">www.schneider-electric.fr</a>
<b>Macau</b>	Contacts are assured by	<b>Schneider Electric China</b>		



# Schneider Electric worldwide

Up-dated: 30-07-2003

<b>Macedonia</b>	Contacts are assured by	<b>Schneider Electric Bulgaria</b>		
<b>Madagascar</b>	Contacts are assured by	<b>Schneider Electric la Reunion</b>		
<b>Malawi</b>	Contacts are assured by	<b>Schneider Electric South Africa</b>		
<b>Malaysia</b>	■ Schneider Electric (Malaysia) Sdn Bhd	No.11 Jalan U1/19, Seksyen U1 Hicom-Glenmarie Industrial Park 40150 Shah Alam Selangor Darul Ehsan	Tel. : (603) 7883 6333 Fax : (603) 7883 6188	<a href="http://www.schneider-electric.com.my">www.schneider-electric.com.my</a>
<b>Maldives</b>	Contacts are assured by	<b>Schneider Electric Reunion</b>		
<b>Mali</b>	Contacts are assured by	<b>Schneider Electric Senegal</b>		
<b>Malta</b>	Contacts are assured by	<b>Schneider Electric Tunisia</b>		
<b>Marshall islands</b>	Contacts are assured by	<b>Schneider Electric Australia</b>		
<b>Martinique</b>	■ Schneider Electric	Schneider Electric Immeuble Cottrell - ZI de la Lézarde 97232 Le Lamentin	Tel.: +05 96 51 06 00 Fax: +05 96 51 11 26	
<b>Mauritania</b>	Contacts are assured by	<b>Schneider Electric Senegal</b>		
<b>Mauritius</b>	■ Schneider Electric	Route côtière Calodyne - Mauritius	Tel.: 230 282 18 83 Fax: 230 282 18 84	
<b>Mayotte</b>	Contacts are assured by	<b>Schneider Electric Reunion</b>		
<b>Mexico</b>	■ Groupe Schneider Mexico	Calz. Rojo Gomez N° 1121-A Col. Guadalupe del Moral México, D.F. - C.P. 09300	Tel.: +525 686 30 00 Fax: +525 686 24 09	<a href="http://www.schneider-electric.com.mx">www.schneider-electric.com.mx</a>
<b>Micronesia</b>	Contacts are assured by	<b>Schneider Electric Australia</b>		
<b>Moldova</b>	Contacts are assured by	<b>Schneider Electric Romania</b>		
<b>Monaco</b>	Contacts are assured by	<b>Schneider Electric France</b>		
<b>Mongolia</b>	Contacts are assured by	<b>Schneider Electric Russian Fed.</b>		
<b>Montserrat</b>	Contacts are assured by	<b>Schneider Electric Dominican Rep.</b>		
<b>Morocco</b>	■ Schneider Electric Morocco	26, rue Ibnou Khalikane Quartier Palmiers 20100 Casablanca	Tel.: +212 299 08 48 to 57 Fax: +212 299 08 67 and 69	<a href="http://www.schneider.co.ma">www.schneider.co.ma</a>
<b>Mozambique</b>	Contacts are assured by	<b>Schneider Electric South Africa</b>		
<b>Myanmar</b>	Contacts are assured by	<b>Schneider Electric Singapore</b>		
<b>Namibia</b>	Contacts are assured by	<b>Schneider Electric South Africa</b>		
<b>Nauru</b>	Contacts are assured by	<b>Schneider Electric Australia</b>		
<b>Nepal</b>	Contacts are assured by	<b>Schneider Electric India</b>		
<b>Netherlands</b>	■ Schneider Electric BV	Waarderweg 40 - Postbus 836 2003 RV Haarlem	Tel.: +31 23 512 4124 Fax: +31 23 512 4100	<a href="http://www.schneider-electric.nl">www.schneider-electric.nl</a>
<b>Netherlands Antilles</b>	Contacts are assured by	<b>Schneider Electric Dominican Rep.</b>		
<b>New Caledonia</b>	Contacts are assured by	<b>Schneider Electric Australia</b>		
<b>New Zealand</b>	■ Schneider Electric (NZ) Ltd	14 Charann Place Avondale P.O. Box 15355 - New Lynn Auckland	Tel. : +64 9 829 04 90 Fax : +64 9 829 04 91	<a href="http://www.schneider-electric.co.nz">www.schneider-electric.co.nz</a>
<b>Nicaragua</b>	Contacts are assured by	<b>Schneider Electric United States</b>		
<b>Niger</b>	Contacts are assured by	<b>Schneider Electric Ivory Coast</b>		
<b>Nigeria</b>	■ Schneider Electric Nigeria Limited	Biro plaza - 8th Floor - Plot 634 Abeyemo Alakija Street Victoria Islan - Lagos	Tel. : +234 1 2702973 Fax : +234 1 2702976	
<b>Niue</b>	Contacts are assured by	<b>Schneider Electric Australia</b>		
<b>Norfolk island</b>	Contacts are assured by	<b>Schneider Electric Australia</b>		
<b>North Korea</b>	Contacts are assured by	<b>Schneider Electric China</b>		
<b>Northern Mariana islands</b>	Contacts are assured by	<b>Schneider Electric Australia</b>		
<b>Norway</b>	■ Schneider Electric Norge A/S	Solgaard Skog 2 Postboks 128 - 1501 Moss	Tel.: +47 6924 9700 Fax: +47 6925 7871	<a href="http://www.schneider-electric.no">www.schneider-electric.no</a>
<b>Oman</b>	■ Schneider Electric CA	c/o Arab Development Co PO Box 439 - 113 Muscat	Tel.: +968 77 163 64 Fax: +968 77 104 49	
<b>Pakistan</b>	■ Schneider Electric Pakistan	43-L, 2nd floor, M.M. Alam Road, Gulberg II - Lahore	Tel.: +92 42 5754471 à 73 Fax: +92 42 5754474	
<b>Palau</b>	Contacts are assured by	<b>Schneider Electric Australia</b>		
<b>Panama</b>	Contacts are assured by	<b>Schneider Electric United States</b>		
<b>Papua New Guinea</b>	Contacts are assured by	<b>Schneider Electric Australia</b>		
<b>Paraguay</b>	Contacts are assured by	<b>Schneider Electric Uruguay</b>		
<b>Peru</b>	■ Schneider Electric Peru S.A.	Los Telares n°231 Urb. Vulcano, Ate Lima 03	Tel.: +511 348 44 11 Fax: +511 348 05 23	<a href="http://www.schneider-electric.com.pe">www.schneider-electric.com.pe</a>



# Schneider Electric worldwide

Up-dated: 30-07-2003

<b>Philippines</b>	■ Schneider Electric Philippines, Inc	5th Floor, ALCO Building 391 Sen, Gil Puyat Avenue Makati 1209	Tel.: +632 896 6063 Fax: +632 896 7229	
<b>Pitcairn</b>	Contacts are assured by	<b>Schneider Electric Australia</b>		
<b>Poland</b>	■ Schneider Electric Polska Sp.zo.o.	ul. Lubinowa 4a 03-878 - Warszawa	Tel.: +48 22 511 8 200 Fax: +48 22 511 8 210	<a href="http://www.schneider-electric.pl">www.schneider-electric.pl</a>
<b>Portugal</b>	■ Schneider Electric Portugal	Av.do Forte, 3 Edificio Suécia II, Piso 3-A CP 2028 Carnaxide 2795 Linda-A-Velha	Tel.: +351 21 416 5800 Fax: +351 21 416 5857	<a href="http://www.schneiderelectric.pt">www.schneiderelectric.pt</a>
<b>Puerto Rico</b>	Contacts are assured by	<b>Schneider Electric United States</b>		
<b>Qatar</b>	■ Schneider Electric Qatar Branch	c/o Khalifa BinFahred Al Thani Trad.and Co - P.O. Box 4484 Doha	Tel.: +97 4424358 Fax: +97 4424358	
<b>Reunion</b>	■ Schneider Electric	Immeuble Futura, 190, rue des 2 canons BP 646 - 97497 Sainte Clothilde	Tel.: +262 28 14 28 Fax: +262 28 39 37	
<b>Romania</b>	■ Schneider Electric	Bd Ficusului n°42 Apimondia, Corp.A, et.1, Sector 1 Bucuresti	Tel.: +401 203 06 50 Fax: +401 232 15 98	<a href="http://www.schneider-electric.ro">www.schneider-electric.ro</a>
<b>Russian Federation</b>	■ Schneider Electric ZAO	Enisseyskaya 37 129 281 Moscow	Tel.: +7095 797 40 00 Fax: +7095 797 40 03	<a href="http://www.schneider-electric.ru">www.schneider-electric.ru</a>
<b>Rwanda</b>	Contacts are assured by	<b>Schneider Electric Kenya</b>		
<b>Samoa</b>	Contacts are assured by	<b>Schneider Electric Australia</b>		
<b>San Marino</b>	Contacts are assured by	<b>Schneider Electric Italy</b>		
<b>Sandwich &amp; Georgia Island</b>	Contacts are assured by	<b>Schneider Electric Australia</b>		
<b>Sao Tome &amp; Principe</b>	Contacts are assured by	<b>Schneider Electric Senegal</b>		
<b>Saudi Arabia</b>	■ Schneider Electric	Second Industrial City P.O. Box 89249 - 11682 Riyadh	Tel.: +966 1 265 1515 Fax: +966 1 265 1860	
<b>Senegal</b>	■ Schneider Electric Sénégal	BP 15952 - Dakar-Fann Rond point N'Gor - Dakar	Tel.: +221 820 68 05 Fax: +221 820 58 50	
<b>Seychelles</b>	Contacts are assured by	<b>Schneider Electric Reunion</b>		
<b>Sierra Leone</b>	Contacts are assured by	<b>Schneider Electric Ghana</b>		
<b>Singapore</b>	■ Schneider Electric Singapore Pte Ltd	10 Ang Mo Kio Street 65 #02-17/20 TechPoint Singapore 569059	Tel.: +65 484 78 77 Fax: +65 484 78 00	<a href="http://www.schneider-electric.com.sg">www.schneider-electric.com.sg</a>
<b>Slovak Republic</b>	■ Schneider Electric Slovakia spol s.r.o.	Borekova 10 SK-821 06 Bratislava	Tel.: +02 45 52 40 10 and 40 30 Fax: +02 45 52 40 00	<a href="http://www.schneider-electric.sk">www.schneider-electric.sk</a>
<b>Slovenia</b>	■ Schneider Electric, d.o.o.	Dunasjka 47 1000 Ljubljana	Tel.: +386 1 23 63 555 Fax: +386 1 23 63 559	<a href="http://www.schneider-electric.si">www.schneider-electric.si</a>
<b>Solomon islands</b>	Contacts are assured by	<b>Schneider Electric Australia</b>		
<b>Somalia</b>	Contacts are assured by	<b>Schneider Electric Egypt</b>		
<b>South Africa</b>	■ Schneider Electric South Africa (PTY) Ltd	Private Bag X139 Halfway House 1685 - Midrand.	Tel.: +27 11 254 6400 Fax: +27 11 315 8830	<a href="http://www.schneider-electric.co.za">www.schneider-electric.co.za</a>
<b>Spain</b>	■ Schneider Electric España, S.A.	Pl. Dr. Letamendi, 5-7 08007 Barcelona	Tel.: +34 93 484 3100 Fax: +34 93 484 3308	<a href="http://www.schneiderelectric.es">www.schneiderelectric.es</a>
<b>Sri Lanka</b>	■ Schneider Electric Industries SA	Liaison office SRI Lanka Level 3B Valiant towers 46/7 Nawam Mawatha-Colombo 2	Tel.: +94 77 48 54 89	<a href="http://www.schneiderelectric-in.com">www.schneiderelectric-in.com</a>
<b>St Helena</b>	Contacts are assured by	<b>Schneider Electric Italy</b>		
<b>St Kitts &amp; Nevis</b>	Contacts are assured by	<b>Schneider Electric Dominican Rep.</b>		
<b>St Lucia</b>	Contacts are assured by	<b>Schneider Electric Dominican Rep.</b>		
<b>St Pierre et Miquelon</b>	Contacts are assured by	<b>Schneider Electric Dominican Rep.</b>		
<b>St Vincent &amp; Grenadines</b>	Contacts are assured by	<b>Schneider Electric Dominican Rep.</b>		
<b>Sudan</b>	Contacts are assured by	<b>Schneider Electric Egypt</b>		
<b>Suriname</b>	Contacts are assured by	<b>Schneider Electric United States</b>		
<b>Svalbard &amp; Jan Mayen isl.</b>	Contacts are assured by	<b>Schneider Electric Denmark</b>		
<b>Swaziland</b>	Contacts are assured by	<b>Schneider Electric South Africa</b>		
<b>Sweden</b>	■ Schneider Electric AB	Djupdalsvägen 17/19 19129 Sollentuna	Tel.: +46 8 623 84 00 Fax: +46 8 623 84 85	<a href="http://www.schneider-electric.se">www.schneider-electric.se</a>
<b>Switzerland</b>	■ Schneider Electric (Switzerland) S.A.	Schermerwaldstrasse 11 CH - 3063 Ittigen	Tel.: +41 31 917 3333 Fax: +41 31 917 3355	<a href="http://www.schneider-electric.ch">www.schneider-electric.ch</a>
<b>Syrian Arab Republic</b>	■ Schneider Electric Syria	Elba Street - Malki Gheibeh and Qassas bldg, 1st floor PO Box 33876-Damascus	Tel.: +963 11 37 49 88 00 Fax: +963 11 37 17 55 9	



# Schneider Electric worldwide

Up-dated: 30-07-2003

<b>Taiwan, Republic of China</b>	■ Schneider Electric Taiwan Co Ltd	2Fl., N°37, Ji-Hu Road, Nei-Hu Dist., Taipei 114	Tel.: +886 2 8751 6388 Fax: +886 2 8751 6389	<a href="http://www.schneider-electric.com.tw">www.schneider-electric.com.tw</a>
<b>Tajikistan</b>	Contacts are assured by	<b>Schneider Electric Russian Fed.</b>		
<b>Tanzania, United Rep. of</b>	Contacts are assured by	<b>Schneider Electric Kenya</b>		
<b>Thailand</b>	■ Schneider (Thailand) Ltd	20th Floor Richmond Building 75 Sukhumvit 26 Road, Klongtoey Bangkok 10110	Tel.: +662 204 9888 Fax: +662 204 9816	<a href="http://www.schneider-electric.co.th">www.schneider-electric.co.th</a>
<b>Togo</b>	Contacts are assured by	<b>Schneider Electric Ivory Coast</b>		
<b>Tokelau</b>	Contacts are assured by	<b>Schneider Electric Australia</b>		
<b>Tonga</b>	Contacts are assured by	<b>Schneider Electric Australia</b>		
<b>Trinidad &amp; Tobago</b>	■ Schneider Electric	6, 1st Street West Ext. Beaulieu Avenue Trincity Trinidad West Indies	Tel.: 1868 640 42 04 Fax: 1868 640 42 04	
<b>Tunisia</b>	■ Schneider Electric Tunisia	Rue du Lac Oubeira 1053 Les Berges du Lac - Tunis	Tel.: +216 71 960 477 Fax: +216 71 960 342	
<b>Turkey</b>	■ Schneider Elektrik Sanayi Ve Ticaret A.S.	Tütüncü Mehmet Efendi Cad. N°:110 Kat 1-2 - 81080 Göztepe - Istanbul	Tel.: +90 21 63 86 95 70 Fax: +90 21 63 86 38 75	<a href="http://www.schneiderelectric.com.tr">www.schneiderelectric.com.tr</a>
<b>Turkmenistan</b>	■ Schneider Electric Turkmenistan Liaison Office	rue Neitralny Turkmenistan 28, off.326/327 74 000 Achgabad	Tel.: +993 12 46 29 52 Fax: +993 12 46 29 52	
<b>Turks &amp; Caicos islands</b>	Contacts are assured by	<b>Schneider Electric Dominican Rep.</b>		
<b>Tuvalu</b>	Contacts are assured by	<b>Schneider Electric Australia</b>		
<b>Uganda</b>	Contacts are assured by	<b>Schneider Electric Kenya</b>		
<b>Ukraine</b>	■ Schneider Electric	Rue Krechtchalik 2 252601 Kiev	Tel.: +380 44 462 04 25 Fax: +380 44 462 04 24	<a href="http://www.schneider-electric.com.ua">www.schneider-electric.com.ua</a>
<b>United Arab Emirates</b>	■ Schneider Electric Abu Dhabi	PO Box 29580 Office Floor 2/Lulu Street Al Marina Plaza Tower Abu Dhabi	Tel.: +9712 6 339444 Fax: +9712 6 316606	
<b>United Kingdom</b>	■ Schneider Electric Ltd	Braywick House East Windsor Road - Maidenhead Berkshire SL6 1 DN	Tel.: +44 (0)1 628 508 500 Fax: +44 (0)1 628 508 508	<a href="http://www.schneider.co.uk">www.schneider.co.uk</a>
<b>United States</b>	■ Schneider Electric	North American Division 1415 Roselle Road Palatine - IL 60067	Tel.: +1 847 397 2600 Fax: +1 847 925 7500	<a href="http://www.squared.com">www.squared.com</a>
<b>Uruguay</b>	■ Schneider Electric Uruguay S.A.	Ramon Masini 3190 Montevideo	Tel.: +59 82 707 2392 Fax: +59 82 707 2184	
<b>Uzbekistan</b>	Contacts are assured by	<b>Schneider Electric Russian Fed.</b>		
<b>Vanuatu</b>	Contacts are assured by	<b>Schneider Electric Australia</b>		
<b>Vatican city St./Holy See</b>	Contacts are assured by	<b>Schneider Electric Italy</b>		
<b>Venezuela</b>	■ Schneider Mg SD TE, S.A	Calle 162/ Piso 2 Edificio Centro Cynamid La Urbina, 1070 - 75319 Caracas	Tel.: +58 2 241 13 44 Fax: +58 2 243 60 09	<a href="http://www.schneider-electric.com.ve">www.schneider-electric.com.ve</a>
<b>Viet Nam</b>	■ R.R.O. of Schneider Electric Industries S.A.S. in Viet Nam	Unit 2.9, 2nd Floor, e-Town Building 364 Cong Hoa Street Tan Binh District - Ho Chi Minh City	Tel.: +84 8 8103 103 Fax: +84 8 8120 477	
<b>Virgin islands</b>	Contacts are assured by	<b>Schneider Electric Dominican Rep.</b>		
<b>Wallis &amp; Futuna islands</b>	Contacts are assured by	<b>Schneider Electric Australia</b>		
<b>Western Sahara</b>	Contacts are assured by	<b>Schneider Electric Morocco</b>		
<b>Yemen</b>	Contacts are assured by	<b>Schneider Electric U.A.E.</b>		
<b>Yugoslavia</b>	■ Schneider Electric Jugoslavija d.o.o.	Ratarski put 27d 11186 Belgrade	Tel.: +381 11 192 414 Fax: +381 11 107 125	
<b>Zambia</b>	■ Schneider Zambia	Zambia Office c/o Matipi Craft Center Building Plot 1036 - Accra Road PO Box 22792 - Kitwe	Tel.: +260 222 22 52 Fax: +260 222 83 89	
<b>Zimbabwe</b>	■ Schneider Electric	Zimbabwe Liaison Office 75A Second Street (corner Livingstone Avenue) Harare	Tel.: +263 4 707 179/180 Fax: +263 4 707 176	



# Product reference index

<b>1</b>		MPC KT5 5NAA 00N	6/3	<b>VJL</b>	
140 CPU 651 50	5/8	MPC NA2 0NNN 00N	6/4	SMD BTL V25M	6/6
140 CPU 651 60	5/8	MPC NA5 0NNN 00N	6/4	SMD BTM V25M	6/6
140 NOE 771 01	5/9	MPC NB2 0NNN 00N	6/4	SMD BTS V25M	6/6
140 NOE 771 11	5/9	MPC NB5 0NNN 00N	6/4	SMD RTL V25M	6/6
140 NWM 100 00	5/9	MPC NT2 0NNN 00N	6/4	SMD RTM V25M	6/6
		<i>et</i>		SMD RTS V25M	6/6
		MPC NT5 0NNN 00N	6/4		
		MPC ST5 2NDJ 00T	6/3		
170 ENT 110 01	3/2	MPC YN0 2RAM 512	6/3	<b>W</b>	
170 ENT 110 02	3/2	MPC YN0 0CFE 00N	6/3	VW3 A58310	3/5
174 CEV 200 30	7/6	MPC YN0 0RAM 064	6/4		
174 CEV 200 40	7/6	MPC YN0 0RAM 128	6/4	<b>X</b>	
174 CEV 300 20	7/6	MPC YN0 0RAM 256	6/4	XBT G2130	6/2
		MPC YN0 0RFP KIT	6/4	XBT G2330	6/2
		MPC YN0 5RAM 512	6/3	XBT G4330	6/2
<b>4</b>				XBT G5230	6/2
490 NOC 000 05	7/7			XBT G5530	6/2
490 NOR 000 05	7/7	<b>O</b>		XBT G6330	6/2
490 NOT 000 05	7/7	OTB 1E0 DM9LP	3/4	XBT F024610	6/2
490 NTC 000 02	7/7			XBT F034610	6/2
490 NTC 000 02U	7/7	<b>P</b>		XBT MEM16	6/2
490 NTC 000 05	7/7	PMX 1500	4/4	XBT ZGM16	6/2
490 NTC 000 05U	7/7			XBT ZGM32	6/2
490 NTC 000 12	7/7	<b>S</b>		XGK S1715503	3/6
490 NTC 000 12U	7/7	SMS 121	4/4		
490 NTC 000 40	7/7	SMS 1500	4/4		
490 NTC 000 40U	7/7	STB NIP 2212	3/3		
490 NTC 000 80	7/7	STB XTS 1120	3/3		
490 NTC 000 80U	7/7	STB XTS 2120	3/3		
490 NTW 000 02	7/7	STX XMP 4440	3/3		
490 NTW 000 02U	7/7				
490 NTW 000 05	7/7	<b>T</b>			
490 NTW 000 05U	7/7	TLX CD 10OFS 30M	6/8		
490 NTW 000 12	7/7	TLX CD FCHMI V1M	5/7		
490 NTW 000 12U	7/7	<i>et</i>			
490 NTW 000 40	7/7		6/5		
490 NTW 000 40U	7/7	TLX CD GTW 10M	5/6		
490 NTW 000 80	7/7	TLX CD OFS 30M	6/8		
490 NTW 000 80U	7/7	TLX CD TCPA33E	5/7		
499 NEH 104 10	7/2	TLX CD UNOFS 30M	6/8		
499 NEH 141 00	7/2	TLX CD10 GTW 10M	5/6		
499 NES 171 00	7/5	TLX CDUNT	5/6		
499 NES 181 00	7/5	GTW 10M			
499 NES 251 00	7/4	TLX LSDKC PL741M	5/7		
499 NMS 251 01	7/4	TSX ETY 110	5/7		
499 NMS 251 02	7/4	TSX ETY 110 WS	5/7		
499 NOH 105 10	7/2	TSX ETY 4103	5/7		
499 NOS 171 00	7/5	TSX ETY 5103	5/7		
499 NSS 251 01	7/4	TSX ETZ 410	5/4		
499 NSS 251 02	7/4	TSX ETZ 510	5/4		
499 NTR 100 10	7/3	TSX FPP 20	6/2		
499 NTR 101 00	7/3	TSX MBP 100	6/2		
		TSX P57 1634M	5/5		
<b>E</b>		TSX P57 2623M	5/5		
ECC21	4/3	TSX P57 2634M	5/5		
EGX 200MG	4/2	TSX P57 2823M	5/5		
EGX 400MG	4/2	TSX P57 3623M	5/5		
		TSX P57 3634M	5/5		
<b>M</b>		TSX P57 4634M	5/5		
MPC AN0 2NAA 00A	6/4	TSX P57 4823M	5/5		
MPC AN0 2NA● 00N	6/4	TSX P57 5634M	5/5		
MPC AN0 2ND● 00N	6/4	TSX PCI 57 204M	5/6		
MPC BN0 2NAA 00B	6/4	TSX PCI 57 354M	5/6		
MPC BN0 2NAA 00C	6/4	TSX WMY 100	5/7		
MPC BN0 2NA● 00N	6/4	<i>et</i>			
MPC BN0 2ND● 00N	6/4		6/5		
MPC BN0 5ND● 00N	6/4	TWD LCAE 40DRF	5/3		
MPC CN0 2NA● 00N	6/4				
MPC CN0 2ND● 00N	6/4	<b>UNY</b>			
MPC CN0 5NA● 00N	6/4	SEW XFU CD10D	2/39		
MPC CN0 5NA● 00N	6/4	SEW XFU CD10E	2/39		
MPC CN0 5ND● 00N	6/4	SEW XFU CD10F	2/39		
MPC KT5 2NAA 00A	6/3	SEW XFU CD10S	2/39		
MPC KT5 2NAA 00N	6/3				
MPC KT5 5NAA 00A	6/3				
MPC KT5 5NAA 00B	6/3				

**Schneider Electric Industries SAS**

Headquarters

89, bd Franklin Roosevelt  
F - 92506 Rueil Malmaison Cedex

<http://www.schneider-electric.com>  
<http://www.telemecanique.com>

ART. 802731

Owing to changes in standards and equipment, the characteristics given in the text and images in this document are not binding us until they have been confirmed with us.

Production: Schneider Electric Industries  
Photos: Schneider Electric Industries  
Printed by: Pozzo Gros Monti - Italy



July 2004