


Machine truxureTM

General Machine Control

Automation solutions for industrial machines

Catalogue **2014**

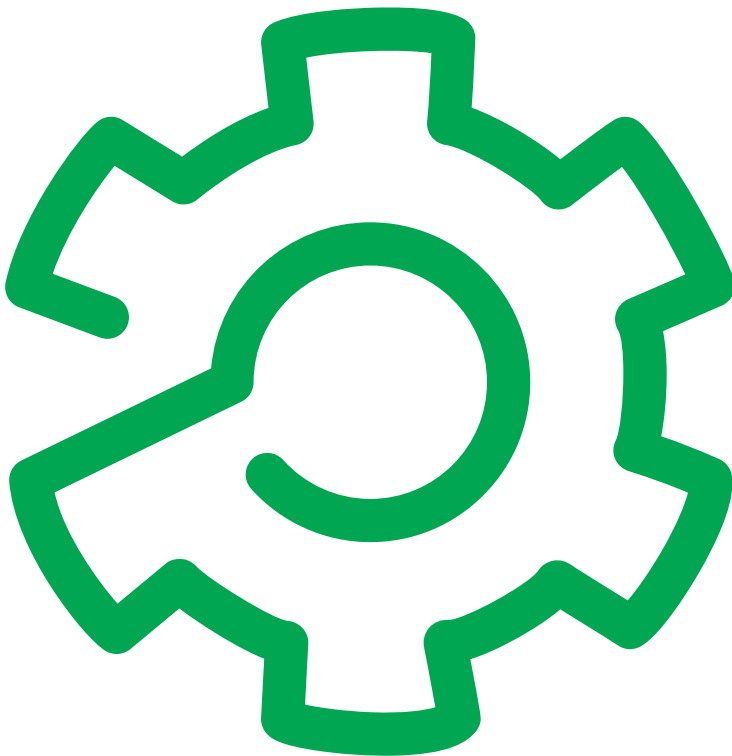

Schneider
 Electric

How can you fit a 6000-page catalog in your pocket ?


Schneider Electric provides you with the complete set of industrial automation catalogs all on a handy USB key for PC or in an application for tablets



Digi-Cat, a handy USB key for PC



- > Convenient to carry
- > Always up-to-date
- > Environmentally friendly
- > Easy-to-share format

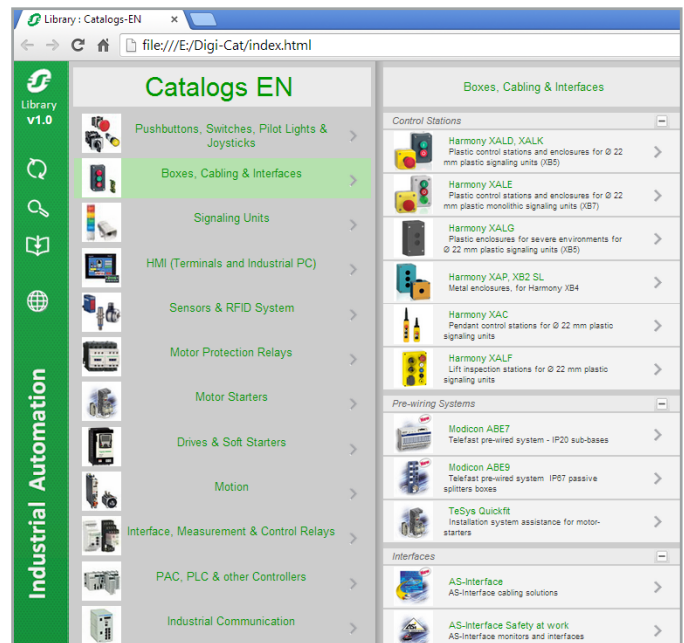

Contact your local representative to get your own Digi-Cat



e-Library, the app for tablets


If you have an iPad®:

- > Go to the App Store and search for e-Library
- > or scan the QR code



If you have an Android tablet:

- > Go to the Google Play Store™ and search for eLibrary
- > or scan the QR code

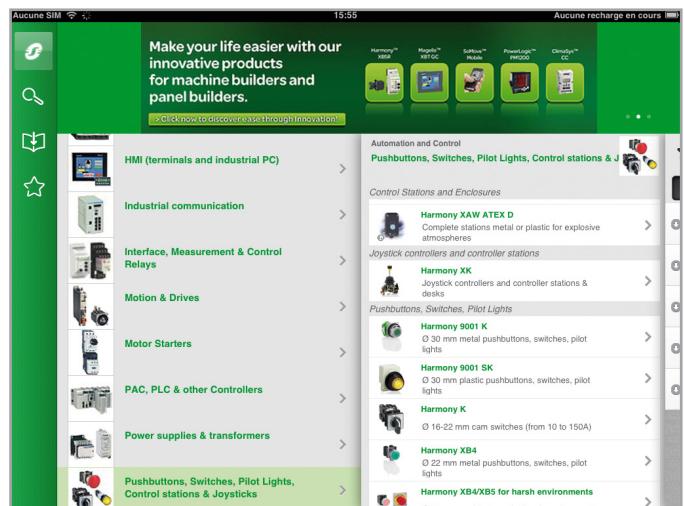

General contents

Automation solutions for industrial machines

General presentation.....	1
Hardware control platforms	2
I/O extension modules.....	3
Communication	4
SoMachine Software.....	5
Machine safety	6
General Motion control	7
Related products	8
Product reference index.....	9





Meet your challenges with MachineStruxure™

Schneider Electric is one of the world's leading machine automation solution providers, and with MachineStruxure we have designed a total solution consisting of technology, engineering support, and a wide range of services that help machine builders meet their challenges.

Reduce time-to-market

- > Building new machines quickly is the key to success. Engineering concepts should be easy to learn and require a minimum of training in order to reduce programming and configuration time. Ready-to-use-architectures, programming templates, and off-the-shelf software are the pillars of our high quality solutions.

Increase profitability

- > Machines don't just have to be innovative, they must also be cost-effective to build. To increase profitability you need products and solutions with all essential functionalities embedded so that there are no costly interfaces to add and no time-consuming extra functions to integrate.

Improve efficiency

- > Efficiency has become a key concept loaded with implications for energy efficiency, cost-efficient automation solutions, and efficient engineering. With performance that is the benchmark in the industry, you can improve your efficiency with complete automation solutions based on compatible software, controller, motion and safety technologies. Specific energy-efficiency functions are also available for measuring and monitoring electrical consumption.

Simplify integration and maintenance

- > Today, machines are integrated in production lines as well as in vertical information flow. Communication with machines and access to diagnostic data through the Internet and mobile devices has become standard. Spare parts must be fast and easy to replace for increased machine availability. Standardized interfaces and web protocols simplify the implementation of information flow.

chapter 1

General presentation

■ One partner for complete solutions	1/2
■ A single, fully embedded solution	1/3
■ Technology and services for automating the entire machine	1/4
■ The new future-proof controller range	1/6
■ Embedded safety in Modicon controllers	1/7
■ Tested, Validated, Documented Architectures (TVDAs) ..	1/7
□ Optimized automation architecture	1/8 to 1/10
□ Performance automation architecture	1/11
■ Expertise across the entire packaging process	1/12
■ Scalability - a great asset for automating material working	1/13
■ Standardized architectures for all hoists and cranes	1/14
■ Material handling - solution packages including mechatronics	1/15
■ Leader in energy - efficient solutions for HVAC & R machines	1/16
■ Pumping - standing out from the competition with unique selling propositions in pumping	1/17


General presentation

One partner for complete solutions


1

One partner for complete solutions

As a global specialist in energy management, Schneider Electric offers integrated solutions across multiple market segments, including leadership positions in Utilities & Infrastructures, Industry & Machine automation, Data Centers & Networks, and in Residential. Focused on making energy safe, reliable, efficient, productive and green, Schneider Electric delivers complete solutions for manufacturing and process industries.

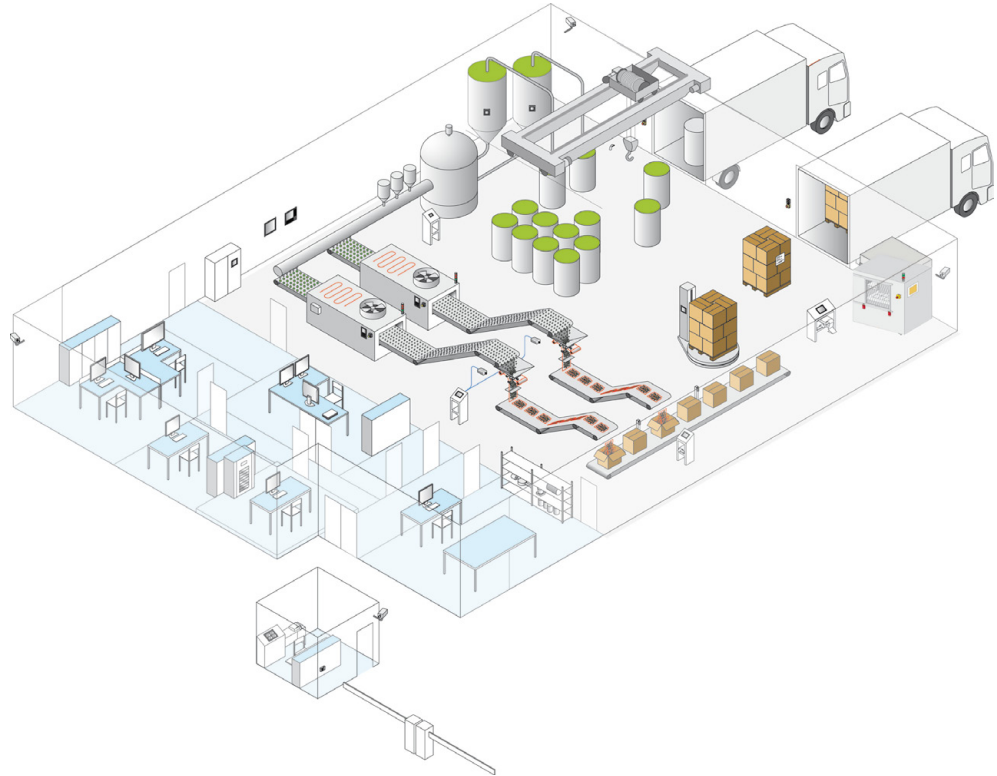

A fully embedded portfolio of solutions: PlantStruxure and MachineStruxure allow the scalable automation of processing systems, individual production machines, and entire production lines; EcoStruxure is an approach to creating an intelligent energy management system within your facility/ factory.

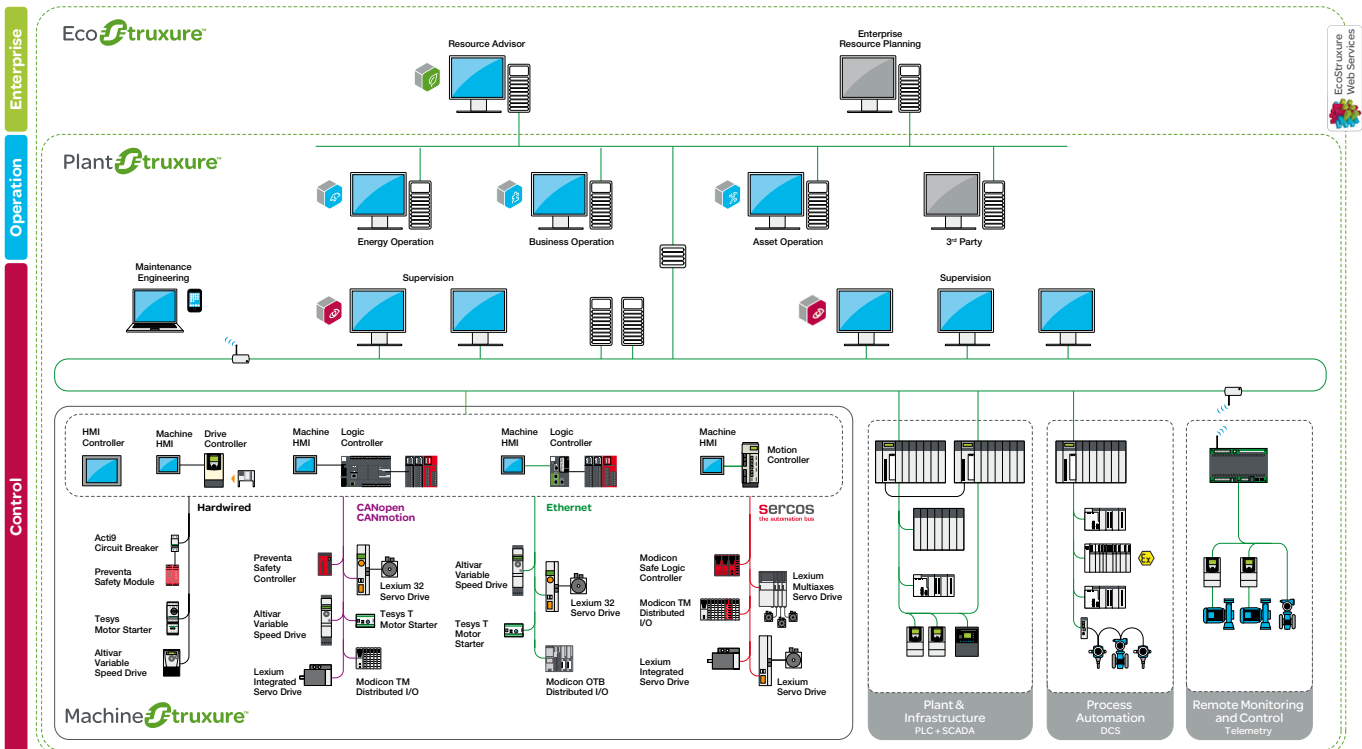

A single, fully embedded solution

- > Within MachineStruxure, Schneider Electric has included both hardware and software products as well as the full scope of its industry know-how and services covering a wide range of applications, including: packaging, hoisting, HVAC & R, pumping, material working, and material handling.
- > The guiding principle behind MachineStruxure is the flexible and scalable automation of machines, using functionally adaptable control technology embedded in a standardized, platform-neutral environment of software and components. And SoMachine is the single software environment that puts it all together, regardless of whether the machine is driven through logic, HMI, drive, motion, or safety controllers, and at any level of performance.
- > A broad portfolio of components for drives, HMI, I/O, and fieldbus interfaces, as well as a variety of electrical components, provide the framework for complete system solutions with MachineStruxure. Machine builders can use the same peripherals for designs ranging from simple machines to robot-assisted, high-performance demanding systems. Additional services constitute the framework for a partnership around the entire machines lifecycle.

The Next generation of MachineStruxure will help you design machines and systems for today and tomorrow that can **reduce time to market, improve design efficiency and simplify the integration and maintenance of your machines whilst **increasing your profitability**.**

General presentation

Technology and services for automating the entire machine

1

Technology and services for automating the entire machine

The Next generation of MachineStruxure will help you design machines and systems for today and tomorrow that can **reduce time to market**, **improve design efficiency** and **simplify the integration and maintenance** of your machines whilst **increasing your profitability**.

Flexible & scalable machine control

Automation hardware with flexible & scalable performance

- > Flexible & Scalable Machine Control is the technological core of MachineStruxure. The drive, HMI, logic, and motion controllers are suitable for a wide range of machines. They also provide specific functions for Packaging and Material Handling – with and without robotics – as well as Material Working, Hoisting, HVAC & R and Pumping applications. With safety controllers for hardwired and embedded safety network solutions, requirements according to common safety standards can be met.
- > SoMachine includes all tools for the entire life cycle of machinery automated with MachineStruxure addressing every aspect of project processes: standard and safe programming, drivetrain design, HMI, commissioning, diagnostics, and data handling. Whatever you need, SoMachine is one of the most modern and powerful tool concepts on the market.





Machine control hardware platforms

Architectures & engineering intelligence

Solution concepts for efficient engineering

- > A wide range of machine concepts can be mapped using ready to use architectures - the TVDAs (Tested, Validated and Documented Architectures). TVDAs include system user guides, CAD files, and references to available software Application Function Blocks (AFBs) to show users how they can specifically benefit from Schneider Electric's comprehensive application know-how.

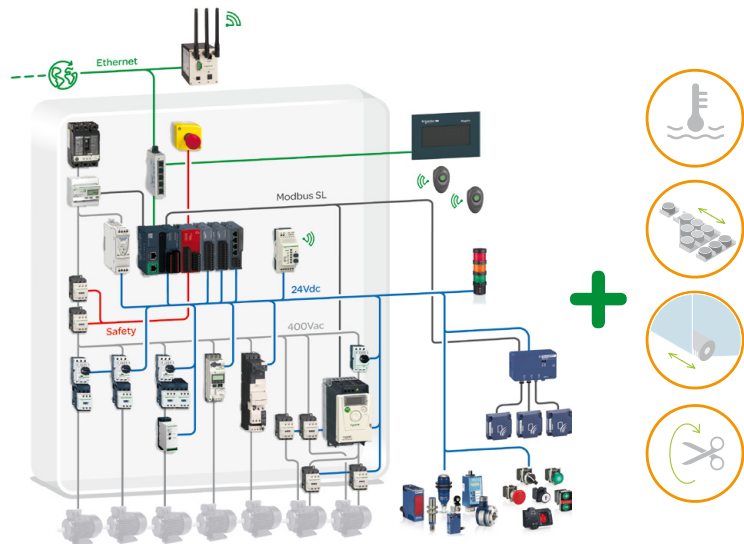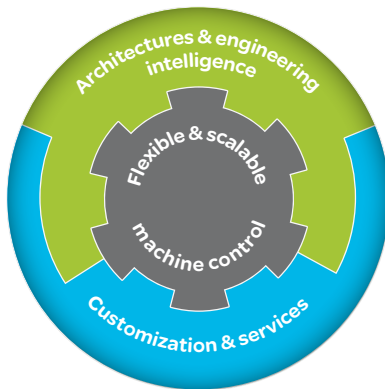

TVDA example and Application Function Blocks

- > The modular engineering approach in mechanics, electronics and software is our way to reduce design complexity. SoMachine provides a competitive edge by reducing this complexity through standardized, modular programming in globally accepted languages with templates, and proven, documented off-the-shelf application libraries. MachineStruxure has also set new standards for graphical programming and automatic code generation in the background.



3. Customization & services

Partnership throughout the entire machine lifecycle

- > Providing expertise throughout the machine lifecycle, Schneider Electric can help you grow your business and make it more profitable. We help you design your machine, speed up engineering processes, and provide you with on-site assistance.
- > In close collaboration, we can help you manage entire software engineering processes. Standard, completely pre-assembled, pre-wired, and ready-for-connection cabinets speed up the assembly process. Or, if you have special requirements, discuss customization with our Solution Service. Global standard support, 24/7 hotline services, and replacement parts centers around the world enable you to achieve greater customer satisfaction.
- > With employees in more than 100 countries, Schneider Electric serves its international customers throughout the world and meets the needs of its individual markets.

Reduce your time to market with intuitive automation

- > Tools for intuitive programming and simulation accelerate the engineering process while easy navigation and greater transparency saves you time. But intuitive automation is more: Adapting the user interface to individual user habits reduces the training required when using MachineStruxure for the first time. When working with transparent and well-arranged ready-to-use-architectures or template structures, the goal always stays clearly in sight. Make it as simple as possible, focus yourself with full attention on the task and not on the tools. MachineStruxure paves the way!

All the embedded features and functions you need to design and build machines more profitably

- > No additional interfaces, no additional effort for integration: Ethernet, communications ports, SD card and much much more is now embedded, even in simple controllers for hardwired solutions. A wide range of expansion modules or ready-to-use-solutions for energy monitoring and management allows you to create your solution with minimal effort. Thanks to open fieldbus standards and an integrated PTO interface, drive solutions can be easily implemented creating an optimal solution that saves you time and money.

Improve efficiency with flexible and scalable performance

- > Optimized, cost-effective automation: every HMI, drive, logic and motion controller delivers flexible and scalable performance. Easy upgrade to higher performance platforms through reuse of software is key to flexibility. Scalable safety performance according to IEC 61508 and EN/ISO13849 is available for hardwired architectures as well as for high-performance solutions with embedded safety networks. A wide range of drives allows you to create smart positioning systems with PTO up to multi-axes solutions with 99 fully-synchronized servo axes.

Simplify integration and maintenance - be connected everywhere!

- > Ethernet, wireless access, web servers: with MachineStruxure you are connected everywhere! Vertical availability of production and status information becomes standard, even for simple applications. The same holds true for remote control and diagnostics. Therefore, Ethernet TCP/IP and IP are now standard even on the smallest controllers. Wireless access through mobile devices and web protocols like HTTP or FTP pave the way for access to your machine from anywhere, at any time.

General presentation

The new future-proof controller range

Intuitive programming with SoMachine

1

The new future-proof controller range

The new range of **Modicon™ controllers** extends the hardware core of MachineStruxure. The Modicon M221 controller for hardwired solutions, the Modicon M241 for performance-demanding applications, and the Modicon M251 for distributed architectures provide the basis for scalable logic control performance. Ethernet, mini USB for programming, web server – they're all included and provide a high standard of connectivity without the need for additional options. The Modicon M221 and Modicon M241 have built-in I/O and PTO on the drive side. Modicon TM3 I/O systems can be added to all controllers through an embedded, extremely fast expansion bus.



- > The **Modicon M221** offers tremendous versatility. Available also in book format, the controller is designed for compact solutions and requires minimal installation effort. Connect a simple remote operator panel for instant maintenance and machine visualization.



- > The **Modicon M241** features CANopen communication and delivers a truly outstanding level of performance in its class. Multiple communication modules connected via the new **Modicon TM4** communication bus can further extend connectivity, for example Profibus slave.



- > With its integrated switch, the **Modicon M251** controller can communicate via two Ethernet lines as well as use all options for the controller range such as flexible I/O configurations. This allows you to build modular and distributed machine configurations.

Whether it is for initial installation or service, data and firmware handling is extremely easy on all controllers.

- > Standard embedded SD card slot simplifies program transfers and machine duplication.
- > Program download to unpowered controllers, even those still in their boxes, is achieved through the USB port.
- > QR codes printed on the devices simplify product identification, whether they are in the storage rack or installed in the field.

SoMachine is the universal programming software for machines automated by MachineStruxure controllers. Simple navigation that requires only a few clicks delivers a more efficient engineering process.

But who says that these programs all have to be engineered using the same program editor regardless of their complexity?

Therefore, we offer SoMachine Basic, a simplified engineering tool for the new Modicon M221. All programming, visualization, and commissioning are handled in just one intuitive tool that is available as a free download. No training required!

Intuitive programming with SoMachine




SoMachine Basic Software

General presentation

Embedded safety in Modicon controllers Tested, Validated, Documented Architectures (TVDA's)


1

Embedded safety in Modicon controllers

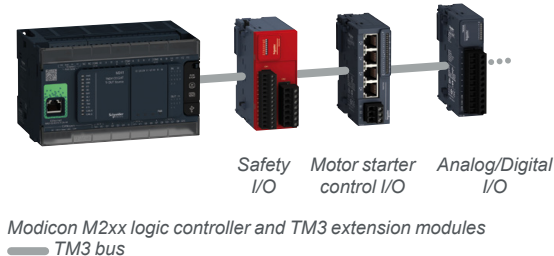


- > With the Next generation of MachineStruxure, machine safety has taken a giant step forward. The embedded safety feature is completely new and unique in its class of controllers. It is modular and based on the **Modicon TM3** expansion bus that replaces previous requirements for compact safety relays or safety controllers. Safety modules can be docked on the controller in mixed configurations with Modicon TM3 standard modules. Each module is integrated in the communication system through the expansion bus. Alternatively, you can use remote installations in the form of safety islands that you connect to the Modicon TM3 of the controller through safety buses and communication modules
- > The modularity of the new safety offer features optimum scalability of safe logic functionality allowing you to choose the precise amount of I/O needed for the application, whilst noticeably decreasing installation time. Function modules, such as the safety speed control unit with embedded advanced drive control and modules for different types of presses, provide fast, standards-compliant implementation of security functions. Program data for the modular safety controller is stored on SD cards to add the benefit of open data transfers.
- > For motion controller-based applications with PacDrives, embedded safety has long been standard. Secure and standard communication run in parallel across the sercos automation bus. In addition to existing functions, new advanced functions like Safe Torque Off (STO) and Safe Stop 1 (SS1) are now available for implementation, such as Safe Stop 2 (SS2), Safe Operating Stop (SOS), Safe Limited Speed (SLS), and monitoring Safe Direction (SDI).

Template programming - originally developed as an industry solution

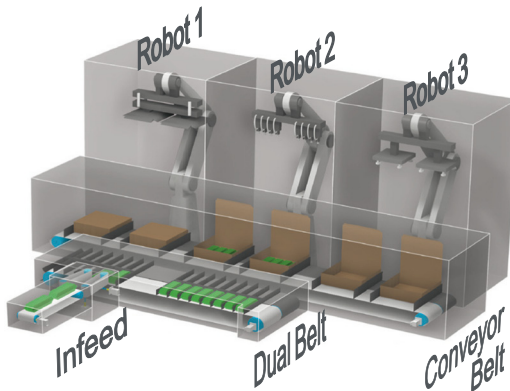

- > Complex servo applications with multiple axes or even integrated robots require software strategies to reduce complexity. Originally developed for packaging machines, the IEC 61131-compliant programming template has proven its qualities in other areas as well, including material working machines. Nevertheless, the template-based programming concept of Schneider Electric represents concentrated know-how in packaging technology.
- > With implemented OMAC-compliant operation modes, libraries with application function blocks for typical applications in the Food & Beverage industry and a Robotics Library for all current kinematics, the user receives long-standing, application know-how obtained at the highest level.

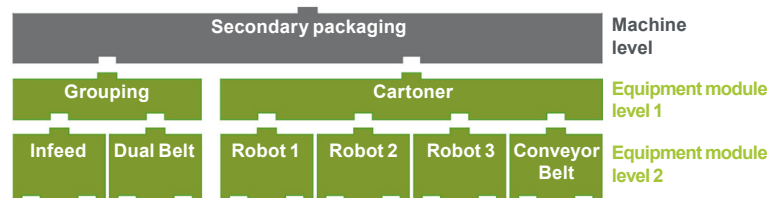


Tested, Validated, Documented Architectures (TVDA's)

Tested, Validated, Documented Architectures (TVDA's) - provide a foundation for the design of machines in many different applications. Each generic TVDA's can be adapted to a broad range of machines.

- > With hardware lists (BOM) and CAD files, they provide added value all the way from machine design and engineering on through to installation and documentation.
- > A system user guide refers to all needed steps for setup and commissioning of the automation system. In addition provides detailed support on required system adaptations.



Optimized / Performance automation architectures: see pages 1/8 to 1/11

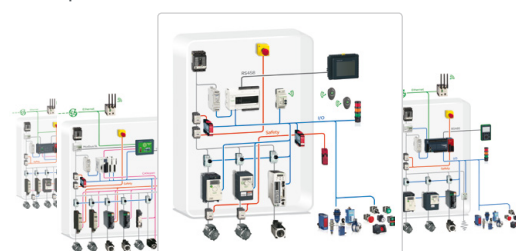

With hardware lists and CAD files such TVDA's are bridging from design / engineering to installation and documentation. A listing refers to all needed library software function blocks for realizing the machine functions.

1

Optimized automation architectures...




Powerful straight forward architecture with hardwired motion and embedded safety



... for compact and small to medium size control applications

Compact / Hardwired / logic controller **Modicon M221**

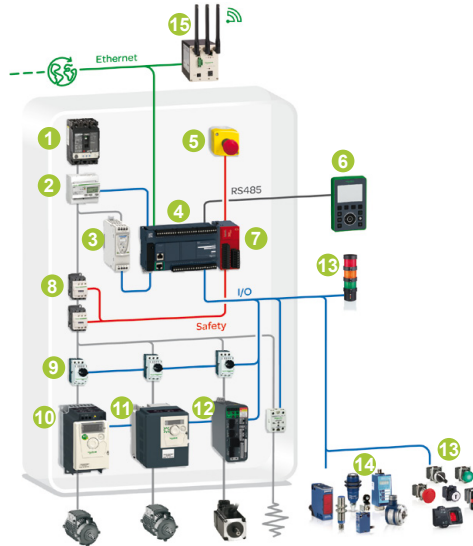


Solution breakdown

- | | |
|--|---|
| 1 Circuit breaker Compact NSX | 9 Magnetic circuit breaker TeSys GV2L |
| 2 Energy meter IEM32 | 10 Variable speed drive Altivar 12 |
| 3 Switch mode power supply Phaseo | 11 Variable speed drive Altivar 312 |
| 4 Logic controller Modicon M221 | 12 Servo Drive Lexium 28 |
| 5 Emergency stop Harmony XALK | 13 Control & Signalling units Harmony |
| 6 Graphic display TMH2GB | 14 Proximity & photoelectric sensors, limit switch, encoder OsiSense |
| 7 Safety module Modicon TM3 | 15 Wireless Ethernet access ConneXium |
| 8 Switch disconnector fuse TeSys | |



for machines demanding control systems with optimized space requirements

Compact / CANopen / HMI Controller **SCU**

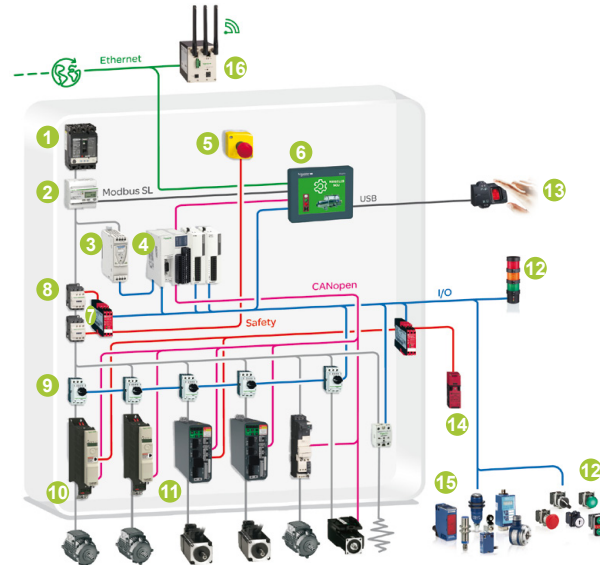

Solution breakdown

- | | |
|---|---|
| 1 Circuit breaker Compact NSX | 9 Magnetic circuit breaker TeSys GV2L |
| 2 Energy meter IEM32 | 10 Variable speed drive Altivar 32 |
| 3 Switch mode power supply Phaseo | 11 Servo Drive Lexium 28 |
| 4 Distributed IO expansion Modicon OTB , IO modules Modicon TM2 | 12 Control & Signalling units Harmony |
| 5 HMI controller Magelis SCU | 13 Biometrical switch Harmony |
| 6 Emergency stop Harmony XALK | 14 Safety switch Preventa |
| 7 Safety module Preventa XPS | 15 Proximity & photoelectric sensors, limit switch, encoder OsiSense |
| 8 Switch disconnector fuse TeSys | 16 Wireless Ethernet access ConneXium |



Extremely compact HMI controller solution providing flexibility with fieldbus application


Optimized automation architectures...



Motion optimized solution
30% less costly compared
to conventional
PLC systems

✓ ... for drive centric applications requiring flexibility

Compact / CANopen / Drive Controller **ATV IMC**

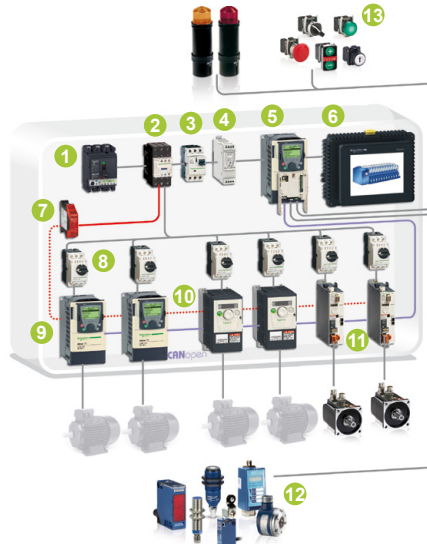


Solution breakdown

- | | | | |
|---|--|----|--|
| 1 | Circuit breaker Compact NSX | 8 | Magnetic circuit breaker TeSys GV2L |
| 2 | Contactor TeSys D | 9 | Variable speed drive Altivar 71 |
| 3 | Circuit breaker TeSys GV2L | 10 | Variable speed drive Altivar 312 |
| 4 | Switch mode power supply Phaseo | 11 | Servo Drive Lexium 28 |
| 5 | Drive controller Altivar IMC | 12 | Proximity & photoelectric sensors, limit switch, encoder OsiSense |
| 6 | HMI Magelis STU | 13 | Control & Signalling units Harmony |
| 7 | Safety module Preventa XPS | | |

✓ ... for medium to large applications requiring a scalable “all embedded” PLC design

Compact / CANopen / Logic Controller **Modicon M241**

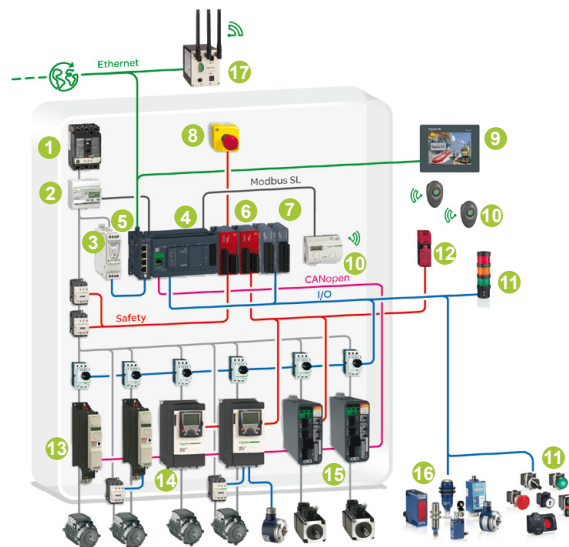

Solution breakdown

- | | | | |
|---|---|----|--|
| 1 | Circuit breaker Compomy NSX | 10 | Wireless-batteryless pushbutton & configurable access point Harmony |
| 2 | Energy meter IEM32 | 11 | Control & Signalling units Harmony |
| 3 | Switch mode power supply Phaseo | 12 | Safety switch Preventa |
| 4 | Logic controller Modicon M241 | 13 | Variable speed drive Altivar 32 |
| 5 | Ethernet switch module Modicon TM4 | 14 | Variable speed drive Altivar 71 |
| 6 | Safety module Modicon TM3 | 15 | Servo Drive Lexium 28 |
| 7 | IO expansion module Modicon TM3 | 16 | Proximity & photoelectric sensors, limit switch, encoder OsiSense |
| 8 | Emergency stop Harmony XALK | 17 | Wireless Ethernet access ConneXium |
| 9 | HMI Magelis STU | | |




Extremely compact and
powerful solution
providing embedded
safety, openness and
flexibility

Optimized automation architectures...

✓ ... for distributed automation systems requiring openness and flexibility

Distributed / Modbus TCP / Logic Controller **Modicon M251**

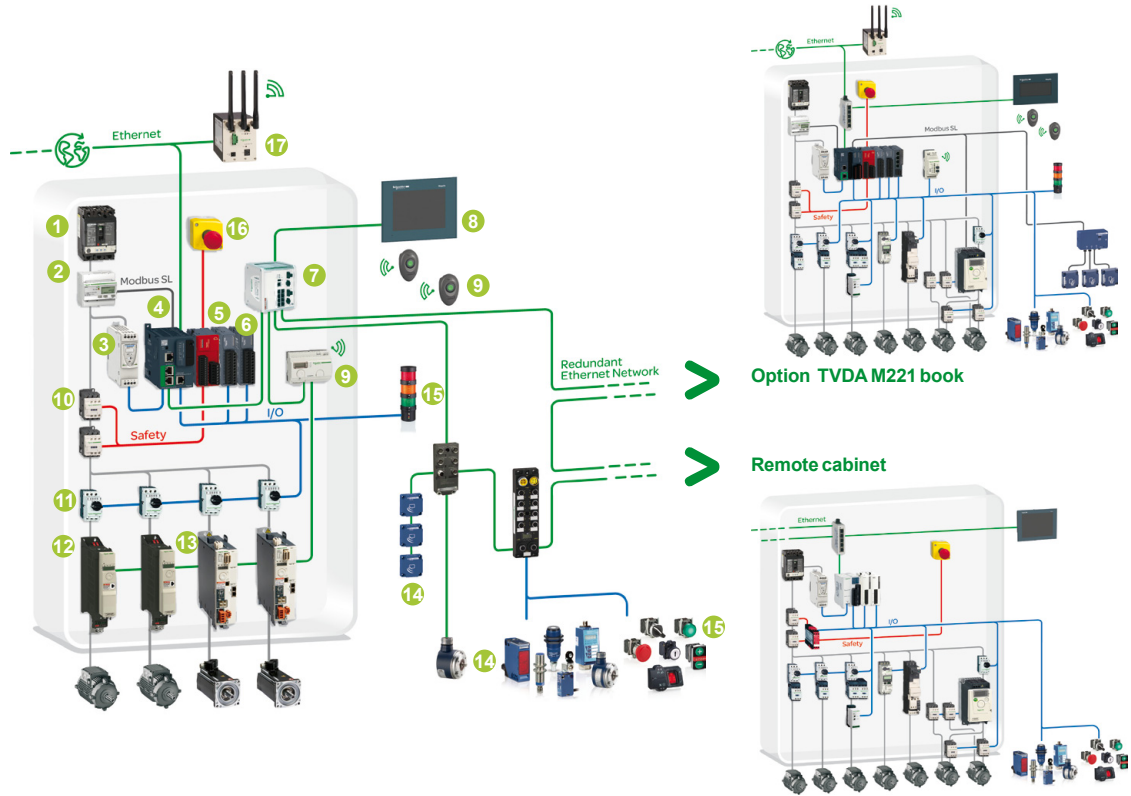


Highly flexible and powerful Ethernet solution for centralized and de-centralized control

Solution breakdown

- | | |
|--|---|
| 1 Circuit breaker Compact NSX | 10 Switch disconnector fuse TeSys |
| 2 Energy meter IEM32 | 11 Magnetic circuit breaker TeSys GV2L |
| 3 Switch mode power supply Phaseo | 12 Variable speed drive Altivar 32 |
| 4 Logic controller Modicon M251 | 13 Servo Drive Lexium 28 |
| 5 Safety module Modicon TM3 | 14 Proximity & photoelectric sensors, limit switch, encoder OsiSense |
| 6 IO expansion module Modicon TM3 | 15 Control & Signalling units Harmony |
| 7 Ethernet hub ConneXium | 16 Emergency stop Harmony XALK |
| 8 HMI Magelis HMIGTO | 17 Wireless Ethernet access ConneXium |
| 9 Wireless-batteryless pushbutton & configurable access point Harmony | |

 ... for medium to large applications requiring performance and high precision motion

1

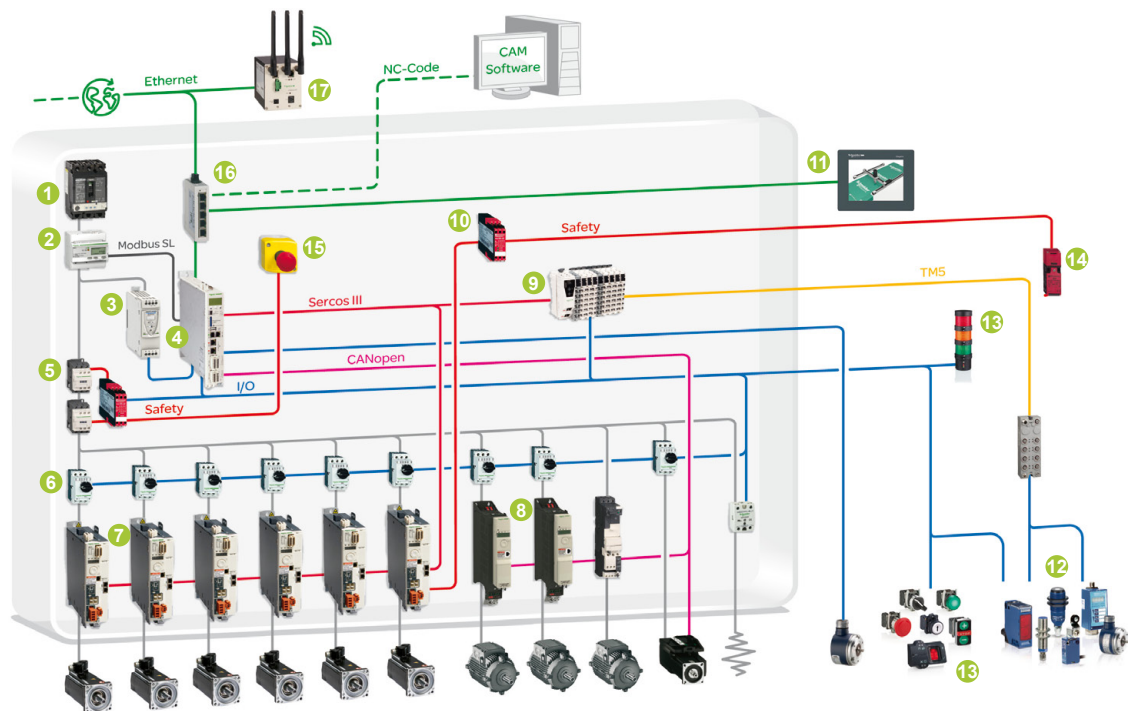

Advance control solution
combining performance
motion and field bus
capabilities

- 1 Circuit breaker **Compact NSX**
- 2 Energy meter **LEM32**
- 3 Switch mode power supply **Phaseo**
- 4 Motion controller **Modicon LMC078**
- 5 Switch disconnector fuse **TeSys**
- 6 Magnetic circuit breaker **TeSys GV2L**
- 7 Servo Drives **Lexium 32i**
- 8 Variable speed drives **Altivar 32**
- 9 sercos interface module **Modicon TM5**
- 10 Safety module **Preventa XPS**

- 11 HMI **Magelis HMIGTO**
- 12 Proximity & photoelectric sensors, limit switch, encoder **OsiSense**
- 13 Biometric push button, Control & Signalling units **Harmony**
- 14 Safety switch **Preventa**
- 15 Emergency stop **Harmony XALK**
- 16 Switch Ethernet **ConneXium**
- 17 Wireless Ethernet access **ConneXium**

1


Expertise across the entire packaging process



In packaging automation, Schneider Electric is one of the leading companies worldwide. As a pioneering member of OMAC, Schneider Electric has been active for many years in the OMAC Packaging Workgroup. Schneider Electric has also implemented the guidelines of the Weihenstephan Standard, which is becoming increasingly important for the vertical integration of data streams generated from packaging lines.

More than 100,000 machines worldwide are automated today with the prestigious Modicon controllers and PacDrive platforms. Everything is possible, from simple positioning applications up to 99 synchronous driven servo axes or integrated robots.

To save time and enhance quality, standard machine concepts can be automated with TVDAs and matching library software modules. For complex applications, the template-based software strategy was developed with advanced software function blocks. This supports the trend to modular machines with standardized, reusable machine programs due to the trend in packaging automation.

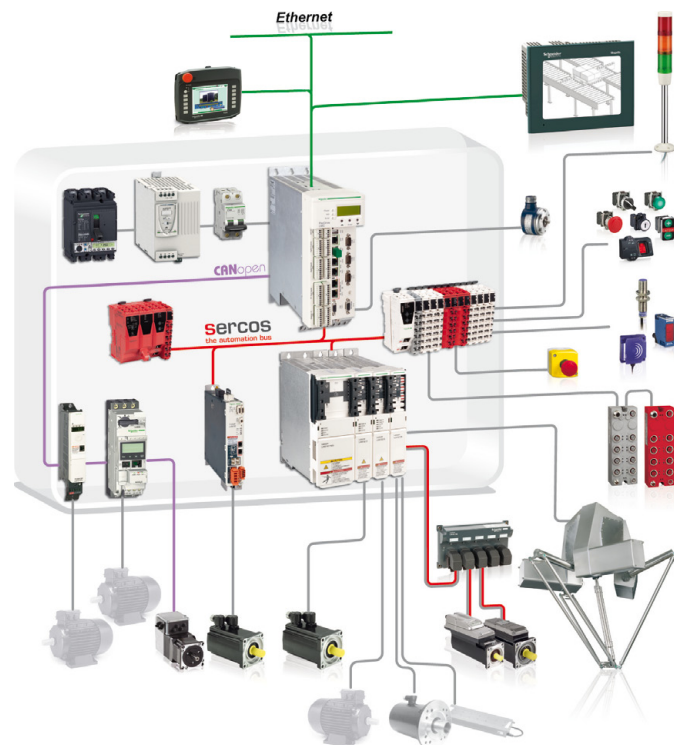

Motion control-based automation architecture for 2 to 99 synchronized servo axes and / or robotics, safety-related and standard communication run on a common automation bus. If only coordinated axes are sufficient, alternatively for many machine concepts, Logic and drive-controller-based architectures are available.



More information in our "Motion centric machine automation with PacDrive 3" catalogue

General presentation

Scalability -


a great asset for automating material working

Scalability – a great asset for automating material working



Thanks to the wide range of controller hardware included in the MachineStruxure solution, Schneider Electric has extensive experience with material working machines. Applications range from simple bending machines or presses to multi-axis material working machines. Even NC applications such as laser-welding machines or cutting plotters with up to three interpolated axes can be realized with standard Modicon motion controllers from MachineStruxure.

TVDAs significantly shorten the process from design to documentation for many types of basic applications. In addition to TVDAs, our material working library, with function blocks such as “Flying shear” or “Rotary knife” for motion control, further reduce programming effort and time to market. Complex applications like material working or assembly can be mapped using template-based, modular software structures for maximum efficiency. Lexium servo drives are suitable also for many torque and linear motors available on the market and increase the flexibility for machine design.

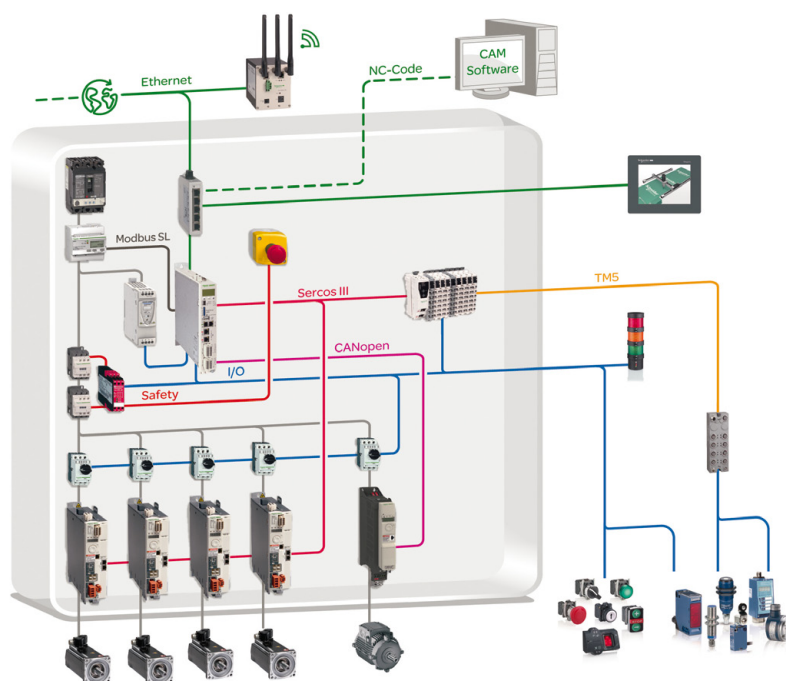

Architecture with motion controller and servo drives. Suitable for material working machines with synchronized axes or NC-machines with up to three interpolated axes. If Logic functionality is sufficient, MachineStruxure offers a variety of Modicon PLCs and motion controllers. Each application has the right balance of performance, functionality and cost efficiency!

General presentation

Standardized architectures for all hoists and cranes


1

Standardized architectures for all hoists and cranes



Whether you design industrial or construction cranes, Schneider Electric has proven solutions to enhance their productivity. And for all types TVDAs compliant to EN ISO 13849-1 and technology-specific function blocks, such as "Overload control EN 15011" or "Load over speed control" are available to reduce the time to market of your cranes while increasing their safety.

Enhanced support is delivered by our global team of experts with their unparalleled knowhow in automation and industrial machine standards. Our hoisting architectures can even help you to improve energy efficiency in your cranes while simplifying their maintenance thanks to their regenerative systems and data storage monitoring capabilities. With complete automation solutions – some even dedicated to the characteristics of local markets – and industry-specific know-how concentrated in MachineStruxure, Schneider Electric has many satisfied crane manufacturers around the world.

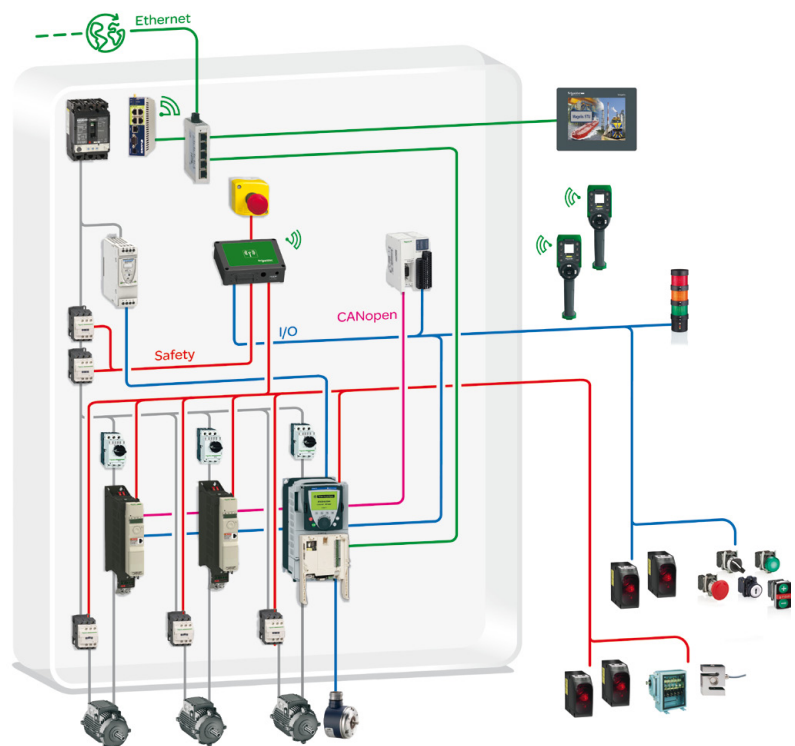

A complete ready-to-use-architecture for self-erecting cranes; related/available software functions: Data storage monitoring, wind speed control, smooth slewing, and safety solutions.

General presentation


Material handling - solution packages including mechatronics

1

Material handling - solution packages including mechatronics



In material handling, Schneider Electric has taken its solutions far beyond basic technologies. Logic, motion, and especially drive controllers, which are perfect for simple conveying requirements, form the hardware foundation of a wide range of tasks such as feeding, separation, or infeed. TVDAs and library functions simplify implantation of individual solutions. For demanding applications, elements like modular linear motion systems and Delta2 and Delta3 picker solutions are of particular interest. Portals based on linear motion can form the basis for material handling solutions, such as buffer for small load carriers or sorting systems for beverage. The picker provides maximum flexibility when operating with fast product flows. Right up to stainless steel robots in hygienic designs, Schneider Electric can offer complete solutions: hardware, software and mechatronics – and, of course services.

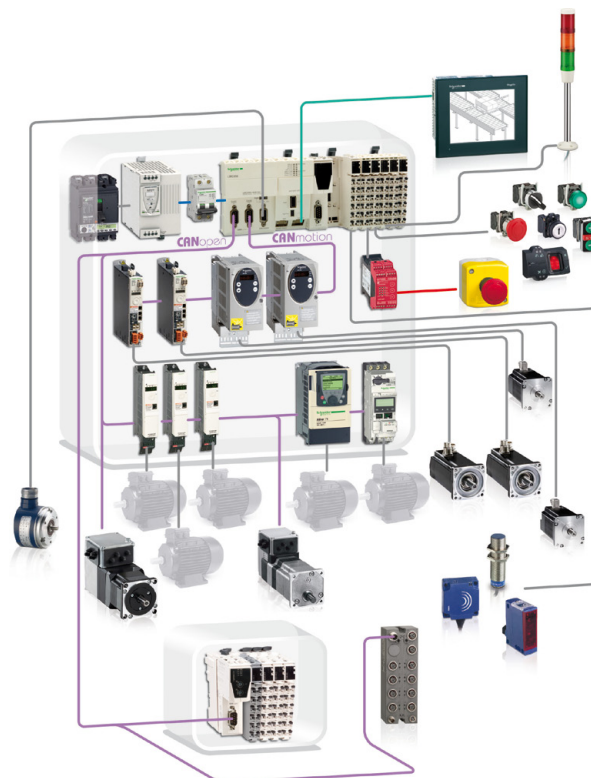

TVDA for automation solution with only a few synchronized axes, for example for linear motion portal robots.

General presentation

Leader in energy -
efficient solutions for HVAC & R machines


1

Leader in energy-efficient solutions for HVAC & R machines



There are few areas where energy efficiency plays a greater role than in HVAC & R: heating, ventilation, and air conditioning can account for over 40% of energy consumption in many buildings and facilities. From variable speed drives to power monitoring and dedicated application function blocks, MachineStruxure provides smart strategies to improve energy efficiency in small and medium air-cooled chillers, air handling units, and in solutions for large buildings or facilities.

Fieldbus interfaces like BACnet, Modbus or LonWorks and other typical communication standards for building automation solutions pave the way for integration in BMS architectures. SCADA and HMI applications enable maintenance personnel to monitor and control installations from anywhere, using just a smart phone or a tablet. With OptiM2M, a web-based machine-to-machine monitoring application, incoming machine data can be viewed remotely and analyzed at any time, from anywhere in the world.

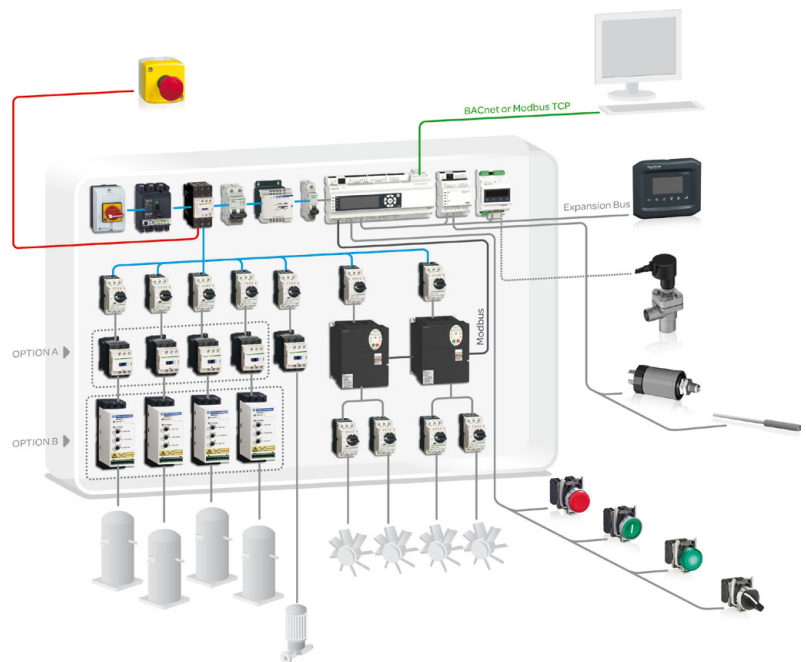

TVDA for small and medium air-cooled chillers and air-handling units. The controller, dedicated in particular for such applications, is available as a programmable logic controller with application function blocks or as a parametric logic controller with pre-loaded application programs.

General presentation


Pumping -
standing out from the competition with unique
selling propositions in pumping

Pumping: standing out from the competition with unique selling propositions in pumping



Water & Wastewater, commercial buildings, industry or irrigation: Schneider Electric is your one-stop-shopping partner for complete pumping solutions. Schneider Electric offers automation solutions based on flexible controller hardware and single software environments.

For pumping solutions, energy efficiency plays an important part. Much more important to machine builders, however, is their degree of freedom to differentiate themselves from competition through individual solutions. TVDAs and a new software library lay the foundation for a broad range of pumping solutions. In particular, state-of-the-art software libraries allow you to create energy efficient, individual pumping applications with clear unique selling propositions, and to get to market faster. In addition, an outstanding level of technical support is included in our MachineStruxure solutions.

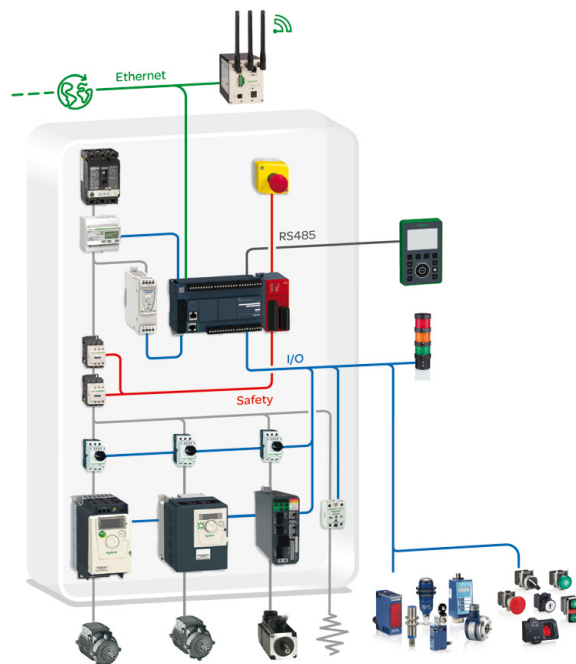

Booster multidrive architecture for typical booster solutions for fresh water supply of large buildings, e.g. hotels, office buildings, shopping malls, service areas, resorts, etc.

chapter 2

Hardware control platforms



All technical information about products listed in this chapter
are available on www.schneider-electric.com

■ Logic controllers, motion controller, drive controller and HMI controllers	
<i>General selection guide</i>	2/2
■ Logic controllers	
□ Modicon M221 and M221 Book	
General overview	2/4
<i>Selection guide</i>	2/8
Presentation	2/10
Description	2/16
References	2/18
□ Modicon M241	
<i>Selection guide</i>	2/22
Presentation	2/24
Description	2/29
References	2/30
□ Modicon M251	
<i>Selection guide</i>	2/32
Presentation	2/34
Description	2/40
References	2/41
□ Modicon M258	
<i>Selection guide</i>	2/42
Presentation	2/44
Description	2/49
References	2/50
■ Motion controllers	
□ Modicon LMC058	
<i>Selection guide</i>	2/52
Presentation	2/54
Description	2/61
References	2/62
□ Modicon LMC078	
Presentation	2/64
Description	2/67
References	2/69
■ Drive controller	
□ Altivar IMC integrated controller card for Altivar 61 and Altivar 71 variable speed drives	
Presentation	2/70
Functions	2/72
Description	2/74
References	2/75
■ HMI controllers	
<i>Selection guide</i>	2/76
Presentation	2/78
Functions	2/80
□ Magelis™ SCU Small HMI controllers	
Description	2/82
References	2/85
□ Magelis™ XBTGC HMI controllers, Magelis™ XBTGT, XBTGK Standard Advanced panels + control function	
Presentation	2/86
Functions	2/88
Description	2/90
References	2/92

Hardware control platforms
Logic controllers, motion controllers,
drive controller and HMI controllers

Applications	Control of simple machines	Control of simple motion control machines, Control loops	Control of machines for distributed architectures
--------------	----------------------------	--	---



Configuration software		SoMachine Basic	SoMachine	
Power supply		24 V  and 100/240 V 	24 V  and 100/240 V 	24 V 
Embedded inputs <i>(depending on model)</i>		☐ From 8 to 24 inputs ☐ 2 analog inputs 0-10 V	☐ 14 or 24 Digital Inputs	☐ None
Embedded outputs <i>(depending on model)</i>		☐ From 7 to 16 transistor source or relay outputs	☐ 10 or 16 transistor outputs (source or sink) ☐ 4 transistor outputs (source) + 6 relay outputs ☐ 4 transistor outputs (source) + 12 relay outputs	☐ None
I/O expansion (compatible offer)		☐ Modicon TM3 expansion modules (digital / analog / TeSys motor starter controller / functional safety I/Os) ☐ Modicon TMC2 cardridges (analog I/O, Applications)	☐ Modicon TM3 expansion modules (digital / analog / TeSys motor starter controller / functional safety I/Os) ☐ Modicon TMC4 cardridges (analog I/O, Applications)	☐ Modicon TM3 expansion modules (digital / analog / TeSys motor starter controller / functional safety I/Os)
Integrated functions		☐ Regulation (PID) ☐ 4 High speed counters (100 kHz) ☐ 2 positioning outputs: PTO (P/D with trapezoidal profile and S curve), PWM, PLS <i>(1)</i>	☐ Regulation (PID) ☐ 8 High speed counters (200 kHz) ☐ 4 positioning outputs: PTO (P/D, CW and CCW with trapezoidal profile and S curve), PWM, PLS	☐ Regulation (PID)
Embedded communication	Serial links RS232/RS485	☐ 1 or 2 RJ45 ports <i>(1)</i> ☐ 1 optional port with TMC2SL1 cartridge <i>(1)</i>	1 RJ45 port and 1 screw terminal port	1 RJ45 port
	Ethernet	1 Network with 1 RJ45 port	1 Network with 2 RJ45 ports (switch) or optional switch 4 ports module TM4ES4 <i>(1)</i>	1 Network with 2 RJ45 ports (switch)+ 1 Network with I/O scanning function <i>(1)</i>
	CANopen	–	Master <i>(1)</i>	Master <i>(1)</i>
	Other	–	Profibus DP: with optional module TM4PDPS1 (Slave)	
	USB mini-B programming port	Yes, with loading application program and firmware updating functions without the controller being powered by another source		
	Ethernet Services			
Ethernet Services	Basic services	Modbus TCP communication (client & server), Modbus TCP slave, Dynamic DHCP client Configuration, Programming, downloading, monitoring		
	Advanced services	SMS and emails (available 4 th quarter 2014)	Updated firmware, data exchange - NGVL and IEC VARACCESS, WEB server, IP Ethernet adapter network management SNMP.MIB2, FTP file transfer –	Modbus TCP I/O scanning <i>(1)</i> , dynamic DHCP Client Configuration, Fast Device Replacement (FDR)
User memory	RAM	640 KB	64 MB	64 MB
	Flash	256 KB	128 M	128 MB
	Option	SD card 256 MB	SD card 256 MB	
Data logging		–	Yes	
Processing power	Execution speed	0,2 μ s / boolean instructions	22 ns / boolean instructions	
	Program	10 K boolean instructions	128 K boolean instructions	
Other		Run/Stop switch		
Controller type		Modicon M221 and M221 Book logic controllers	Modicon M241 logic controllers	Modicon M251 logic controllers
Pages		2/8	2/22	2/32
(1) Depending on product reference				

Speed control, high speed counter and motion control for coordinated axes	Speed control, high speed counter control and motion control for synchronized axes	Motion Controller for coordinated and synchronized axes	Control by integration of automation functions on Altivar 61 and Altivar 71 variable speed drives	Data control and parameter-setting IEC 1131-2 control function
---	--	---	---	--



SoMachine				
24 V $\overline{\text{---}}$				
☐ 26 to 38 digital inputs ☐ 4 analog inputs ☐ 16 to 28 transistor outputs including 4 reflex outputs ☐ Up to 12 relay outputs	☐ 16 to 28 transistor outputs	☐ 20 Digital inputs, 4 of which are capture inputs ☐ 8 Transistor Outputs	☐ 10 digital inputs ☐ 2 analog inputs ☐ 6 transistor outputs ☐ 2 analog outputs	12 to 16 digital outputs ☐ 6 to 16 transistor outputs
☐ Modicon TM5 expansion modules (digital / analog / expert I/Os) ☐ Modicon TM7 expansion blocks (digital / analog I/Os)		☐ Modicon TM5 and Modicon TM7 CANopen interface modules ☐ Modicon TM5 Sercos III interface module and: - Modicon TM5 expansion modules (digital / analog / expert I/Os) - Modicon TM7 expansion blocks (digital / analog I/Os)	☐ Expansion card VW3A320 (digital / analog / relay / frequency control and probe I/Os)	☐ Modicon TM2 expansion modules (digital / analog I/Os) (1)
☐ Regulation (PID) ☐ 8 High speed counters (200 kHz) ☐ 4 PWM outputs ☐ Position control	☐ Regulation (PID) ☐ 8 High speed counters (200 kHz) ☐ 4 PWM outputs ☐ Position/Speed/Torque control ☐ Master encoder, G Code	☐ Position/Speed/Torque ☐ Master encoder, G Code ☐ PID libraries / PWM	☐ 2 High speed counters (100 kHz) ☐ Analog ☐ Position	☐ 4 High speed counters (100 kHz) ☐ 4 PWM outputs, PLS (1) ☐ Display, Control, Execution, ...
1 RJ45 port	1 RJ45 port	1 RJ45 port	–	1 RJ45 port or 1 SUB-D 9 pin port (1)
1 Network with 1 RJ45 port	1 Network with 1 RJ45 port	1 Network with 1 RJ45 port	1 Network with 1 RJ45 port	1 Network with 1 RJ45 port
Master (1)	Master (1)	Master/Slave	Master	Master (1)
Profibus DP: with optional module TM5PCDPS (1) (Slave)	Profibus DP: with optional module TM5PCDPS (1) (Slave) ☐ CANmotion (Master)	☐ Sercos III bus(daisy chain) ☐ Profibus DP: with optional module VW3E70400000 ☐ EtherNet / IP (Adapter): with optional module VW3E70410000	–	–
Yes	Yes	Yes	Yes	Yes
Modbus TCP communication (client & server), Modbus TCP slave, Dynamic DHCP client Configuration, Programming, downloading, monitoring	Modbus TCP communication (client & server), Modbus TCP slave, Dynamic DHCP client Configuration, Programming, downloading, monitoring	Modbus TCP communication (client & server), Modbus TCP slave, Dynamic BOOTP/DHCP client Configuration, Programming, downloading, monitoring	Ethernet Modbus TCP, UDP, TCP, SNMP	Uni-TE, Modbus, Modbus TCP/IP, Parallel printer
WEB server, FTP server	WEB server, FTP server	NGVL data exchange, FTP file transfer, SoMachine Protocol, OPC Server, NetManage	WEB server, FTP server, Dynamic DHCP client Configuration, BOOTP server	WEB server, Web gate
64 MB	64 MB	512 MB	2 MB	512 KB
128 MB	128 MB	128 KB	2 MB	16 to 32 MB
–	–	SD card	–	CF card 128 MB... 4 GB (1)
Yes	Yes	Yes	Yes	Yes
22 ns / boolean instructions		2 ns / instruction	–	–
128 K boolean instructions		–	–	–
–	–	Message log, error message and time-stamping, Sercos bus scanning	–	–
Modicon M258 logic controllers	Modicon LMC058 motion controllers	Modicon LMC078 motion controllers	ATVIMC integrated controller card	HMISCU, XBTGC, XBTGT, XBTGK HMI controllers
2/42	2/52	2/64 (Available Q2 2014)	2/70	2/76
(1) Depending on product reference				



Maximize your business and machine performance with MachineStruxure

Machine builders like you are constantly looking for new ways to design and build more innovative machines in less time and at lower cost. MachineStruxure™ can help.


The NEXT generation of MachineStruxure is a complete machine automation solution that provides flexible and scalable machine control, ready-to-use architectures, efficient engineering solutions, and comprehensive customization and engineering support services. It can help you meet your challenges for improved efficiency and greater productivity, as well as allow you to deliver higher added value to your customers throughout the entire machine life cycle.

Ready-to-use architectures and function blocks

Tested, Validated, and Documented Architectures (TVDA) are just one of the ways we help you reduce design time. Whether your machines are simple or complex, Application Function Blocks (AFBs) make system design fast and easy.

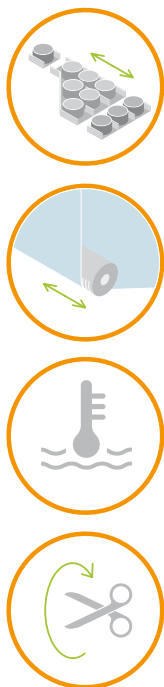

Application Function Blocks (AFB)

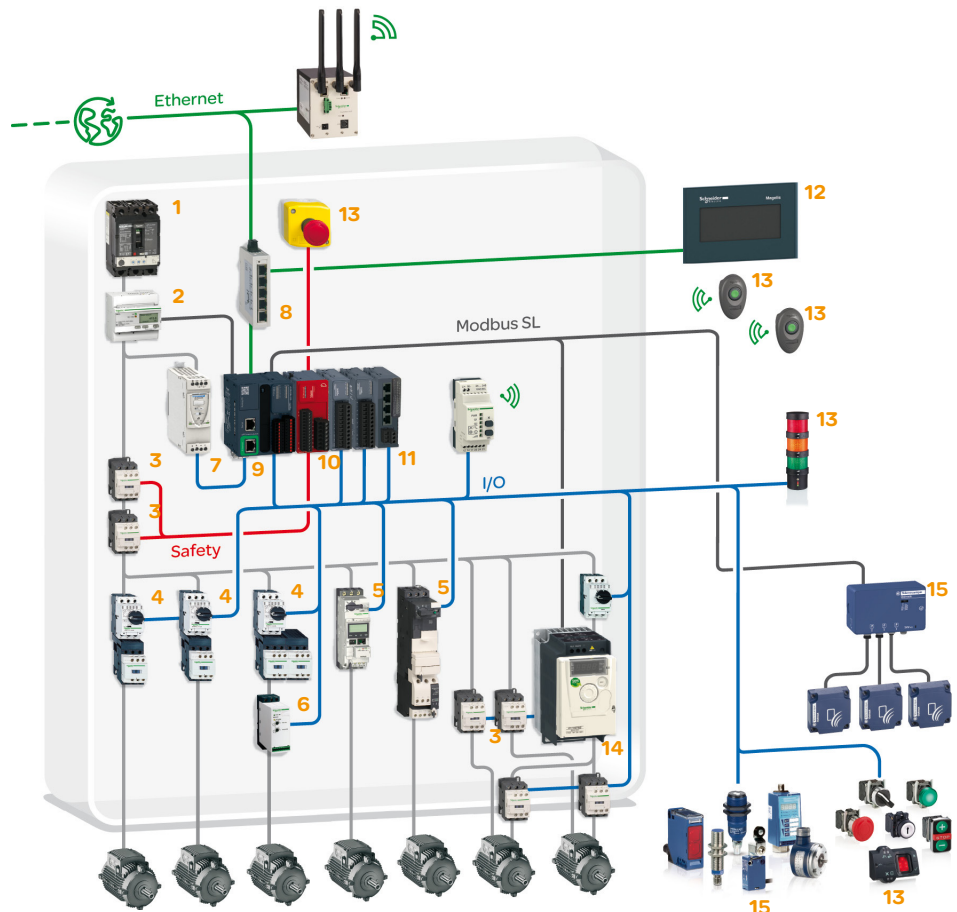

- | | |
|---|---|
| 1 POWERPACT circuit breaker | 10 Modicon TM3 safety module, Modicon |
| 2 Energy meter Acti9 iEM310 iEM310 | TM3 digital/analog I/O modules |
| 3 TeSys D contactor | 11 Modicon TM3 TeSys motor starter |
| 4 TeSys GV2P motor circuit-breaker | module |
| 5 TeSys U starter-controller | 12 Magelis display |
| 6 Multi9 circuit-breaker C60N | 13 Harmony signalling and control devices |
| 7 Phaseo power supply 24 V | 14 Altivar 312 variable speed drive |
| 8 Ethernet switch (unmanaged) | 15 OsiSense: limit switches and inductive |
| 9 Modicon M221 Book logic controller | sensors |

Fastest and smallest logic controllers on the market

Flexible and scalable machine control



With the new range of Modicon™ logic controllers, the next generation of MachineStruxure provides flexible and scalable machine control. Ethernet connectivity, USB port for programming, and an embeded web server: it's all included.



Modicon M221: the small yet powerful logic controller for hardwired solutions

Everything you need is embedded

The Modicon M221 offers best-in-class performance. Available also in book format, the Modicon M221 requires minimal installation and offers tremendous versatility.

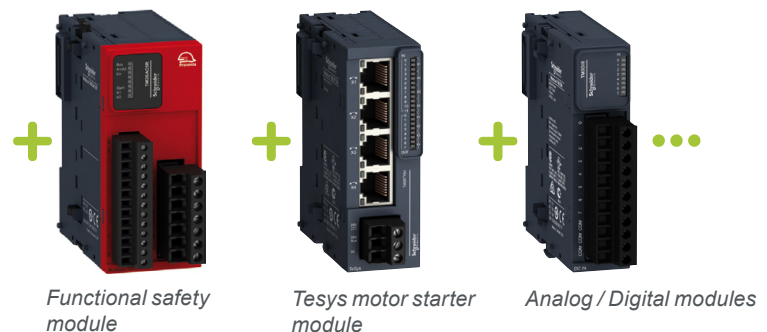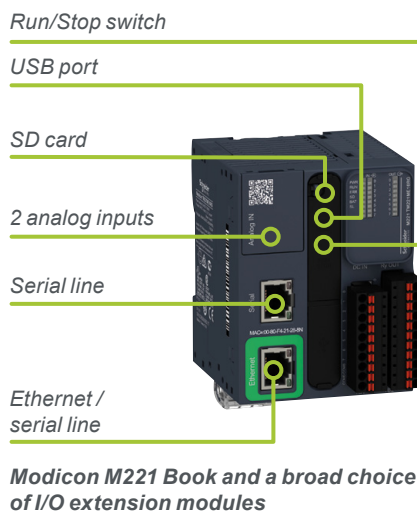

- > SD card, Run/Stop switch, USB port, 2 analog inputs, serial line, Ethernet and serial line, cartridge extension (on standard version): it's all **embedded**.
- > Thanks to its high degree of **flexibility**, it's very easy to add additional modules (safety modules, Tesys motor starter module, extensive line of analog and digital modules, ...) - and still keep everything in **just one configuration**

Modicon M221: the small yet powerful logic controller for hardwired solutions

Intuitive machine programming with SoMachine


SoMachine® is the universal programming software for machines automated by MachineStruxure controllers. Simple navigation that requires only fewer clicks delivers a more efficient engineering process.

- > In order to reduce complexity we offer SoMachine Basic, a simplified engineering tool for the new controller Modicon M221.
- > All programming, visualization, and commissioning are handled in just one intuitive tool that is available as a free download.
- > No training required


2




SoMachine simplifies every step in the design and commissioning of your machines

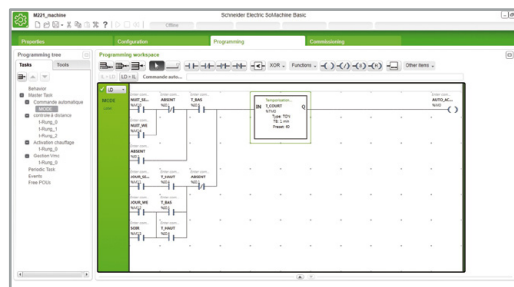

Programming

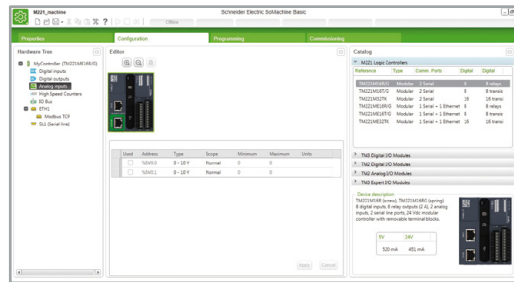

Configuration

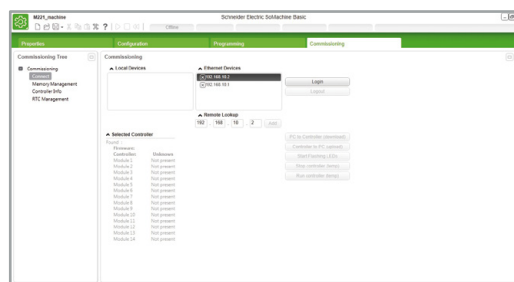

Commissioning



Connected everywhere

For simplified maintenance, commissioning, and uploads/downloads, simply use your smartphone or tablet and connect anytime, anywhere.

- > Application for mobile phone & smartphone
- > Bluetooth® communication



Customization and services

Our experts help you every step of the way, from perfecting machine design to on-site services of the finished machine. Global support, 24/7 hotline services, and replacement parts centers around the world enable you to deliver superior customer support and satisfaction.

Achieve benchmark performance
while increasing profitability



Make the most of your energySM

Hardware control platforms
Modicon M221 and M221 Book logic controllers

Applications

Supply voltage

Inputs/outputs	■ Logic inputs/outputs
	□ No. and type of inputs
	□ No. and type of outputs
	□ Connection of logic I/O
	■ Analog inputs
	□ Connection of analog inputs

I/O extension	Max. number of I/O expansion modules that can be connected/with bus expansion modules
---------------	---

Embedded communication	Ethernet link
	Serial link

Functions	Process control
	Counting
	Position control

Format	W x H x D
--------	-----------

Options	■ Cartridges
	Number of cartridge slots
	■ Display unit

Mounting

Software programming

Logic controller type	Controllers without Ethernet port
	Controllers with embedded Ethernet port

Pages

Control of simple machines



100-240 V ~ 24 V ---		100-240 V ~ 24 V ---		100-240 V ~ 24 V ---	
16 logic I/O		24 logic I/O		40 logic I/O	
9 sink/source 24 V --- inputs, inc. 4 high-speed inputs	9 sink/source 24 V --- inputs, inc. 4 high-speed inputs	14 sink/source 24 V --- inputs, inc. 4 high-speed inputs	14 sink/source 24 V --- inputs, inc. 4 high-speed inputs	24 sink/source 24 V --- inputs, inc. 4 high-speed inputs	24 sink/source 24 V --- inputs, inc. 4 high-speed inputs
7 relay outputs	7 source transistor outputs, inc. 2 high-speed outputs	10 relay outputs	10 source transistor outputs, inc. 2 high-speed outputs	16 relay outputs	16 source transistor outputs, inc. 2 high-speed outputs
With removable screw terminal block					
2 x 0...10 V analog inputs					
On dedicated removable terminal block					
□ 7 Modicon TM3 expansion modules, along with limited number of outputs (see page 3/24) □ 14 Modicon TM3 expansion modules with the use of bus expansion modules (transmitter and receiver), along with limited number of outputs (see page 3/24) □ Possible use of Modicon TM2 expansion modules with restrictions.					

1 Ethernet port on TM221CE●●● controllers: □ Modbus TCP communication (client & server), Modbus TCP slave, Dynamic DHCP client Configuration, Programming, downloading, monitoring □ SMS and emails (▲)
1 serial link port (RJ 45 connector) RS232/485 with + 5 V supply

PID
Up to 4 high-speed counter inputs (HSC), 100 kHz frequency
□ On TM221C●●T and TM221CE●●T controllers only: - pulse width modulation (PWM) - pulse generator (PLS) - 2 P/D pulse train outputs (PTO) with trapezoidal profile and S curve (▲), 100 kHz frequency

3 controller sizes:		
95 x 90 x 70 mm 3.74 x 3.54 x 2.75 in.	110 x 90 x 70 mm 4.33 x 3.54 x 2.75 in.	163 x 90 x 70 mm 6.41 x 3.54 x 2.75 in.
☐ 3 analog I/O expansion cartridges		
☐ 1 additional serial link communication cartridge		
☐ 3 application cartridges		
- for control of hoisting applications		
- for control of packaging applications		
- for control of conveying applications		
1	1	2
Graphic display and monitoring unit (▲)		
Mounting on □ symmetrical rail or panel with specific mounting kit TMAM2		

With SoMachine Basic software (see page 5/6)

Modicon M221					
TM221C16R	TM221C16T	TM221C24R	TM221C24T	TM221C40R	TM221C40T
TM221CE16R	TM221CE16T	TM221CE24R	TM221CE24T	TM221CE40R	TM221CE40T

2/18
▲ Available: 4th quarter 2014.

Control of simple machines



24 V ---	24 V ---	24 V ---
16 logic I/O	16 logic I/O	32 logic I/O
8 sink/source 24 V --- inputs, inc. 4 high-speed inputs	8 sink/source 24 V --- inputs, inc. 4 high-speed inputs	16 sink/source 24 V --- inputs, inc. 4 high-speed inputs
8 relay outputs	8 source transistor outputs, inc. 2 high-speed outputs	16 source transistor outputs, inc. 2 high-speed outputs
With removable screw terminal block or spring terminal block (1)		To HE 10 connector (with the Modicon Telefast ABE7 pre-wired system: connection cables and sub-bases)
2 x 0...10 V analog inputs		
On dedicated removable terminal block		
□ 7 Modicon TM3 expansion modules, along with limited number of outputs (see page 3/24) □ 14 Modicon TM3 expansion modules with the use of bus expansion modules (transmitter and receiver), along with limited number of outputs (see page 3/24) □ Possible use of Modicon TM2 expansion modules with restrictions.		

1 Ethernet port on TM221ME●●● controllers: □ Modbus TCP (client & server), Modbus TCP slave, dynamic DHCP client Configuration, Programming, downloading, monitoring □ SMS and emails (▲)
1 serial link port (RJ 45 connector) RS232/485 with + 5 V supply 1 additional serial link port on TM221M●●● controllers (RJ 45 connector) RS485

PID
Up to 4 high-speed counter inputs (HSC), 100 kHz frequency
□ On TM221M16T/TG, TM221ME16T/TG, TM221M32TK and TM221ME32TK controllers only: - pulse width modulation (PWM) - pulse generator (PLS) - 2 P/D pulse train outputs (PTO) with trapezoidal profile and S curve (▲), 100 kHz frequency

1 size only: 70 x 90 x 70 mm 2.75 x 3.543 x 2.75 in.
—
—
Graphic display and monitoring unit (▲)
Mounting on ┘ symmetrical rail or panel with specific mounting kit TMAM2

With SoMachine Basic software (see page 5/6)

Modicon M221 Book		
TM221M16R	TM221M16T	TM221M32TK
TM221M16RG (1)	TM221M16TG (1)	
TM221ME16R	TM221ME16T	TM221ME32TK
TM221ME16RG (1)	TM221ME16TG (1)	

2/19
(1) Spring terminal block on references ending in the letter G.
▲ Available: 4th quarter 2014.



More technical information on www.schneider-electric.com



More technical information on www.schneider-electric.com

Compatibility of offers

Modicon M221 and M221 Book logic controllers

- > Modicon TM3 expansion modules
- > Modicon TM2 expansion modules
- > SoMachine Basic software



Modicon M221 logic controllers (standart format)
16 I/O channels 24 I/O channels



40 I/O channels



Modicon M221 Book logic controllers
16 I/O channels 32 I/O channels

Presentation

Applications

Designed for simple machines, the particularly small dimensions of Modicon **M221** and **M221 Book** logic controllers are ideal for optimizing the size of wall-mounted and floor standing control system enclosures.

- The controllers are available in 2 formats:
 - Modicon **M221** (TM221C●●●● references), give excellent connection capacity and customization options using I/O, communication or application cartridges without increasing the controller size.
 - Modicon **M221 Book** (TM221M●●● references), combine very small dimensions with a wide choice of connections.
- M221 and M221 Book controllers have an embedded Ethernet port meaning they can easily be integrated in control system architectures, for remote control and maintenance of machines by means of applications for smartphones, tablets and PCs.
- The wealth of functions embedded in M221 and M221 Book controllers minimizes the cost of the machine:
 - Functions embedded in the controller: Modbus serial link, USB port dedicated to programming and simple position control functions (high-speed counters and pulse train outputs with trapezoidal profile and S curve).
 - Functions embedded in the Modicon TM3 expansion: functional safety modules, motor-starter control module, dedicated display unit and remote expansion system.
- SoMachine Basic's programming software is intuitive, making it quick to create applications, and also has embedded configuration of the display unit and extensions, including the Functional Safety modules. This software environment makes it easy to retrieve Twido range applications, maximizing use of the investment already made. Applications can thus easily be ported to any of the Modicon logic controllers: M241, M251 and M258.

Key features

Modicon TM221C●●●	Modicon TM221M●●●
w x h x d	
□ 16 I/O: 95 x 90 x 70 mm (3.74 x 3.54 x 2.75 in.)	□ 16 I/O: 70 x 90 x 70mm (2.75 x 3.54 x 2.75 in.)
□ 24 I/O: 110 x 90 x 70 mm (4.33 x 3.54 x 2.75 in.)	□ 32 I/O: 70 x 90 x 70 mm (2.75 x 3.54 x 2.75 in.)
□ 40 I/O: 163 x 90 x 70 mm (6.41 x 3.54 x 2.75 in.)	
Supply voltage	
24V $\overline{\text{---}}$ or 100..240 V $\sim$ 50/60 Hz	24 V $\overline{\text{---}}$
Connection of the embedded I/O	
On removable screw terminal blocks at intervals of 5.08 mm ; 24V/0,25A supply provided by the controller to the sensor inputs on TM221C●●●R models	16 I/O: on removable spring or screw terminal blocks at intervals of 3.81 mm (0.15 in.) 32 I/O: on HE10 connectors with HE 10 cables/bare wires or Telefast ABE7 connection sub-bases (1)
Analog inputs	
2 embedded inputs on each TM221M●●● and TM221C●●● controller	
2 to 4 optional analog inputs with TMC2●●● cartridges	—
Embedded Ethernet communication	
Yes on TM221CE●●	Yes on TM221ME●●
Serial link	
1 embedded	1 to 2 embedded
1 optional serial link with TMC2SL1 communication cartridge	—
Cartridges	
One slot for 1 or 2 cartridges depending on the model of controller: analog I/O cartridge, communication cartridge or application cartridges (hoisting, conveying and packaging)	—
Hardware characteristics	
M221 and M221 Book controllers each have an embedded:	
□ Run/Stop switch □ slot for SD memory card □ QR code for direct access to its technical documentation	


(1) Telefast Modicon ABE7 pre-wired system: to be ordered separately, see page 2/19.



QRcode example :
QRcode for access to the technical data sheet for TM221M16R logic controller



SoMachine Basic software

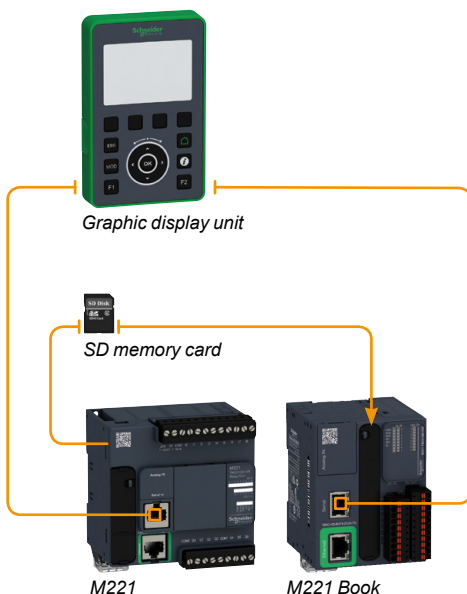

Presentation

Embedded communication

M221 and M221 Book logic controllers have 3 types of integrated communication port:

- ☐ Ethernet
- ☐ RS 232/RS 485 serial link
- ☐ programming port

These communication ports are described on page 2/14.

Embedded functions

Each Modicon M221 and Book logic controller has the following integrated functions:

- ☐ Analog (PID control)
- ☐ Counting: up to 4 high-speed counters (HSC), 100 kHz frequency

TM221C●●T, TM221CE●●T, TM221M16T●, TM221ME16T●, TM221M32TK and TM221ME32TK controllers integrate the position control function with:

- ☐ Pulse width modulation (PWM)
- ☐ Pulse generator (PLS)
- ☐ 2 P/D pulse train outputs (PTO) with trapezoidal profile and S curve, 100 kHz frequency (▲)

Processing power

- ☐ Execution speed: 0.2 μs/boolean instruction
- ☐ Program: 10 K boolean instructions
- ☐ Number of words: 8000
- ☐ Number of internal bits: 512

Programming

M221 and M221 Book logic controllers are programmed with the SoMachine Basic software. **See page 5/6.**

SoMachine Basic is an integral component of the SoMachine software.

SoMachine Basic is available on DVD and also as a free download from site www.schneider-electric.com.

Options for Modicon M221 and M221 Book controllers

Graphic display unit ▲

The **TMH2GDB** display unit is a compact display unit dedicated to M221 and M221 Book logic controllers offering diagnostic, maintenance and runtime functions.

- ☐ The display unit can be connected to the SL1 serial link of M221 and M221 Book controllers. This port also provides the power needed by the display unit.
- ☐ A single hole with diameter 22 mm (0.866 in.) allows it to be mounted on the front of the enclosure.
- ☐ The display application is resident in the controller, it is not necessary to load the program in the **TMH2GDB**.

Memory card

The **TMASD1** SD memory card, with 256 MB capacity, is available for:

- ☐ backup and transfer application
- ☐ firmware loading
- ☐ duplication of application between controllers


▲ Availability of functions with trapezoidal profile and S curve: 4th quarter 2014.

▲ Available: 4th quarter 2014.

Hardware control platforms

Modicon M221 and M221 Book logic controllers
Options for Modicon M221 and M221 Book logic controllers

2

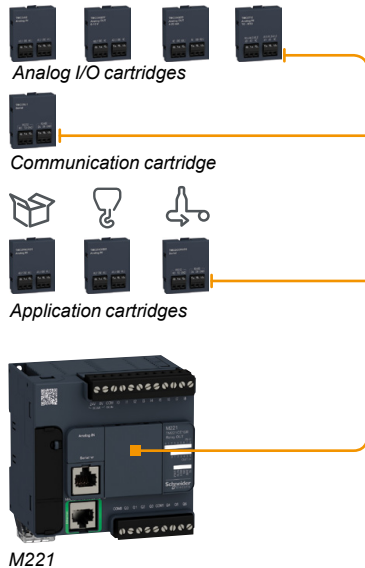

Option for Modicon TM221C●●● controllers

Cartridges for M221 controller

One or two cartridges can be inserted on the front of TM221C●●● controllers without increasing the dimensions.

3 types of cartridge are offered:

- Analog I/O cartridges
 - **TMC2AI2** for 2 analog inputs which can be configured as voltage or current
 - **TMC2AQ2V** for 2 voltage analog outputs
 - **TMC2AQ2C** for 2 current analog outputs
 - **TMC2TI2** for 2 temperature inputs
- Communication cartridge
 - **TMC2SL1** cartridge providing additional serial link port terminals for connection of a printer, barcode reader, etc.
- Application cartridges
 - **TMC2HOIS01** for hoisting applications has two dedicated analog inputs for controlling a load cell.
 - **TMC2PACK01** for packaging applications has two dedicated analog inputs for controlling the temperature on a packaging machine.
 - **TMC2CONV01** for conveyor system applications has a serial link.

Using an application cartridge provides direct access to application examples via the SoMachineBasic software.



Communication option for Bluetooth® wireless connection

The Bluetooth® wireless connection enables complete freedom of movement within a radius of 10 m (32.808 ft.) around the controller.

For its M221 and M221 Book controllers Schneider Electric offers the

TCSWAAC13FB Bluetooth® adapter to perform the following functions:

- commissioning
- monitoring
- downloading

Hardware control platforms

Modicon M221 and M221 Book logic controllers
I/O extensions with Modicon TM3 expansion modules

I/O extensions with Modicon TM3 expansion modules


Modicon TM3 expansion modules (see page 3/20)

The capacity of M221 and M221 Book logic controllers can be enhanced with the Modicon TM3 expansion module offer:

- Digital I/O modules which can be used to create configurations with up to 264 digital I/O. These modules are available with the same connections as the controllers.
- Analog I/O modules which can be used to create configurations with up to 114 analog I/O and are designed to receive, amongst other things, position, temperature, and speed sensor signals. They are also capable of controlling variable speed drives or any other device equipped with a current or voltage input.
- Expert module for control of TeSys motor-starters, connected with RJ 45 cables to simplify wiring up the control section.
- Functional Safety modules that simplify wiring and can be configured in the SoMachine Basic software.

In addition, the TM3 expansion system is flexible due to the possibility of remotely locating some of the TM3 modules in the enclosure or another cabinet, up to 5 meters (16.404 ft.) away, using a bus expansion system.

The Modicon TM3 expansion system is common to the whole range of Modicon M221, M241 and M251 logic controllers, meaning that the model of controller can be revised without changing expansion module.

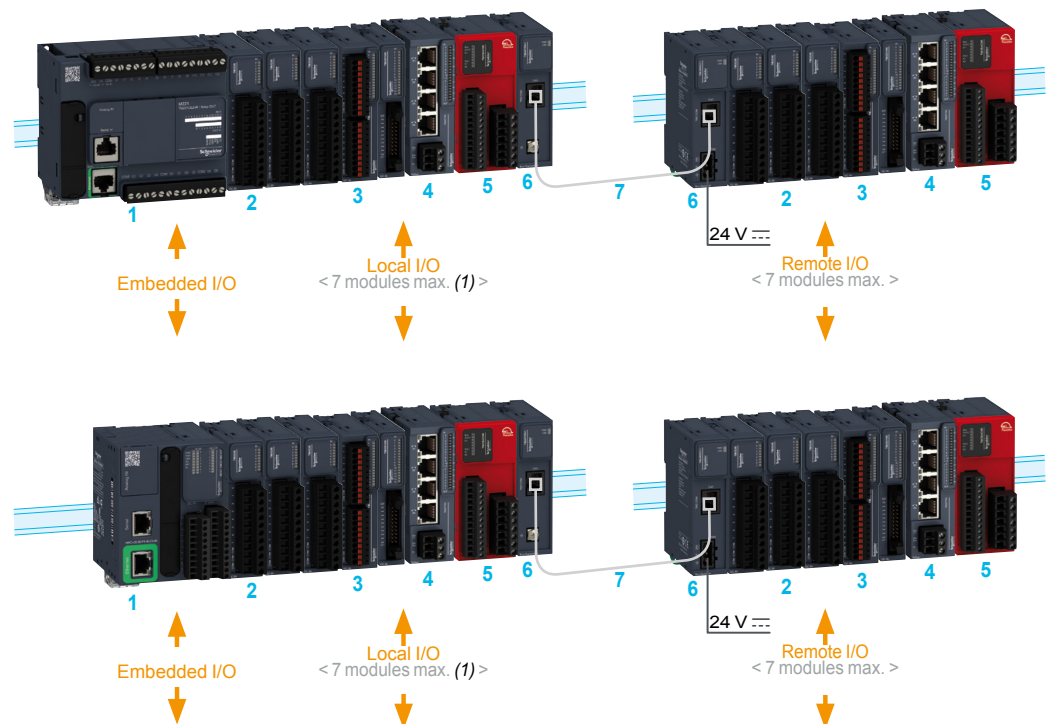

- 1 Modicon M221/M221 Book logic controller
- 2 Modicon TM3 digital I/O modules
- 3 Modicon TM3 analog I/O modules (2)
- 4 Modicon TM3 expert module: control of TeSys motor-starters
- 5 Modicon TM3 functional safety modules
- 6 Modicon TM3 bus expansion module (transmitter and receiver)
- 7 TM3 bus expansion cable

(1) Depending on type of TM3 module used (see page 3/24).

(2) Compatibility of expansion module offers: the majority of Modicon TM2 expansion modules can be used with M221 and M221 Book logic controllers. However, adding a Modicon TM2 expansion module in a configuration can increase expansion module execution times by a few milliseconds.

Hardware control platforms

Modicon M221 and M221 Book logic controllers

Control architecture


2

Control architecture for standalone machines


Typical applications: repetitive machines

- Packaging: recycling machines.
- Textile-clothing machines.
- Commercial equipment: automatic wash units, advertising hoardings, etc.
- Construction/service sector: access and entry control for automated systems.
- Other sectors: woodworking, agriculture, fish farming, incubators, swimming pools, etc.

■ M221 (TM221C●●●●) controllers

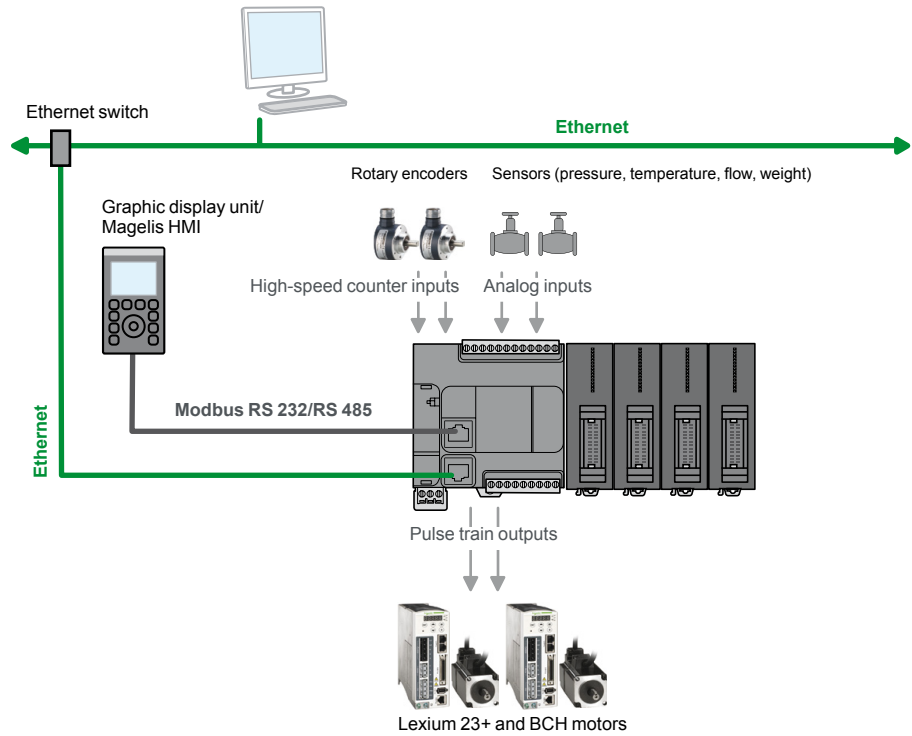

■ M221 Book (TM221M●●●) controllers

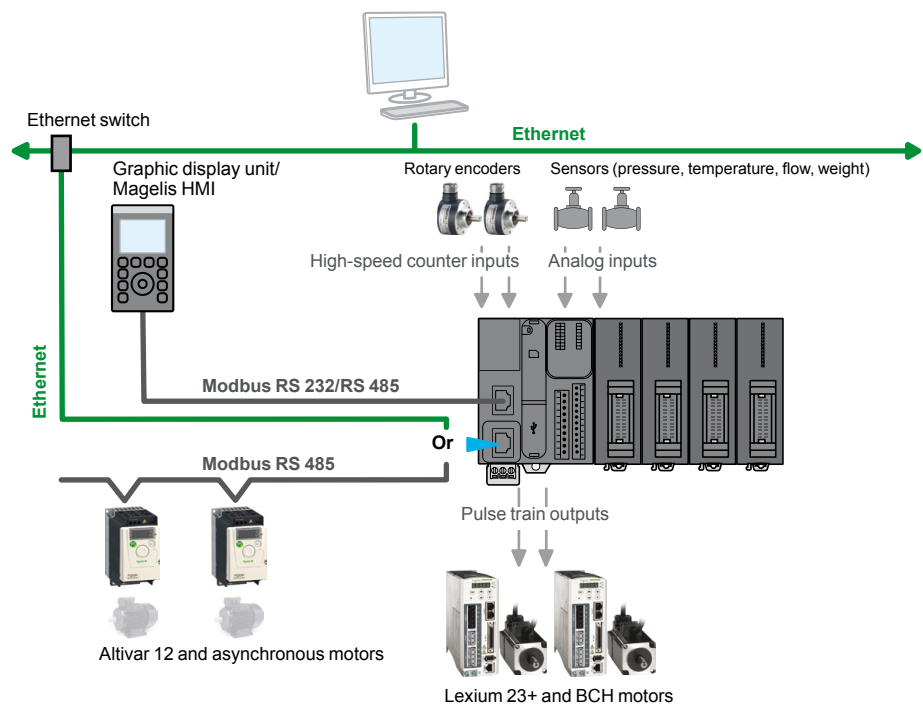

Embedded communication

Communication on Ethernet network

TM221CE●●● and TM221ME●●● controllers have an embedded RJ 45 Ethernet port (10/100 Mbps, MDI/MDIX) with Modbus TCP (Client/Server), Ethernet IP (adapter), UDP, TCP, SMS (▲) and email (▲) protocols.

- As well as the default address based on the MAC address, a controller IP address can be assigned via a DHCP server or via a BOOTP server.
- The Ethernet port also offers the uploading, updating and debugging functions of the application when the controller is supplied with power.
- The integrity of applications is maintained by cybersecurity functions.
- A firewall allows to lock each communication protocol.

Connection cables and accessories for Ethernet network (see page 4/46).

Serial links

- Each TM221C●●● controller has an embedded serial link that can be configured as RS 232 or RS 485. A 5 V/200 mA power supply is available on the RJ 45 connector, for using the **TMH2GDB** display unit, a Magelis **XBTN** or **XBTRT** HM, the Bluetooth® **TCSWAAC13FB** communication adapter.
- Each TM221M●●● (Book) controller has one or two embedded serial links.
- The SL1 serial link, found on each M221 Book controller, can be configured as RS 232 or RS 485. In addition, a 5 V/200 mA power supply is available on the RJ 45 connector which then supplies the **TMH2GDB** display unit, a Magelis **XBTN** or **XBTRT** HMI, the Bluetooth® **TCSWAAC13FB** communication adapter or other devices.
- The SL2 serial link, found on TM221M●●● controllers only, is configured as RS 485.

Serial links also provide the functionality for loading, updating and development when the controller is powered.

Embedded in both links the two main protocols used in the market

- Modbus ASCII/RTU Master or Slave
- Character string (ASCII)

Connection cables and accessories for serial link (see page 4/4).

Software programming with power off charging function

The programming port, equipped with a USB mini-B connector, is embedded in each M221 and M221 Book controller; it is dedicated to communication with a PC equipped with SoMachine Basic for programming, debugging, and maintenance. In addition, it offers the ability to upload an application program or update the firmware without the controller being powered by another source.

Characteristics of M221 and M221 Book logic controllers

Conformity

■ Certifications

- CE, cULus Listing Mark, C-Tick, EAC, LR, ABS, DNV and GL (1)

■ Standards

- IEC/EN 61131-2 (Edition 2 2007), UL 508 (UL 61010-2-201), ANSI/ISA 12.12.01-2007, CSA C22.2 No. 213, No. 142, E61131-2 and I ACS E10

Environment characteristics

- Ambient operating temperature: - 10...+ 55 °C (14...+ 131 °F).
- Storage temperature: - 25...+ 70°C (- 13...+ 158°F)
- Relative humidity: 10...95 % (non-condensing)
- Operating altitude: 0...2,000 m (0...6,561 ft)
- Storage altitude: 0...3,000 m (0...9,842 ft)
- Immunity to mechanical stress (vibrations):
 - For 1131: 5...8.4 Hz (amplitude 3.5 mm/0.138 in.); 8.4...150 Hz (acceleration 1 g)
 - For merchant marine: 5...13.2 Hz (amplitude 1.0 mm/0.039 in.); 13.2...100 Hz (acceleration 0.7 g)


Supply characteristics

Two power supply types are available depending on M221 controller model: 24 V --- or 100-240 V ~


- Voltage limit (ripple included): 19.2...28.8 V ---/85...264 V ~
- Immunity to micro-cuts (class PS-2): 10 ms
- Max. consumption: 17.2 W

(1) LR, ABS, DNV and GL marine certifications: pending.


▲ Available: 4th quarter 2014.

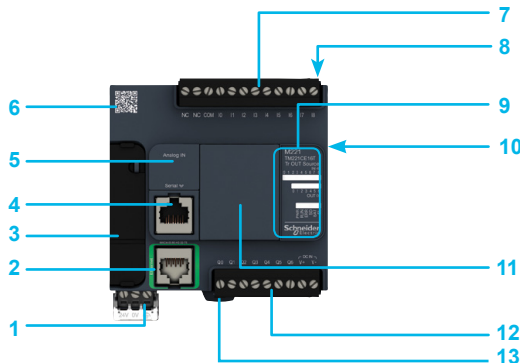

M221: 16 I/O

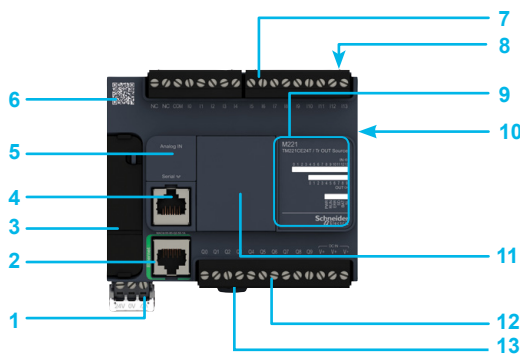

M221: 24 I/O

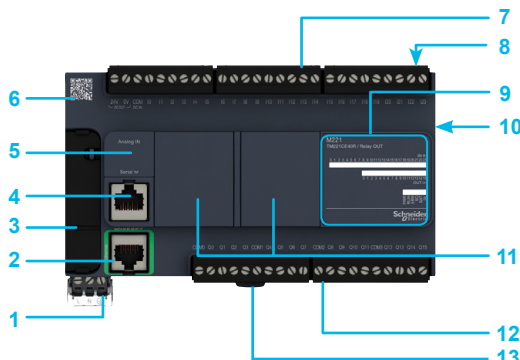

M221: 40 I/O



TMH2GDB

Description

M221 (TM221C●●●) logic controllers

- 1 Removable screw terminal block, 3 terminals for connecting the 24 V $\overline{\text{DC}}$ or the 100-240 V $\sim$ power supply (depending on model)
- 2 On TM221CE●●● controllers: RJ 45 connector for Ethernet network, with exchange rate and activity LED.
- 3 Behind the removable cover:
 - USB mini-B connector for connecting a PC equipped with the SoMachine Basic software
 - Slot for the SD memory card
 - Run/Stop switch
- 4 Serial link port (RS 232 or RS 485): RJ 45 connector.
- 5 Behind a cover: dedicated removable connector for two analog inputs.
- 6 Controller technical documentation QR code.
- 7 Connection of 24 V $\overline{\text{DC}}$ logic inputs on removable screw terminal blocks (1).
- 8 On top of the controller: slot for backup battery.
- 9 LED display block showing:
 - the status of the controller and its components (battery, SD memory card)
 - the status of the serial link
 - the status of the I/O
- 10 On the side of the controller: TM3 bus connector for the link with a Modicon TM3 expansion module.
- 11 Slot(s) for I/O cartridge(s), communication cartridge or application cartridge(s): one on M221 controllers with 16 and 24 I/O, two on M221 controllers with 40 I/O.
- 12 Connection of relay/transistor logic outputs: on removable screw terminal blocks (1).
- 13 Clip for locking on $\sqcap$ symmetrical rail.

(1) Removable screw terminal blocks equipped with screw terminals, supplied with M221 logic controller.

Graphic display unit TMH2GDB ▲


- 1 Control screen:
 - backlit STN graphic screen, two-tone (white/red), 240 x 160 pixels
 - graphic objects: bar charts, buttons, lights, graphic symbols
 - languages available: main international alphabets available in two sizes: 5 x 7 pixels and 11 x 15 pixels
 - 2 Ten command buttons, two of which can be customized with the option of identifying associated functions.
 - 3 Rotary navigation and control wheel.
- On the back of the display unit:
- 4 Mounting system consisting of: locking nut, seal and anti-rotation tee.
 - 5 RJ 45 connector for the cable linking the graphic display to the controller.

Characteristics of the graphic display unit


The graphic display unit conforms to CE, UL and CSA standards.

- Ambient operating temperature: - 10...+ 55°C (+ 14...+ 131°F).
- Degree of protection: IP 65.
- Power supply: 5 V $\overline{\text{DC}}$ (200 mA) directly by the controller.
- Power consumption: 1 W.
- Dimensions (w x h x d): 80 x 126 x 19.2 mm/3.15 x 4.96 x 0.75 in.
- Mounting: the display unit is mounted on a cabinet door in a hole $\varnothing$ 22 mm (0.866 in.), fixed onto it with a locking nut, in the same way as a pushbutton.


▲ Available: 4th quarter 2014.

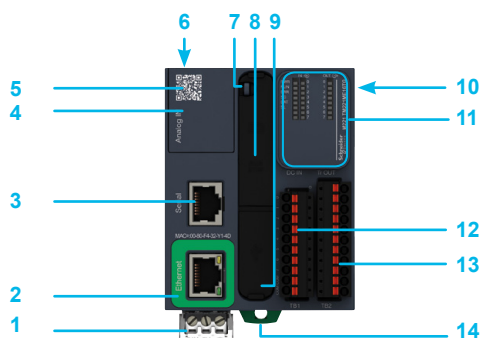

TM221ME16TG

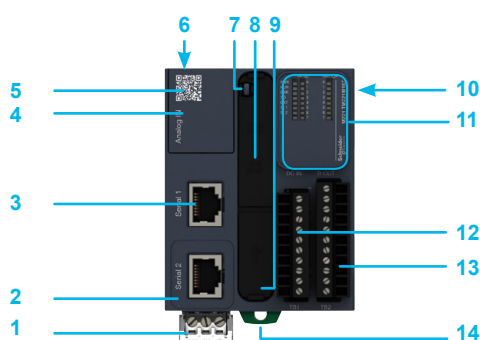

TM221M16T

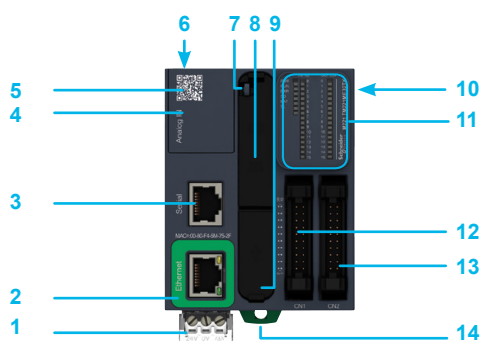

TM221ME32TK



TMH2GDB

Description

M221 Book logic controllers (TM221M●●●)

- 1 Removable screw terminal block, 3 terminals for connecting the 24 V --- power supply.
- 2 On TM221ME16●● and TM221ME32●● controllers: RJ 45 connector for Ethernet network, with exchange rate and activity LED.
On TM221M16●● and TM221M32●● controllers: RJ 45 connector for SL2 serial link.
- 3 SL1 serial link port (RJ 45 connector).
- 4 Behind a cover: dedicated removable connector for two analog inputs.
- 5 Controller technical documentation QR code.
- 6 Backup battery slot.

Behind the removable cover: 7, 8 and 9

- 7 Slot for the SD memory card.
- 8 Run/Stop switch.
- 9 USB mini-B connector, for connecting a PC equipped with the SoMachine Basic software.
- 10 TM3 bus connector for linking to a Modicon TM3 expansion module.
- 11 LED display block showing:
 - the status of the controller and its components (battery, SD memory card)
 - the status of the serial link
 - the status of the I/O
- 12 Connection of 24 V --- logic inputs:
 - on 16-channel controllers: removable spring or screw terminal blocks (1)
 - on 32-channel controllers: HE10 connector
- 13 Connection of relay/transistor logic outputs:
 - on 16-channel controllers: removable spring or screw terminal blocks (1)
 - on 32-channel controllers: HE10 connector
- 14 Clip for locking on --- symmetrical rail.

(1) Removable terminal blocks equipped with screw or spring-type terminals depending on controller type. Terminal blocks supplied with M221 Book controller.

Graphic display unit TMH2GDB ▲

Description and characteristics: see page 2/16

▲ Available: 4th quarter 2014.



TM221C16R
TM221C16T



TM221CE16R
TM221CE16T



TM221C24R
TM221C24T



TM221CE24R
TM221CE24T



TM221C40R
TM221C40T



TM221CE40R
TM221CE40T



TMC2AI2



TMC2AQ2V



TMC2AQ2C



TMC2TI2



TMC2SL1



TMC2PACK01



TMC2HOIS01



TMC2CONV01

References

Modicon M221 logic controllers (1)

Number of logic I/O	Logic inputs	Logic outputs	Analog inputs	Integrated communication ports (2)		Reference	Weight kg/ lb
				Ethernet (RJ 45)	Serial link (RJ 45)		
■ 100-240 V ~ power supply							
16 inputs/outputs	9 sink/source 24 V $\overline{\text{---}}$ inputs, inc. 4 high-speed inputs	7 relay outputs	2 x 0...10 V inputs	—	1	TM221C16R	0.346/ 0.763
				1	1	TM221CE16R	0.346/ 0.763
24 inputs/outputs	14 sink/source 24 V $\overline{\text{---}}$ inputs, inc. 4 high-speed inputs	10 relay outputs	2 x 0...10 V inputs	—	1	TM221C24R	0.395/ 0.871
				1	1	TM221CE24R	0.395/ 0.871
40 inputs/outputs	24 sink/source 24 V $\overline{\text{---}}$ inputs, inc. 4 high-speed inputs	16 relay outputs	2 x 0...10 V inputs	—	1	TM221C40R	0.456/ 1.005
				1	1	TM221CE40R	0.456/ 1.005

■ 24 V ~ power supply

16 inputs/outputs	9 sink/source 24 V ~ inputs, inc. 4 high-speed inputs	7 source transistor outputs, inc. 2 high-speed outputs	2 x 0...10 V inputs	—	1	TM221C16T	0.346/ 0.763
				1	1	TM221CE16T	0.346/ 0.763
24 inputs/outputs	14 sink/source 4 V ~ inputs, inc. 4 high-speed inputs	10 source transistor outputs, inc. 2 high-speed outputs	2 x 0...10 V inputs	—	1	TM221C24T	0.395/ 0.871
				1	1	TM221CE24T	0.395/ 0.871
40 inputs/outputs	24 sink/source 24 V ~ inputs, inc. 4 high-speed inputs	16 source transistor outputs, inc. 2 high-speed outputs	2 x 0...10 V inputs	—	1	TM221C40T	0.456/ 1.005
				1	1	TM221CE40T	0.456/ 1.005

Options for Modicon M221 logic controllers (3)

Description	Function		Reference	Weight kg/ lb
I/O cartridges	2 analog inputs (12-bit resolution) which can be configured as: - 0...10 V voltage - 0...20 mA/4...20 mA current Connection via screw terminal block		TMC2AI2	0.025/ 0.055
	2 analog outputs (12-bit resolution) 0...10 V voltage Connection via screw terminal block		TMC2AQ2V	0.025/ 0.055
	2 analog outputs (12-bit resolution) 4...20 mA current Connection via screw terminal block		TMC2AQ2C	0.025/ 0.055
	2 temperature inputs (12-bit resolution) type K, J, R, S, B, E, T, N, C, PT100, PT1000, NI100, NI1000 Connection via screw terminal block		TMC2TI2	0.025/ 0.055
	Communication cartridge		TMC2SL1	0.025/ 0.055
Cartridges for specific application	Hoisting application	2 analog inputs	TMC2HOIS01	0.025/ 0.055
	Packaging application	2 analog inputs	TMC2PACK01	0.025/ 0.055
	Conveyor system application	1 serial link	TMC2CONV01	0.025/ 0.055

- (1) M221 controllers are supplied with:
- removable screw terminal blocks for connecting the I/O
 - a removable screw terminal block for connecting the power supply
 - a button cell backup battery (BR2032)
 - a cable for connecting the analog inputs

- (2) Each M221 logic controller has an embedded USB mini-B programming port.

- (3) One cartridge for controllers with 16 and 24 I/O. Two cartridges maximum for controllers with 40 I/O, only one of which can be a communication cartridge.



TM221M16RG



TM221M16T



TM221ME16RG



TM221ME16T



TM221M16TG



TM221M32TK



TM221ME32TK

References

Modicon M221 Book logic controllers (1)

24 V $\square$ power supply

No. of logic I/O	Logic inputs	Logic outputs	Analog inputs	Embedded communication ports (2)	Serial link		Term. block for I/O conn. Interval (mm/in.)	Reference	Weight kg/lb
					Ethernet (RJ 45)	SL1 (RJ 45)	SL2 (RJ 45)		
16 inputs/outputs	8 sink/source 24 V $\square$ inputs, inc. 4 high-speed inputs	8 relay outputs	2 x 0...10 V inputs	–	1	1	screw (3.81/0.15)	TM221M16R	0.264/0.582
				–	1	1	spring (3.81/0.15)	TM221M16RG	0.264/0.582
				1	1	–	screw (3.81/0.15)	TM221ME16R	0.264/0.582
				1	1	–	spring (3.81/0.15)	TM221ME16RG	0.264/0.582
		8 source transistor outputs, inc. 2 high-speed outputs	2 x 0...10 V inputs	–	1	1	screw (3.81/0.15)	TM221M16T	0.264/0.582
				–	1	1	spring (3.81/0.15)	TM221M16TG	0.264/0.582
32 inputs/outputs	16 sink/source 24 V $\square$ inputs, inc. 4 high-speed inputs	16 source transistor outputs, inc. 2 high-speed outputs	2 x 0...10 V inputs	–	1	1	HE 10 connector	TM221M32TK	0.270/0.595
				1	1	–	HE 10 connector	TM221ME32TK	0.270/0.595

(1) M221 Book controllers are supplied with:

- removable terminal blocks (screw or spring-type depending on controller model) for connecting the I/O
- a removable screw terminal block for connecting the power supply
- a button cell backup battery (BR2032)
- a cable for connecting the analog inputs


(2) Each M221 Book logic controller has an embedded USB mini-B programming port.



TMH2GDB



TMASD1



TCSXCNAMUM3P

References

Common options for Modicon M221 and M221 Book logic controllers

Description	Function	Reference	Weight kg/ lb
Graphic display unit	Display and modification of data	TMH2GDB ▲	— —
SD memory card	Application backup and program transfer capacity: 256 MB	TMASD1	0.004/ 0.009

Separate parts for Modicon M221 and M221 Book logic controllers

Description	Details	Reference	Weight kg/ lb
Mounting kit Sold in lots of 10	For plate or panel mounting of M221 and M221 Book controllers	TMAM2	0.065/ 0.143

Replacement parts

Description	Details	Unit reference	Weight kg lb
Set of terminal blocks for connecting the power supply on M221 and M221 Book logic controllers	8 removable screw terminal blocks	TMAT2PSET	0.127/ 0.280
Set of terminal blocks for connecting the I/O on M221 controllers	Removable screw terminal connectors: 8 different connectors for equipping a TM221C●●●● logic controller (8 x I/O)	TMAT2CSET	0.127/ 0.280
Set of terminal blocks for connecting the I/O on M221 Book controllers	4 x 10-way and 4 x 11-way removable terminal blocks with screw terminals	TMAT2MSET	0.127/ 0.280
	4 x 10-way and 4 x 11-way removable terminal blocks with spring terminals	TMAT2MSETG	0.127/ 0.280
Backup battery	The battery supplied with each controller is not available as a separate element Schneider reference. If necessary spare parts, use only a Panasonic BR2032 battery type.		

Programming software

Description	For use with	Reference
SoMachine Basic	Modicon M221 and M221 Book logic controllers	See page 5/6

Expansion modules

Description	For use with	Reference
Modicon TM3 expansion modules	Modicon M221 and M221 Book logic controllers	See page 3/20

Cordsets

Description	For use	Length m/ft	Reference	Weight kg/ lb
Programming cables	From the PC USB port to the USB mini-B port on M221 and M221 Book controllers	3/ 0.98	TCSXCNAMUM3P (1)	0.065/ 0.143
		1.8/ 5.90	BMXXCAUSBH018	0.065/ 0.143
Cable for connecting the analog inputs embedded in M221 and M221 Book controllers	Equipped with 1 dedicated removable connector at one end and bare wires at the other end	1/ 3.28	TMACBL1	0.024/ 0.053

(1) Unshielded cable without grounding. To be used only for temporary connections. For permanent connections, use the reference BMXXCAUSBH018 programming cable.


▲ Available: 4th quarter 2014.

Hardware control platforms

Modicon M221 and M221 Book logic controllers
Telefast pre-wired system with Modicon ABE7 for M221
Book controllers

Telefast pre-wired system with Modicon ABE7

For 32-channel Modicon M221 Book logic controller and Modicon TM3 digital I/O expansion modules

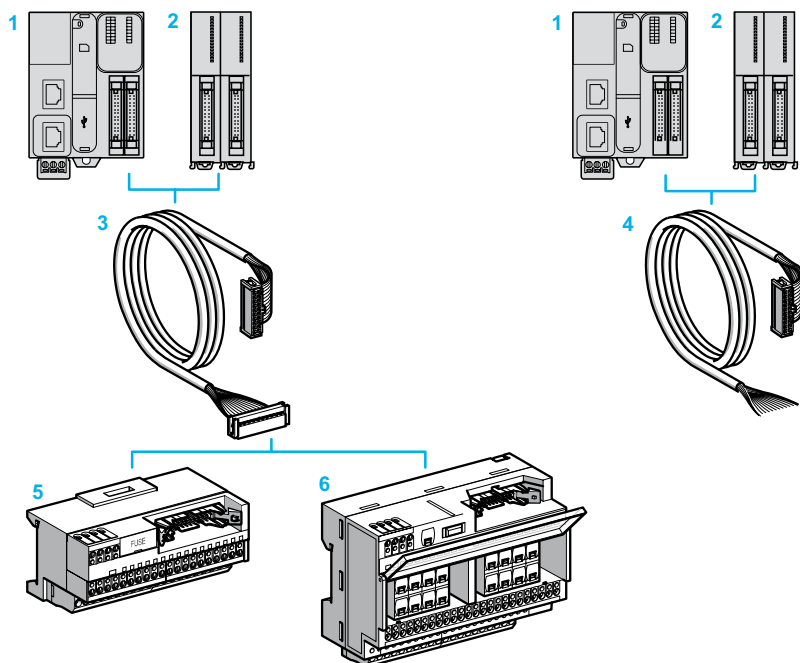

Possible combinations:

- (1 or 2) + 3 + (5 or 6)
- (1 or 2) + 4

- 1 32-channel Modicon M221 Book logic controllers (TM221M32TK, TM221ME32TK), equipped with HE 10 connectors.
- 2 Digital I/O modules (TM3D...K) with 16 or 32 I/O, equipped with HE 10 connectors.
- 3 ABFT20E... cordsets with one HE 10 connector at each end.
- 4 TWDFCW... cordsets with an HE 10 connector at one end and flying leads at the other end for direct connections to sensors, preactuators and terminal blocks.
- 5 16-channel sub-base for input expansion modules.
- 6 16-channel sub-base for output expansion modules.

2

Combinations of Modicon ABE7 sub-bases with M221 Book controllers and TM3 expansion modules

		Modicon M221 Book logic controllers	Modicon TM3 I/O expansion modules		
			Digital inputs	Source outputs	Sink outputs
		TM221M32TK TM221ME32TK	TM3DI16K TM3DI32K	TM3DQ16TK TM3DQ32TK	TM3DQ16UK TM3DQ32UK
16-channel sub-bases	Miniature passive	ABE7E16EPN20 (1) ABE7E16SPN20 (2) ABE7E16SPN22 (2)	ABE7E16EPN20	ABE7E16SPN20 ABE7E16SPN22	Use TWDFCW... cordsets
	2 A relay	ABE7E16SRM20 (2)	—	ABE7E16SRM20	Use TWDFCW... cordsets

(1) Compatible with inputs only.

(2) Compatible with outputs only.

compatible

References



ABE7E16EPN20



ABE7E16SRM20

Sub-bases		Number and type of channels		Compatibility	LED on each chnnl.	Fuse	Reference	Weight kg/lb
16 inputs	Sink: 24 V $\square$			TM221M32TK/ME32TK, TM3DI●●K	No	No	ABE7E16EPN20	0.430/0.948
	16 outputs	Source: 24 V $\square$		TM221M32TK/ME32TK, TM3DQ●●TK	No	No	ABE7E16SPN20	0.450/0.992
					Yes	Yes	ABE7E16SPN22	0.450/0.992
	Relay: 24 V $\square$ / 250 V $\sim$, 2 A			TM221M32TK/ME32TK, TM3DQ●●TK	No	No	ABE7E16SRM20	0.430/0.948
Cordsets								
Description	Compatibility	Cable connection		Gauge/CSA	Length m/ft	Reference	Weight kg/lb	
		M221 and TM3 end	Telefast end	mm ²				
Cordsets for digital I/O	TM221M32TK, TM221ME32TK, TM3DI16K, TM3DI32K, TM3DQ16TK, TM3DQ32TK	20-way HE 10	20-way HE 10	AWG 28 0.08 mm ²	0.5/1.64	ABFT20E050	0.060/0.132	
					1/3.28	ABFT20E100	0.080/0.176	
					2/6.56	ABFT20E200	0.140/0.309	
	TM221M32TK, TM221ME32TK, TM3DI16K, TM3DI32K, TM3DQ16TK, TM3DQ32TK, TM3DQ16UK, TM3DQ32UK	20-way HE 10	Flying leads	AWG 22 0.035 mm ²	3/9.84	TWDFCW30K	0.405/0.893	
					5/16.40	TWDFCW50K	0.670/1.477	



ABE7E16EPN20



ABE7E16SRM20

Hardware control platforms
Modicon M241 logic controllers

Applications		Control of simple motion Control of control loops		
				
Supply voltage		100-240 V ~		24 V ⎓
Inputs/Outputs	■ Logic inputs/outputs	24 logic inputs/outputs		
	□ No. and type of inputs	14 sink/source 24 V ⎓ inputs, inc. 8 high-speed inputs	14 sink/source 24 V ⎓ inputs, inc. 8 high-speed inputs	14 sink/source 24 V ⎓ inputs, inc. 8 high-speed inputs
	□ No. and type of outputs	10 outputs: with 4 source transistor high-speed outputs and 6 relay outputs	10 source transistor outputs, inc. 4 high-speed outputs	10 sink transistor outputs, inc. 4 high-speed outputs
Connection of logic inputs/outputs		With removable screw terminal block		
I/O extension		□ 7 Modicon TM3 expansion modules □ 14 Modicon TM3 expansion modules with the use of bus expansion modules (transmitter and receiver) □ Possible use of Modicon TM2 expansion modules with restrictions		
Embedded communication	Ethernet link	1 Ethernet port on TM241CE24● and TM241CEC24● controllers: Modbus TCP (client & server), Modbus TCP slave, dynamic DHCP Client Configuration, Programming, download monitoring. Updated firmware, data exchange - NGVL and IEC VAR ACCESS, WEB server, IP Ethernet adapter SNMP network management.MIB2, FTP file transfer		
	CANopen	1 CANopen port on TM241CEC24● controllers (1 screw terminal block): 63 slaves, 252 TPDO/252 RPDO		
	Serial link	2 serial link ports: □ 1 port SL1 (RJ 45), RS232/485 with +5 V supply □ 1 port SL2 (screw terminal) RS485		
Functions	Process control	PID		
	Counting	8 high-speed counter (HSC) inputs, 200 kHz frequency		
	Position control	4 position control outputs: □ P/D, CW and CCW pulse train (PTO) with trapezoidal profile and S curve (▲), 100 kHz frequency □ pulse width modulation (PWM) □ frequency generator (FG)		
Options	■ Cartridges	□ 3 I/O expansion cartridges: - with 2 voltage/current analog inputs - with 2 inputs for temperature probes - with 2 voltage/current analog outputs □ 2 application cartridges: - for control of hoisting applications - for control of packaging applications		
	Number of cartridge slots	1		
	■ Communication modules	□ 1 Ethernet port Modicon TM4 module with switch function and 4 integrated ports for TM241C24● □ 1 Modicon TM4 module for slave Profibus DP link		
Mounting		Mounting on  symmetrical rail or panel		
Software programming		With SoMachine software (see page 5/2)		
Controller type	with serial links	TM241C24R	TM241C24T	TM241C24U
	with embedded Ethernet port and serial links	TM241CE24R	TM241CE24T	TM241CE24U
	with embedded Ethernet and CANopen ports, and serial links	TM241CEC24R	TM241CEC24T	TM241CEC24U
Pages		2/30 ▲ Available: 4th quarter 2014.		

Control of simple motion Control of control loops		
		
100-240 V ~		24 V ⎓
40 logic inputs/outputs		
24 sink/source 24 V ⎓ inputs, inc. 8 high-speed inputs	24 sink/source 24 V ⎓ inputs, inc. 8 high-speed inputs	24 sink/source 24 V ⎓ inputs, inc. 8 high-speed inputs
16 outputs: with 4 source transistor high-speed outputs and 12 relay outputs	16 source transistor outputs, inc. 4 high-speed outputs	16 sink transistor outputs, inc. 4 high-speed outputs
With removable screw terminal block		
☐ 7 Modicon TM3 expansion modules ☐ 14 Modicon TM3 expansion modules with the use of bus expansion modules (transmitter and receiver) ☐ Possible use of Modicon TM2 expansion modules with restrictions		
1 Ethernet port on TM241CE40● and TM241CEC40● controllers: Modbus TCP (client & server), Modbus TCP slave, dynamic DHCP Client Configuration, Programming, download monitoring. Updated firmware, data exchange - NGVL and IEC VAR ACCESS, WEB server, IP Ethernet adapter SNMP network management. MIB2, FTP file transfer		
—		
2 serial link ports: ☐ 1 port SL1 (RJ 45), RS232/485 with +5 V supply ☐ 1 port SL2 (screw terminal) RS485		
PID		
8 high-speed counter (HSC) inputs, 200 kHz frequency		
4 position control outputs: ☐ P/D, CW and CCW pulse train (PTO) with trapezoidal profile and S curve (▲), 100 kHz frequency ☐ pulse width modulation (PWM) ☐ frequency generator (FG)		
☐ 3 I/O expansion cartridges: - with 2 voltage/current analog inputs - with 2 inputs for temperature probes - with 2 voltage/current analog outputs ☐ 2 application cartridges: - for control of hoisting applications - for control of packaging applications		
2		
☐ 1 Ethernet port Modicon TM4 module with switch function and 4 integrated ports for TM241C24● ☐ 1 Modicon TM4 module for slave Profibus DP link		
Mounting on  symmetrical rail or panel		
With SoMachine software (see page 5/2)		
TM241C40R	TM241C40T	TM241C40U
TM241CE40R	TM241CE40T	TM241CE40U
—	—	—
2/30		
▲ Available: 4th quarter 2014.		



2

Compatibility of offers

Modicon M241 logic controllers

- > Modicon TM3 expansion modules
- > Modicon TM2 expansion modules
- > Modicon TM4 communication modules
- > SoMachine software



M241 logic controller with 24 I/O



M241 logic controller with 40 I/O



QRcode example :
QRcode for access to the technical data sheet for
TM241CEC24R logic controller



SoMachine software

Presentation

Applications

Modicon M241 logic controllers are designed for high-performance compact machines incorporating speed and position control functions. They have an embedded Ethernet port offering FTP and web server services, meaning they can easily be integrated in control system architectures for remote monitoring and maintenance of machines by means of applications for smartphones, tablets and PCs.

- The wealth of embedded functions minimizes the cost of the machine:
 - Functions embedded in the controller: Modbus serial link, USB port dedicated to programming, CANopen fieldbus for distributed architectures, advanced position control functions (high-speed counters and pulse train outputs for servo motor control).
 - Functions embedded in the Modicon TM3 expansion: functional safety modules, motor-starter control module and remote expansion system.
 - Functions embedded in the Modicon TM4 communication modules.
- The processing power and the memory size of M241 controllers are ideal for targeting performance applications.
- The application is created quickly thanks to the intuitive nature and power of the SoMachine programming software. It also makes it easy to retrieve existing applications in the Modicon M221, M238 and M258 ranges automatically, maximizing use of the investment already made.

Key features

M241 logic controllers come in 2 formats (w x h x d):

- controllers with 24 I/O: 150 x 90 x 95 mm (5.90 x 3.54 x 3.74 in.)
- controllers with 40 I/O: 190 x 90 x 95 mm (7.48 x 3.54 x 3.74 in.)

- Inputs and outputs embedded in M241 controllers are connected on removable screw terminal blocks, supplied with the controllers.

- A Run/Stop switch is available on each M241 controller.

- A slot for an SD memory card (Secure Digital card) is available on each M241 controller.

A slot integrated in each M241 controller can take up to 2 cartridges of the following types:

- analog input or output expansion cartridges
- application cartridges: hoisting or packaging (1)

Each M241 logic controller has a QR code for direct access to its technical documentation.

Embedded communication

M241 logic controllers have up to 5 integrated communication ports:

- Ethernet with embedded Web server function
- CANopen (master)
- 2 serial links
- Programming port

Embedded functions

- PID control
- 8 high-speed counter (HSC) inputs, 200 kHz frequency
- 4 position control outputs for:
 - P/D, CW and CCW pulse train (PTO) with trapezoidal profile and S curve, 100 kHz frequency
 - pulse width modulation (PWM)
 - frequency generator (FG)


Processing power

- Execution speed: 22 ns/boolean instruction
- Program: 128 K boolean instructions
- DualCore CPU
- RAM: 64 MB
- Flash memory: 128 MB

Programming

M241 logic controllers are programmed with SoMachine software (see page 5/2).

(1) Use only one Application cartridge (inserted into the left slot of the Modicon M241 controllers).

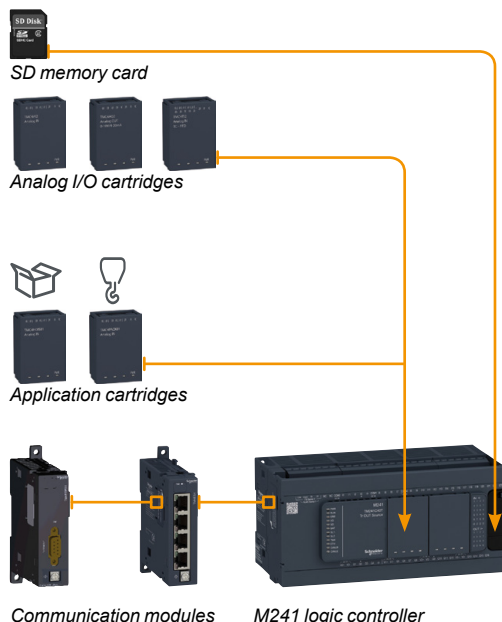

Options for Modicon M241 controllers

Memory card

The **TMASD1** SD memory card, 256 MB capacity, is available for:

- ☐ backup and application transfer
- ☐ data logging
- ☐ firmware updating

Cartridges for Modicon M241 controller

Up to 2 cartridges (depending on controller model) can be inserted on the M241 controller front panel without increasing its dimensions.

I/O cartridges

3 input or output cartridges are available:

- ☐ **TMC4AI2** cartridge for 2 analog inputs which can be configured as voltage or current
- ☐ **TMC4AQ2** cartridge for 2 analog outputs which can be configured as voltage or current
- ☐ **TMC4TI2** cartridge for 2 inputs which can be configured for temperature probes

Application cartridges

2 cartridges are available:

- ☐ The **TMC4HOIS01** Hoisting application cartridge has two dedicated analog inputs for control of a load cell.
- ☐ The **TMC4PACK01** Packaging application cartridge has two dedicated analog inputs for temperature control on packaging machines.

Use of an application cartridge provides direct access to Application Function Blocks via the SoMachine software.

Communication modules (1)

2 communication module models are available:

- ☐ The **TM4ES4** Ethernet switch module ; it offers on controllers without embedded Ethernet, an Ethernet connection with 4 ports.
- ☐ The **TM4PDPS1** Profibus DP slave module.

Modicon TM4 communication modules are assembled by simple interlocking on the left-hand side of the controllers and a bus expansion connector is used to distribute data and the power supply.

Up to 3 communication modules can be added on the left of M241 logic controllers.

See page 4/42.

Ethernet switch module

The **TM4ES4** module is a 4-port Ethernet interface (10/100 Mbps, MDI/MDIX) with the following protocols: Modbus TCP (Client/Server), Ethernet IP (adapter), UDP, TCP, SNMP and SoMachine.

- ☐ The **TM4ES4** module is ready for use as soon as it is connected to the communication bus of M241 controllers.
- ☐ This module is used to add the Ethernet function to TM241C24● and TM241C40● controllers without embedded Ethernet port while offering the additional functionality of an Ethernet switch.
- ☐ When connected to logic controllers with embedded Ethernet port type TM241CE24●●● and TM241CE40●●● it is a 4 port stand-alone switch: the communication between the TM4ES4 module and the Modicon M241 controller is not done automatically by the bus connector.

Profibus DP slave module

The **TM4PDPS1** communication module can be used to configure a slave connection on Profibus DP.


(1) For association rules between Modicon TM4 communication modules and Modicon M241 logic controllers, see page 4/42.

Hardware control platforms

Modicon M241 logic controllers

Communication option for Bluetooth® wireless connection

2

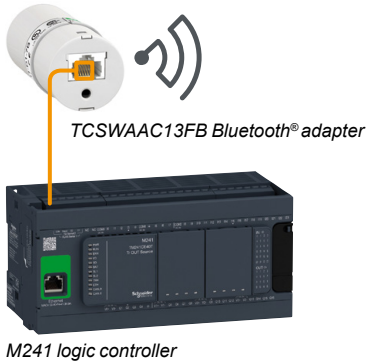

Communication option for Bluetooth® wireless connection

The Bluetooth® wireless connection enables complete freedom of movement within a radius of 10 m (32.81 ft.) around the controller.

For its M241 controllers Schneider Electric offers the **TCSWAAC13FB** Bluetooth® adapter to perform the following functions:

- ☐ commissioning
- ☐ monitoring

I/O extensions with Modicon TM3 modules


Modicon TM3 expansion modules (see page 3/20)

The capacity of M241 logic controllers can be enhanced with the Modicon TM3 expansion module offer:

- Digital I/O modules which can be used to create configurations with up to 264 digital I/O. These modules are available with the same connections as the controllers.
- Analog I/O modules which can be used to create configurations with up to 114 analog I/O and are designed to receive, amongst other things, position, temperature or speed sensor signals. They are also capable of controlling variable speed drives or any device equipped with a current or voltage input.
- Expert modules for control of TeSys motor starters which simplify wiring up the control section due to connection with RJ45 cables.
- Functional Safety modules which simplify wiring and can be configured in the SoMachine software.



In addition, the TM3 expansion system is flexible due to the possibility of remotely locating some of the TM3 modules in the enclosure or another cabinet, up to 5 meters (16.404 ft.) away, using a bus expansion system.

The Modicon TM3 expansion system is common to the whole range of Modicon M221, M241 and M251 logic controllers, meaning that the model of controller can be revised without changing expansion module.

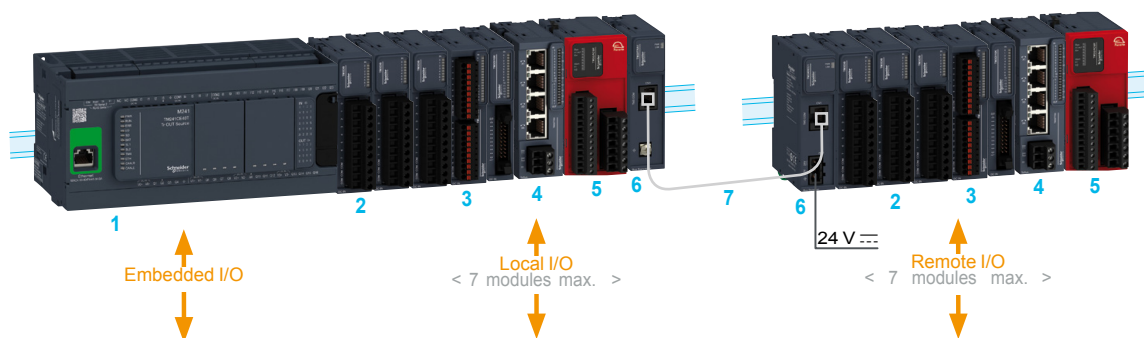

- 1 M241 logic controller.
- 2 Modicon TM3 digital I/O modules.
- 3 Modicon TM3 analog I/O modules (1).
- 4 Modicon TM3 expert module: control of TeSys motor starters.
- 5 Modicon TM3 functional safety modules.
- 6 Modicon TM3 bus expansion module (transmitter and receiver).
- 7 TM3 bus expansion cable.

(1) Compatibility of expansion module offers: the majority of Modicon TM2 expansion modules can be used with M241 logic controllers. However, adding a Modicon TM2 expansion module in a configuration can increase expansion module execution times by a few milliseconds.

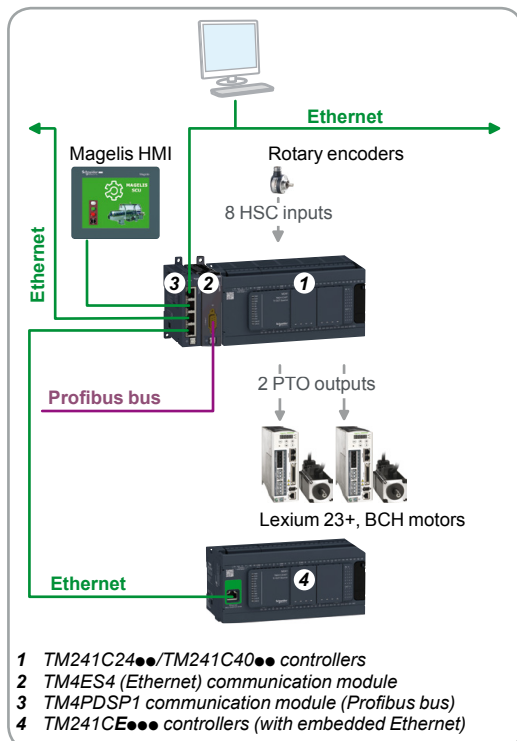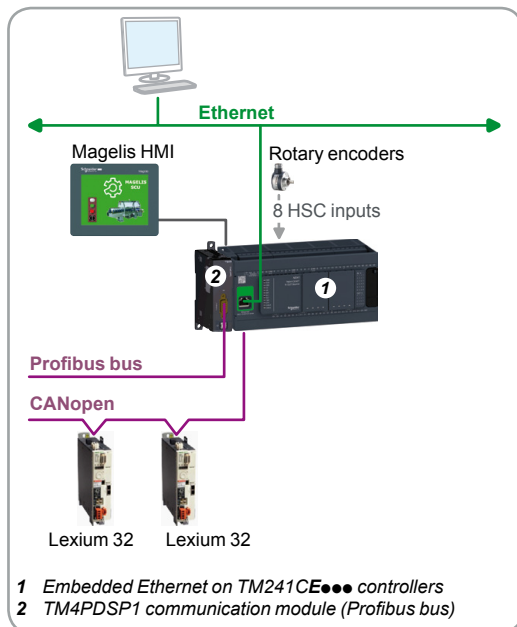

Embedded communication

M241 logic controllers have up to 5 embedded communication ports:

- Two serial links: SL1 (RJ 45) and SL2 (screw terminal block) and a programming port (USB mini-B) on each controller.
- An Ethernet port (RJ 45) or an Ethernet port (RJ 45) and a CANopen port depending on the controller model.

Communication on Ethernet network

TM241CE... controllers have an embedded Ethernet RJ 45 port (10/100 Mbps, MDI/MDIX) with Modbus TCP (Client/Server), Ethernet IP (adapter), UDP, TCP, SNMP and SoMachine protocols.

- Each M241 controller has an embedded web server and FTP server. As well as the default address based on the MAC address, it is possible to assign a controller IP address via a DHCP server or via a BOOTP server.
- The Ethernet port also offers the same uploading, updating and debugging functions as the programming port (USB mini-B) when the controller is supplied with power.
- A firewall allows to filter IP addresses accessing the controller and to lock each communication protocol.

Connection cables and accessories for Ethernet network: see page 4/46.

Communication on CANopen

TM241CE... controllers have an embedded CANopen master port.

The link can be configured between 20 Kbps and 1 Mbps and supports up to 63 slaves.

- Architectures based on CANopen can be used to distribute I/O modules as close to the sensors and actuators as possible, thus reducing wiring costs and times, and to communicate with different devices such as variable speed drives, servo drives, etc.
- The CANopen configurator is integrated in the SoMachine software and can also be used to import standard description files in EDS format.

CANopen connection cables and accessories: see page 4/13.

Serial links

Each M241 controller has 2 embedded serial links.

- The SL1 serial link can be configured as RS 232 or RS 485. In addition, a 5 V/200 mA power supply is available on the RJ 45 connector which allows the use of a Magelis **XBTRT** HMI, the **TCSWAAC13FB** Bluetooth® communication adapter or other devices.
- The serial link is configured as RS 485.

Embedded in both links are the two main protocols used in the market :

- Modbus ASCII/RTU Master or Slave
- ASCII character string


Connection cables and accessories for serial link: see page 4/6.

Programming port with power off charging function


The programming port, equipped with a mini-B USB connector, is embedded on each M241 controller; it is dedicated to communication with a PC equipped with SoMachine for:

- programming
- debugging
- maintenance

In addition, it offers the ability to upload an application program or update the firmware without the controller being supplied with power from another source.

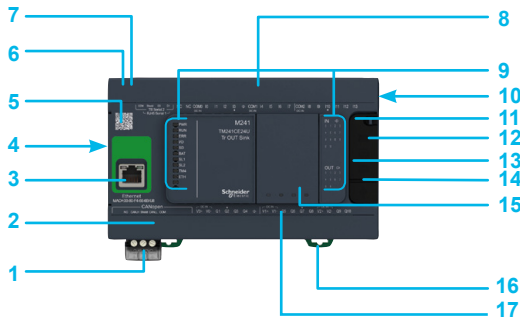

M241 controller 24 I/O

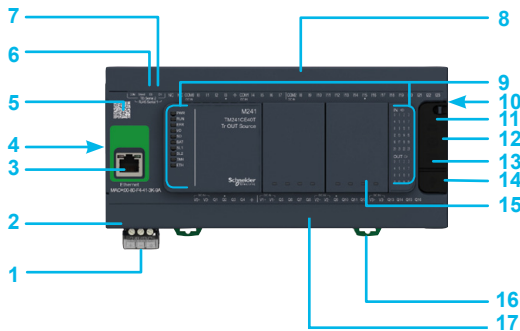

M241 controller 40 I/O

Description

M241 controllers

- 1 Removable screw terminal block, 3 terminals for connecting the 24 V $\square$ or the 100-240 V $\sim$ 50/60 Hz power supply (depending on model).
 - 2 On TM241CE $\bullet\bullet\bullet$ controllers: connector for linking to the CANopen bus (screw terminal block).
 - 3 On TM241CE $\bullet\bullet\bullet$ controllers: RJ 45 connector for Ethernet network, with exchange rate and activity LED.
 - 4 TM4 bus connector: communication bus for connecting to the TM4 $\bullet\bullet\bullet$ communication modules.
 - 5 Controller technical documentation QR code.
 - 6 SL1 serial link port (RS 232 or RS 485): RJ 45 connector.
 - 7 SL2 serial link port (RS485): screw terminal blocks.
 - 8 Connection of 24 V $\square$ logic inputs: removable screw terminal blocks (1).
 - 9 LED display block showing:
 - the status of the controller and its components (battery, SD memory card)
 - the status of the embedded communication ports (CANopen bus, serial links, Ethernet)
 - the status of the I/O
 - 10 TM3 bus connector for linking to a Modicon TM3 expansion module.
- Behind a removable cover: 11, 12, 13, 14, 15**
- 11 Run/Stop switch.
 - 12 SD memory card slot.
 - 13 Backup battery slot.
 - 14 Mini-B USB connector for connecting a programming port.
 - 15 Slot(s) for I/O cartridge(s) or application cartridge(s): one slot on TM241C $\bullet$ 24, two slots on TM241C $\bullet$ 40.
 - 16 Locking clip on $\perp$ symmetrical rail.
 - 17 Connection of relay/transistor logic outputs: removable screw terminal blocks (1).

(1) Removable terminal blocks equipped with screw terminals. Terminal blocks supplied with controller.

Characteristics of M241 logic controllers

Conformity

■ Certification

- ☐ CE, cULus Listing Mark, C-Tick, EAC, LR, ABS, DNV and GL (1)

■ Standards

- ☐ IEC/EN 61131-2 (Edition 2 2007), UL508 (UL61010-2-201), ANSI/ISA 12.12.01-2007, CSA C22.2 No. 213, No. 142, E61131-2 and IACS E10

Environment characteristics

- ☐ Ambient operating temperature: - 10...+ 55°C (+14...+ 131°F).
- ☐ Storage temperature: - 40...+ 70°C (- 40...+ 158°F).
- ☐ Relative humidity: 5...95% (non-condensing).
- ☐ Operating altitude: 0...2000 m (0...6561 ft).
- ☐ Storage altitude: 0...3000 m (0...9842 ft).
- ☐ Immunity to mechanical stress:
 - For 1131: 5...8.4 Hz (amplitude 3.5 mm/0.14 in.); 8.4...150 Hz acceleration 1 g).
 - For merchant marine: 5...13.2 Hz (amplitude 1.0 mm/0.04 in.); 13.2...100 Hz (acceleration 0.7 g).

Supply characteristics

Two power supply types are available depending on M241 controller model: 24 V $\square$ or 100-240 V $\sim$ 50/60Hz

- ☐ Voltage limit (ripple included): 19.2...28.8 V $\square$ /85...264 V $\sim$
- ☐ Immunity to micro-cuts (class PS-2): 10 ms
- ☐ Max. consumption: 45 W.

(1) Marine certifications LR, ABS, DNV and GL: pending.



TM241C24R



TM241C40R



TM241CEC24U



TM241CE24R



TM241CE40T



TM241CE40U



TMC4AI2



TMC4AQ2



TMC4TI2



TMC4HOIS01



TMC4PACK01



TMASD1

References

Modicon M241 logic controllers (1)

No. of logic I/O	Logic inputs	Logic outputs	Embedded communication ports (2)			Reference	Weight kg/ lb
			Ethernet (RJ 45)	CANopen master (screw terminal block)	Serial links (RJ 45 and screw terminal block)		
■ 100-240 V ~ power supply							
24 inputs/ outputs	14 sink/source 24 V $\square$ inputs, inc. 8 high-speed inputs	10 outputs: with 4 source transistor high-speed outputs and 6 relay outputs	—	—	1 + 1	TM241C24R	0.530/ 1.168
			1	—	1 + 1	TM241CE24R	0.530/ 1.168
			1	1	1 + 1	TM241CEC24R	0.530/ 1.168
40 inputs/ outputs	24 x 24 V $\square$ inputs, inc. 8 high-speed inputs	16 outputs: with 4 source transistor high-speed outputs and 12 relay outputs	—	—	1 + 1	TM241C40R	0.620/ 1.367
			1	—	1 + 1	TM241CE40R	0.620/ 1.367
■ 24 V $\square$ power supply							
24 inputs/ outputs	14 sink/source 24 V $\square$ inputs, inc. 8 high-speed inputs	10 source transistor outputs, inc. 4 high-speed outputs	—	—	1 + 1	TM241C24T	0.530/ 1.168
			1	—	1 + 1	TM241CE24T	0.530/ 1.168
			1	1	1 + 1	TM241CEC24T	0.530/ 1.168
	14 sink/source 24 V $\square$ inputs, inc. 8 high-speed inputs	10 sink transistor outputs, inc. 4 high-speed outputs	—	—	1 + 1	TM241C24U	0.530/ 1.168
			1	—	1 + 1	TM241CE24U	0.530/ 1.168
			1	1	1 + 1	TM241CEC24U	0.530/ 1.168
40 inputs/ outputs	24 sink/source 24 V $\square$ inputs, inc. 8 high-speed inputs	16 source transistor outputs, inc. 4 high-speed outputs	—	—	1 + 1	TM241C40T	0.620/ 1.367
			1	—	1 + 1	TM241CE40T	0.620/ 1.367
	24 sink/source 24 V $\square$ inputs, inc. 8 high-speed inputs	16 sink transistor outputs, inc. 4 high-speed outputs	—	—	1 + 1	TM241C40U	0.620/ 1.367
			1	—	1 + 1	TM241CE40U	0.620/ 1.367

Options for Modicon M241 logic controllers


Designation	Description	Reference	Weight kg/lb
I/O cartridges	2 analog inputs (12-bit resolution) configurable as: – 0...10 V voltage – 0...20 mA/4...20 mA current Connected on screw terminal block	TMC4AI2	0.025/0.055
	2 analog outputs (16-bit resolution) configurable as: – 0...10 V voltage – 0...20 mA/4...20 mA current Connected on screw terminal block	TMC4AQ2	0.025/0.055
	2 inputs (14-bit resolution) configurable for temperature probes: – Thermocouple/PT100/PT1000/Ni100/Ni1000 Connected on screw terminal block	TMC4TI2	0.025/0.055
Cartridges for specific application (3)	Hoisting application: 2 analog inputs for a load cell Connected on screw terminal block	TMC4HOIS01	0.025/0.055
	Packaging application: 2 analog inputs Connected on screw terminal block	TMC4PACK01	0.025/0.055
SD memory card	Application backup and program transfer Capacity: 256 MB	TMASD1	0.004/0.009

(1) Modular M241 controllers are supplied with:

- Removable terminal blocks (screw terminals) for connecting the I/O with thread of 3.81 mm (0.15 in.).
- A removable terminal block for connecting the power supply with thread of 5.08 mm (0.2 in.).
- A button cell backup battery (BR2032).

(2) Each M241 logic controller has an embedded USB mini-B programming port.

(3) Use only one Application cartridge (inserted into the left slot of the Modicon M241 controllers).



TCSXCNAMUM3P

References

Spare parts

Designation	Description	Unit reference	Weight kg/ lb
Set of connectors for connecting the I/O	Removable connectors with screw terminals: 8 different connectors for equipping a M241 logic controller (1 x SL2, 6 x I/O, 1 x CANopen)	TMAT4CSET	0.127/ 0.280
Set of terminal blocks for connecting the power supply	8 removable terminal blocks with screw terminals	TMAT2PSET	0.127/ 0.280
Backup battery	The battery supplied with each controller is not available as a separate element Schneider reference. If necessary spare parts, use only a Panasonic BR2032 battery type.		

Programming software

Designation	Used for	Reference
SoMachine software	M241 logic controllers	See page 5/2

Expansion modules

Description	Used for	Reference
Modicon TM3 expansion modules	M241 logic controllers	See page 3/20

Communication modules

Description	Used for	Reference
Modicon TM4 communication modules	Ethernet port module , Profibus DP slave module	See page 4/43

Cordsets

Designation	For use From	To	Length m/ft	Reference	Weight kg/ lb
Programming cables	PC USB port	USB mini-B port on M221, M241, M251 and M258 controllers	3/ 0.98	TCSXCNAMUM3P (1)	0.065/ 0.143
			1.8/ 5.90	BMXXCAUSBH018	0.065/ 0.143

(1) Unshielded cable without grounding. To be used only for temporary connections. For permanent connections, use the reference BMXXCAUSBH018 programming cable.

Hardware control platforms
Modicon M251 logic controllers

Applications		Control of modular machines on distributed architectures	
			
Supply voltage		24 V $\overline{\text{---}}$	
I/O expansion		■ 7 Modicon TM3 expansion modules ■ 14 Modicon TM3 expansion modules with the use of bus expansion modules (transmitter and receiver) ■ Possible use of Modicon TM2 expansion modules with restrictions.	
Embedded communication	Ethernet link	■ Ethernet 1: 2 ports connected by a switch, "Machine" or "Factory" network (2 RJ 45 connectors) ■ Ethernet 2: 1 "fieldbus" Ethernet port (1 RJ 45 connector) Modbus TCP (client & server), Modbus TCP slave, dynamic DHCP Client Configuration, Programming, download monitoring. Updated firmware, data exchange - NGVL and IEC VAR ACCESS, WEB server, IP Ethernet adapter SNMP network management.MIB2, FTP file transfer	
	CANopen	—	
	Serial link	■ 1 serial link port (RJ 45), RS232/485 with +5 V supply	
Options	Communication modules	■ 1 Ethernet port Modicon TM4 module with switch function and 4 integrated ports ■ 1 Modicon TM4 module for slave Profibus DP link	
Mounting		Mounting on  symmetrical rail or panel	
Software programming		With SoMachine software (see page 5/2)	
Controller type		TM251MESE	
Pages		2/41	

Control of modular machines on distributed architectures	
	
24 V $\overline{\text{---}}$	
■ 7 Modicon TM3 expansion modules ■ 14 Modicon TM3 expansion modules with the use of bus expansion modules (transmitter and receiver) ■ Possible use of Modicon TM2 expansion modules with restrictions.	
■ Ethernet: 2 ports connected by a switch, "Machine" or "Factory" network (2 RJ 45 connectors) Modbus TCP (client & server), Modbus TCP slave, dynamic DHCP Client Configuration, Programming, download monitoring. Updated firmware, data exchange - NGVL and IEC VAR ACCESS, WEB server, IP Ethernet adapter SNMP network management.MIB2, FTP file transfer	
■ 1 master CANopen port (1 x 9-way SUB-D connector)	
■ 1 serial link port (RJ 45), RS232/485 with +5 V supply	
■ 1 Ethernet port Modicon TM4 module with switch function and 4 integrated ports ■ 1 Modicon TM4 module for slave Profibus DP link	
Mounting on  symmetrical rail or panel	
With SoMachine software (see page 5/2)	
TM251MESG	
2/41	

Compatibility of offers

Modicon M251 logic controllers

- > Modicon TM3 expansion modules
- > Modicon TM2 expansion modules
- > Modicon TM4 communication modules
- > SoMachine software



TM251MESE



TM251MES C



QRcode example :
QRcode for access to the technical data sheet for
TM251MESE logic controller



SoMachine software

Presentation

Applications

Modicon M251 controllers offer an innovative, high-performance solution in the field of modular machines and distributed architectures.

Thanks to their compact dimensions, they can optimize the size of wall-mounted and floor standing control system enclosures.

Since Modicon M251 controllers have no embedded I/O, field devices such as variable speed drives and remote I/O are connected on either the CanOpen bus or the Ethernet network.

The Ethernet ports embedded in each M251 controller offer FTP and web server services, making it easy to integrate control system architectures and remote control of machines using applications for smartphones, tablets and PCs.

- The wealth of embedded functions minimizes the cost of the machine:
 - Functions embedded in the controller: Modbus serial link, USB port dedicated to programming, CANopen fieldbus for distributed architectures, advanced position control functions (high-speed counters and pulse train outputs for servo motor control).
 - Functions embedded in the Modicon TM3 expansion: functional safety modules, motor-starter control module and remote expansion system.
 - Functions embedded in the Modicon TM4 communication modules.
- The processing power and the memory size of M251 controllers are ideal for targeting performance applications.
- The application is created quickly thanks to the intuitive nature and power of the SoMachine programming software. It also makes it easy to retrieve existing applications in the Modicon M221, M238 and M258 ranges automatically, maximizing use of the investment already made.

Key features

- Both Modicon M251 logic controllers come in an identical format (w x h x d): 54 x 90 x 95 mm (2.13 x 3.54 x 3.74 in).
- Modicon M251 controllers have no embedded I/O but can be combined with Modicon TM3 expansion modules.
- Each M251 controller has a Run/Stop switch.
- Each M251 controller has a slot for an SD (Secure Digital) memory card.
- Each M251 controller has a QR code for direct access to its technical documentation.

Embedded connection

M251 logic controllers have up to 5 integrated communication ports.

- The **TM251MESE** controller has the following embedded features:
 - an "Ethernet 1" network (1) with 2 RJ 45 ports connected by an internal switch, this network being mainly for communication between machines or to your factory network.
 - an "Ethernet 2" network (1) with an RJ 45 port, optimized for connecting field devices (variable speed drives, distributed I/O, etc.) by means of the Ethernet I/O scanner service. This port can also be connected to a factory network.
- The **TM251MES C** controller has the following embedded features:
 - an "Ethernet" network (1) with 2 RJ 45 ports connected by an internal switch, this network being mainly for communication between machines or to your factory network.
 - a master CANopen port for connecting field devices (variable speed drives, distributed I/O, etc.).
- Moreover, both these M251 logic controllers incorporate:
 - a serial link port.
 - a programming port.


(1) Ethernet with embedded Web server function

Processing power

- Execution speed: 22 ns/boolean instructions.
- Program: 128 K boolean instructions.
- DualCore processor.
- RAM: 64 MB.
- Flash memory: 128 MB.

Programming

Modicon M251 logic controllers are programmed with the SoMachine software (see page 5/2).

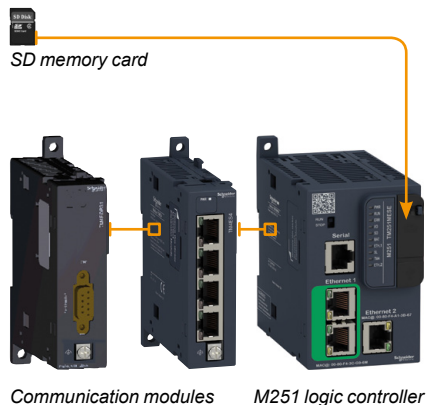

Options for Modicon M251 controllers

Memory card

The **TMASD1** SD memory card, with 512 MB capacity, is available for:

- ☐ application backup.
- ☐ program transfer.
- ☐ data logging.
- ☐ firmware updating.

Communication modules (1)

2 communication module models are available:

- ☐ The **TM4ES4** Ethernet switch module
- ☐ The **TM4PDPS1** Profibus DP slave module

Modicon TM4 communication modules are assembled by simple interlocking on the left-hand side of the controllers and a bus expansion connector is used to distribute data and the power supply.

Up to 3 communication modules can be added on the left of M251 logic controllers.

See page 4/42.

■ Ethernet switch module


- ☐ The **TM4ES4** module is a 4-port Ethernet interface (10/100 Mbps, MDI/MDIX) .
- ☐ Clipped onto the left-hand side of a Modicon M251 controller, it consists of an autonomous switch with 4 ports supplied by the Modicon M251 controller.

■ PROFIBUS DP slave module

- ☐ The **TM4PDPS1** communication module can be used to configure a Master connection on the PROFIBUS DP bus.

(1) For association rules between Modicon TM4 communication modules and Modicon M251 logic controllers (see page 4/42).

2

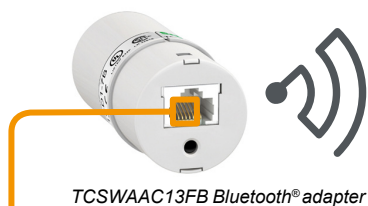

TCSWAAC13FB Bluetooth® adapter



M251 logic controller

Communication option for link Bluetooth® wireless link

The Bluetooth® wireless link enables complete freedom of movement within a radius of 10 m (32.808 ft.) around the controller.

For its M251 controllers Schneider Electric offers the **TCSWAAC13FB** Bluetooth® adapter to perform the following functions:

- ☐ commissioning
- ☐ monitoring

I/O extensions with Modicon TM3 modules


Modicon TM3 expansion modules (see page 3/20)

Modicon M251 logic controllers have no embedded I/O, yet can still take Modicon TM3 expansion modules for connecting sensors and actuators locally:

- digital I/O modules for creating configurations with up to 224 digital I/O.
- analog I/O modules for creating configurations with up to 114 analog I/O, to receive the signals from, for example, position, temperature, and speed sensors and also capable of controlling variable speed drives or any other device with a current or voltage input.
- expert modules for controlling 4 TeSys motor-starters, connected with RJ 45 cordsets to simplify wiring the control section.
- Functional Safety modules that simplify the wiring and can be configured in the SoMachine software.

In addition, the Modicon TM3 expansion system is flexible due to the possibility of remotely locating some of the Modicon TM3 modules in the floor standing enclosure or another wall-mounted enclosure, up to 5 meters (16.404 ft.) away, thanks to the use of a bus expansion system.

The Modicon TM3 expansion system is common to the whole range of Modicon M221, M241 and M251 logic controllers, meaning that applications can be upgraded without changing extension.

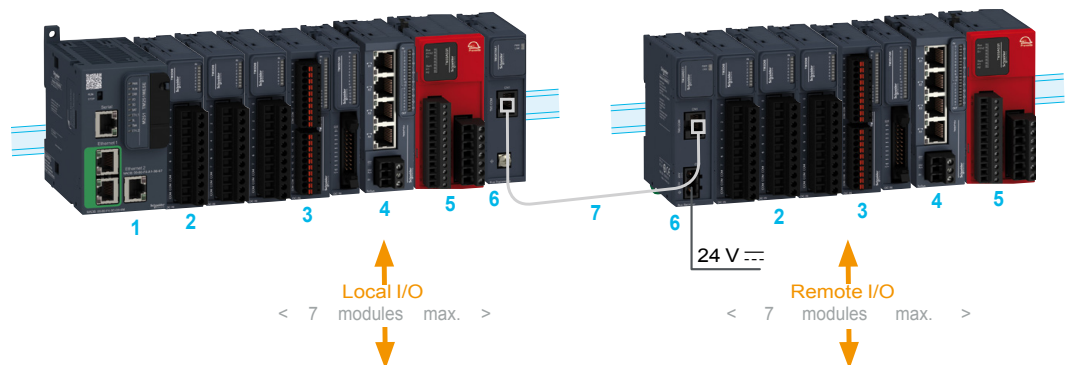

- 1 M251 logic controller.
- 2 Modicon TM3 digital I/O modules.
- 3 Modicon TM3 analog I/O modules (1).
- 4 Modicon TM3 expert module: for controlling TeSys motor-starters.
- 5 Modicon TM3 functional safety modules.
- 6 Modicon TM3 bus expansion modules (transmitter and receiver).
- 7 Modicon TM3 bus expansion cordset.

(1) Compatibility of expansion module offers: most Modicon TM2 expansion modules can be used with M251 logic controllers. Nonetheless, inserting a Modicon TM2 expansion module in a configuration can increase the expansion module execution times by as much as a few milliseconds.


Hardware control platforms

Modicon M251 logic controllers

Embedded connection

Embedded connection

Control architecture for modular machines on Ethernet network

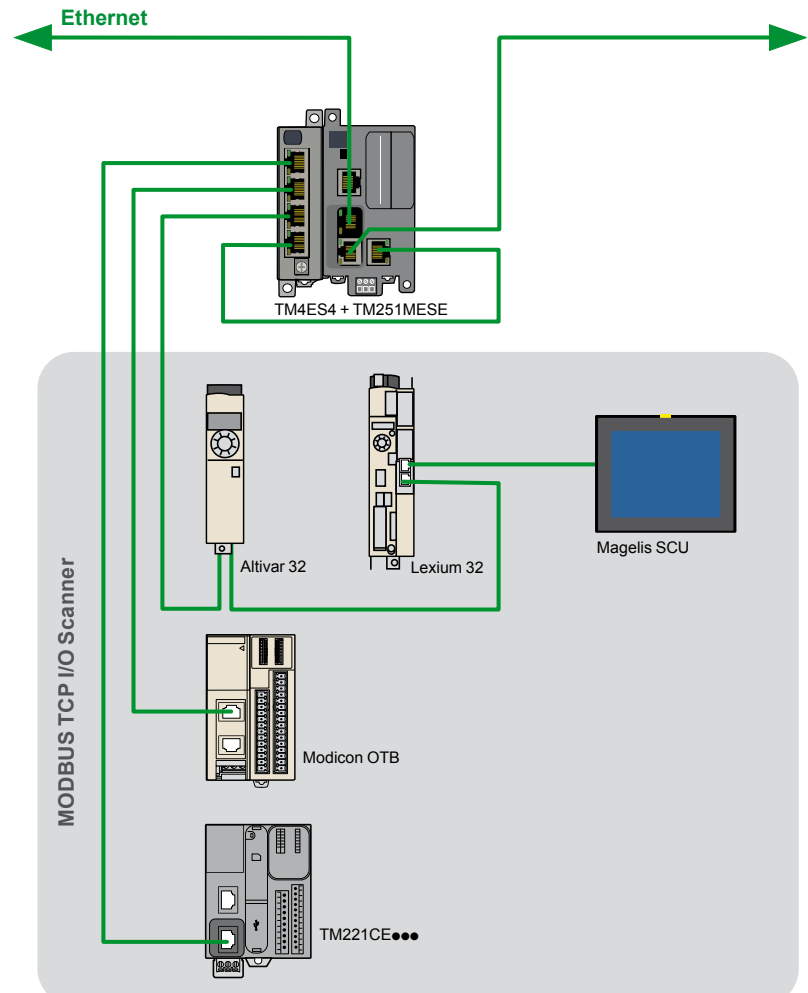


M251 controllers have 2 embedded Ethernet ports connected by an RJ 45 switch (10/100 Mbps, MDI/MDIX) with the Modbus TCP (Client/Server), Ethernet IP (adapter), UDP, TCP, SNMP and SoMachine on Ethernet protocols. These ports are mainly for communication between machines or to your factory network. These ports are marked "Ethernet" or "Ethernet 1".

- M251 controllers each have an embedded web server and FTP server. As well as the default address based on the MAC address, a controller IP address can be assigned via a DHCP server or via a BOOTP server.
- Ethernet ports also offer the same upload/download, update and debug functions as the programming port (USB mini-B) when the controller is supplied with power.
- A firewall allows to filter IP addresses accessing the controller and to lock each communication protocol.
- **TM251MESE** controllers have, in addition to the two embedded "Ethernet 1" ports, an embedded "Ethernet 2" Ethernet port optimized for connecting RJ 45 type field devices (variable speed drives, distributed I/O, etc.), with Ethernet Modbus TCP I/O scanner, Ethernet Modbus TCP (Client/Server), Ethernet IP (adapter), UDP, TCP, SNMP and SoMachine protocols.

Cordsets and connection accessories for Ethernet network (see page 4/46).

Embedded connection (continued)

Control architecture for modular machines on CANopen bus

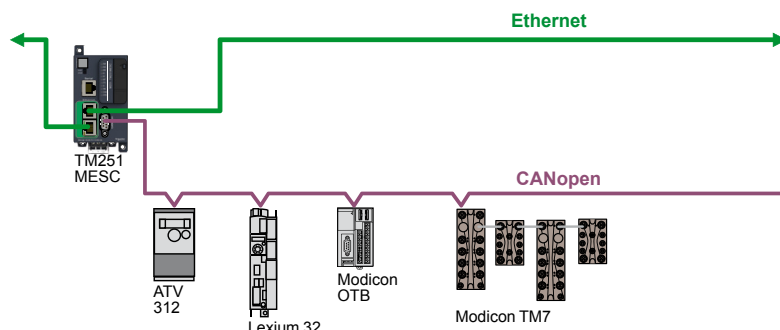

TM251MESC controllers have an embedded master CANopen port.

- The link can be configured between 20 Kbps and 1 Mbps and supports up to 63 slaves with 252 TPDO and 252 RPDO.
- CANopen-based architectures can be used to distribute I/O modules as close to the sensors and actuators as possible, thus reducing wiring costs and times, and to communicate with different devices such as variable speed drives, servo drives, etc.
- The CANopen configurator is integrated in the SoMachine software and can also be used to import standard description files in EDS format.

CANopen cordsets and connection accessories: see page 4/20.

Serial link

Each M251 controller has an embedded serial link that can be configured as RS 232 or RS 485.

In addition, a 5 V/200 mA power supply is available on the RJ 45 connector which allows the use of a Magelis **XBTN** or **XBTRT** HMI, the **TCSWAAC13FB** Bluetooth® communication adapter or other devices.

Embedded in both links are the two main protocols used in the market:

- Modbus ASCII/RTU Master or Slave.
- Character string (ASCII).


Connection cables and accessories for serial link: see page 4/6.

Programming port with power off charging function


The programming port, equipped with a mini-B USB connector, is embedded on each M251 controller; it is dedicated to communication with a PC equipped with SoMachine for:

- programming
- debugging
- maintenance

In addition, it offers the ability to upload an application program or update the firmware without the controller being supplied with power from another source.

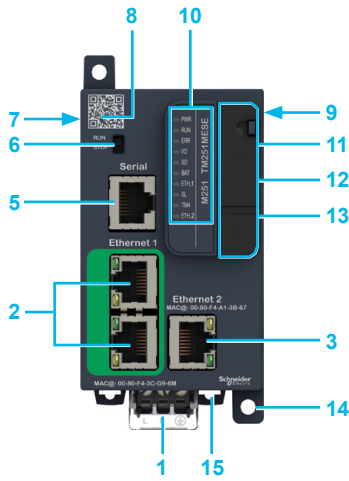

TM251MESE controller

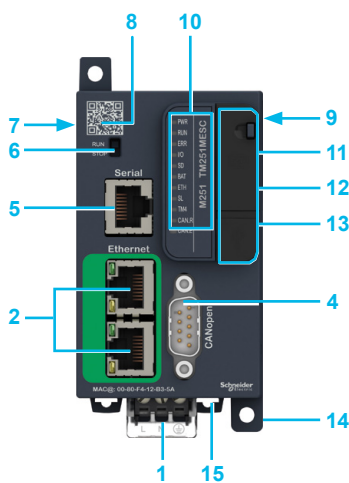

TM251MESD controller

Description

M251 controllers

- 1 Removable screw terminal block, 3 terminals for connecting the 24 V $\square$ power supply.
- 2 Two RJ 45 connectors connected by an internal switch for "Machine" or "Factory" Ethernet network, with exchange rate and activity LED.
- 3 On **TM251MESE** controller: RJ 45 connector for Ethernet 2 network, "fieldbus" with exchange rate and activity LED.
- 4 On **TM251MESD** controller: a connector for linking to the CANopen bus (9-way SUB-D).
- 5 SL serial link port (RS 232 or RS 485): RJ 45 connector.
- 6 Run/Stop switch.
- 7 TM4 bus connector: communication bus for linking to TM4... communication modules.
- 8 Controller technical documentation QR code.
- 9 Modicon TM3 bus connector for linking to a Modicon TM3 expansion module.
- 10 LED display block showing: the status of the controller and its components (battery, SD memory card), the status of the embedded communication ports (Ethernet 1 and 2, CANopen, serial link).

Behind a cover 11, 12, 13

- 11 Slot for the SD memory card.
- 12 Backup battery slot.
- 13 USB mini-B connector, marked "Prg. Port", for connecting a programming terminal.
- 14 Lugs for screw mounting on panel.
- 15 Clip for locking on $\perp$ symmetrical rail.

Characteristics of M251 logic controllers

Conformity

■ Certifications

- CE, cULus Listing Mark, C-Tick, EAC, LR, ABS, DNV and GL (1).

■ Standards

- IEC/EN 61131-2 (Edition 2 2007), UL 508 (UL 61010-2-201), ANSI/ISA 12.12.01-2007, CSA C22.2 No. 213, No.142, E61131-2 and IACS E10.

Environment characteristics

- Ambient operating temperature: - 10...+ 55°C (+14...+ 131°F).
- Storage temperature: - 40...+ 70°C (- 40...+ 158°F).
- Relative humidity: 5...95% (non-condensing).
- Operating altitude: 0...2,000 m (0...6,561 ft).
- Storage altitude: 0...3,000 m (0...9,842 ft).
- Immunity to mechanical stress:
 - For 1131: 5...8.4 Hz (amplitude 3.5 mm/0.138 in.); 8.4...150 Hz (acceleration 1 g).
 - For merchant marine: 5...13.2 Hz (amplitude 1.0 mm/0.039 in.); 13.2...100 Hz (acceleration 0.7 g).

Supply characteristics

- 24 V $\square$ power supply.
- Voltage limit (including ripple): 19.2...28.8 V $\square$.
- Immunity to micro-cuts (class PS-2): 10 ms.
- Max. consumption: 45 W.

(1) LR, ABS, DNV and GL marine certifications: pending.




TM251MESE



TM251MESC



TMA5D1



TCSXCNAMUM3P

References

Modicon M251 logic controllers (1)

Description	Embedded communication ports				Reference	Weight kg/ lb
	Ethernet 1 "Machine" or "Factory" (RJ 45)	Ethernet 2 "Fieldbus" (RJ 45)	Master CANopen (9-way SUB-D)	Serial link (RJ 45)		
24 V $\square$ power supply						
M251 logic controllers	2 (connected by a switch)	1	–	1	TM251MESE	0.220/ 0.485
	2 (connected by a switch)	–	1	1	TM251MESC	0.220/ 0.485

Options for Modicon M251 logic controllers

Description	Details	Reference	Weight kg/ lb
SD memory card	Application backup and program transfer Capacity: 256 MB	TMA5D1	0.004/ 0.009

Replacement parts

Description	Details	Reference	Weight kg/ lb
Set of power supply terminal blocks	8 removable screw terminal blocks	TMAT2PSET	0.127/ 0.280
Backup battery	The battery supplied with each controller is not available as a separate element Schneider reference. If necessary spare parts, use only a Panasonic BR2032 battery type.		

Programming software

Description	Used for	Reference
SoMachine software	M251 logic controllers	See page 5/2

Expansion modules

Description	Used for	Reference
Modicon TM3 expansion modules	M251 logic controllers	See page 3/20

Communication modules

Description	Details	Reference
Modicon TM4 communication modules	Ethernet port module , Profibus DP slave module	See page 4/42

Cordsets

Description	Use from	To	Length m/ft	Reference	Weight kg/ lb
Programming cables	PC USB port	USB mini-B port on M251 controllers	3/ 0.98	TCSXCNAMUM3P (3)	0.065/ 0.143
			1.8/ 5.90	BMXXCAUSBH018	0.065/ 0.143

(1) M251 controllers are supplied with:


- a removable screw terminal block for connecting the power supply.
- a BR2032 button cell backup battery.

(2) Each M251 logic controller has an embedded USB mini-B programming port.

(3) Unshielded cable without grounding. To be used only for temporary connections. For permanent connections, use the reference BMXXCAUSBH018 programming cable.

Hardware control platforms

Modicon M258 logic controller

Applications		General machine control: ☐ Packaging ☐ Conveying ☐ Hoisting ☐ ...							
		42 digital I/O	42 digital I/O	42 digital I/O + 4 analog inputs	42 digital I/O + 4 analog inputs	42 digital I/O	66 digital I/O + 4 analog inputs		
									
User memory	RAM	64 MB (program + data)		64 MB (program + data)					
	Flash	128 Mbytes		128 Mbytes					
Typical Boolean instruction time		22 ns		22 ns					
User program size		128 program K instructions		128 program K instructions					
Power supply		24 V ---		24 V ---					
Channel connection		With removable spring terminal blocks (supplied)		With removable spring terminal blocks (supplied)					
Inputs	Digital	26 x 24 V --- inputs including 8 counter inputs (100 kHz)		26 x 24 V --- inputs including 8 counter inputs (100 kHz)				38 x 24 V --- inputs including 8 counter inputs (100 kHz)	
	Analog	—		4 inputs + 10 V/- 10 V, 4-20 mA/0-20 mA, 12-bit resolution		—		4 inputs + 10 V/- 10 V, 4-20 mA/0-20 mA, 12-bit resolution	
Digital outputs	Transistor	16 outputs (0.5 A) including 4 reflex outputs		16 outputs (0.5 A) including 4 reflex outputs		4 reflex outputs (0.5 A)		28 outputs (0.5 A) including 4 reflex outputs	
	Relay	—		—		12		—	
Built-in communication ports	USB-B mini-port	Programming port for SoMachine software		Programming port for SoMachine software					
	USB-A port	Connection of a USB memory stick for transferring programs, data files, firmware updates		Connection of a USB memory stick for transferring programs, data files, firmware updates					
	RJ45 port (MBS)	RS232 serial link, RS485 serial link (supplies 250 mA, 5 V for HMI power supply) Protocols: Master/Slave Modbus ASCII/RTU, ASCII (character string)		RS232 serial link, RS485 serial link (supplies 250 mA, 5 V for HMI power supply) Protocols: Master/Slave Modbus ASCII/RTU, ASCII (character string)					
	SUB-D connector (male 9-way) (CAN0)	—		—		Master CANopen bus (63 slaves)			
	RJ45 port (Ethernet)	Ethernet TCP IP, Web Server, FTP, Ethernet Modbus TCP		Ethernet TCP IP Modbus slave, Web Server, FTP					
Optional communication ports		—		2 PCI slots available on controller for optional communication modules TM5 PC●●● (1): ☐ Modbus or ASCII serial link ☐ connection to Profibus DP bus (slave)					
Logic controller type		TM258LD42DT	TM258LF42DT	TM258LD42DT4L	TM258LF42DT4L	TM258LF42DR	TM258LF66DT4L		
Pages		2/50		2/50					

(1) To be ordered separately, see page 4/10.





Modicon M258 logic controller

2

The Modicon M258 logic controller is a compact, high-performance and fully expandable PLC. It forms a part of Flexible Machine Control approach, a key component of MachineStruxure™, which brings flexibility and gives an optimised control solution.

This PLC is designed for machine manufacturers (OEMs) focusing on applications such as packaging, hoisting, conveying and storage, textiles and woodworking, hoisting, etc. It offers high-performance solutions for speed control, counting, axis control and communication functions.

Performance

In terms of performance, the Modicon M258 logic controller has a Dual-Core processor:

- Core 1 is dedicated exclusively to managing program tasks and offers the maximum resources for real-time execution of the application code.
- Core 2 is dedicated to executing communication tasks, which then have no further impact on the application execution performance.

With an execution speed of **22 ns** for a Boolean instruction i.e. more than **45,000 Boolean instructions** per ms, the capacity to manage up to **2400 I/O**, a **64 MByte** RAM memory that can store data and programs as well as a **128 MByte** Flash memory for application and data backup.

In developing the Modicon M258 logic controller, the cost aspect was taken into account, the CPUs are equipped as standard with:

- 42 or 66 digital I/O
- Embedded serial link and Ethernet port
- 4 analog inputs (TM258●●●●4L references)

Development and technology

The Modicon M258 logic controller has been developed to minimize the costs of assembly, cabling, commissioning and maintenance.

To this end:

- the modules have removable terminals.
- the electrical connections are made on spring terminals, speeding up the wiring process and also avoiding the need for periodic retightening. In addition, each terminal has a test point for a voltage sensing device.
- The embedded serial link and Ethernet port on the Modicon M258 logic controller have an RJ45 connection at 45° for quick visible connection of your communication channels.
- The modularity of the various bases and expansion modules has been optimized in order to reduce significantly the number of references to be ordered and assembled, while realizing a minimum investment in your configuration is necessary, thanks to a capacity of 2 to 42 channels per expansion module.
- Mechanical assembly of the various parts has been designed to save time during assembly.

Software configuration

Configuration and programming of M258 controllers and equipment in Schneider Electric's "Flexible Machine Control" concept are both designed to cut costs and optimize machine performance.

Schneider Electric's **SoMachine** software platform can be used to program M258 controllers using:

- IEC 61131-3 programming languages: Instruction List (IL), Ladder Diagram (LD), Function Block Diagram (FBD), Sequential Function Chart/Grafset (SFC) and Structured Text (ST)
- CFC (Continuous Function Chart) language.

PLCopen function blocks are used for managing motion control and axis control on your machines.


See page 5/2.

Integration in the Schneider Electric product offer


Combined with other products dedicated to machine manufacturers in the Schneider Electric offer, such as ATV variable speed drives, Lexium servo drives, Magelis HMI terminals, TeSys motor starters and contactors, the Modicon M258 logic controller is a must-have element in machine architectures.




SoMachine software platform

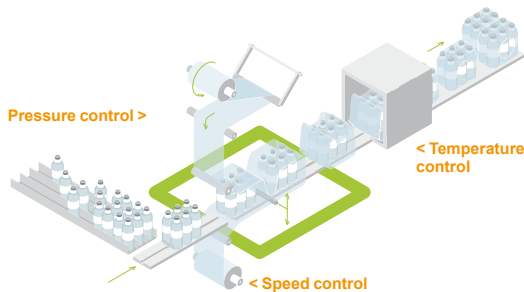

Analog functions

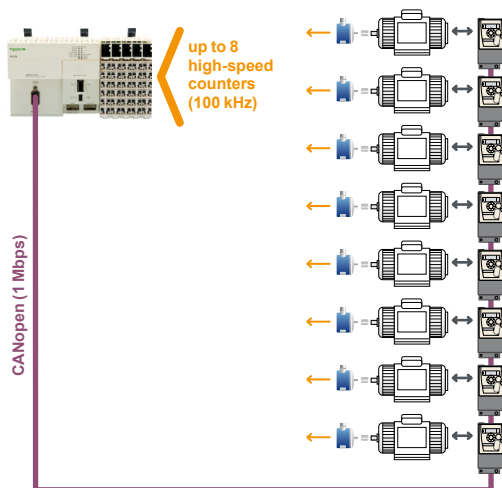

High-speed counter function (one-phase or two-phase)

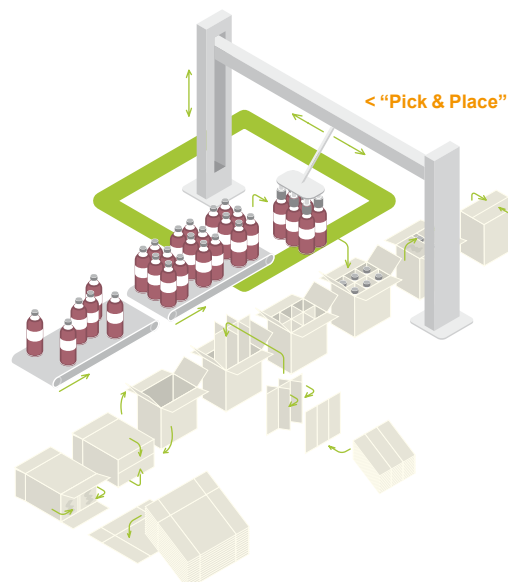

Position control function

Functions

Analog functions

For machines that require functions to process data issued by analog sensors/actuators (voltage or current), temperature sensors or PID control sensors, a complete range of expansion modules as well as advanced programming functions are included in the Modicon M258 logic controller offer.

In order to minimize the number of product references of your machines, optimize assembly time and cut costs, M258 logic controllers with the reference **TM258L●●●●4L** include as standard 4 voltage or current analog inputs with 12-bit resolution.

The different expansion modules are available in 2, 4, 6 or 8-channel versions and with either 12 or 16-bit resolution.

The powerful performance of the M258 logic controller enables up to 200 analog I/O and/or temperature modules to be connected, thus extending the limits of machine requirements.

High-speed counter function (HSC)

In order to meet requirements for machine productivity, the Modicon M258 logic controller has 8 embedded high-speed counters with a counting frequency of 100 kHz for each channel as well as 4 reflex outputs. The availability of these embedded counters and also the presence of the Master CANopen link in **TM258L●●●●** controllers makes it quick and easy to create low-cost, high-performance multi-axis functions that suit the machines' limitations.

With the availability of "PLCopen" function blocks specific to the motion control functions in the SoMachine software, you can be sure that developing your applications will be quick and reliable.

Moreover, a complete range of high-speed counter modules is available so you can adapt your configuration to your machine's specific requirements.

Position control function

Several options are offered in terms of position control:

- Either creating a sequence in Lexium 32 servo drives, with communication with the M258 logic controller achieved by the use of digital I/O
- Or creating an application in the M258 logic controller and controlling Lexium 32 servo drives and/or SD3●● steppers via the integrated Master CANopen link available on **TM258L●●●●** bases.

Communication functions

Ethernet

M258 logic controller references have an embedded RJ45 Ethernet port (10/100 Mbps, MDI/MDIX) with Ethernet TCP Modbus, Ethernet IP Device, SoMachine on Ethernet, UDP, TCP and SNMP protocols.

In addition, the M258 logic controllers have an embedded Web Server and FTP Server.

As well as the default address based on the MAC address, it is possible to assign a controller IP address via a DHCP server or via a BOOTP server.

CANopen

Depending on the reference, M258 logic controllers have an embedded CANopen master.

The link can be configured between 125 Kbps and 1 Mbps and supports up to 63 slaves.

Architectures based on CANopen can be used to distribute I/O modules as close to the sensors and actuators as possible, thus reducing wiring costs and times, and to communicate with different devices such as variable speed drives, servo drives, etc. The CANopen configurator is integrated in the SoMachine software and can also be used to import standard description files in EDS format.

Modbus serial link

M258 logic controllers have as standard a serial link that can be configured as either RS232/RS485 and incorporates two used protocols on the market:

- Master or Slave Modbus ASCII/RTU
- Character string (ASCII)

Profibus DP (Decentralized Peripherals)

The Modicon **TM258LD42DT4L**, **TM258LF42DT4L**, **TM258LF42DR** and **TM258LF66DT4L** logic controllers equipped with the **TM5PCDPS** communication module can be connected to Profibus bus: for controlling decentralized sensors, actuators or PLCs via a central master controller

2



TM258LD42DT logic controller



TM258LF42DT logic controller



TM258LD42DT4L logic controller

TM5PC communication modules



TM5C compact blocks



TM5SD digital modules



TM5SMM6D2L digital/Analog module



TM5SA and TM5SEAI5G analog modules



TM5SE Expert modules



TM5SPD Common Distribution modules



TM5SPS Power Distribution modules



TM5SBET1 transmitter module



TM5SBER2 receiver module

Presentation

Range

The M258 logic controller range is divided into two controller sizes:

- TM258LD42DT and TM258LF42DT are 175 mm wide.
- TM258LD42DT4L, TM258LF42DT4L, TM258LF42DR, and TM258LF66DT4L are at least 237.5 mm wide as they have two free PCI slots for optional Modicon TM5 communication modules (Modbus or ASCII serial link, and connection to Profibus DP bus).

The M258 logic controller range is completed by an expansion module offer:

- Modicon TM5 Compact blocks
- Modicon TM5 Digital modules
- Modicon TM5 Digital/Analog module
- Modicon TM5 Analog modules
- Modicon TM5 Expert modules
- Modicon TM5 Common Distribution modules
- Modicon TM5 Power Distribution modules
- Modicon TM5 Transmitter and receiver modules

Functions

The main component in a system is the controller: 6 M258 logic controller models are offered to cover different control requirements (pressure, temperature, counting, speed, position control, motion, etc.).

M258 logic controllers and I/O modules are programmed with the SoMachine software.

Reference	Embedded functions
TM258LD42DT, TM258LD42DT4L	■ 42 digital I/O including 8 high-speed counters (100 kHz) ■ Depending on the reference, 4 voltage/current analog inputs can be added
TM258LF42DT, TM258LF42DT4L, TM258LF42DR, TM258LF66DT4L	■ 42 or 66 digital I/O including 8 high-speed counters (100 kHz) ■ Depending on the reference, 4 voltage/current analog inputs can be added ■ Up to 16 independent axes ■ CANopen master

M258 controllers have two groups of high-speed I/O with, for each group:

- Four sink type high-speed inputs (up to 100 KHz), 2 standard inputs and 2 source type high-speed outputs (up to 100 KHz) dedicated to HSC or PWM functions
- A high-speed input which can be used as an "Encoder capture input"
- Two commons for the inputs
- One common for the outputs
- A power supply (24 V $\pm$) consisting of 3 units:
 - One for the CPU
 - One for the high-speed I/O modules
 - One for other modules (internal I/O Bus)

Conformity to standards

Type		Performance
Surge immunity 24 VDC circuit	EN/IEC 61000-4-5	1 kV in common mode 0.5 kV in differential mode
Surge immunity 230 VAC circuit	EN/IEC 61000-4-5	2 kV in common mode 1 kV in differential mode
Induced electromagnetic field	EN/IEC 61000-4-6	10 Veff (0.15...80 MHz)
Conducted emission	EN 55011 (IEC/CISPR11)	150...500 kHz, quasi peak 79 dB μ V 500 kHz...30 MHz, quasi peak 73 dB μ V
Radiated emission	EN 55011 (IEC/CISPR11)	30...230 MHz, 10 m @ 40 dB μ V/m 230 MHz...1 GHz, 10 m @ 47 dB μ V/m

Assembly and mounting

The components of this system have been designed for simple interlocking mechanical assembly.

An 8-way expansion bus connection (2 for the power supply, 2 for the bus and 4 for the data) is used to distribute data and the power supply when assembling the components: the M258 controller with compact blocks and modules (digital, digital/analog, analog, Expert, common distribution, power distribution, expansion bus). The elements which make up the system are mounted and dismantled on a symmetrical rail using the locking levers located on top of each device.

Wiring and maintenance of devices is simplified since they are fitted with removable spring terminals. The spring terminals are undone by pressing a locking tab.

The system is integrated into communication networks: the connectors (RJ45, USB, mini-USB and SUB-D type depending on the model) are accessible, as they are located on the controller front panels.

Local or remote architecture


Local I/O

A PLC configuration can be local or remote. It consists of an M258 controller with its embedded input and output channels, used in conjunction with compact blocks and/or modules which are used to increase the number of channels and/or "Application-specific" functions.


- Compact blocks represent a way of adding a large number of I/O with a single reference. This possibility reduces both the cost per channel, and also assembly times. These compact blocks are available in 4 references offering a high level of flexibility in configurations.
- I/O modules (a combination of a bus base, an electronic module and a terminal block) complete this configuration and, being modular with between 2 and 12 channels, make it possible to adjust the number of channels to exactly that required. Addition of digital or analog modules, temperature or high-speed modules increases the processing capabilities of applications.

Configuration of local I/O

- 1 XBTGT supervision graphic touch screen terminal
- 2 M258 controller
- 3 Compact blocks or I/O modules

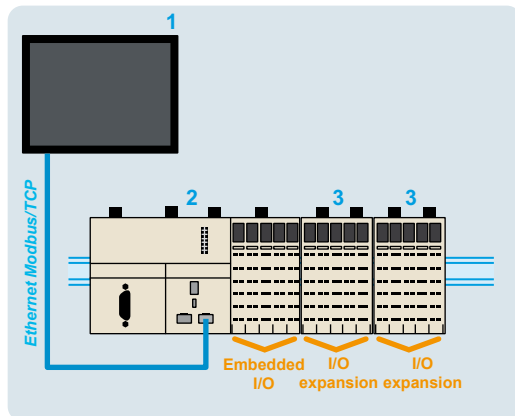

Local I/O

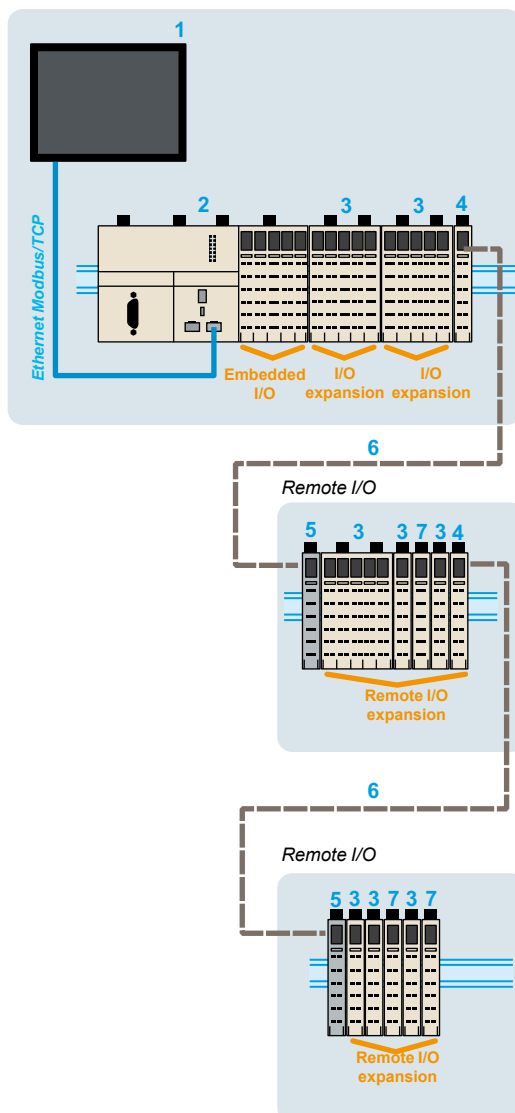

Remote I/O

Because of its backplane bus management, the TM5 system can be used to control I/O remotely.

The same modules can be used in either a local and/or remote configuration, linked together with expansion bus cables.

The total maximum distance between 2 remote islands is 100 m and the maximum number of islands is 25, i.e. a total distance of up to 2500 m.

This function gives a high level of flexibility, while retaining **synchronization of data acquisition**, since the expansion modules are on the same backplane bus.

Configuration of remote I/O

- 1 XBTGT supervision graphic touch screen terminal
- 2 M258 controller
- 3 Compact blocks or I/O modules
- 4 Transmitter modules
- 5 Receiver modules
- 6 TM5 expansion bus cables
- 7 Common distribution modules

Communication

M258 logic controllers have the following built-in communication ports:

References	Communication ports	Use
TM258LD42DT, TM258LD42DT4L	RJ45 Configurable as RS232 or RS485	ASCII or RTU exchange with Modbus communication protocol
	1 x RJ45 (MDI/MDIX port)	☐ FTP server ☐ Web server ☐ Modbus TCP server ☐ Modbus TCP client ☐ Manager SoMachine ☐ SNMP ☐ Ethernet IP device ☐ Modbus device
	1 x USB-A	Connection of a USB memory stick for transferring (uploading/downloading) programs, data and/or firmware
	1 x mini-USB	Programming port (480 Mbps)
	2 PCI slots for communication modules = 2 x 9-way male SUB-D	Addition of optional communication modules for a serial link and a connection on the bus Profibus DP (1)
TM258LF42DT, TM258LF42DT4L, TM258LF42DR, TM258LF66DT4L	RJ45 Configurable as RS232 or RS485	ASCII or RTU exchange with Modbus communication protocol
	1 x RJ45 (MDI/MDIX port)	☐ FTP server ☐ Web server ☐ Modbus TCP server ☐ Modbus TCP client ☐ Manager SoMachine ☐ SNMP ☐ Ethernet IP device ☐ Modbus device
	1 x USB-A	Connection of a USB memory stick for transferring (uploading/downloading) programs, data and/or firmware
	1 x mini-USB	Programming port (480 Mbps)
	1 x 9-way male SUB-D	Master CANopen connection
	2 PCI slots for communication modules = 2 x 9-way male SUB-D	Addition of optional communication modules for a serial link and a connection on the bus Profibus DP (2)

Embedded Ethernet

M258 logic controllers have an embedded Ethernet link via a direct connection to their RJ45 port.


- ☐ Speed: "10 BaseT" and "100 BaseTX" with auto-negotiation
- ☐ RJ45 port (MDI/MDIX): automatic adaptation to a straight or crossed cable

References	Protocols	Number of connections
TM258LD42DT, TM258LD42DT4L, TM258LF42DT, TM258LD42DT4L, TM258LF42DR, TM258LF66DT4L	Modbus server	8
	Modbus device	2
	SoMachine	3 (3)
	Ethernet IP device	16
	FTP server	4
	Web server	10

(1) Only on TM258LD42DT4L.

(2) Only on TM258LF42DT4L, TM258LF42DR and TM258 LF66DT4L.


(3) The Oscilloscope function uses one connection.

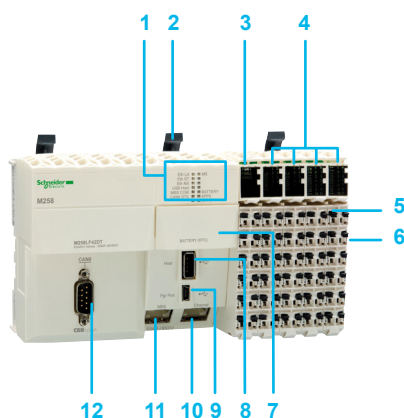

Description

The TM258LD42DT and TM258LF42DT logic controllers comprise:

- 1 A display block with:
 - 4 controller status LEDs (RUN/MS, BATTERY, APP0 and APP1)
 - 6 built-in communication port status LEDs (*Eth* LA, *Eth* ST, *Eth* NS, USB Host, MBS COM, CAN 0 STS)
- 2 Locking lever for mounting/dismounting on $\perp$ symmetrical rail.
- 3 A 24 V $\equiv$ power supply module with removable terminal block and locking lever, display block and slot for a label.
- 4 I/O modules, each one with: a removable terminal block with locking lever, a display block showing the I/O states and a slot for a label-holder.
- 5 Removable terminal block with locking lever for locking/unlocking.
- 6 On the side, an expansion bus connection for the link with the next module.
- 7 A slot for the RTC (Real Time Clock) battery.
- 8 A USB-A connector (marked Host) for connection of a USB memory stick for transferring programs, data or firmware updates.
- 9 A USB-B mini-connector (marked Pgr Port) for connection to the programming PC.
- 10 An RJ45 connector (marked Ethernet) for connection to the Ethernet network and/or connection to the Magelis XBT GT graphic terminal.
- 11 An RJ45 connector (marked MBS) for the RS232 or RS485 serial link.
- 12 A 9-way male SUB-D connector, marked CAN 0, for connection to the CANopen bus (TM258 LF42DT only).

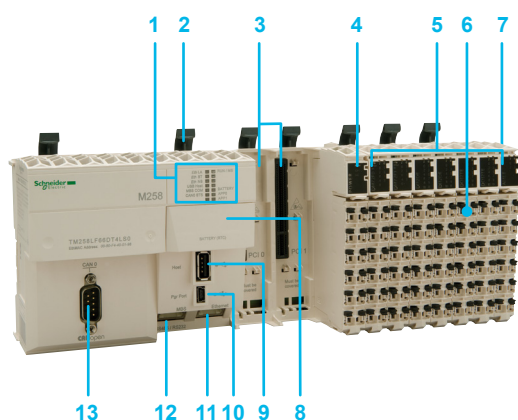

The TM258LD42DT4L/LF42DT4L/LF42DR/LF66DT4L logic controllers comprise:

- 1 A display block with:
 - 4 controller status LEDs (RUN/MS, BATTERY, APP0 and APP1)
 - 6 built-in communication port status LEDs (*Eth* LA, *Eth* ST, *Eth* NS, USB Host, MBS COM, CAN 0 STS)
- 2 Locking lever for mounting/dismounting on $\perp$ symmetrical rail.
- 3 Two free PCI slots for the communication module.
- 4 A 24 V $\equiv$ power supply module with removable terminal block and locking lever, display block and slot for a label.
- 5 I/O modules, each one with: a removable terminal block with locking lever, a display block showing the I/O states and a slot for a label-holder.
- 6 Removable terminal block with locking lever for locking/unlocking.
- 7 On the side, an expansion bus connection for the link with the next module.
- 8 A slot for the RTC (Real Time Clock) battery.
- 9 A USB-A connector (marked Host) for connection of a USB memory stick for transferring programs, data or firmware updates.
- 10 A USB-B mini-connector (marked Pgr Port) for connection to the programming PC.
- 11 An RJ45 connector (marked Ethernet) for connection to the Ethernet network and/or connection to the Magelis XBT GT graphic terminal.
- 12 An RJ45 connector (marked MBS) for the RS232 or RS485 serial link.
- 13 A 9-way male SUB-D connector, marked CAN 0, for connection to the CANopen bus (TM258LF42DT4L, TM258LF42DR and TM258LF66DT4L only).

References

Logic controllers, 24 V $\overline{\text{---}}$ power supply (1)

Nbr. of I/O	Inputs	Outputs	Built-in communication ports	Reference	Weight kg/lb
42 I/O	■ 26 x 24 V $\overline{\text{---}}$ digital inputs including 8 counter inputs (100 kHz)	■ 16 transistor digital outputs (0.5 A) including 4 reflex outputs	☐ 1 RJ45 port: Ethernet ☐ 1 USB-A port: program transfer ☐ 1 USB-B mini-port: software programming ☐ 1 RJ45 port: RS232/RS485 serial link	TM258LD42DT	0.500/ 1.102
			☐ 1 RJ45 port: Ethernet ☐ 1 SUB-D port (9-way male): CANopen master ☐ 1 USB-A port: program transfer ☐ 1 USB-B mini-port: software programming ☐ 1 RJ45 port: RS232/RS485 serial link	TM258LF42DT	0.550/ 1.213
42 + 4 I/O	■ 26 x 24 V $\overline{\text{---}}$ digital inputs including 8 counter inputs (100 kHz) ■ 4 analog inputs 10 V/- 10 V, 4-20 mA/0-20 mA, 12-bit resolution	■ 16 digital transistor outputs (0.5 A) including 4 reflex outputs	☐ 1 RJ45 port: Ethernet ☐ 1 USB-A port: program transfer ☐ 1 USB-B mini-port: software programming ☐ 1 RJ45 port: RS232/RS485 serial link ☐ + 2 free PCI slots for optional communication module (2): RS232/RS485 serial link and Profibus DP bus	TM258LD42DT4L	0.770/ 1.698
			☐ 1 RJ45 port: Ethernet ☐ 1 SUB-D port (9-way male): CANopen master ☐ 1 USB-A port: program transfer ☐ 1 USB-B mini-port: software programming ☐ 1 RJ45 port: RS232/RS485 serial link ☐ + 2 free PCI slots for optional communication modules (2): RS232/RS485 serial link and Profibus DP bus	TM258LF42DT4L	0.770/ 1.698
42 I/O	■ 26 x 24 V $\overline{\text{---}}$ digital inputs including 8 counter inputs (100 kHz)	■ 4 digital transistor (reflex) outputs (0.5 A) ■ 12 relay outputs	☐ 1 RJ45 port: Ethernet ☐ 1 SUB-D port (9-way male): CANopen master ☐ 1 USB-A port: program transfer ☐ 1 USB-B mini-port: software programming ☐ 1 RJ45 port: RS232/RS485 serial link ☐ + 2 free PCI slots for optional communication modules (2): RS232/RS485 serial link and Profibus DP bus	TM258LF42DR	0.800/ 1.764
66 + 4 I/O	■ 38 x 24 V $\overline{\text{---}}$ digital inputs including 8 counter inputs (100 kHz) ■ 4 analog inputs + 10 V/- 10 V, 4-20 mA/0-20 mA, 12-bit resolution	■ 28 digital transistor outputs (0.5 A) including 4 reflex outputs	☐ 1 RJ45 port: Ethernet ☐ 1 SUB-D port (9-way male): CANopen master ☐ 1 USB-A port: program transfer ☐ 1 USB-B mini-port: software programming ☐ 1 RJ45 port: RS232/RS485 serial link ☐ + 2 free PCI slots for optional communication modules (2): RS232/RS485 serial link and Profibus DP bus	TM258LF66DT4L	0.800/ 1.764

(1) The Modicon M258 logic controllers require a power supply with a nominal voltage of 24 V $\overline{\text{---}}$, Separated Extra Low Voltage (SELV-rated) according to IEC 61140.

The SELV-rating means that SELV isolation is provided between the electrical input and output of the power supply.

(2) To be ordered separately see page 4/10.



TM258LD42DT



TM258LF42DT



TM258LD42DT4L



TM258LF42DT4L



TM258LF42DR



TM258LF66DT4L



TM5ACTLC100




TM5ACTCH100



TM5ACLITW1



TM5ACLT1



TCSXCNAMUM3P

References					
Accessories					
Type	Used for	Colour	Sold in lots of	Unit reference	Weight kg/ lb
Plain text cover holder (label-holder)	Marking the terminal blocks on the I/O channels	Transparent	100	TM5ACTCH100	0.002/ 0.004
Plain text cover holder locking clip (Order with plain text cover holder TM5ACTCH100)	Locking plain text cover holder TM5ACTCH100	Transparent	100	TM5ACTLC100	0.001/ 0.002
Precut legend strips of paper	Plain text cover holder TM5ACTCH100	White	100	TM5ACTLS100	0.001/ 0.002
Coloured plastic identifiers	Labelling 16 connection channel terminals	White	1	TM5ACLITW1	0.015/ 0.033
		Red	1	TM5ACLITR1	0.015/ 0.033
		Blue	1	TM5ACLITB1	0.015/ 0.033
Metal tool	Inserting/removing TM5ACLIT●1 identifiers	Black	1	TM5ACLT1	0.030/ 0.066
Connection cables					
Description	Use from	to	Length m/ ft	Reference	Weight kg/ lb
Software programming cable Baud rate: 480 Mbps max. Protocol: Modbus, HTTP, FTP, Codesys or virtual, non-isolated	PC USB port	USB mini-port on M258 controllers	3/ 9.84	TCSXCNAMUM3P	0.065/ 0.143
RS485 serial link cables Modbus protocol	SUB-D port (25-way) on Small Panel compact display units: XBT N401, XBT N410, XBT R410, XBT R411, XBT GT2... GT7	RJ45 port on M258 controllers	1.8/ 5.90	XBTZ938	0.230/ 0.507
	RJ45 port on XBT GT graphic touch screen terminals	RJ45 port on M258 controllers	2.5/ 8.20	XBTZ9980	0.230/ 0.507
RS232 serial link cables Character mode	SUB-D port (9-way female) on DTE equipment (1): printer, hand-held bar code reader, etc.	RJ45 port on M258 controllers	3/ 9.84	TCSMCN3M4F3C2	0.150/ 0.331
	SUB-D port (9-way female) on DCE equipment (2): GSM modem	RJ45 port on M258 controllers	3/ 9.84	TCSMCN3M4M3S2	0.150/ 0.331

(1) DTE: Data Terminal Equipment.

(2) DCE: Data Communication Equipment.

Hardware control platforms

Applications		General machine control with motion: Packaging Conveying ...
		42 digital I/O
		
User memory	RAM	64 MB (program + data)
	Flash	128 MB
Typical Boolean instruction time		22 ns
User program size		128 program Kinstructions
Power supply		24 V ~
Channel connection		Via removable spring terminal blocks (supplied)
Inputs	Digital	26 x 24 V ~ inputs including 8 counter inputs (100 kHz)
	Analog	–
Digital outputs	Transistor	16 outputs (0.5 A) including 4 reflex outputs
	Relay	–
Built-in communication ports	USB-B mini-port	Programming port for SoMachine V2.0 software
	USB-A port	Connection of a USB memory stick for transferring programs, data files, firmware updates
	RJ45 port (MBS)	RS232 serial link RS485 serial link (supplies 250 mA, 5 V for HMI power supply) Protocols: Modbus ASCII/RTU Master/Slave, ASCII (character string)
	SUB-D connector (9-way male) (CAN0)	CANopen bus master (63 slaves)
	SUB-D connector (9-way male) (CAN1)	CANmotion bus master (8 synchronized axis or 63 slaves)
	SUB-D connector (15-way female) (Encoder)	Encoder input (incremental or SSI)
	RJ45 port (Ethernet)	Ethernet TCP IP, Web Server, FTP, Ethernet Modbus TCP
Optional communication ports		–
Motion controller type		LMC058LF42
Pages		2/62



General machine control with motion: ☐ Packaging ☐ Conveying ☐ Machine control with motion	
42 digital I/O + 4 analog inputs	
	
64 MB (program + data)	
128 MB	
22 ns	
128 program Kinstructions	
24 V $\overline{\text{---}}$	
Via removable spring terminal blocks (supplied)	
26 x 24 V $\overline{\text{---}}$ inputs including 8 counter inputs (100 kHz)	
4 inputs + 10 V/- 10 V, 4-20 mA/0-20 mA 12-bit resolution	
16 outputs (0.5 A) including 4 reflex outputs	
—	
Programming port for SoMachine V2.0 software	
Connection of a USB memory stick for transferring programs, data files, firmware updates	
RS232 serial link, RS485 serial link (supplies 250 mA, 5 V for HMI power supply) Protocols: Modbus ASCII/RTU Master/Slave, ASCII (character string)	
CANopen bus master (63 slaves)	
CANmotion bus master (8 synchronized axis or 63 slaves)	
Encoder input (incremental or SSI)	
Ethernet TCP IP Modbus slave, Web Server, FTP	
2 PCI slots available on controller for optional communication modules TM5PC●●● (1): ☐ Modbus or ASCII serial link ☐ connection to Profibus DP bus (slave)	
LMC058LF424	
2/62	
<i>(1) To be ordered separately, see page 4/10.</i>	





Modicon LMC058 motion controller

2

The Modicon LMC058 motion controller is the optimum solution for axis control and positioning, including automation functions. It forms a part of Flexible Machine Control approach, a key component of MachineStruxure™, which brings you maximum flexibility and ensures the most optimised control solution. The Modicon LMC058 motion controller meets the needs of a wide range of applications in several business sectors.

This motion controller is designed for machine manufacturers (OEMs) who require synchronized axes, focusing on applications such as packaging, conveying and storage machines, metal and wood working machines, etc. and offers high-performance solutions for velocity control, counting, axis control and communication functions.

To this end, the LMC058 master motion controller includes as standard:

- A CANopen master
- A CANmotion master dedicated to control of up to 8 synchronized axes, with a performance of 2 ms for 4 axes

With Motion controllers Modicon LMC058, Lexium 32 and Lexium SD3 drives, and BSH and BDH servo motors, Schneider Electric offers a complete, high-performance and cost-effective solution.

Applications

The Modicon LMC058 motion controller performs axis synchronization and coordination, via a fieldbus, for applications requiring control of up to 8 synchronized axes.

It integrates the standard motion control functions:

- Velocity control and torque control
- Relative or absolute positioning
- Cam profiles for slave axes and control of programmable cam switches
- Virtual axes
- Electronic gearing function for velocity and position, linear and circular interpolations (2½D)
- Master axis using an external encoder
- Distance measurement and position capture on high-speed (30 µs) digital input

This is specifically designed for applications such as:

- Material handling machines (conveyors, palletizers, storage and retrieval systems, etc.) and transfer machines (cranes, etc.)
- Assembly machines (tool fixing, clamping, etc.)
- Inspection and quality control machines
- Packaging machines working "on the fly" (flying shear, printing, marking, etc.)
- Wood and metal working machines

Performance

In terms of performance, the Modicon LMC058 motion controller has a Dual-Core processor:

- Core 1 is dedicated exclusively to managing program tasks and offers the maximum resources for real-time execution of synchronized axis control and the application code.
- Core 2 is dedicated to executing communication tasks, which then have no further impact on the application execution performance.

Execution of the Motion task is synchronized with the CANmotion bus cycle time. This task calculates the position of the synchronized axes and is programmed with SoMachine software, which is used to program Modicon LMC058 motion controller using:

- IEC 61131-3 programming languages: Instruction List (IL), Ladder Diagram (LD), Function Block Diagram (FBD), Sequential Function Chart/Grafset (SFC) and Structured Text (ST)
- CFC (Continuous Function Chart) language.

See page 5/2.

The ease of use of PLCopen function blocks significantly reduces the time taken to program motion control and control independent and synchronized axes on machines.

The ability to combine motion functions with standard automation functions offers both maximum flexibility and a high level of performance. The LMC058 master motion controller is able to control synchronization of real, remote and virtual axes.



SoMachine software platform

Performance (continued)

To improve the performance and reliability of your machines, the LMC058 motion controller has a 15-way SUB-D connection for a master encoder (incremental or SSI).

With an execution speed of **22 ns** for a Boolean instruction i.e. more than **45,000 Boolean instructions** per ms, the capacity to manage up to **2400 I/O**, a **64 MB** RAM that can store data and programs as well as a **128 MB** Flash memory for application and data backup, the Modicon LMC058 motion controller greatly enhances the machine's capabilities.

In developing the Modicon LMC058 motion controller, the cost aspect was taken into account, and the CPUs are equipped as standard with:

- 42 digital I/O
- Embedded serial link and Ethernet port
- 4 analog inputs (reference LMC058LF424)
- A CANopen master
- A CANmotion master

Development and technology

In its characteristics, the Modicon LMC058 motion controller has been developed to minimize the costs of assembly, cabling, commissioning and maintenance.

To this end:

- Each module have removable terminals.
- The electrical connections are made on spring terminals, speeding up the wiring process and also avoiding the need for periodic retightening. In addition, each terminal has a test point for a voltage sensing device.
- The embedded serial link and Ethernet port on the Modicon LMC058 motion controller have an RJ45 connection at 45° for quick visible connection of the communication channels.
- The modularity of the various bases and expansion modules has been optimized in order to significantly reduce the number of references to be ordered and assembled, while ensuring the minimum investment in your configuration is necessary, thanks to a capacity of between 2 and 42 channels per expansion module.
- Mechanical assembly of the various parts has been designed to save a considerable amount of time during assembly.

Software configuration

Configuration and programming of each Modicon LMC058 motion controller and equipment in Schneider Electric's "Flexible Machine Control" concept are both designed to cut costs and optimize machine performance, using SoMachine.

To reduce the configuration time of device, a selection of function blocks is available in the "Motion Library":

- Library for ATV on CANopen
- Lexium library for Lexium 32 and Lexium SD3 on CANopen and CANmotion
- Lexium library for the whole ILx range on CANopen

This PLCopen-compliant library consists of administrative function blocks (read/write parameters, states, etc.) and single-axis and multi-axis function blocks.

The main functions are as follows:

- Power On, stop, reset
- Relative, absolute or additional positioning
- Continuous positioning (reaching a position at a predefined speed)
- Velocity control
- Velocity profile
- Position profile
- Cam profile
- Electronic gearing
- Phasing
- Programmable cam switch
- Linear or circular interpolation

User library

With SoMachine software, it is very easy to create your own function blocks (user library) to reduce programming times. Creating a user library simplifies the standardization and reuse of programs and also allows the user to protect proprietary information.

Application function blocks (AFB)

This is a library of functions developed specifically by Schneider Electric. It contains application functions currently encountered in applications in the fields of assembly, material handling and cut to length applications. Each function block has a large number of mechanical and application variants.

The use of function blocks:

- Saves programming time
- Saves setup time
- Simplifies reading

The function blocks available in the library are:

- Flying shear
- Rotary knife
- Grouping/ungrouping
- Clamping with torque control
- Etc.

Functions

Analog functions

For machines that require functions to process data issued by analog sensors/actuators (voltage or current), temperature sensors or PID control sensors, a complete range of expansion modules as well as advanced programming functions are included in the Modicon LMC058 motion controller offer.

In order to minimize the number of machine product references, optimize assembly time and cut costs, the LMC058LF424 motion controller includes 4 voltage or current analog inputs with 12-bit resolution as standard.

The different expansion modules are available in 2, 4 or 6-channel versions and with either 12 or 16-bit resolution.

The powerful performance of the LMC058 motion controller enables up to 200 analog I/O and/or temperature modules to be connected, thus extending the limits of machine requirements.

High-speed counter function (HSC)

In order to meet requirements for machine productivity, the LMC058 motion controller has 8 embedded high-speed counters with a counting frequency of 200 kHz for each channel and 4 reflex outputs.

These embedded counters, together with the CANopen master link, make it quick and easy to create cost-effective, high-performance multi-axis functions to suit the machines' limitations.


With the availability of PLCopen function blocks specific to the motion control functions in the SoMachine software, you can be sure that developing your applications will be quick and reliable.

Moreover, a complete range of high-speed counter modules is available so you can adapt your configuration to your machine's specific requirements.


Position control function

Several options are offered in terms of position control:


- Creating a sequence in Lexium 32 servo drives, with communication with the LMC058 motion controller achieved by the use of digital I/O
- Creating an application in the LMC058 motion controller and controlling Lexium 32 drives and servo drives and/or Lexium SD3 stepper drives via the integrated CANopen master link available on LMC058 motion controllers (in this case the Motion tasks are independent axis Motion tasks)
- Creating an application in the LMC058 motion controller and controlling the Lexium 32 drives and servo drives and/or Lexium SD3 stepper drives via the integrated CANmotion master link available on each LMC058 motion controller (in this case the Motion tasks are independent and/or synchronized axis Motion tasks - cam profiles, electronic gearing, interpolation)

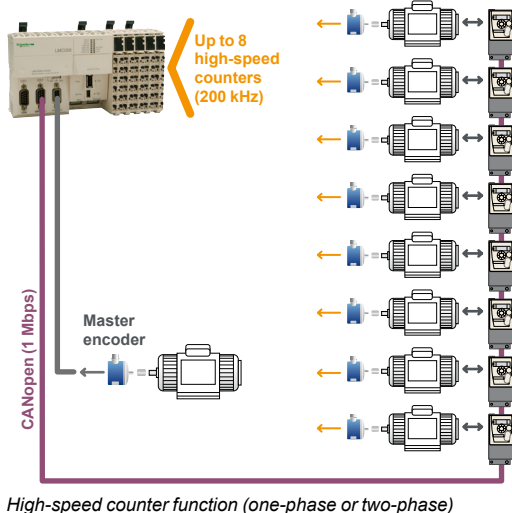

High-speed counter function (one-phase or two-phase)

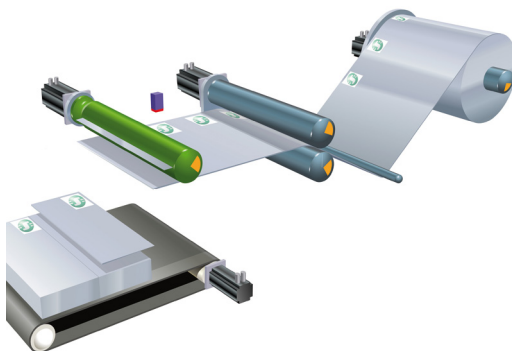

Lexium 32 servo drives: monitoring cutting to length

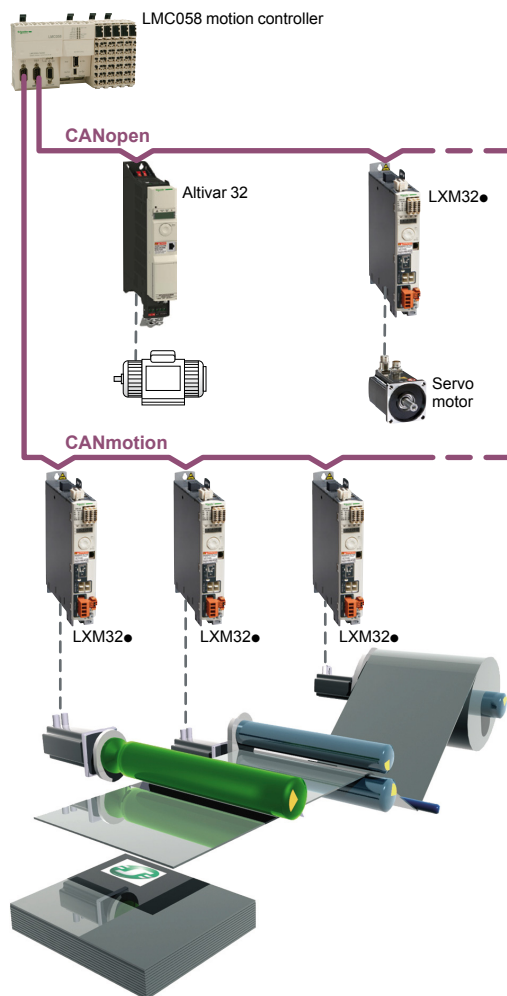

Ethernet communication

Each Modicon LMC058 motion controller reference have an embedded RJ45 Ethernet port (10/100 Mbps, MDI/MDIX) with Ethernet TCP Modbus, Ethernet IP Device, SoMachine on Ethernet, UDP, TCP and SNMP protocols.

In addition, each LMC058 motion controller has an embedded Web Server and FTP Server. As well as the default address based on the MAC address, it is possible to assign a motion controller IP address via a DHCP server or BOOTP server.

CANmotion/CANopen communication

The CANopen machine bus is now very widely used in industry because of its high performance. In accordance with international standard ISO 11898 promoted by the CAN in Automation association of users and manufacturers, it offers a high level of openness and interoperability thanks to its standardized communication and equipment profiles.

CANmotion and CANopen buses use a double shielded twisted pair. Each end of the bus must be equipped with a line terminator.

A staged CANmotion and CANopen connectivity solution reduces costs and optimizes your architecture, thanks to:

- Reduced cabling time
- Greater reliability of the cabling
- Flexibility should you need to add or remove a device

CANmotion

Each Modicon LMC058 motion controller reference has an embedded CANmotion master.

This bus is dedicated to synchronizing the drives (conforming to standard CiA DSP 402, the Device Profile for Drives & Motion Control).

This CANmotion link can be configured between 250 kbps and 1 Mbps, and offers the option of configuring and controlling up to 8 Lexium 32 servo drives and/or Lexium SD3 stepper drives.

The CANmotion bus cycle time ensures that the axis positions will be refreshed. To ensure maximum performance on the motion bus, we recommend using a daisy chain cabling architecture.

CANopen

Each Modicon LMC058 motion controller references has an embedded CANopen master.

This bus is dedicated to expansion of the automation capabilities, such as the I/O, drives, encoders, etc.

The link can be configured between 125 kbps and 1 Mbps and supports up to 63 slaves. Architectures based on CANopen can be used to distribute I/O modules as close to the sensors and actuators as possible, thus reducing wiring costs and times, and to communicate with different devices such as variable speed drives, servo drives, etc.

The CANopen configurator is integrated in the SoMachine software and can also be used to import standard description files in EDS format.

Modbus communication

Each Modicon LMC058 motion controller has a serial link as standard that can be configured as either RS232 or RS485 and incorporates the two of the most commonly used protocols on the market:

- ☐ Modbus ASCII/RTU Master or Slave
- ☐ Character string (ASCII)

Profibus DP (Decentralized Peripherals)

The Modicon LMC 058LF424 motion controller equipped with the **TM5PCDPS** communication module can be connected to Profibus bus for controlling decentralized sensors, actuators or PLCs via a central master controller.

Integration in the Schneider Electric product offer

Combined with other products dedicated to machine manufacturers in the Schneider Electric offer, such as ATV variable speed drives, Lexium servo drives, Magelis HMI terminals, TeSys motor starters and contactors, the Modicon LMC058 motion controller is now a must-have element in machine architectures, with hitherto unrivalled ease and speed of installation.

2



LMC058LF42 motion controller



LMC058LF424 motion controller

TM5PC communication modules



TM5C compact block



TM5SD digital module



TM5SMM6D2L digital/analog module



TM5SA analog module



TM5SE Expert module



TM5SPD Common Distribution module



TM5SPS Power Distribution modules



TM5SBET1 transmitter module



TM5SBER2 receiver module

Presentation

Range

The LMC058 motion controller range is divided into two sizes:

- The LMC058LF42 motion controller is 177 mm wide.
- The LMC058LF424 motion controller is 237.5 mm wide as it has two free PCI slots for optional Modicon TM5 communication modules (Modbus or ASCII serial link, connection to Profibus DP bus).

This range is completed by an extensive expansion module offer:

- Modicon TM5 Compact blocks
- Modicon TM5 Digital modules
- Modicon TM5 Digital/Analog module
- Modicon TM5 Analog modules
- Modicon TM5 Expert modules
- Modicon TM5 Common Distribution modules
- Modicon TM5 Power Distribution modules
- Modicon TM5 Transmitter and receiver modules

Functions

The main component in a system is the motion controller: two LMC058 motion controller models are offered to cover different control requirements (pressure, temperature, counting, velocity, positioning, motion, etc.).

LMC058 motion controllers and I/O modules are programmed using SoMachine software.

Reference	Embedded functions
LMC058LF42	■ 42 digital I/O including 8 high-speed counters (200 kHz) ■ CANopen master ■ CANmotion master
LMC058LF424	■ 42 digital I/O including 8 high-speed counters (200 kHz) ■ 4 voltage/current analog inputs ■ CANopen master ■ CANmotion master

The Modicon LMC058 motion controllers have two groups of high-speed I/O with, for each group:

- Four sink type high-speed inputs (up to 200 kHz), 2 standard inputs and 2 source type high-speed outputs (up to 100 kHz) dedicated to HSC or PWM functions
- A high-speed input which can be used as an "Encoder capture input"
- Two commons for the inputs
- One common for the outputs
- A power supply (24 V $\pm$ 5%) consisting of 3 units:
 - One for the CPU
 - One for the high-speed I/O modules
 - One for other modules (internal I/O Bus).

Conformity to standards

Type	Performance	
Surge immunity 24 VDC circuit	EN/IEC 61000-4-5	1 kV in common mode
		0.5 kV in differential mode
Surge immunity 230 VAC circuit	EN/IEC 61000-4-5	2 kV in common mode
		1 kV in differential mode
Induced electromagnetic field	EN/IEC 61000-4-6	10 Veff (0.15...80 MHz)
Conducted emission	EN 55011 (IEC/CISPR11)	150...500 kHz, quasi peak 79 dBμV
		500 kHz...30 MHz, quasi peak 73 dBμV
Radiated emission	EN 55011 (IEC/CISPR11)	30...230 MHz, 10 m @ 40 dBμV/m
		230 MHz...1 GHz, 10 m @ 47 dBμV/m

Assembly and mounting

The components of this system have been designed for simple interlocking mechanical assembly.

An 8-way expansion bus connection (2 for the power supply, 2 for the bus and 4 for the data) is used to distribute data and the power supply when assembling the components: the LMC058 motion controller with compact blocks and modules (Digital, analog, Expert, Common Distribution, Power Distribution, bus expansion). Each element which make up the system is mounted on a symmetrical rail using the locking levers located on top of the device.

Wiring and maintenance of devices is simplified by the use of removable spring terminals. The spring terminals are undone by pressing a locking tab.

The system is integrated into communication networks: the connectors (RJ45, USB, mini-USB and SUB-D type) are accessible, as they are located on the motion controller front panels.

Local or remote architecture

Local I/O


A PLC configuration can be local or remote. It consists of an LMC058 motion controller with its embedded input and output channels, used in conjunction with compact blocks and/or expansion modules which are used to increase the number of channels and/or application-specific functions.

- Compact blocks represent a way of adding a large number of I/O with a single component, and thus only a single product reference.


- I/O modules (combination of a bus base, an electronic module and a terminal block) complete this configuration and, being modular with between 2 and 12 channels, make it possible to adjust the number of channels to exactly that required. The addition of digital or analog modules, temperature or high-speed counter modules increases the processing capabilities of applications.

Local I/O configuration

- 1 XBTGT supervisory graphic touch screen terminal
- 2 LMC058 motion controller
- 3 Compact blocks or I/O modules

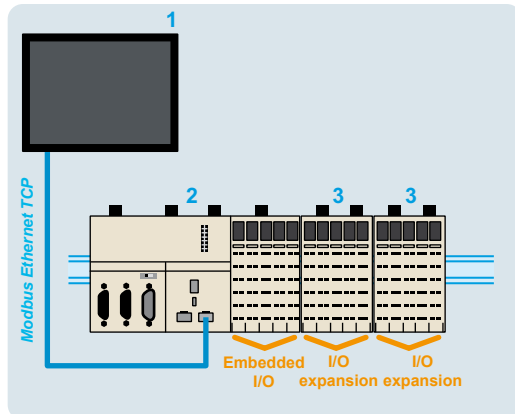

Local I/O

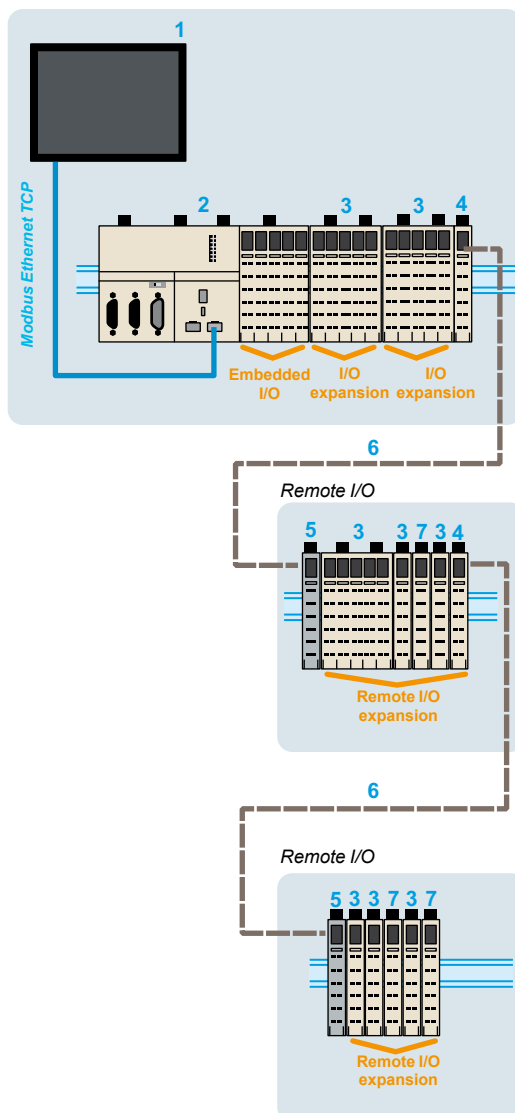

Remote I/O

Because of its backplane bus management, the TM5 system can be used to control I/O remotely.

The same modules can be used in either a local and/or remote configuration, linked together with bus expansion cables.

The maximum distance between two remote islands is 100 m and the maximum number of islands is 25, i.e. a total distance of up to 2500 m.

This function ensures a high level of flexibility, while retaining **synchronization of data acquisition**, since the expansion modules are on the same backplane bus.

Remote I/O configuration

- 1 XBTGT supervisory graphic touch screen terminal
- 2 LMC058 motion controller
- 3 Compact blocks or I/O modules
- 4 Transmitter modules
- 5 Receiver modules
- 6 TM5 expansion bus cables
- 7 Common distribution modules

Communication

LMC058 motion controllers have the following built-in communication ports:

References	Communication ports	Use
LMC058LF42	RJ45 Configurable as RS232 or RS485	ASCII or RTU exchange with Modbus communication protocol
	1 x RJ45 (MDI/MDIX port)	☐ FTP server ☐ Web server ☐ Modbus TCP server ☐ Modbus TCP client ☐ SoMachine Manager ☐ SNMP ☐ Ethernet IP device ☐ Modbus device
	1 x USB-A	Connection of a USB memory stick for transferring (uploading/downloading) programs, data and/or firmware
	1 x mini-USB	Programming port (480 Mbps)
	1 x 9-way male SUB-D	CANopen master connection
	1 x 9-way male SUB-D	CANmotion master connection
	1 x 15-way female SUB-D	Master encoder
LMC058LF424	RJ45 Configurable as RS232 or RS485	ASCII or RTU exchange with Modbus communication protocol
	1 x RJ45 (MDI/MDIX port)	☐ FTP server ☐ Web server ☐ Modbus TCP server ☐ Modbus TCP client ☐ SoMachine Manager ☐ SNMP ☐ Ethernet IP device ☐ Modbus device
	1 x USB-A	Connection of a USB memory stick for transferring (uploading/downloading) programs, data and/or firmware
	1 x mini-USB	Programming port (480 Mbps)
	1 x 9-way male SUB-D	CANopen master connection
	1 x 9-way male SUB-D	CANmotion master connection
	1 x 15-way female SUB-D	Master encoder
	2 PCI slots for communication modules = 2 x 9-way male SUB-D	Addition of optional communication modules for a serial link and a connection on the bus Profibus DP

Embedded Ethernet


LMC058 motion controllers have an embedded Ethernet link via a direct connection to their RJ45 port.

- ☐ Speed: "10 BaseT" and "100 BaseTX" with auto-negotiation
- ☐ RJ45 port (MDI/MDIX): automatic adaptation to a straight or crossed cable

References	Protocols	Number of connections
LMC058LF42	Modbus server	8
LMC058LF424	Modbus device	2
	SoMachine	3 (1)
	Ethernet IP device	16
	FTP server	4
	Web server	10

(1) The Oscilloscope function uses one connection.


Nota: Communication for Modicon LMC058, see chapter 4.

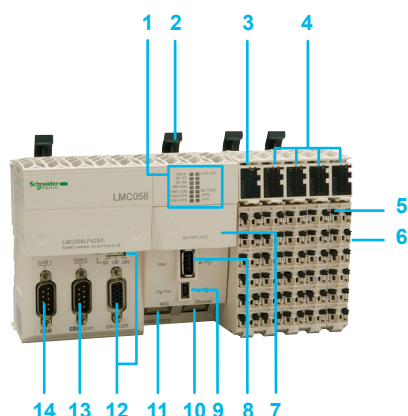

Description

The LMC058LF42 motion controller comprises:

- 1 A display block with:
 - 4 motion controller status LEDs (RUN/MS, BATTERY, APP0 and APP1)
 - 7 built-in communication port status LEDs (*Eth* LA, *Eth* ST, *Eth* NS, USB Host, MBS COM, CAN 0 STS, CAN 1 STS)
- 2 Locking lever for mounting/dismounting on $\perp$ symmetrical rail
- 3 A 24 V $\square$ power supply module with removable terminal block and locking lever, display block and slot for a label
- 4 I/O modules, each one with a removable terminal block with locking lever, a display block showing the I/O states and a slot for a label-holder
- 5 Removable terminal block with locking lever for locking/unlocking
- 6 On the side, an expansion bus connector for connecting to the next module
- 7 A slot for the RTC (Real Time Clock) battery
- 8 A USB-A connector (marked Host) for connecting a USB memory stick for transferring programs, data or firmware updates
- 9 A USB-B mini-connector (marked Pgr Port) for connecting to the programming PC
- 10 An RJ45 connector (marked Ethernet) for connecting to the Ethernet network and/or Magelis XBTGT graphic terminal
- 11 An RJ45 connector (marked MBS) for the RS232 or RS485 serial link
- 12 A 15-way female SUB-D connector, marked ENCODER, for connecting the master encoder and a selector switch for the 3 encoder supply voltage states (5 V, Off, 24 V)
- 13 A 9-way male SUB-D connector, marked CAN0, for connecting to the CANopen bus
- 14 A 9-way male SUB-D connector, marked CAN1, for connecting to the CANmotion bus

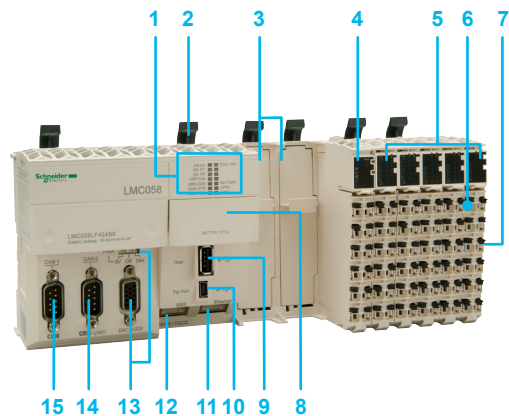

The LMC058LF424 motion controller comprises:

- 1 A display block with:
 - 4 motion controller status LEDs (RUN/MS, BATTERY, APP0 and APP1)
 - 7 built-in communication port status LEDs (*Eth* LA, *Eth* ST, *Eth* NS, USB Host, MBS COM, CAN 0 STS, CAN 1 STS)
- 2 Locking lever for mounting/dismounting on $\perp$ symmetrical rail
- 3 Two free PCI slots for the communication modules
- 4 A 24 V $\square$ power supply module with removable terminal block and locking lever, display block and slot for a label
- 5 I/O modules, each one with a removable terminal block with locking lever, a display block showing the I/O states and a slot for a label-holder
- 6 Removable terminal block with locking lever for locking/unlocking
- 7 On the side, an expansion bus connection for the link with the next module
- 8 A slot for the RTC (Real Time Clock) battery
- 9 A USB-A connector (marked Host) for connecting a USB memory stick for transferring programs, data or firmware updates
- 10 A USB-B mini-connector (marked Pgr Port) for connecting to the programming PC
- 11 An RJ45 connector (marked Ethernet) for connecting to the Ethernet network and/or Magelis XBTGT graphic terminal
- 12 An RJ45 connector (marked MBS) for the RS232 or RS485 serial link
- 13 A 15-way female SUB-D connector, marked ENCODER, for connecting the master encoder and a selector switch for the 3 encoder supply voltage states (5 V, Off, 24 V)
- 14 A 9-way male SUB-D connector, marked CAN0, for connecting to the CANopen bus
- 15 A 9-way male SUB-D connector, marked CAN1, for connecting to the CANmotion bus



LMC058LF42



LMC058LF424

References

LMC058 motion controllers, 24 V $\overline{\text{---}}$ power supply (1)

No. of I/O	Inputs	Outputs	Built-in communication ports	Reference	Weight kg/lb
42 I/O	■ 26 x 24 V $\overline{\text{---}}$ digital inputs including 8 counter inputs (200 kHz)	■ 16 digital transistor outputs (0.5 A) including 4 reflex outputs	☐ 1 RJ45 port: Ethernet ☐ 1 SUB-D port (9-way male): CANopen master ☐ 1 SUB-D port (9-way male): CANmotion master ☐ 1 SUB-D port (15-way female): master encoder ☐ 1 USB-A port: program transfer ☐ 1 USB-B mini-port: software programming ☐ 1 RJ45 port: RS232/RS485 serial link	LMC058LF42	0.550/ 1.213
42 + 4 I/O	■ 26 x 24 V $\overline{\text{---}}$ digital inputs including 8 counter inputs (200 kHz) ■ 4 analog inputs 10 V/- 10 V, 4-20 mA/ 0-20 mA, 12-bit resolution	■ 16 digital transistor outputs (0.5 A) including 4 reflex outputs	☐ 1 RJ45 port: Ethernet ☐ 1 SUB-D port (9-way male): CANopen master ☐ 1 SUB-D port (9-way male): CANmotion master ☐ 1 SUB-D port (15-way female): master encoder ☐ 1 USB-A port: program transfer ☐ 1 USB-B mini-port: software programming ☐ 1 RJ45 port: RS232/RS485 serial link ☐ + 2 free PCI slots for optional communication modules (2): RS232/RS485 serial link and Profibus DP bus	LMC058LF424	0.770/ 1.698

(1) The motion controllers Modicon LMC058 require a power supply with a nominal voltage of 24 V $\overline{\text{---}}$. The 24 V $\overline{\text{---}}$ power supply must be rated Separated Extra Low Voltage (SELV-rated) according to IEC 61140. The SELV-rating means that SELV isolation is provided between the electrical input and output of the power supply.
(2) To be ordered separately, see page 4/10.



TM5ACTLC100




TM5ACTCH100



TM5ACLITW1



TM5ACLT1



TCSXCNAMUM3P

References					
Accessories					
Designation	Used for	Colour	Sold in lots of	Unit reference	Weight kg/ lb
Plain text cover holder (label-holder)	Labelling the terminal blocks on the I/O channels	Transparent	100	TM5ACTCH100	0.002/ 0.004
Terminal block shield locking clip (Order with plain text cover holder TM5ACTCH100)	Locking plain text cover holder TM5ACTCH100	Transparent	100	TM5ACTLC100	0.001/ 0.002
Sheet of 92 precut paper labels	Plain text cover holder TM5ACTCH100	White	100	TM5ACTLS100	0.001/ 0.002
Coloured plastic markers	Labelling 16 connection channel terminals	White	1	TM5ACLITW1	0.015/ 0.033
		Red	1	TM5ACLITR1	0.015/ 0.033
		Blue	1	TM5ACLITB1	0.015/ 0.033
Metal tool	Inserting/removing TM5ACLIT●1 markers	Black	1	TM5ACLT1	0.030/ 0.066
Connection cables					
Designation	Used from	to	Length m/ ft	Reference	Weight kg/ lb
Software programming cable Baud rate: 480 Mbps max. Protocol: Modbus, HTTP, FTP, Codesys or virtual, non-isolated	PC USB port	USB mini-port on LMC058 motion controllers, the ATV-IMC card or XBTGT graphic touch screen terminals	3/ 9.84	TCSXCNAMUM3P	0.065/ 0.143
RS485 serial link cables Modbus protocol	SUB-D port (25-way) on Small Panels: XBTN401, XBTN410, XBTR410, XBTR411, XBTGT2... GT7	RJ45 port on LMC058 motion controllers	1.8/ 5.90	XBTZ938	0.230/ 0.507
	RJ45 port on XBTGT graphic touch screen terminals	RJ45 port on LMC058 motion controllers	2.5/ 8.20	XBTZ9980	0.230/ 0.507
RS232 serial link cables Character mode	SUB-D port (9-way female) on DTE (1): printer, hand-held bar code reader, etc.	RJ45 port on LMC058 motion controllers	3/ 9.84	TCSMCN3M4F3C2	0.150/ 0.331
	SUB-D port (9-way female) on DCE (2): GSM modem	RJ45 port on LMC058 motion controllers	3/ 9.84	TCSMCN3M4M3S2	0.150/ 0.331
Cable for master encoder input	Incremental encoders or SSI serial absolute encoders (1 stripped end)	15-way female SUB-D port on LMC058 motion controllers (1 High Density 15-way male SUB-D connector)	1/ 3.28	VW3M4701	—

(1) DTE: Data Terminal Equipment

(2) DCE: Data Communication Equipment

Presentation

Modicon LMC078 motion controllers are designed for compact machines that require a high level of performance in motion control applications as well as control system and machine communication function management.

Their high processing power enables:

- Control of 8 synchronized axes in 1 ms/16 synchronized axes in 2 ms
- Execution of a Boolean instruction in 2 ns
- A minimum cycle time of 250 µs

Control functions

Modicon LMC078 motion controllers integrate the following standard motion control functions:

- > Velocity control and torque control
- > Relative or absolute positioning
- > Cam profiles for slave axes and programmable cam switch control
- > Virtual axes
- > Electronic gearing function for position control
- > Linear and circular interpolations via the G-code function
- > Master and virtual axes via external encoder

Applications

Modicon LMC078 motion controllers, combined with a dedicated Lexium 32S offer, provide a simple yet powerful solution for the following applications:

- > Machines performing operations “on the fly”: marking, adhesion, shearing, etc.
- > Packing machines (vertical and horizontal bagging): forming, filling, and sealing, etc.
- > Handling machines: packaging, sorting, palletizing, etc.

Hardware characteristics

- Modicon LMC078 motion controllers are in “book” format; dimensions (DxWxH) 220 x 45 x 230 mm.
- Modicon LMC078 motion controllers have:
 - 12 inputs, 8 outputs (the I/O embedded in the controller are connected via removable spring terminals (1))
 - an encoder input configurable as an incremental or a Sin/Cos absolute encoder
- The 24 V $\overline{\text{DC}}$ controller power is supplied by an external source connected via removable spring terminals (1).
- The controller has a slot for an SD (Secure Digital) card (supplied with the controller).
- The Modicon LMC078 controller has a QR code for direct access to technical documentation relating to the controller and its associated servo drive.

Embedded communication

Modicon LMC078 motion controllers integrate the following embedded communication features as standard:

- sercos III communication bus
 - real-time communication bus (100 Mbps) for position control and remote I/O management
 - RJ 45 connectors
 - topology types: Master/Slave, linear or ring (for enhanced availability)
- CANopen bus
 - for controlling slave devices (63 slaves)
 - 9-way SUB-D connector
- Ethernet
 - communication network with supervisory tools
 - RJ 45 connector
 - Ethernet TCP/IP, FTP, and Ethernet Modbus TCP protocols
- Serial link
 - RS232 or RS485 configurable
 - RJ 45 connector
 - Modbus ASCII/RTU Master/Slave, ASCII (character string) protocols

(1) Connection terminals supplied with the controller

sercos
the automation bus
the automation bus

Ethernet
Ethernet

EtherNet/IP
EtherNet/IP

CANopen
CANopen



SoMachine software platform

Software configuration

Using SoMachine V4.1 software to configure and program Modicon LMC078 motion controllers and associated devices designed in line with Schneider Electric's Flexible Machine Control concept helps to reduce costs and optimize machine performance.

SoMachine V4.1 integrates tested, validated, documented architectures (TVDA), templates and dedicated motion control libraries.

The "Motion Library" contains a selection of function blocks designed to help reduce device configuration times.

This PLCopen-compliant library consists of administrative function blocks (read/write parameters, states, etc.) and single-axis and multi-axis function blocks.

The main functions are as follows:

- Power on, stop, reset
- Relative, absolute, or additional positioning
- Continuous positioning (reaching a position at a predefined speed)
- Velocity control
- Velocity profile
- Position profile
- Cam profile
- Electronic gearing
- Phasing
- Programmable cam switch
- Linear or circular interpolation

User library


With SoMachine software, it is easy to create your own function blocks (user library) to reduce programming times. Creating a user library simplifies the standardization and reuse of programs and also allows you to help protect proprietary information.

Note: Applications created with a Modicon LMC058 controller (as well as applications created with earlier versions of SoMachine) can be reused on the LMC078 motion controller.

Embedded functions on the LMC078 motion controller

- > PID control, with SoMachine library
- > SoftMotion libraries integrating coordinated motion functions, and synchronized axis management through gearing, camming, and path follower functions (G-code). An integrated path editor provides simplified access to G-code programming.
- > Diagnostics tools:
 - with message log, error message, and time-stamping
 - integrated diagnostics on controller display
 - integrated oscilloscope function in SoMachine software
- > I/O expansion with Modicon TM5 and TM7 ranges of expansion modules:
 - Modicon TM5 (IP 20) for expansion of digital, analog, and expert (counter module) I/O (see page 3/38)
 - Modicon TM7 (IP 67) for expansion of digital and analog I/O (see page 3/64)

2

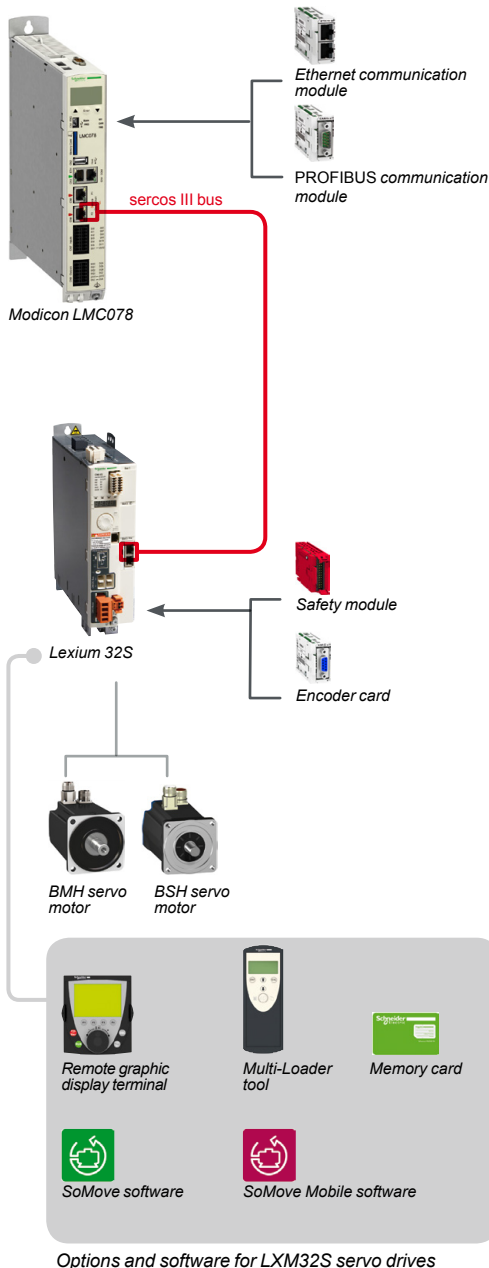

Options for Modicon LMC078 motion controllers

Communication modules

LMC078 motion controllers have a slot for an additional communication module.

Two types of communication module are available:

- ☐ VW3E704100000 EtherNet/IP slave interface
- ☐ VW3E704000000 PROFIBUS DP slave interface

Expansion memory

LMC078 motion controller memory can be expanded using a USB flash drive: stored files can be read/written via function blocks managed by the application.

Offer associated with the LMC078 controller

Lexium 32S servo drives are used with Modicon **LMC078** motion controllers to facilitate configuration and startup.

Performance is enhanced through optimized motor control achieved through reduced vibration with automatic parameter calculation, a speed observer, and an additional band-stop filter. This optimization helps to increase machine productivity.

Modicon LMC078 motion controllers are programmed using SoMachine software; the servo drive is set up using SoMove software.

The compact size of Lexium 32S servo drives and the associated BSH and BMH servo motors offers optimum performance in a small area, thus helping to reduce the overall size and cost of equipment.

Lexium 32S servo drives offer the following options:

- ☐ Memory card (SIM type) for saving the servo drive parameters (**recommended to help ensure a quick resumption of operation after a drive is replaced**)
- ☐ Enhanced safety module for integrated safety functions in a control system
- ☐ A module for handling a second encoder input

I/O expansion


Modicon LMC078 motion controllers can expand the I/O configuration over the sercos III and/or the CANopen bus.

- Over sercos III bus
 - ☐ The **TM5NS31** interface module for sercos III bus allows connection of distributed I/O islands (sensors and actuators) that are distributed over machines via the sercos III bus.

[Modicon TM5NS31 interface for sercos III bus \(please refer to our website www.schneider-electric.com\)](http://www.schneider-electric.com)

- Over CANopen bus
 - ☐ The **TM5NCO1** CANopen interface module allows the connection of distributed I/O islands (sensors and actuators) that are distributed over machines via the CANopen fieldbus.

[Modicon TM5NCO1 interface for CANopen bus \(please refer to our website www.schneider-electric.com\)](http://www.schneider-electric.com)

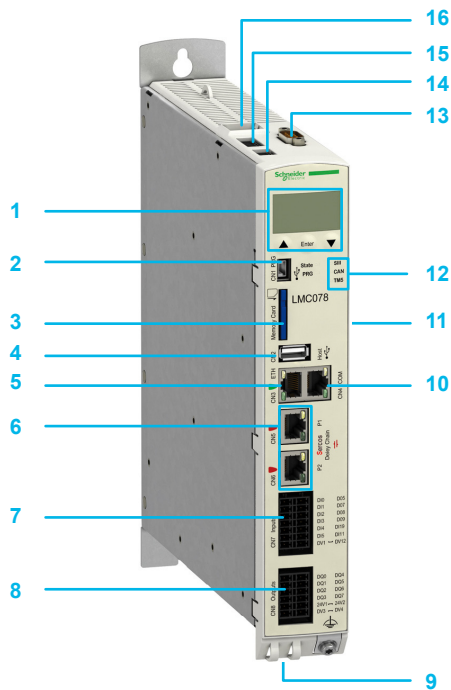

Description

Modicon LMC078 motion controller

- 1 LCD display and control keys
- 2 Mini USB programming connector
- 3 SD card slot (for firmware and project data)
- 4 USB-A connector for memory expansion
- 5 RJ 45 connector for Ethernet network, with status LED
- 6 Two RJ 45 connectors for sercos III network
- 7 Removable spring terminals (1) for connecting 12 digital inputs (8 standard inputs + 4 Registration inputs)
- 8 Removable spring terminals (1) for connecting 8 digital outputs
- 9 Slot for 1 communication module (EtherNet/IP or Profibus DP bus)
- 10 RJ 45 connector for serial link, with status LED
- 11 (On the side panel) QR code for identifying LMC078 and LXM32S technical documentation
- 12 Controller status LED display block
- 13 9-way SUB-D connector for CANopen bus connection
- 14 Removable spring terminals (1): 3 terminals: +, -, $\perp$ marked 24 VDC for connecting the 24 V $\perp$ power supply
- 15 Not used
- 16 RJ 45 connector for Master encoder (incremental or absolute encoder)

(1) Removable spring terminals supplied with the controller

LMC078 motion controller characteristics

Conformity

Certification CE, UL, CSA 508

Standards IEC61131-2

Operating characteristics

Class 3 K3 conforming to IEC/EN 60721-3-3

Degree of protection	IP 20
Pollution degree	2 (conforming to IEC-61131-2, UL508)
Ambient temperature	+5 ... + 55 °C/41...131 °F
Condensation or refrigeration	Not tolerated
Relative humidity	5...95%
Operating altitude	0...2,000 m without derating 2,000...3,000 m: ambient temperature 40 °C/104 °F

Class 3M4

Shock resistance	100 m/s ²
Vibration resistance	10 m/s ²

Transportation characteristics

Class 2K3 conforming to IEC/EN 60721-3-2

Ambient temperature	-25... +70 °C / -13...+158 °F
Condensation or refrigeration	Not tolerated
Relative humidity	5...95%
Maximum operating altitude	10,000 m (32,808 ft)

Class 2M2

Shock resistance	300 m/s ²
Vibration resistance	15 m/s ²

Characteristics of long-term storage in original packaging

Class 1K4 conforming to IEC/EN 60721-3-1

Ambient temperature	-25... + 55 °C/-13...+131 °F
Condensation or refrigeration	Not tolerated
Relative humidity	5... 95%

Power supply characteristics

Power supply 24 V $\pm$ (20.4 to 30 V $\pm$), 30 W max.



LMC078CECS20T



VW3E704100000



VW3E704000000

References

Modicon LMC078 motion controller (1)

24 V $\pm$ power supply

Number of logic I/O	Logic inputs	Logic outputs	Embedded communication ports (2)				Reference	Weight kg/ lb
			sercos III	CANopen master	Ethernet	Serial link		
20 I/O and 1 encoder input	12 x 24 V $\pm$ source inputs, including 4 registration inputs	8 source transistor outputs 0.5 A	2 x RJ 45	1 x 9-way SUB-D	1 x RJ 45	1 x RJ 45	LMC078CECS20T	2.200/ 4.850
1 configurable encoder input: ☐ incremental encoder, output voltage 5 V $\pm$ /200 mA ☐ absolute encoder (Sin Cos/Hiperface), output voltage 10 V $\pm$ /200 mA Connection via RJ 45 connector								
SD card	Blank SD card						TMASD2	0.004/ 0.009

Options for Modicon LMC078 controller

Designation	Description	Reference	Weight kg/ lb
Communication module	Ethernet/IP slave module equipped with 2 RJ 45 connectors with status LED	VW3E704100000	—
	PROFIBUS DP slave module equipped with a 9-way SUB-D connector	VW3E704000000	—

Cordsets

Designation	Description	Length m/ft	Reference	Weight kg/ lb
sercos III cordsets for redundant ring	Preassembled cordsets with an RJ 45 connector at each end	0.5/1.64	VW3E5001R005	—
		1/3.28	VW3E5001R010	—
		1.5/4.92	VW3E5001R015	—
		2/6.56	VW3E5001R020	—
		3/9.84	VW3E5001R030	—
		5/16.40	VW3E5001R050	—
		10/32.81	VW3E5001R100	—
		15/49.21	VW3E5001R150	—
		20/65.62	VW3E5001R200	—
		25/82.02	VW3E5001R250	—
		30/98.43	VW3E5001R300	—
		40/131.23	VW3E5001R400	—
		50/164.04	VW3E5001R500	—

Configuration software

Description	Use	See page
SoMachine V4.1 + 1 add-on	For configuring Modicon LMC078 controllers	5/2

Associated offers

Modicon TM5 digital/analog/expert I/O expansion modules	3/38
Modicon TM7 digital/analog I/O expansion modules	3/64
Modicon TM5 bus interface module for sercos III	Please refer to our website www.schneider-electric.com
Modicon TM5 bus interface module for CANopen	4/28
Modicon TM5 communication module for RS232 serial link	Please refer to our website www.schneider-electric.com

(1) LMC078 controllers include:

- removable terminals (spring terminals) for connecting I/O
- removable spring terminals for connecting the power supply
- BR2032 button cell battery
- an SD card with the controller firmware.

(2) LMC078 controllers have an embedded USB mini-B programming port.

Hardware control platforms

Drive controller

Altivar IMC integrated controller card for Altivar 61 and Altivar 71 variable speed drives

2



Altivar IMC integrated controller card

Presentation

The Altivar IMC integrated controller card forms a part of Flexible Machine Control approach, a key component of MachineStruxure™, which brings you maximum flexibility and ensures the most optimised control solution.

The Altivar IMC integrated controller card **VW3A3521** is a compact optimised solution developed for Altivar 61 and 71 variable speed drives. When equipped with the ATV IMC card, Altivar 61 and 71 drives become controllers capable of meeting the needs of machine manufacturers (OEMs) in applications such as textiles, hoisting, pumping or woodworking, etc.


The Altivar IMC integrated controller card **VW3A3521** is configured and programmed using SoMachine software (see page 5/2).

The expansion capability of the Altivar IMC card is based on Schneider Electric's "Flexible Machine Control" concept.

The Altivar IMC card boosts the expansion capability of machines and allows us to meet the OEM market's requirements in terms of performance, simplicity of use and openness.

Installation

The Altivar IMC card is designed for integration on Altivar 61 and 71 variable speed drives in conjunction with other Altivar 61 and 71-specific cards, such as I/O expansion cards and communication cards.

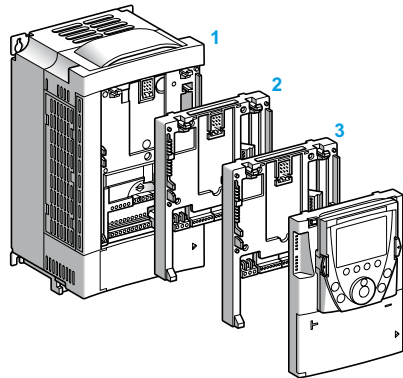

- 1 Altivar 61/Altivar 71 drive and graphic display terminal
- 2 Altivar IMC card **VW3A3521**
- 3 I/O expansion card **VW3A32●●** or communication card **VW3A33●●**

Note: Only one I/O expansion card or communication card can be mounted simultaneously with the Altivar IMC card on an Altivar 61 or 71 drive.

Special features

User memory	RAM	2 MB
	Flash	2 MB
Data storage memory FRAM (Ferroelectric RAM)		64 KB
Typical time (for 1000 Boolean instructions)		942 µs
User program size		1 MB
Power supply		24 V ~
Inputs	Digital	10 x 24 V ~ inputs, 4 of which can be used for 2 high-speed counter inputs (100 kHz) or 2 incremental encoders (A/B) (100 kHz)
	Analog	2 x 0...20 mA inputs
Outputs	Digital	6 transistor outputs (2 A) - source
	Analog	2 x 0...20 mA outputs
Built-in communication ports	RJ45 port	Ethernet Modbus TCP, Web/FTP Server
	SUB-D connector (male 9-way)	Master CANopen bus (16 slaves)
	USB Mini-B port	SoMachine software programming
Real-time clock		Integrated

Performance

Reduce the time it takes to develop your machines

- The use of a single SoMachine programming software environment offers a number of advantages:
 - A single project file
 - A single software program
 - A single download for the whole application
- The ease of use of PLCopen function blocks significantly reduces the time needed to program motion control and independent axis control on machines.

A more powerful machine

The Altivar IMC integrated controller card has 8 tasks to suit different machine requirements (cyclic, event-triggered, free).

A task can be synchronized with the task of the drive in which it is embedded. This task manages the speed reference, the torque reference, the speed feedback, the torque feedback, the number of encoder pulses feedback in order to increase machine performance.

A more intelligent drive

- Performs more complex operations (2 MB memory)
- Reduces program loading time (Mini-B USB connectors)
- Communication with all the other system devices (built-in Ethernet and CANopen connection ports)

Transparency of your machines

Access to all the other devices in the system architecture via CANopen is totally transparent due to FDT/DTM technology.

Development and technology

The Altivar IMC integrated controller card has been developed with two criteria in mind: low cost and practicality.

■ Low cost because the standard equipment for the Altivar IMC card comprises:

- Sixteen discrete I/O
- A built-in Ethernet port
- Two analog inputs
- Two analog outputs
- And a CANopen master

■ Practicality because the Altivar IMC card is ideal for integration in Altivar 61 and 71 drives, and can therefore use:

- Their inputs/outputs
- Their communication cards
- Their parameters: speed, current, torque, etc.
- Their remote graphic display terminal
- And also the inputs/outputs in their I/O expansion cards
- Plus the speed feedback counter in the encoder interface cards

Software configuration

Configuration and programming of the Altivar IMC integrated controller card and equipment in Schneider Electric's "Flexible Machine Control" concept are both designed to cut costs and optimize your machine performance.

Schneider Electric's **SoMachine** software platform can be used to program Altivar IMC integrated controller card using:

- IEC 61131-3 programming languages: Instruction List (IL), Ladder Diagram (LD), Function Block Diagram (FBD), Sequential Function Chart/Grafset (SFC) and Structured Text (ST)
- CFC (Continuous Function Chart) language.

PLCopen function blocks are used for managing motion control and axis control on your machines.

See page 5/2.


Integration in the Schneider Electric product offer

Combined with other dedicated OEM products in the Schneider Electric offer, such as Altivar variable speed drives, Lexium servo drives, Magelis HMI terminals, TeSys motor starters and contactors, the Altivar IMC integrated controller card can be integrated transparently in a number of architectures.



SoMachine software platform

2

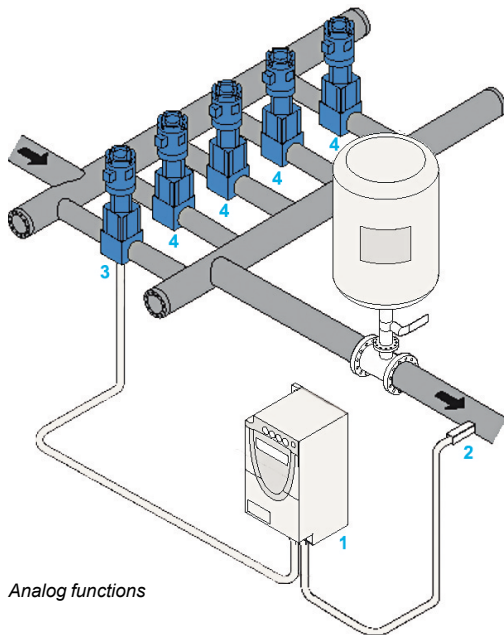


Analog functions

Functions

Analog functions

For machines that require functions to process data issued by analog sensors/actuators (voltage or current), temperature sensors, pressure or PID control sensors, the Altivar IMC card has, as standard, 2 analog inputs (voltage or current) with 10-bit resolution and 2 analog outputs (current) with 10-bit resolution.

- 1 Altivar IMC integrated controller card installed on Altivar 61
- 2 Pressure sensor
- 3 Variable speed pump
- 4 Fixed speed pumps

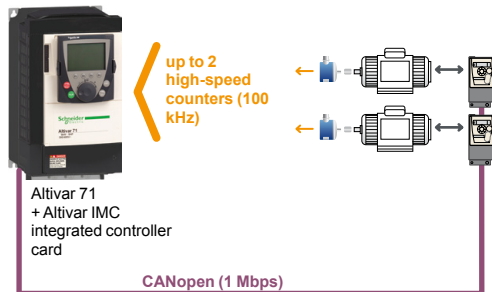

High-speed counter function (one-phase or two-phase)


HSC high-speed counting and/or incremental encoder function

In order to meet requirements for machine productivity, the Altivar IMC has 2 embedded high-speed counters with a counting frequency of 100 kHz for each channel as well as 4 reflex outputs.

The availability of these embedded counters and also the presence of the master CANopen link makes it quick and easy to create low-cost, high-performance multi-axis functions that suit the machines limitations.

With the availability of "PLCopen" function blocks specific to the motion control functions in the SoMachine software, application development is sure to be quick and reliable.

In addition, these high-speed counting inputs can be used as an incremental encoder (A/B) with a frequency of 100 kHz in order to adapt to the machine's specific requirements.

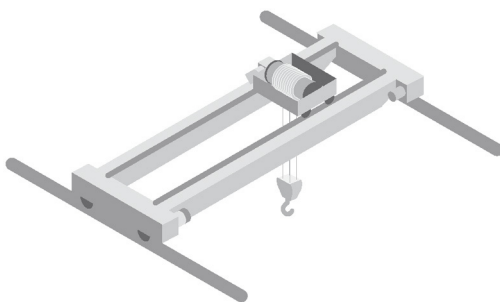

Machine with CANopen architecture:

- Lifting motion: Altivar 71
- Translatory motion: Altivar 312
- Carriage motion: Altivar 312

Position control function

Several options are offered in terms of position control:

- Either creating a sequence in Lexium 32 servo drives, with communication with the Altivar IMC integrated controller card achieved by the use of discrete I/O
- Or creating an application in the Altivar IMC card and controlling the Lexium 32A/ Lexium 32M servo drives and/or SD3●● stepper motor drives via the master CANopen integrated link.

Functions (continued)

Communication function

Ethernet

The Altivar IMC integrated controller card has a built-in RJ45 Ethernet port (10/100 Mbps, MDI/MDIX) with Ethernet TCP Modbus, SoMachine on Ethernet, UDP, TCP and SNMP protocols.

In addition, the Altivar IMC card has an embedded Web Server and FTP Server. As well as the default address based on the MAC address, it is possible to assign a controller IP address via a DHCP server or via a BOOTP server.

CANopen

The Altivar IMC integrated controller card has an embedded CANopen master which can be used to control devices on a communication bus with ease.

The link can be configured between 20 kbps and 1 Mbps and supports up to 16 slaves.

Architectures based on CANopen can be used to distribute I/O modules as close to the sensors and actuators as possible, thus reducing wiring costs and times, and to communicate with different devices such as variable speed drives, servo drives, etc. The CANopen configurator is integrated in the SoMachine software and can also be used to import standard description files in EDS format. See page 4/14.

Customization function on the graphic display terminal

Menu 1.14

The remote graphic display terminal on Altivar 61 or 71 drives includes a menu dedicated to the Altivar IMC integrated controller card.


The user is offered a graphic display of 8 lines of 24 characters.

This menu can be customized simply and directly using the SoMachine software.

The user can define the language, name, unit, decimal point, and the type of parameter he wishes to customize for his own application. The user can also define alarms and error messages for his application.

Clock function

A time and date-stamping function combined with a clock backed up by a lithium battery makes it possible to keep a log of events that have occurred. When the Altivar IMC integrated controller card is installed in the drive, drive faults are automatically time and date-stamped without the need for any special programming.



Menu 1.14

Hardware control platforms

Drive controller

Altivar IMC integrated controller card for Altivar 61 and Altivar 71 variable speed drives

2

Communication

The Altivar IMC integrated controller card has the following built-in communication ports:

Communication ports	Use
1 x RJ45 (MDI/MDIX port)	☐ FTP server ☐ Web server ☐ Modbus TCP server ☐ Modbus TCP client ☐ Manager SoMachine ☐ SNMP ☐ Modbus device
1 x mini-USB	Programming port (480 Mbps)
1 x 9-way male SUB-D	Master CANopen connection

Embedded Ethernet

The Altivar IMC integrated controller card has an embedded Ethernet link via a direct connection to its RJ45 port.


- Speed: "10 BaseT" and "100 BaseTX" with auto-negotiation
- RJ45 port (MDI/MDIX): automatic adaptation to a straight or crossed cable

Protocols	Number of connections
Modbus server	8
Modbus device	2
FTP server	4
Web server	10

Description

The Altivar IMC integrated controller card comprises:

- 1 Three spring connectors for:
 - ☐ 10 digital inputs
 - ☐ 6 digital outputs
 - ☐ 2 analog inputs
 - ☐ 2 analog outputs
 - ☐ 2 commons
- 2 A connector with removable screw terminals, 3 contacts at intervals of 3.81 for the 24 V $\overline{\text{---}}$ power supply
- 3 A mini USB-B connector for programming using SoMachine software
- 4 A 9-way SUB-D connector for connection to the CANopen machine bus
- 5 An RJ45 connector for connection of the SoMachine software workshop and/or connection to an Ethernet Modbus TCP network
- 6 Five LEDs:
 - ☐ 1 green/yellow ETH LED for Ethernet activity
 - ☐ 1 green/red NS (Network status) LED
 - ☐ 1 green/red MS (Module status) LED
 - ☐ 1 green/red CAN (CANopen activity) LED
 - ☐ 1 green/red LED programmable by the user
- 7 Four configuration selector switches

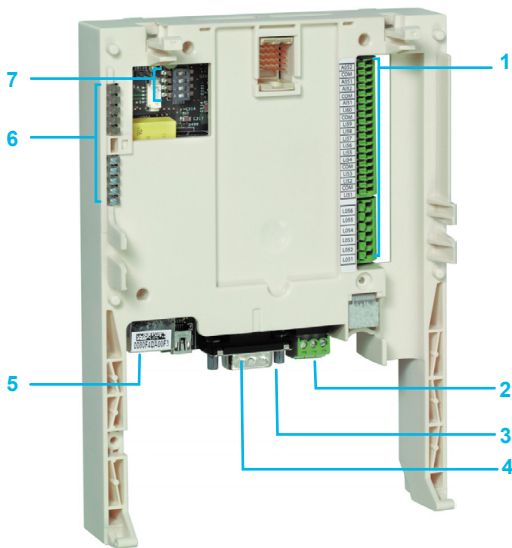

Hardware control platforms

Drive controller

Altivar IMC integrated controller card for Altivar 61 and Altivar 71 variable speed drives




Altivar 71 variable speed drives



VW3A3521



VW3A3202



TCSXCNAMUM3P

Variable speed drives

Designation	Reference
Altivar 61 variable speed drives	Refer to our website www.schneider-electric.com
Altivar 71 variable speed drives	Refer to our website www.schneider-electric.com

Cards for Altivar 61 and 71 variable speed drives

Altivar IMC integrated controller card			
Designation	Voltage	Reference	Weight kg/ lb
Altivar IMC integrated controller card	24 V $\square$	VW3A3521	0.185/ 0.408

I/O expansion cards (1)

Designation	Type of I/O						Reference	Weight kg/ lb
	Logic input	Logic output	Analog input	Analog output	PTC probe input (2)	Frequency control input		
I/O expansion cards (2)	4	3	—	—	1	—	VW3A3201	0.300/ 0.661
	4	3	2	2	1	1	VW3A3202	0.300/ 0.661

For more information about digital I/O cards, visit our website www.schneider-electric.com.

Communication cards

Designation	Protocols available (depending on model)	Reference
VW3A3 3●● communication cards	☐ Modbus Plus ☐ Uni-Telway ☐ InterBus-S ☐ Profibus DP ☐ DeviceNet ☐ Ethernet Modbus TCP ☐ Fipio ☐ EtherNet IP ☐ CC-Link ☐ Lonworks (ATV 61) ☐ METASYS N2 (ATV 61) ☐ APOGEE FLN (ATV 61) ☐ BACnet (ATV 61)	Refer to our website www.schneider-electric.com

Connection cable

Designation	Use	Length m/ ft	Reference	Weight kg/ lb
Programming cable	From the mini USB-B port on the Altivar IMC integrated controller card to the type A USB port on the PC terminal for programming and updating firmware	3/ 9.84	TCSXCNAMUM3P	0.065/ 0.143

(1) Altivar 61 and 71 variable speed drives can only take one I/O expansion card with the same reference.

(2) This PTC probe input must never be used to protect an ATEX motor in applications in explosive atmospheres. Please refer to the ATEX guide which is available on our website "www.schneider-electric.com".

HMI controllers

Magelis™ SCU Small HMI controllers,
Magelis™ XBTGC HMI controllers,
Magelis™ XBTGT, XBTGK Standard Advanced panels + control
function

Applications		Display of text messages, graphic objects and mimics, control and configuration of data			
		IEC 1131-2 control function			
Terminal type		Small HMI controllers			
		For control of simple machine		For control of simple process	
					
Display	Type	color TFT LCD			
	Capacity	3.5" (65 k colors)	5.7" (65 k colors)	3.5" (65 k colors)	5.7" (65 k colors)
Data entry		Via touch screen			
		–			
		–			
		–			
		–			
Memory capacity	Application	128 MB Flash EPROM			
	Expansion	–			
Functions	Maximum number of pages and maximum number of instructions	Limited by internal Flash EPROM memory capacity			
	Variables per page	Unlimited (8000 variables max.)			
	Programmed logic	5 languages according to IEC 1131-2 (LD, ST, FBD, SFC, IL)			
	Counting/positioning	2 x 100 kHz high speed counter inputs/2 x 50 kHz pulse train outputs			
	Control (PID)	Yes			
	Representation of variables	Alphanumeric, bitmap, bargraph, gauge, tank, tank level indicator, curves, polygon, button, light			
	Recipes	32 groups of 64 recipes comprising 1024 ingredients max.			
	Curves	Yes, with log			
	Alarm logs	Yes			
	Real-time clock	Built-in			
I/O	Integrated	☐ 14 x 24 V ∓ digital inputs ☐ 2 high speed counter (HSC) inputs ☐ 8 digital relay outputs ☐ 2 pulse train source transistor outputs		☐ 6 x 24 V ∓ digital inputs ☐ 2 high speed counter (HSC) inputs ☐ 6 digital relay outputs ☐ 2 pulse train source transistor outputs ☐ 2 x 13-bit analog inputs (Voltage/current) ☐ 2 x 16-bit analogue temperature inputs (TC/PT100-1000) ☐ 2 x 12-bit analog outputs (Voltage/current)	
	I/O modular expansion	–			
Communication	Downloadable protocols	Uni-TE, Modbus, Modbus TCP/IP (1) and for PLC brands: Mitsubishi, Omron, Allen-Bradley and Siemens			
	Asynchronous serial link	RS 232C/RS 485 (COM1)			
	USB ports	1 Host type A + 1 Device type mini-B			
	Buses and networks	1 CANopen master			
		Ethernet TCP/IP (10BASE-T/100 BASE-TX)			
	Printer link	USB port for parallel printer			
Design software		SoMachine on Windows XP Professional and Windows 7 Professional 32/64-bit (please refer to our website www.schneider-electric.com)			
Operating system		Magelis (333 MHz RISC CPU)			
Terminal type		HMISCU6A5	HMISCU8A5	HMISCU6B5	HMISCU8B5
Pages		2/85			

(1) Depending on model.

Display of text messages, graphic objects and mimics, control and configuration of data				
IEC 1131-2 control function				
HMI controllers			Touch screen Standard Advanced panels + control function	Standard Advanced panels with keypad + control function
Backlit monochrome (amber or red mode) STN LCD (320 x 240 pixels) 3.8" (monochrome)	Backlit monochrome STN LCD (320 x 240 pixels) 5.7" (monochrome)	color TFT LCD (320 x 240 pixels) 5.7" (65 k colors)	Backlit monochrome or color STN LCD or color TFT LCD (320 x 240 pixels to 1024 x 708 pixels) (1) 5.7" (monochrome or color) 7.5", 10.4", 12.1" or 15" (color) (1)	Monochrome STN LCD or color TFT LCD (320 x 240 pixels or 640 x 480 pixels) (1) 5.7" (monochrome or color) or 10.4" (color) (1)
Via touch screen			Via keypad and/or touch screen (configurable) and/or by industrial pointer	
–			10 or 12 (1)	
–			14 or 18 (1)	
–			8	
–			12	
16 MB Flash EPROM			16 MB Flash EPROM or 32 MB Flash EPROM (1)	
–			By 128 MB to 4 GB CF card (1)	
Limited by internal Flash EPROM memory capacity			Limited by internal Flash EPROM memory capacity or CF card memory capacity	
Unlimited (8000 variables max.)				
5 languages according to IEC 1131-2 (LD, ST, FBD, SFC, IL)				
4 x 100 kHz high speed counter inputs/4 x 65 kHz pulse train outputs			–	
Yes				
Alphanumeric, bitmap, bargraph, gauge, tank, tank level indicator, curves, polygon, button, light				
32 groups of 64 recipes comprising 1024 ingredients max.				
Yes, with log				
Yes				
Built-in				
☐ 12 x 24 V ∓ digital inputs ☐ 6 sink or source transistor outputs (1)	☐ 16 x 24 V ∓ digital inputs ☐ 16 sink or source transistor outputs (1)		–	
2 Modicon TM2 I/O modules max.	3 Modicon TM2 I/O modules max.		–	
–	Uni-TE, Modbus, Modbus TCP/IP (1) and for PLC brands: Mitsubishi, Omron, Allen-Bradley and Siemens			
–	RS 232C/RS 422/485 (COM1)		RS 232C/RS 422/485 (COM1) and RS 485 (COM2)	
1			1 or 2 (1)	
1 CANopen master with optional module (XBTZGC CAN)			1 CANopen master with external module (XBTZG CANM) which is mandatory for the control function	
–	Ethernet TCP/IP (10BASE-T/ 100BASE-TX)		Ethernet TCP/IP (10BASE-T/100BASE-TX) (1)	
USB port for parallel printer			USB port for parallel printer and RS 232C (COM1) serial link	
SoMachine on Windows XP Professional and Windows 7 Professional 32/64-bit (please refer to our website www.schneider-electric.com)				
Magelis (131 MHz RISC CPU)			Magelis (131 MHz RISC or 266 MHz RISC CPU) (1)	Magelis (266 MHz RISC CPU)
XBTGC1100T	XBTGC2120T	XBTGC2330T	XBTGT2●/4●/5●/63/73 + XBTZGCANM	XBTGK2●/53 + XBTZGCANM
XBTGC1100U	XBTGC2120U	XBTGC2330U		

2/92

Hardware control platforms

HMI controllers

Magelis™ SCU Small HMI Controllers,

Magelis™ XBTGC HMI Controllers,

Magelis™ XBTGT, XBTGK Standard Advanced Panels with control

Presentation

Magelis HMI Controllers are part of Schneider Electric's Flexible Machine Control concept, a key element in MachineStruxure™.

The Magelis HMI Controllers offer brings together Human Machine Interface and control functions within in a single product. This reduces the amount of equipment required and the associated costs throughout the life cycle of the machine. This offer comprises three ranges:

- The ultra-compact range: Magelis SCU Small HMI Controllers
- The compact range: Magelis XBTGC HMI Controllers
- The modular range: Magelis XBTGT/GK Standard Advanced Panels + XBT ZC CANM CANopen module

Magelis SCU Small HMI Controllers (ultra-compact range)

The Magelis SCU Small HMI Controllers integrate, as standard, all their functions. They benefit, in particular, from the same innovation as the Magelis STU Small panels range: Mounting via a 22 mm diameter hole (pushbutton type) which considerably simplifies installation (see page 2/84).

Of modular design, this range comprises:

- 2 complete Magelis SCU products for the control of simple machines, comprising:
 - A 3.5" or 5.7" 65 k colour TFT Screen module
 - A Controller module with 16 integrated digital inputs/10 integrated digital outputs
- 2 complete Magelis SCU products for the control of simple processes, comprising:
 - A 3.5" or 5.7" 65 k colour TFT Screen module
 - A Controller module with 8 integrated digital inputs/8 integrated digital outputs and 4 integrated analog inputs/2 integrated analog outputs

The Screen modules and Controller modules (for simple machines or processes) are also available separately as replacement parts. Magelis SCU Small HMI Controllers operate with the same Screen modules as Magelis STU Small panels, which simplifies upgrading of an installation (only the rear module needs to be replaced). A wide choice of communication interfaces is also integrated: USB port, serial link, Ethernet and CANopen.

Magelis XBTGC HMI Controllers (compact range)

The compact design of Magelis XBTGC HMI Controllers optimises setup.

This range comprises 6 touch screen terminals, with the following, depending on the model:

- 3.8" monochrome screen, 12 integrated inputs/6 integrated outputs (sink or source)
- 5.7" monochrome or colour screen, 16 integrated inputs/16 integrated outputs (sink or source)
- A wide choice of communication interfaces: USB port, serial link, Ethernet and CANopen

In order to adapt easily to different configurations, it is possible to add digital or analog I/O expansion modules at the rear of the Controller.

Magelis XBTGT/GK Standard Advanced Panels + XBT ZC CANM CANopen module (modular range)

This range is made up of the complete Magelis XBTGT or Magelis XBTGK Standard Advanced Panels offers combined with a Control part using the XBTZG CANM CANopen module. During operation, this module controls the I/O and the peripherals distributed via the CANopen bus.

The combination with Magelis XBTGT or Magelis XBTGK Standard Advanced Panels gives a wide choice of screen sizes and types of data entry, depending on the model:

- 17 XBTGT touch screen terminals:
 - 5.7" monochrome or colour screens
 - 7.5", 10.4", 12.1" and 15" colour screens
- 3 XBTGK terminals with keypad and/or touch screen:
 - 5.7" monochrome or colour screens
 - 10.4" colour screens


This combination also offers numerous advanced functions such as video, data management (sharing of data, log), etc.



Magelis SCU Small HMI Controllers



Magelis XBTGC HMI Controllers

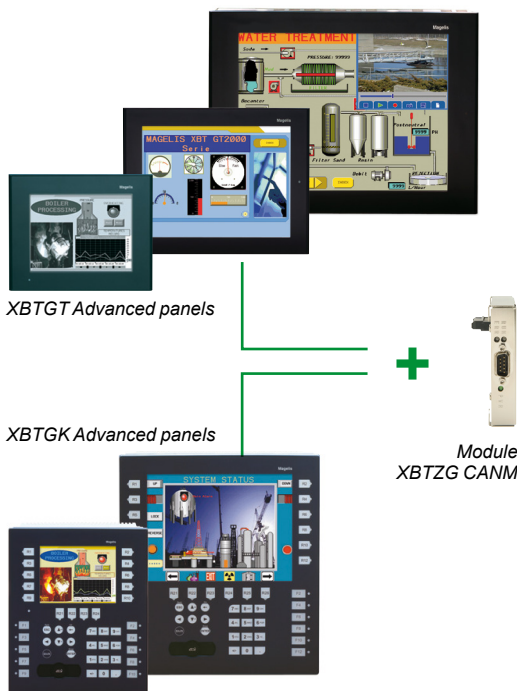

HMI function: Magelis XBTGT/GK Advanced Panels
+ control function: CANopen XBTZG CANM master module

Hardware control platforms

HMI controllers

Magelis™ SCU Small HMI Controllers,

Magelis™ XBTGC HMI Controllers,

Magelis™ XBTGT, XBTGK Standard Advanced Panels with control



SoMachine



Vijeo Designer
(included in SoMachine)

Operation

With their fast multitasking processors, all the HMI Controllers combine HMI and control functions and share the same screen and communication features and dimensions.

The internal memory can be freely used by both the HMI function and the control function.

Processing is split 75% on the HMI part and 25% on the control part. The processing can be configured for 3 tasks, including 1 master task.

The XBTGC HMI Controllers also share the same I/O modules, the same Telefast pre-wired system and the same peripherals on the CANopen bus as the Modicon M238 logic controller.

Configuration


Magelis SCU Small HMI Controllers, Magelis XBTGC HMI Controllers and Magelis XBTGT/GK Standard Advanced Panels are configured using Schneider Electric's unique machine automation software, SoMachine.

This software, combining both HMI and control functions, is based on Vijeo Designer software running on Windows XP Professional or Windows 7 Professional 32/64-bit. SoMachine software boasts an advanced user interface with many configurable windows, enabling unique projects to be developed quickly and easily.

See page 5/2.

Communication

Examples of communication architectures

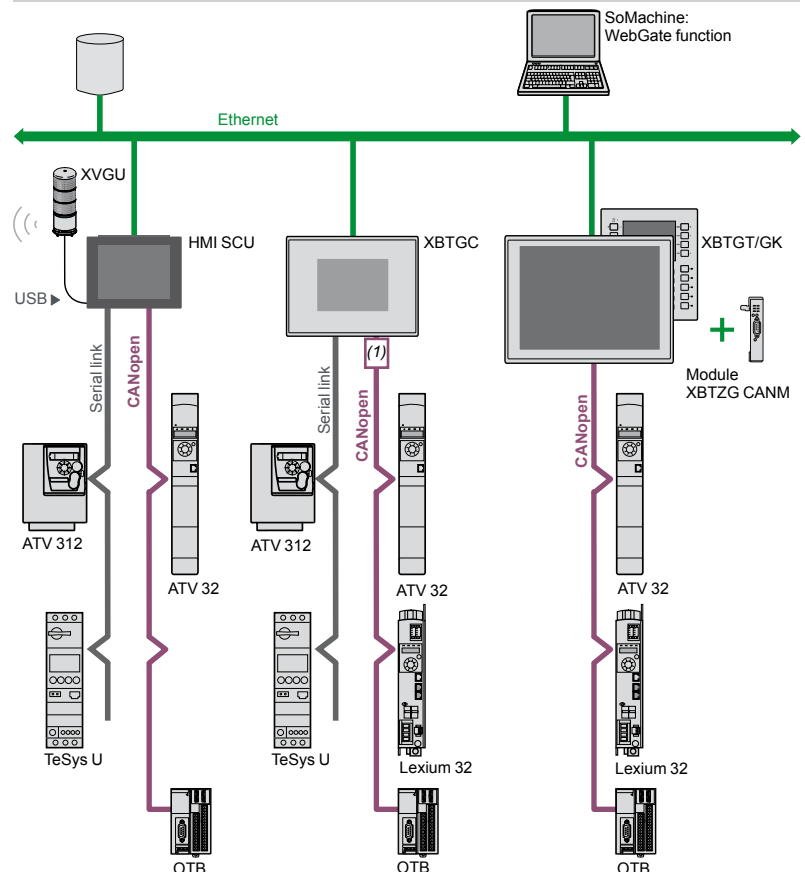

Depending on the model, Magelis SCU Small HMI Controllers, Magelis XBTGC HMI Controllers and Magelis XBTGT/GK Standard Advanced Panels communicate with automation devices via 1 or 2 integrated serial links using the following communication protocols:

- Schneider Electric (Uni-TE, Modbus)
- Third-party: Mitsubishi Electric, Omron, Allen-Bradley and Siemens

Depending on the model, they can be connected to Ethernet TCP/IP networks with the Modbus TCP protocol or a third-party protocol, and can be used as the CANopen master to control all the peripherals which can be connected on this bus.

(1) With XBTZGC CAN CANopen master module.

Hardware control platforms

HMI controllers

Magelis™ SCU Small HMI Controllers,

Magelis™ XBTGC HMI Controllers,

Magelis™ XBTGT, XBTGK Standard Advanced Panels with control

Functions

Magelis Small HMI Controllers, Magelis HMI Controllers and Magelis Standard Advanced Panels are part of Schneider Electric's Flexible Machine Control concept, a key element in MachineStruxure™.

Magelis SCU Small HMI Controllers, Magelis XBTGC HMI Controllers and Magelis XBTGT/GK Standard Advanced Panels

Magelis SCU Small HMI Controllers, Magelis XBTGC HMI Controllers and Magelis XBTGT/GK Standard Advanced Panels offer the following HMI functions:

- Display of animated mimics with 8 types of animation (pressing the touch panel, colour changes, filling, movement, rotation, size, visibility and value display)
- Control, modification of numeric and alphanumeric values
- Display of current time and date
- Real-time curves and trend curves with log
- Alarm display, alarm log and management of alarm groups
- Multiwindow management
- Page calls initiated by the operator
- Multilingual application management (10 languages simultaneously)
- Recipe management
- Data processing via Java script
- Application support and USB key external memory logs
- Management of serial printers, barcode readers

Magelis SCU Small HMI Controllers, Magelis XBTGC HMI Controllers and Magelis XBTGT and XBT GK Standard Advanced Panels (1) have been designed for Transparent Ready architectures and equipment (combination of Web and Ethernet TCP/IP technologies).

With the WebGate function, it is possible to control or carry out maintenance remotely.

Eventually, Magelis SCU and Magelis XBTGT/GK will enable a smartphone or a PC tablet to be remotely connected to the HMI application.

Magelis SCU Small HMI Controllers, Magelis XBTGC HMI Controllers and Magelis XBTGT/XBT GK Standard Advanced Panels offer the following HMI functions:

- Execution of programmed logic sequences with the five IEC 1131-2 languages (LD, ST, FBD, SFC, IL)
- Management of equipment on the CANopen fieldbus

Magelis SCU Small HMI Controllers

In addition to the aforementioned functions, Magelis SCU Small HMI Controllers enable management of:

- Integrated digital I/O
- Integrated analog I/O: Voltage, current and temperature (thermocouple, PT100, PT1000)
- 2 high speed counter (HSC) inputs, 100 kHz 1 channel or 50 kHz 2 channel
- 2 pulse train fast outputs, PTO/PWM 50 kHz

Magelis XBTGC HMI Controllers

In addition to the aforementioned functions, Magelis XBTGC HMI Controllers enable management of:

- Integrated digital I/O
- integrated analog I/O
- 4 high speed counter (HSC) inputs, 100 kHz 1 channel or 50 kHz 2 channel
- 4 pulse train fast outputs, PTO/PWM 65 kHz

(1) Depending on model.

Hardware control platforms

HMI controllers

Magelis™ SCU Small HMI Controllers,


Magelis™ XBTGC HMI Controllers,

Magelis™ XBTGT, XBTGK Standard Advanced Panels with control


Operating modes for the terminals

The following illustrations show the equipment that can be connected to Magelis SCU and XBTGC Controllers as well as to Magelis XBTGT/GK Advanced Panels according to their two operating modes.

Edit mode

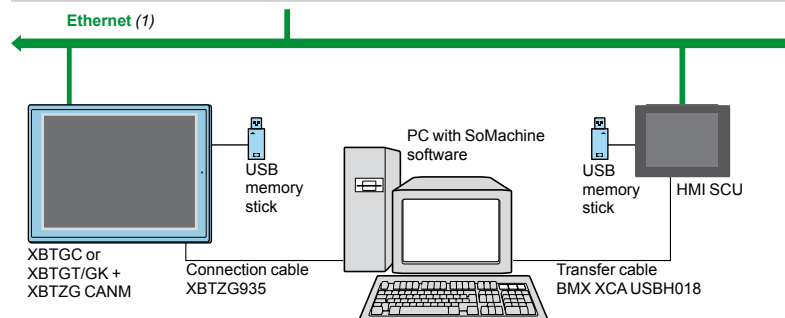

Run mode

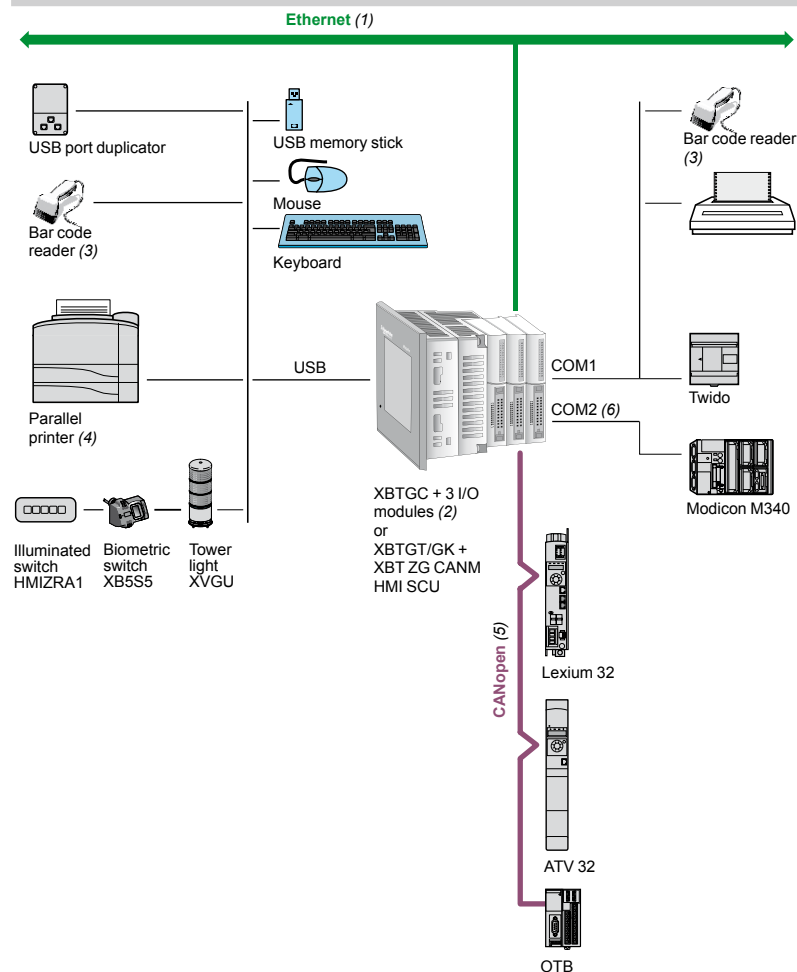

(1) With HMISCU●●●, XBTGC2230T/U, XBTGT●●30, XBTGT●●40, XBTGK●●30.

(2) With XBTGC●●●●T/U, maximum of 2/3 I/O modules depending on model.

(3) Should be a Gryphon barcode reader made by DataLogic except for HMI SCU.

(4) Should be a Hewlett Packard printer via a USB/PIO converter.

(5) Requires:

- for XBTGC: XBTZGCCAN CANopen master module

- for XBTGT/GK: XBTZGCANM CANopen master module.

(6) With XBTGT/GK.






Hardware control platforms

HMI controllers

Magelis™ SCU Small HMI controllers

Magelis™ SCU Small HMI controllers for control of simple machines

2

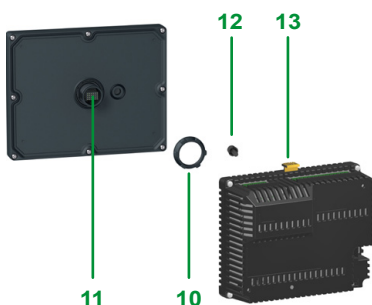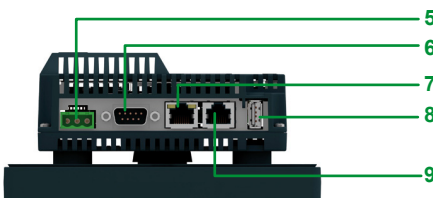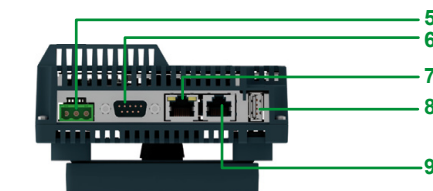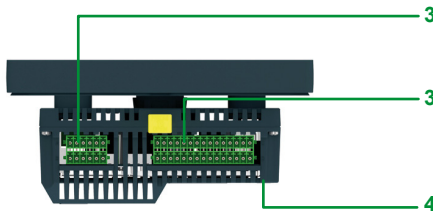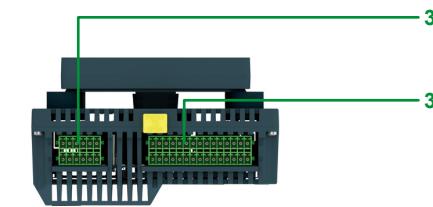

Description

Magelis HMI SCU-A5 Small HMI controllers

Front Panel

Magelis SCU Small HMI controllers for control of simple machines have the following on the front panel:

- 1 A 3.5" touch screen for displaying mimics (color TFT LCD)
- or
- 2 A 5.7" touch screen for displaying mimics (color TFT LCD)

Upper rear panel

The upper rear panel has the following:

- 3 Four removable terminal blocks for 16 digital inputs including 2 high speed counter (HSC) inputs (100 kHz 1 channel or 50 kHz 2 channel), 8 digital relay outputs and 2 source transistor outputs (PTO/PWM 50 kHz or 20 kHz pulse train if HSC used)

Lower rear panel

The lower rear panel has the following:

- 4 A USB mini-B device connector for application transfer (on left-hand side of panel)
- 5 A removable screw terminal block for 24 V $\bar{\text{V}}$ power supply
- 6 A 9-way SUB-D connector for CANopen link, fitted with an LED for signalling power supply and system operation status
- 7 An RJ45 connector for Ethernet TCP/IP, 10BASE-T/100BASE-TX link
- 8 A type A USB master connector for:
 - ☐ Connection of a peripheral device
 - ☐ Connection of a USB memory stick
 - ☐ Application transfer
- 9 An RJ45 male connector for RS 232C or RS 485 serial link connection to PLCs (COM1)

Fixing system

Magelis SCU Small HMI controllers consist of a front module (comprising the screen) and a rear module (comprising the CPU plus terminals and connectors). The two modules are fixed together via a hole measuring 22 mm in diameter.

The fixing system contains the following elements:

- 10 A fixing nut
- 11 A seal
- 12 An anti-rotation tee (can be used as an option)
- 13 A release mechanism: Simply press to separate the two modules once they have been fixed together

This system is included with the complete products (see page 2/87).






Note: The 2 modules can also be mounted separately: Using a remote connection cable enables the rear module and the front module to be separated and the Controller module mounted on DIN rail (see page 2/87).

Hardware control platforms

HMI controllers

Magelis™ SCU Small HMI controllers

Magelis™ SCU Small HMI controllers for control of simple processes

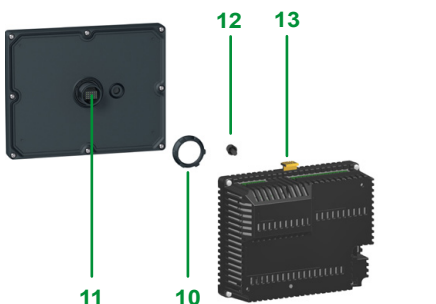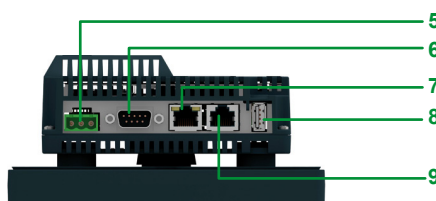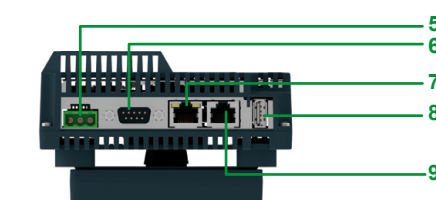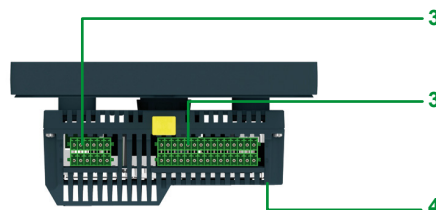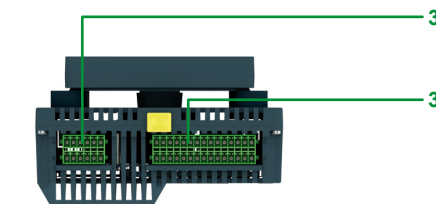

Description

Magelis HMI SCU●B5 Small HMI controllers

Front panel

Magelis SCU Small HMI controllers for control of simple processes have the following on the front panel:

- 1 A 3.5" touch screen for displaying mimics (color TFT LCD)
- or
- 2 A 5.7" touch screen for displaying mimics (color TFT LCD)

Upper rear panel

The upper rear panel has the following:

- 3 Four removable terminal blocks for 8 digital inputs including 2 fast HSC inputs (100 KHz 1 channel or 50 kHz 2 channel), 6 digital relay outputs, 2 transistor source outputs (PTO/PWM 50 kHz or 20 kHz pulse train if HSC used), 2 analog inputs (voltage, current), 2 temperature inputs (Thermocouple, PT100, PT1000) and 2 analog outputs (voltage, current)

Lower rear panel

The lower rear panel has the following:

- 4 A USB mini-B device connector for application transfer (on left-hand side of panel)
- 5 A removable screw terminal block for 24 V $\square$ power supply
- 6 A 9-way SUB-D connector for CANopen link, fitted with an LED for signalling power supply and system operation status
- 7 An RJ45 connector for Ethernet TCP/IP, 10BASE-T/100BASE-TX link
- 8 A type A USB master connector for:
 - ☐ Connection of a peripheral device
 - ☐ Connection of a USB memory stick
 - ☐ Application transfer
- 9 An RJ45 male connector for RS 232C or RS 485 serial link connection to PLCs (COM1)

Fixing system

Magelis HMI SCU Small HMI controllers consist of a front module (comprising the screen) and a rear module (comprising the CPU plus terminals and connectors). The two modules are fixed together via a hole measuring 22 mm in diameter.

The fixing system contains the following elements:

- 10 A fixing nut
- 11 A seal
- 12 An anti-rotation tee (can be used as an option)
- 13 A release mechanism: Simply press to separate the two modules once they have been fixed together

This system is included with the complete products (see page 2/87).

Note: The 2 modules can also be mounted separately: Using a remote connection cable enables the rear module and the front module to be separated and the Controller module mounted on DIN rail (see page 2/87).

Hardware control platforms

HMI controllers

Magelis™ SCU Small HMI controllers


CANopen

Presentation

Magelis SCU Small HMI controllers integrate the CANopen bus master function.

SoMachine software is used to configure the CANopen machine bus (1) for the Magelis SCU Small HMI controllers (1).

Example architecture

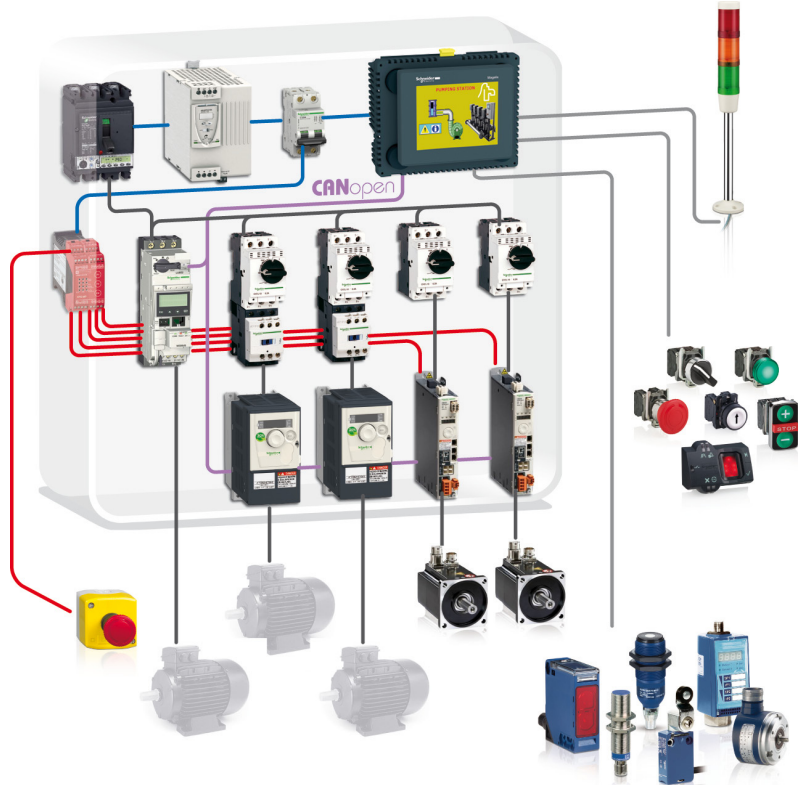

The above configuration shows an example architecture based on the Magelis SCU Small HMI controllers which provide the CANopen bus master function. The CANopen bus is made up of a master station, a Magelis SCU Small HMI Controller and slave stations. The master is responsible for the configuration, exchanges and diagnostics to the slaves.

The various services offered are:

- One or more profiles are supplied for Schneider Electric slaves such as ATV 312/61/71 variable speed drives and Lexium 32 servo drives. This makes it possible to configure the slave according to a predefined mode. Profiles provide the user with a defined operating mode so there is no need to check how the mode is configured.
- For third-party slaves:
 - The user can choose from a list which can be modified. This simply involves importing an EDS-type (Electronic Data Sheet) description file.
 - The slave can be positioned on the bus: The slave number, speed, monitoring, etc. can be defined.
 - The user can select variables from the list of variables managed by the slave.
 - A link between variables and the data exchanged.
 - Symbolization of data exchanged.

The CANopen bus is used to manage various slaves such as:

- Digital and analog slaves
- Variable speed drives, motor starters, etc.

(1) For more information on SoMachine software and CANopen bus, please refer to our website www.schneider-electric.com.



HMISCU6●5



HMISCU8●5



XBTZGUSB



HMIZSURDP●

Magelis HMISCU●A5 Small HMI controllers for control of simple machines (1)**Complete products 24 V --- (Screen module + Controller module)**

Type of screen	No. of ports	Application memory capacity	Compact Flash memory	Integrated I/O	No. of Ethernet ports	Reference	Weight kg/lb
3.5" QVGA color TFT	2 USB 1 COM1 1 CANopen	128 MB	No	16 digital I/ 10 digital O	1	HMISCU6A5	0.512/ 1.129
5.7" QVGA color TFT	2 USB 1 COM1 1 CANopen	128 MB	No	16 digital I/ 10 digital O	1	HMISCU8A5	0.764/ 1.684

Magelis HMISCU●B5 Small HMI controllers for control of simple processes (1)

Type of screen	No. of ports	Application memory capacity	Compact Flash memory	Integrated I/O	No. of Ethernet ports	Reference	Weight kg/lb
3.5" QVGA color TFT	2 USB 1 COM1 1 CANopen	128 MB	No	8 digital I/8 digital O 4 analog I/ 2 analog O	1	HMISCU6B5	0.551/ 1.215
5.7" QVGA color TFT	2 USB 1 COM1 1 CANopen	128 MB	No	8 digital I/8 digital O 4 analog I/ 2 analog O	1	HMISCU8B5	0.803/ 1.770

Separate parts

Description	Compatibility		Reference	Weight kg/ lb
Protective sheets (5 peel-off sheets)	HMISCU6●●		XBTZG61	0.200/ 0.441
	HMISCU8●●		XBTZG62	0.200/ 0.441
Designation	Description	Length m/ft	Reference	Weight kg/ lb
Remote USB port location for type A terminal	Enables the USB port to be located remotely on the rear of the HMI terminal on a panel or cabinet door (Ø 21 mm fixing device)	1.0/3.28	XBTZGUSB	—
Remote USB port location for mini type B terminal		—	HMIZSUSBB	—
Remote Controller module connection cable	Enables separate mounting of the Controller module and Screen module on DIN rail (for example, inside an enclosure)	3.0/9.84	HMIZSURDP	—
		5.0/16.40	HMIZSURDP5	—
Cable for transferring application to PC	USB type connector	1.8/5.90	BMXXCAUSBH018	—
Accessories kit (compatible with all Magelis SCU Small controllers)	Contains: ■ An anti-rotation tee ■ A USB A type clip ■ A USB mini-B type clip ■ An adaptor panel for mounting on an enclosure of 1 mm in thickness	—	HMIZSUKIT	—

Replacement parts

Description	For use with	Reference	Weight kg/lb
Direct I/O connector	All Magelis SCU Small controllers	HMIZSDIO	—
3.5" Screen module	Controller modules HMISAC and HMISBC	HMIS65	0.153/ 0.337
5.7" Screen module	Controller modules HMISAC and HMISBC	HMIS85	0.405/ 0.893
Simple machine Controller module	Screen modules HMIS65 (3.5") and HMIS85 (5.7")	HMISAC	0.359/ 0.791
Simple process Controller module	Screen modules HMIS65 (3.5") and HMIS85 (5.7")	HMISBC	0.398/ 0.877
Fixing nuts	Set of 10 Ø 22 mm nuts (the front module of the SCU Small controller is fixed on the enclosure using a Ø 22 mm nut, see page 2/84)	ZB5AZ901	—
Tightening tool	For tightening fixing nut	ZB5AZ905	—

(1) Mounting system for Ø 22 mm hole, power supply and I/O connectors, locking device for USB connector and instruction sheet included with terminals. The setup documentation for Magelis SCU Small controllers is supplied in electronic format with the SoMachine software (please refer to our website www.schneider-electric.com).

Hardware control platforms

HMI Controllers

Magelis XBTGC HMI Controller, Magelis XBTGT/GK Advanced Panels + control function

2



Magelis XBTGC HMI Controller

Presentation

The Magelis HMI Controller offer forms a part of Flexible Machine Control approach, a key component of MachineStruxure™, which brings you maximum flexibility and ensures the most optimised control solution.

The Magelis HMI Controller offer brings together HMI and control functions within in a single product. This reduces the amount of equipment required and the associated costs throughout the life cycle of the machine.

This offer comprises two ranges:

- The compact range: Magelis XBTGC HMI Controller
- The modular range: Magelis XBTGT/GK Advanced Panels + XBTZC CANM CANopen module

Magelis XBTGC HMI Controllers (compact range)

Magelis XBTGC HMI Controllers optimize setup due to their compact design.

This range comprises 6 touch screen terminals, with the following, depending on the model:

- 3.8" monochrome screen, 12 integrated inputs/6 integrated outputs (sink or source)
- 5.7" monochrome or colour screen, 16 integrated inputs/16 integrated outputs (sink or source)
- A wide choice of communication interfaces: USB, serial link, CANopen and Ethernet

In order to adapt easily to different configurations, it is possible to add discrete I/O expansion modules at the rear of the Controller.

Magelis XBTGT/GK Advanced Panels + XBTZC CANM CANopen module (modular range)

This range comprises complete Magelis XBT GT or Magelis XBT GK Advanced Panel offers to which a control part is added with the CANopen module XBTZG CANM. During operation, this module controls the I/O and the peripherals distributed via the CANopen bus.

The combination with Magelis XBT GT or Magelis XBT GK Advanced Panels gives a wide choice of screen sizes and types of data entry, depending on the model:

- 17 XBT GT touch screen terminals:
 - 5.7" monochrome or colour screens
 - 7.5", 10.4", 12.1" and 15" colour screens
- 3 XBT GK terminals with keypad and/or touch screen:
 - 5.7" monochrome or colour screens
 - 10.4" colour screens

This combination also offers numerous advanced functions such as video, data management (sharing of data, log), etc.


Operation

With their fast, multitasking processors, all the HMI Controllers combine HMI and control functions and share the same screen and communication features and dimensions.

The internal memory can be freely used by both the HMI function and the control function.

Processing is split 75% on the HMI part and 25% on the control part. The processing can be configured for 3 tasks, including 1 master task.

XBTGC HMI Controllers also have the same I/O modules, the same Telefast pre-wired system and the same peripherals on the CANopen bus as the M238 logic controller.

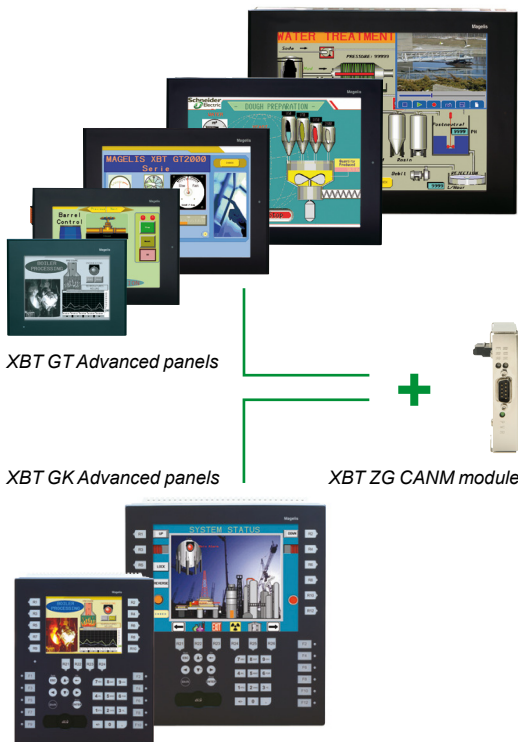

XBT GT Advanced panels

XBT GK Advanced panels

XBT ZG CANM module

HMI function: Magelis XBT GT/GK Advanced Panels
+
Control function: XBTZG CANM CANopen master module

Hardware control platforms

HMI Controllers

Magelis XBTGC HMI Controller, Magelis XBTGT/GK Advanced Panels + control function



SoMachine




Vijeo Designer
(included in SoMachine)

Configuration

Magelis XBTGC HMI Controllers and Magelis XBTGT/GK Advanced Panels can be configured with Schneider Electric's unique machine automation software: SoMachine. (See page 5/2)

This software, combining both HMI and control functions, is based on the Vijeo Designer software in the Windows XP and Windows Vista environment. The SoMachine software boasts an advanced user interface with many configurable windows, enabling unique projects to be developed quickly and easily.

Communication

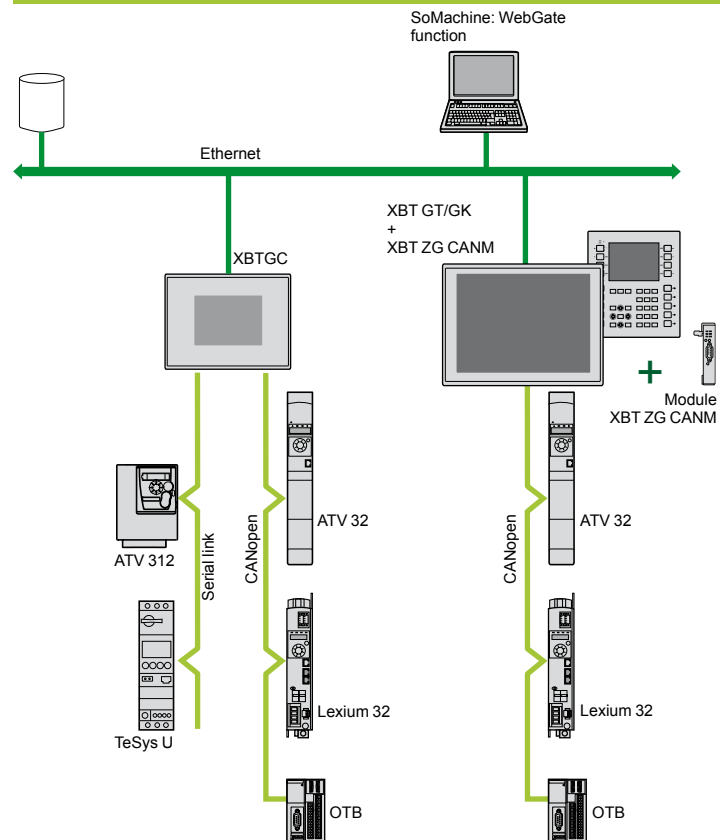

Examples of communication architectures

Depending on the model, Magelis XBTGC HMI Controllers and Magelis XBTGT/GK Advanced Panels communicate with automation equipment via 1 or 2 integrated serial links, based on communication protocols:

- Schneider Electric (Uni-TE, Modbus)
- Third party: Mitsubishi Electric, Omron, Allen-Bradley and Siemens

Depending on the model, they can be connected to Ethernet TCP/IP networks with the Modbus TCP protocol or a third-party protocol, and can be used as the CANopen master to control all the peripherals which can be connected on this bus.

Functions

Magelis XBTGC HMI Controllers and Magelis XBTGT/GK Advanced Panels offer the following HMI functions:

- Display of animated mimics with 8 types of animation (pressing the touch panel, colour changes, filling, movement, rotation, size, visibility and value display)
- Control, modification of numeric and alphanumeric values
- Display of current date and time
- Real-time curves and trend curves with log
- Alarm display, alarm log and management of alarm groups
- Multi-window management
- Page calls initiated by the operator
- Multilingual application management (10 languages simultaneously)
- Recipe management
- Data processing via Java script
- Application support and USB key external memory logs
- Management of serial printers and barcode readers

Magelis XBTGC HMI Controllers and Magelis XBTGT/GK Advanced Panels (1) have been designed for Transparent Ready architectures and equipment (combination of web and Ethernet TCP/IP technologies).

With the WebGate function, it is possible to control or carry out maintenance remotely.

They offer the following control functions:

- Execution of programmed logic sequences with the 5 IEC 1131-2 languages (LD, ST, FBD, SFC, IL)
 - Management of equipment on the CANopen fieldbus
- In addition to these functions, Magelis XBTGC HMI Controllers can manage:
- Discrete I/O on integrated or remote expansion modules
 - Analog I/O on remote expansion modules

(1) Depending on model

Hardware control platforms


HMI Controllers

Magelis XBTGC HMI Controller, Magelis XBTGT/GK
Advanced Panels + control function


Operating modes for the terminals

The illustrations below show which equipment can be connected to XBT terminals based on their two operating modes.

Edit mode

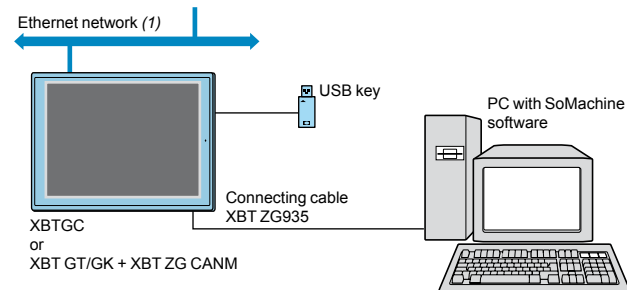

Run mode

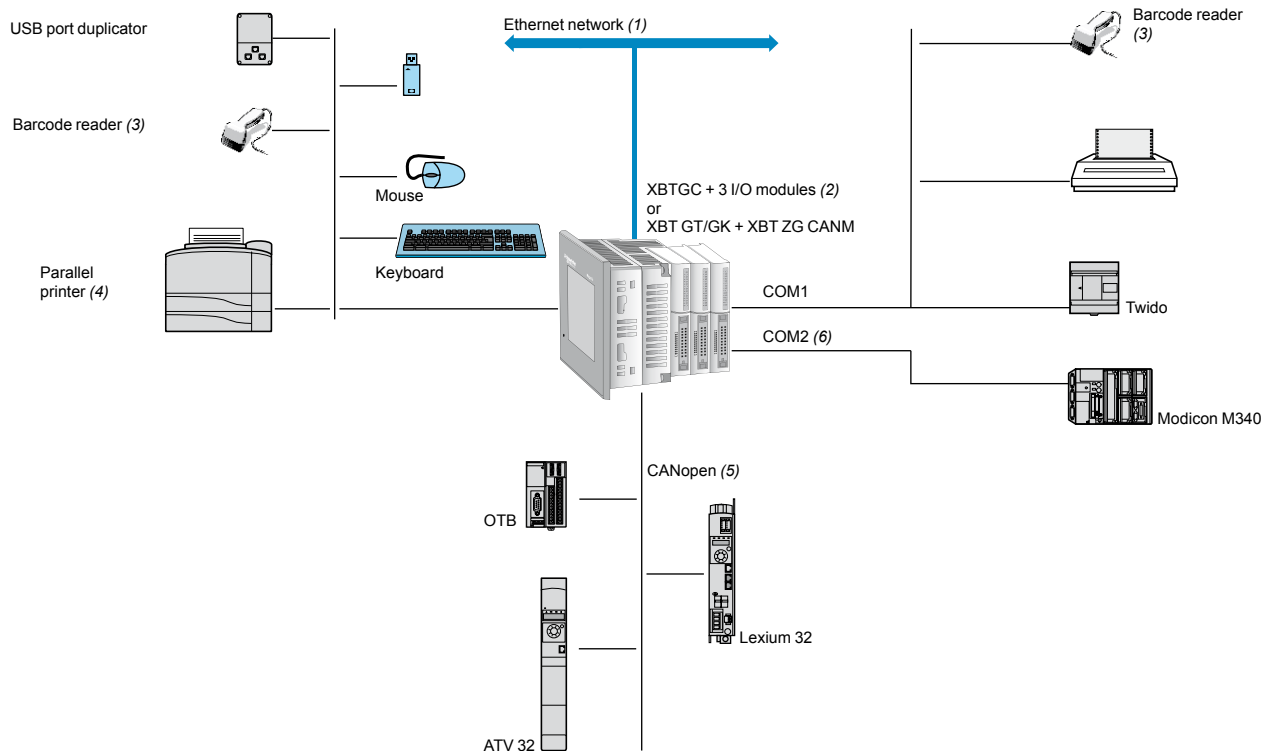

(1) With XBTGC2230T/U, XBTGT●●30, XBTGT●●40, XBTGK●●30

(2) With XBTGC ●●●●T/U

(3) Should be a DataLogic Gryphon barcode reader

(4) Should be a Hewlett Packard printer via a USB/PIO converter

(5) Requires:

- For XBTGC: XBTZGC CAN CANopen master module

- For XBTGT/GK: XBTZG CANM CANopen master module


(6) With XBTGT/GK

Description

Magelis XBTGC1100 T/U HMI Controller


The front panel comprises:


- 1 A touch screen for displaying mimics (3.8" amber or red mode monochrome)
- 2 A control indicator showing the terminal's operating mode



The rear panel comprises:

- 1 A removable screw terminal block for the 24 V $\bar{\text{---}}$ power supply
- 2 A type A USB master connector for peripheral connection and application transfer
- 3 A removable terminal block for 12 discrete inputs and 6 discrete outputs
- 4 An interface for connecting M238 logic controller I/O expansion modules
- 5 An interface for connecting the CANopen bus master module (see page 4/14)
- 6 Discrete I/O expansion module (TM2 D●●). To be ordered separately (see page 3/6)

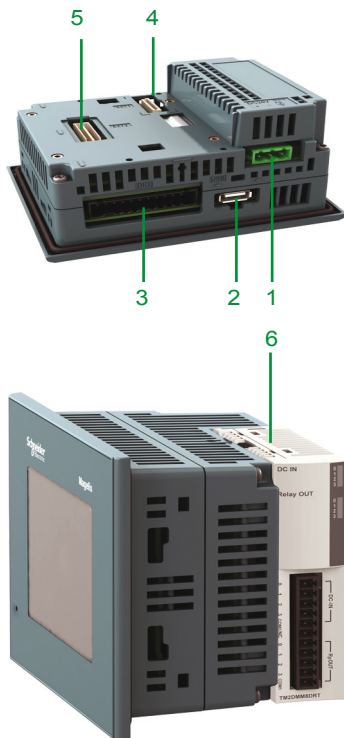

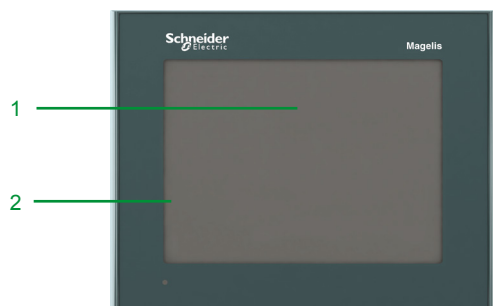


Description

Magelis XBTGC2●20 and XBTGC2●30 HMI Controller

The front panel comprises:

- 1 A touch screen for displaying mimics (5.7" monochrome or colour)
- 2 A multicolour indicator (green, orange and red) showing the terminal's operating mode

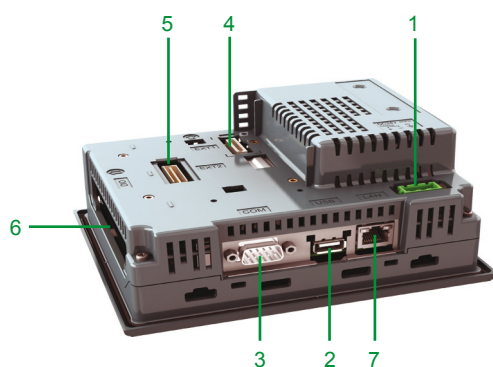



The rear panel comprises:

- 1 A removable screw terminal block for 24 V $\overline{\text{---}}$ supply
- 2 A type A USB master connector for peripheral connection and application transfer
- 3 A 9-way male SUB-D connector for RS 232C or RS 422/485 serial link to PLCs (COM1)
- 4 An interface for connecting the M238 logic controller I/O expansion module
- 5 An interface for connecting the CANopen bus master module (see page 4/17)
- 6 A removable terminal block for 16 discrete inputs and 16 discrete outputs

On XBTGC2330 only:

- 7 An RJ45 connector for Ethernet TCP/IP, 10BASE-T/100BASE-TX connection
- 8 Discrete I/O expansion module (TM2D●●). To be ordered separately (see page 3/6)





XBTGC1100●



XBTGC2●●●



XBTZGUSB

Magelis XBTGC HMI Controller (1)

Type of screen	No. of ports	Application memory capacity	Compact Flash memory	Integrated I/O	No. of Ethernet ports	Reference	Weight kg/lb
3.8" screen							
STN amber or red	1 USB	16 MB	No	12 I/6 O source	-	XBTGC1100T	0.400/ 0.882
				12 I/6 O sink	-	XBTGC1100U	0.400/ 0.882
5.7" screen							
STN black and white mode	1 COM1	16 MB	No	16 I/16 O source	-	XBTGC2120T	1.000/ 2.205
	1 USB			16 I/16 O sink	-	XBTGC2120U	1.000/ 2.205
5.7" screen							
STN colour	1 COM1	16 MB	No	16 I/16 O source	1	XBTGC2230T	1.000/ 2.205
	1 USB			16 I/16 O sink	1	XBTGC2230U	1.000/ 2.205

Separate parts

Designation	Compatibility	Size	Reference	Weight kg/lb
Protective sheets	XBTGC1100	—	XBTZG60	—
(5 peel-off sheets)	XBTGC2●●0	—	XBTZG62	0.200/ 0.441
Designation	Description	Length m/ft	Reference	Weight kg/lb
Remote USB port location for type A XBT terminal	Enables the USB port to be located remotely on the rear of the XBT terminal on a panel or cabinet door (Ø 21 mm fixing device)	1/ 3.28	XBTZGUSB	—
Remote USB port location for mini type B XBT terminal		-	XBTZGUSBB	—
XBTGC connection to CANopen master fieldbus	Connection via card on expansion bus	-	XBTZGCCAN	—
Cable for transferring application to PC	USB connector, type TTL	2/ 6.56	XBTZG935	—

Replacement parts

Designation	Use for	Reference	Weight kg/lb
Installation gaskets	XBTGC1100	XBTZG51	0.030/ 0.066
	XBTGT21●0	XBTZG52	0.030/ 0.066
USB spring clip	XBTGC1100	XBTZGCLP2	—
	XBTGC2●●0	XBTZGCLP4	—
Mounting kit	4 clips and screws (max. tightening torque: 0.5 Nm), supplied with all XBTGC terminals	XBTZGFIX	0.100/ 0.220
Spring clip for expansion modules on XBTGC	XBTGC2●●0 terminals	XBTZGCHOK	0.030/ 0.066
Power supply connector	XBTGC1●●●/GC2●●●	XBTZGPWS1	0.030/ 0.066
Direct I/O connector	XBTGC1000	XBTZGDIO1	—
	XBTGC2000	XBTZGDIO2	—

(1) Terminals supplied with fixing kit (clips with screws), locking catch for USB connectors, spring clip for expansion modules (except XBTGC1100) and instruction sheets. The setup documentation for XBTGC terminals is supplied in electronic format with the SoMachine software (see page 5/5).

**XBTGC1●●● Combining two TM2 expansion modules (1)**

Combinations	Type	Type	Total thickness (mm)	Combination
A	A		35.2	Authorized
A	B		41.1	
B	B		47.0	
A	C		47.3	
B	C		53.2	
A	D		56.7	
C	C		59.4	
B	D		62.6	Prohibited
C	D		68.8	
D	D		78.2	

XBTGC2●●● Combining two TM2 expansion modules (1)

Combinations	Type	Type	Total thickness (mm)	Combination
A	A		35.2	Authorized
A	B		41.1	
B	B		47.0	
A	C		47.3	
B	C		53.2	
A	D		56.7	
C	C		59.4	
B	D		62.6	Prohibited
C	D		68.8	
D	D		78.2	

Combining three TM2 expansion modules (1)

Combinations	Type	Type	Type	Total thickness (mm)	Combination
A	A	A		52.8	Authorized with hook (2)
A	A	B		58.7	
A	B	B		64.6	
B	B	B		70.5	
Any other combination					Prohibited

(1) Modicon TM2 expansion modules: see page 3/6.


(2) Hook supplied with the product

Hardware control platforms

HMI Controllers

Modicon Telefast ABE7 pre-wired system for
Magelis XBTGC HMI Controller

Presentation

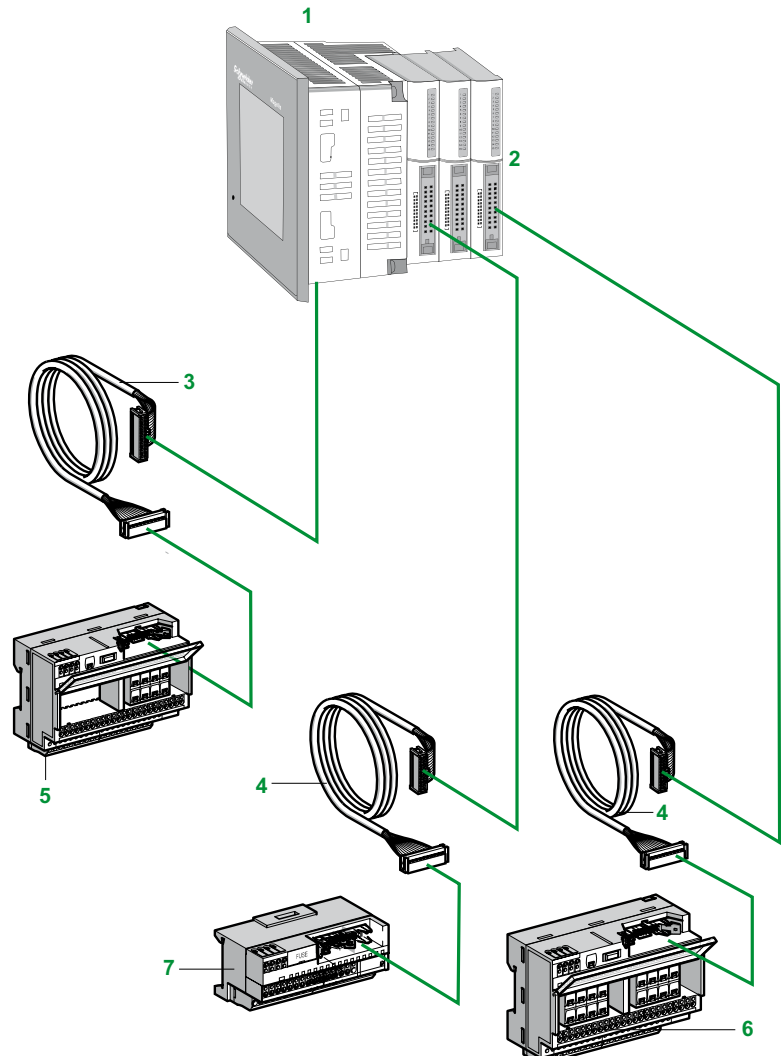

- 1 XBT GC equipped with direct I/O 22 or 38-way connectors. The modularity options offered have 18 or 32 I/O.
- 2 Input and output modules equipped with 20-way HE 10 connectors. The modularity options offered have 16 or 32 I/O.
- 3 2 m AWG 28/0.08 mm² cables, depending on the model:
 - For **XBTGC1100T/U**: **XBTZGABE1** cable equipped with a 26-way HE 10 connector and a 22-way direct I/O-XBT GC connector at each end.
 - For **XBTGC2...T/U**: **XBTZGABE2** cable equipped with two 20-way HE10 connectors and a 38-way direct I/O-XBT GC connector.
- 4 **ABFT20E...0** cable equipped with a 20-way HE 10 connector at each end. This cable is available in 0.5, 1, 2 and 3 metre lengths (AWG 28/0.08 mm²).
- 5 Depending on model:
 - For **XBTGC1100T**: **ABE7B20MPN2** or **ABE7B20MRM20** 20 channel sub-base for bases.
 - For **XBTGC 2...T**: **ABE7E16EPN20** or **ABE7E16SPN2** 16-channel sub-base.
- 6 **ABE7E16SPN22** or **ABE7E16SRM20** 16-channel sub-base for output expansion modules.
- 7 **ABE7E16EPN20** or **ABE7E16SPN20** 16-channel sub-base for input or output expansion modules.

Combinations involving modular bases and I/O expansion modules

Integrated in Twido programmable controllers		XBTGC				Discrete I/O expansion modules	
		Integrated I/O				Inputs	Outputs (source)
		XBTGC1100T		XBTGC2●●●T		TM2DDI16DK (16 I) TM2DDI32DK (32 I)	TM2DDO16TK (16 O) TM2DDO32TK (32 O)
		12 I	6 O source	16 I	16 O source		
Types of connection terminal block		Direct I/O, 22-way		Direct I/O, 38-way		HE 10, 20-way	
Connection to XBT GC HMI programmable controller		XBTZGABE1		XBTZGABE2		ABFT20E●●● (HE 10, 20-way)	
Passive connection sub-bases							
20 channels	ABE7B20MPN2●		(1)				
16 channels	ABE7E16EPN20						
	ABE7E16SPN2●						
Output adaptor sub-bases							
20 channels	ABE7B20MRM20		(2)				
16 channels	ABE7E16SRM20						

 Compatible

 Not compatible

Note: Telefast cables and modules are not compatible with XBT GC which have sink outputs (suffix U).

(1) 6 channels used out of 8 available

(2) 6 channels used out of 8 available with 2 transistor outputs and 4 relay outputs

Hardware control platforms

HMI Controllers

Modicon Telefast ABE7 pre-wired system for Magelis XBTGC HMI Controller



ABE7B20MPN20



ABE7E16EPN20



ABE7E16SRM20

References

For XBTGC 1100T bases

Number of I/O	No./ type of input	No./ type of output	Compatibility	LED per channel	Fuse	Reference	Weight kg/lb
20	12, sink 24 V $\overline{\text{---}}$	6, source 24 V $\overline{\text{---}}$	XBTGC1100T	No	No	ABE7B20MPN20	0.430/ 0.948
				Yes	Yes	ABE7B20MPN22	0.430/ 0.948
	12, sink 24 V $\overline{\text{---}}$	2, source 24 V $\overline{\text{---}}$, 2 A and 4, relay 24/250 V $\overline{\text{---}}$ $\sim$, 3 A	XBTGC1100T	No	No	ABE7B20MRM20	0.430/ 0.948

For expansion modules or for XBTGC 2000T bases

Number of inputs	Type of input	Compatibility	LED per channel	Fuse	Reference	Weight kg/lb
16	Sink 24 V $\overline{\text{---}}$	TM2 DDI16DK/ DDI32K and XBTGC2000T	No	No	ABE7E16EPN20	0.430/ 0.948
Number of outputs	Type of output	Compatibility	LED per channel	Fuse	Reference	Weight kg/lb
16	Source 24 V $\overline{\text{---}}$	TM2 DDO16TK/ DDO32TK and XBTGC2000T	No	No	ABE7E16SPN20	0.450/ 0.992
			Yes	Yes	ABE7E16SPN22	0.450/ 0.992
	Relay 24/250 V $\overline{\text{---}}$ $\sim$, 3 A		No	No	ABE7E16SRM20	0.430/ 0.948

Connection cables for XBTGC

Type of signal	Compatibility	Connection type		Gauge Cross-sect.	Length m/ft (1)	Reference	Weight kg/lb
		XBTGC side	Telefast side				
Discrete I/O	XBTGC 1100T	Direct I/O	HE 10	AWG 28	2/	XBTZGABE1	0.180/
		22-way	26-way	0.08 mm ²	6.56		0.397
	XBTGC 2000T	Direct I/O	2 x HE 10		2/	XBTZGABE2	0.180/
		38-way	20-way		6.56		0.397
	TM2 DDI16DK/ DDI32DK/ DDO16TK/ DDO32TK	HE 10	HE 10	AWG 28	0.5/	ABFT20E050	0.060/
		20-way	20-way	0.08 mm ²	1.64		0.132
					1/	ABFT20E100	0.080/
				3.28	0.176		
				2/	ABFT20E200	0.140/	
			6.56	0.309			

Accessories

Designation	Number of shunted terminals	Characteristics	Sold in lots of	Unit reference	Weight kg/lb
Optional snap-on terminal blocks	20	—	5	ABE7BV20	0.060/ 0.132
	12+8	—	5	ABE7BV20TB	0.060/ 0.132
Quick-blow fuses 5 x 20, 250 V, UL	—	0.125 A	10	ABE7FU012	0.010/ 0.022
		0.315 A	10	ABE7FU030	0.010/ 0.022
		1 A	10	ABE7FU100	0.010/ 0.022
		2 A	10	ABE7FU200	0.010/ 0.022

(1) Please contact us for lengths > 2 m.

Hardware control platforms

HMI Controllers

Modicon Telefast ABE7 pre-wired system for Magelis
XBTGC HMI Controller

References (continued)

Separate parts

Description	Type	Compatibility	Reference	Weight kg/ lb
Connectors Sold in lots of 5	HE 10 female 26-way	TWD LMDA20DTK/ LMDA40DTK	TWDFCN2K26	—
	HE 10 female 20-way	TM2 DDI16DK/ DDI32DK/ DDO16TK/ DDO32TK	TWDFCN2K20	—
Screw terminals Sold in lots of 5	10-way	TM2 DDI16DT/DAI8DT/ DDO8T/DRA8RT	TWDFTB2T10	—
	11-way	TM2 DMM8DRT/ AMI8T/ARI8HT	TWDFTB2T11	—

Designation	Compatibility	Connection type		Gauge/ Cross-sect.	Length m/ft	Reference	Weight kg/ lb
		Twido side	Other side				
Cables for discrete I/O	TM2 DDI16DK/ DDI32DK/ DDO16TK/ DDO32TK	HE 10 20-way	Flying leads	AWG 22 0.035 mm ²	3/ 9.84	TWDFCW30K	0.405/ 0.893
					5/ 16.40	TWDFCW50K	0.670/ 1.477
Rolled ribbon cable	20 conductors	—	—	AWG 28 0.08 mm ²	20/ 65.62	ABFC20R200	1.310/ 2.888

chapter 3

Expansion modules



All technical information about products listed in this chapter
are available on www.schneider-electric.com



■ General selection guide	
□ Local and remote I/O expansion modules	3/2
□ Distributed I/O expansion modules	3/4
■ Modicon TM2 modules	
for HMI controllers	
□ Modicon TM2 Digital modules	
Selection guide	3/6
Presentation, description, references	3/10
□ Modicon TM2 Analog modules	
Selection guide	3/14
Presentation, description, references	3/16
□ Modicon TM2 expert modules	
Presentation, description, references	3/18
■ Modicon TM3 modules	
for Modicon M221, M241 and M251 logic controllers	
Presentation of the range	3/20
□ Modicon TM3 Digital modules	
Selection guide	3/22
Presentation, description, references	3/24
□ Modicon TM3 Analog modules	
Selection guide	3/26
Presentation, description, references	3/28
□ Modicon TM3 expert modules for TeSys motor-starter	
Presentation, description, references	3/30
□ Modicon TM3 Functional Safety modules	
Selection guide	3/32
Presentation, description, references	3/34
□ Modicon TM3 bus expansion system (transmitter and receiver modules)	
Presentation, description, references	3/36
■ Modicon TM5 modules	
for Modicon M258 logic controller and Modicon LMC058 motion controller	
□ Modicon TM5 compact blocks	
Selection guide	3/38
Presentation, description, references	3/40
□ Modicon TM5 Digital modules and Common Distribution modules	
Selection guide	3/42
Presentation, description, references	3/44 to 3/49
□ Modicon TM5 Analog modules	
Selection guide	3/50
Presentation, description, references	3/52
□ Modicon TM5 Expert modules	
Selection guide	3/54
Presentation, description, references	3/56
□ Modicon TM5 Power Distribution modules	
Presentation, description, references	3/58
□ Modicon TM5 transmitter and receiver modules	
Presentation, description	3/60
References	3/61
■ Modicon TM7 blocks	
for Modicon M258 logic controller and Modicon LMC058 motion controller	
Presentation	3/64
□ Digital blocks	
Selection guide	3/66
Description, references	3/68
□ Analog blocks	
Selection guide	3/70
Description, references	3/71
□ Power distribution blocks	
Description, references	3/73
■ Distributed I/O Expansion modules	
Modicon OTB interface module	4/18
Modicon TM5 CANopen interface module	4/24
Modicon TM7 CANopen interface blocks	4/28

Expansion modules

Local and remote I/O expansion modules

Applications	Local I/O (IP 20)			Local and/or remote I/O (IP 20)			
Compatibility	■ Modicon M238 logic controller ■ XBTGC HMI controllers ■ Modicon OTB			■ Modicon M221 logic controllers ■ Modicon M241 logic controller ■ Modicon M251 logic controller			
I/O type	Digital	Analog	Expert	Digital	Analog	Expert	Safety
Remote I/O configuration				 <i>Modicon TM3 transmitter/receiver: For use with remote I/O (1)</i>			
Hardware				+			
Bus type				— <i>TM3 expansion bus</i> 			
							
Inputs	Number (depending on model)	4 to 32 inputs	2 to 8 inputs	2 channels with 6 inputs	2 to 32 inputs	2 to 8 inputs	Control of up to four TeSys motor starters
	Type (depending on model)	24 V $\overline{\text{---}}$ 120 V $\sim$	Voltage, Current, Temperature	24 V $\overline{\text{---}}$ sensors (2-wire and 3-wire) 15...30 V $\overline{\text{---}}$ incremental encoders (60 kHz)	$\overline{\text{---}}$ 24 V, $\sim$ 120 V	- 10...+ 10 VDC, 0...+ 10 VDC / 0...20 mA, 4...20 mA temperature probe : TC (J, K, R, S, B, T, N, E, C, L) RTC (Ni100, Ni1000, PT100, PT1000)	
Outputs	Number (depending on model)	8 to 32 outputs	1 to 2 outputs	2 channels with 2 outputs	8 to 32 outputs	1 to 4 outputs	Control of ☐ Emergency stops ☐ Switches ☐ Light curtains ☐ Sensitive mats or edges
	Type (depending on model)	24 V $\overline{\text{---}}$ transistor, relay	0...10 V, $\pm$ 10 V, 4...20 mA	24 V $\overline{\text{---}}$ transistor	24 V $\overline{\text{---}}$ transistor, relay	- 10...+ 10 VDC, 0...+ 10 VDC/ 0...20 mA, 4...20 mA	
Range	Modicon TM2			Modicon TM3			
Type of expansion module	Digital modules	Analog modules	Expert modules	Digital modules	Analog modules	Expert module	Functional Safety modules (Powered by Preventa technology)
Page	3/6	3/14	3/18	3/22	3/28	3/30	3/32

(1) Modicon **TM3** transmitter/receiver modules, see page 3/20.
Nota: distributed I/O configurations, see the following pages

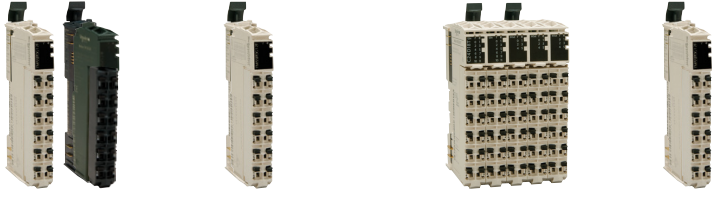Local and/or remote I/O (IP 20)				Remote I/O expansion bus (IP 67)	
■ Modicon M258 logic controller ■ Modicon LMC058 motion controller ■ Modicon LMC078 motion controller				■ Modicon M258 logic controller ■ Modicon LMC058 motion controller ■ Modicon LMC078 motion controller	
Digital	Analog	Digital/analog	Expert	Digital	Analog
 Modicon TM5 transmitter/receiver: For use with remote I/O (2)				 Modicon TM5 transmitter/receiver: Required (2)	
+				+	
TM5 expansion bus				TM7 expansion bus	
					
2 to 12 inputs	2 to 6 inputs	Digital: 12 to 14 inputs Analog: 4 inputs	1 or 2 channels with 2 inputs	8 to 16 inputs	2 to 4 inputs
24 V $\overline{\text{---}}$ 100/120 V $\sim$, 100/240 V $\sim$	Voltage, Current, Temperature Strain gauge	Digital: 24 V $\overline{\text{---}}$ Analog: Voltage, Current	5 V $\overline{\text{---}}$, 24 V $\overline{\text{---}}$ (from 50 kHz to 1 MHz)	24 V $\overline{\text{---}}$	Voltage, Current, Temperature Resistance
2 to 12 outputs	2 to 4 outputs	Digital: 6 to 18 outputs Analog: 2 outputs	-	8 to 16 outputs	2 to 4 outputs
24 V $\overline{\text{---}}$ 30/230 V $\sim$, 100/240 V $\sim$	- 10...+ 10 V, 0...20 mA	Digital: 24 V $\overline{\text{---}}$ Analog: Voltage/Current	-	24 V $\overline{\text{---}}$ Transistor/Source	- 10...+ 10 V, 0...20 mA
Modicon TM5				Modicon TM7	
Digital modules	Analog modules	Compacts blocks	Expert modules	Digital blocks	Analog blocks
3/42	3/50	3/38	3/54	3/64	3/64

(2) Modicon **TM5** transmitter/receiver modules, see page 3/60.

Expansion modules
Distributed I/O expansion modules

Applications		Optimum distributed I/O (IP 20)	
Compatibility		■ Modicon M238 logic controller ■ XBTGC HMI controller, XBTGT/GK with monitoring function ■ Altivar IM C drive controller	
Available buses and networks		■ Ethernet Modbus TCP/IP ■ CANopen bus ■ Modbus serial link (RS 485)	
Configuration with I/O expansion modules	Module type	Modicon TM2: □ Digital I/O modules □ Analog I/O modules □ Expert modules □ Common distribution modules	
	Capacity	For 1 Modicon OTB interface module: 7 Modicon TM2 modules max. Including: □ Digital I/O modules: - 132 I/O max. with modules with screw terminals - 188 I/O max. with modules with spring terminals - 244 I/O max. with modules with HE10 connector □ Analog I/O modules with screw terminals: up to 7 x 8 inputs, or 7 x 2 outputs, or 7 x (4I/2O) □ Expert modules □ Common distribution module	
Integrated I/O		12 x 24 V $\overline{\text{---}}$ digital inputs 2 x 24 V $\overline{\text{---}}$ solid state outputs 6 x 30 V $\overline{\text{---}}$/240 V $\sim$ relay outputs 2 channels: 5 kHz/20 kHz 2 PWM function channels	
Range		Modicon OTB interface modules	
Type of distributed I/O expansion module			
Pages		4/18	

Performance distributed I/O (IP 20)		Performance distributed I/O (IP 67)	
		■ Modicon M258 logic controller ■ Modicon LMC058 motion controller ■ Modicon LMC078 motion controller	
CANopen bus		CANopen bus	
Modicon TM5 modules and/or Modicon TM7 blocks:		Modicon TM5 modules and/or Modicon TM7 blocks: □ Digital I/O modules □ Analog I/O modules □ Common distribution modules (TM5 only)	
		For 1 Modicon TM5 interface module: 40 TM5/TM7 modules max. Including: □ Digital I/O modules: 240 inputs and 240 outputs max. □ Analog I/O modules: 20 inputs and 20 outputs Maximum distance from the expansion bus (TM5 or TM7): 2500 m. Maximum distance between 2 islands of TM5 modules: 100 m. Maximum distance between 2 TM7 blocks: 100 m. Maximum distance between 1 island of TM5 modules and 1 TM7 block: 100 m.	
-		8 to 16 digital channels that can be configured as inputs (24 V $\overline{\text{---}}$) or outputs (24 V $\overline{\text{---}}$)	
Modicon TM5		Modicon TM7	
CANopen interface module		CANopen interface blocks	
4/24		4/28	



Expansion modules
Modicon TM2 Digital modules


Applications	Type of expansion modules	Digital inputs with removable screw terminal block		
	Compatibility	- Modicon M238 logic base controllers - Twido compact and modular controllers - Magelis HMI Controller XBTGC - Modicon OTB I/O distributed Interfaces - Modicon M221 logic controllers - Modicon M241 logic controllers - Modicon M251 logic controllers		
				
Number and type		8 $\overline{\text{---}}$ 24 V inputs	8 $\sim$ 120 V inputs	16 $\overline{\text{---}}$ 24 V inputs
Connection		By removable screw terminal block		
Inputs	Voltage range	$\overline{\text{---}}$ 20.4...28.8 V	$\sim$ 85...132 V	$\overline{\text{---}}$ 20.4...28.8 V
	Input current	7 mA per channel	7.5 mA per channel	7 mA per channel
	Input logic	Sink/source (1)	–	Sink/source (1)
	Commons	1 x 8 channels	1 x 8 channels	1 x 16 channels
	Response time	4 ms	25 ms	4 ms
	☐ Off-on ☐ On-off	4 ms	30 ms	4 ms
Outputs	Output types	–		
	Voltage range	–		
	Commons	–		
	Output current	–		
	☐ Per output ☐ Per group of channels	–		
Isolation	Between channels	None		
	Between channels and internal logic	500 V rms $\sim$ for 1 min	1500 V rms $\sim$ for 1 min	500 V rms $\sim$ for 1 min
I/O module type		TM2DDI8DT	TM2DAI8DT	TM2DDI16DT
Pages		3/12 (1) Sink input: positive logic, source input: negative logic.		

Digital inputs with HE10 connector		Digital I/O with removable screw terminal block	Digital I/O with non-removable spring terminal block
- Modicon M238 logic base controllers - Twido compact and modular controllers - Magelis HMI Controller XBTGC - Modicon OTB I/O distributed Interfaces - Modicon M221 logic controllers - Modicon M241 logic controllers - Modicon M251 logic controllers			
			
16 $\overline{\text{---}}$ 24 V inputs	32 $\overline{\text{---}}$ 24 V inputs	4 $\overline{\text{---}}$ 24 V inputs/4 relay outputs	16 $\overline{\text{---}}$ 24 V inputs/8 relay outputs
By HE10 connector Allows use of the Modicon Telefast ABE 7 pre-wired system		By removable screw terminal block	By non-removable spring terminal block
$\overline{\text{---}}$ 20.4...28.8 V		$\overline{\text{---}}$ 20.4...28.8 V	
5 mA per channel		7 mA per channel	
Sink/source (1)		Sink/source (1)	
1 x 16 channels	2 x 16 channels	1 x 4 channels	1 x 16 channels
4 ms		4 ms	
4 ms		4 ms	
–		1 N/O contact	
–		$\sim$ 240 V, $\overline{\text{---}}$ 30V	
–		1 x 4 channels	2 x 4 channels
–		2 A (lth) 7 A (lth)	
–			
None		None between input channels, none between output channels	
500 V rms $\sim$ for 1 min		Between input group and output groups: 1500 V rms $\sim$ for 1 min	
		Between output groups: 1500 V rms $\sim$ for 1 min	
		Between input channels and internal logic: 500 V rms $\sim$ for 1 min	
		Between output channels and internal logic: 2300 V rms $\sim$ for 1 min	
TM2DDI16DK		TM2DDI32DK	TM2DMM8DRT
			TM2DMM24DRF
3/12			



Expansion modules
Modicon TM2 Digital modules

Applications	Type of expansion modules	8/16 outputs with removable screw terminal block			
	Compatibility	- Modicon M238 logic base controllers - Twido compact and modular controllers - Magelis HMI Controller XBTGC - Modicon OTB I/O distributed Interfaces - Modicon M221 logic controllers - Modicon M241 logic controllers - Modicon M251 logic controllers			
					
Type	8 --- 24 V transistor outputs		8 relay outputs	16 relay outputs	
Connection	By removable screw terminal block				
Outputs	Output types	Transistor		Relay with 1 N/O contact	
	Voltage range	--- 20.4...28.8 V		~ 240 V, --- 30 V	
	Logic (1)	Sink	Source	—	
	Commons	1 x 8 channels		2 x 4 channels	2 x 8 channels
	Output current	0.3 A max.	0.5 A max.	2 A max.	
	☐ Per output ☐ Per group of channels	3 A at 28.8 V	4 A at 28.8 V	7 A max.	8 A max.
	Protection against overload and short-circuit	—	Yes, with automatic reactivation	—	
Isolation	Between channels	None		None	
	Between group of channels	—		1500 V rms for 1 min	
	Between channels and internal logic	500 V rms ~ for 1 min		2300 V rms ~ for 1 min	
Output module type		TM2DDO8UT	TM2DDO8TT	TM2DRA8RT	TM2DRA16RT
Pages	3/12 (1) Source output: positive logic, sink output: negative logic.				

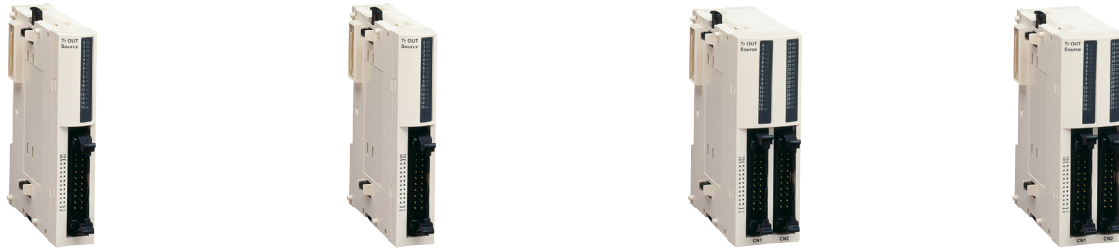16/32 outputs with HE 10 connectors							
- Modicon M238 logic base controllers - Twido compact and modular controllers - Magelis HMI Controller XBTGC - Modicon OTB I/O distributed Interfaces - Modicon M221 logic controllers - Modicon M241 logic controllers - Modicon M251 logic controllers							
							
16 ⇄ 24 V transistor outputs		16 ⇄ 24 V transistor outputs		32 ⇄ 24 V transistor outputs		32 ⇄ 24 V transistor outputs	
By HE10 connector		By HE10 connector Allows use of the Modicon Telefast ABE 7 pre-wired system		By HE10 connector		By HE10 connector Allows use of the Modicon Telefast ABE 7 pre-wired system	
Transistors							
⇄ 20.4...28.8 V							
Sink		Source		Sink		Source	
1 x 16 channels				2 x 16 channels			
0.1 A max.		0.4 A max.		0.1 A max.		0.4 A max.	
1 A at 28.8 V		2 A at 28.8 V		1 A at 28.8 V		2 A at 28.8 V	
–		Yes, with automatic reactivation		–		Yes, with automatic reactivation	
None							
–							
500 V rms ~ for 1 min							
TM2DDO16UK		TM2DDO16TK		TM2DDO32UK		TM2DDO32TK	
3/12							



Presentation

The offer digital I/O expansion modules includes input modules, output modules and mixed input/output modules. With the 15 I/O modules offered, in addition to the I/O integrated in 24 and 40 I/O compact base controllers and modular base controllers, configurations can be adapted to suit application requirements, so optimising costs.

The following digital I/O modules are available:

- Four 24 V digital input modules comprising an 8, 16 and a 32-channel module, equipped with either removable screw terminal blocks or HE 10 connector, depending on the model. These modules can be either “sink or source”.
- One 120 V digital input module, 8 channels, equipped with a removable screw terminal block.
- Eight digital output modules comprising two output modules with 8 and 16 relay outputs, output modules with 8, 16 or 32-channel “sink” or “source” transistor outputs, equipped with either removable screw terminal blocks or HE 10 connector, depending on the model.
- Two mixed digital input and output modules, comprising one 4-channel input/4-channel relay output module with removable screw terminal block and one 16-channel input/8-channel relay output module with non-removable spring terminal block.


The narrow width of these I/O modules (17.5 mm/0.69 in., 23.5 mm/0.93 in., 29.7 mm/1.17 in. or 39.1 mm/1.54 in.) makes it possible to build Modicon M238, Twido or Modicon OTB configurations of up to 248 I/O with a minimal overall size of L 364.9 mm/14.37 in. x H 90 mm/3.54 in. x D 81.3 mm/3.20 in.

These digital I/O modules are mounted as standard on symmetrical rails to the right of the controller.

The maximum number of digital and/or analogue I/O modules which may be mounted depends on the type of base controller:

Base controller type	Twido compact and modular						Modicon M238	Modicon M221 and M221 Book		Modicon M241 Modicon M251	Magelis HMI controller		Modicon OTB interface
	TWDLCA10DRF, TWDLCA16DRF	TWDLCA24DRF	TWDLCA40DRF	TWDLMDA20DK	TWDLMDA20DRT	TWDLMDA40DK	TM238 L.....	TM221C16●, TM221CE16●	TM221M16●, TM221ME16●, TM221●●24●, TM221M●32TK, TM221●●40●	TM241C●●●●●, TM251MES●	XBT GC1100●	XBT GC2●●0●	OTB1●0 DM9LP
Number of modules	0	4	7	4	7	7	7	7	7	7	2	3	7

The digital I/O modules are electrically isolated with the use of a photocoupler between the internal electronic circuit and the input/output channels.

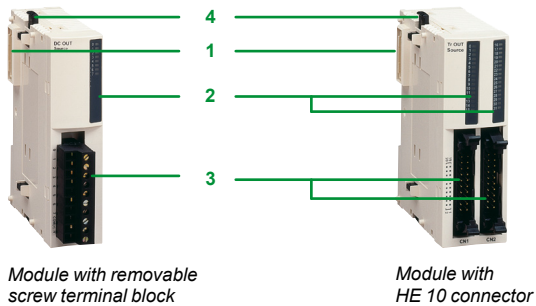

Description

Digital I/O expansion modules comprise:

- 1 An extension connector for electrical connection to the previous module (1).
- 2 One or two blocks for displaying the channels and module diagnostics.
- 3 One or two connection components of varying type, depending on the model:
 - removable screw terminal block (1 or 2) for modules whose reference ends in **T**,
 - HE 10 connector (1 or 2) for modules whose reference ends in **K**,
 - non-removable spring terminal block for module **TM2DMM24DRF**.
- 4 Latching mechanism for attachment to the previous module.

These modules are mounted on a symmetrical rail. The **TWDXMT5** mounting kit can be used for plate or panel mounting. For modules with removable screw terminal block, the terminal blocks are supplied with the module.

The **OTB9ZZ61JP** supply common distribution module (2 isolated groups of 10 terminals) simplifies the wiring of supply commons of sensors or actuators via 2 removable screw terminal blocks.

(1) A connector on the right-hand side makes continuity of the electrical link with the next I/O module.



TM2DDI8DT



TM2DDI32DK



TM2DDO8●T/DRA8RT



TM2DDO16●K



TM2DDO32●K



TM2DRA16RT



TM2DMM8DRT



TM2DMM24DRF

References

Digital input modules

Input voltage	Nb of channels	Nb of common points	Connection	Reference	Weight kg/lb
≡ 24 V sink/source	8	1	Removable screw terminal block (supplied)	TM2DDI8DT	0.085/ 0.187
	16	1	Removable screw terminal block (supplied)	TM2DDI16DT	0.100/ 0.220
			HE 10 connector	TM2DDI16DK (1)	0.065/ 0.143
	32	2	HE 10 connector	TM2DDI32DK (1)	0.100/ 0.220
~ 120 V	8	1	Removable screw terminal block (supplied)	TM2DAI8DT	0.081/ 0.179

Digital output modules

Type de sortie	Nb of channels	Nb of common points	Connection	Reference	Weight kg/lb
Transistors ≡ 24 V	8, sink 0.3 A	1	Removable screw terminal block (supplied)	TM2DDO8UT	0.085/ 0.187
	8, source 0.5 A	1	Removable screw terminal block (supplied)	TM2DDO8TT	0.085/ 0.187
Transistors ≡ 24 V	16, sink 0.1 A	1	HE 10 connector	TM2DDO16UK	0.070/ 0.154
	16, source 0.4 A	1	HE 10 connector	TM2DDO16TK (1)	0.070/ 0.154
	32, sink 0.1 A	2	HE 10 connector	TM2DDO32UK	0.105/ 0.231
	32, source 0.4 A	2	HE 10 connector	TM2DDO32TK (1)	0.105/ 0.231
Relay 2 A (lth) ~ 230 V/≡ 30 V	8 (N/O contact)	2	Removable screw terminal block (supplied)	TM2DRA8RT	0.110/ 0.243
	16 (N/O contact)	2	Removable screw terminal block (supplied)	TM2DRA16RT	0.145/ 0.320

Digital mixed input/output modules

Nb of I/O	Nb, type of input	Nb, type of output	Nb of common points	Connection	Reference	Weight kg/lb
8	4 I, ≡ 24 V sink/source	4 O, relay (N/O contact) 2 A (lth)	Inputs: 1 common Outputs: 1 common	Removable screw terminal block (supplied)	TM2DMM8DRT	0.095/ 0.209
24	16 I, ≡ 24 V sink/source	8 O, relay (N/O contact) 2 A (lth)	Inputs: 1 common Outputs: 2 commons	Non-removable spring terminal block	TM2DMM24DRF	0.140/ 0.309

(1) Module that allows use of the Modicon Telefast ABE 7 pre-wired system.



OTB9ZZ61JP

References

Separate components

Description	Application	Reference	Weight kg/ lb
Mounting kit Sold in lots of 5	For plate or panel mounting of the digital modules.	TWDXMT5	0.065/ 0.143
Commun distribution module	For distribution of supply commons. 8 A max. Connection on 2 removable screw terminal blocks	OTB9ZZ61JP	0.100/ 0.220

Description	Number of ways	Reference	Weight kg/ lb
HE 10 female connectors	20	TWDFCN2K20	—
Sold in lots of 5	26	TWDFCN2K26	—

Pre-formed cables for digital I/O modules with HE 10 connectors

Description	For use with Twido	Gauge C.s.a.	Cable length m/ft	Reference	Weight kg/ lb
Pre-formed cables	I/O expansions	AWG 22	3/	TWDFCW30K	0.405/ 0.892
1 pre-formed cable:	TM2DDI	0.035 mm ²	9.84		
one end fitted with HE 10 connector, one end with free wires	16DK/32DK	AWG 22	5/	TWDFCW50K	0.670/ 1.477
	TM2 DDO	0.035 mm ²	16.40		
	16●K/32●K				

Pre-formed connecting cables (1)

Description	Association	Jauge Section	Longueur cordon	Reference	Weight kg/ lb
Digital input pre-formed cables, 1 pre-formed cable:	Inputs	AWG 28	1/	ABFTE20EP100	0.080/ 0.176
	TM2DDI	0.080 mm ²	3.28		
	16DK/32DK	AWG 28	2/	ABFTE20EP200	0.140/ 0.309
one end with 20-way HE 10 connector on TM2 side, one end with 20-way HE 10 connector on sensor side		0.080 mm ²	6.56		
		AWG 28	3/	ABFTE20EP300	0.210/ 0.463
		0.080 mm ²	9.84		
Digital output pre-formed cables, 1 pre-formed cable:	Outputs	AWG 28	1/	ABFTE20SP100	0.080/ 0.176
	TM2DDO	0.080 mm ²	3.28		
	16TK/32TK	AWG 28	2/	ABFTE20SP200	0.140/ 0.309
one end with 20-way HE 10 connector on TM2 side, one end with 20-way HE 10 connector on preactuator side		0.080 mm ²	6.56		
		AWG 28	3/	ABFTE20SP300	0.210/ 0.463
		0.080 mm ²	9.84		

(1) Cables for applications with Twido controllers.

Applications	Type of expansion modules	Analog inputs			
Compatibility		- Modicon M238 logic controllers - Twido controllers - Magelis HMI controller - Modicon OTB I/O distributed Interfaces - Modicon M221 logic controllers - Modicon M241 logic controllers - Modicon M251 logic controllers			
Type		2 inputs	4 inputs	8 inputs	
Nature		Voltage/current	Thermocouple inputs	Voltage/current Temperature probe	Voltage/current
Connection		Removable screw terminal block			
Inputs	Range	0...10 V 4...20 mA (non differential)	Thermocouple type J, K and T (differential) (1)	☐ 0...10 V or 0...20 mA (Transfer time: 160 ms per channel) ☐ Temperature probe 2, 3 or 4-wire: - Pt 100/1000: - 200...600 °C, - Ni 100/1000: - 50...150 °C (non differential) (Transfer time: 320 ms per channel + 1 controller cycle time)	0...10 V 0...20 mA (non differential)
	Resolution	12 bits (4096 points)	12 bits (4096 points)	12 bits (4096 points)	10 bits (1024 points)
	Acquisition period	10 ms per channel + 1 controller cycle time	200 ms per channel + 1 controller cycle time	☐ 160 ms per channel ☐ 320 ms per channel + 1 controller cycle time	160 ms per channel + 1 controller cycle time
Outputs	Range	–			
	Resolution	–			
	Transfer time	–			
External supply	Nominal voltage	≍ 24 V			
	Limit values	≍ 20.4...28.8 V			
Isolation	Between channels	Non isolated			
	Between channels and sensor supply	~ 500 V rms		Non isolated	
	Between channels and internal logic	~ 500 V rms	~ 2500 V rms	~ 2500 V rms	
Analog I/O module type		TM2AMI2HT	TM2AMI2LT	TM2AMI4LT	TM2AMI8HT
Pages		3/17			

(1) ⚠ Analog inputs module TM2AMI2LT do not detect the absence/presence of PC R3 5984 cable.
(2) Connection by a removable screw terminal block.
(3) Connection by a RJ11 connector.
(4) ⚠ When cable is disconnected, analog value is max.

Analog inputs (continued)			Analog outputs		Analog I/O				
- Modicon M238 logic controllers - Twido controllers - Magelis HMI controller - Modicon OTB I/O distributed Interfaces - Modicon M221 logic controllers - Modicon M241 logic controllers - Modicon M251 logic controllers									
       (3)									
8 inputs		1 output		2 outputs		2 inputs/1 output		4 inputs/2 outputs	
Temperature probe inputs		Voltage/current		Voltage		Voltage/current		Thermocouple/ temperature probe inputs Voltage/current output	
Removable screw terminal block		Removable screw terminal block and RJ11 connectors		Removable screw terminal block					
NTC probe (non diffe- rential)	PTC probe ⚠ Threshold detection (high and low) (non dif.)	Temperature probe 2 or 3-wire Pt100: - 200...600 °C Pt1000: - 50...200 °C) (non differential)		–		0...10 V 4...20 mA (non differential)		Thermocouple type J, K and T Temperature probe 2 or 3-wire Pt100: - 100...500 °C (differential) (4)	
10 bits (1024 pts)	1 < range 2 = range 4 > range	12 bits (4096 points)		–		12 bits or 11 bits + sign (4096 points)		12 bits (4096 points)	
160 ms per channel + 1 controller cycle time		320 ms per channel (1280 ms maxi.) + 1 controller cycle time		–		10 ms per channel + 1 controller cycle time		50 ms per channel + 1 controller cycle time	
–		0...10 V 4...20 mA		± 10 V		0...10 V 4...20 mA		–	
–		12 bits (4096 points)		11 bits (2048 points) + sign		12 bits (4096 points)		–	
–		10 ms + 1 controller cycle time		2 ms + 1 controller cycle time		20 ms + 1 controller cycle time		–	
≡ 24 V		≡ 20.4...28.8 V		≡ 19.2...30 V		≡ 24 V		≡ 19.2...30 V	
Non isolated									
Non isolated		~ 500 V rms		~ 500 V rms		Non isolated		~ 500 V rms	
~ 2500 V rms		~ 500 V rms		~ 2500 V rms		~ 500 V rms		~ 800 V rms	
TM2ARI8HT		TM2ARI8LT (2) TM2ARI8LRJ (3)		TM2AMO1HT		TM2AVO2HT		TM2AMM3HT	
								TM2ALM3LT	
								TM2AMM6HT	

3/17

Presentation

Analog I/O expansion modules enable the acquisition of various analog values encountered in industrial applications.

Analog output modules are used to control the preactuators in devices such as variable speed drives, valves and applications that require process control. The output current or voltage is proportional to the numerical value defined by the user program. When the controller stops, the outputs can be configured with fallback (reset to the lowest scale value or hold the last value received). This function, when set to 'hold', is useful when debugging the application.


The following 10 analog I/O modules are available:

- One module with 2 inputs: 0...10 V, 4...20 mA
- One module with 2 inputs for type J, K and T thermocouples
- One module with 4 inputs: 0...10 V, 0...20 mA, Pt 100/1000 range - 200...600°C, Ni100/1000 range - 50...150°C
- Two modules with 8 temperature probe inputs: Pt100 range - 200...600°C and Pt1000 range - 50...200°C (with RJ11 connectors or removable screw terminal block)
- One module with 8 inputs: 0...10 V, 0...20 mA
- One module with 8 inputs: PTC/NTC (1)
- One module with 1 output: 0...10 V, 4...20 mA
- One module with 2 outputs: ± 10 V
- One mixed module with 2 inputs (0...10 V, 4...20 mA) and 1 output (0...10 V, 4...20 mA)
- One mixed module with 2 thermocouple (type J, K and T) or temperature probe inputs and 1 output 0...10 V, 4...20 mA
- One mixed module with 4 inputs (0...10 V, 4...20 mA) and 2 outputs (0...10 V, 4...20 mA)

Analog expansion modules offer a resolution of 10 bits, 11 bits + sign and 12 bits, with connection by removable screw terminal block. An external 24 V $\square$ power supply is required for each analog module.

These analog I/O expansion modules are mounted on symmetrical $\square$ rails to the right of base controller below. The maximum number of I/O and/or analog modules which may be mounted depends on the type of base controller:

Base controller type	Twido compact and modular						Modicon M238	Modicon M221 and M221 Book		Modicon M241 Modicon M251	Magelis HMI controller		Modicon OTB interface
	TWDLCA 10DRF, TWDLCA 16DRF	TWDLCA 24DRF	TWDLCA 40DRF	TWDLMA 20DK	TWDLMA 20DRT	TWDLMA 40DK	TM238 L.....	TM221C16., TM221CE16.	TM221M16., TM221ME16., TM221M24., TM221M32TK, TM221M40.	TM241C....., TM251MES.	XBT GC1100.	XBT GC2...0.	OTB1..0 DM9LP
Number of modules	0	4	7	4	7	7	7	7	7	7	2	3	7

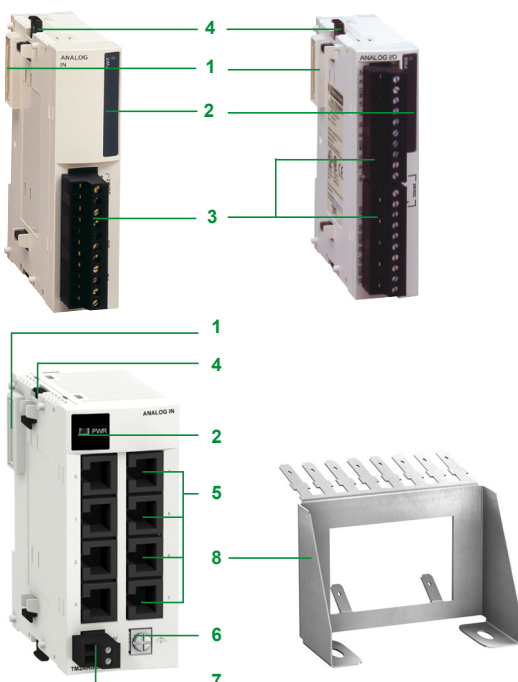

Analog I/O modules are electrically isolated with the use of a photocoupler between the internal electronic circuit and the input/output channels.

Description

Analog I/O modules comprise:

- 1 An extension connector for electrical connection to the adjacent module (2)
 - 2 A PWR display block
 - 3 One (or two, depending on model) removable screw terminal block(s) for connecting the 24 V $\square$ external power supply, the sensors and the preactuators
 - 4 A latching mechanism for attachment to the adjacent module
- For modules with 8 temperature probe inputs:
- 5 8 RJ11 connectors. A version of this module is available with 2 removable screw terminal blocks (2 x 13 terminals)
 - 6 A screw terminal for connecting the functional ground (FG)
 - 7 A removable screw terminal block for connecting the 24 V $\square$ power supply

The **TM2XMTGB** ground connection plate 8 simplifies connection of the analog sensor and actuator cable shielding. Connect this shielding to the device's functional ground (FG).

These modules are mounted on a symmetrical $\square$ rail. Mounting kit **TWDXMT5** can be used for plate or panel mounting.

(1) With PTC probe, threshold detection inputs (high and low).

(2) A connector on the right-hand side panel makes the continuity of the electrical link with the adjacent I/O module.



TM2AMI2HT



TM2AMI2LT



TM2ARI8LRJ




TM2ARI8LT



TM2ALMLT



TM2AMM6HT



TM2XMTGB

TM200
RSRCEMC

References

Analog input modules

Channel type	Input range	Output range	Resolution	Connection by	Reference	Weight kg/ lb
2 inputs	0...10 V 4...20 mA	—	12 bits	Removable screw terminal block (supplied)	TM2AMI2HT	0.085/ 0.187
	Thermocouple K, J, T	—	12 bits	Removable screw terminal block (supplied)	TM2AMI2LT	0.085/ 0.187
4 inputs	0...10 V 0...20 mA Temperature	—	12 bits	Removable screw terminal block (supplied)	TM2AMI4LT	0.085/ 0.187
8 inputs	0...10 V 0...20 mA	—	10 bits	Removable screw terminal block (supplied)	TM2AMI8HT	0.085/ 0.187
	Pt 100 Pt 1000	—	12 bits	RJ11 connector	TM2ARI8LRJ	0.190/ 0.419
				Removable screw terminal block (supplied)	TM2ARI8LT	0.190/ 0.419
	PTC/NTC	—	10 bits for NTC 2-threshold detection with PTC	Removable screw terminal block (supplied)	TM2ARI8HT	0.085/ 0.187

Analog output modules



1 output	—	0...10 V 4...20 mA	12 bits	Removable screw terminal block (supplied)	TM2AMO1HT	0.085/ 0.187
2 outputs	—	± 10 V	11 bits + sign	Removable screw terminal block (supplied)	TM2AVO2HT	0.085/ 0.187

Analog I/O modules

2 inputs and 1 output	0...10 V 4...20 mA	0...10 V 4...20 mA	12 bits	Removable screw terminal block (supplied)	TM2AMM3HT	0.085/ 0.187
	J, K, T thermocouple 3-wire Pt 100 temperature probe	0...10 V 4...20 mA	12 bits	Removable screw terminal block (supplied)	TM2ALM3LT	0.085/ 0.187
4 inputs and 2 outputs	0...10 V 4...20 mA	0...10 V 4...20 mA	12 bits	Removable screw terminal block (supplied)	TM2AMM6HT	0.085/ 0.187

Separate components

Description	Description	Reference	Weight kg/ lb
Ground connection plate	Plate equipped with male Faston connector for connecting cable shielding (via Faston clamp 6.35 mm/0.25 in., not supplied) and functional grounds (FG)	TM2XMTGB	0.045/ 0.099
Shielding connection clamps	Attach and ground the shielding of the cables <i>Sold in lots of 25 (20 for cable Ø 4.8 mm/Ø 0.19 in. and 5 for cable Ø 7.9 mm/Ø 0.31 in.)</i>	TM200RSRCEMC	—
Mounting kit	For plate or panel mounting of the analog modules. <i>Sold in lots of 5</i>	TWDXMT5	0.065/ 0.143

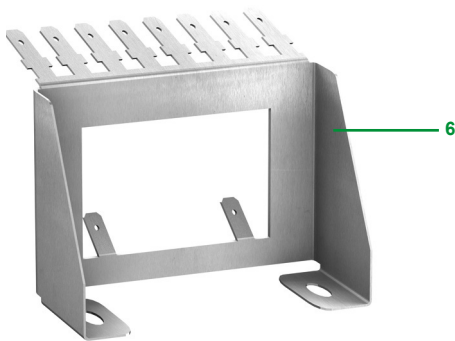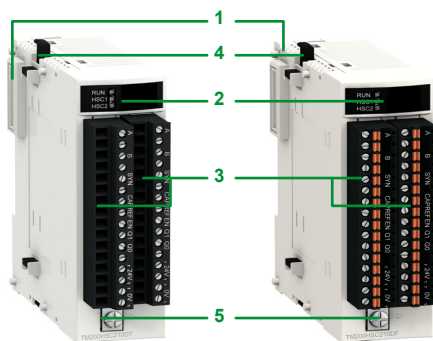

Presentation

TM200HSC206DT/DF Expert modules for Modicon M238 logic controllers and HMI controllers XBTGC are used to count the pulses generated by a sensor or to process the signals from an incremental encoder.

The two modules, both with two 60 KHz counter channels, differ in the way they are connected:

- Removable screw terminal block (2 x 16 contacts): **TM200HSC206DT**
- Removable spring terminals **TM200HSC206DF**

Expert modules	No. of channels	Maximum frequency	Integrated functions	Physical I/O per channel	
				Inputs	Outputs
TM200HSC206DT TM200HSC206DF (3 modules max. per controller.)	2	60 KHz	Upcounting Downcounting Period meter Frequency meter Frequency generator Axis following with encoder	6	2

The sensors used on each channel can be:

- 2-wire 24 V proximity sensors,
- 3-wire PNP 24 V proximity sensors,
- Limit switches (N/O or N/C contact),
- 15/30 V output signal incremental encoders and source outputs (positive logic).

TM200HSC206D Expert modules meet the requirements of such applications as:

- Message generation on empty unwinder status using the ratio,
- Sorting small parts using the period meter,
- Single electronic cam using the dynamic setting thresholds,
- Speed control using the period meter,
- Grouping/ungrouping for packaging machines,
- Event counting,
- Flow or speed measurement.

TM200HSC206D Expert modules are considered to be expansion modules and as such are connected to a controller by stacking them on a symmetrical rail, starting at the right-hand side panel of each controller.

The function parameters are set by configuration using SoMachine software.

Description

TM200HSC206D 60 KHz Expert modules comprise:

- 1 An extension connector for linking with the adjacent module (1).
- 2 A channel and module diagnostics display block.
- 3 2 removable screw or spring terminal blocks marked TB0 and TB1 for connecting the sensors and preactuators.
- 4 A mechanical device for locking to the adjacent module.
- 5 A screw terminal for the functional ground (FG) connection.


The **TM2XMTGB** ground connection plate **6** simplifies connection of the sensor and encoder cable shielding. Connect this shielding to the device's functional ground.

These modules are mounted as standard on a symmetrical  rail. The **TWDXMT5** mounting kit can be used for plate or panel mounting.

(1) A connector on the right-hand side panel makes continuity of the link with the adjacent I/O module.

Operation

Block diagram of a TM200HSC206DT/DF module counter channel

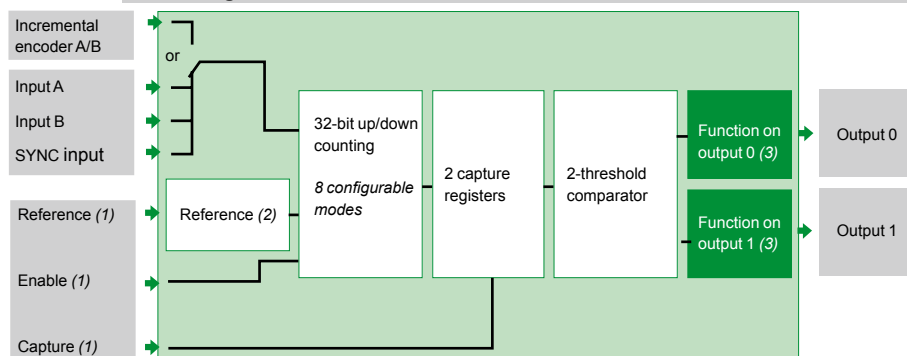

(1) Optional inputs.

(2) Reference: 4 operating modes for "IN_SYNC" SYNC and "IN_REF" Reference inputs.


(3) Function on outputs: 11 possible types of behaviour.



TM200HSC206DT



TM200HSC206DF



TM2XMTGB

References					
Expert modules (3 modules max. per controller)					
Description	No. of channels	Characteristics	Connection	Reference	Weight kg/lb
Counter modules for: - 24 V $\square$ 2 and 3-wire sensors - 15/30 V $\square$ incremental encoders with source outputs (positive logic)	2	60 kHz counting	Screw terminals	TM200HSC206DT	0.150/ 0.331
			Spring terminals	TM200HSC206DF	0.150/ 0.331

Separate parts			
Designation	Description	Reference	Weight kg/lb
Ground connection plate	Support equipped with 10 male Faston connectors for connecting the cable shielding (via 6.35 mm/0.25 in. connectors, not supplied) and the functional grounds (FG)	TM2XMTGB	0.045/ 0.099
Mounting kit <i>Sold in lots of 5</i>	For plate or panel mounting of the analog modules	TWDXMT5	0.065/ 0.143

Expansion modules

Modicon TM3 expansion modules

Presentation of the range

Compatibility of offers

Modicon TM3 expansion modules

- > Modicon M221 logic controllers
- > Modicon M221 Book logic controllers
- > Modicon M241 logic controllers
- > Modicon M251 logic controllers
- > SoMachine Basic software
- > SoMachine software
- > Modicon TM2 expansion modules

3



Digital I/O modules



Analog I/O modules



Expert I/O modules



Functional Safety modules



Bus expansion modules

Presentation

The Modicon TM3 expansion module offer provides an opportunity to enhance the capabilities of Modicon M221, M241 and M251 logic controllers:

- Digital I/O modules which can be used to create configurations with up to 264 digital I/O (according to the controller). These modules are available with the same connections as the controllers.
- Analog I/O modules which can be used to create configurations with up to 114 analog I/O (according to the controller) and are designed to receive, amongst other things, position, temperature or speed sensor signals. They are also capable of controlling variable speed drives or any device equipped with a current or voltage input.
- Expert modules for control of TeSys motor starters which simplify wiring up the control section due to connection with RJ45 cables.
- Functional Safety modules which simplify wiring and can be configured in the SoMachine Basic software.

In addition, the TM3 expansion system is flexible due to the possibility of remotely locating some of the TM3 modules in the enclosure or another cabinet (up to 5 meters (16.404 ft.) away, using a bus expansion system.

The Modicon TM3 expansion system is common to the whole range of Modicon M221, M241 and M251 logic controllers, meaning that the model of controller can be revised without changing expansion module.

Modicon TM3 range

See page

Digital I/O modules	□ modules with 8 to 32 inputs/outputs: - 24 V or 120 V $\overline{\text{V}}$ 50/60 Hz inputs - relay or transistor outputs	3/22
Analog I/O modules	□ modules with 2 to 8 inputs/outputs: - current/voltage or temperature inputs - current/voltage outputs	3/26
Expert module	□ module for control of between one and four TeSys motor starters	3/30
Functional Safety modules	□ modules designed using Preventa technology for integral machine safety: - control of emergency stops - control of switches - control of light curtains - control of pressure-sensitive mats or edges	3/32
Bus expansion system	□ transmitter module □ receiver module □ bus expansion cable	3/36

Specific features

Modicon TM3 expansion modules have been designed with a simple interlocking assembly mechanism. A bus expansion connector is used to distribute data and the power supply when assembling the Modicon TM3 expansion modules with logic controllers.

Connections

A wide choice of connections is available depending on the model of Modicon TM3 module:

- removable screw terminal blocks (1)
- removable spring terminal blocks (1)
- HE 10 connector, to be used with HE 10 cables/bare wires or HE 10/HE 10 and Telefast sub-bases (2)

The connectors (screw terminal blocks, spring terminal blocks, HE 10 connector, RJ 45) are located on the front of the TM3 expansion modules and are therefore accessible.

(1) The terminal blocks are supplied with Modicon TM3 expansion modules.

(2) Telefast Modicon ABE7 pre-wired system to be ordered separately (see page 2/17).

Expansion modules

Modicon TM3 expansion modules


Bus expansion system

Presentation

Modicon TM3 bus expansion system

A PLC configuration consists of a controller with its embedded input and output channels, used in conjunction with local or remote expansion modules which are used to increase the number of channels and/or functions.

- Expansion modules are connected directly by simple interlocking with the controller (local I/O) or remotely (remote I/O) with a TM3 bus expansion cable, up to 5 meters (16.404 ft.) away.
- The bus expansion connector, located on the side of the controllers and on each side of the Modicon TM3 expansion modules, transmits and synchronizes data.

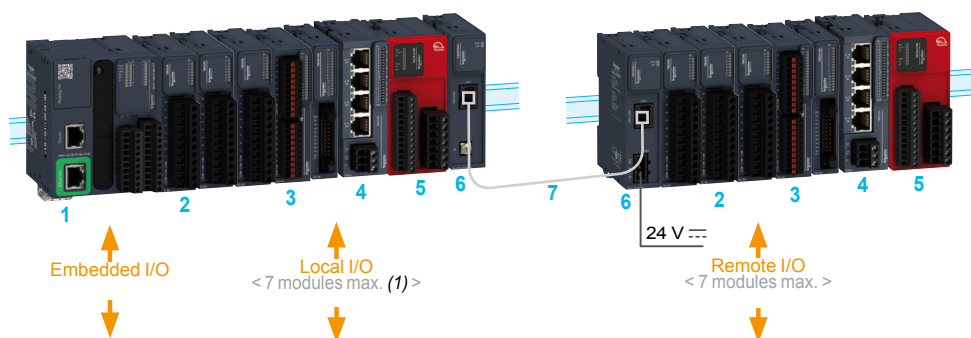

- 1 Logic controller (M221, M221 Book, M241, M251)
- 2 Modicon TM3 digital I/O modules.
- 3 Modicon TM3 analog I/O modules.
- 4 Modicon TM3 expert module: control of TeSys motor starters.
- 5 Modicon TM3 functional safety modules.
- 6 Modicon TM3 bus expansion module (transmitter and receiver).
- 7 TM3 bus expansion cable.

■ Local I/O

Maximum configuration: 7 Modicon TM3 expansion modules associated with an M2●● logic controller.

With limited number of relay or transistor outputs (see page 3/24).

■ Remote I/O

Maximum configuration: 14 Modicon TM3 expansion modules (7 local modules + 7 remote modules) with the use of Modicon TM3 bus expansion system (transmitter and receiver modules).

The transmitter and receiver bus expansion modules can be used to:

- increase from 7 to 14 the number of I/O expansion modules that can be connected to an M2●● logic controller
- locate Modicon TM3 expansion modules remotely, up to 5 meters (16.404 ft.) away

The transmitter module and receiver module are physically linked by a **VDIP184546●●●** bus expansion cable.

Mounting


- Modicon TM3 expansion modules are mounted on a  symmetrical rail. They have a locking clip on the top of their casing.
- For plate or panel mounting, use the **TMAM2** kit.

(1) Depending on type of TM3 module used (see page 3/24).

Expansion modules
Modicon TM3 digital I/O modules

Applications	Expansion module type
	Compatibility

Digital inputs
■ Modicon M221 and Modicon M221 Book logic controllers ■ Modicon M241 logic controllers ■ Modicon M251 logic controllers

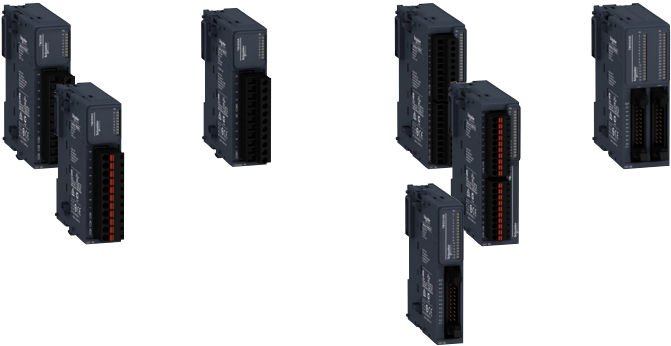

Inputs	Number and type of inputs
	Rated voltage
	Input type
	Input logic

8 logic inputs	8 logic inputs	16 logic inputs	32 logic inputs
24 V $\overline{\text{---}}$	120 V $\sim$	24 V $\overline{\text{---}}$	24 V $\overline{\text{---}}$
Type 1 (IEC 61131-2, Edition 3)			
sink/source	—	sink/source	sink/source

Outputs	No. and type of outputs
	Rated voltage
	Type of contact
	Logic
	Max. output current
	□ Per output
	□ Per group of channels

—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	—

Supply voltage
Format (w x h x d) mm (in.)
Mounting


Power supplied by the controller via the bus expansion connector			
23.6 x 90 x 70 (0.93 x 3.54 x 2.76)	23.6 x 90 x 70 (0.93 x 3.54 x 2.76)	TM3DI16, TM3DI16G: 23.6 x 90 x 70 (0.93 x 3.54 x 2.76) TM3DI16K: 17.6 x 90 x 70 (0.69 x 3.54 x 2.76)	30.2 x 90 x 70 (1.19 x 3.54 x 2.76)
Mounting on symmetrical rail or panel with specific mounting kit TMAM2			

Module type	Channels connected:
	with removable screw terminal blocks with a thread of 5.08 mm (0.2 in.)
	with removable screw terminal blocks with a thread of 3.81 mm (3.81 mm.)
	with removable spring terminal blocks with a thread of 5.08 mm (0.2 in.)
	with removable spring terminal blocks with a thread of 3.81 mm (3.81 mm.)
	with HE 10 connectors (1)

TM3DI8	TM3DI8A	—	—
—	—	TM3DI16	—
TM3DI8G	—	—	—
—	—	TM3DI16G	—
—	—	TM3DI16K	TM3DI32K

Pages	3/25
(1) Compatible with the Telefast Modicon ABE7 pre-wired system (see page 2/17).	

Digital outputs	Digital inputs/ outputs
-----------------	-------------------------

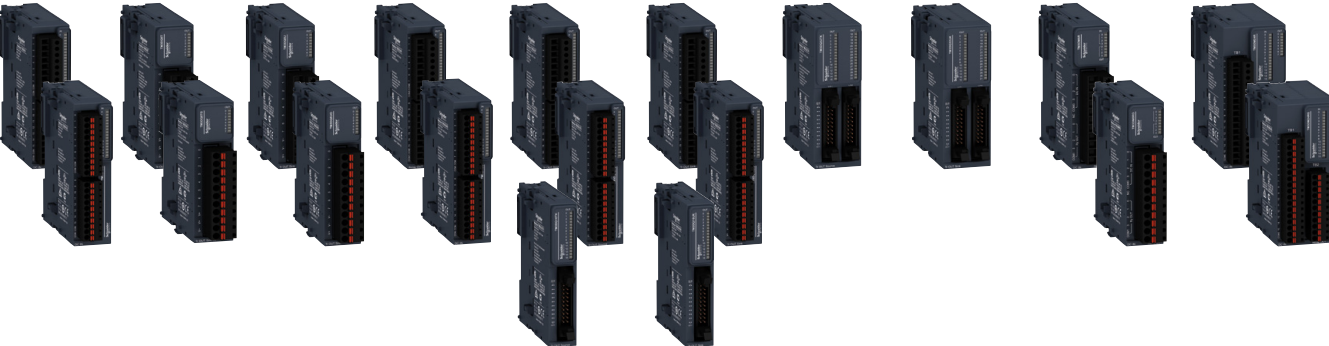

—	—	—	—	—	—	—	—	4 logic inputs	16 logic inputs
—	—	—	—	—	—	—	—	24 V $\overline{\text{---}}$	24 V $\overline{\text{---}}$
—	—	—	—	—	—	—	—	Type 1 (IEC 61131-2, Edition 3)	—
—	—	—	—	—	—	—	—	sink/source	sink/source

8 relay outputs	8 transistor outputs	8 transistor outputs	16 relay outputs	16 transistor outputs	16 transistor outputs	32 transistor outputs	32 transistor outputs	4 relay outputs	8 relay outputs
24 V $\overline{\text{---}}$ /240 V $\sim$	24 V $\overline{\text{---}}$	24 V $\overline{\text{---}}$	24 V $\overline{\text{---}}$ /240 V $\sim$	24 V $\overline{\text{---}}$	24 V $\overline{\text{---}}$	24 V $\overline{\text{---}}$	24 V $\overline{\text{---}}$	24 V $\overline{\text{---}}$ /240 V $\sim$	24 V $\overline{\text{---}}$ /240 V $\sim$
1 N/O contact	—	—	1 N/O contact	—	—	—	—	1 N/O contact	1 N/O contact
—	Source	Sink	—	Source	Sink	Source	Sink	—	—
2 A	0.5 A	0.5 A	2 A	0.5 A for TM3DQ16T and TM3DQ16TG 0.1 A for TM3DQ16TK	0.5 A for TM3DQ16U and TM3DQ16UG 0.1 A for TM3DQ16UK	0.1 A	0.1 A	2 A	2 A
7 A	4 A	4 A	8 A	4 A for TM3DQ16T and TM3DQ16TG 2 A for TM3DQ16TK	2 A	2 A	2 A	7 A	7 A

Power supplied by the controller via the bus expansion connector				
23.6 x 90 x 70 (0.93 x 3.54 x 2.76)	TM3DQ16T, TM3DQ16TG, TM3DQ16U, TM3DQ16UG: 23.6 x 90 x 70 (0.93 x 3.54 x 2.76) TM3DQ16TK, TM3DQ16UK: 17.6 x 90 x 70 (0.69 x 3.54 x 2.76)	30.2 x 90 x 70 (1.19 x 3.54 x 2.76)	23.6 x 90 x 70 (0.93 x 3.54 x 2.76)	39.1 x 90 x 70 (1.53 x 3.54 x 2.76)
Mounting on  symmetrical rail or panel with specific mounting kit TMAM2				

TM3DQ8R	TM3DQ8T	TM3DQ8U	—	—	—	—	—	TM3DM8R	—
—	—	—	TM3DQ16R	TM3DQ16T	TM3DQ16U	—	—	—	TM3DM24R
TM3DQ8RG	TM3DQ8TG	TM3DQ8UG	—	—	—	—	—	TM3DM8RG	—
—	—	—	TM3DQ16RG	TM3DQ16TG	TM3DQ16UG	—	—	—	TM3DM24RG
—	—	—	—	TM3DQ16TK	TM3DQ16UK	TM3DQ32TK (1)	TM3DQ32UK (1)	—	—

3/25

Presentation

The Modicon TM3 digital I/O module offer consists of 27 modules: input modules, output modules and mixed I/O modules.

These digital I/O modules complement the embedded I/O on M221, M221 Book, M241 and M251 logic controllers.

Breakdown of the offer

- Digital I/O modules**
- ☐ with 8, 16 or 32 x 24 V $\overline{\text{DC}}$ inputs
 - ☐ with 8 x 120 V $\sim$ inputs
 - ☐ with 8 or 16 relay outputs
 - ☐ with 8, 16 or 32 source transistor 24 V $\overline{\text{DC}}$ outputs
 - ☐ with 8, 16 or 32 sink transistor 24 V $\overline{\text{DC}}$ outputs
 - ☐ with 4 x 24 V $\overline{\text{DC}}$ inputs and 4 relay outputs
 - ☐ with 16 transistor 24 V $\overline{\text{DC}}$ inputs and 8 relay outputs

Connections

Thanks to a wide choice of modules, it is possible to create homogenous configurations in terms of connections:

- ☐ Screw terminal blocks with a thread of 5.08 mm (0.2 in.) for ease of wiring: identical to the connectors on M221 and M241 logic controllers.
- ☐ Screw or spring-type connectors with a thread of 3.81 mm (0.15 in.) for compact dimensions: identical to the connectors on **TM221M16●●** and **TM221ME16●●** controllers.
- ☐ HE10 type connectors that can minimize wiring costs thanks to the Telefast pre-wired system: identical to the connectors on **TM221M32TK** and **TM221ME32TK** controllers.

Configuration

- ☐ Local I/O (1): up to 7 I/O modules can be attached to the controller while complying with the restrictions indicated in the table below.
- ☐ Remote I/O (1) with TM3 bus expansion system: 7 additional I/O modules can be used without restriction. These modules are attached to a **TM3XREC1** receiver module.

Logic controllers	TM221									TM241/TM251	
	C16R	C16T	C24R	C24T	C40R	C40T	M16R	M16T	M32TK	TM241●●●●	
	CE16R	CE16T	CE24R	CE24T	CE40R	CE40T	ME16R	ME16T	ME32TK	TM251●●●●	
							M16RG	M16TG	ME16RG ME16TG		
Maximum number of TM3 module transistor (local) outputs directly connected to the controller (2)	104	136	144	176	(3)						
Maximum number of TM3 module relay (local) outputs directly connected to the controller (2)	23	28	32	40	48	60	92	96	96	(3)	

(1) Local I/O and remote I/O: see page 3/21.

(2) If using bus expansion system: maximum number of TM3 module relay or transistor outputs installed between the controller and the **TM3XTRA1** transmitter module (local outputs).


(3) Up to 7 TM3 modules regardless of the number of outputs used.

Mounting

- ☐ Digital I/O modules are mounted on a $\perp$ symmetrical rail.
- ☐ For plate or panel mounting, use the **TMAM2** kit.

Description

Modicon TM3 digital I/O modules

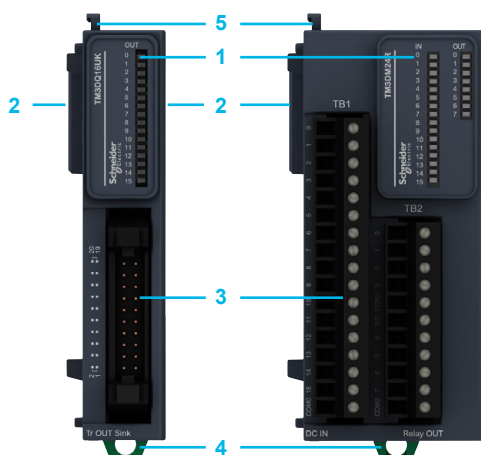

- 1 LED display block for the module channels and diagnostics
- 2 TM3 bus connectors (one on each side). These are designed to provide continuity of the link between connected modules.
- 3 Input or output channel terminal blocks (depending on model: screw terminal blocks, spring terminal blocks or HE 10 connector).
- 4 $\perp$ symmetrical rail locking clip.
- 5 Adjacent module locking latch.

Expansion modules

Modicon TM3 digital I/O modules



References

Modicon TM3 digital input modules

Number of logic inputs	Input type	Term. block for input conn. (1) Thread (mm/in.)	References	Weight kg/ lb
8 inputs	sink/source 24 V $\square$	screw 5.08/0.2	TM3DI8	0.110/ 0.243
		spring 5.08/0.2	TM3DI8G	0.095/ 0.209
	120 V $\sim$	screw 5.08/0.2	TM3DI8A	0.110/ 0.243
		spring 5.08/0.2	TM3DI8AG	0.095/ 0.209
16 inputs	sink/source 24 V $\square$	screw 3.81/0.15	TM3DI16	0.105/ 0.231
		spring 3.81/0.15	TM3DI16G	0.095/ 0.209
	HE 10 connector (2)	HE 10 connector (2)	TM3DI16K	0.075/ 0.165
		HE 10 connector (2)	TM3DI32K	0.110/ 0.243

Modicon TM3 digital output modules

Number of logic outputs	Output type	Output current	Term. block for output conn. (1) Thread (mm/in.)	References	Weight kg/ lb
8 outputs	Relay	2 A	screw 5.08/0.2	TM3DQ8R	0.130/ 0.287
			spring 5.08/0.2	TM3DQ8RG	0.115/ 0.254
		0.5 A	screw 5.08/0.2	TM3DQ8T	0.110/ 0.243
			spring 5.08/0.2	TM3DQ8TG	0.095/ 0.209
	Transistor, source	0.5 A	screw 5.08/0.2	TM3DQ8U	0.110/ 0.243
			spring 5.08/0.2	TM3DQ8UG	0.095/ 0.209
		0.1 A	HE 10 connector (2)	TM3DQ16TK	0.075/ 0.165
			HE 10 connector (2)	TM3DQ16U	0.105/ 0.231
	Transistor, sink	0.5 A	screw 3.81/0.15	TM3DQ16U	0.105/ 0.231
			spring 3.81/0.15	TM3DQ16UG	0.095/ 0.209
		0.1 A	HE 10 connector (2)	TM3DQ16UK	0.075/ 0.165
			HE 10 connector (2)	TM3DQ16UK	0.075/ 0.165
16 outputs	Relay	2 A	screw 3.81/0.15	TM3DQ16R	0.140/ 0.309
			spring 3.81/0.15	TM3DQ16RG	0.130/ 0.287
		0.5 A	screw 3.81/0.15	TM3DQ16T	0.105/ 0.231
			spring 3.81/0.15	TM3DQ16TG	0.095/ 0.209
	Transistor, source	0.5 A	screw 3.81/0.15	TM3DQ16U	0.105/ 0.231
			spring 3.81/0.15	TM3DQ16UG	0.095/ 0.209
		0.1 A	HE 10 connector (2)	TM3DQ16UK	0.075/ 0.165
			HE 10 connector (2)	TM3DQ16UK	0.075/ 0.165
32 outputs	Transistor, source	0.1 A	HE 10 connector (2)	TM3DQ32TK	0.115/ 0.254
			HE 10 connector (2)	TM3DQ32UK	0.115/ 0.254
	Transistor, sink	0.1 A	HE 10 connector (2)	TM3DQ32TK	0.115/ 0.254
			HE 10 connector (2)	TM3DQ32UK	0.115/ 0.254

Modicon TM3 digital mixed I/O modules

No. of logic I/O	Number and type of inputs	Number and type of outputs	Term. block for output conn. (1) Thread (mm/in.)	References	Weight kg/ lb
8 inputs/outputs	4 sink/source 24 V $\square$ inputs	4 relay outputs 2 A	screw 5.08/0.2	TM3DM8R	0.120/ 0.265
			spring 5.08/0.2	TM3DM8RG	0.100/ 0.220
24 inputs/outputs	16 sink/source 24 V $\square$ inputs	8 relay outputs 2 A	screw 3.81/0.15	TM3DM24R	0.165/ 0.364
			spring 3.81/0.15	TM3DM24RG	0.155/ 0.342

Separate parts

Designation	Description	Reference	Weight kg/ lb
Mounting kit Sold in lots of 10	For plate or panel mounting of digital I/O modules	TMAM2	0.065/ 0.143
Set of terminal blocks for connecting the I/O	4 x 10-way and 4 x 11-way removable terminal blocks with screw terminals for TM3DI16, TM3DQ16R, TM3DQ16T and TM3DQ16U modules	TMAT2MSET	0.127/ 0.280
	4 x 10-way and 4 x 11-way removable terminal blocks with spring terminals for TM3DI16G, TM3DQ16RG, TM3DQ16TG and TM3DQ16UG modules	TMAT2MSETG	0.127/ 0.280

(1) Removable screw or spring-type terminal blocks, supplied.

(2) Modules compatible with the Telefast Modicon ABE7 pre-wired system (see page 2/21).

Expansion modules
Modicon TM3 analog I/O modules

Applications		Type of expansion module		Analog inputs				Analog inputs		Analog outputs		Analog inputs/outputs			
		Compatibility		■ Modicon M221 and M221 Book logic controllers ■ Modicon M241 logic controllers ■ Modicon M251 logic controllers											
															
Inputs	Number	2 inputs		4 inputs		4 inputs		8 inputs		8 inputs		2 inputs		4 inputs	
	Type	Voltage/current		Voltage/current		Temperature or voltage/current		Voltage/current		Temperature		Temperature or voltage/current		Voltage/current	
	Range	- 10...+ 10 VDC, 0...+ 10 VDC/ 0...20 mA, 4...20 mA		- 10...+ 10 VDC, 0...+ 10 VDC/ 0...20 mA, 4...20 mA		Thermocouples (J, K, R, S, B, T, N, E, C) Temperature probes (RTDs): (Ni100, Ni1000, PT100, PT1000) - 10...+ 10 VDC, 0...+ 10 VDC / 0...20 mA, 4...20 mA		- 10...+ 10 VDC, 0...+ 10 VDC/ 0...20 mA, 4...20 mA		Thermocouples (J, K, R, S, B, T, N, E, C) NTC and PTC thermistors		Thermocouples (J, K, R, S, B, T, N, E, C) Temperature probes (RTDs): (Ni100, Ni1000, PT100, PT1000) - 10...+ 10 VDC, 0...+ 10 VDC / 0...20 mA, 4...20 mA		- 10...+ 10 VDC, 0...+ 10 VDC/ 0...20 mA, 4...20 mA	
	Resolution	16 bits or 15 bits + sign		12 bits or 11 bits + sign		16 bits or 15 bits + sign		12 bits or 11 bits + sign		16 bits or 15 bits + sign		16 bits or 15 bits + sign		12 bits or 11 bits + sign	
	Read time	1 or 10 ms (configurable)		1 or 10 ms (configurable)		100 ms per channel for temperature signals. 1 or 10 ms (configurable) for voltage/current signals		1 or 10 ms (configurable)		100 ms per channel		100 ms per channel for temperature signals. 1 or 10 ms (configurable) for voltage/current signals		1 or 10 ms (configurable)	
Outputs	Number	–		–		–		–		–		2 outputs		4 outputs	
	Type	–		–		–		–		–		Voltage/current		Voltage/current	
	Range	–		–		–		–		–		- 10...+ 10 VDC, 0...+ 10 VDC/ 0...20 mA, 4...20 mA		- 10...+ 10 VDC, 0...+ 10 VDC/ 0...20 mA, 4...20 mA	
	Resolution	–		–		–		–		–		12 bits or 11 bits + sign		12 bits or 11 bits + sign	
	Transfer time	–		–		–		–		–		1 or 10 ms (configurable)		1 or 10 ms (configurable)	
Supply voltage		With a 24 V  external power supply													
Format (w x h x d) mm (in.)		23.6 x 90 x 70 (0.93 x 3.54 x 2.76)													
Mounting		Mounting on  symmetrical rail or panel with specific mounting kit TMAM2													
Type of module	Channel connection:														
	via removable screw terminal blocks at intervals of 5.08 (0.2 in.)														
	via removable screw terminal blocks at intervals of 3.81 (0.15 in.)														
	via removable spring terminal blocks at intervals of 5.08 (0.2 in.)														
Pages	via removable spring terminal blocks at intervals of 3.81 (0.15 in.)														
	3/29														

		2 outputs		4 outputs		1 output		2 outputs	
		Voltage/current		Voltage/current		Voltage/current		Voltage/current	
		- 10...+ 10 VDC, 0...+ 10 VDC/ 0...20 mA, 4...20 mA		- 10...+ 10 VDC, 0...+ 10 VDC/ 0...20 mA, 4...20 mA		- 10...+ 10 VDC, 0...+ 10 VDC/ 0...20 mA, 4...20 mA		- 10...+ 10 VDC, 0...+ 10 VDC/ 0...20 mA, 4...20 mA	
		12 bits or 11 bits + sign		12 bits or 11 bits + sign		12 bits or 11 bits + sign		12 bits or 11 bits + sign	
		1 or 10 ms (configurable)		1 or 10 ms (configurable)		1 or 10 ms (configurable)		1 or 10 ms (configurable)	
With a 24 V  external power supply									
23.6 x 90 x 70 (0.93 x 3.54 x 2.76)									
Mounting on  symmetrical rail or panel with specific mounting kit TMAM2									
		TM3AQ2		TM3AQ4		TM3TM3			
TM3TI8T								TM3AM6	
		TM3AQ2G		TM3AQ4G		TM3TM3G			
TM3TI8TG								TM3AM6G	
3/29									

Presentation

The Modicon TM3 analog I/O module offer consists of 18 input, output and mixed input/output modules. The input modules acquire various analog values encountered in industrial applications.

These I/O modules complement the embedded I/O in Modicon M221, M221 Book and M241 logic controllers.

- TM3AI●● and TM3TI●● analog input modules are used to acquire various analog values (voltage, current or temperature) encountered in industrial applications.
- TM3AQ●● analog output modules are used to control preactuators in physical units, such as variable speed drives or valves and applications where process control is required.
- TM3TM●● and TM3AM●● mixed modules combine voltage/current or temperature analog inputs as well as one or two voltage/current outputs in the same case.
- When the controller stops, the outputs of each TM3 analog modules can be configured to fall back (hold the last value or a specified value). This function, when set to "hold", is useful when debugging the application or when a fault occurs, in order not to disturb the process being controlled.

Breakdown of the offer

- Analog I/O modules** Modules with 2 to 8 analog I/O:
- voltage/current or temperature inputs
 - voltage/current outputs

Format

A single format: 23.6 x 90 x 70 (0.93 x 3.54 x 2.76 in.).

Connection

With a wide selection of modules, uniform configurations can be created in terms of connectors:

- Screw-type or spring-type connectors at intervals of 5.08 (0.2 in.) for ease of wiring: identical to the connectors on Modicon M221 (TM221C●●●●) and Modicon M241 (TM241C●●●●) logic controllers.
- Screw-type or spring-type connectors at intervals of 3.81 (0.15 in.) for compact dimensions: identical to the connectors on Modicon M221 Book (TM221M16●● and TM221ME16●●) logic controllers.

Configuration

- Analog I/O modules connect to Modicon M221 and M221 Book, M241 and M251 logic controllers according to the general rules for the Modicon TM3 system: 7 modules max. and 14 modules max. with use of Modicon TM3 bus expansion system (transmitter and receiver).
- An external 24 V $\overline{\text{V}}$ power supply is required for each Modicon TM3 analog module.
- The I/O modules are designed with isolation by an optocoupler between the internal electronics and the I/O channels.


Mounting

- The analog modules are mounted on a $\perp$ symmetrical rail.
- For plate or panel mounting, use the **TMAM2** kit.
- The **TM2XMTGB** grounding plate simplifies connection of the analog sensor and actuator cable shielding (shielding to be connected to the device's functional ground).

Description

Modicon TM3 analog modules

- 1 Locking latch for the adjacent module.
- 2 TM3 bus connectors (one on each side). These are designed to provide continuity of the link between connected modules.
- 3 Clip for locking on $\perp$ symmetrical rail.
- 4 Module "Power on" LED.
- 5 Removable spring or screw terminal blocks (depending on the model) for connecting the analog channels and the 24 V power supply.

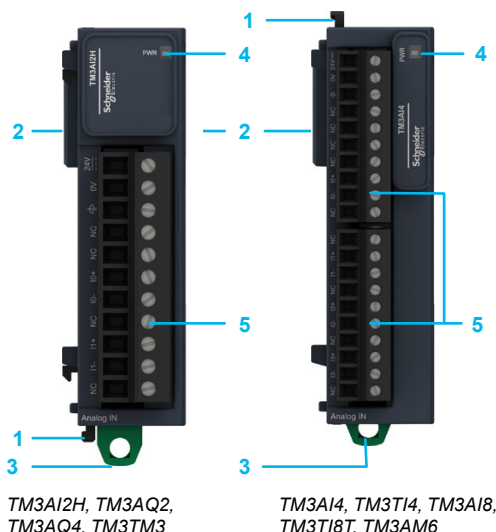



TM3AI2H TM3AI4



TM3TI4 TM3AI8



TM3TI8T



TM3AQ2 TM3AQ4



TM3TM3 TM3AM6



TM200 RSRCEMC



TM2XMTGB

References

Modicon TM3 analog I/O modules

Number and type of channels	Input range	Output range	Resolution	Conn. block for the inputs (1) Pitch (in.)	Reference	Weight kg/ lb
2 voltage/current inputs	- 10...+ 10 VDC, 0...+ 10 VDC/ 0...20 mA, 4...20 mA	—	16 bits or 15 bits + sign	Screw 5.08/0.2	TM3AI2H	0.115/ 0.254
				Spring 5.08/0.2	TM3AI2HG	0.100/ 0.220
4 voltage/current inputs	- 10...+ 10 VDC, 0...+ 10 VDC/ 0...20 mA, 4...20 mA	—	12 bits or 11 bits + sign	Screw 3.81/0.15	TM3AI4	0.110/ 0.243
				Spring 3.81/0.15	TM3AI4G	0.100/ 0.220
4 voltage/current or temperature inputs (2)	☐ Thermocouples (J, K, R, S, B, T, N, E, C) ☐ Temperature probes (RTDs) (Ni100, Ni1000, PT100, PT1000) ☐ - 10...+ 10 VDC, 0...+ 10 VDC) /0...20 mA, 4...20 mA)	—	16 bits or 15 bits + sign	Screw 3.81/0.15	TM3TI4	0.110/ 0.243
				Spring 3.81/0.15	TM3TI4G	0.100/ 0.220
8 voltage/current inputs	- 10...+ 10 VDC, 0...+ 10 VDC/ 0...20 mA, 4...20 mA	—	12 bits or 11 bits + sign	Screw 3.81/0.15	TM3AI8	0.110/ 0.243
				Spring 3.81/0.15	TM3AI8G	0.100/ 0.220
8 temperature inputs	☐ Thermocouples (J, K, R, S, B, T, N, E, C) ☐ NTC and PTC thermistors	—	16 bits or 15 bits + sign	Screw 3.81/0.15	TM3TI8T	0.110/ 0.243
				Spring 3.81/0.15	TM3TI8TG	0.100/ 0.220

Modicon TM3 analog output modules

2 voltage/current outputs	—	- 10...+ 10 VDC, 0...+ 10 VDC/ 0...20 mA, 4...20 mA	12 bits or 11 bits + sign	Screw 5.08/0.2	TM3AQ2	0.115/ 0.254
				Spring 5.08/0.2	TM3AQ2G	0.100/ 0.220
4 voltage/current outputs	—	- 10...+ 10 VDC, 0...+ 10 VDC/ 0...20 mA, 4...20 mA	12 bits or 11 bits + sign	Screw 5.08/0.2	TM3AQ4	0.115/ 0.254
				Spring 5.08/0.2	TM3AQ4G	0.100/ 0.220

Modicon TM3 analog mixed I/O modules

2 temperature or voltage/current inputs (2) and 1 voltage/current output	☐ Thermocouples (J, K, R, S, B, T, N, E, C) ☐ Temperature probes (RTDs) (Ni100, Ni1000, PT100, PT1000) ☐ - 10...+ 10 VDC, 0...+ 10 VDC) /0...20 mA, 4...20 mA)	- 10...+ 10 VDC, 0...+ 10 VDC/ 0...20 mA, 4...20 mA	16 bits or 15 bits + sign (for I) 12 bits or 11 bits + sign (for O)	Screw 5.08/0.2	TM3TM3	0.115/ 0.254
				Spring 5.08/0.2	TM3TM3G	0.100/ 0.220
4 voltage/current inputs and 2 voltage/current outputs	- 10...+ 10 VDC, 0...+ 10 VDC/ 0...20 mA, 4...20 mA	- 10...+ 10 VDC, 0...+ 10 VDC/ 0...20 mA, 4...20 mA	12 bits or 11 bits + sign (for I and O)	Screw 3.81/0.15	TM3AM6	0.110/ 0.243
				Spring 3.81/0.15	TM3AM6G	0.100/ 0.220

Separate parts

Description	Details	Unit reference	Weight kg/ lb
Grounding plate	Support equipped with 10 male Faston connectors for connecting the cable shielding (via 6.35 connectors, not supplied) and the functional grounds (FE)	TM2XMTGB	0.045/ 0.099
Shielding connection clamps <i>Sold in lots of 25</i>	Assembly and earthing of the cable shielding. Pack of 25 clamps including 20 for Ø 4.8 (0.189 in.) cable and 5 for Ø 7.9 (0.311 in.) cable	TM200RSRCEMC	—
Mounting kit <i>Sold in lots of 10</i>	For mounting the analog I/O modules on a plate or panel	TMAM2	0.065/ 0.143
Set of I/O terminal blocks	4 terminal blocks with 10 pins and 4 terminal blocks with 11 removable screw terminal pins for TM3AI4, TM3TI4, TM3AI8, TM3TI8, TM3AM6 modules	TMAT2MSET	0.127/ 0.280
	4 terminal blocks with 10 pins and 4 terminal blocks with 11 removable spring terminal pins for TM3AI4G, TM3TI4G, TM3AI8G, TM3TI8G, TM3AM6G modules	TMAT2MSETG	0.127/ 0.280

(1) Removable screw terminal blocks supplied with each module.


(2) Each input can be configured independently for temperature or voltage/current.

Expansion modules

Modicon TM3 expert module

for TeSys motor starter applications

3

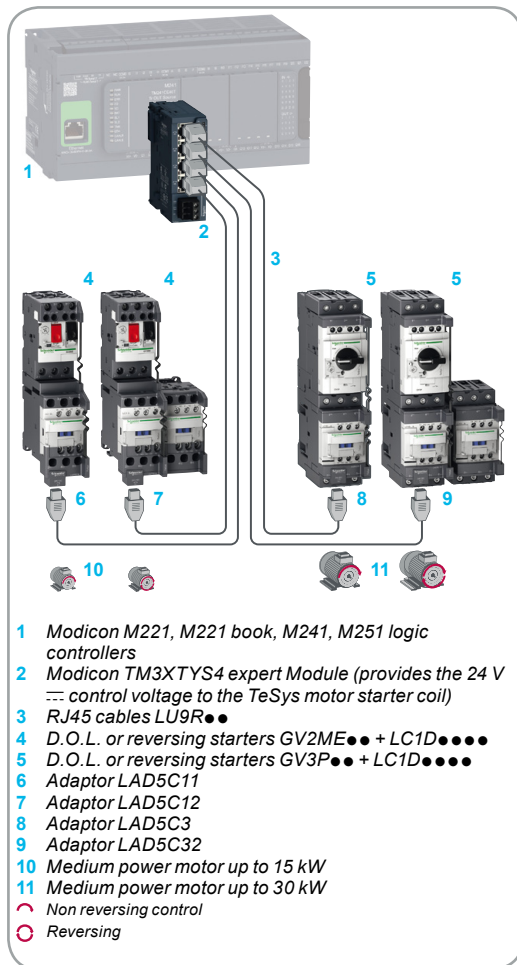

Presentation

The **TM3XTYS4** expert module is a pre-wired interface for use with Modicon M221, M241 and M251 logic controllers, designed to monitor and control up to four motor starters.

The **TM3XTYS4** expert module is a component of TeSys Solink system that allows a simple, fast and error free wiring of the motor starter.

Controlling motor starters with the TM3XTYS4 expert module

Each of the four channels on the **TM3XTYS4** expert module has:

■ Two outputs for the command of the motor starter:

- direction 1 command
- direction 2 command, if reversing starter.

■ Three inputs for the motor starter status:

- Ready
- Run
- Fault

The inputs are connected in series with the motor starter auxiliary contacts.

Connections

- The **TM3XTYS4** Expert module is equipped with four RJ 45 connectors for connection to the motor starters.
- **LU9R●●●** type cordsets are dedicated to the connection of TeSys motor starter and equipped with an RJ 45 connector at each end.

Configuration

- The expert module is connected directly to the logic controllers on the TM3 bus connector or to the bus expansion system (receiver module).
- One or more expert modules can be connected to M221, M221 Book, M241 and M251 logic controllers according to the general rules for the TM3 system: 7 modules max. and 14 modules max. with the use of Modicon TM3 bus expansion system (transmitter and receiver).

Mounting

- The **TM3XTYS4** expert module is mounted on a $\perp$ symmetrical rail.
- For plate or panel mounting, use the **TMAM2** kit.


Format

A single format: 23.6 x 90 x 70 mm (0.93 x 3.54 x 2.76 in.).

TeSys motor starter applications examples

	Direct Up to 15 kW / 400 V	From 18.5 to 30 kW / 400 V	Reversing Up to 15 kW / 400 V	From 18.5 to 30 kW / 400 V
TeSys D				
1 Motor circuit breaker	GV2ME●● or GV2P●●	GV3P●●	GV2ME●● or GV2P●●	GV3P●●
2 Contactor 24 V ~	LC1D09BL to LC1D32BL LC1D09BD to LC1D32BD	LC1D40ABD to LC1D65ABD	LC2D09BL to LC2D32BL LC2D09BD to LC2D32BD	LC2D40BD to LC1D65BD
3 Combination block	GV2AF3	–	GV2AF3	–
4 Auxiliary contact	GVAE20	GVAE20	GVAE20	GVAE20
5 Connection module	LAD5C11	LAD5C31	LAD5C12	LAD5C32
Connection cable				
6 Length of 0.3 m	LU9R03			
6 Length of 1 m	LU9R10			
6 Length of 3 m	LU9R30			
Modicon TM3 module				
7 Modicon TM3	TM3XTYS4			
TeSys U				
8 Power base	LUB120 or LUB320		LUB120 or LUB320	
9 Control unit 24 V ~	LUCA/LUCB/LUCC/LUCD●●BL		LUCA/LUCB/LUCC/LUCD●●BL	
10 Terminal blocks	LU9BN11C		LU9MRC	
11 Parallel wiring module	LUFC00		LUFC00	

For further information about **TeSys motor starter applications**, please refer to our website www.schneider-electric.com.

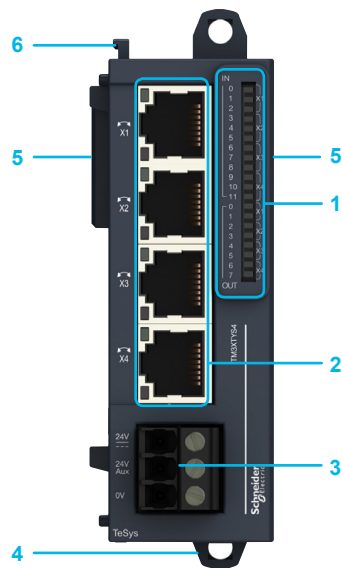

TM3XTYS4

Description

TM3XTYS4 expert module

- 1 Block with 20 LEDs displaying the status of the 12 input channels and 8 output channels.
- 2 Four RJ 45 connectors for cordsets connecting to the motor starters.
- 3 Screw terminal block for connecting the 24 V $\overline{\text{---}}$ power supply for the inputs and starter coils.
- 4 $\perp$ symmetrical rail locking clip.
- 5 TM3 bus connectors (one on each side). These are designed to provide continuity of the link between connected modules.
- 6 Adjacent module locking latch.

References

Expert module (1)

Designation	Number and type of channels	Reference	Weight kg/ lb
Expert modules for control of TeSys motor starters 24 V $\overline{\text{---}}$ power supply (1.2 A)	4 motor starters	TM3XTYS4	0.115/ 0.254

Separate parts

Designation	Description	Reference	Weight kg/ lb
Mounting kit Sold in lots of 10	For plate or panel mounting of expert modules	TMAM2	0.065/ 0.143



(1) The **TM3XTYS4** module is supplied with a screw removable terminal block for connecting the power supply.

Expansion modules
Modicon TM3 functional safety modules
(Powered by *Preventa* technology)



Safety application

Compatibility



Control of Emergency stop and switches

Control of Emergency stop and switches

- Modicon M221 and Modicon M221 Book logic controllers
- Modicon M241 logic controllers
- Modicon M251 logic controllers



Maximum achievable safety level	
Standards (product)	
Standards (machine assembly)	Emergency stop circuits
	Switches in protective devices
	Type 4 light curtains equipped with solid-state safety outputs with test function
	4-wire pressure-sensitive mats or edges
Product certifications	

PLd/Category 3 conforming to EN/ISO 13849-1 SILCL2 conforming to EN/IEC 61508 and EN/IEC 62061	PLe/Category 4 conforming to EN/ISO 13849-1 SILCL3 conforming to EN/IEC 61508 and EN/IEC 62061
EN/IEC 60947-1 EN/IEC 60947-5-1	EN/IEC 60947-1 EN/IEC 60947-5-1
EN/IEC 60204-1 EN/ISO 13850	EN/IEC 60204-1 EN/ISO 13850
EN/ISO 14119	EN/ISO 14119
–	–
–	–
UL, CSA, TÜV, CCC	UL, CSA, TÜV, CCC

Safety circuits	Number
	Type
Module fuse protection	
LEDs	
Power supply	

3 NO	3 NO
Instantaneous opening relay	Instantaneous opening relay
Internal, electronic	Internal, electronic
6 LEDs	6 LEDs
24 V ---	24 V ---

Synchronization time between inputs
Input channel voltage



Unlimited	Unlimited
24 V ---	24 V ---

Safety module type	Channels and power supply connected:
	with removable screw terminals
	with removable spring terminal blocks

TM3SAC5R	TM3SAF5R
TM3SAC5RG	TM3SAF5RG

Pages

3/35



Control of Emergency stop, switches or solid-state output safety light curtains

Control of Emergency stop, switches, pressure-sensitive mats and edges or solid-state output safety light curtains

- Modicon M221 and Modicon M221 Book logic controllers
- Modicon M241 logic controllers
- Modicon M251 logic controllers



PLd / Category 3 conforming to EN/ISO 13849-1 SILCL2 conforming to EN/IEC 61508 and EN/IEC 62061	PLe/Category 4 conforming to EN/ISO 13849-1 SILCL3 conforming to EN/IEC 61508 and EN/IEC 62061
EN/IEC 60947-1 EN/IEC 60947-5-1	EN/IEC 60947-1 EN/IEC 60947-5-1
EN/IEC 60204-1 EN/ISO 13850	EN/IEC 60204-1 EN/ISO 13850
EN/ISO 14119	EN/ISO 14119
Also designed for use with equipment conforming to EN/IEC 61496-1 up to type 4	Also designed for use with equipment conforming to EN/IEC 61496-1 up to type 4
–	Also designed for use with equipment conforming to standard EN 1760-1
UL, CSA, TÜV, CCC	UL, CSA, TÜV, CCC

3 NO	3 NO
Instantaneous opening relay	Instantaneous opening relay
Internal, electronic	Internal, electronic
6 LEDs	6 LEDs
24 V ---	24 V ---

Unlimited	Unlimited or 2 s, 4 s (depending on wiring), can be configured in the software
24 V ---	24 V ---

TM3SAFL5R	TM3SAK6R
TM3SAFL5RG	TM3SAK6RG

3/35

Expansion modules

Modicon TM3 functional safety modules

(Powered by **Preventa** technology)



3

Presentation

Modicon TM3 functional safety modules are designed using Preventa technology. They can be used to incorporate machine safety into the overall machine control.

Data acquisition: control of safety products

- Emergency stop button: complementary protection measures
- Monitoring devices used in protective systems to control access to hazardous areas
- Light curtains and safety mats to detect intrusion into hazardous areas

Monitoring and processing

- Modicon TM3 functional safety modules control the input signals from monitoring devices and act as an interface with contactors and variable speed drives, causing the machine to stop.
- Modicon TM3 functional safety modules complement the embedded I/O on M221, M221 Book, M241 and M251 logic controllers.

Modicon TM3 functional safety modules	Safety system/Performance level reached
---------------------------------------	---


For control of emergency stops

Category 3/PLd, SIL2 architecture




For control of switches

Category 4/PLc, SIL3 architecture

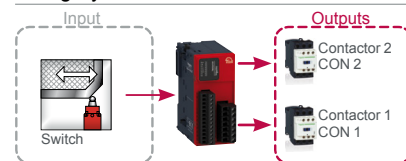


For control of type 4 light curtains

Category 3/PLd, SIL2 architecture

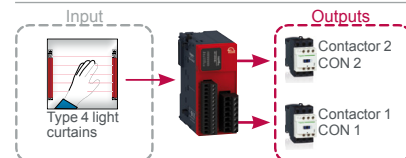

For control of pressure-sensitive mats or edges

Category 4/PLc, SIL3 architecture

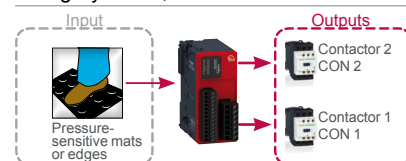

- The safety outputs available on the 4 modules are relay type, guided by microprocessor technology.
- Diagnostic utilities use LEDs, found on the module front face. They provide information on the monitoring circuit status.
- The diagnostic information is shared via the TM3 bus.
- The Start button monitoring function is configurable depending on the wiring.

Connections

Equipped, depending on the model, with removable screw or spring-type terminals for connecting the safety channels.

Configuration

Modicon TM3 functional safety modules connect to M221, M221 Book, M241 and M251 logic controllers according to the general rules for the TM3 system: 7 modules max. and 14 modules max. with the use of Modicon TM3 bus expansion system (transmitter and receiver).


Mounting

- Modicon TM3 functional safety modules are mounted on a 15mm symmetrical rail.
- For plate or panel mounting, use the **TMAM2** kit.

Expansion modules

Modicon TM3 functional safety modules

(Powered by **Preventa** technology)

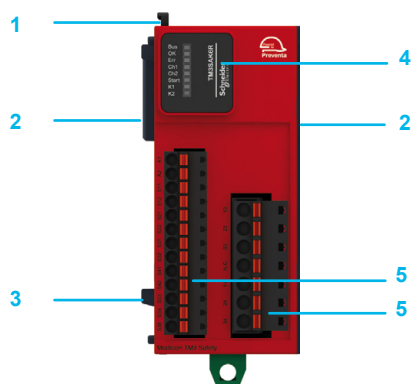

TM3SAC5R



TM3SAC5RG



TM3SAF5R



TM3SAF5RG



TM3SAFL5R



TM3SAFL5RG



TM3SAK6R



TM3SAK6RG

Description

Modicon TM3 functional safety modules

- 1 Adjacent module locking latch.
- 2 TM3 bus connectors (one on each side). These are designed to provide continuity of the link between connected modules.
- 3 symmetrical rail locking clip.
- 4 Display block (6 LEDs - green, red) for the module channels and diagnostics.
- 5 Removable spring or screw-type terminal blocks (depending on the model) for connecting the safety channels and the power supply.

References

Designation	Maximum achievable safety level	Term. block for input conn. (1)	Reference	Weight kg/lb
24 V power supply				
Functional Safety modules for control of ☐ emergency stops ☐ switches	PLd/Category 3 conforming to EN/ISO 13849-1 SILCL2 conforming to EN/IEC 61508 and EN/IEC 62061	screw	TM3SAC5R	0.190/ 0.420
		spring	TM3SAC5RG	0.190/ 0.420
Functional Safety modules for control of ☐ emergency stops ☐ switches	PLe/Category 4 conforming to EN/ISO 13849-1 SILCL3 conforming to EN/IEC 61508 and EN/IEC 62061	screw	TM3SAF5R	0.190/ 0.420
		spring	TM3SAF5RG	0.190/ 0.420
Functional Safety modules for control of ☐ emergency stops ☐ switches ☐ safety light curtains with solid-state outputs	PLd / Category 3 conforming to EN/ISO 13849-1 SILCL2 conforming to EN/IEC 61508 and EN/IEC 62061	screw	TM3SAFL5R	0.190/ 0.420
		spring	TM3SAFL5RG	0.190/ 0.420
Functional Safety modules for control of ☐ emergency stops ☐ switches ☐ safety light curtains with solid-state outputs ☐ pressure-sensitive mats or edges	PLe/Category 4 conforming to EN/ISO 13849-1 SILCL3 conforming to EN/IEC 61508 and EN/IEC 62061	screw	TM3SAK6R	0.190/ 0.420
		spring	TM3SAK6RG	0.190/ 0.420

Separate parts

Designation	Description	Reference	Weight kg/lb
Mounting kit Sold in lots of 10	For mounting Functional Safety modules on a plate or panel	TMAM2	0.065/ 0.143

(1) Removable terminal blocks equipped with screw terminals or spring terminals, supplied with the controller.

Presentation

Modicon TM3 transmitter and receiver modules can be used to:

- increase from 7 to 14 the number of I/O expansion modules that can be connected to an M2●● logic controller
- locate Modicon TM3 expansion modules remotely, up to 5 m (16.404 ft.) away

The transmitter and receiver modules are physically linked by a **VDIP184546●●●** bus expansion cable.

Mounting

- TM3 bus expansion modules are mounted on a  symmetrical rail.
- For plate or panel mounting, use the **TMAM2** kit.



Description

TM3XTRA1 transmitter module

- 1 Block with 2 LEDs displaying the communication status and power supply status.
- 2 RJ 45 connector for connecting the **VDIP184546●●●** bus expansion cable.
- 3 Screw terminal for the functional ground (FG) connection.
- 4  symmetrical rail locking clip.
- 5 TM3 bus connector providing continuity of the link with the connected module.
- 6 Adjacent module locking latch.

TM3XREC1 receiver module

- 1 Block with 2 LEDs displaying the communication status and power supply status.
- 2 RJ 45 connector for connecting the **VDIP184546●●●** bus expansion cable.
- 3 Screw terminal block for connecting the power supply.
- 4  symmetrical rail locking clip.
- 5 TM3 bus connector providing continuity of the link with the connected module.
- 6 Adjacent module locking latch.

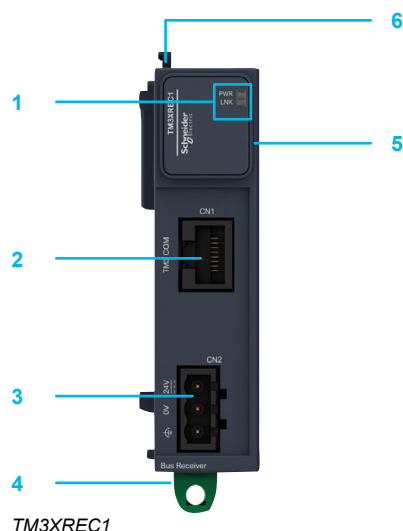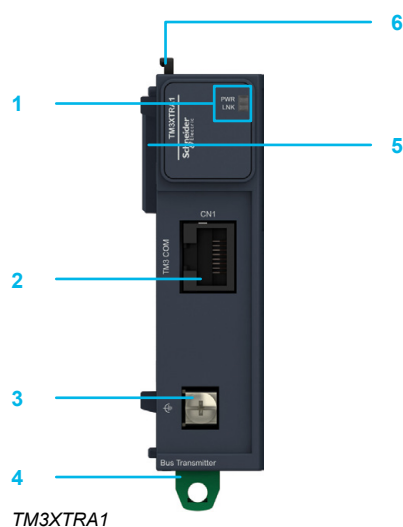

Expansion modules

Modicon TM3 bus expansion system

Transmitter module and receiver module



TM3XTRA1



TM3XREC1

References

Modicon TM3 bus expansion system

Designation	Characteristics	Reference	Weight kg/ lb
Transmitter module	Data transmission module Power supply: using the TM3 bus	TM3XTRA1	0.065/ 0.143
Receiver module	Data reception module Power supply: 24 V $\overline{\text{DC}}$ (with external power supply)	TM3XREC1 (1)	0.075/ 0.165

Cordsets

Designation	Used for	Length m/ ft	Reference	Weight kg/ lb
Shielded category 5E TM3 bus expansion cables	TM3 bus expansion by linking transmitter and receiver modules Equipped with an RJ 45 connector at each end	0.5/ 1.64	VDIP184546005	—
		1/ 3.28	VDIP184546010	—
		2/ 6.56	VDIP184546020	—
		3/ 9.84	VDIP184546030	—
		5/ 16.40	VDIP184546050	—
Functional ground cable	Functional ground for the TM3XTRA1 transmitter module	0.12/ 0.39	Cable supplied with the TM3XTRA1 transmitter module	

Spare parts


Designation	Description	Unit reference	Weight kg/ lb
Mounting kit <i>Sold in lots of 10</i>	For mounting bus expansion modules on a plate or panel	TMAM2	0.065/ 0.143
Set of terminal blocks for connecting the power supply	8 removable terminal blocks with screw terminals	TMAT2PSET	0.127/ 0.280
	8 removable terminal blocks with spring terminals	TMAT2PSETG	0.127/ 0.280

(1) The TM3XREC1 module is supplied with a removable screw terminal block for connecting the power supply.

Expansion modules
Modicon TM5 compact blocks
for Modicon M258 logic controller and Modicon LMC058
motion controller

Applications	Modicon TM5 compact block
	Compatibility

20 I/O	36 I/O	42 I/O
Modicon M258 logic controller Modicon LMC058 motion controller		

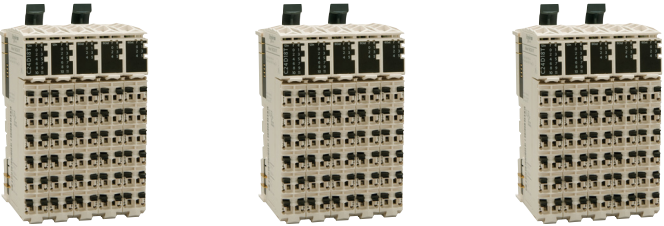

Channel connection

Digital inputs	Number
	Nominal input voltage
	IEC/EN 61131-2 conformity
	Type of signal (1)
	Type of wiring
	Limit values
	Nominal input current
	Input impedance
	State 0
	State 1

With removable spring terminal blocks (supplied)

12	24	24
24 V ~	24 V ~	24 V ~
Type 1	Type 1	Type 1
Sink	Sink	Sink
3-wire	1-wire	1-wire
20.4... 28.8 V ~	20.4... 28.8 V ~	20.4... 28.8 V ~
3.75 mA	3.75 mA	3.75 mA
6.4 kΩ	6.4 kΩ	6.4 kΩ
5 V max. ~	5 V max. ~	5 V max. ~
15 V min. ~	15 V min. ~	15 V min. ~

Digital outputs	Number
	Nominal output voltage
	Output current per channel
	Output current per group of channels
	Type of signal (1)
	Type of wiring
	Limit values
	Short-circuit and overload protection

8, transistor	12, relays with NO contact	18, transistor
24 V ~	24 V ~	24 V ~
0.5 A	0.5 A	0.5 A
1 A max.	5 A max.	2 A max.
Source	Source	Source
3-wire	1-, 2- or 3-wire	2-wire
20.4...28.8 V ~	20.4...28.8 V ~	20.4...28.8 V ~
Yes	Yes	Yes

Analog inputs	Number
	Type
	Range
	Resolution
	Sampling period
	without filtering with filtering

Analog outputs	Number
	Type
	Range
	Resolution
	Response time

Power supply	
Isolation	Channel-to-channel
	Between channel groups
	Channel-to-bus


Type of Modicon TM5 compact block

TM5C12D8T	TM5C24D12R	TM5C24D18T
-----------	------------	------------

Page

(1) Source output: PNP output. Sink output: NPN output.

24 I/O	16 I/O
Modicon M258 logic controller Modicon LMC058 motion controller	

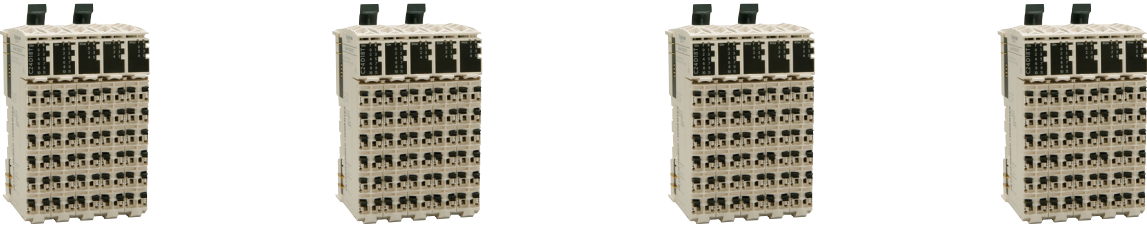

With removable spring terminal blocks (supplied)

12
24 V ~
Type 1
Sink
2-wire
20.4... 28.8 V ~
3.75 mA
6.4 kΩ
5 V max. ~
15 V min. ~

6, transistor
24 V ~
0.5 A
2 A max.
Source
2-wire
20.4...28.8 V ~
Yes

4	8	8	8
Voltage/current	Voltage	Current	4 Voltage + 4 current
- 10...+ 10 Vdc 0...20 mA/4...20 mA	- 10...+ 10 Vdc	0...20 mA/4...20 mA	Voltage : - 10...+ 10 Vdc Current : 0...20 mA/4...20 mA
12 bits	11 bits + sign	12 bits	Voltage: 11 bits + sign Current: 12 bits
300 μs	—	—	—
1 ms	50 ms	50 ms	50 ms

2	8	8	8
Voltage/current	Voltage	Current	4 Voltage + 4 current
- 10...+ 10 Vdc 0...20 mA	- 10...+ 10 Vdc	0...20 mA	Voltage : - 10...+ 10 Vdc Current : 0...20 mA
12 bits	11 bits + sign	12 bits	Voltage: 11 bits + sign Current: 12 bits
1 ms max.	20 ms max. 5 ms per channel	20 ms max. 5 ms per channel	20 ms max. 5 ms per channel

Internal	Internal	Internal	Internal
Non-isolated	Non-isolated	Non-isolated	Non-isolated
—	—	—	—
500 V ~ RMS	500 V ~ RMS	500 V ~ RMS	500 V ~ RMS

TM5C12D6T6L	TM5CAI8O8VL	TM5CAI8O8CL	TM5CAI8O8CVL
-------------	-------------	-------------	--------------

3/41

Expansion modules

Modicon TM5 compact blocks for Modicon M258 logic controller and Modicon LMC058 motion controller

Presentation

Modicon **TM5C●●●●●●●●** compact blocks offer a low-cost solution for expanding digital and/or analogue I/O control system configurations. They consist of a block containing the circuit boards, the bus bases, and the **TM5ACTB12** removable terminal blocks.

They complement the embedded I/O in the various M258 controllers and LMC058 motion controllers and represent a cost-effective way to create configurations requiring a large number of digital or analogue channels.

The **TM5C●●●●●●●●** I/O compact block offer consists of:

- A 24 V --- digital I/O compact block, with 12 sink inputs and 8 transistor outputs
- A 24 V --- digital I/O compact block, with 24 sink inputs and 12 relay outputs
- A 24 V --- digital I/O compact block, with 24 sink inputs and 18 transistor outputs
- A 24 V --- mixed I/O compact block, with 12 sink digital inputs and 4 analogue inputs, and 6 transistor digital outputs and 2 analogue outputs
- 3 x 24 V --- analogue I/O compact block:
 - a block with 8 voltage I/O
 - a block with 8 current I/O
 - a block with 4 voltage I/O + 4 current I/O.

Regardless of which compact block is chosen, the format is the same and corresponds to five I/O expansion modules.


TM5 compact blocks are connected to the TM5 expansion bus on M258 controllers and LMC058 motion controllers.

The advantage of these blocks is their compact size, ease of wiring and, depending on the reference, the option of combining different types of channel.

Description

TM5 compact blocks comprise:


- 1 On each side of the base, a bus expansion connection for the link with the previous controller or block
- 2 Two mechanical locking clips for mounting/dismounting on a symmetrical rail
- 3 Five LED display blocks for the channels and compact block diagnostics
- 4 Five slots for the plain text cover holder (label-holder)
- 5 Five removable spring terminal blocks, each with locking clip and slots for coloured identifiers

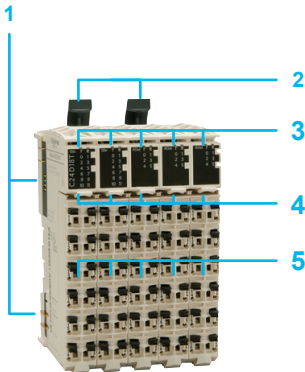


Expansion modules

Modicon TM5 compact blocks


for Modicon M258 logic controller and Modicon LMC058 motion controller




TM5C12D8T




TM5C24D12R



TM5C24D18T




TM5C12D6T6L



TM5CAI8O8VL



TM5CAI8O8CL



TM5CAI8O8CVL

References

Number of I/O	Inputs	Outputs (1)	Reference	Weight kg/ lb
TM5 I/O digital compact blocks				
20 I/O	12 digital inputs, 24 V $\overline{\text{---}}$, Sink, 3-wire	8 transistor digital outputs, 3-wire, 24 V $\overline{\text{---}}$, Source, 0.5 A	TM5C12D8T	0.037/ 0.082
36 I/O	24 digital inputs, 24 V $\overline{\text{---}}$, Sink, 1-wire, 0.5 A max	12 digital outputs, 5 A relay, with NO contact, 30 V $\overline{\text{---}}$ /230 V $\sim$	TM5C24D12R	0.037/ 0.082
42 I/O	24 digital inputs, 24 V $\overline{\text{---}}$, Sink, 1-wire	18 transistor digital outputs, 24 V $\overline{\text{---}}$, Source, 0.5 A, 2-wire	TM5C24D18T	0.037/ 0.082
TM5 I/O digital/analogue compact blocks				
24 I/O	12 digital inputs, 24 V $\overline{\text{---}}$, Sink, 2-wire 4 analogue inputs - 10...+ 10 V, 0...20 mA, 4...20 mA, resolution 12 bits	6 transistor digital outputs, 2-wire, 24 V $\overline{\text{---}}$, Source, 0.5 A 2 analogue outputs, - 10...+ 10 V, 0...20 mA, resolution 12 bits	TM5C12D6T6L	0.037/ 0.082
TM5 I/O analogue compact blocks				
16 I/O	8 analogue voltage inputs - 10...+ 10 Vdc Resolution 11 bits + sign	8 analogue voltage outputs - 10...+ 10 Vdc Resolution 11 bits + sign	TM5CAI8O8VL	0.037/ 0.082
	8 analogue current inputs 0...20 mA/4...20 mA Resolution 12 bits	8 analogue current outputs 0...20 mA Resolution 12 bits	TM5CAI8O8CL	0.037/ 0.082
	8 analogue inputs: ☐ 4 voltage inputs - 10...+ 10 Vdc ☐ 4 current inputs 0...20 mA/4...20 mA Resolution ☐ voltage: 11 bits + sign ☐ current : 12 bits	8 analogue outputs: ☐ 4 voltage outputs - 10...+ 10 Vdc ☐ + 4 current outputs 0...20 mA Resolution ☐ voltage: 11 bits + sign ☐ current : 12 bits	TM5CAI8O8CVL	0.037/ 0.082
Terminal blocks				
Use	Description	Sold in lots of	Unit reference	Weight kg/ lb
For I/O compact blocks, 24 V $\overline{\text{---}}$ power supply	12 spring terminals	1	TM5ACTB12	0.020/ 0.044
		10	TM5ACTB1210	0.200/ 0.441
Accessories				
See page 3/62				

(1) Source output: PNP output, sink output: NPN output.

Expansion modules
Modicon TM5 Digital modules
and Modicon TM5 Digital/Analog module
for Modicon M258 logic controller and Modicon LMC058
motion controller

Applications	Type of expansion module
	Compatibility

Channel connection	
Digital inputs	Number
	Nominal input voltage
	IEC/EN 61131-2 conformity
	Type of signal (1)
	Type of wiring
	Limit values
	Nominal input current
	Input impedance
	State 0
	State 1

Digital outputs	Number
	Nominal output voltage
	Output current per channel
	Output current per group of channels
	Type of signal (1)
	Type of wiring
	Limit values
	Short-circuit and overload protection

Analog inputs	Number
	Type
	Range
	Resolution
	Sampling period
	without filtering
	with filtering

Analog outputs	Number
	Type
	Range
	Resolution
	Response time

Type of electronic expansion module
Associated bus base (2)
Associated terminal block (2)
Pages

(1) Source output: PNP output, sink output: NPN output.
(2) to be ordered separately.

2 to 16 digital input channels
Modicon M258 logic controller, Modicon LMC058 motion controller



With removable spring terminal blocks (to be ordered separately)							
2	4	6	12	16	2	4	6
24 V ~					100/240 V ~		
Type 1					Type 1		
Sink					-		
1-, 2- or 3-wire		1 or 2-wire	1-wire		1-, 2- or 3-wire	1 or 2-wire	
~ 20.4...28.8 V					~ 100...240 V		
3.75 mA				2.68 mA	5 mA at ~ 100 V	10 mA at ~ 120 V	
6.4 kΩ				8.9 kΩ	-		
~ 5 V max.					-		
~ 15 V min.					-		

TM5 SDI2D	TM5 SDI4D	TM5 SDI6D	TM5 SDI12D	TM5 SDI16D	TM5 SDI2A	TM5 SDI4A	TM5 SDI6U
TM5ACBM11, TM5ACBM15					TM5ACBM12		
TM5ACTB06, TM5ACTB12			TM5 ACTB12	TM5 ACTB16	TM5ACTB32		
3/45					3/47		

4 digital input channels and 1 analog input channel 2 digital output channels and 1 analog output channel	8 digital input channels 4 transistor output channels	2 to 16 transistor output channels	2 transistor output channels	2 to 4 relay output channels
Modicon M258 logic controller, Modicon LMC058 motion controller				



With removable spring terminal blocks (to be ordered separately)									
4	8								
24 V ~	24 V ~								
Type 1	Type 1								
Sink	Sink								
1-wire	1-wire								
~ 20.4...28.8 V	~ 20.4...28.8 V								
3.3 mA	3.75 mA								
7.2 kΩ	6.4 kΩ								
~ 5 V max.	~ 5 V max.								
~ 15 V min.	~ 15 V min.								

2	4	2	4	4	6	8	12	16	2	2	4
24 V ~	24 V ~	24 V ~							100/240 V ~	~ 30/~ 230 V	
0.5 A	0.5 A	0.5 A	0.5 A	2 A	0.5 A	2 A	0.5 A		1 A	5 A	
1 A max.	2 A max.	1 A max.	2 A max.	4 A max.	3 A max.	8 A max.	6 A max.		1 A	10 A max.	
Source	Source	Source							Solid state relay	Relay	
1-wire	1-wire	1-, 2- or 3-wire			1 or 2-wire	1-wire			3-wire	NO/NC contact	
~ 20.4...28.8 V	~ 20.4...28.8 V	~ 20.4...28.8 V							~ 80...264 V	~ 24...36 V ~ 184...276 V	
Yes	Yes	Yes							Yes	No	

1
Voltage/current
- 10...+ 10 Vdc
0...20 mA/4...20 mA
12 bits + sign
400 ms
1 ms max.

1
Voltage/current
- 10...+ 10 Vdc
0...20 mA
12 bits
1 ms max.

TM5 SMM6D2L	TM5 SDM12DT	TM5 SDO2T	TM5S DO4T	TM5 SDO4TA	TM5 SDO6T	TM5 SDO8TA	TM5 SDO12T	TM5 SDO16T	TM5 SDO2S	TM5 SDO2R	TM5 SDO4R TM5 SDO4R4
TM5ACBM11, TM5ACBM15									TM5ACBM12		
TM5ACTB12		TM5ACTB06, TM5ACTB12				TM5ACTB12		TM5 ACTB16	TM5ACTB32		
3/45									3/47		

Expansion modules

Modicon TM5 Digital modules and Modicon TM5 Digital/Analog module for Modicon M258 logic controller and Modicon LMC058 motion controller

Presentation

The **TM5S●●●●** digital module offer consists of:

- Thirteen input, mixed I/O and output electronic modules (sensor and preactuator 24 V $\square$ power supply): **TM5SD●●●●**
- One Digital/Analog mixed I/O electronic module: **TM5SMM6D2L**.

They complement the embedded I/O in the various M258 logic controllers and LMC058 motion controllers. They are used to adapt to the application requirements as closely as possible to reduce the installation and wiring costs.

Each digital expansion module consists of three parts to be ordered separately (1):

- ☐ An I/O electronic module
- ☐ A bus base
- ☐ A terminal block

These modules can be mechanically assembled before mounting on a symmetrical rail.

These modules offer the following advantages:

- ☐ Removable terminal
- ☐ Spring terminals which can be used for quick, tool-free connection of the sensors and preactuators in addition, the quality of the spring terminals avoids the need for periodic retightening
- ☐ Hot swapping

The digital modules offer includes:

- Five 24 V $\square$ digital input modules with 2, 4, 6, 12 or 16 sink inputs
- One 24 V $\square$ digital mixed I/O electronic module, with 8 sink inputs and 4 source transistor outputs
- Seven digital output output electronic modules with 2, 4, 6, 12 or 16 source transistor outputs

The digital/analog module offer includes:


- one mixed I/O electronic module with four 24 V $\square$ digital inputs and one voltage/current analog input, two 24 V digital outputs and one voltage/current analog output.

Description

TM5SD●●●● digital modules and digital/analog **TM5SMM6D2L** module comprise:

- 1 A bus base
- 2 A mechanical locking lever for mounting/dismounting on a symmetrical rail
- 3 On each side of the base, a bus expansion connection for the link with the previous controller or module
- 4 A digital input, I/O or output electronic module
- 5 A channel and module diagnostics LED display block
- 6 A slot for labelling (label-holder)
- 7 A removable spring terminal block with locking lever and slots for coloured identifiers

(1) Also sold in kits, see page 3/63

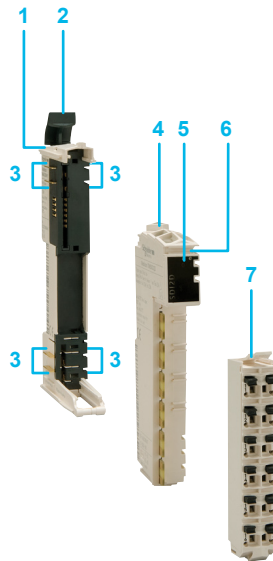

Expansion modules

Modicon TM5 Digital modules
and Modicon TM5 Digital/Analog module
for Modicon M258 logic controller and Modicon LMC058
motion controller



TM5SD●●●



TM5SMM6D2L



TM5ACBM●●



TM5ACTB●●

References

Digital input electronic modules

Voltage	Number and type of channels (1)	Reference	Weight kg/ lb
24 V $\square$ inputs	2 sink inputs	TM5SDI2D	0.025/ 0.055
	4 sink inputs	TM5SDI4D	0.025/ 0.055
	6 sink inputs	TM5SDI6D	0.025/ 0.055
	12 sink inputs	TM5SDI12D	0.025/ 0.055
	16 sink inputs	TM5SDI16D	0.025/ 0.055

Digital mixed inputs/outputs electronic module

24 V $\square$ inputs/outputs	8 sink inputs, 4 source transistor outputs	TM5SDM12DT	0.025/ 0.055
----------------------------------	--	------------	-----------------

Digital output electronic modules

24 V $\square$ outputs	2 source transistor outputs	0.5 A per channel	TM5SDO2T	0.025/ 0.055
	4 source transistor outputs	0.5 A per channel	TM5SDO4T	0.025/ 0.055
	4 source transistor outputs	2 A per channel, 4 A per module	TM5SDO4TA	0.025/ 0.055
	6 source transistor outputs	0.5 A per channel	TM5SDO6T	0.025/ 0.055
	8 source transistor outputs	2 A per channel	TM5SDO8TA	0.025/ 0.055
	12 source transistor outputs	0.5 A per channel	TM5SDO12T	0.025/ 0.055
	16 source transistor outputs	0.5 A per channel	TM5SDO16T	0.025/ 0.055

Digital/Analog mixed inputs/outputs electronic module

24 V $\square$ inputs/outputs	4 sink digital inputs	–	TM5SMM6D2L	0.025/ 0.055
	1 analog input	– 10...+ 10Vdc, 0...20 mA/4...20 mA		
	2 source transistor outputs	0.5 A per channel		
	1 analog output	0...20 mA		

Bus bases

Power supply	Characteristics	Sold in lots of	Unit reference	Weight kg/ lb
24 V $\square$	–	1	TM5ACBM11	0.020/ 0.044
		10	TM5ACBM1110	0.200/ 0.441
	Address setting	1	TM5ACBM15	0.020/ 0.044
		10	TM5ACBM1510	0.200/ 0.441

Terminal blocks

Use	Description	Sold in lots of	Unit reference	Weight kg/ lb
For electronic modules, 24 V $\square$ power supply	6 contacts	1	TM5ACTB06	0.016/ 0.035
		10	TM5ACTB0610	0.160/ 0.305
	12 contacts	1	TM5ACTB12	0.020/ 0.044
		10	TM5ACTB1210	0.200/ 0.441
	16 contacts	1	TM5ACTB16	0.020/ 0.044

Accessories

See page 3/62

Digital I/O expansion module kits

See page 3/63

(1) Source output: PNP output, sink output: NPN output.

Expansion modules

Modicon TM5 Digital modules

for Modicon M258 logic controller and Modicon LMC058 motion controller

Presentation

The **TM5SD●●●** digital module offer consists of six input and output electronic modules (sensor and preactuator 100/240 V ~ power supply). They complement the embedded I/O in the various M258 controllers and LMC058 motion controllers. They are used to adapt to the application requirements as closely as possible to reduce the installation and wiring costs.

Each digital module consists of three parts to be ordered separately (1):

- ☐ An I/O electronic module
- ☐ A bus base
- ☐ A terminal block

These modules can be mechanically assembled before mounting on a symmetrical rail.

These modules offer the following advantages:

- ☐ Removable terminal
- ☐ Spring terminals which can be used for quick, tool-free connection of the sensors and preactuators in addition, the quality of the spring terminals avoids the need for periodic retightening
- ☐ Hot swapping

The digital modules offer includes:


- Two 100/240 V ~ digital input electronic modules, with 2 or 4 inputs
- A 100/120 V ~ digital input electronic module, with 6 inputs
- A 100/240 V ~ digital output electronic modules, with 2 outputs
- Two 30 V ~/230 V ~ digital output electronic modules, with 2 or 4 relay outputs

Description

TM5SD●●● digital modules comprise:

- 1 A bus base
- 2 A mechanical locking lever for mounting/dismounting on a symmetrical rail
- 3 On each side of the base, a bus expansion connection for the link with the previous controller or module
- 4 A digital input or output electronic module
- 5 A channel and module diagnostics LED display block
- 6 A slot for labelling (label-holder)
- 7 A removable spring terminal block with locking lever and slots for coloured identifiers

(1) Also sold in kit, see page 3/63

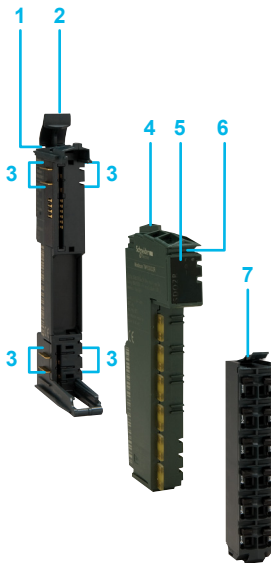

Expansion modules

Modicon TM5 Digital modules

for Modicon M258 logic controller and Modicon LMC058 motion controller



TM5SDI●●



TM5SDO●●



TM5ACBM●●



TM5ACTB●●

References

Multivoltage digital input electronic modules

Voltage	Number and type of channels (1)	Sold in lots of	Unit reference	Weight kg/ lb
100/240 V ~ inputs	2 inputs	1	TM5SDI2A	0.025/ 0.055
	4 inputs	1	TM5SDI4A	0.025/ 0.055
100/120 V ~ inputs	6 inputs	1	TM5SDI6U	0.025/ 0.055

Digital output electronic modules

100/240 V ~ outputs	2 x 1 A transistor outputs	1	TM5SDO2S	0.025/ 0.055
30 V ~/230 V ~ outputs	2 x 5 A relay outputs, NO/NC contact	1	TM5SDO2R	0.025/ 0.055
	4 x 5 A relay outputs, NO/NC contact	1	TM5SDO4R	0.025/ 0.055
		4	TM5SDO4R4	0.100/ 0.220

Bus bases

Power supply	Characteristics	Sold in lots of	Unit reference	Weight kg
~ 240 V	—	1	TM5ACBM12	0.020/ 0.044
		10	TM5ACBM1210	0.200/ 0.440

Terminal blocks

Use	Description	Sold in lots of	Unit reference	Weight kg
For digital I/O electronic module, 240 V ~ power supply	12 contacts	1	TM5ACTB32	0.025/ 0.055
		10	TM5ACTB3210	0.250/ 0.550

Accessories

See page 3/62

Digital I/O expansion module kit

See page 3/63

(1) Source output: PNP output, sink output: NPN output.

Expansion modules

Modicon TM5 common distribution modules
for Modicon M258 logic controller and Modicon LMC058
motion controller

Presentation

TM5SP●●● common distribution modules make cabling more flexible by "branching" the various voltages needed to power the I/O expansion modules used.

Each common distribution module consists of three parts to be ordered separately:

- ☐ A common distribution electronic module
 - ☐ A bus base
 - ☐ A terminal block to be chosen according to the number of terminals
- These modules can be mechanically assembled before mounting on a symmetrical rail.

These modules offer the following advantages:

- ☐ Removable terminal
- ☐ Spring terminals which can be used for quick, tool-free connection of the sensors and preactuators in addition, the quality of the spring terminals avoids the need for periodic retightening
- ☐ Hot swapping

The power supply common modules offer includes four common distribution electronic modules which have a removable fuse.


This offer is completed by a non-functioning dummy module **TM5SD000** which can be used to:

- ☐ Increase the flexibility in managing the various options for an installation: machine with or without temperature sensors for example.
- ☐ Reserve a physical slot and a logical address on the backplane bus, for adding a functioning module at a later date: application-specific I/O expansion for example.

Description

TM5SP●●● common distribution modules comprise:

- 1 A bus base
- 2 A mechanical locking lever for mounting/dismounting on a symmetrical rail
- 3 On each side of the base, a bus expansion connection for the link with the previous controller or module
- 4 A common distribution electronic module
- 5 A channel and module diagnostics LED display block
- 6 A slot for labelling (label-holder)
- 7 A removable spring terminal block with locking lever and slots for coloured identifiers

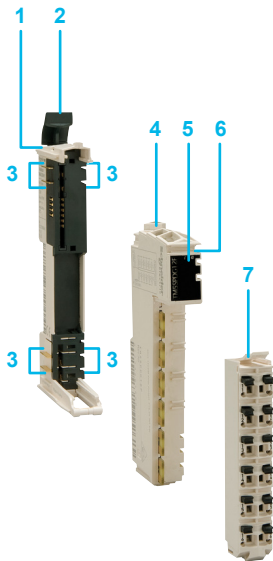

Expansion modules

Modicon TM5 common distribution modules
for Modicon M258 logic controller and Modicon LMC058
motion controller



TM5SPDG●●●



TM5ACBM●●



TM5ACTB●●

References

Common distribution electronic modules (1)

Power supply type	Characteristics	Reference	Weight kg/ lb
24 V $\overline{\text{---}}$	12 common x 0 Vdc with 1 fuse	TM5SPDG12F	0.025/ 0.055
	12 common x 24 Vdc with 1 fuse	TM5SPDD12F	0.025/ 0.055
	5 common x 0 Vdc 5 common x 24 Vdc with 1 fuse	TM5SPDG5D4F	0.025/ 0.055
	6 common x 0 Vdc 6 common x 24 Vdc with 1 fuse	TM5SPDG6D6F	0.025/ 0.055

Dummy electronic module

Characteristics	Used for	Reference	Weight kg/ lb
Non-functioning	Reservation of slots and logical address	TM5SD000	0.015/ 0.033

Bus bases

Power supply	Characteristics	Sold in lots of	Unit reference	Weight kg/ lb
24 V $\overline{\text{---}}$	—	1	TM5ACBM11	0.020/ 0.044
		10	TM5ACBM1110	0.200/ 0.440
	Address setting	1	TM5ACBM15	0.020/ 0.044
		10	TM5ACBM1510	0.200/ 0.440

Terminal blocks

Use	Description	Sold in lots of	Unit reference	Weight kg/ lb
For common distribution electronic module, 24 V $\overline{\text{---}}$ power supply	6 contacts	1	TM5ACTB06	0.016/ 0.035
		10	TM5ACTB0610	0.160/ 0.350
	12 contacts	1	TM5ACTB12	0.020/ 0.044
		10	TM5ACTB1210	0.200/ 0.440

Accessories

See page 3/62

(1) Equipped with 5 x 20 internal fuse, slow-blow 6.3 A

Expansion modules
Modicon TM5 Analog modules
and Modicon TM5 Digital/Analog module
for Modicon M258 logic controller and Modicon LMC058
motion controller

Applications	Type of expansion module
	Compatibility

Channel connection

Analog inputs	Number	
	Type	
	Range	
	Resolution	
	Sampling period	without filtering with filtering

Analog outputs	Number
	Type
	Range
	Resolution
	Response time

Digital inputs	Number
	Nominal input voltage
	IEC/EN 61131-2 conformity
	Type of signal (1)
	Type of wiring
	Limit values
	Nominal input current
	Input impedance
	State 0
	State 1

Digital outputs	Number
	Nominal output voltage
	Output current per channel
	Output current per group of channels
	Type of signal (1)
	Type of wiring
	Limit values
	Short-circuit and overload protection

Power supply

Isolation	Channel-to-channel
	Between channel groups
	Channel-to-bus

Type of electronic module

Associated bus base (2)

Associated terminal block (2)

Page

(1) Source output: PNP output, sink output: NPN output.
(2) to be ordered separately.

1 to 6 analog input channels	1 analog input channel and 4 digital input channels 1 analog input channel and 2 digital output channels	2 to 4 analog output channels
Modicon M258 logic controller, Modicon LMC058 motion controller		



With removable spring terminal blocks (to be ordered separately)

2	2	4	4	2	4
Voltage/current				Pt100/Pt1000 temperature probe	
- 10...+ 10 Vdc 0...20 mA/ 4...20 mA	- 10...+ 10 Vdc 0...20 mA	- 10...+ 10 Vdc 0...20 mA/ 4...20 mA	- 10...+ 10 Vdc 0...20 mA	- 200...+ 850°C	
12 bits + sign	15 bits + sign	12 bits + sign	15 bits + sign	16 bits	
300 µs	—	400 µs	—	—	
1 ms	50 µs	1 ms	50 µs	—	



With removable spring terminal blocks (to be ordered separately)

2	6	1	1
J, K, S, N thermocouple		Full bridge Strain Gauge	
		Voltage/current	
Type J: - 210...+ 1200°C Type K: - 270...+ 1372°C Type S: - 50...+ 1768°C Type N: - 270...+ 1300°C		Differential: 85...5000 Ω	
		- 10...+ 10 Vdc 0...20 mA/4...20 mA	
16 bits		24 bits	
—		—	
—		—	
		12 bits + sign	
		400 ms	
		1 ms max.	

1	2	2	4	4
Voltage/current		Voltage/current		
- 10...+ 10 Vdc 0...20 mA		- 10...+ 10 Vdc 0...20 mA		
12 bits		12 bits + sign	15 bits + sign	12 bits + sign
1 ms maxi		1 ms max.		

4
24 V ---
Type 1
Sink
1-wire
--- 20.4... 28.8 V
3.3 mA
7.2 kΩ
--- 5 V max.
--- 15 V min.

2
24 V ---
0.5 A
1 A max.
Source
1-wire
--- 20.4...28.8 V
Yes

Internal	Internal	Internal	Internal
Non-isolated	Non-isolated	Non-isolated	Non-isolated
—	—	—	—
~ 500 V RMS	~ 500 V RMS	~ 500 V RMS	~ 500 V RMS

TM5SAI2TH	TM5SAI6TH	TM5SEAI2SG	TM5SMM6D2L	TM5SAO2L	TM5SAO2H	TM5SAO4L	TM5SAO4H
-----------	-----------	------------	------------	----------	----------	----------	----------

TM5ACBM11, TM5ACBM15

TM5ACTB06, TM5ACTB12	TM5ACTB12	TM5ACTB06, TM5ACTB12	TM5ACTB12
----------------------	-----------	----------------------	-----------

3/53	3/45	3/53
------	------	------

Presentation

TM5SAI●● and **TM5SEIAISG** analog modules are used to acquire various analog values encountered in industrial applications.

TM5SAO●●● Analog output modules are used to control preactuators in physical units, such as variable speed drives or valves and applications where process control is required. The output current or voltage is proportional to the numerical value defined by the user program.

On a controller "stop", the outputs can be configured with fallback (set to the bottom scale value or held at their value). This function, with holding the value, is used when debugging the application or on a fault so as not to disturb the controlled process.

Each analog module consists of three parts to be ordered separately (1):

- An I/O electronic module
- A bus base
- A terminal block

These modules can be mechanically assembled before mounting on a symmetrical rail.

These modules offer the following advantages:

- Removable terminal
- Spring terminals which can be used for quick, tool-free connection of the sensors and preactuators in addition, the quality of the spring terminals avoids the need for periodic retightening
- Hot swapping

The offer of 13 analog modules:

- Four electronic modules with 2 or 4 voltage/current inputs
- Two electronic modules with 2 or 4 Pt100/Pt1000 temperature probes
- Two electronic modules with 2 or 6 J, K, S and N thermocouple inputs
- One electronic module with 1 Full-bridge strain gauge input
- Four electronic modules with 2 or 4 voltage/current outputs

Depending on the application requirements, these electronic modules are available in 12, 16 or 24 bit-resolution.


It is advisable to use the **TM2XMTGB** earthing plate which simplifies connection of the analog sensor and actuator cable shielding. This shielding must be connected to the device's functional earth.

Description

Analog modules comprise:

- 1 A bus base
- 2 A mechanical locking lever for mounting/dismounting on a symmetrical rail
- 3 On each side of the base, a bus expansion connection for the link with the previous controller or module
- 4 An analog input or output electronic module
- 5 A channel and module diagnostics LED display block
- 6 A slot for labelling (label-holder)
- 7 A removable spring terminal block with locking lever and slots for coloured identifiers

(1) Also sold in kits, see page 3/63

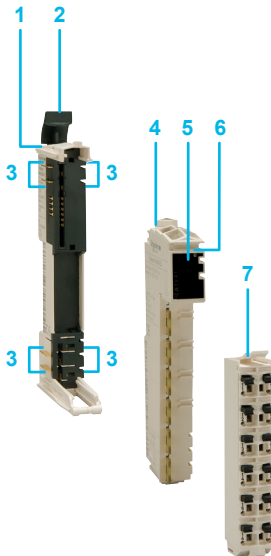

Expansion modules

Modicon TM5 Analog modules

for Modicon M258 logic controller and Modicon LMC058 motion controller



TM5SAI●●



TM5SAO●●



TM5ACBM●●



TM5ACTB●●



TM2XMTGB



TM200RSRCMC

References

Analog input electronic modules

Number and type of inputs	Input range	Resolution	Reference	Weight kg/ lb
2 voltage/current inputs	- 10...+ 10 V DC, 0...20 mA/4...20 mA	12 bits + sign	TM5SAI2L	0.025/ 0.055
	- 10...+ 10 V DC, 0...20 mA	15 bits + sign	TM5SAI2H	
4 voltage/current inputs	- 10...+ 10 Vdc, 0...20 mA/ 4...20 mA	12 bits + sign	TM5SAI4L	
	- 10...+ 10 V DC, 0...20 mA	15 bits + sign	TM5SAI4H	
2 Pt100/Pt1000 temperature probe inputs	- 200...+ 850°C	16 bits	TM5SAI2PH	
4 Pt100/Pt1000 temperature probe inputs		16 bits	TM5SAI4PH	
2 J, K, S, N thermocouple inputs	Type J: - 210...+ 1200°C	16 bits	TM5SAI2TH	
6 J, K, S, N thermocouple inputs	Type K: - 270...+ 1372°C	16 bits	TM5SAI6TH	
	Type S: - 50...+ 1768°C			
	Type N: - 270...+ 1300°C			
1 Full bridge strain gauge input	Differential: 85...5000 Ω	24 bits	TM5SEAISG	

Analog output electronic modules

Nber and type of O	Output range	Resolution	Reference	Weight kg/ lb
2 voltage/current outputs	- 10...+ 10 V DC, 0...20 mA	12 bits + sign	TM5SAO2L	0.025/ 0.055
		15 bits + sign	TM5SAO2H	
4 voltage/current outputs	- 10...+ 10 V DC, 0...20 mA	12 bits + sign	TM5SAO4L	
		15 bits + sign	TM5SAO4H	

Bus bases

Power supply	Characteristics	Sold in lots of	Unit reference	Weight kg/ lb
24 V $\square$	—	1	TM5ACBM11	0.020/ 0.044
		10	TM5ACBM1110	0.200/ 0.440
	Address setting	1	TM5ACBM15	0.020/ 0.044
		10	TM5ACBM1510	0.200/ 0.440

Terminal blocks

Use	Type	Sold in lots of	Unit reference	Weight kg/ lb
For analog I/O electronic module, 24 V $\square$ power supply	6 contacts	1	TM5ACTB06	0.016/ 0.035
		10	TM5ACTB0610	0.160/ 0.350
	12 contacts	1	TM5ACTB12	0.020/ 0.044
		10	TM5ACTB1210	0.200/ 0.440

Accessories

See page 3/62

Separate parts

Designation	Description	Unit reference	Weight kg/ lb
Earthing plate	Support equipped with 10 male Faston connectors for connecting the cable shielding (via 6.35 mm connectors, not supplied) and the functional earths (FE)	TM2XMTGB	0.045/ 0.099
Shielding connection clamps Sold in lots of 25	Attachment and earthing of the cable shielding. Pack of 25 clamps including 20 for Ø 4.8 mm cable and 5 for Ø 7.9 mm cable	TM200RSRCMC	—
Mounting kit (Sold in lots of 5)	For mounting the analog modules on a plate or panel	TWDXMT5	0.065/ 0.143

Analog I/O expansion module kits

See page 3/63

Expansion modules
Modicon TM5 Expert modules
for Modicon M258 logic controller
and Modicon LMC058 motion controller

Applications	Upcounting, downcounting, period measurement, frequency meter, frequency generator, axis following with encoder
Compatibility	Modicon M258 logic controller, Modicon LMC058 motion controller



Channel connection	With removable spring terminal blocks (to be ordered separately)	
Number of counter channels	2	1
IEC/EN 61131-2 conformity	Type 1	Incremental
Type of signal (1)	Sink	Sink
Type of input	1-, 2- or 3-wire	–
Nominal input voltage	24 V ---	24 V --- asymmetrical
Voltage limit values	20.4... 28.8 V ---	–
Frequency per channel	50 kHz	100 kHz
Resolution	–	16/32 bits
Functions	Event counting Interval measurement	2 x 24 V --- auxiliary inputs 24 V --- encoder power supply
Types of counter module	TM5SDI2DF	TM5SE1IC01024
Compatible bus base (2)	TM5ACBM11, TM5ACBM15	
Compatible terminal block (2)	TM5ACTB12	
Page	3/57	

(1) Source output: PNP output, sink output: NPN output.
(2) To be ordered separately.

Upcounting, downcounting, period measurement, frequency meter, frequency generator, axis following with encoder
Modicon M258 logic controller, Modicon LMC058 motion controller



With removable spring terminal blocks (to be ordered separately)		
2	1	1
Incremental	Incremental	SSI absolute
Sink	RS422, Sink	Sink
–	–	–
24 V --- asymmetrical	5 V --- symmetrical	5 V --- symmetrical
–	20.4... 28.8 V ---	20.4... 28.8 V ---
100 kHz	250 kHz	1 MHz
16/32 bits	16/32 bits	32 bits
2 x 24 V --- auxiliary inputs 24 V --- encoder power supply	2 x 24 V --- auxiliary inputs	2 x 24 V --- auxiliary inputs
TM5SE2IC01024	TM5SE1IC02505	TM5SE1SC10005
TM5ACBM11, TM5ACBM15		
TM5ACTB12		
3/57		



Expansion modules

Modicon TM5 Expert modules

for Modicon M258 logic controller and Modicon LMC058 motion controller

Presentation

TM5SDI12DF and **TM5SE●●●●●●●●** Expert modules for Modicon M258 logic controller and LMC058 motion controllers are used to count the pulses generated by a sensor or to process the signals from an incremental encoder, depending on the reference chosen.

The extent of the high-speed counter module offer makes it possible to adapt the configuration to the machine's precise requirements: the five counter modules differ in their frequency and their functions.

Expert electronic modules	No. of channels	Max. frequency	Integrated functions	Signal
TM5SDI12DF	2	50 kHz	Event counting, interval measurement	Sink
TM5SE1IC01024	1	100 kHz	2 x 24 V $\overline{\text{---}}$ auxiliary inputs 24 V $\overline{\text{---}}$ encoder power supply	Sink
TM5SE2IC01024	2	100 kHz	2 x 24 V $\overline{\text{---}}$ auxiliary inputs 24 V $\overline{\text{---}}$ encoder power supply	Sink
TM5SE1IC02505	1	250 kHz	2 x 24 V $\overline{\text{---}}$ auxiliary inputs $\overline{\text{---}}$ 5 V encoder power supply	Sink
TM5SE1SC10005	1	1 MHz	2 x 24 V $\overline{\text{---}}$ auxiliary inputs $\overline{\text{---}}$ 5 V SSI encoder power supply	Sink

The function parameters are set by configuration using SoMachine software.

Each Expert module consists of three parts to be ordered separately:

- ☐ An electronic counter module
- ☐ A bus base
- ☐ A terminal block

These modules can be mechanically assembled before mounting on a symmetrical rail.


These modules offer the following advantages:

- ☐ Removable terminal
- ☐ Spring terminals which can be used for quick, tool-free connection of the sensors and preactuators in addition, the quality of the spring terminals avoids the need for periodic retightening
- ☐ Hot swapping

Description

TM5 Expert modules comprise:

- 1 A bus base
- 2 A mechanical locking lever for mounting/dismounting on a symmetrical rail
- 3 On each side of the base, a bus expansion connection for the link with the previous controller or module
- 4 An electronic counter module
- 5 A channel and module diagnostics LED display block
- 6 A slot for labelling (label-holder)
- 7 A removable spring terminal block with locking lever and slots for coloured identifiers

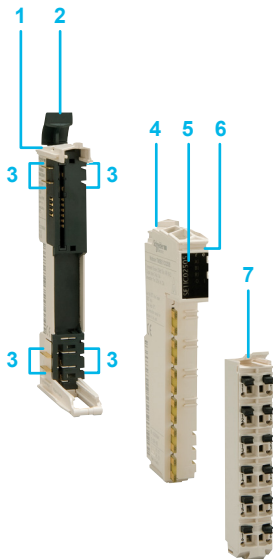

Expansion modules

Modicon TM5 Expert modules

for Modicon M258 logic controller and Modicon LMC058 motion controller



TM5SDI2DF



TM5SE●●●●●●●●



TM5ACBM●●



TM5ACTB●●

References

Expert electronic modules

Counting frequency	Number of channels	Function	Reference	Weight kg/ lb
50 kHz	2	Event counting, interval measurement	TM5SDI2DF	0.025/ 0.055
100 kHz	1	2 x 24 V --- auxiliary inputs 24 V --- encoder power supply	TM5SE1IC01024	0.025/ 0.055
	2	2 x 24 V --- auxiliary inputs 24 V --- encoder power supply	TM5SE2IC01024	0.025/ 0.055
250 kHz	1	2 x 24 V --- auxiliary inputs	TM5SE1IC02505	0.025/ 0.055
1 MHz	1	2 x 24 V --- auxiliary inputs	TM5SE1SC10005	0.025/ 0.055

Bus bases

Power supply	Characteristics	Sold in lots of	Unit reference	Weight kg/ lb
24 V ---	—	1	TM5ACBM11	0.020/ 0.044
		10	TM5ACBM1110	0.200/ 0.440
	Address setting	1	TM5ACBM15	0.020/ 0.044
		10	TM5ACBM1510	0.200/ 0.440

Terminal blocks

Use	Description	Sold in lots of	Unit reference	Weight kg/ lb
For electronic counter module powered with 24 V ---	12 contacts	1	TM5ACTB12	0.020/ 0.044
		10	TM5ACTB1210	0.200/ 0.440

Accessories

See page 3/62

Expansion modules

Modicon TM5 power distribution modules
for Modicon M258 logic controller and Modicon LMC058
motion controller

Presentation

TM5SP●● power distribution modules are intended to supply power to the I/O modules and/or the TM5 bus.

Each power distribution module consists of three parts to be ordered separately:


- ☐ A power distribution electronic module
- ☐ A bus base
- ☐ A terminal block

These modules can be mechanically assembled before mounting on a symmetrical rail.

These modules offer the following advantages:

- ☐ Removable terminal
- ☐ Spring terminals which can be used for quick, tool-free connection of the sensors and preactuators in addition, the quality of the spring terminals avoids the need for periodic retightening.

Four power distribution modules are available.

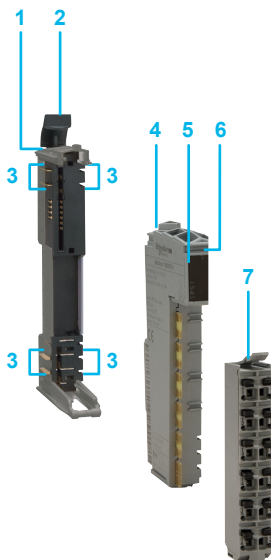

Description

Power distribution modules comprise:

- 1 A bus base
- 2 A mechanical locking lever for mounting/dismounting on a symmetrical rail
- 3 On each side of the base, a bus expansion connection for the link with the previous controller or module
- 4 A power distribution electronic module
- 5 A channel and module diagnostics LED display block
- 6 A slot for labelling (label-holder)
- 7 A removable spring terminal block with locking lever and slots for coloured identifiers

Expansion modules

Modicon TM5 power distribution modules
for Modicon M258 logic controller and Modicon LMC058
motion controller



TM5SP●●



TM5ACBM●●



TM5ACTB●●

References

Power distribution electronic modules

Input power supply	Used for	Fuse	Reference	Weight kg/ lb
24 V $\overline{\text{---}}$	Supplying power to the I/O modules in 24 V $\overline{\text{---}}$ Total I max: 10 A	–	TM5SPS1	0.030/ 0.066
		6.3 A internal fuse	TM5SPS1F	0.030/ 0.066
	Supplying power □ to the I/O modules in 24 V $\overline{\text{---}}$ □ and the TM5 bus (Bus power supply: 7 W)	–	TM5SPS2	0.030/ 0.066
		6.3 A internal fuse	TM5SPS2F	0.030/ 0.066

Bus bases

Power supply	Characteristics	Sold in lots of	Unit reference	Weight kg/ lb
24 V $\overline{\text{---}}$	Isolated on the left on the power supply to the I/O modules in 24 V $\overline{\text{---}}$	1	TM5ACBM01R	0.020/ 0.044
		10	TM5ACBM01R10	0.200/ 0.440
	Isolated on the left on the power supply to the I/O modules in 24 V $\overline{\text{---}}$ Address setting	1	TM5ACBM05R	0.020/ 0.044
		10	TM5ACBM05R10	0.200/ 0.440

Terminal block

Use	Characteristics	Reference	Weight kg/ lb
For power distribution electronic module 24 V $\overline{\text{---}}$	12 contacts	TM5ACTB12PS	0.020/ 0.044


Accessories

See page 3/62

Expansion modules

Modicon TM5 Transmitter and Receiver modules

for Modicon M258 logic controller and Modicon LMC058 motion controller

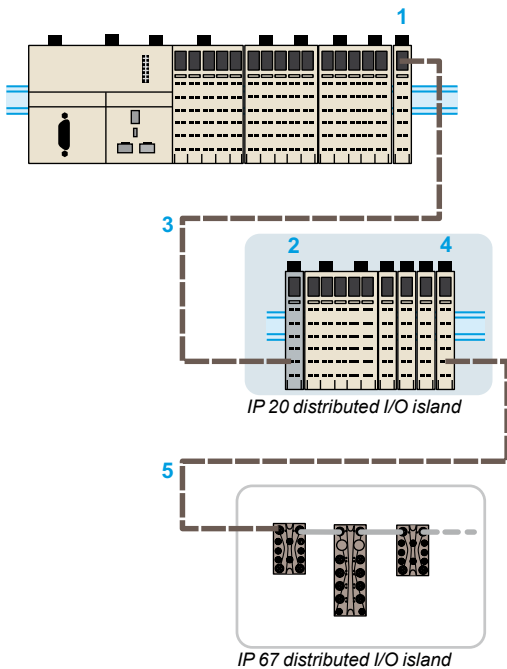

Presentation

M258 logic controllers and LMC058 motion controllers offer the possibility of creating IP 20 islands of distributed I/O via the TM5 expansion bus.

This makes it possible to:

- Adapt the architecture as closely as possible to the machine topology
- Reduce the wiring costs by minimizing the distance between the modules and the sensors/preactuators
- Take full advantage of the TM5 expansion bus exchange performance
- Save the cost of a fieldbus connection

In addition, irrespective of the expansion module local or remote slot, the modules remain synchronized due to use of the same expansion bus. Modicon TM5 Remote modules are needed to:

- Increase the number of remote I/O on a M258 logic controller and an LMC058 motion controller beyond 100 m
- Exchange incoming and outgoing data produced by the I/O expansion modules
- Guarantee the performance of data exchanges

Three remote modules are available:

- The **TM5SBET1** electronic module: transmitter (1), for data transmission between IP 20 islands
- The **TM5SBET7** electronic module: transmitter (4), for data transmission from an IP 20 island to an IP 67 island (1) via a TM7 expansion bus (5)
- **TM5SBER2** electronic modules: receiver (2)

The transmitter (1) and receiver (2) modules are physically linked by the remote connection cable (3) **TCSXCNNXNX100**.

The maximum distance between islands is 100 m and it is possible to connect up to 25 remote islands.

Each remote module consists of three parts to be ordered separately:

- An electronic module, either transmitter or receiver
- A bus base
- A connection block

These modules can be mechanically assembled before mounting on a symmetrical rail.

These modules offer the following advantages:


- Removable connector
- Spring terminals which can be used for quick, tool-free connection of the sensors and preactuators. In addition, the quality of the spring terminals avoids the need for periodic retightening

Description

Transmitter and receiver modules comprise:

- 1 A bus base
- 2 A mechanical locking lever for mounting/dismounting on a symmetrical rail
- 3 On each side of the base, a bus expansion connection for the link with the previous controller or module
- 4 A remote I/O electronic module, either transmitter or receiver
- 5 A channel and module diagnostics LED display block
- 6 A slot for labelling (label-holder)
- 7 A removable spring terminal block with locking lever and slots for coloured identifiers

(1) IP 67 islands. Composition: TM7 blocks and TM7 expansion bus. See page 3/64.

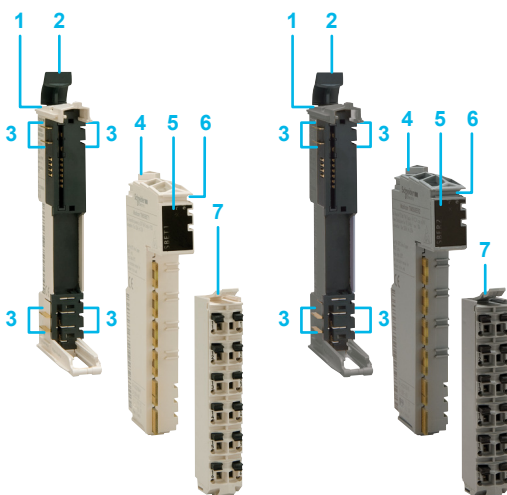

Transmitter module

Receiver module

Expansion modules

Modicon TM5 Transmitter and Receiver modules

for Modicon M258 logic controller and Modicon LMC058 motion controller



TM5SBET1



TM5SBET7



TM5SBER2



TM5ACBM1●



TM5ACBM0●R



TM5ACTB●●



TM5ACTB12PS

References

Remote I/O electronic modules

Description	Characteristics	Reference	Weight kg/ lb
Transmitter module	Electronic module for data transmission between IP 20 I/O islands (1)	TM5SBET1	0.025/ 0.055
	Electronic module for data transmission between IP 20 I/O island and IP 67 I/O island (2)	TM5SBET7	
	Includes the power supply for the TM7 expansion modules (2)		
Receiver module	Data reception electronic module Power distribution module for electronic modules and the TM5 bus, 24 V $\pm$ power supply	TM5SBER2	

Expansion bus

Description	Usage	Length m/ft	Reference	Weight kg/ lb
Remote connection cable	Bus extension by linking transmitter and receiver modules	100/ 328.08	TCSXCNNXNX100	8.800/ 19.401

Bus bases

Power supply	For use with	Sold in lots of	Unit reference	Weight kg/ lb
—	TM5SBET1 and TM5SBET7 transmitter modules	1	TM5ACBM11	0.020/ 0.044
		10	TM5ACBM1110	0.200/ 0.440
	TM5SBET1 and TM5SBET7 transmitter modules with address setting	1	TM5ACBM15	0.020/ 0.044
		10	TM5ACBM1510	0.200/ 0.440
24 V $\pm$	TM5SBER2 receiver module	1	TM5ACBM01R	0.020/ 0.044
		10	TM5ACBM01R10	0.200/ 0.440
	TM5SBER2 receiver module, with address setting	1	TM5ACBM05R	0.020/ 0.044
		10	TM5ACBM05R10	0.200/ 0.440

Terminal blocks

For use with	Characteristics	Sold in lots of	Unit reference	Weight kg/ lb
Transmitter module TM5SBET1	6 contacts	1	TM5ACTB06	0.016/ 0.035
		10	TM5ACTB0610	0.160/ 0.350
Transmitter modules TM5SBET1 and TM5SBET7	12 contacts	1	TM5ACTB12	0.020/ 0.044
		10	TM5ACTB1210	0.200/ 0.440
Receiver module TM5SBER2	12 contacts	1	TM5ACTB12PS	0.020/ 0.044

Accessories

See page 3/62

(1) IP 20 I/O islands, see page 4/24.

(2) IP 67 I/O islands, see page 4/28.

3



TM5ACTCH100




TM5ACTLC100



TM5ACLPL10



TM5ACLPR10



TM5ACLITW1




TM5ACLT1



TM5ACADL100


References						
Accessories						
Description	Used for	Colour	Sold in lots of	Unit reference	Weight kg/lb	
Plain text cover holder (label-holder)	Marking the terminal blocks on the I/O channels	Transparent	100	TM5ACTCH100	0.002/	0.004
Plain text cover holder locking clip (Order with plain text cover holder TM5ACTCH100)	Locking plain text cover holder	Transparent	100	TM5ACTLC100	0.001/	0.002
Precut legend strips of paper	Plain text cover holder TM5ACTCH100	White	100	TM5ACTLS100	0.001/	0.002
Coloured plastic identifiers	Labelling 16 connection channel terminals	White	1	TM5ACLITW1	0.015/	0.033
		Red	1	TM5ACLITR1	0.015/	0.033
		Blue	1	TM5ACLITB1	0.015/	0.033
Metal tool	Inserting/removing TM5ACLT1 identifiers	Black	1	TM5ACLT1	0.030/	0.066
Retaining plates for bus bases	Held on the left side	White	10	TM5ACLPL10	0.004/	0.009
	Held on the right side	White	10	TM5ACLPR10	0.004/	0.009
Locking clips	For modules	Black	100	TM5ACADL100	0.001/	0.002

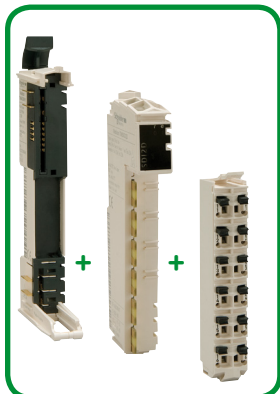

TM5SDI12DK



TM5SDO4RK

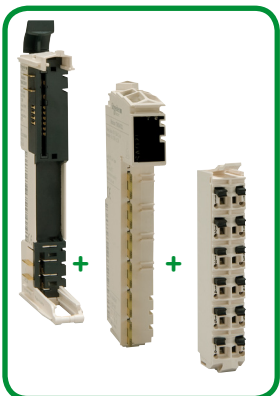

TM5SAI4K

References

Digital I/O expansion module kits

24 V $\overline{\text{---}}$ power supply

Designation	Composition	Reference	Weight kg/ lb
Kit including: a digital input or output electronic module, a bus base, a terminal block	TM5SDI12D + TM5ACBM11 + TM5ACTB12	TM5SDI12DK	0.065/ 0.143
	TM5SDO12T + TM5ACBM11 + TM5ACTB12	TM5SDO12TK	

Digital I/O expansion module kit

100/240 V $\sim$ power supply

Designation	Composition	Reference	Weight kg/ lb
Kit including: a digital output electronic module, a bus base, a terminal block	TM5SDO4R + TM5ACBM12 + TM5ACTB32	TM5SDO4RK	0.070/ 0.154

Analog I/O expansion module kits

Designation	Composition	Reference	Weight kg/ lb
Kits including: an analog input or output electronic module, a bus base, a terminal block	TM5SAI4L + TM5ACBM11 + TM5ACTB12	TM5SAI4LK	0.075/ 0.165
	TM5SAI4H + TM5ACBM11 + TM5ACTB12	TM5SAI4HK	
	TM5SAO4L + TM5ACBM11 + TM5ACTB12	TM5SAO4LK	

Expansion modules

Modicon TM7 blocks

for Modicon M258 logic controller and Modicon LMC058 motion controller


Presentation

To enhance its "Flexible machine Control" concept, Schneider Electric offers Modicon TM7 IP 67 blocks for mounting outside electrical cabinets, directly on the installation.

The IP 67 protection of these blocks enables them to be used within processes or machines in harsh environments (splashing water, oil, dust, etc.).

They have the following characteristics:

- Dust and damp proof
- Robust and compact
- Rapid wiring, economical to use

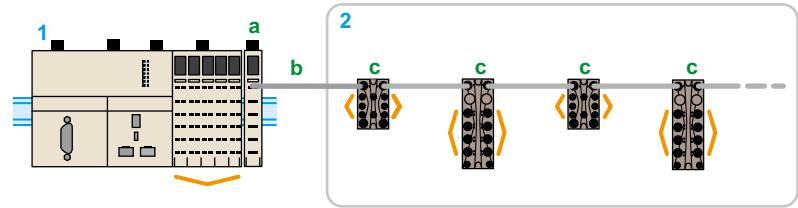

IP 67 distributed I/O island

Inputs/outputs

- 1 Modicon M258 logic controller, Modicon LMC058 motion controller: CANopen bus masters + transmitter module TM5SBET7 (a) (1).
- 2 IP 67 distributed I/O islands. Composition: TM7 expansion bus cable (b) + TM7 digital/analog I/O expansion blocks (c).

Modicon TM7 block offer

Modicon TM7 IP 67 blocks are available in various compositions and for different functions.

Digital blocks

The offer comprises:

- Three input blocks
- Three configurable I/O blocks
- One output block

Analog blocks

The offer comprises:

- Two expansion blocks with 4 inputs for connecting 4 sensors
- Two expansion blocks with 4 outputs for connecting 4 actuators
- Two mixed expansion blocks with 2 inputs and 2 outputs
- Two expansion blocks with 4 resistive temperature probe or thermocouple temperature measurement channels

Power distribution block

A power distribution block is available as an option to supply I/O expansion blocks on the TM7 expansion bus.

This power distribution block is necessary to avoid voltage drops in the following situations:

- With a TM7 NCOM08B CANopen interface block followed by 4 (2) TM7 I/O expansion blocks
- With a TM5SBET7 transmitter module (1) followed by 6 (2) TM7 I/O expansion blocks (mounted vertically)
- With a TM7 NCOM16A/16B CANopen interface block followed by 18 (2) TM7 I/O expansion blocks

Note: These limits must be weighted according to the cable lengths.

Consult the SPIG (System Planning and Installation Guide) for the Modicon TM7 IP 67 block offer on www.schneider-electric.com

Connection accessories

A range of cables and connectors is available for connecting the:

- CAN bus
- TM7 expansion bus
- I/O
- 24 V $\bar{\bar{v}}$ power supplies on TM7 expansion blocks

CANopen interface blocks with digital I/O (see page 4/32)

The interface I/O block offer comprises IP 67 blocks that connect to a CANopen bus and have digital channels that can be configured as inputs or outputs, including:

- A CANopen interface block with 8 configurable I/O for connection via M8 connector
- Two CANopen interface blocks with 16 configurable I/O

(1) TM5 transmitter (see page 3/61).

(2) Minimum number.



Digital I/O expansion block



Analog I/O expansion block




Power distribution block

Expansion modules

Modicon TM7 blocks

for Modicon M258 logic controller and Modicon LMC058 motion controller

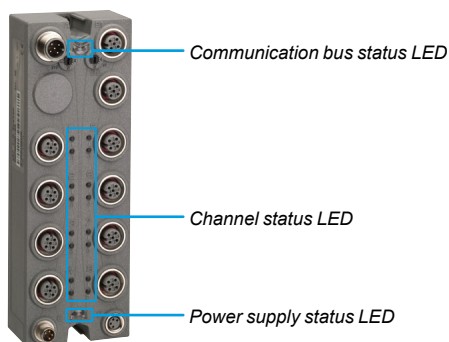

Diagnostics functions

The diagnostic monitoring of faults is indicated by LEDs on CANopen interface I/O blocks, expansion blocks and power distribution blocks and informs the control system (M258 logic controller, or M340 or Premium automation platforms) via the TM7 bus.

Each Modicon TM7 block has LEDs

- To display the status of the TM7 bus, the channel and the power supply
- For quick, precise location of a fault

There are several levels of diagnostics:

- Diagnostics per channel:
 - State of inputs
 - State of outputs
- Diagnostics per expansion block:
 - Sensor/actuator power supply present
 - Undervoltage fault on the I/O power supply
 - Analog input diagnostics
 - Short-circuit or overload on one or more digital outputs
- Communication bus diagnostics:
 - On CAN bus (CANopen interface I/O block)
 - On TM7 expansion bus (CANopen interface I/O block and I/O expansion blocks)
- Diagnostics of the power supply via the TM7 bus (expansion block only)

3

Specifications

Conformity with standards	IEC 61131-2
Product certifications	C€, cURus, GOST-R and c-Tick, ATEX (II 3g EEx nA II T5, IP 67, Ta = 0...60°C)
Temperature	Operation
	Storage
Relative humidity	5...95% (without condensation)
Degree of pollution conforming to IEC 60664	2
Degree of protection conforming to IEC 61131-2	IP 67
Altitude	Operation
	Storage
Vibration resistance DIN rail mounted conforming to IEC 60721-3-5 Class 5M3	7.5 mm (0.295 in.) 2...8 Hz fixed amplitude
	20 m/s ² (2 gn) 8...200 Hz fixed acceleration
	40 m/s ² (4 gn) 200...500 Hz fixed acceleration
	300 m/s ² (30 gn) for 11 ms, 1/2 sine wave, type 1 shock
Connectors	Type
	Number of operations

Electromagnetic compatibility

Electrostatic discharges conforming to IEC/EN 61000-4-2	± 8 kV, criterion B (air discharge) ± 4 kV, criterion B (direct discharge)
Electromagnetic fields conforming to IEC/EN 61000-4-3	10 V/m, amplitude modulation 80% at 1 kHz (80 MHz...2 GHz) 1 V/m (2...2.7 GHz)
Fast transients conforming to IEC/EN 61000-4-4	Supply: 2 kV, criterion B I/O: 1 kV, criterion B Shielded cable: 1 kV, criterion B Repetition frequency: 5 and 100 kHz
Immunity to overvoltages, 24 V $\square$ circuit conforming to IEC/EN 61000-4-5	Supply: □ 1 kV (12 Ω), criterion B in common mode □ 0.5 kV (2 Ω), criterion B in differential mode Unshielded links: □ 1 kV (42 Ω), criterion B in common mode □ 0.5 kV (42 Ω), criterion B in differential mode Shielded links: □ 1 kV (12 Ω), criterion B in common mode □ 0.5 kV (2 Ω), criterion B in differential mode
Induced magnetic fields conforming to IEC/EN 61000-4-6	Line supply, I/O signal connections > 10 m (32.8 ft.) Functional earth connection: 10 Vrms, criterion A, amplitude modulation 80% at 1 kHz (150...80 MHz)
Conducted emissions conforming to EN 55011 (IEC/CISPR11)	150...500 kHz, peak 79 dB μ V 500 kHz...30 MHz, peak 73 dB μ V
Radiated emissions conforming to EN 55011 (IEC/CISPR11)	30...230 MHz, 10 m (32.8 ft) at 40 dB (μ V/m) 230 MHz...1 GHz, 10 m (32.8 ft) at 47 dB (μ V/m)

(1) Temperature reduction of 0.5°C (32.9°F) for every additional 100 m (328 ft.) altitude above 2000 m (6560 ft.).

Refer to the instruction sheet for each product, downloadable from www.schneider-electric.com


Expansion modules
Modicon TM7 blocks
Digital blocks for Modicon M258 logic controller and
Modicon LMC058 motion controller

Applications			Digital I/O expansion blocks						
									
Degree of protection			IP 67	IP 67	IP 67	IP 67	IP 67	IP 67	IP 67
Type of housing			Plastic	Plastic	Plastic	Plastic	Plastic	Plastic	Plastic
Modularity (number of channels)	Max. number of digital channels		8	16	16	8	8	16	16
	Digital inputs		8	16	16	–	0...8 software-configurable	0...16 software-configurable	0...16 software-configurable
	Digital outputs		–	–	–	8	0...8 software-configurable	0...16 software-configurable	0...16 software-configurable
Digital inputs	Voltage/current		24 V $\overline{\text{---}}$ /7 mA	24 V $\overline{\text{---}}$ /7 mA	24 V $\overline{\text{---}}$ /7 mA	–	24 V $\overline{\text{---}}$ /4.4 mA	24 V $\overline{\text{---}}$ /4.4 mA	24 V $\overline{\text{---}}$ /4.4 A max.
	Type		Sink (1)	Sink (1)	Sink (1)	–	Sink (1)	Sink (1)	Sink (1)
	IEC 61131-2 conformity		Type 1	Type 1	Type 1	–	Type 1	Type 1	Type 1
Digital outputs	Voltage		–	–	–	24 V $\overline{\text{---}}$	24 V $\overline{\text{---}}$	24 V $\overline{\text{---}}$	24 V $\overline{\text{---}}$
	Type		–	–	–	Transistor/Source (2)	Transistor/Source (2)	Transistor/Source (2)	Transistor/Source (2)
	Current per output		–	–	–	2 A max.	0.5 A max.	0.5 A max.	0.5 A max.
	Current per expansion block		–	–	–	8 A max.	4 A max.	8 A max.	8 A max.
Sensor/actuator power supply	Voltage		24 $\rightarrow$ $\overline{\text{---}}$	24 V $\overline{\text{---}}$	24 V $\overline{\text{---}}$	24 V $\overline{\text{---}}$	24 V $\overline{\text{---}}$	24 V $\overline{\text{---}}$	24 V $\overline{\text{---}}$
	Max. current		500 mA for all channels	500 mA for all channels	500 mA for all channels	500 mA for all channels	500 mA for all channels	500 mA for all channels	500 mA for all channels
	Protection against		Overloads, short-circuits and reverse polarity	Overloads, short-circuits and reverse polarity	Overloads, short-circuits and reverse polarity	Overloads, short-circuits and reverse polarity	Overloads, short-circuits and reverse polarity	Overloads, short-circuits and reverse polarity	Overloads, short-circuits and reverse polarity
Connection	TM7 expansion bus	Bus input connector	B-coded 4-way male M12	B-coded 4-way male M12	B-coded 4-way male M12	B-coded 4-way male M12	B-coded 4-way male M12	B-coded 4-way male M12	B-coded 4-way male M12
		Bus output connector	B-coded 4-way female M12	B-coded 4-way female M12	B-coded 4-way female M12	B-coded 4-way female M12	B-coded 4-way female M12	B-coded 4-way female M12	B-coded 4-way female M12
	Digital I/O channels	Sensor connector	3-way female M8, 1 channel per connector	3-way female M8, 1 channel per connector	A-coded 5-way female M12, 2 channels per connector	–	3-way female M8, 1 channel per connector	A-coded 5-way female M12, 2 channels per connector	3-way female M8, 1 channel per connector
		Actuator connector	–	–	–	3-way female M8, 1 channel per connector	3-way female M8, 1 channel per connector	5-way female M12, 2 channels per connector	3-way female M8, 1 channel per connector
	Expansion block power supply	Input connector	4-way male M8	4-way male M8	4-way male M8	4-way male M8	4-way male M8	4-way male M8	4-way male M8
		Output connector	4-way female M8	4-way female M8	4-way female M8	4-way female M8	4-way female M8	4-way female M8	4-way female M8
Diagnostics	By expansion block		Yes	Yes	Yes	Yes	Yes	Yes	Yes
	By channel		Yes	Yes	Yes	Yes	Yes	Yes	Yes
	By communication on TM7 bus		Yes	Yes	Yes	Yes	Yes	Yes	Yes
Type of expansion block			TM7BDI8B	TM7BDI16B	TM7BDI16A	TM7BDO8TAB	TM7BDM8B	TM7BDM16A	TM7BDM16B
Pages			3/69 (1) Sink inputs: positive logic (2) Source outputs: positive logic						

Expansion modules

Modicon TM7 blocks

Digital blocks for Modicon M258 logic controller and Modicon LMC058 motion controller

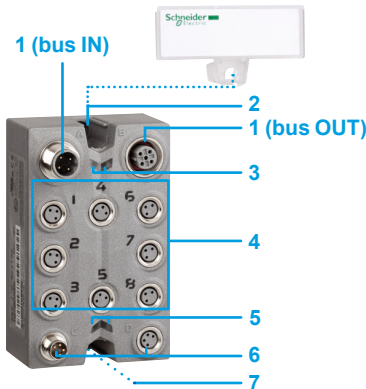


Description

Digital I/O expansion blocks

8-channel digital I/O expansion blocks have the following on the front panel:

- 1 A male M12 connector (bus IN) and a female M12 connector (bus OUT) for connecting the TM7 expansion bus
- 2 A slot for the expansion block label (1)
- 3 Two bus diagnostic LEDs
- 4 Eight female M8 connectors for connecting sensors and actuators with LEDs for indicating channel status
- 5 Two LEDs indicating the status of the sensor and actuator 24 V $\overline{\text{---}}$ power supplies
- 6 Two M8 connectors for connecting the 24 V $\overline{\text{---}}$ sensor and actuator power supplies: male for PWR IN, female for PWR OUT
- 7 Fixing using two $\varnothing$ 4 screws (not supplied) and connection of the functional earth when fixing the block on a metal support


3

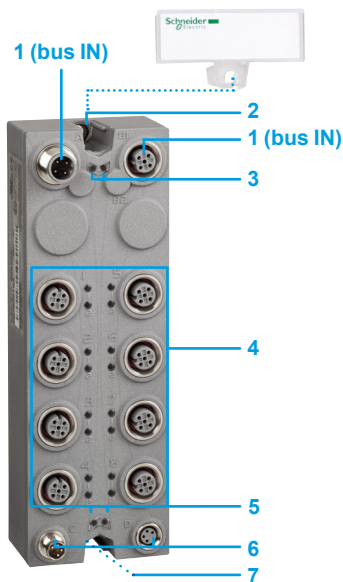

16-channel digital I/O expansion blocks have the following on the front panel:

- 1 A male M12 connector (bus IN) and a female M12 connector (bus OUT) for connecting the TM7 expansion bus
- 2 A slot for the expansion block label (1)
- 3 Two bus diagnostic LEDs
- 4 Eight M12 connectors (2 channels per connector) or sixteen M8 connectors for connecting sensors and actuators with LEDs for indicating channel status
- 5 Two LEDs indicating the status of the sensor and actuator 24 V $\overline{\text{---}}$ power supplies
- 6 Two M8 connectors for connecting the 24 V $\overline{\text{---}}$ sensor and actuator power supplies: male for PWR IN, female for PWR OUT
- 7 Fixing using two $\varnothing$ 4 screws (not supplied) and connection of the functional earth when fixing the block on a metal support

(1) Label-holder supplied with IP 67 block.

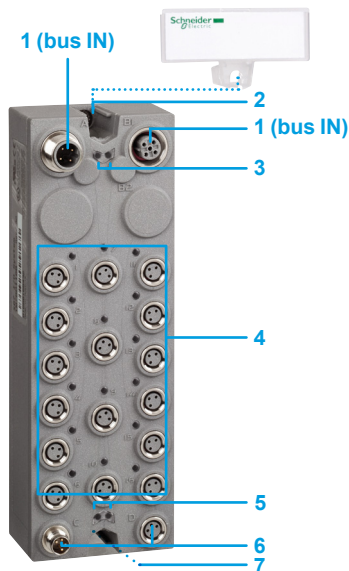

Expansion modules

Modicon TM7 blocks

Digital blocks for Modicon M258 logic controller and
Modicon LMC058 motion controller



TM7BDI8B,
TM7BDO8TAB,
TM7BDM8B



TM7BDM16B,
TM7BDI16B



TM7BDI16A,
TM7BDM16A

Digital I/O expansion blocks

Max. no. of channels	Number, type of inputs (1)	Number, type of outputs (2)	Sensor and actuator connection	Communication bus	Reference	Weight kg/lb
8 input	8, sink (3)	–	8 x female M8 connectors	TM7 bus	TM7BDI8B	0.180/ 0.397
16 input	16, sink (3)	–	16 x female M8 connectors	TM7 bus	TM7BDI16B	0.320/ 0.705
	16, sink (3)	–	8 x female M12 connectors	TM7 bus	TM7BDI16A	0.320/ 0.705
8 output	–	8, transistor/ source (4), 2 A max.	8 x female M8 connectors	TM7 bus	TM7BDO8TAB	0.185/ 0.408
8 configurable I/O	0...8, sink (3)	0...8, transistor/ source (4), 0.5 A max.	8 x female M8 connectors	TM7 bus	TM7BDM8B	0.190/ 0.419
16 configurable I/O	0...16, sink (3)	0...16, transistor/ source (4), 0.5 A max.	8 x female M12 connectors	TM7 bus	TM7BDM16A	0.320/ 0.705
			16 x female M8 connectors	TM7 bus	TM7BDM16B	0.320/ 0.705

(1) 24 V $\overline{---}$ IEC type 1

(2) 24 V $\overline{---}$

(3) Sink inputs: positive logic

(4) Source outputs: positive logic

Architecture, Connecting cables

See page 4/34

Connection accessories

See page 4/36

Separate parts

See page 4/37

Configuration software

■ SoMachine software, see page 5/2

■ Performance distributed I/O configuration software, please refer to our website www.schneider-electric.com


Expansion modules
Modicon TM7 blocks
Analog blocks for Modicon M258 logic controller and
Modicon LMC058 motion controller

Applications			Analog I/O expansion blocks																										
																													
Degree of protection			IP 67		IP 67		IP 67						IP 67		IP 67		IP 67		IP 67		IP 67		IP 67		IP 67				
Type of housing			Plastic		Plastic		Plastic						Plastic		Plastic		Plastic		Plastic		Plastic		Plastic		Plastic				
Modularity (number of channels)	Max. number of analog channels		4		4		4						4		4		4		4		4		4		4				
	Analog inputs		4		4		—						—		2		2		—		2		—		2				
	Temperature inputs		—		—		4						—		—		—		—		—		—		—				
	Analog outputs		—		—		—						4		2		2		—		—		—		—				
Inputs	Type		Voltage - 10...+ 10 V $\overline{\text{---}}$		Current 0...20 mA		Pt 100 temperature probe, Pt 1000 temperature probe, KTY 10 silicon temperature probe, KTY 84 silicon temperature probe, Resistance 0...3276 Ohm						J, K, S thermocouple Voltage 0...65536 μV		—		—		Voltage - 10...+ 10 V $\overline{\text{---}}$		Current 0...20 mA								
	Resolution		11 bits + sign		12 bits		16 bits						16 bits		—		—		11 bits + sign		12 bits								
Analog outputs	Type		—		—		—						—		Voltage - 10...+ 10 V $\overline{\text{---}}$		Current 0...20 mA		Voltage - 10...+ 10 V $\overline{\text{---}}$		Current 0...20 mA								
	Resolution		—		—		—						—		11 bits + sign		12 bits		11 bits + sign		12 bits								
	Current per expansion block		—		—		—						—		—		—		—		—								
Sensor/actuator power supply	Voltage		24 V $\overline{\text{---}}$		24 V $\overline{\text{---}}$		—						—		24 V $\overline{\text{---}}$		24 V $\overline{\text{---}}$		24 V $\overline{\text{---}}$		24 V $\overline{\text{---}}$		24 V $\overline{\text{---}}$		24 V $\overline{\text{---}}$				
	Max. current		500 mA for all channels		500 mA for all channels		—						—		500 mA for all channels		500 mA for all channels		500 mA for all channels		500 mA for all channels		500 mA for all channels		500 mA for all channels				
	Protection against		Overloads, short-circuits and reverse polarity		Overloads, short-circuits and reverse polarity		—						—		Overloads, short-circuits and reverse polarity		Overloads, short-circuits and reverse polarity		Overloads, short-circuits and reverse polarity		Overloads, short-circuits and reverse polarity		Overloads, short-circuits and reverse polarity		Overloads, short-circuits and reverse polarity				
Connection	TM7 expansion bus	Bus input connector	4-way male M12 B-coded		4-way male M12 B-coded		4-way male M12 B-coded						4-way male M12 B-coded		4-way male M12 B-coded		4-way male M12 B-coded		4-way male M12 B-coded		4-way male M12 B-coded		4-way male M12 B-coded		4-way male M12 B-coded				
		Bus output connector	4-way female M12 B-coded		4-way female M12 B-coded		4-way female M12 B-coded						4-way female M12 B-coded		4-way female M12 B-coded		4-way female M12 B-coded		4-way female M12 B-coded		4-way female M12 B-coded		4-way female M12 B-coded		4-way female M12 B-coded				
	Analog I/O channels	Sensor connector	5-way female M12 A-coded		5-way female M12 A-coded		5-way female M12 A-coded						5-way female M12 A-coded		5-way female M12 A-coded		5-way female M12 A-coded		5-way female M12 A-coded		5-way female M12 A-coded		5-way female M12 A-coded		5-way female M12 A-coded				
		Actuator connector	—		—		—						—		A-coded 5-way female M12		A-coded 5-way female M12		A-coded 5-way female M12		A-coded 5-way female M12		A-coded 5-way female M12		A-coded 5-way female M12				
	Expansion block power supply	Input connector	4-way male M8		4-way male M8		4-way male M8						4-way male M8		4-way male M8		4-way male M8		4-way male M8		4-way male M8		4-way male M8		4-way male M8				
		Output connector	4-way female M8		4-way female M8		4-way female M8						4-way female M8		4-way female M8		4-way female M8		4-way female M8		4-way female M8		4-way female M8		4-way female M8				
Diagnostics	By expansion block		Yes		Yes		Yes						Yes		Yes		Yes		Yes		Yes		Yes		Yes				
	By channel		Yes		Yes		Yes						Yes		Yes		Yes		Yes		Yes		Yes		Yes				
	By communication on TM7 bus		Yes		Yes		Yes						Yes		Yes		Yes		Yes		Yes		Yes		Yes				
Type of expansion block			TM7BAI4VLA		TM7BAI4CLA		TM7BAI4TLA						TM7BAI4PLA		TM7BAO4VLA		TM7BAO4CLA		TM7BAM4VLA		TM7BAM4CLA								
Pages			3/72										3/72																

Expansion modules

Modicon TM7 blocks

Analog blocks for Modicon M258 logic controller and
Modicon LMC058 motion controller

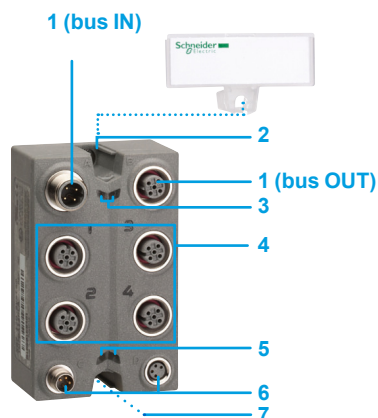

Description

Analog I/O expansion blocks

Analog I/O expansion blocks have the following on the front panel:

- 1 A male M12 connector (bus IN) and a female M12 connector (bus OUT) for connecting the TM7 expansion bus
- 2 A slot for the expansion block label (1)
- 3 Two bus diagnostic LEDs
- 4 Four female M12 connectors for connecting sensors and/or actuators with LEDs for indicating channel status
- 5 Two LEDs indicating the status of the sensor and actuator 24 V $\pm$ power supplies
- 6 Two M8 connectors for connecting the 24 V $\pm$ sensor and actuator power supplies: male for PWR IN, female for PWR OUT
- 7 Fixing using two $\varnothing$ 4 screws (not supplied) and connection of the functional earth when fixing the block on a metal support

(1) Label-holder supplied with IP 67 block.

Analog I/O expansion blocks

Max. no. of channels	Input range	Output range	Resolution	Sensor and actuator connection	Communication bus	Reference	Weight kg/lb
4 input	Voltage	—	11 bits + sign	4 female M12 connectors	TM7 bus	TM7BAI4VLA	0.200/ 0.441
	Current 0...20 mA	—	12 bits	4 female M12 connectors	TM7 bus	TM7BAI4CLA	0.200/ 0.441
	Pt 100, Pt 1000 temperature probe KTY 10, KTY 84 silicon temperature probe Resistance 0...3276 Ω	—	16 bits	4 female M12 connectors	TM7 bus	TM7BAI4TLA	0.200/ 0.441
	J, K, S thermocouple Voltage 0...65536 μ V	—	16 bits	4 female M12 connectors	TM7 bus	TM7BAI4PLA	0.200/ 0.441
4 output	—	Voltage - 10...+ 10 V $\pm$	11 bits + sign	4 female M12 connectors	TM7 bus	TM7BAO4VLA	0.200/ 0.441
	—	Current 0...20 mA	12 bits	4 female M12 connectors	TM7 bus	TM7BAO4CLA	0.200/ 0.441
2 input + 2 output	Voltage - 10...+ 10 V $\pm$	Voltage - 10...+ 10 V $\pm$	11 bits + sign	4 female M12 connectors	TM7 bus	TM7BAM4VLA	0.200/ 0.441
	Current 0...20 mA	Current 0...20 mA	12 bits	4 female M12 connectors	TM7 bus	TM7BAM4CLA	0.200/ 0.441



TM7BAI4●LA,
TM7BAO4●LA,
TM7BAM4●LA

Architecture, Connecting cables

See page 4/38

Connection accessories

See page 4/40

Separate parts

See page 4/41


Configuration software

- SoMachine software, see page 5/2
- Performance distributed I/O configuration software, please refer to our website www.schneider-electric.com

Expansion modules

Modicon TM7 blocks

Power distribution block for Modicon M258 logic controller and Modicon LMC058 motion controller

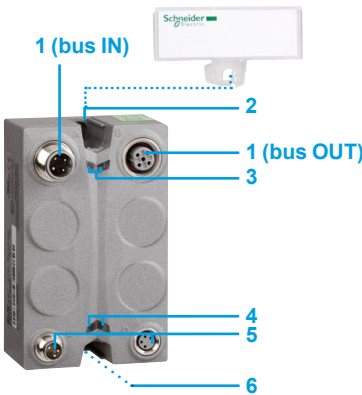

TM7SPS1A

Description

Power distribution block

The power distribution block has the following on the front panel:

- 1 A male M12 connector (bus IN) and a female M12 connector (bus OUT) for connecting the TM7 expansion bus
- 2 A slot for the power distribution block label (1)
- 3 Two TM7 bus diagnostic LEDs
- 4 Two LEDs indicating the status of the sensor and actuator 24 V $\overline{\text{---}}$ power supplies
- 5 Two M8 connectors for connecting the 24 V $\overline{\text{---}}$ sensor and actuator power supplies: male for PWR IN, female for PWR OUT
- 6 Fixing using two $\varnothing$ 4 screws (not supplied) and connection of the functional earth when fixing the block on a metal support

(1) Label-holder supplied with IP 67 block.

Power distribution block

Function	Connection	Communication bus	Reference	Weight kg/ lb
24 V $\overline{\text{---}}$ /15 W power supply for I/O expansion blocks on the TM7 expansion bus	Supply: 2xM8 connectors, 1 male and 1 female TM7 bus: 2xM12 connectors, 1 male and 1 female	TM7 bus	TM7SPS1A	0.190/ 0.419

Architecture, Connecting cables

See page 4/38

Connection accessories

See page 4/40

Separate parts

See page 4/41

Configuration software

- SoMachine software, see page 5/2
- Performance distributed I/O configuration software, please refer to our website www.schneider-electric.com

chapter 4

Communication



All technical information about products listed in this chapter
are available on www.schneider-electric.com

■ Profibus	
□ Modicon TM5 Profibus module	4/2
□ Modicon TM4 Profibus module	4/40
■ Serial links (Modbus protocols, character mode)	
□ Modicon M221 and M221 Book logic controllers	4/4
□ Modicon M241 and M251 logic controllers	4/6
□ Modicon M258 logic controller and Modicon LMC058 motion controller	4/8
□ Modicon TM5 communication modules	4/10
■ CANopen	
□ Modicon M241 and Modicon M251 logic controllers	4/12
□ CANopen Optimized architecture with Modicon OTB	
> Presentation	4/14
> Altivar IMC drive controller	4/15
> Magelis XBTGC HMI controllers and XBTGT/GK with control function	4/16
> Modicon OTB (IP 20)	4/18
> Architecture	4/20
□ CANopen Performance architecture with Modicon TM5 / TM7	
> Presentation	4/22
> Modicon M258 logic controller and Modicon LMC058 motion controller	4/23
> Distributed I/O on CANopen bus with Modicon TM5 interface module (IP 20)	4/24
> Distributed I/O on CANopen bus with Modicon TM7 interface blocks (IP 67)	4/28
> CANopen Performance architecture	4/38
■ Ethernet Modbus/TCP network	
□ Modicon TM4 Ethernet module	4/40
□ Modicon M221, M241 and M251 logic controllers and TM4ES4 Ethernet switch module	4/42
□ Modicon M258 logic controller, Modicon LMC058 motion controller, XBTGT/GK with control function, Altivar IMC drive controller	4/48


Communication

Modicon TM5 communication module
for connection to the Profibus DP fieldbus
for Modicon M258 logic controllers and Modicon LMC058 motion
controllers

Presentation

Profibus DP (Decentralized Peripherals)

Profibus (Process Field Bus) is a fieldbus for controlling decentralized sensors, actuators or PLCs via a central master controller.

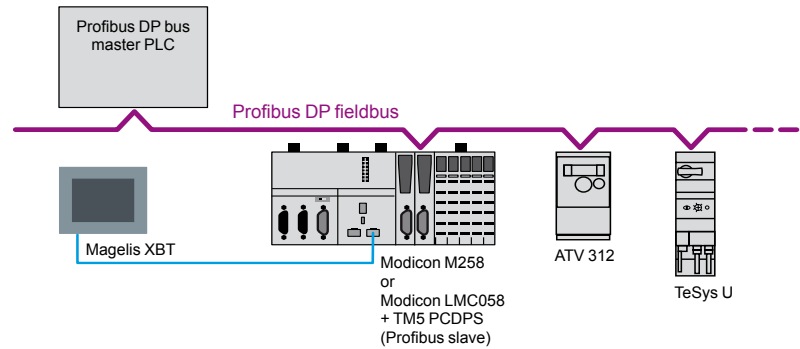

Connectable devices

The following Schneider Electric devices can be connected to this bus:

- Modicon TM258LD42DT4L, TM258LF42DT4L, TM258LF42DR and TM258LF66DT4L logic controllers equipped with the **TM5PCDPS** communication module
- Modicon LMC 058LF42 and LMC 058LF424 motion controllers equipped with the **TM5PCDPS** communication module
- TeSys U and TeSys T starter-controllers
- Momentum and Modicon STB distributed I/O
- Altivar 312/61/71 variable speed drives for asynchronous motors
- Lexium 05 and 15 servo drives for brushless motors
- Altistart ATS 48 soft start-soft stop units


And any third-party device compatible with Profibus DP standard profiles.

Profibus communication module


The **TM5PCDPS** communication module is designed for **TM258LD42DT4L**, **TM258LF42DT4L**, **TM258LF42DR** and **TM258LF66DT4L** logic controllers and **LMC058LF424** motion controllers and is installed in one of the two free PCI slots.

The **TM5PCDPS** communication module is used to configure the connection as a slave on the Profibus DP fieldbus.

Note: The maximum number of communication modules is two (see page 4/10) with a single **TM5PCDPS** Profibus DP slave communication module.

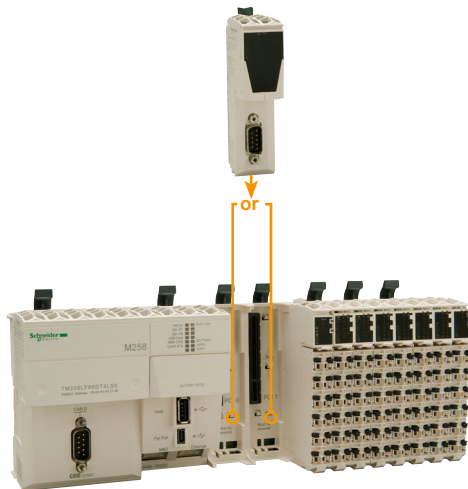

TM5PCDPS communication module: For mounting on one of the two free PCI slots on an M258 controller or LMC058 motion controller

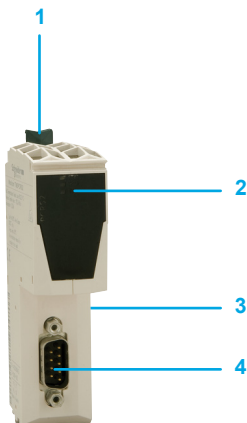

Description

The **TM5PCDPS** communication module features:

- 1 A locking clip for mounting/removing the module onto/from the logic controller or motion controller
- 2 A LED display block for the module channels and diagnostics
- 3 A connector for linking the logic controller or motion controller
- 4 A SUB-D connector (male 9-way) for connection to the Profibus fieldbus

Communication

Modicon TM5 communication module for connection to the Profibus DP fieldbus

for Modicon M258 logic controllers and Modicon LMC058 motion controllers



TM5PCDPS



490NAD91103

References

Modicon TM5 communication module

Description	For use with	Profile	Built-in port	Reference	Weight kg/ lb
Communication module for Profibus DP (244 I/O data bits)	Logic controllers: □ TM258LD42DT4L □ TM258LF42DT4L □ TM258LF42DR □ TM258LF66DT4L	V1 slave	SUB-D connector (male 9-way)	TM5PCDPS	0.064/ 0.141
	Motion controllers: □ LMC058LF42 □ LMC058LF424				

Profibus DP fieldbus connection components

Description	Length m/ ft	Item no.	Reference	Weight kg/ lb
Profibus DP connection cables	100/ 328.08	1	TSXPBSCA100	—
	400/ 1312.33	1	TSXPBSCA400	—

Description	Type	Item no.	Reference	Weight kg/ lb
Remote I/O on Profibus DP fieldbus	Modicon STB network interface module	—	STBNDP2212	0.140/ 0.309
Connectors for remote I/O communication module	Line terminator	—	490NAD91103	—
	In-line connector	—	490NAD91104	—
	In-line connector and terminal port	—	490NAD91105	—

Presentation

RS 232/RS 485 serial links offer a simple solution to the communication needs of compact machines.

Modbus and ASCII standard communication protocols are used to connect numerous equipment items such as: HMIs, printers, energy meters, variable speed drives, motor starters, remote I/O (RIO), etc.


Description

■ Modicon M221 logic controllers with 16, 24 or 40 I/O have the following on the front panel:

- 1 A serial link port with an RJ45 connector delivering a voltage of 5 V (200 mA) to supply an HMI or Bluetooth® adaptor with power.
- 2 A slot for a 2nd serial link port (with connection on screw terminals) by inserting the **TMC2SL1** communication cartridge or the **TMC2CONV01** application cartridge (1).

■ Modicon M221 Book logic controllers with 16 or 32 I/O have the following on the front panel:

- 3 A serial link port with an RJ45 connector delivering a voltage of 5 V (200 mA) to supply an HMI or Bluetooth® adaptor with power.
- 4 A 2nd serial port also equipped with an RJ45 connector for **TM221M16●●** and **TM221M32●●** controllers (controllers without embedded Ethernet).




Controller Type	Embedded Ports		Optional Port (1 max. per controller)
	"Serial" or "Serial 1" port, RJ45 connector	"Serial 2" port, RJ45 connector	
TM221C●●●●	RS 232/RS 485 with 5 V (200 mA) power supply for HMI or Bluetooth communication adaptor (items 1/3)	—	On TMC2SL1 or TMC2CONV01 option cartridges, connection on screw terminals RS 232/RS 485 (item 2)
TM221M●●●●		RS 485 (item 4)	—
TM221ME●●●●		—	—


(1) TM221C40●●●● controllers have 2 slots for a cartridge; only one cartridge, TMC2SL1 or TMC2CONV01, can be used per controller. The other slot remains available for an analog I/O cartridge or an application cartridge.

Modbus serial link wiring system

Non-isolated bus

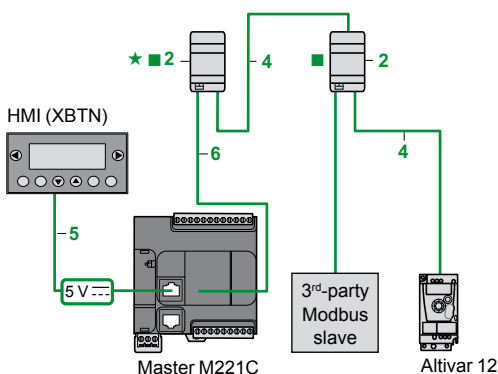

Isolated bus (recommended for bus > 10 m/32.808 ft)

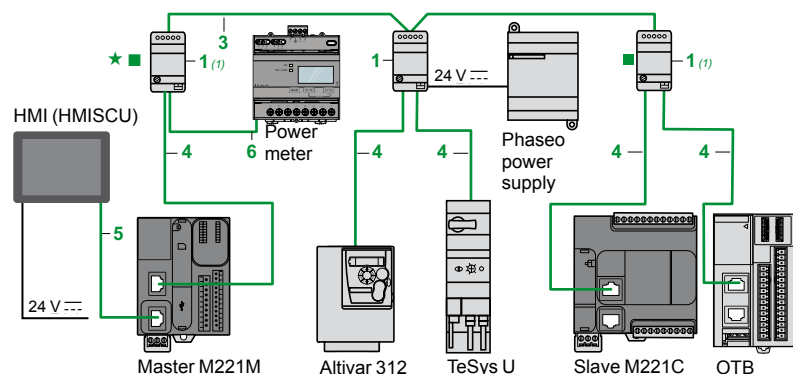

- Total length of cables between M221 and ATV 12: ≤ 30 m (98.425 ft)

- Length of cable 4: ≤ 10 m (32.808 ft)

★ Line polarization active. ■ Line termination

- Total length of cables between isolation boxes 1: ≤ 1000 m (3280.840 ft)

- Length of drop cables 4 or 5: ≤ 10 m (32.808 ft)

★ Line polarization active. ■ Line termination

(1) Box powered by the logic controller.

References




TWDXCAISO



TWDXCAT3RJ



LU9GC3



TSXSCA50



XGSZ24

Tap-off and adaptor components for RS 485 serial link

Designation	Description	Item	Length m/ ft	Unit reference	Weight kg/ lb
T-junction and isolation box Screw terminals for trunk cable 2 x RJ45 for tap-off	☐ Isolation of the RS 485 link (1) ☐ Line termination (RC 120 Ω, 1nF) ☐ Line pre-polarization (2 R 620 Ω) ☐ 24 V $\pm$ power supply (screw terminals) or 5 V $\pm$ power supply (via RJ45) ☐ Mounting on 35 mm (1.378 in.) $\perp$	1	—	TWDXCAISO	0.100/ 0.220
T-junction box 1 x RJ45 for trunk cable 2 x RJ45 for tap-off	☐ Line termination (RC 120 Ω, 1nF) ☐ Line pre-polarization (2 R 620 Ω) ☐ Mounting on 35 mm (1.378 in.) $\perp$	2	—	TWDXCAT3RJ	0.080/ 0.176
Modbus splitter box Screw terminals for trunk cable 10 x RJ45 for tap-off	☐ Mounting on 35 mm (1.378 in.) $\perp$, on plate or panel	—	—	LU9GC3	0.500/ 1.102
T-junctions 2 x RJ45 for trunk cable	1 integrated cable with RJ45 connector for tap-off dedicated to Altivar variable speed drive	—	0.3/ 0.98	VW3A8306TF03	—
			1/ 3.28	VW3A8306TF10	—
Passive T-junction box	☐ 1-channel line extension and tap-off on screw terminals ☐ Line termination	—	—	TSXSCA50	0.520/ 1.146
RS 232C/RS 485 line converter	☐ Max. data rate 19.2 Kbps, No modem signals ☐ 24 V $\pm$ /20 mA power supply ☐ Mounting on 35 mm (1.378 in.) $\perp$	—	—	XGSZ24	0.100/ 0.220

Cables and cordsets for RS 232 serial link

RS 485 double shielded twisted pair trunk cables	Modbus serial link, supplied without connector	3	100/ 328.06	TSXCSA100	5.680/ 12.522
			200/ 656.16	TSXCSA200	10.920/ 24.074
			500/ 1640.42	TSXCSA500	30.000/ 66.139
Modbus RS 485 cordsets	2 x RJ45 connectors	4	0.3/ 0.98	VW3A8306R03	0.030/ 0.066
			1/ 3.28	VW3A8306R10	0.050/ 0.110
			3/ 9.84	VW3A8306R30	0.150/ 0.331
	1 x RJ45 connector and 1 end with flying leads	6	1/ 3.28	TWDXCAFJ010	0.060/ 0.132
			3/ 9.843	VW3A8306D30	0.150/ 0.331
Controller to Magelis HMI cordsets	2 x RJ45 connectors Compatible with: ☐ Com Port 1 on XBTN200/N400/R400/RT500 (2) ☐ Com Port 1 on XBTRT511/HMISTO/STU/SCU ☐ Com Port 2 on XBTGT2●●0...7●●0 and HMIGTO	5	2.5/ 8.20	XBTZ9980	0.230/ 0.507
		5	10/ 32.81	XBTZ9982	—
	1 x RJ45 connector and 1 x 25-way SUB-D connector Compatible with: ☐ Com Port 1 on XBTN410/N410 and XBTR410/R411	—	2.5/ 8.20	XBTZ938	0.210/ 0.463
	1 x RJ45 connector and 1 x 9-way SUB-D connector Compatible with: ☐ Com Port 1 on XBTGT2●●0...7●●0	—	2.5/ 8.20	XBTZ9008	—
	TMC2SL1 cartridge to Magelis HMI cordsets 1 x RJ45 connector and stripped wires Compatible with: ☐ Com Port 1 on XBTRT511/HMISTO/STU/SCU ☐ Com Port 2 on XBTGT2●●0...7●●0 and HMIGTO	—	3/ 9.84	VW3A8306D30	0.150/ 0.331
Line end adaptor Sold in packs of 2	For RJ45 connector R = 120 Ω, C = 1 nF	—	—	VW3A8306RC	0.200/ 0.441

Cordsets for RS 232 serial link

Cordset for DTE terminal (printer) (3)	Serial link for Data Terminal Equipment (DTE) 1 x RJ45 connector and 1 x 9-way female SUB-D connector	3/ 9.84	TCSMCN3M4F3C2	0.150/ 0.331
Cordset for DCE terminal (modem, converter)	Serial link for point to point device (DCE) 1 x RJ45 connector and 1 x 9-way male SUB-D connector	3/ 9.84	TCSMCN3M4M3S2	0.150/ 0.331

(1) Line isolation recommended for line distances > 10 m (32.808 ft).

(2) Can only be connected to the controller SL or SL1 ports in order to supply the Magelis terminal with power.

(3) If the terminal is equipped with a 25-way SUB-D connector, you will also need to order the TSXCTC07 25-way female/9-way male SUB-D adaptor.

Communication

Modicon M241 and Modicon M251 logic controllers
Serial links (Modbus protocols, character mode)

Presentation

RS 232/RS 485 serial links offer a simple solution to the communication needs of machines.

Modbus and ASCII standard communication protocols are used to connect numerous equipment items such as: HMIs, printers, energy meters, variable speed drives, motor starters, remote I/O (RIO), etc.

Description




Modicon **M241** logic controllers have the following on their upper surface:

- 1 A "Serial 1" serial link port with an RJ45 connector delivering a 5 V/200 mA power supply which allows the use of a Magelis HMI, the Bluetooth® communication adapter or other devices.
- 2 A 2nd "Serial 2" serial link port (with connection on screw terminals).

Controller Type	Embedded Ports	
	"Serial 1" port, RJ45 connector	"Serial 2" port, connection on screw terminals
TM241 ●●●●	RS 232/RS 485 with 5V (200 mA) power supply for HMI or Bluetooth communication adaptor (item 1)	RS 485 (item 2)


Modicon **M251** logic controllers have on their front a serial link port with an RJ45 connector delivering a 5 V/200 mA power supply which allows the use of a Magelis HMI, the Bluetooth® communication adapter or other devices.

- 3 A serial link port (RJ 45 connector (RS 232 or RS 485)).




Modbus serial link wiring system

Non-isolated bus

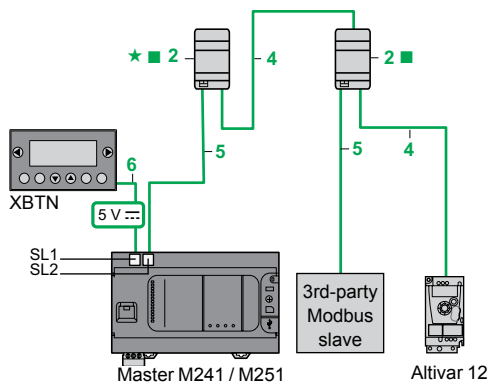

- Total length of cables between M241/M251 and ATV12: ≤ 30 m (98.425 ft)
- Length of cable 4: ≤ 10 m (32.808 ft)
- ★ Line polarization active. ■ Line termination

Isolated bus (recommended for bus > 10 m (32.808 ft))

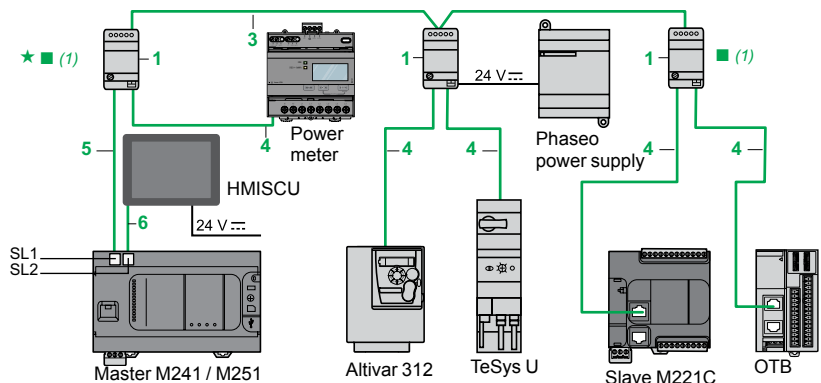

- Total length of cables between isolation boxes 1: ≤ 1000 m (3280.840 ft)
- Length of drop cables 4 or 5: ≤ 10 m (32.808 ft)
- ★ Line polarization active. ■ Line termination
- (1) Box powered by the logic controller.

References



TWDXCAISO TWDXCAT3RJ


Tap-off and adaptor components for RS 485 serial link

Designation	Description	Item	Length m/ft	Unit reference	Weight kg/lb
T-junction and isolation box Screw terminals for trunk cable 2 x RJ45 for tap-off	□ Isolation of the RS 485 link (1) □ Line termination (RC 120 Ω, 1nF) □ Line pre-polarization (2 R 620 Ω) □ 24 V $\dots$ power supply (screw terminals) or 5 V $\dots$ power supply (via RJ45) □ Mounting on 35 mm (1.378 in.)	1	—	TWDXCAISO	0.100/ 0.220
T-junction box 1 x RJ45 for trunk cable 2 x RJ45 for tap-off	□ Line termination (RC 120 Ω, 1nF) □ Line pre-polarization (2 R 620 Ω) □ Mounting on 35 mm (1.378 in.)	2	—	TWDXCAT3RJ	0.080/ 0.176

(1) Line isolation recommended for line distances > 10 m (32.808 ft).



LU9GC3



TSXSCA50



XGSZ24

References (continued)

Designation	Description	Item	Length m/ft	Reference	Weight kg/ lb	
Tap-off and adaptor components for RS 485 serial link						
Modbus splitter box Screw terminals for trunk cable 10 x RJ45 for tap-off	☐ Mounting on 35 mm (1.378 in.)  , on plate or panel	—	—	LU9GC3	0.500/ 1.102	
T-junctions 2 x RJ45 for trunk cable	1 integrated cable with RJ45 connector for tap-off dedicated to Altivar variable speed drive	—	0.3/ 0.98 1/ 3.28	VW3A8306TF03 VW3A8306TF10	—	
Passive T-junction box	☐ 1-channel line extension and tap-off on screw terminals ☐ Line termination	—	—	TSXSCA50	0.520/ 1.146	
RS 232C/RS 485 line converter	☐ Max. data rate 19.2 Kbps, No modem signals ☐ 24 V  /20 mA power supply ☐ Mounting on 35 mm (1.378 in.)	—	—	XGSZ24	0.100/ 0.220	
Cables and cordsets for RS 232 serial link						
RS 485 double shielded twisted pair trunk cables	Modbus serial link, supplied without connector	3	100/ 328.08	TSXCSA100	5.680/ 11.023	
			200/ 656.16	TSXCSA200	10.920/ 24.074	
			500/ 1640.42	TSXCSA500	30.000/ 66.139	
Modbus RS 485 cordsets	2 x RJ45 connectors	4	0.3/ 0.98 1/ 3.28	VW3A8306R03 VW3A8306R10	0.030/ 0.066 0.050/ 0.110	
			3/ 9.84	VW3A8306R30	0.150/ 0.331	
	1 x RJ 45 connector and 1 end with flying leads	5	1/ 3.28 3/ 9.84	TWDXCAFJ010 VW3A8306D30	0.060/ 0.132 0.150/ 0.331	
Cordsets: used from M241 (SL1), M251 controllers to Magelis HMI	2 x RJ45 connectors Compatible with: ☐ Com Port 1 on XBTN200/N400/R400/RT500 (1) ☐ Com Port 1 on XBTRT511 and HMISTO/STU/SCU ☐ Com Port 2 on XBTGT2●●0...7●●0 and HMIGTO	6	2/ 8.20	XBZT9980	0.230/ 0.507	
		6	10/ 32.81	XBZT9982	—	
	1 x RJ45 connector and 1 x 25-way SUB-D connector Compatible with: ☐ Com Port 1 on XBTN410/N410 and XBTR410/R411	—	2.5/ 8.20	XBZT9938	0.210/ 0.463	
		—	2.5/ 8.20	XBZT9908	—	
	Cordsets: used from M241 (SL2) controllers to Magelis HMI	1 x RJ45 connector and 1 x 9-way SUB-D connector Compatible with: ☐ Com Port 1 on XBTGT2●●0...7●●0	—	3/ 9.84	VW3A8306D30	0.150/ 0.331
			—	—	VW3A8306RC	0.200/ 0.441
Cordsets for RS 232 serial link						
Cordset for DTE terminal (printer) (2)	Serial link for Data Terminal Equipment (DTE) 1 x RJ45 connector and 1 x 9-way female SUB-D connector		3/ 9.84	TCSMCN3M4F3C2	0.150/ 0.331	
Cordset for DCE terminal (modem, converter)	Serial link for point to point device (DCE) 1 x RJ45 connector and 1 x 9-way male SUB-D connector		3/ 9.84	TCSMCN3M4M3S2	0.150/ 0.331	


(1) If the terminal is equipped with a 25-way SUB-D connector, you will also need to order the **TSXCTC07** 25-way female / 9-way male SUB-D adaptor.

(2) Can only be connected to the controller SL or SL1 ports in order to supply the Magelis terminal with power.

Modbus cabling system


Non-isolated link

(Modicon M258, LMC058 master)

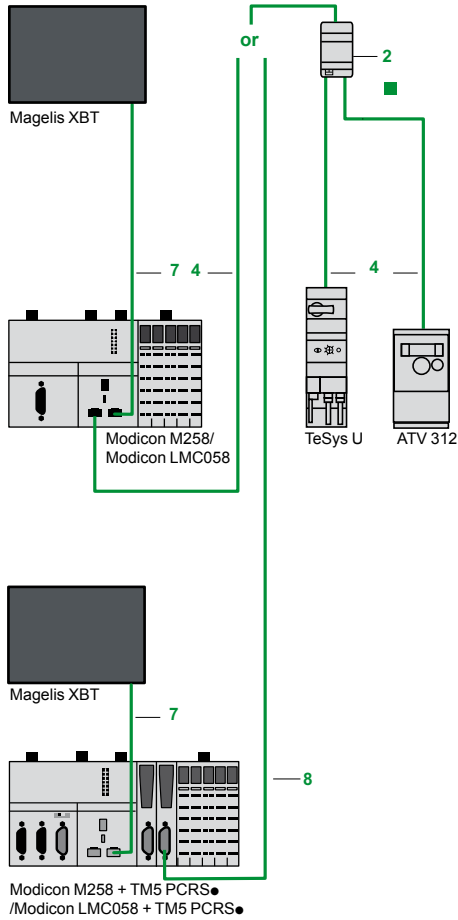

Isolated link

(Modicon M258, LMC058 master)

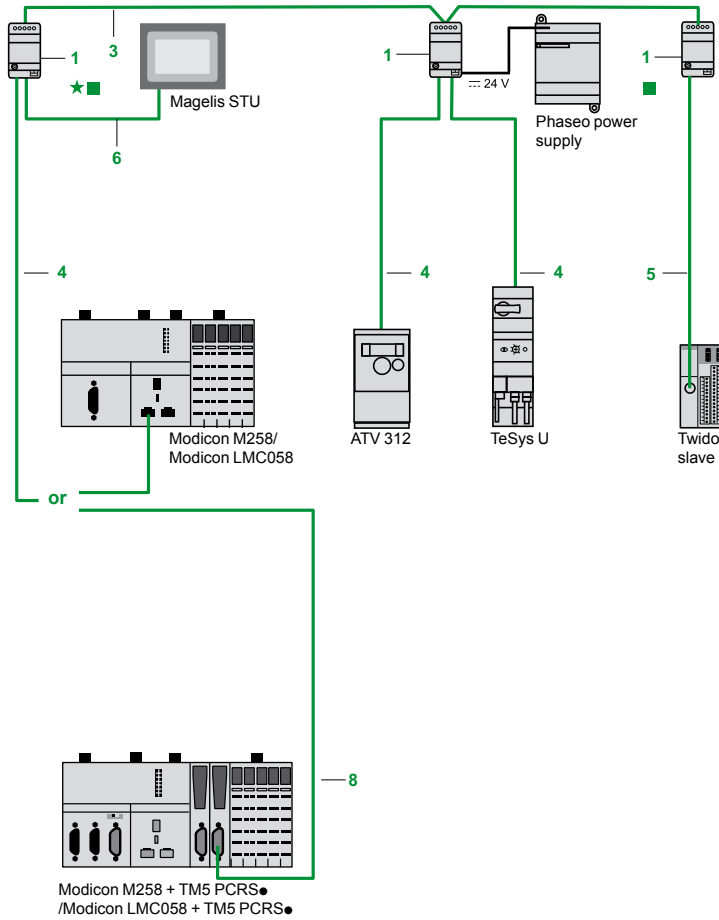

- Length of cables between Modicon M258 and Altivar:
≤ 30 m max.

★ Line polarization active
■ Line termination

- Total length of cables between isolation boxes 1: ≤ 1000 m
- Length of tap cables 4, 5 or 6: ≤ 10 m




TWDXCAISO



TWDXCAT3RJ



LU9GC3



TSXSACA50



XGSZ24

References

Extension and adaptation elements, cables and cordsets for RS 485 serial link

Designation	Description	No.	Length m/ft	Unit reference	Weight kg/lb
Isolation box Screw terminal block for trunk cable 2 x RJ45 connectors for tap-off	- Isolation of the RS485 link (1) - Line termination (RC 120 Ω, 1 nF) - Line pre-polarization (2 R 620 Ω), Power supply 24 V [DC symbol] (screw terminal block) or 5 V [DC symbol] (via RJ45), Mounting on 35 mm 1	1	—	TWDXCAISO	0.100/0.220
Junction box 1 RJ45 for trunk cable 2 x RJ45 for tap-off	- Line termination (RC 120 Ω, 1 nF) - Line pre-polarization (2 R 620 Ω), Mounting on 35 mm 5	2	—	TWDXCAT3RJ	0.080/0.176
Modbus splitter box Screw terminal block for trunk cable 10 x RJ45 for tap-off	Mounting on 35 mm 1 on plate or panel (2 x Ø 4 — mm screws)	—	—	LU9GC3	0.500/1.102
T-junction boxes 2 x RJ45 for trunk cable	1 integrated cable with RJ45 connector for tap-off — dedicated to Altivar variable speed drive	—	0.3/0.98 1/3.28	VW3A8306TF03 VW3A8306TF10	—
Passive T-junction box	- 1-channel line extension and tap-off on screw terminal block - Line termination	—	—	TSXSACA50	0.520/1.146
RS 232C/RS 485 line converter	- Max. data rate 19.2 Kbps - No modem signals 24 V 220 mA power supply, Mounting on 35 mm 1	—	—	XGSZ24	0.100/0.220
RS 485 double shielded twisted pair trunk cables	Modbus serial link, supplied without connector	3	100/328.08 200/656.16 500/1640.41	TSXCSA100 TSXCSA200 TSXCSA500	5.680/ 12.522 10.920/ 24.074 30.000/ 66.138
Modbus RS 485 cordsets	2 x RJ45 connectors	4	0.3/0.98 1/3.28 3/9.84	VW3A8306R03 VW3A8306R10 VW3A8306R30	0.030/0.066 0.050/0.110 0.150/0.331
	1 x RJ45 connector and 1 end with flying leads	—	1/3.28 3/9.84	TWDXCAFD010 VW3A8306D30	0.060/0.132 0.150/0.331
	1 x mini-DIN connector for Twido controller and 1 x RJ45 connector	—	0.3/0.98 1/3.28 3/9.84	TWDXCARJ003 TWDXCARJ010 TWDXCARJ030	0.040/0.088 0.090/0.198 0.160/0.353
	1 x mini-DIN connector for Twido controller and 1 x RJ45 connector (2) (3)	5	0.3/0.98	TWDXCARJP03	0.027/0.060
	1 x mini-DIN connector for Twido controller and 1 x RJ45 connector Dedicated to Programming protocol (3) (4)	—	0.3/0.98	TWDXCARJP03P	0.027/0.060
	1 mini-DIN connector for Twido controller and 1 end with flying leads	—	1/3.28 10/32.81	TWDXCAFD010 TSXCA100	0.062/0.137 0.517/1.140
Cordsets Modicon M258 (SL1, SL2) to Magelis display unit and terminal	2 x RJ45 connectors	7	2.5/8.20	XBTN200/R400 XBTRT500/511 XBTGT11●●/1335 XBTZ9980	0.150/0.331
	1 x RJ45 connector and 1 x 25-way SUB-D connector	6, 7	2.5/8.20	Small Panel XBTN401/410 XBTR410/411 XBTZ938	0.210/0.463
	1 x RJ45 connector and 1 x 9-way SUB-D connector	7	2.5/8.20	Advanced Panel XBTGT2●●●...7340 XBTGK●●●●0 XBTZ9008	0.150/0.331
Cordset for Magelis Small Panel display unit and terminal	2 x RJ45 connectors	6	3/9.84	Small Panel XBT N200/ R400 XBTRT500/511 VW3A8306R30	0.150/0.331
Line terminator	For RJ45 connector R = 120 Ω, C = 1 nF Sold in lots of 2	—	—	VW3A8306RC	0.200/0.441

Cordsets for RS 232 serial link

Designation	Description	No.	Length m/ft	Reference	Weight kg/lb
Cordset for DTE terminal (printer) (5)	Serial link for DTE equipment (2) 1 x RJ45 connector and 1 x 9-way female SUB-D connector	8	3/9.84	TCSMCN3M4F3C2	0.150/ 0.331
Cordset for DCE terminal (modem, converter)	Serial link for DCE 1 x RJ45 connector and 1 x 9-way male SUB-D connector	8	3/9.84	TCSMCN3M4M3S2	0.150/ 0.331

(1) Line isolation recommended for line distances > 10 m.

(2) Forces configuration of the Twido controller built-in RS 485 port with the TwidoSuite programming protocol parameters.

(3) Carries the 5 V 220 mA voltage (supplied by the Twido controller built-in RS 485 port) required by the TWDXCAISO isolation box, thus avoiding the need for a 24 V 220 mA external power supply.


(4) Allows the Twido controller built-in RS 485 port to be used with the parameters described in the configuration.

(5) If the terminal is equipped with a 25-way SUB-D connector, you will also need to order the 25-way female/9-way male SUB-D adaptor TSXCTC07.

Communication

Modicon TM5 communication modules for Modbus serial link

for Modicon M258 logic controller and Modicon LMC058 motion controller

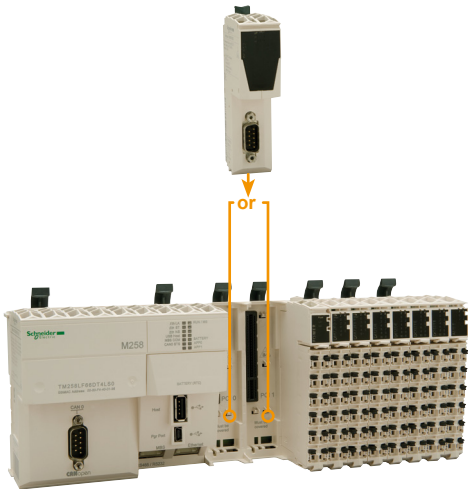

TM5 PCRS communication module: for mounting the two free PCI slots in the M258 logic controller or LMC058 motion controller

Presentation

TM5PCRS communication modules are designed for TM258LD42DT4L, TM258LF42DT4L, TM258LF42DR, TM258LF66DT4L logic controllers, LMC058LF42 and LMC058LF424 motion controllers and are installed in one of the two free PCI slots in.

TM5PC communication modules can be used to configure one or two additional Modbus or ASCII serial links as RS232 or RS485.


Nota: the maximum number of communication modules is 2.

Modbus and Character mode serial links

Cabling system: see page 4/8.

Description

- TM5PCRS communication modules comprise:
- 1 A locking clip for mounting/dismounting on the controller
 - 2 A channel and module diagnostics LED display block
 - 3 A connector for linking to the controller
 - 4 A SUB-D connector (male 9-way) for connection to the serial link

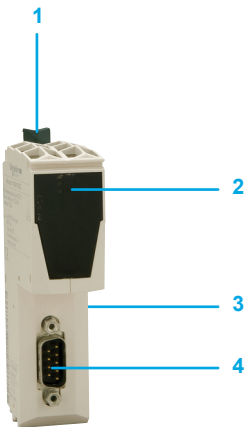

Serial link		
LED	Colour	Status: on
Status	Green	Operation in progress
	Red	Controller starting
RXD	Yellow	Reception on interface: ☐ RS232 with TM258PCRS2 ☐ RS485 with TM258PCRS4
TXD	Yellow	Transmission on interface: ☐ RS232 with TM258PCRS2 ☐ RS485 with TM258PCRS4

Communication

Modicon TM5 communication modules for Modbus serial link

for Modicon M258 logic controller and Modicon LMC058 motion controller



TM5PCRS●

References					
Description	Used for	Physical layer/ protocols	Built-in port	Reference	Weight kg/lb
Modbus serial link communication modules	Logic controllers: □ TM258 LD42DT4L, □ TM258 LF42DT4L, □ TM258 LF42DR, □ TM258 LF66DT4L	RS232/ Modbus/ASCII, SoMachine	SUB-D connector (male 9-way)	TM5PCRS2	0.064/ 0.141
	Motion controllers: □ LMC 058LF42, □ LMC 058LF424	RS485 / Modbus/ASCII, SoMachine	SUB-D connector (male 9-way)	TM5PCRS4	0.064/ 0.141

4



TM241CEC... controllers



TM251MESC controller

Presentation

Schneider Electric has selected CANopen for its machines and installations because of its wealth of functions and its resulting benefits in the automation world.

This decision was based on the general acceptance of CANopen, and the fact that CANopen products are increasingly used in control system architectures.

CANopen is an open network supported by more than 400 companies worldwide, and promoted by CAN in Automation (CiA).

CANopen conforms to standards EN 50325-4 and ISO 15745-2.

Schneider Electric is heavily involved in working groups, which are important for machine and installation architectures, systems and products.

□ The bus uses a double shielded twisted pair on which, with Modicon M241 and Modicon M251 logic controllers, a maximum of 63 devices are connected by daisy-chaining or by tap junctions.

□ Each end of the bus must be fitted with a line terminator. On M241 controllers, this line terminator is already integrated on the master side and can be disconnected using a switch located next to the CAN connector.

CANopen port on M241 and M251 controllers

Type	M241: screw terminals M251: 9-way SUB-D							
Standards	DS 301 V4.02, DR 303-1							
Class	M10							
Data rate								
Max. length (m / ft.)	20/ 65.62	40/ 131.23	100/ 328.08	250/ 820.21	500/ 1640.42	1000/ 3280.84	2500/ 8202.1	5000/ 16404.2
Data rate (Kbps)	1000	800	500	250	125	50	20	10
Number of slaves	63 slaves max. with limit of: 252 RPDOs and 252 TPDOs							

Description

CANopen port on M241 and M251 controllers


The underside of Modicon **TM241CEC...** logic controllers has:

- 1 a connector for linking to the CANopen bus (screw terminals).
- 2 a CANopen line termination switch.

The front of the Modicon **TM251MESC** logic controller has:

- 3 a connector for linking to the CANopen bus (9-way SUB-D).

CANopen connection architecture

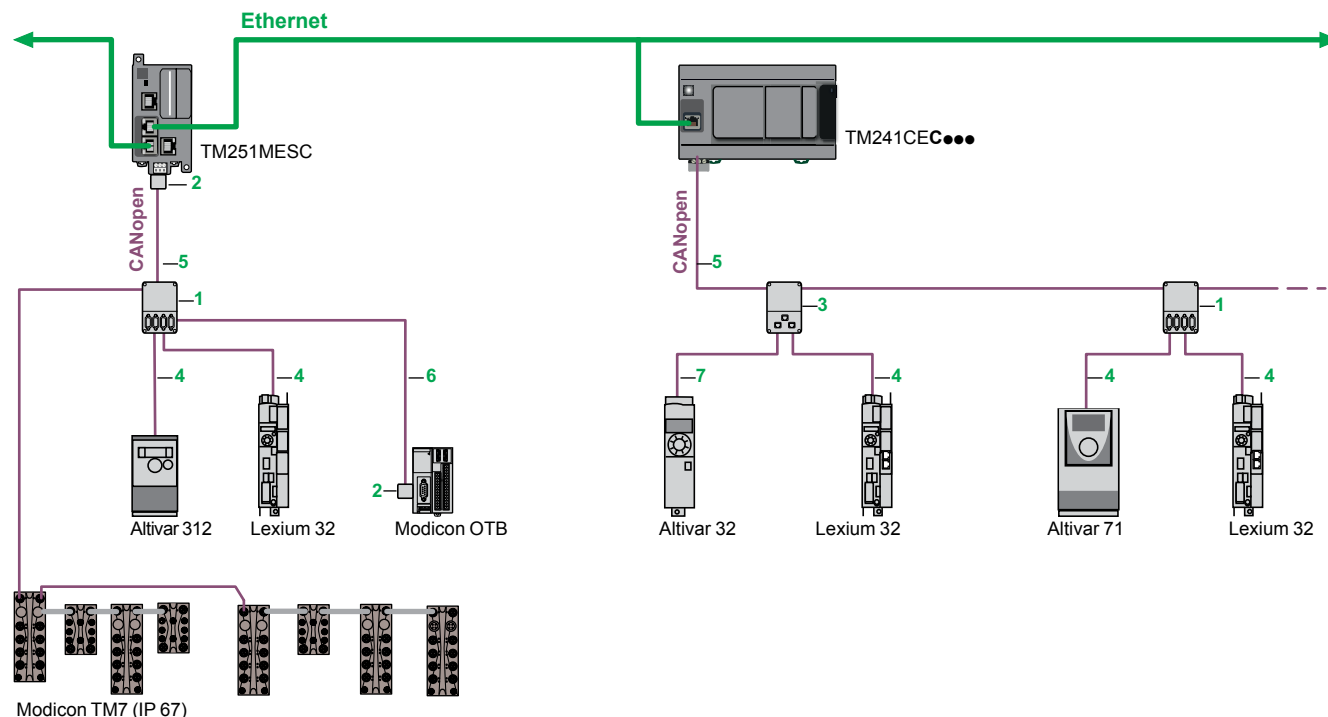

References

CANopen standard taps and connectors

Designation	Description	Item	Lgth. mm / ft	Unit reference	Weight kg/lb
IP20 CANopen tap junction	Line termination : 4 SUB-D ports. Screw terminals for connecting the trunk cables	1	—	TSXCANTDM4	0.196/0.432
IP 20 CANopen connectors 9-way female SUB-D Line end adapter switch	Right-angle	2	—	TSXCANKCDF90T	0.046/0.101
	Straight (for connection to the Altivar IMC integrated controller card)	2	—	TSXCANKCDF180T	0.049/0.108
	Right-angle with 9-way SUB-D for connecting a PC or diagnostic tool	2	—	TSXCANKCDF90TP	0.051/0.112
IP 20 CANopen tap junction for Altivar and Lexium 32	2 RJ45 ports	3	—	VW3CANTAP2	0.250/0.551
Daisy chain taps	Equipped with: □ 2 sets of spring terminals for daisy chain connection of the CANopen bus □ 1 preassembled cordset with RJ45 connector for connecting the drive	—	0.6 / 1.97	TCSCTN026M16M	—
	Equipped with: □ 2 RJ45 connectors for daisy chain connection of the CANopen bus □ 1 preassembled cordset with RJ45 connector for connecting the drive	—	0.3 / 0.98	TCSCTN023F13M03	—
CANopen line terminators	For RJ45 connector <i>Sold in lots of 2</i>	—	—	TCSCAR013M120	—
	For screw terminal connector <i>Sold in lots of 2</i>	—	—	TCSCAR01NM120	—

IP 20 standard cables and preassembled cordsets

Designation	Description		Item	Lgth. mm/ft	Unit reference	Weight kg/lb			
CANopen cables (2 x AWG 22 2 x AWG 24)	For standard environment (1), CE marking: Low smoke. Zero halogen. Non flame propagating (IEC 60332-1)		5	50 / 164.042	TSXCANCA50	4.930/10.869			
				100 / 328.08	TSXCANCA100	8.800/19.401			
				300 / 984.25	TSXCANCA300	24.560/54.146			
	For standard environment (1), UL certification, CE marking: Flame-retardant (IEC 60332-2)		5	50 / 164.04	TSXCANCB50	3.580/7.893			
				100 / 328.08	TSXCANCB100	7.840/17.284			
				300 / 984.25	TSXCANCB300	21.870/48.215			
	For harsh environment (1) or mobile installation, CE marking: Low smoke. Zero halogen. Non flame propagating (IEC 60332-1). Oil-resistant		5	50 / 164.04	TSXCANCD50	3.510/7.738			
				100 / 328.08	TSXCANCD100	7.770/17.130			
				300 / 984.25	TSXCANCD300	21.700/47.840			
CANopen preassembled cordsets	Cordsets with one 9-way female SUB-D connector at each end	For standard environment (1), CE marking: Low smoke. Zero halogen. Non flame propagating (IEC 60332-1)	6	0.3 / 0.98	TSXCANCADD03	0.091/0.201			
				1 / 3.28	TSXCANCADD1	0.143/0.315			
				3 / 9.84	TSXCANCADD3	0.295/0.650			
				5 / 16.40	TSXCANCADD5	0.440/0.970			
				0.3 / 0.98	TSXCANCBDD03	0.086/0.190			
		For standard environment (1), UL certification, CE marking: Flame-retardant (IEC 60332-2)	6	1 / 3.28	TSXCANCBDD1	0.131/0.289			
				3 / 9.84	TSXCANCBDD3	0.268/0.591			
				5 / 16.40	TSXCANCBDD5	0.400/0.882			
				Cordsets with one 9-way female SUB-D connector and one RJ45 connector		4	0.5 / 1.64	TCSCCN4F3M05T	0.100/0.220
							1 / 3.28	TCSCCN4F3M1T	0.100/0.220
	3 / 9.843	VW3M3805R010 (2)	0.100/0.220						
	1 / 3.281	VW3M3805R030 (2)	0.300/0.661						
	3 / 9.84	TCSCCN4F3M3T	0.160/0.353						
	Cordsets with two 9-way SUB-D connectors, one male and one female		—	0.5 / 1.64	TLACDCBA005	0.100/0.220			
				1.5 / 4.92	TLACDCBA015	0.120/0.265			
				3 / 9.84	TLACDCBA030	0.190/0.419			
				5 / 16.40	TLACDCBA050	0.350/0.772			
				Preassembled cordsets with one RJ 45 connector at each end		7	0.3 / 0.984	VW3CANCARR03	0.100/0.220
	1 / 3.281	VW3CANCARR1	0.100/0.220						
	Adapter for Altivar 71 drive	One RJ45 connector at each end		—	—	VW3CANA71	0.100/0.220		

Taps and IP 67 accessories

Please consult the **Modicon TM7** offer: interface blocks (IP 67) for distributed I/O on the CANopen bus [See page 4/32](#)


(1) Standard environment: no particular environmental constraints, operating temperature between + 5°C and + 60°C (+ 41°F and + 140°F), and in fixed installations.

Harsh environment: resistance to hydrocarbons, industrial oils, detergents, solder splashes, relative humidity up to 100%, saline atmosphere, significant temperature variations, operating temperature between - 10°C and + 70°C (+ 14°F and + 158°F), or in mobile installations.

(2) Cordset equipped with a line terminator.



TSXCANTDM4



VW3CANTAP2



TSXCANKCDF90T



TSXCANKCDF180T



TSXCANKCDF90TP



TCSCAR013M120



VW3CANA71



Presentation

Schneider Electric has selected the CANopen bus for its machines and installations because of its wealth of functions and its resulting benefits in the automation world. This decision was based on the general acceptance of CANopen by the automation engineer community due to its openness and universality, and the fact that CANopen products are increasingly used in control system architectures.

CANopen is an open communication bus supported by more than 400 companies worldwide, and promoted by CAN in Automation (CIA) <http://www.can-cia.org/>. CANopen conforms to standards EN 50325-4 and ISO 15745-2.

CANopen brings transparency to Ethernet

The CANopen bus is a multi-master bus affording reliable, deterministic access to real-time data in control system equipment. The CSMA/CA protocol is based on broadcast exchanges, sent cyclically or on an event, to ensure optimum use of the bandwidth. A message handling channel can also be used to define slave parameters.

The bus uses a double shielded twisted pair on which, with the Magelis XBTGC HMI controllers, XBTGT/GK with control function and Altivar IMC drive controller, a maximum of 16 slave devices are connected by daisy-chaining or by tap junctions. The variable data rate between 20 kbps and 1 Mbps depends on the length of the bus: between 20 m and 1000 m (between 65.617 ft and 3280.840 ft). Recommendation: equip each end of the bus with a line terminator.

The CANopen bus is a set of profiles on CAN systems, possessing the following characteristics:

- Open bus system
- Data exchanges in real time without overloading the protocol
- Modular design allowing modification of size
- Interconnection and interchangeability of devices
- Standardized network configuration
- Access to device parameters
- Synchronization and circulation of data from cyclic and/or event-controlled processes (short system response time)

Connectable Schneider Electric devices

The following Schneider Electric devices can be connected to the CANopen bus:

- Ø 58 mm (2.283 in.) OsiSense XCC multi-turn absolute encoders: **XCC3510P/3515CS84CB**.
- TeSys U starter-controllers with communication module **LULC08**.
- TeSys T motor management system with controller **LTMR...C...**.
- Modicon OTB IP 20 distributed I/O with I/O expansion modules with interface module **OTB1C0DM9LP**.
- Preventa configurable safety controllers **XPSMC16ZC/MC32ZC**.
- Altivar 61/71 variable speed drives for asynchronous motors (0,75...630 kW/1...844.5 hp) **ATV61/71H...**.
- Altivar 32 variable speed drives for asynchronous motors (0.18...15 kW/0,241...20.1 hp) **ATV32H...**.
- Lexium 32 servo drives (0.15...7 kW/ 0.201...9.38 hp) for BSH/BSM servo motors **LXM32A...D...**.
- Lexium integrated drives **ILA1B, ILE1B and ILS1B**.



TeSys U with communication module LULC08



Modicon OTB



Preventa XPS MC



Altivar 71



Altivar 32



LEX32A



Lexium ILA1B


Communication

CANopen bus

Integrated CANopen bus port

Altivar IMC drive controller for ATV61/71 variable speed drives

Tested Validated and Documented Architecture

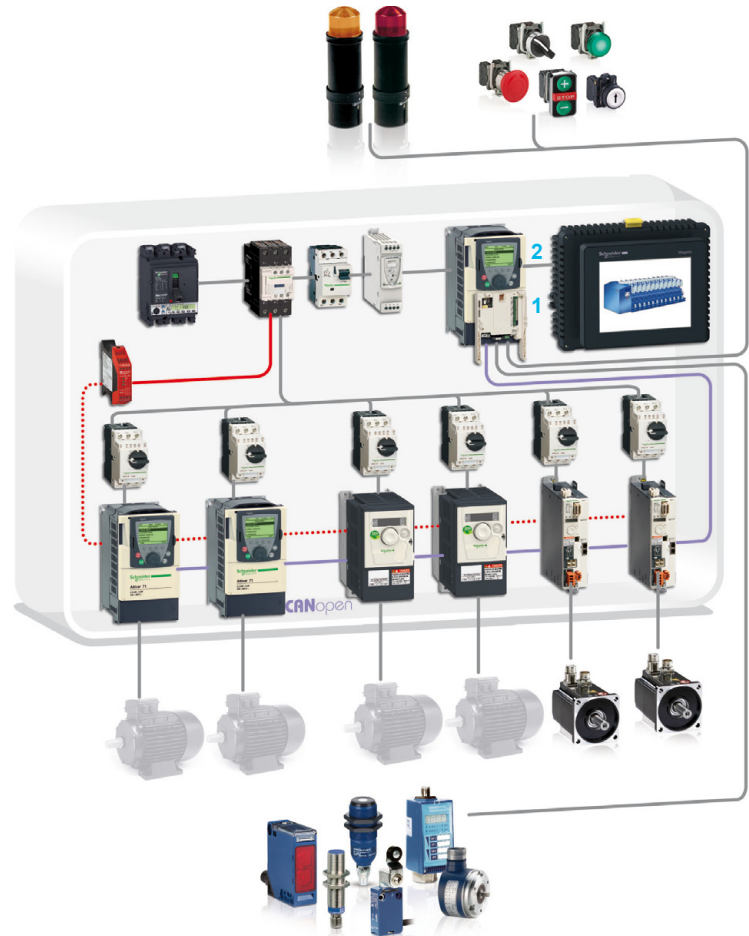

- 1 Altivar IMC card
- 2 Altivar 61/71 variable speed drive

Altivar IMC integrated controller card CANopen port

The Altivar IMC integrated controller card has a built-in 9-way male SUB-D CANopen port and acts as the CANopen master.

The bus consists of a master station, the Altivar IMC card, and slave stations. The master is in charge of configuration, exchanges and diagnostics to the slaves.

The CANopen bus is used to manage a variety of slaves such as:

- Discrete slaves
- Analog slaves
- Variable speed drives
- Motor starters
- Etc.

CANopen port

Standards		DS 301 V4.02, DR 303-1					
Class		Conformity class M20, limited to 16 slaves					
Data rate	Max. length (m)	20	100	250	500	1000	2500
	Data rate (kbps)	1000	500	250	125	50	20
Number of slaves		16 max. with max. limit of: 32 RPDOs and 32 TPDOs					
Connection		On 9-way male SUB-D port					

CANopen Optimized architecture

Wiring system, see page 4/24.


Communication

CANopen bus

CANopen bus master module

Magelis XBTGC HMI controllers, XBTGT/GK with control function

Tested Validated and Documented Architecture

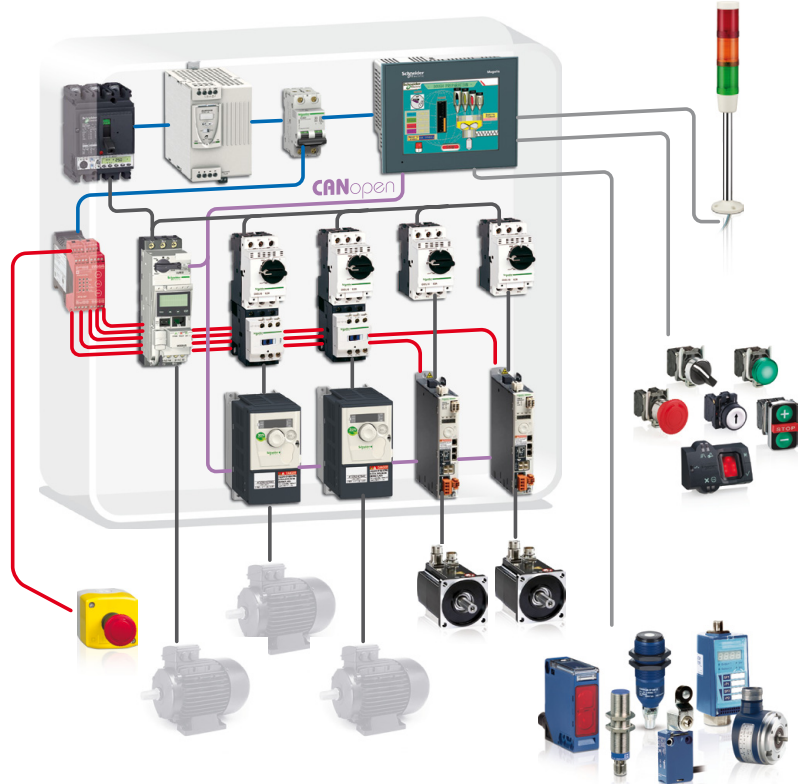

Presentation

The SoMachine software is used to configure the CANopen bus on the XBTGCHMI Controller.

The CANopen bus master module provides the control function for XBTGT (5.7", 10.4", 12.1" or 15") and XBTGK (5.7" or 10.4") Advanced Panels and is configured with the SoMachine software.

The various services available are:

- One or more profiles are supplied for Schneider Electric slaves such as ATV 312/61/71 variable speed drives and Lexium 32 servo drives. This makes it possible to configure the slave according to a predefined mode. Profiles provide a defined operating mode so that there is no need for users to configure the mode.
- For third-party slaves
 - The user can choose from a list which can be modified. This simply involves importing an EDS (Electronic Data Sheet) description file
 - The slave can be positioned on the bus: the slave number, speed, monitoring, etc. can be defined
 - The user can select variables from the list of variables managed by the slave
 - A link between variables and the data exchanged
 - Symbolization of data exchanged

CANopen Optimized architecture


Wiring system, see page 4/24.

Communication

CANopen bus

CANopen bus master module

Magelis XBTGC HMI controllers, XBTGT/GK with control function

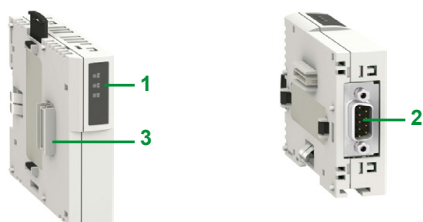

XBTZGCCAN


Description

The **XBTZGCCAN** CANopen bus master module consists of:

- 1 3 LEDs (PWR, RUN, ERR) providing details of the power supply status and module operation
- 2 A 9-way male SUB-D connector for connecting to the CANopen bus
- 3 A connector for connecting to the XBTGC HMI Controller

Reference

Description	Reference	Weight kg/ lb
CANopen bus master module for Magelis XBTGC HMI Controller. Conformity class M10	XBTZGCCAN	0.100/ 0.220

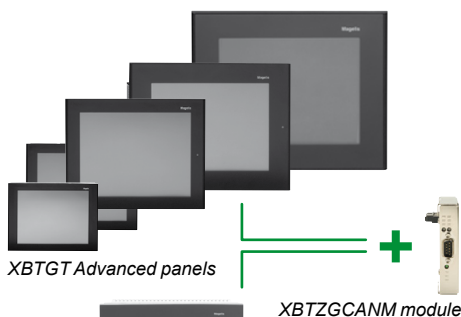

XBTZGCANM module



Advanced panels XBTGK

HMI function: Magelis XBTGT/GK Advanced Panels

+

Control function: XBTZGCANM CANopen master module


Description

The **XBTZGCANM** CANopen bus master module consists of:

- 1 3 LEDs (PWR, RUN, ERR) providing details of the power supply status and module operation
- 2 A 9-way male SUB-D connector for connecting to the CANopen bus
- 3 A connector for connecting to the rear of the Magelis XBTGT/GK Advanced Panels
- 4 Positions for fixing screws

Reference

Description	Reference	Weight kg/ lb
CANopen bus master module for Magelis XBTGT/GK Advanced Panels Conformity class M10	XBTZGCANM	0.100/ 0.220



XBTZGCANM

Communication

Distributed I/O on CANopen bus with Modicon OTB (IP 20)

For Magelis XBTGC HMI controllers, XBTGT/GK with control function, Altivar IMC drive controller



OTB1C0DM9LP
CANopen bus interface module

Presentation

The Modicon OTB offer proposes fewer references relating to spare parts and accessories that are required for creating an island.

The Modicon OTB offer has also been designed to be as simple as possible. This offer, compatible with Magelis XBTGC HMI controllers, XBTGT/GK with control function and Altivar IMC drive controller, includes 2 communication bases (interface modules) for the various types of fieldbus:

- CANopen bus,
- Modbus RS 485 Serial Line.

Inputs and outputs are directly integrated in the interface modules. Each base incorporates 20 I/O:

- 12 $\pm$ 24 V inputs,
- 6 relay outputs,
- 2 $\pm$ 24 V solid-state outputs.


With its range of I/O expansions, the Modicon OTB offer provides a wide modularity: a base can be fitted with up to 7 digital I/O modules **TM2 D●●** or analogue I/O modules **TM2 A●●**. The expansion modules, like the interface modules, simply clip-on to 35 mm (1.378 in.) symmetrical rail and enable configurations of up to 244 digital I/O and up to 42 analogue I/O channels, or a mixture of both types (within the limit of 7 expansion modules), to be obtained.

Sensors and actuators are connected to the interface modules and I/O expansion modules using removable screw terminal blocks.

The Modicon OTB module range provide an IP 20 degree of protection.

To simplify sensor and actuator connections, as well as linking commons, the Modicon OTB offer also includes a commoning module **OTB9ZZ61JP**. This module, as the other modules of the Modicon OTB range, allows the through connection of the internal bus or network (passively in this case) and enables connection of the commons in two isolated groups for each commoning module.

Configuration of interface modules

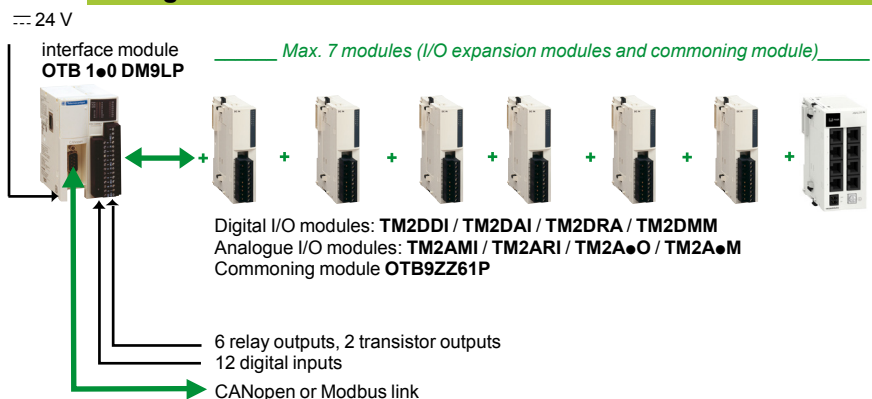

Communication

Distributed I/O on CANopen bus with Modicon OTB (IP 20)

For Magelis XBTGC HMI controllers, XBTGT/GK with control function, Altivar IMC drive controller

Description



The Modicon **OTB1●0 DM9LP** (1) interface modules comprise:

- 1 An access door.
- 2 Indicator lights:
 - module and communication status (PWR, RUN, ERR, COM, STAT)
 - I/O states (IN● and OUT●)
- 3 A connector for expansion modules (right-hand side).
- 4 Two removable screw terminal connectors for connection of inputs/outputs.
- 5 or 6 Depends on model:
 - 5 A SUB-D 15-way connector for connection CANopen bus with **OTB1C0DM9LP** model.
 - 6 Two RJ45 connectors for connection Modbus serial link with **OTB1S0DM9LP** model.
- 7 Terminal for connection of $\sim$ 24 V supply.
- 8 One RJ45 connector for operating system update of interface.

Via access door 1

- 9 Two or three coding wheels (depending on model) for OTB island address and communication data rate adjustment.

Mounting: the interface modules is mounted on 35 mm (1.378 in.) symmetrical $\perp$ rail. Mounting kit **TWDXMT5** (supplied in lots of 5) allows plate or panel mounting.

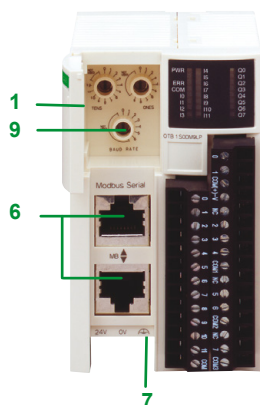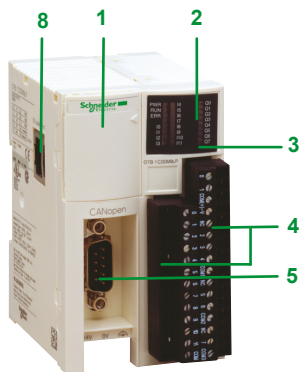

OTB1C0DM9LP



OTB1S0DM9LP



OTB9ZZ61JP

Interface modules with integrated digital I/O

Supply voltage	Number and type of integrated I/O			Connection by Link	Reference	Weight kg/ lb
	Inputs	Solid-state outputs	Relay outputs			
$\sim$ 24 V	12 I $\sim$ 24 V IEC type 1 (1 common)	2 O $\sim$ 24 V 0.3 A (1 common)	6 O $\sim$ 30 V/ $\sim$ 240 V 2 A (3 commons)	Removable screw terminal block	CANopen bus Modbus RS 485 serial link	0.195/ 0.430 0.190/ 0.430

Separate parts


Description	Application	Number of commons	Connection by	Number of wires	Reference	Weight kg/ lb
Commoning modules	For grouping input or output commons, 8 A maximum; inter-module	2 isolated groups	Removable screw terminal block	2 x 10	OTB9ZZ61JP	0.100/ 0.220
Mounting kit <i>Sold in lot of 5</i>	Plate or panel mounting of modules	—	—	—	TWDXMT5	—
Software and documentation	Configuration software "Modicon Configuration Tool-Lite" and hardware user guide	—	—	—	FTXES01	0.050/ 1.102

Connection accessories

Description	Application	Reference	—
CANopen bus	Cabling system: junction boxes, cables, cordsets, IP 20 and IP 67 accessories	See page 4/20	
Modbus serial link	Cabling system: tap-off, hub, cables, cordsets, line end adapter	please refer to our website www.schneider-electric.com	

(1) Only the communication part 5, 6 and 9 is dedicated to each model and can differ, the general description remains the same.

CANopen Optimized architecture

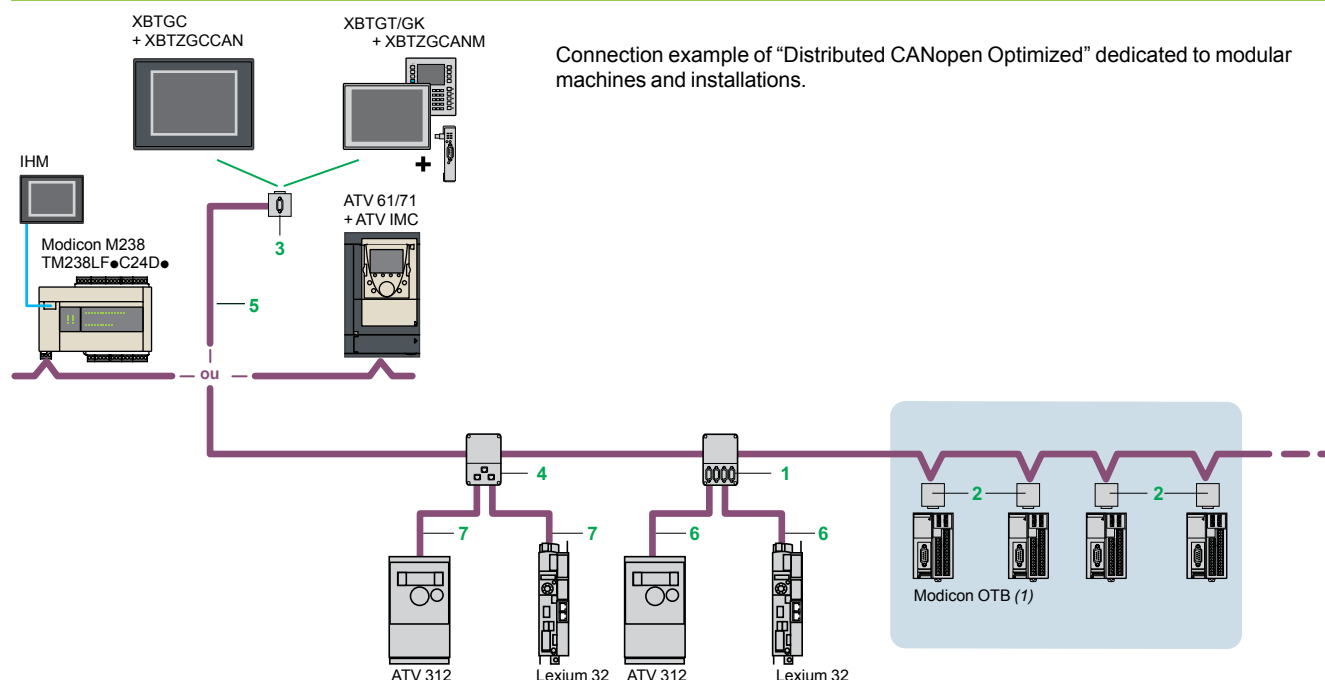

Connection example of "Distributed CANopen Optimized" dedicated to modular machines and installations.

Références



TSXCANTDM4



VW3CANTAP2



TSXCANKCD F90T



TSXCANKCD F180T



TSXCANKCD F90TP



TCSCAR013M120

Standard junction boxes and connectors

Description	Composition	Item	Length m/ft	Unit reference	Weight kg/ lb
CANopen IP 20 tap junction box	4 SUB-D ports. Screw terminal blocks for connection of main cables Line end adapter	1	—	TSXCANTDM4	0.196/ 0.432
IP 20 connectors CANopen 9-way SUB-D female. Line end adapter switch	Elbowed (90°)	2	—	TSXCANKCDF90T	0.046/ 0.101
	Straight (2)	—	—	TSXCANKCDF180T	0.049/ 0.108
	Elbowed (90°) with 9-way SUB-D connector for connection to PC or diagnostic tool	3	—	TSXCANKCDF90TP	0.051/ 0.112
M12 connectors IP 67	Male	—	—	FTXCN12M5	0.050/ 0.110
	Female	—	—	FTXCN12F5	0.050/ 0.110
CANopen IP 20 tap junction box for Altivar and Lexium 05	2 x RJ45 ports	4	—	VW3CANTAP2	0.250/ 0.551
Daisy chain taps	Equipped with: - 2 spring terminal blocks for connecting the CANopen bus in a daisy chain - 1 preassembled cordset with an RJ45 connector for connecting the drive	—	0.6/1.97	TC SCTN026M16M	—
	Equipped with: - 2 RJ45 connectors for connecting the CANopen bus in a daisy chain - 1 preassembled cordset with an RJ45 connector for connecting the drive	—	0.3/0.98	TC SCTN023F13M03	—
CANopen line terminators	For RJ45 connector Sold in packs of 2	—	—	TCSCAR013M120	—
	For screw terminal connector Sold in packs of 2	—	—	TCSCAR01NM120	—

(1) Modicon OTB product range. See page 4/18.

(2) For connection to an integrated controller card Altivar IMC.

References (continued)

Standard IP 20 formed cables

Description	Application	Item	Length m/ft	Unit reference	Weight kg/ lb	
CANopen cables (2 x AWG 22 2 x AWG 24)	For standard environments (2), CE marking: low fume emission. Halogen-free. Non flame propagating (IEC 60332-1)	5	50/ 164.04	TSXCANCA50	4.930/ 10.869	
			100/ 328.08	TSXCANCA100	8.800/ 19.401	
			300/ 984.25	TSXCANCA300	24.560/ 54.146	
	For standard environments (2), UL certified, CE marking: non flame propagating (IEC 60332-2)	5	50/ 164.04	TSXCANCB50	3.580/ 7.893	
			100/ 328.08	TSXCANCB100	7.840/ 17.284	
			300/ 984.25	TSXCANCB300	21.870/ 48.215	
	For standard environments (2) or mobile installation, CE marking: low fume emission. Halogen-free. Non flame propagating (IEC 60332-1). Oil resistant	5	50/ 164.04	TSXCANCD50	3.510/ 7.738	
			100/ 328.08	TSXCANCD100	7.770/ 17.130	
			300/ 984.25	TSXCANCD300	21.700/ 47.840	
CANopen formed cables 1 x 9-way SUB-D female connector at each end.	For standard environments (2), CE marking: low fume emission. Halogen-free. Non flame propagating (IEC 60332-1)	—	0.3/ 0.98	TSXCANCADD03	0.091/ 0.201	
			1/ 3.28	TSXCANCADD1	0.143/ 0.315	
			3/ 9.84	TSXCANCADD3	0.295/ 0.650	
			5/ 16.40	TSXCANCADD5	0.440/ 0.970	
	For standard environments (2), UL certified, CE marking: non flame propagating (IEC 60332-2)	—	0.3/ 0.98	TSXCANCBDD03	0.086/ 0.190	
			1/ 3.28	TSXCANCBDD1	0.131/ 0.289	
			3/ 9.84	TSXCANCBDD3	0.268/ 0.591	
			5/ 16.40	TSXCANCBDD5	0.400/ 0.882	
	CANopen formed cables	Formed cables with 1 x 9-way SUB-D female connector and 1 x RJ45 connector	6	0.5/ 1.64	TCSCCN4F3M05T	0.100/ 0.220
				1/ 3.28	TCSCCN4F3M1T	0.100/ 0.220
				3/ 9.84	VW3M3805R010(2)	0.100/ 0.220
				1/ 3.28	VW3M3805R030(2)	0.300/ 0.661
				3/ 9.84	TCSCCN4F3M3T	0.160/ 0.353
				0.5/ 1.64	TLACDCBA005	0.100/ 0.220
				1.5/ 4.92	TLACDCBA015	0.120/ 0.265
				3/ 9.84	TLACDCBA030	0.190/ 0.419
Formed cables with 2 x 9-way SUB-D connectors, 1 female and 1 male		—	5/ 16.40	TLACDCBA050	0.350/ 0.772	
IP 20 connection accessories						
CANopen connector for Altivar 71 (3)		9-way SUB-D female. Line end adapter switch. 180° cable entry	—	—	VW3CANKCDF180T	0.100/ 0.220
Adapter for Altivar 71 variable speed controller	CANopen SUB-D to RJ45 adapter	—	—	VW3CANA71	0.100/ 0.220	
Formed CANopen cables	1 RJ45 connector at each end.	7	0.3/ 0.98	VW3CANCARR03	0.100/ 0.220	
			1/ 3.28	VW3CANCARR1	0.100/ 0.220	
CANopen bus adapter for Lexium 17D	Hardware interface for link conforming to the CANopen standard + 1 connector for connection of PC terminal	—	—	AM02CA001V000	0.110/ 0.243	
Y connector	CANopen/Modbus	—	—	TCSCTN011M11F	0.100/ 0.220	



VW3CANA71



AM02CA001V000



FTXDP21●●

(1) Standard environment: without any particular environmental restrictions, operating temperature between + 5 °C and + 60 °C, (+ 41 °F and + 140 °F) and for fixed installation. Harsh environments: resistant to hydrocarbons, industrial oils, detergents, solder splashes, hygrometry up to 100%, saline environment, wide temperature variations, operating temperature between - 10 °C and + 70 °C (+ 14 °F and + 158 °F), or mobile installation.

(2) Cable equipped with line end adapter.

(3) For variable speed controllers ATV71H●●●M3, ATV71HD11M3X, HD15M3X, ATV71H075N4... HD18N4, this connector can be replaced by connector TSXCANKCDF180T.



Presentation

Schneider Electric has selected CANopen for its machines and installations because of its wealth of functions and its resulting benefits in the automation world. This decision was based on the general acceptance of CANopen, and the fact that CANopen products are increasingly used in control system architectures. CANopen is an open network supported by more than 400 companies worldwide, and promoted by CAN in Automation (CiA). CANopen conforms to standards EN 50325-4 and ISO 15745-2.

CANmotion and CANopen characteristics

CANmotion and CANopen buses are multi-master buses ensuring reliable, deterministic access to real-time data in control system equipment. The CSMA/CA protocol is based on broadcast exchanges, sent cyclically or on an event, to ensure optimum use of the bandwidth.

A message handling channel can also be used to define slave parameters.

CANmotion and CANopen buses are a set of profiles on CAN systems with the following characteristics:

- Open bus system
- Data exchanges in real time without overloading the protocol
- Modular design allowing modification of size
- Interconnection and interchangeability of devices
- Standardized network configuration
- Access to all device parameters
- Synchronization and circulation of cyclical and/or event-controlled process data (short system response time)

Connectable Schneider Electric devices

The following Schneider Electric devices can be connected to the CANopen bus:

- Ø 58 mm OsiSense XCC multi-turn absolute encoders: **XCC3510P**, **XCC3515CS84CB**
- TeSys U starter-controllers with communication module: **LULC08**
- TeSys T motor management system with controller: **LTMRC08**
- Modicon **TM5** Transmitter/Receiver modules (IP 20)
- Modicon **TM7** I/CANopen interface blocks (IP 67)
- Preventa safety configurable controllers **XPSMC16ZC**, **XPSMC32ZC**.
- Altivar 61/71 variable speed drives for asynchronous motors (0.75...630 kW): **ATV61H/71H** ●●●●●
- Altivar 32 variable speed drives for asynchronous motors (0.18...15Kw): **ATV32H**●●●●●
- Lexium 32 servo drives (0.15...7 kW) for BSH/BSM servo motors: **LXM32A●D**●●●●●
- Lexium **SD3** stepper drives
- Lexium integrated drives: **ILA1B**, **ILE1B** and **ILS1B**

CANopen Performance architecture

Wiring system, see page 4/38.

4



TeSys U + communication module LUL C08



Modicon TM5 Transmitter/Receiver module



Modicon TM7 CANopen interface Blocks



Preventa XPSMC



Altivar 71



Altivar 32



LEX32A




Lexium ILA1B

Tested Validated Documented Architectures

Modicon M258 logic controller

Modicon LMC058 motion controller

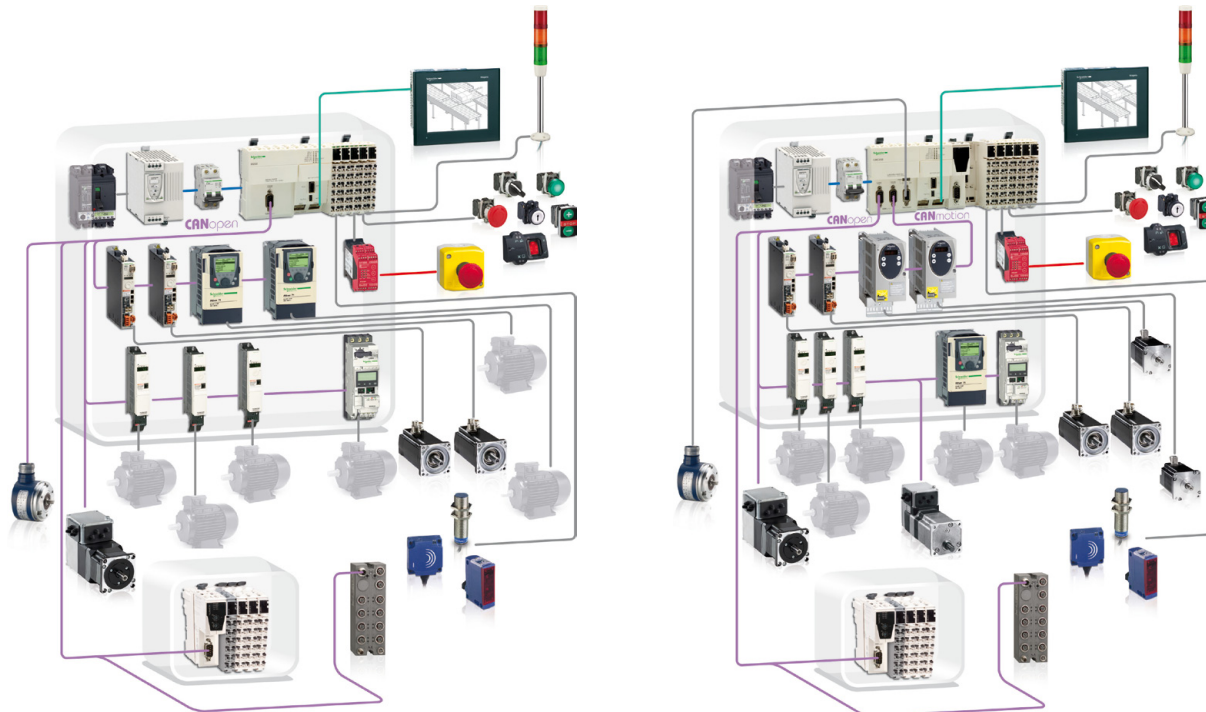

CANopen port on M258 logic controller and LMC058 motion controller

Modicon M258 logic controllers (referenced **TM258LF●●●●**) and all LMC058 motion controllers include a 9-way male SUB-D CANopen port and act as the CANopen master.

The bus consists of a master station, M258 logic controller or LMC058 motion controller and slave stations. The master is in charge of configuration, exchanges and diagnostics to the slaves.

The CANopen bus is a communication bus and is used to manage a variety of slaves, such as:

- Digital slaves
- Analog slaves
- Variable speed drives
- Motor starters
- Etc.

CANopen port

Standards	DS 301 V4.02, DR 303-1								
Class	Conformity class M10, limited to 63 slaves								
Data rate	Max. length (m)	20	40	100	250	500	1000	2500	5000
	Data rate (kbps)	1000	800	500	250	125	50	20	10
Number of slaves	63 max. with max. limit of: 64 TDPOs/64 RPDOs								
Connection	On 9-way male SUB-D port								

CANmotion port on LMC058 motion controllers

LMC058 motion controllers include a 9-way male SUB-D CANmotion port and act as the CANmotion master.

This CANmotion connection offers the option of configuring and controlling up to 8 Lexium 32 drives and/or Lexium SD3 stepper drives.

The CANmotion bus cycle time ensures that the axis positions will be refreshed.


Communication

Modicon TM5 (IP 20) interface module for distributed I/O on CANopen bus
for Modicon M258 logic controller, Modicon LMC058 and Modicon LMC078 motion controllers

Presentation

To enhance its "Flexible machine Control" concept, a key component of MachineStruxure™, the Modicon M258 logic controller, Modicon LMC058 and Modicon LMC078 motion controller offers, Schneider Electric offers a Modicon TM5 CANopen interface module providing CANopen access to distributed I/O.

- M258 logic controller, Modicon LMC058 and Modicon LMC078 motion controllers offer the possibility of creating distributed I/O islands via the TM5 expansion bus, which enables the architecture to be adapted to match the topology of the machine as closely as possible and reduces wiring costs.
- The Modicon TM5 CANopen interface module allows the connection of distributed I/O islands (sensors and actuators) that are distributed over machines via the CANopen fieldbus. These islands communicate on the CANopen bus.

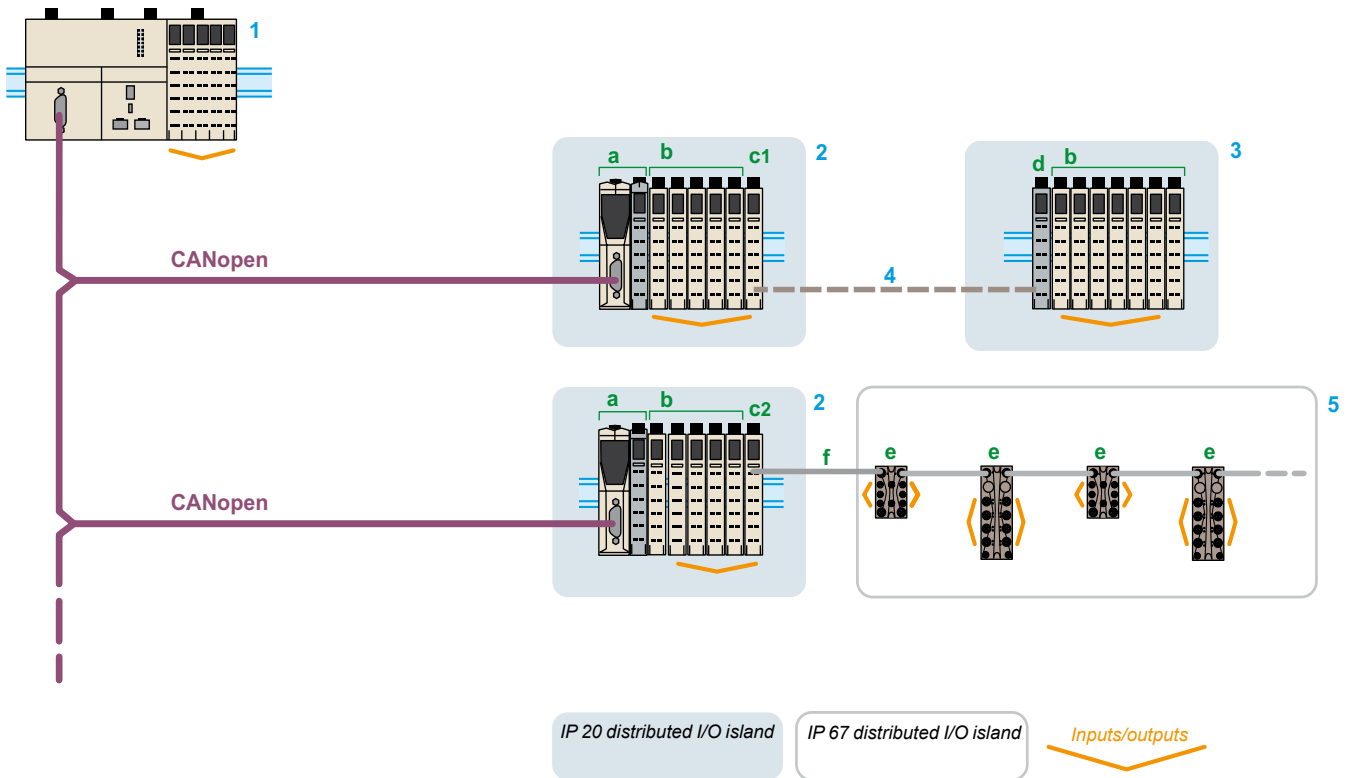

- 1 Modicon M258 logic controller, Modicon LMC058 or Modicon LMC078 motion controllers: CANopen bus masters.
- 2 IP 20 distributed I/O islands (1). Composition: TM5 CANopen interface module (slave) (a) + TM5 compact block or I/O modules (b) + transmitter modules TM5SBET1 (c1)/TM5SBET7 (c2).
- 3 IP 20 distributed I/O island (1). Composition: receiver module TM5SBER2 (d) + TM5 compact block or TM5 I/O modules (b).
- 4 TM5 expansion bus (1). Composition: remote I/O connection cable TCSXCNNXNX100.
- 5 IP 67 distributed I/O island (2). Composition: TM7 IP67 I/O blocks (digital or analog) (e) + expansion bus cable TM7TCSXCNNX100 (f).

(1) Modicon TM5 extension modules: see page 3/38.

(2) Modicon TM7 I/O blocks and TM7 expansion bus cables: see page 3/64.

Communication

Modicon TM5 (IP 20) interface module for distributed I/O on CANopen bus for Modicon M258 logic controller, Modicon LMC058 and Modicon LMC078 motion controllers



Presentation


The TM5 CANopen interface module offer consists of 4 parts to be ordered separately (1):

- A bus base, TM5ACBN1 (2)
- A CANopen electronic interface module, TM5NCO1
- A power distribution electronic module, TM5SPS3
- A removable terminal block, TM5ACTB12PS

The modules can be mechanically assembled on the bus base before mounting on a symmetrical rail.

These modules offer the following advantages:

- Removable terminal block
- Spring terminals for connecting the power supply of the interface module and the I/O expansion modules quickly, with no tools required. In addition, the quality of the spring terminals avoids the need for periodic retightening

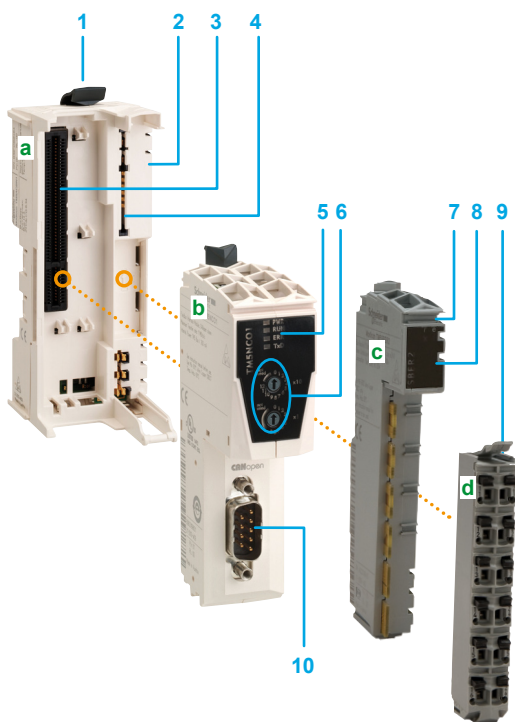

Description

The CANopen interface module is a combination of 4 products: A TM5ACBN1 bus base (a) + a TM5NCO1 CANopen electronic interface module (b) + a TM5SPS3 power distribution electronic module (c) (1) + a TM5ACTB12PS removable terminal block (d).

This assembly comprises:

- 1 A mechanical locking lever for mounting/dismounting on a symmetrical rail
- 2 On the side of the base, an expansion bus connection for the link with the next module
- 3 A slot for the CANopen interface module with connector
- 4 A slot for the power distribution module with connector
- 5 A channel and interface module diagnostics LED display block
- 6 Two rotary selector switches for addresses on the bus
- 7 A slot for labelling (label-holder)
- 8 A channel and power distribution module diagnostics LED display block
- 9 A removable spring terminal block with locking clip and slots for coloured identifiers
- 10 A 9-way male SUB-D connector for connecting to the CANopen bus

(1) Also sold in kit, see page 4/27.

(2) Supplied with 2 protective plates, TM5ACPL10 and TM5ACPR10.

Modicon TM5 (IP 20) interface module for distributed I/O on CANopen bus for Modicon M258 logic controller, Modicon LMC058 and Modicon LMC078 motion controllers

Specifications

Conformity with standards		IEC 61131-2
Product certifications		C€, UL, CSA, GOST-R and c-Tick
Temperature	Operation	Horizontal mounting: - 10...+ 60°C (1) Vertical mounting: - 10...+ 50°C
	Storage	- 40...+ 70°C
Relative humidity		95% max. without condensation
Degree of protection		IP 20 conforming to IEC 61131-2
Degree of pollution		≤ 2 conforming to IEC 60664
Altitude	Operation	0...2000 m
	Storage	0...3000 m
Vibration resistance (mounting on rail)		5...8.4 Hz (3.5 mm fixed amplitude) 8.4...150 Hz (9.8 m/s ² fixed acceleration)
Shock resistance		147 m/s ² (15 gn) for 11 ms
Connector	Type	Removable spring terminals
	Number of operations	50 min.

Electromagnetic compatibility

Electrostatic discharges conforming to EN/IEC 61000-4-2		8 kV: air discharge 4 kV: direct contact
Electromagnetic fields conforming to EN/IEC 61000-4-3		10 V/m (80 MHz...2 GHz) 1 V/m (2...2.7 GHz)
Fast transients conforming to EN/IEC 61000-4-4		Supply: 2 kV I/O: 1 kV Shielded cable: 1 kV (repetition frequency 5 and 100 kHz)
Immunity to overvoltages, 24 V$\overline{\text{---}}$ circuit conforming to EN/IEC 61000-4-5		1 kV in common mode
		0.5 kV in differential mode
Induced magnetic fields conforming to EN/IEC 61000-4-6		10 Vrms (0.15...80 MHz)
Conducted emissions conforming to EN/IEC 55011/CISPR11		150...500 kHz, quasi-peak at 79 dBμV
		500 kHz...30 MHz, quasi-peak at 73 dBμV
Radiated emissions conforming to EN/IEC 55011/CISPR11		30...230 MHz, 10 m @ 40 dBμV/m
		230 MHz...1 GHz, 10 m @ 47 dBμV/m

(1) Some devices have an operating temperature which requires a weighting factor between 55° and 60°C and may be subject to other restrictions. Refer to the user guide, which can be downloaded from www.schneider-electric.com

Communication


Modicon TM5 (IP 20) interface module for distributed I/O on CANopen bus for Modicon M258 logic controller, Modicon LMC058 and Modicon LMC078 motion controllers



TM5NCO1



TM5SPS3

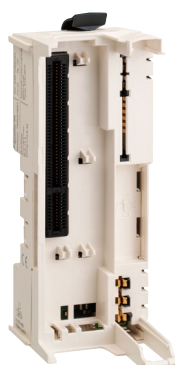

TM5ACBN1



TM5ACTB12PS



TM5ACTLC100




TM5ACTCH100



TM5ACLPL10



TM5ACLPR10



TM5NCO1K



References

CANopen electronic interface module

Description	Characteristics	Reference	Weight kg/ lb
CANopen electronic interface module	CAN bus communication module with CANopen protocol Module colour: white	TM5NCO1	0.025/ 0.055

Power distribution electronic module

Input power supply	Characteristics	Reference	Weight kg/ lb
24 V ~	Power supply for the CANopen bus interface and I/O expansion modules Module colour: grey	TM5SPS3	0.025/ 0.055

Bus base

Power supply	Characteristics	Unit reference	Weight kg/ lb
24 V ~	Use for TM5NCO1 and TM5SPS3 electronic modules Supplied with 2 protective plates TM5ACPL10 and TM5ACPR10 Colour of the base: white	TM5ACBN1	0.020/ 0.044

Terminal block

Used for	Characteristics	Unit reference	Weight kg/ lb
Power distribution electronic module TM5SPS3	12 spring terminals Terminal block colour: grey	TM5ACTB12PS	0.016/ 0.035

Accessories

Description	Use for	Colour	Sold in lots of	Unit reference	Weight kg/ lb
Plain text cover holder (label-holder)	Labelling the I/O channel terminal blocks	Transparent	100	TM5ACTCH100	0.200/ 0.441
Terminal block shield locking clip (Order with plain text cover holder TM5ACTCH100)	Locking plain text cover holder TM5ACTCH100	Transparent	100	TM5ACTLC100	0.100/ 0.220
Precut sheet of paper labels	Plain text cover holder TM5ACTCH100	White	100	TM5ACTLS100	
Coloured plastic identifiers	Labelling 16 connection channel terminals	White	1	TM5ACLITW1	0.015/ 0.033
		Red	1	TM5ACLITR1	
		Blue	1	TM5ACLITB1	
Metal tool	Inserting/removing TM5ACLIT•1 identifiers	Black	1	TM5ACLT1	0.030/ 0.066
Retaining plates for bus bases	Held on the left side	White	10	TM5ACLPL10	0.004/ 0.009
	Held on the right side	White	10	TM5ACLPR10	
Locking clips	For electronic modules	Black	100	TM5ACADL100	0.001/ 0.002

Interface module kit


Description	Composition	Reference	Weight kg/ lb
Kit including a CANopen electronic interface module, a power distribution electronic module, a bus base and a terminal block	TM5NCO1 + TM5SPS3 + TM5ACBN1 + TM5ACTB12PS	TM5NCO1K	0.076/ 0.168

Configuration software

- SoMachine software, see page 5/2
- Performance distributed I/O configuration software, please consult our site www.schneider-electric.com

(1) Modicon TM5 Transmitter/Receiver modules (see page 3/38)

Communication
Distributed I/O on CANopen bus with Modicon
TM7 interface blocks IP 67
for Modicon M258 logic controller and Modicon LMC058
motion controller

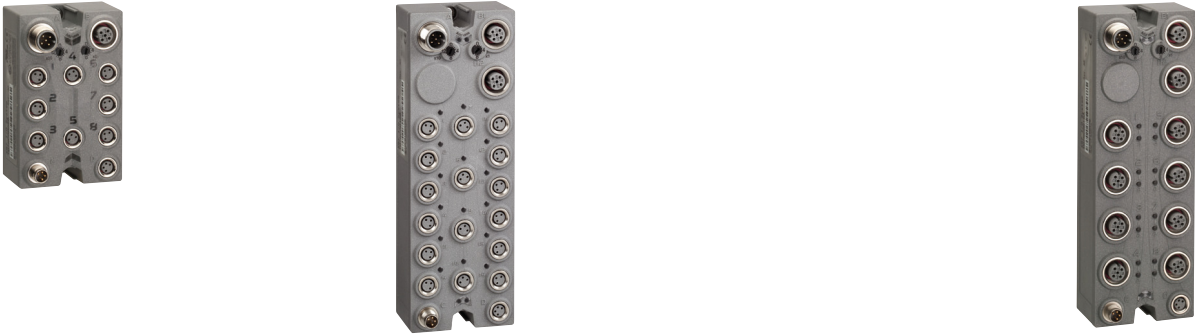Applications		CANopen bus interface with digital I/O	
			
Degree of protection		IP 67	IP 67
Type of housing		Plastic	Plastic
Modularity (number of channels)	Max. number of digital channels	8 channels configurable as inputs or outputs	16 channels configurable as inputs or outputs
	Digital inputs	0...8 according to software configuration	0...16 according to software configuration
	Digital outputs	0...8 according to software configuration	0...16 according to software configuration
Digital inputs	Voltage/current	24 V $\pm$ /4.4 mA	24 V $\pm$ /4.4 mA
	Type	Sink (1)	Sink (1)
	IEC 61131-2 conformity	Type 1	Type 1
Digital outputs	Voltage	24 V $\pm$	24 V $\pm$
	Type	Transistor/Source (2)	Transistor/Source (2)
	Current per output	0.5 A max.	0.5 A max.
	Current per interface I/O block	4 A max.	4 A max.
Sensor/actuator power supply	Voltage	24 V $\pm$	24 V $\pm$
	Max. current	500 mA for all channels	500 mA for all channels
	Protection against	Overloads, short-circuits and reverse polarity	Overloads, short-circuits and reverse polarity
Connection	CANopen bus	Bus input connector	A-coded 5-way male M12
		Bus output connector	–
	TM7 expansion bus	Bus input connector	–
		Bus output connector	–
	Digital I/O channels	Sensor connector	B-coded 4-way female M12
		Actuator connector	B-coded 4-way female M12
	Interface I/O block power supply	Input connector	3-way female M8, 1 channel per connector
		Output connector	3-way female M8, 1 channel per connector
		Input connector	4-way male M8
		Output connector	4-way male M8
Diagnostics	By interface I/O block	Yes	Yes
	By channel	Yes	Yes
	By communication	Yes	Yes
	On CANopen bus	Yes	Yes
Type of CANopen interface I/O block		TM7NCOM08B	TM7NCOM16B
Pages		4/33	4/33
		(1) Sink inputs: positive logic (2) Source outputs: positive logic	
		TM7NCOM16A	
		4/33	

Presentation

To enhance its "Flexible machine Control" concept, a key component of MachineStruxure™, Schneider Electric offers Modicon TM7 IP 67 blocks for mounting outside electrical cabinets, directly on the installation. The IP 67 protection of these blocks enables them to be used within processes or machines in harsh environments (splashing water, oil, dust, etc.).

They have the following characteristics:

- Dust and damp proof
- Robust and compact
- Rapid wiring, economical to use


The CANopen interface I/O blocks enable sensors and actuators distributed over machines to be connected via the CANopen fieldbus. These interface I/O blocks communicate on the bus. They have one part for connecting sensors and actuators using M8 or M12 connectors and one part for connection to the CANopen fieldbus.

The interface I/O block offer comprises IP 67 blocks that connect to a CANopen bus and have digital channels that can be configured as inputs or outputs, including:

- A CANopen interface block with 8 configurable I/O for connection via M8 connector
- Two CANopen interface blocks with 16 configurable I/O

This offer is completed with :

- Digital I/O expansion blocks, see page 3/64
- Analog input expansion blocks, see page 3/64
- Power distribution block, see page 3/64
- Connection accessories, see page 4/34

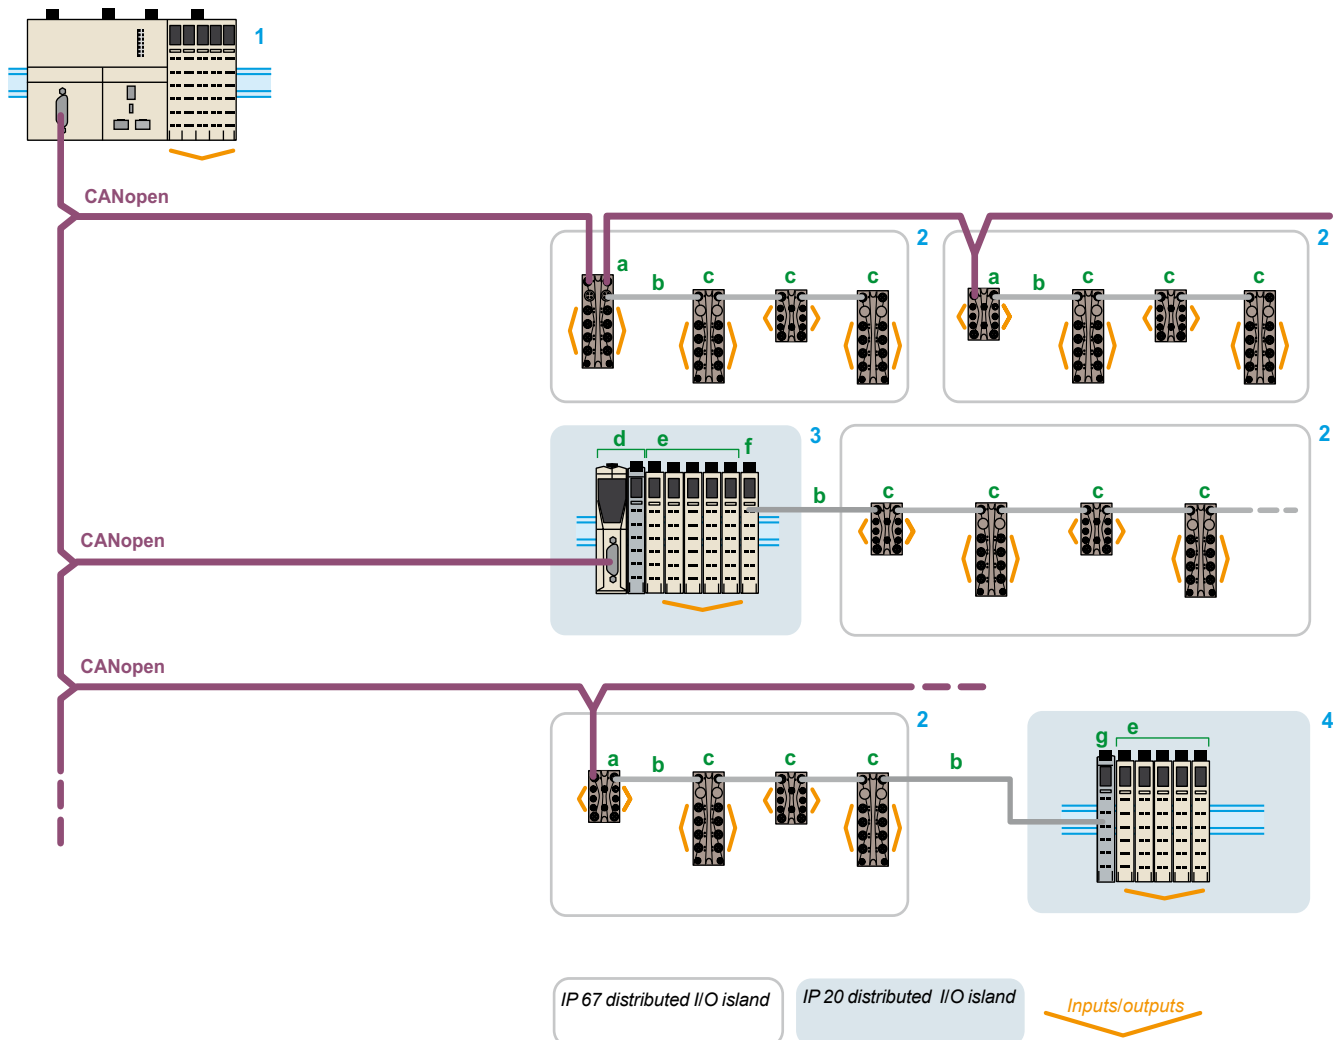

1 Modicon M258 logic controller or Modicon LMC058 motion controller: CANopen bus masters.

2 IP 67 distributed I/O islands. Composition: TM7 CANopen interface block (slave) with digital I/O (a) + TM7 expansion bus cable (b) + TM7 digital/analog blocks (c) (1).

3 IP 20 distributed I/O island. Composition: TM5 CANopen interface module (slave) (d) + TM5 compact (2) or TM5 modules (e) (3) + transmitter module TM5SBET7 (f) (4).

4 IP 20 distributed I/O island. Composition: receiver module TM5SBER2 (g) (4) + TM5 modules (e) (3).

(1) Modicon TM7 Digital or analog block, see page 3/64

(2) Modicon TM5 compact blocks, see page 3/38

(3) Modicon TM5 digital modules, see page 3/42. Modicon TM5 analog modules, see page 3/50

(4) Modicon TM5 transmitter and receiver modules, see page 3/62



CANopen interface block with digital I/O



Communication bus status LED
Channel status LED

Power supply status LED

Diagnostics functions

The diagnostic monitoring of faults is indicated by LEDs on CANopen interface I/O blocks, expansion blocks and power distribution blocks and informs the control system (M258 logic controller or LMC058 motion controller) via the TM7 bus.

Each Modicon TM7 block has LEDs

- To display the status of the TM7 bus, the channel and the power supply
- For quick, precise location of a fault

There are several levels of diagnostics:

- Diagnostics per channel:
 - State of inputs
 - State of outputs
- Communication bus diagnostics:
 - On CAN bus (CANopen interface I/O block)
 - On TM7 expansion bus (CANopen interface I/O block and I/O expansion blocks).


Specifications

Conformity with standards		IEC 61131-2
Product certifications		C€, cURus, GOST-R and c-Tick, ATEX (II 3g EEx nA II T5, IP 67, Ta = 0...60°C)
Temperature	Operation	- 10...+ 60°C (14...140°F)
	Storage	- 25...+ 85°C (- 13...185°F)
Relative humidity		5...95% (without condensation)
Degree of pollution conforming to IEC 60664		2
Degree of protection conforming to IEC 61131-2		IP 67
Altitude	Operation	0...2000 m (0...6560 ft.) (1)
	Storage	0...3000 m (0...9842 ft.)
Vibration resistance conforming to IEC 60721-3-5 Class 5M3	DIN rail mounted	7.5 mm (0.295 in.) 2...8 Hz fixed amplitude
		20 m/s² (2 gn) 8...200 Hz fixed acceleration
		40 m/s² (4 gn) 200...500 Hz fixed acceleration
Shock resistance conforming to IEC 60721-3-5 Class 5M3		300 m/s² (30 gn) for 11 ms, 1/2 sine wave, type 1 shock
Connectors	Type	M8 and/or M12
	Number of operations	50 min.

Electromagnetic compatibility

Electrostatic discharges conforming to IEC/EN 61000-4-2		± 8 kV, criterion B (air discharge) ± 4 kV, criterion B (direct discharge)
Electromagnetic fields conforming to IEC/EN 61000-4-3		10 V/m, amplitude modulation 80% at 1 kHz (80 MHz...2 GHz) 1 V/m (2...2.7 GHz)
Fast transients conforming to IEC/EN 61000-4-4		Supply: 2 kV, criterion B I/O: 1 kV, criterion B Shielded cable: 1 kV, criterion B Repetition frequency: 5 and 100 kHz
Immunity to overvoltages, 24 V ~ circuit conforming to IEC/EN 61000-4-5		Supply: □ 1 kV (12 Ω), criterion B in common mode □ 0.5 kV (2 Ω), criterion B in differential mode Unshielded links: □ 1 kV (42 Ω), criterion B in common mode □ 0.5 kV (42 Ω), criterion B in differential mode Shielded links: □ 1 kV (12 Ω), criterion B in common mode □ 0.5 kV (2 Ω), criterion B in differential mode
Induced magnetic fields conforming to IEC/EN 61000-4-6		Line supply, I/O signal connections > 10 m (32.8 ft.) Functional earth connection: 10 Vrms, criterion A, amplitude modulation 80% at 1 kHz (150...80 MHz)
Conducted emissions conforming to EN 55011 (IEC/CISPR11)		150...500 kHz, peak 79 dB µV 500 kHz...30 MHz, peak 73 dB µV
Radiated emissions conforming to EN 55011 (IEC/CISPR11)		30...230 MHz, 10 m (32.8 ft) at 40 dB (µV/m) 230 MHz...1 GHz, 10 m (32.8 ft) at 47 dB (µV/m)

(1) Temperature reduction of 0.5°C (32.9°F) for every additional 100 m (328 ft.) altitude above 2000 m (6560 ft.).
Refer to the instruction sheet for each product, downloadable from www.schneider-electric.com

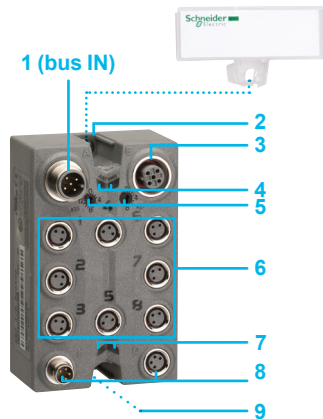


Description

CANopen interface I/O blocks

CANopen **8-channel** interface I/O blocks have the following on the front panel:

- 1 A male M12 connector (bus IN) for connecting the CANopen bus
- 2 A slot for the interface I/O block label (1)
- 3 A female M12 connector for connecting the TM7 expansion bus
- 4 Two bus diagnostic LEDs
- 5 CANopen address settings rotary switches
- 6 Eight female M8 connectors for connecting sensors and actuators with eight LEDs for indicating channel status
- 7 Two LEDs indicating the status of the sensor and actuator 24 V $\overline{\text{V}}$ power supplies
- 8 Two M8 connectors for connecting the 24 V $\overline{\text{V}}$ sensor and actuator power supplies: male for PWR IN, female for PWR OUT
- 9 Fixing using two $\varnothing$ 4 screws (not supplied) and connection of the functional earth when fixing the block on a metal support


4

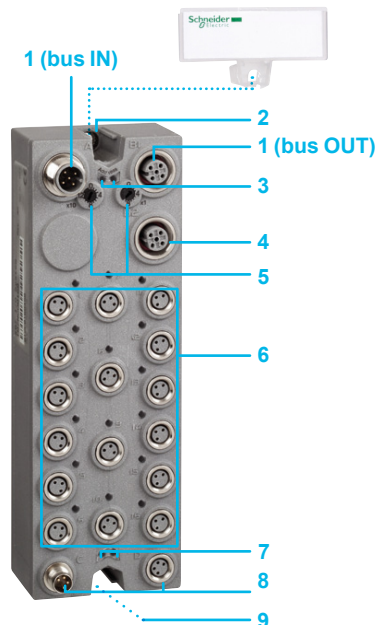

CANopen **16-channel** interface I/O blocks have the following on the front panel:

- 1 A male M12 connector (bus IN) and a female M12 connector (bus OUT) for connecting the CANopen bus
- 2 A slot for the interface I/O block label (1)
- 3 Two bus diagnostic LEDs
- 4 A female M12 connector for connecting the TM7 expansion bus
- 5 CANopen address settings rotary switches
- 6 Eight M12 connectors (2 channels per connector) or sixteen M8 connectors for connecting sensors and actuators with LEDs for indicating channel status
- 7 Two LEDs indicating the status of the sensor and actuator 24 V $\overline{\text{V}}$ power supplies
- 8 Two M8 connectors for connecting the 24 V $\overline{\text{V}}$ sensor and actuator power supplies: male for PWR IN, female for PWR OUT
- 9 Fixing using two $\varnothing$ 4 screws (not supplied) and connection of the functional earth when fixing the block on a metal support

(1) Label-holder supplied with IP 67 block

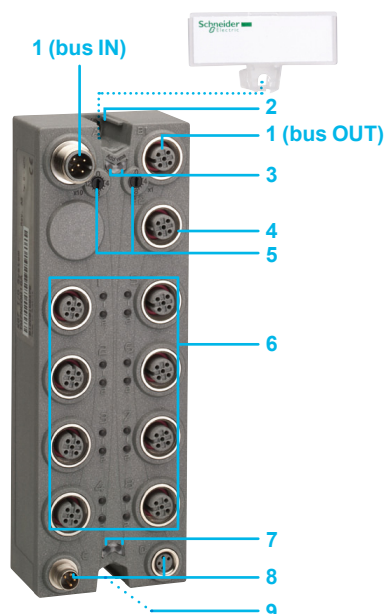

Communication

Distributed I/O on CANOpen bus with Modicon TM7 interface blocks IP 67
for Modicon M258 logic controller and Modicon LMC058 motion controller



TM7NCOM08B

Modicon TM7 CANOpen interface blocks with digital I/O

Max. no. of channels	Number, type of inputs	Number, type of outputs	Sensor/actuator connection	Communication bus	Reference	Weight kg/lb
8 I/O	8, sink (1)	8, transistor/ source (2)	8 female M8 connectors	CANopen, TM7 bus	TM7NCOM08B	0.195/0.430

16 I/O	16, sink (1)	16, transistor/ source (2)	16 female M8 connectors	CANopen, TM7 bus	TM7NCOM16B	0.320/0.705
--------	--------------	----------------------------	-------------------------	------------------	-------------------	-------------



TM7NCOM16B



TM7NCOM16A

16, sink (1)	16, transistor/ source (2)	8 female M12 connectors	CANopen, TM7 bus	TM7NCOM16A	0.320/0.705
--------------	----------------------------	-------------------------	------------------	-------------------	-------------

(1) Sink inputs: positive logic
(2) Source outputs: positive logic

Architecture, connecting cables

See page 4/38

Modicon TM7 I/O expansion blocks

See page 3/64

Connection accessories

See page 4/34

Separate parts

See page 4/37


Configuration software

- SoMachine software, see page 5/2
- Performance distributed I/O configuration software, please refer to our website www.schneider-electric.com

Communication



Distributed I/O on CANopen bus with Modicon
TM7 interface blocks IP 67
for Modicon M258 logic controller and Modicon LMC058
motion controller

CANopen architecture

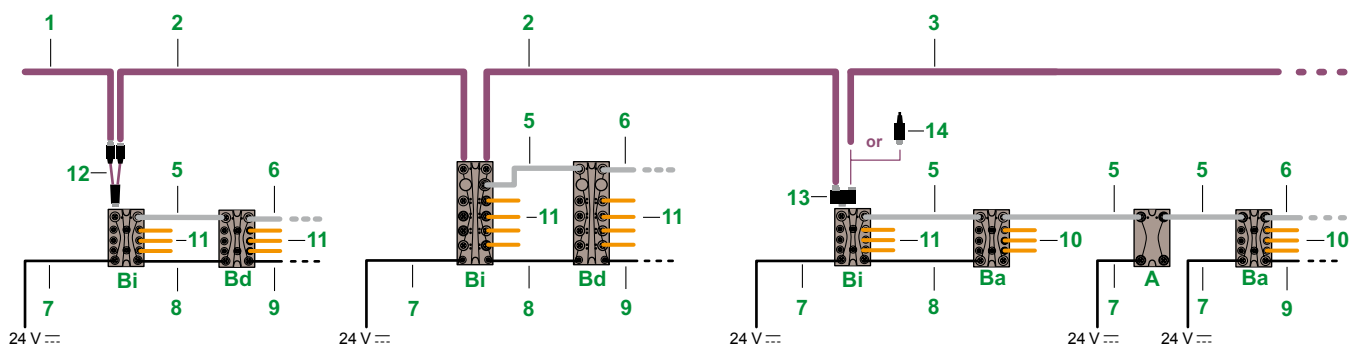

TM7 expansion bus architecture

TM5 NCO1 + TM5 SBET7

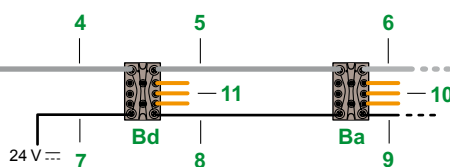


- A** Power distribution block
- Ba** Analog I/O expansion block
- Bd** Digital I/O expansion block
- Bi** CANopen interface I/O block


References

Cables for connection to the CANopen bus

Designation	Description	Item no.	Length m/ft	Reference	Weight kg/lb
CANopen bus connection cables (bus IN)	Equipped with one A-coded 5-way angled female M12 connector and 1 flying lead	1	1/3.28	TCSCCN2FNX1SA	0.089/0.196
			3/9.843	TCSCCN2FNX3SA	0.195/0.430
			10/32.81	TCSCCN2FNX10SA	0.563/1.241
			25/82.02	TCSCCN2FNX25SA	1.352/2.981
			1/3.28	TCSCCN1FNX1SA	0.089/0.196
	Equipped with one A-coded 5-way straight female M12 connector and 1 flying lead	1	3/9.843	TCSCCN1FNX3SA	0.195/0.430
			10/32.81	TCSCCN1FNX10SA	0.563/1.241
			25/82.02	TCSCCN1FNX25SA	1.352/2.981
CANopen bus daisy chain cables	Equipped with two A-coded 5-way angled M12 connectors, 1 male and 1 female, at each end	2	0.3/0.98	TCSCCN2M2F03	0.090/0.198
			1/3.28	TCSCCN2M2F1	0.127/0.280
			2/6.56	TCSCCN2M2F2	0.179/0.395
			5/16.40	TCSCCN2M2F5	0.337/0.743
			10/32.81	TCSCCN2M2F10	0.600/1.323
			15/49.21	TCSCCN2M2F15	0.863/1.903
	Equipped with two A-coded 5-way straight M12 connectors, 1 male and 1 female, at each end	2	0.3/0.98	TCSCCN1M1F03	0.090/0.198
			1/3.28	TCSCCN1M1F1	0.127/0.280
			2/6.56	TCSCCN1M1F2	0.179/0.395
			5/16.40	TCSCCN1M1F5	0.337/0.743
			10/32.81	TCSCCN1M1F10	0.600/1.323
			15/49.21	TCSCCN1M1F15	0.863/1.903
CANopen bus connection cables (bus OUT)	Equipped with one A-coded 5-way angled male M12 connector and 1 flying lead	3	1/3.28	TCSCCN2MNX1SA	0.089/0.196
			3/9.843	TCSCCN2MNX3SA	0.195/0.430
			10/32.81	TCSCCN2MNX10SA	0.563/1.241
			25/82.02	TCSCCN2MNX25SA	1.352/2.981
	Equipped with one A-coded 5-way straight male M12 connector and 1 flying lead	3	1/3.28	TCSCCN1MNX1SA	0.089/0.196
			3/9.843	TCSCCN1MNX3SA	0.195/0.430
TM7 expansion bus cables	Equipped with one B-coded 4-way angled female M12 connector and 1 flying lead	4	1/3.28	TCSXCN2FNX1E	0.089/0.196
			3/9.843	TCSXCN2FNX3E	0.195/0.430
			10/32.81	TCSXCN2FNX10E	0.563/1.241
			25/82.02	TCSXCN2FNX25E	1.352/2.981
	Equipped with one B-coded 4-way straight female M12 connector and 1 flying lead	4	1/3.28	TCSXCN1FNX1E	0.089/0.196
			3/9.843	TCSXCN1FNX3E	0.195/0.430



TCSCCN2FNX1SA



TCSXCN1MNX1SA

Connection accessories (continued)

Designation	Description	Item no.	Length m/ft	Reference	Weight kg/lb			
TM7 expansion bus cables (continued)								
TM7 bus daisy chain cables	Equipped with two B-coded 4-way angled M12 connectors, 1 male and 1 female, at each end	5	0.3/0.98	TCSXCN2M2F03E	0.090/0.198			
			1/3.28	TCSXCN2M2F1E	0.127/0.280			
			2/6.56	TCSXCN2M2F2E	0.179/0.395			
			5/16.40	TCSXCN2M2F5E	0.337/0.743			
			10/32.81	TCSXCN2M2F10E	0.600/1.323			
			15/49.21	TCSXCN2M2F15E	0.863/1.903			
	Equipped with two B-coded 4-way straight M12 connectors, 1 male and 1 female, at each end	5	0.3/0.98	TCSXCN1M1F03E	0.090/0.198			
			1/3.28	TCSXCN1M1F1E	0.127/0.280			
			2/6.56	TCSXCN1M1F2E	0.179/0.395			
			5/16.40	TCSXCN1M1F5E	0.337/0.743			
			10/32.81	TCSXCN1M1F10E	0.600/1.323			
			15/49.21	TCSXCN1M1F15E	0.863/1.903			
TM7 expansion bus cables (bus OUT)	Equipped with one B-coded 4-way angled male M12 connector and 1 flying lead	6	1/3.28	TCSXCN2MNX1E	0.089/0.196			
			3/9.843	TCSXCN2MNX3E	0.195/0.430			
			10/32.81	TCSXCN2MNX10E	0.563/1.241			
			25/82.02	TCSXCN2MNX25E	1.352/2.981			
			Equipped with one B-coded 4-way straight male M12 connector and 1 flying lead	6	1/3.28	TCSXCN1MNX1E	0.089/0.196	
					3/9.843	TCSXCN1MNX3E	0.195/0.430	
	10/32.81	TCSXCN1MNX10E			0.563/1.241			
	25/82.02	TCSXCN1MNX25E			1.352/2.981			
	Power distribution cables							
	Power IN power distribution cables	Equipped with one 4-way angled female M8 connector and 1 flying lead			7	1/3.28	TCSXCNEFNX1V	0.041/0.090
			3/9.843	TCSXCNEFNX3V		0.105/0.231		
			10/32.81	TCSXCNEFNX10V		0.329/0.725		
25/82.02			TCSXCNEFNX25V	0.809/1.784				
Equipped with one 4-way straight female M8 connector and 1 flying lead			7	1/3.28		TCSXCNDFNX1V	0.041/0.090	
				3/9.843		TCSXCNDFNX3V	0.105/0.231	
		10/32.81		TCSXCNDFNX10V	0.329/0.725			
		25/82.02		TCSXCNDFNX25V	0.809/1.784			
		Power daisy chain cables		Equipped with two 4-way angled M8 connectors, 1 male and 1 female, at each end	8	0.3/0.98	TCSXCNEMEF03V	0.028/0.062
						1/3.28	TCSXCNEMEF1V	0.050/0.110
2/6.56			TCSXCNEMEF2V			0.082/0.181		
5/16.40			TCSXCNEMEF5V			0.178/0.392		
10/32.81	TCSXCNEMEF10V		0.338/0.745					
15/49.21	TCSXCNEMEF15V		0.498/1.098					
Equipped with two 4-way straight M8 connectors, 1 male and 1 female, at each end	8		0.3/0.98	TCSXCNDMDF03V	0.105/0.231			
			1/3.28	TCSXCNDMDF1V	0.329/0.725			
			2/6.56	TCSXCNDMDF2V	0.809/1.784			
			5/16.40	TCSXCNDMDF5V	0.105/0.231			
			10/32.81	TCSXCNDMDF10V	0.329/0.725			
			15/49.21	TCSXCNDMDF15V	0.809/1.784			
Power OUT power distribution cables	Equipped with one 4-way angled male M8 connector and 1 flying lead	9	1/3.28	TCSXCNEYNX1V	0.041/0.090			
			3/9.843	TCSXCNEYNX3V	0.105/0.231			
			10/32.81	TCSXCNEYNX10V	0.329/0.725			
			25/82.02	TCSXCNEYNX25V	0.809/1.784			
			Equipped with one 4-way straight male M8 connector and 1 flying lead	9	1/3.28	TCSXCNDMNX1V	0.041/0.090	
					3/9.843	TCSXCNDMNX3V	0.105/0.231	
	10/32.81	TCSXCNDMNX10V			0.329/0.725			
	25/82.02	TCSXCNDMNX25V			0.809/1.784			
	Cables for connecting analog sensors and actuators							
	Cables for connecting sensors and actuators	Equipped with one A-coded 5-way angled male M12 connector and 1 flying lead			10	2/6.56	TCSXCN2M2SA	0.143/0.315
			5/16.40	TCSXCN2M5SA		0.258/0.569		
			15/49.21	TCSXCN2M15SA		0.546/1.204		
Equipped with one A-coded 5-way straight male M12 connector and 1 flying lead		10	2/6.56	TCSXCN1M2SA	0.143/0.315			
			5/16.40	TCSXCN1M5SA	0.258/0.569			
			15/49.21	TCSXCN1M15SA	0.546/1.204			
Cables for connecting digital sensors and actuators								
Please consult our "Detection for OsiSense automation solutions" catalogue		11						
Accessories								
See next page		12						
		13						
		14						



Communication

Distributed I/O on CANOpen bus with Modicon
TM7 interface blocks IP 67
for Modicon M258 logic controller and Modicon LMC058
motion controller



TM7ACYCJ



TM7ACYC




TM7ACTHA

Connection accessories				
Description	Composition	Item no.	Reference	Weight kg/lb
CAN bus Y cable	Equipped with 2x5-way M12 connectors, 1 male and 1 female, and at the other end: 1x5-way male M12 connector	12	TM7ACYCJ	0.031/0.068
CAN Y connector	For connecting 2xM12 connectors, 1 male and 1 female, to male M12 connector on the expansion block	13	TM7ACYC	0.100/0.220
Line terminator (for end of bus)	Equipped with 1x5-way male M12 connector	14	TM7ACTLA	0.023/0.051
Connector with temperature probe for measurement by thermocouple (1)	Equipped with 1x5-way male M12 connector	—	TM7ACTHA	0.100/0.220

(1) For use with the **TM7BAI4PLA** expansion block for measurement with compensation of the temperature of the connector.

Communication

Distributed I/O on CANopen bus with Modicon TM7 interface blocks IP 67
for Modicon M258 logic controller and Modicon LMC058 motion controller



TM7ACMP


Separate parts

Description	Composition	Unit reference	Weight kg/lb
Sealing plugs (1)	For M8 connector for Modicon TM7 IP 67 blocks Lot of 50	TM7ACCB	0.100/0.220
	For M12 connector for Modicon TM7 IP 67 blocks Lot of 50	TM7ACCA	0.100/0.220
Mounting plate on symmetrical DIN rail	For Modicon TM7 IP 67 blocks	TM7ACMP	0.020/0.044
	For Modicon TM7 IP 67 blocks Lot of 10	TM7ACMP10	0.200/0.441
Set of two screwdrivers	For tightening the rings on M8 and M12 connectors to the correct torque	TM7ACTW	0.198/0.437

(1) The use of sealing plugs ensures that unused connectors on Modicon TM7 IP 67 blocks have IP 67 protection.

CANopen Performance architecture

Example of connection of a CANopen Performance architecture dedicated to machines and modular installations.

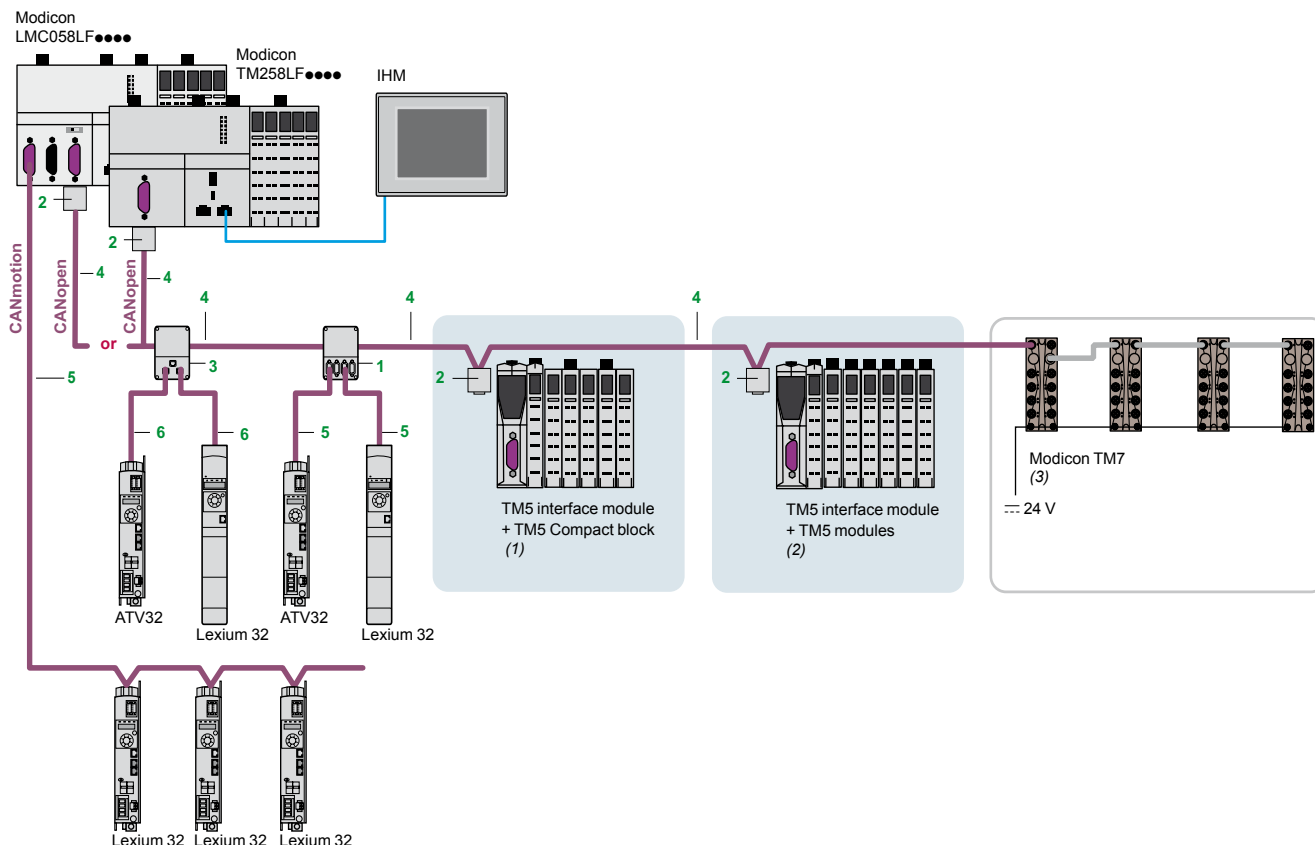

References

Standard tap junctions and connectors

Designation	Description	Item no.	Length m/ft	Reference	Weight kg/lb
IP 20 CANopen tap junction	4 SUB-D ports. Screw terminal block for connecting the trunk cables Line termination	1	—	TSXCANTDM4	0.196/ 0.432
IP 20 connectors CANopen 9-way female SUB-D. Switch for line termination	90° angled	2	—	TSXCANKCDF90T	0.046/ 0.101
	Straight (4)	—	—	TSXCANKCDF180T	0.049/ 0.108
	90° angled with 9-way SUB-D for connecting a PC or diagnostic tool	—	—	TSXCANKCDF90TP	0.051/ 0.112
IP 20 CANopen tap junction for Altivar and Lexium	2 RJ45 ports	3	—	VW3CANTAP2	0.250/ 0.551

(1) Modicon TM5 interface module (see page 4/24) + Modicon TM5 Compacts blocks (see page 3/38).

(2) Modicon TM5 interface module (see page 4/24) + Modicon TM5 modules: Digital modules (see page 3/42) ; Analog modules (see page 3/50) ; Expert module (see page 3/54).

(3) Modicon TM7 offer: TM7 IP 67 I/O blocks, expansion cable, and accessories (see page 3/64).

(4) For connection to Altivar IMC integrated controller card.



TSXCANTDM4



VW3CANTAP2



TSXCANKCDF90T



TSXCANKCDF180T



TSXCANKCDF90TP

References (continued)

IP 20 standard cables and preassembled cordsets

Designation	Description	Item no.	Length m/ft	Reference	Weight kg/lb
CANopen cables (2 x AWG 22 2 x AWG 24)	For standard environment (1), CE marking: low smoke. Zero halogen. Flame-retardant (IEC 60332-1)	4	50/164.04	TSXCANCA50	4.930/ 16.174
			100/328.08	TSXCANCA100	8.800/ 28.871
			300/984.24	TSXCANCA300	24.560/80.577
	For standard environment (1), UL certification, CE marking: flame-retardant (IEC 60332-2)	4	50/164.04	TSXCANCB50	3.580/11.745
			100/328.08	TSXCANCB100	7.840/ 25.721
			300/984.24	TSXCANCB300	21.870/71.751
	For harsh environments (1) or mobile installations, CE marking: low smoke. Zero halogen. Flame-retardant (IEC 60332-1). Oil-resistant	4	50/164.04	TSXCANCD50	3.510/ 11.515
			100/328.08	TSXCANCD100	7.770/ 25.492
			300/984.24	TSXCANCD300	21.700/71.194
CANopen preassembled cordsets One 9-way female SUB-D connector at each end.	For standard environment (1), CE marking: low smoke. Zero halogen. Flame-retardant (IEC 60332-1)	—	0.3/0.98	TSXCANCADD03	0.091/0.201
			1/3.28	TSXCANCADD1	0.143/0.315
			3/9.84	TSXCANCADD3	0.295/0.650
			5/16.40	TSXCANCADD5	0.440/0.970
	For standard environment (1), UL certification, CE marking: flame-retardant (IEC 60332-2)	—	0.3/0.98	TSXCANCBDD03	0.086/0.190
			1/3.28	TSXCANCBDD1	0.131/0.289
			3/9.84	TSXCANCBDD3	0.268/0.591
			5/16.40	TSXCANCBDD5	0.400/0.882
CANopen preassembled cordsets	Cordsets with one 9-way female SUB-D connector and one RJ45 connector	5	0.5/0.98	TCSCCN4F3M05T	0.100/0.220
			1/3.28	TCSCCN4F3M1T	0.100/0.220
				VW3M3805R010(2)	0.100/0.220
			3/9.84	TCSCCN4F3M3T	0.160/0.353
	Cordsets with two 9-way SUB-D connectors, one female and one male	—	0.5/0.98	TLACDCBA005	0.100/0.220
			1.5/4.92	TLACDCBA015	0.120/0.265
			3/9.84	TLACDCBA030	0.190/0.419
			5/16.40	TLACDCBA050	0.350/0.772

IP 20 connection accessories

CANopen connector for Altivar 71 (3)	9-way female SUB-D Switch for line termination. Cables exit at 180°	—	—	VW3CANKCDF180T	0.100/0.220
Adaptor for Altivar 71 drive	SUB-D to RJ45 CANopen adaptor	—	—	VW3CANA71	0.100/0.220
CANopen preassembled cordsets	1 RJ45 connector at each end	6	0.3/0.98	VW3CANCARR03	0.100/0.220
			1/3.28	VW3CANCARR1	0.100/0.220
CANopen bus adaptor for Lexium 17D	Hardware interface for CANopen-compliant link + 1 connector for a PC terminal	—	—	AM02CA001V000	0.110/0.243
Y-connector	CANopen/Modbus	—	—	TCSCNT011M11F	0.100/0.220

IP 67 cables and preassembled cordsets, IP 67 connection accessories for Modicon TM7 blocks

(see page 4/34)

(1) Standard environment: no particular environmental constraints, operating temperature between + 5°C and + 60°C, and in fixed installations

Harsh environment: resistance to hydrocarbons, industrial oils, detergents, solder splashes, relative humidity up to 100%, saline atmosphere, significant temperature variations, operating temperature between - 10°C and + 70°C, or in mobile installations.

(2) Cordset equipped with a line terminator.

(3) For ATV71H●●●M3, ATV71HD11M3X, HD15M3X, ATV71H075N4... HD18N4 drives, this connector can be replaced by the TSXCANKCDF180T connector.



VW3CANA71




AM02CA001V000

Compatibility of offers

Modicon TM4 communication modules

- > Modicon M241 logic controllers
- > Modicon M251 logic controllers

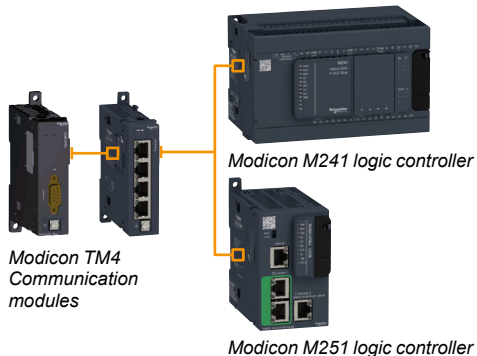

Presentation

Applications

The Modicon TM4 offer enhances the connectivity for Modicon M241 and M251 logic controllers.

Two communication module models are available:

- The **TM4ES4** Ethernet switch module (offering, only on controllers without embedded Ethernet, an Ethernet connection with 4 ports).
- The **TM4PDPS1** Profibus DP slave module.

■ Ethernet switch module

The **TM4ES4** module is a 4-port Ethernet interface (10/100 Mbps, MDI/MDIX) with the following protocols: Modbus TCP (Client/Server), Ethernet IP (adapter), UDP, TCP, SNMP and SoMachine.

- The **TM4ES4** module is ready for use as soon as it is connected to the communication bus of M241 controllers.
- This module is used to add the Ethernet function to TM241C24● and TM241C40● controllers without embedded Ethernet port while offering the additional functionality of an Ethernet switch.
- When connected to logic controllers with embedded Ethernet port type TM241CE24●●●, TM241CE40●●●, or on a TM251MES● controller it is a 4 port stand-alone switch: the communication between the TM4ES4 module and the Modicon M241 and M251 controllers is not done automatically by the bus connector.

■ Profibus DP slave module

The **TM4PDPS1** communication module can be used to configure a slave connection on the Profibus DP bus.

Association rules

Up to 3 communication modules (total) can be added on the left of M241 and M251 logic controllers, in order to increase their possibilities of connection to the Ethernet and Profibus networks.

- On controllers without embedded Ethernet port (TM241C24●●● and TM241C40●●●): it is possible to add one **TM4ES4** module with the Ethernet port function and two **TM4ES4** modules with the switch function while respecting the maximum number of 3 **TM4** modules.
- On controllers with embedded Ethernet port (TM241CE●● and TM251●●●): it is possible to add 3 modules **TM4ES4** with switch function while respecting the number of 3 **TM4** modules.
- **TM4** communication modules are assembled by simple interlocking on the left-hand side of the controllers and a bus expansion connector is used to distribute data and the power supply.


Description

■ TM4ES4 Ethernet switch module

- 1 Power on LED indicator.
- 2 Bus connector (one on each side).
- 3 4 RJ 45 connectors for Ethernet network, with exchange rate and activity LED.
- 4 Screw terminal for the functional earth (FE) connection.
- 5 Locking clip on $\perp$ symmetrical rail.

■ TM4PDPS1 Profibus DP slave module

- 1 Power on LED indicator.
- 2 Bus connector (one on each side).
- 3 9-way SUB-D connector for connection to the Profibus DP bus.
- 4 Screw terminal for the functional earth (FE) connection.
- 5 Locking clip on $\perp$ symmetrical rail.

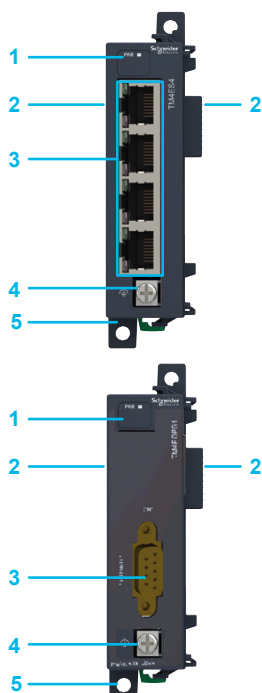

Communication

Modicon TM4 communication modules

For Modicon M241 and Modicon M251logic controllers



TM4ES4



TM4PDPS1

References			
Options for Modicon M241 and M251 logic controllers			
Designation	Description	Reference	Weight kg/ lb
Communication modules	Multi-port Ethernet interface equipped with four RJ 45 connectors (10/100 Mbps, MDI/MDIX)	TM4ES4 (1)	0.110/ 0.243
	Slave connection on the Profibus DP bus, equipped with a 9-way SUB-D connector	TM4PDPS1 ▲	0.110/ 0.243

(1) Can be used as an Ethernet port or as a standalone switch according to controller model and configuration.

Presentation

The embedded Ethernet communication ports in each Modicon M221, M241 and M251 logic controller and in the Modicon TM4ES4 communication module optimise integration in factory network architectures.

Modicon M221, M241 and M251 controllers can easily be integrated in typical architectures:

- **machine to devices** (variable speed drives, remote I/O modules, operator dialogue terminals) with the I/O Scanner function
- **machine to machine** with the NGVL function
- **machine to supervision** with the Modbus Client/Server function

Ethernet also brings transparency to the factory, in particular - thanks to the firewall functions - making it possible from any point on the network to safely:

- program, monitor a controller or download an application
- access device parameters (variable speed drives for example)

A simple web browser can be used to access machines anytime anywhere, using a tablet or smartphone, for example, using the web servers embedded in Modicon M241 and M251 controllers.

Safety can be enhanced by the use of VPN modems (see our partner programme).

The Modbus TCP/IP protocol

Modbus has been the industry communication standard since 1979.

During the internet revolution, Modbus was combined with Ethernet Modbus/TCP to form Modbus/TCP, a completely open Ethernet protocol. The development of a connection to Modbus/TCP does not require any proprietary component, nor purchase of a licence.

This protocol can easily be combined with any product supporting a standard TCP/IP communication stack.

The specifications can be downloaded free of charge from the following address: www.modbus.org.

Modbus/TCP, simple and open

- The Modbus application layer is simple and universally familiar with its 9 million installed connections.
- Thousands of manufacturers have already implemented this protocol. Many have already developed a Modbus/TCP connection and numerous products are presently available.
- The simplicity of Modbus/TCP enables any fieldbus device, such as an I/O module, to communicate on Ethernet without the need for a powerful microprocessor or a lot of internal memory.


Modbus/TCP, high performance

Thanks to the simplicity of its protocol and the fast speed of 100 Mbps, the performance of Modbus/TCP is excellent. This type of network can therefore be used in realtime applications such as I/O digitisation.


Modbus/TCP, a standard

- The application protocol is identical on Modbus serial link and Modbus/TCP: messages can be routed from one network to the other without converting the protocol.
- Since Modbus operates on the TCP higher layer, users benefit from IP routing, thus enabling devices located anywhere in the world to communicate without worrying about the distance between them.

Modbus and Modbus/TCP are recognised as a fieldbus by the international standard IEC/EN 61158. They also comply with the "national Chinese standard" managed by ITEI.

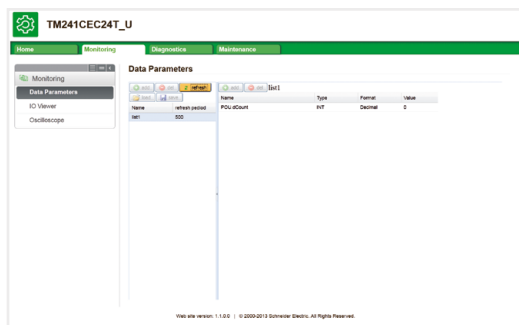

Preconfigured Web server

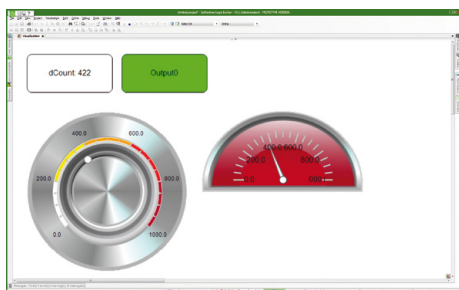

Viewer Web server

Web servers

Preconfigured Web server

Using a simple Internet browser available on PC, smartphone or tablet, this server authorizes the following “ready-to-use” functions:

- With no prior programming
 - Display of the I/O states
 - Controller diagnostics, and of its expansion and communication modules
 - Communication port diagnostics
 - I/O Scanner function diagnostics
 - Maintenance and configuration functions (Ethernet IP, firewall, etc.)
- After configuration
 - Viewing data values
 - Viewing the evolution of those data values over time (oscilloscope function)

Viewer Web server


The SoMachine programming software is used to create customised pages for viewing and monitoring devices. These pages can also be accessed on any mobile device such as a tablet or smartphone with any operating system (iOS, Android, Windows).

Description of Ethernet services

Network Global Variable List (NGVL)

The NGVL protocol allows a controller to share data with other controllers on a local Ethernet network (LAN) or subscribe to data published by other controllers which support the NGVL protocol and thus allowing, for example, synchronisation between control platforms.

I/O Scanner

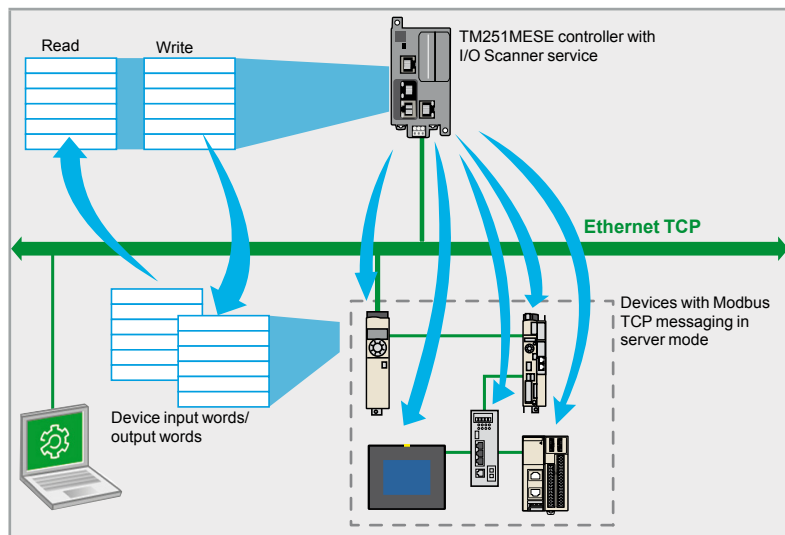

The Modbus TCP I/O Scanner service is used to manage the exchange of remote I/O states on the Ethernet network after a simple configuration operation, with no need for special programming.

I/O Scanner is performed transparently by means of read/write requests in accordance with the Modbus client/server protocol on the TCP profile. This principle of Scanner via a standard protocol enables a device with the I/O Scanner service to communicate with any device supporting Modbus TCP messaging in server mode (slave Modbus TCP). The M251MESE I/O Scanner system supports up to 64 devices (one Modbus request per device).

Description of Ethernet services (continued)

Slave Modbus TCP

This function can be used to create a dedicated I/O table in the controller, which can be accessed via the Modbus TCP protocol and by a controller with the Modbus TCP I/O Scanner function.

Fast Device Replacement (FDR)

This service uses standard address management technologies (BOOTP, DHCP) and the TFTP (Trivial File Transfer Protocol) file management service, in order to simplify maintenance of Ethernet products.

The FDR service is used to replace a device with a new device; the faulty device is detected, reconfigured and automatically rebooted by the system.

Access to files via FTP (File Transfer Protocol)

This service provides access to the controller files from, for example, a PC (FTP client) and is used to exchange files such as application programs, data, etc.

This service can be accessed even if the controller has no application program in its memory.

Dynamic Host Configuration Protocol (DHCP)

This protocol can be used to assign an address to a controller (client DHCP/BOOTP) automatically. This address can be:

- ☐ Fixed and determined either in the SoMachine software or included in a post-configuration file
- ☐ Assigned by a controller with the DHCP server or BOOTP server function (such as the TM251MESE controller).

SNMP (Simple Network Management Protocol)

From a network management station, the SNMP protocol is used to monitor and control the Ethernet architecture components, meaning problems are diagnosed quickly.

The SNMP protocol is used to access configuration and management objects that are contained in the device MIBs (Management Information Bases).

Modicon M241 and M251 controllers support the "MIB 2 Standard" SNMP network management interface. This interface accesses a first level of network management; it enables the manager to identify the devices making up the architecture and retrieve general information about configuration and operation of the Ethernet Modbus/TCP interfaces.

IP address filter (Whitelisting)

IP addresses that are authorised to access the controller can be loaded in the controller from either an SD card or an FTP client.

Locking communication protocols

Not only SoMachine, NetManage (1), SNMP communication protocols but also Modbus, WEB and FTP servers can be locked individually in the SoMachine software.


(1) The NetManage function can automatically detect which controllers are present on the network. It also offers the option of straightforward connection to any controller present on the network in order to identify it physically by means of a visual or audible message and modify its parameters or manage the resident application.

Transparent Ready class and Functions

	Logic controllers			
	TM221ME●●● TM221CE●●●	TM241CE●●● TM241C●●● + TM4ES4	TM251MESSC	TM251MESE
Transparent Ready class	A10	B20		
Internet protocol version	IP V4			
Ethernet services				
Programming, downloading, monitoring				
Firmware update	–			
Client and server Modbus TCP				
Slave Modbus TCP				
Ethernet IP (adapter)	–			
Data exchange: NVGL and IEC VAR ACCESS	–			
WEB server	–			
MIB2 SNMP network management	–			
Modbus TCP I/O Scanner	–	–	–	
FTP file transfer	–			
Client DHCP dynamic configuration				
Server DHCP dynamic configuration	–	–	–	
FDR faulty device replacement	–	–	–	
SMS, emails	Availability : 4 th quarter 2014	–	–	–
Safety functions				
IP address filter (Whitelisting)	–			
Locking communication protocols				
Locking IP address routing	–	–	–	

function created

Ethernet ports on logic controllers and the communication module

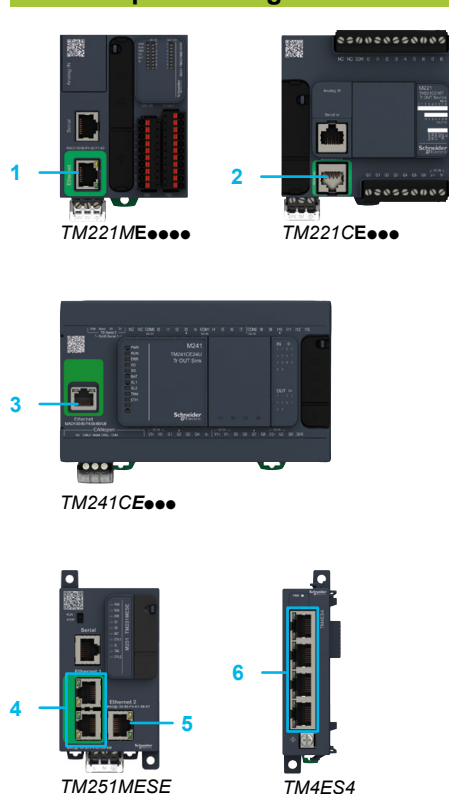

M221 logic controllers

- 1 On **TM221ME●●●** controllers: RJ 45 connector for Ethernet network, with exchange rate and activity LED.
- 2 On **TM221CE●●●** controllers: RJ 45 connector for Ethernet network, with exchange rate and activity LED.

M241 logic controllers

- 3 On **TM241CE●●●** controllers: RJ 45 connector for Ethernet network, with exchange rate and activity LED.


M251 logic controllers

- 4 On **TM251MESE** and **TM251MESCC** controllers: 2 connectors connected by an RJ 45 internal switch for "Machine or Factory" Ethernet network, with exchange rate and activity LED.
- 5 On **TM251MESE** controller: RJ 45 connector for "fieldbus" Ethernet 2 network, with exchange rate and activity LED. The Ethernet 2 network can be used with the Modbus TCP I/O Scanner function.

TM4ES4 Ethernet switch communication module

- 6 4 RJ 45 connectors for Ethernet 2 network, with exchange rate and activity LED.

Communication architecture on Ethernet network

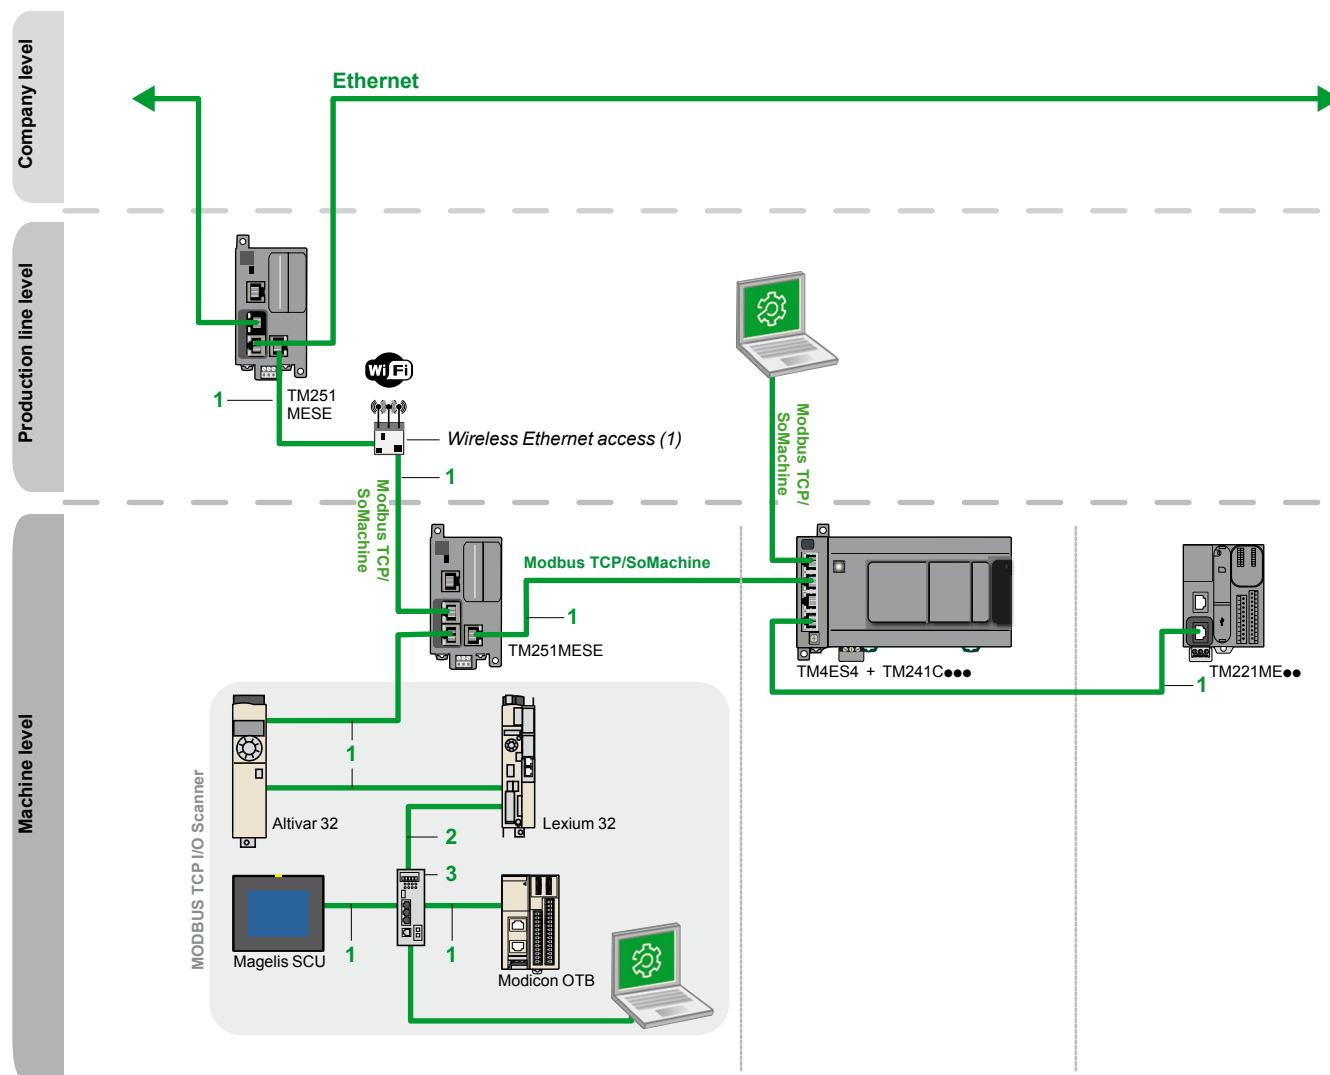

NB: The ports on M251 controllers and the TM4ES4 communication module cannot be used to create redundant architectures.

(1) Wireless Ethernet access, see our partner programme.

Items 1, 2 and 3: see references on next page.

Shielded copper connection cables

ConneXium shielded connection cables are available in two versions to meet the requirements of the various current standards and approvals:

■ EIA/TIA 568 shielded twisted pair cables for CÉ market

These cables conform to:

- EIA/TIA-568 standard, category CAT 5E
- IEC 11801/EN 50173-1 standard, class D

Their fire resistance conforms to:

- NF C32-070 standard, class C2
- IEC 322/1 standards
- Low Smoke Zero Halogen (LSZH)

■ EIA/TIA 568 shielded twisted pair cables for UL market

These cables are:

- CEC type FT-1
- NEC type CM

A new range of **ConneXium** fully shielded preassembled cables has been specially designed for use in harsh industrial environments. These cables combine a category 5E shielded cable and RJ 45 connectors reinforced with a metal profile.



TCSEC3M3M1S4

References

EIA/TIA 568 shielded twisted pair cables for C€ market

Description	End fittings	Item	Type	Length m/ft	Reference	Weight kg/lb
Straight-through copper cables C€ compatible	2 RJ 45 connectors For connection to terminal devices (DTE)	1	standard	2/6.56	490NTW000002	—
				5/16.40	490NTW000005	—
				12/39.37	490NTW000012	—
				40/131.23	490NTW000040	—
				80/262.47	490NTW000080	—
		1	ruggedised	1/3.28	TCSECE3M3M1S4	—
				2/6.56	TCSECE3M3M2S4	—
				3/9.84	TCSECE3M3M3S4	—
				5/16.40	TCSECE3M3M5S4	—
				10/32.81	TCSECE3M3M10S4	—

Shielded twisted pair cables for UL market

Description	End fittings	Item	Type	Length m/ft	Reference	Weight kg/lb
Straight-through copper cables UL compatible	2 RJ 45 connectors For connection to terminal devices (DTE)	1	standard	2/6.56	490NTW000002U	—
				5/16.40	490NTW000005U	—
				12/39.37	490NTW000012U	—
				40/131.23	490NTW000040U	—
				80/262.47	490NTW000080U	—
		1	ruggedised	1/3.28	TCSECU3M3M1S4	—
				2/6.56	TCSECU3M3M2S4	—
				3/9.84	TCSECU3M3M3S4	—
				5/16.40	TCSECU3M3M5S4	—
				10/32.81	TCSECU3M3M10S4	—

Do it Yourself copper cable and connectors

The **ConneXium** "Do it Yourself" offer consists of 2 connector references (M12 and RJ 45) and 1 cable reference - 300 m (984.252 ft) reel - enabling Ethernet 10/100 Mbps network cables to be made up in situ. The maximum length of cables made up in this way is 80 m (262.467 ft.). They are assembled using only a knife and wire cutters (no special tool is required).

Description	Characteristics	Item	Length m/ft	Reference	Weight kg/lb
Ethernet copper cable 2 shielded twisted pairs 24 AWG	Conforms to the standards and approval listed above	2	300/984.25	TCSECN300R2	—
RJ 45 connector	Conforms to EIA/TIA-568-D	2	—	TCSEK3MDS	—

ConneXium unmanaged switches, 3, 4 and 5 ports, twisted pair and optical fibre

Description	Interfaces	Item	Reference	Weight kg/ lb
ConneXium unmanaged switches	3 x 10BASE-T/100BASE-TX ports (copper cable), RJ 45 shielded connectors	3	TCSESU033FN0	0.113/ 0.249
	■ 4 x 10BASE-T/100BASE-TX ports (copper cable), RJ 45 shielded connectors ■ 1 x 100BASE-FX port (multimode optical fibre), duplex SC connector	3	TCSESU043F1N0	0.120/ 0.265
	5 x 10BASE-T/100BASE-TX ports (copper cable), RJ 45 shielded connectors	3	TCSESU053FN0	0.113/ 0.249


Other wiring components are available, please consult the **ConneXium** offer on our website www.schneider-electric.com.



TCSESU053FN0

Ethernet

Ethernet Modbus/TCP or Ethernet IP network architecture

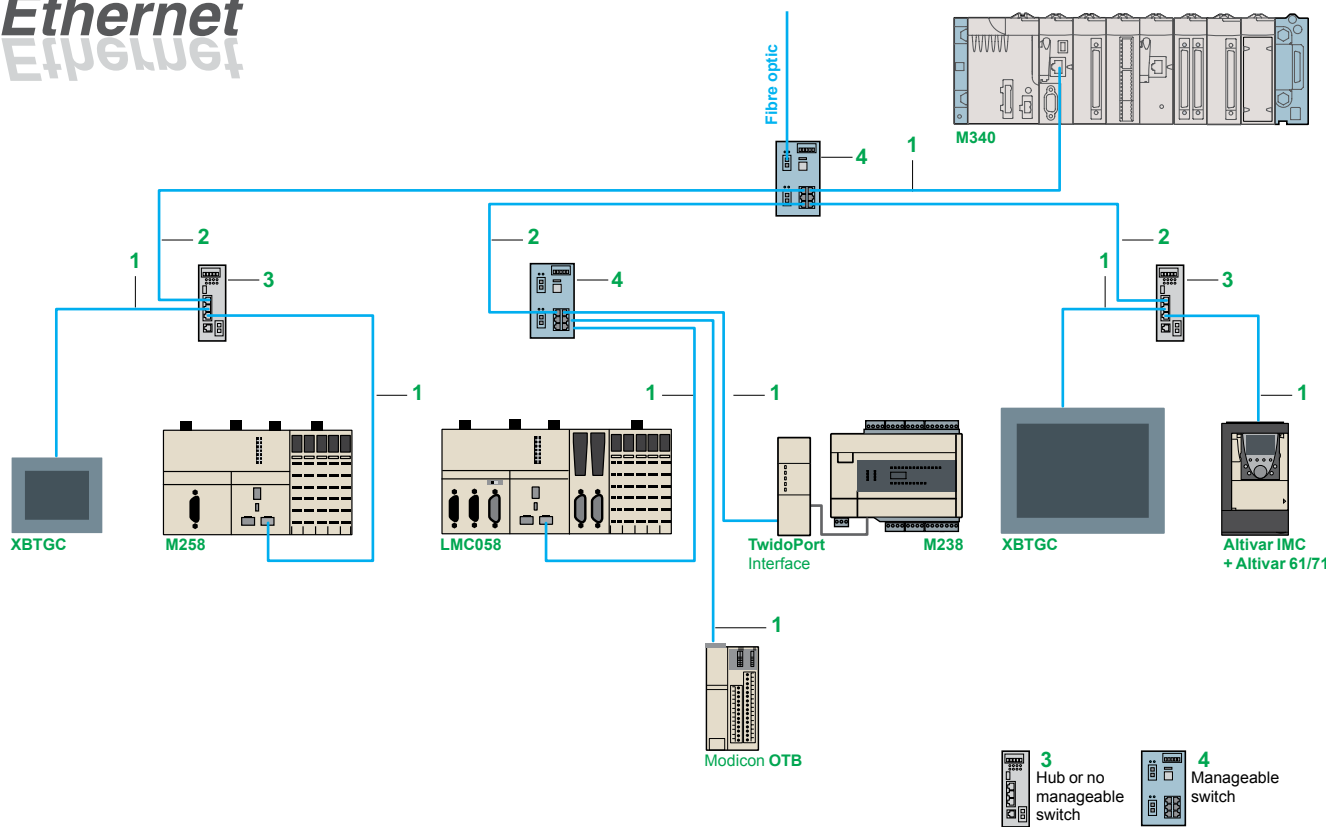

References (1)

Shielded copper connection cables

ConneXium shielded copper connection cables are available in two versions to comply with the different standards and approvals in force:

■ Shielded twisted pair copper cables to standard EIA/TIA 568

These cables conform to:

- standard EIA/TIA 568, category CAT 5E,
- standard IEC 11801/EN 50173, class D.

Their flame resistance conforms to:

- NFC 32070# classification C2
- standards IEC 322/1,
- Low Smoke Zero Halogen (LSZH).

■ Shielded twisted pair copper cables, UL and CSA 22.1 approved

These cables conform to:

- standards UL and CSA 22.1.

Their flame resistance conforms to NFPA 70.

“Do It Yourself” cable and connectors

The ConneXium “Do It Yourself” range allows the user to make up Ethernet copper cables on site and to the required length. They are designed for cabling Ethernet 10/100 Mbit/s networks. The maximum length of cables made up in this way is 80 m. They can be assembled quickly using a knife and cutting pliers (no special tools are required).

Description	Characteristics	Length m/ft	Reference	Weight kg
Ethernet copper cable 2 shielded twisted pairs 24 AWG	Conforming to the above-mentioned standards and approvals	300/ 984.25	TCSECN300R2	—
RJ 45 connector	Conforming to EIA/TIA-568-D	—	TCSEK3MDS	—
M12 connector	Conforming to IEC 60176-2-101	—	TCSEK1MDRS	—

(1) Other versions (fibre optic, switches, ...): please consult our site www.schneider-electric.com



490 NT●000●●



TCSESU043F1N0



TCSESM043F2C●0



499NMS/NSS25102



TCSESM083F2C●0



TCSESU051F0

References (continued)

Shielded twisted pair cables to standard EIA/TIA568

Description	Pre-formed at both ends	Item	Length m/ft	Reference	Weight kg/lb
Straight cables	2 x RJ45 connectors For connection to terminal equipment (DTE)	1	2/6.56	490NTW00002	—
			5/16.40	490NTW00005	—
			12/39.37	490NTW00012	—
			40/131.23	490NTW00040	—
			80/262.47	490NTW00080	—
Crossover cables	2 x RJ45 connectors For connection between hubs, switches and transceivers	2	5/16.40	490NTC00005	—
			12/39.37	490NTC00015	—
			40/131.23	490NTC00040	—
			80/262.47	490NTC00080	—

Shielded twisted pair cables, UL and CSA 22.1 approved

Description	Pre-formed at both ends	Item	Length m/ft	Reference	Weight kg/lb
Straight cables	2 x RJ45 connectors For connection to terminal equipment (DTE)	1	2/6.56	490NTW00002U	—
			5/16.40	490NTW00005U	—
			12/39.37	490NTW00012U	—
			40/131.23	490NTW00040U	—
			80/262.47	490NTW00080U	—
Crossover cables	2 x RJ45 connectors For connection between hubs, switches and transceivers	2	5/16.40	490NTC00005U	—
			40/131.23	490NTC00040U	—
			80/262.46	490NTC00080U	—

Shielded twisted pair cable for IP 67 switch

Description	Pre-formed at both ends	Item	Length m/ft	Reference	Weight kg/lb
Straight cables	1 x IP 67 4-way M12 connector and 1 x RJ45 connector	—	1/3.28	TCSECL1M3M1S2	—
			3/9.84	TCSECL1M3M3S2	—
			5/16.40	TCSECL1M3M5S2	—
			10/32.81	TCSECL1M3M10S2	—
			25/82.02	TCSECL1M3M25S2	—
			40/131.23	TCSECL1M3M40S2	—

ConneXium hub

Description	Number of ports		Item	Reference	Weight kg/lb
	Copper cable	Fibre optic			
Twisted pair hub 10BASE-T copper ports, RJ45 shielded connectors	4	—	3	499NEH10410	0.530/ 1.168

ConneXium switches

Description	Number of ports		Item	Manag-eable	Reference	Weight kg/lb
	Copper cable	Fibre optic				
Optimized twisted pair switch 10BASE-T/100BASE-TX copper ports, RJ45 shielded connectors 100BASE-FX optic port, SC connectors	3	—	3	No	TCSESU033FN0	0.113/ 0.249
	4	1	3	No	TCSESU043F1N0	0.120/ 0.265
	5	—	3	No	TCSESU053FN0	0.113/ 0.249
Twisted pair switches 10BASE-T/100BASE-TX copper ports, RJ45 shielded connectors	8	—	3	No	499NES18100	0.230/ 0.507
	8	—	4	Yes	TCSESM083F23F0	0.410/ 0.904
Twisted pair and fibre optic switches 10BASE-T/100BASE-TX copper ports, RJ45 shielded connectors. 100BASE-FX optic ports, SC connectors	3	1, multimode	4	Yes	TCSESM043F1CU0	0.400/ 0.882
	2	2, multimode	4	Yes	TCSESM043F2CU0	0.400/ 0.882
	3	1, single-mode	4	Yes	TCSESM043F1CS0	0.400/ 0.882
	2	2, single-mode	4	Yes	TCSESM043F2CS0	0.400/ 0.882
	4	1, multimode	3	No	499NMS25101	0.330/ 0.728
	3	2, multimode	3	No	499NMS25102	0.335/ 0.739
	4	1, single-mode	3	No	499NSS25101	0.330/ 0.728
	3	2, single-mode	3	No	499NSS25102	0.335/ 0.739
	7	1, multimode	4	Yes	TCSESM083F1CU0	0.410/ 0.904
	6	2, multimode	4	Yes	TCSESM083F2CU0	0.410/ 0.904
IP 67 twisted pair switch (1) 10BASE-T/100BASE-TX copper ports, shielded M12 connectors (type D)	5	—	—	No	TCSESU051F0	0.210/ 0.463

(1) Require special cables with M12 connectors for their --- 24 V supply: XZCP1●64L●

chapter 5

SoMachine

software



All technical information about products listed in this chapter
are available on www.schneider-electric.com


- SoMachine software
 - Presentation 5/2
 - Characteristics 5/4
 - References 5/5
- SoMachine Basic software
 - Presentation 5/6
 - Function 5/7
 - References 5/11

SoMachine software

Simplify machine programming and commissioning



SoMachine software platform

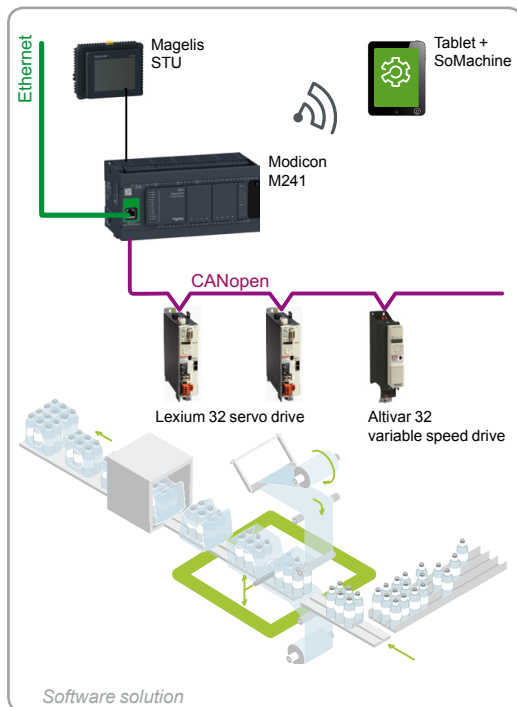

Presentation

SoMachine is the machine builders solution software for developing, configuring, and commissioning the entire machine in a single software environment, including logic, motion control, HMI, and related network automation functions.

SoMachine allows you to program and commission all the elements in Schneider Electric's Flexible and Scalable Control Platform, the comprehensive solution-oriented offer for machine builders, which helps you achieve the optimum control solution for each machine's requirements.

The Flexible and Scalable Control Platforms offer includes:

- Controllers:
 - Modicon logic controllers: M238, M241, M251, and M258
 - Modicon motion controllers: LMC058, LMC078 ▲
 - HMI controllers: Magelis SCU, XBTGC, XBTGT/GK
 - Drive controller: Altivar IMC
- I/O:
 - Modicon modules: TM2, TM3, TM5, and TM7 offers
- HMI:
 - Magelis™ STO/STU Small Panels
 - Magelis™ GH/GK/GT Advanced Panels
 - Magelis™ GTO Optimum Advanced Panels

Scalability

- SoMachine allows a flexible and scalable usage of controllers in the SoMachine context: it is easy to integrate the M221 logic controllers from SoMachine Basic into a SoMachine project.
- The Flexible Control feature allows you to replace a controller with another one, while retaining the logic and the configuration. Several versions of SoMachine can run in parallel in a system to help ensure compatibility.

SoMachine is a professional, intuitive, and open software solution integrating Vijeo-Designer. It also integrates the configuring and commissioning tool for motion control devices. It features the IEC 61131-3 languages, integrated fieldbus configurators, expert diagnostics and debugging, as well as multiple capabilities for maintenance and visualization including web-visualization.

SoMachine integrates tested, validated, documented, and supported expert application libraries dedicated to applications in pumping, packaging, hoisting, and conveying.

SoMachine is a single software environment with:

- One software package
- One project file
- One connection
- One download operation

Visual graphic user interface

Navigation within SoMachine is intuitive and highly visual. Presentation is optimized in such a way that selecting the development stage of the desired project makes the appropriate tools available. The user interface suggests the tasks to be performed throughout the project development cycle so that nothing is overlooked.

The workspace has been streamlined, so that only that which is necessary and relevant to the current task is featured, without any superfluous information.

Learning center


From the home menu, the learning center provides several tools to help you get started with SoMachine. An animated file explains the SoMachine interface and concept in brief. An e-learning section gives you the opportunity to teach yourself about SoMachine and its new features. A third section provides links to several documented examples of simple coding with SoMachine.

An intuitive and efficient online help is also available to answer your questions.


▲ Available Q2 2014.

SoMachine software


Simplify machine programming and commissioning

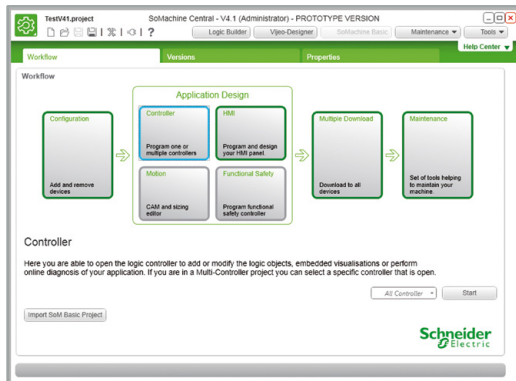


Project management

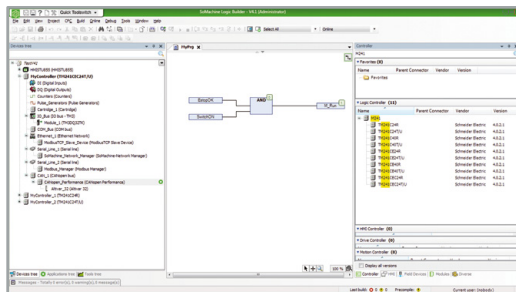

"Catalog"

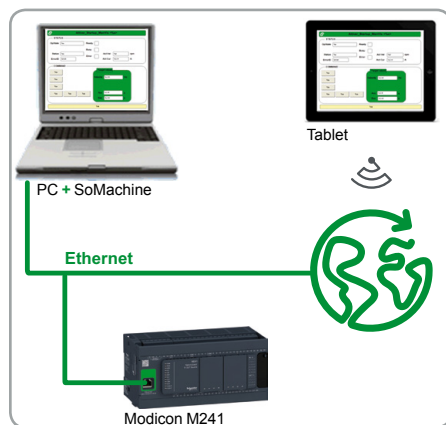

Web visualization

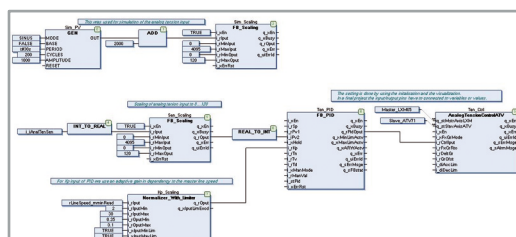

Application Function Blocks

Project management

The software's project management functionality lets you browse through existing projects quickly to gather the relevant information without needing to open each project individually.

There are several ways of creating a new project: using tested, validated, documented architectures, using the examples provided, using an existing project, or starting with an empty project. There is quick access to the most recently used projects.

You can also create a project from a standard project taking advantage of a preconfigured program (task, library, etc.).

Project properties

You can define additional information for each project using simple forms. It is also possible to attach documents and custom or configuration pictures. The software also supports automatic versioning.

Configuration

The user interface allows you to configure devices and architectures in a hierarchical order.

The various elements of the configuration can be easily assembled by selecting from a device "catalog" (controllers, expansion modules, etc.) with a simple drag & drop. The catalog can be searched and filtered as required.

Device templates are available to easily add preconfigured equipment.

Programming and debugging

Programming is an essential step, and the user has to carefully design it to be as efficient as possible. Advanced control and HMI functions cover all the needs of Machine builders in terms of creating the control and visualization systems.

Powerful tools allow debugging and functional tests such as simulation, step-by-step execution, breakpoints, and traces.

Documentation

SoMachine allows you to customize and generate a project report for printing:

- Select the items to be included in the report
- Organize the sections
- Define the page layout
- Print the report

Transparency

SoMachine is an FDT (Field Device Tool) container and supports DTM (Device Type Manager) files.

SoMachine manages remote devices via DTM files, providing direct communication with each device. Communication is transparent via SoMachine, the controller, and the fieldbus (Modbus Serial Line, Modbus TCP, CANopen, and CANmotion).

SoMachine also supports FDT/DTM connections directly from the PC to the devices via Modbus Serial Line or Modbus TCP.

Application Function Block (AFB) libraries for dedicated solutions

SoMachine includes application function block libraries for selected machines. Their simple configuration speeds up design, commissioning, installation, and troubleshooting.

These libraries cover the following applications:

- Packaging
- Hoisting
- Conveying
- Pumping

Tested Validated Documented Architectures (TVDA)

SoMachine provides a variety of preset projects with ready-to-use architectures you can adapt to individual requirements. Some of them are generic TVDA based on controller configurations. Others can be dedicated to specific solutions by application-oriented TVDAs.

SoMachine characteristics

IEC 61131-3 programming languages	■ IL (Instruction List) ■ LD (Ladder Diagram) ■ SFC (Sequential Function Chart) ■ ST (Structured Text) ■ FBD (Function Block Diagram) + CFC (Continuous Function Chart)
Controller programming services	■ Multi-tasking: Mast, Fast, Event ■ Functions (Func) and function blocks (FBs) ■ Data Unit Type (DUTs) ■ Online changes ■ Watch windows ■ Graphical monitoring of variables (trace) ■ Breakpoints, step-by-step execution ■ Simulation ■ Visualization for application and machine setup
HMI-based services	■ Graphics libraries containing more than 4,000 2D and 3D objects ■ Simple drawing objects (points, lines, rectangles, ellipses, etc.) ■ Preconfigured objects (button, switch, bar graph, etc.) ■ Recipes (32 groups of 256 recipes with max. 1024 ingredients) ■ Action tables ■ Alarms ■ Printing ■ Java scripts ■ Multimedia file support: wav, png, jpg, emf, bmp ■ Variable trending
Motion services	■ Configuration and commissioning of embedded devices ■ CAM profile editor ■ Sample application trace ■ Motion and drive function block libraries for variable speed drives, servo drives, and stepper drives ■ Visualization screens ■ Logical encoder
Global services	■ User access and profile ■ Project documentation printing ■ Project comparison (control) ■ Variable sharing based on publish/subscribe mechanism ■ Library version management ■ Machine energy efficiency monitoring
Integrated fieldbus configurators	■ Control network: □ Modbus Serial Line □ Modbus TCP □ Modbus TCP I/O Scanner ■ Fieldbus: □ CANopen □ CANmotion □ sercos III ■ Connectivity: □ Profibus-DP □ Ethernet IP ■ Web Visualization: Display the SoMachine controller visualization screens in a web browser
Expert and solutions libraries	■ PLCopen function blocks for motion control □ Example: MC_MoveAbsolute, MC_CamIn, ServoDrive, etc. ■ Packaging function blocks □ Example: Analog film tension control, rotary knife, lateral film position control, etc. ■ Conveying function blocks □ Example: tracking, turntable, conveyor, etc. ■ Hoisting functions □ Hoisting function blocks: anti-sway, anti-crab, hoisting position synchronization, etc. □ Application template for industrial crane ■ Pumping application □ Pumping function blocks: cavitation protection, friction loss, PID, stage/destage functions, etc. □ Application template for booster ■ Material processing application □ Application templates ■ Energy efficiency library
Tools	■ Controller assistant □ Manage the firmware and application without opening SoMachine □ Create images and backup of the controller ■ Software configuration manager □ Manage the installed versions and components of SoMachine ■ License manager □ Activate and manage licenses for all Schneider Electric licensed products □ Support registration and license transfer ■ Schneider Electric Software Update (SESU) □ Online notification of all available updates and news about the installed Schneider Electric software products □ Download and install updates, patches, and extensions from the web

SoMachine software

Simplify machine programming and commissioning

Product offer

SoMachine software is delivered on a DVD whose features are available for a 21 day trial. Afterwards a license is required to continue to benefit from SoMachine.

- SoMachine is available in 8 languages: English, French, German, Italian, Portuguese, Simplified Chinese, Spanish, and Turkish
- Operating systems for engineering PC: Windows XP Professional, Windows 7 Professional 32-bit/64-bit
- Documentation is supplied in electronic format: complete online help with complementary documentation in pdf version

References

SoMachine software

Supported controllers	Reference	
	DVD (1)	License (2) / number & type
Modicon M238, Modicon M241, Modicon M251, Modicon M258, Modicon LMC058, Modicon LMC078 ▲, Magelis SCU, XBTGC, XBTGT/GK, Altivar IMC	SOMNACS41 + Trial V4.1 license (21 days)	SOMNACCZXSPAZZ / 1 (Single)
		SOMNACCZXTPAZZ / 10 (Team)
		SOMNACCZXEPAZZ / 100 (Entity)

Specific application libraries for SoMachine software

Supported controllers	Application Expert libraries	License	Reference
Modicon M238, Modicon M241, Modicon M251, Modicon M258, Modicon LMC058, Modicon LMC078 ▲, Magelis SCU, XBTGC, XBTGT/GK, Altivar IMC	Hoisting	Single	SOMAAECZXSPAZZ
		Team	SOMAAECZXTPAZZ

License updating from V3.0 and V3.1 to V4.1

Supported controllers	SoMachine reference (V3.0/V3.1)	Reference update to SoMachine V4.1	
Modicon M238, Modicon M258, Modicon LMC058, Magelis SCU, XBTGC, XBTGT/GK, Altivar IMC	MSDCHNLMUA (Single)	SOMNADCZXSPAZZ	Single license
	MSDCHNLMTA (Team)	SOMNADCZXTPAZZ	Team license
	MSDCHNLMFA (Facility)	SOMNADCZXEPAZZ	Entity license
Each controller for Solution (controller Type S)	MSDCHLLMUV3●S0/ MSDCHLLMTV3●S0	SOMNSDCZXTPAZZ	–

SoMachine software compatibility with hardware control platforms

Controller type	SoMachine software version
Modicon M238, XBTGC	≥ V1.0
Modicon M258	≥ V2.0
Modicon LMC058, Modicon TM5 CANopen Interface, Modicon TM7 CANopen Interface, Drive controller Altivar IMC	≥ V3.0
Magelis SCU	≥ V3.1 (+ Vijeo Designer V6.1 SP3)
Modicon M241, Modicon M251	≥ V4.1

(1) The DVD is mandatory and delivered with a trial license.

(2) One of the 3 types of license is mandatory.

▲ Available Q2 2014.

SoMachine Basic programming software

For Modicon M221 and M221 Book logic controllers

Compatibility of offers

SoMachine Basic programming software

- > Modicon M221 logic controllers
- > Modicon M221 Book logic controllers
- > Modicon TM3 expansion modules
- > Modicon TM2 expansion modules

Presentation

SoMachine Basic programming software is a user-friendly tool designed to develop projects on Modicon M221 or Modicon M221 Book logic controllers. It can convert applications created on TwidoSuite and TwidoSoft.

- SoMachine Basic is organized according to the project development cycle: navigation of the software is easy and intuitive.
- SoMachine Basic offers a modern interface, so that getting started is:
 - User-friendly and fast: The simplified interface helps you find the information you need in two or three clicks maximum
 - Efficient, due to functions available



SoMachine Basic software

Connecting a PC to the controller

There are several ways of connecting a PC to controllers during the programming, debugging and maintenance phases.

■ Link via connection cables

The PC is connected to the M221 controllers via the USB-B port, using cable **TCSXCNAMUM3P** (mini-USB to USB).

■ Link via modem ▲

Modems can reduce the frequency of on-site visits for certain maintenance operations.

- Modem **SR2MOD03** connected to the M221 controller must be declared in the hardware configuration. It will be initialized by the controller automatically (Hayes initialization string).
- At the PC end, the SoMachine Basic software will associate a special modem connection that will be memorized in the project (including the telephone number to use).

■ Ethernet network link

With their integral Ethernet port, logic controllers **TM221...E...** can be connected to a PC using the Ethernet network and the Modbus TCP/IP protocol.


■ Bluetooth® wireless link

The Bluetooth® wireless link enables complete freedom of movement within a radius of 10 m around the controller.

Schneider Electric offers Bluetooth® wireless adaptors both for the controller side and PC side.

SoMachine Basic programming software

For Modicon M221 and M221 Book logic controllers
Navigation, management, properties, configuration

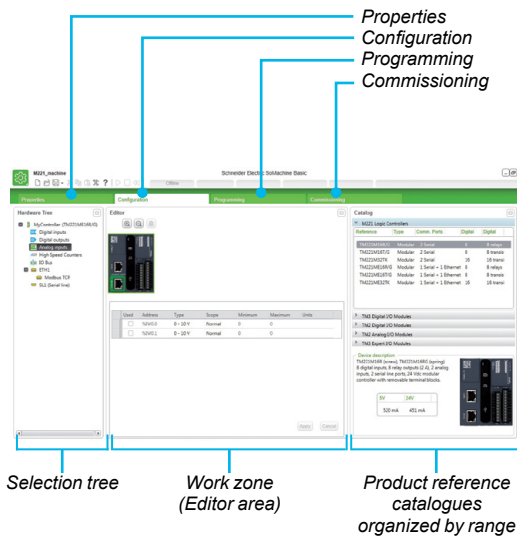

Functions

Navigation


SoMachine Basic offers intuitive and visual navigation.

- The presentation is optimized for selecting the development cycle stage of the project (configuration, programming, commissioning, etc.).
- Each screen is divided into two zones:
 - A selection tree
 - A streamlined workspace to carry out what is necessary and relevant to the current task, without any superfluous information.

Project management

The Project management function is used to:

- Create a new project
- Open a project from the PC (hard disk, CD-ROM, USB key, etc.)
- Retrieve a project from an M221 logic controller
- Open a Twido project, with automatic conversion
- Create a new project based on an existing project template

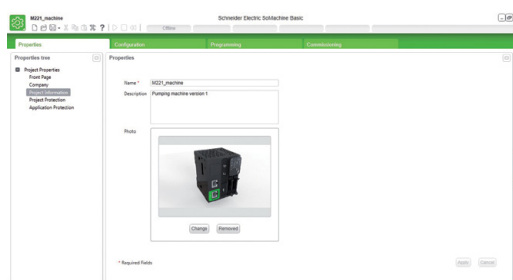


Properties

Properties

Screens enabling entry of identification data for a new project, such as:

- Details of the project creator
- Details of their company
- Information relating to the project
- Project protection information
- Application protection information

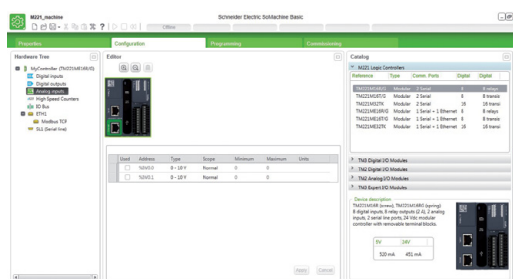

Configuration

Configuration

Configuration allows:


- Creating the hardware configuration corresponding to the application using "catalog" selection:
 - The logic controller (Modicon M221)
 - The I/O expansion modules (Modicon TM2, Modicon TM3)
 - The standard and application cartridges.

A graphic editor enables easy assembly of the various elements using simple drag & drop.

- And configuring all the hardware functions selected for the application:
 - Discrete, analog I/O
 - High Speed Counters inputs
 - Pulse Generator outputs:
 - Pulse Width Modulation (PWM)
 - Pulse generator (PLS)
 - Pulse Train Output (PTO) ▲
 - And the communication ports (Ethernet, serial link)

SoMachine Basic programming software

For Modicon M221 and M221 Book logic controllers
Programming, commissioning, documentation

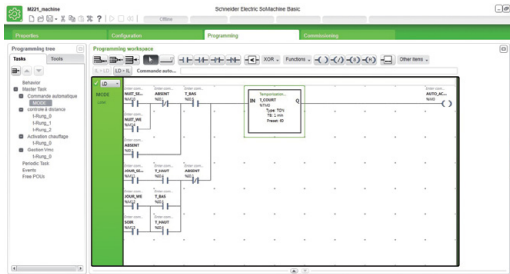

Programming

Functions


Programming

- The program is organized in POU (Program Organization Units) or sections. These sections consist of RUNG (networks) to simplify both reading and navigation within the program.
- The POU are associated with various tasks of the application: master, periodic, events. They can be programmed in:
 - Instruction List (IL) language
 - LADDER (LD) language
- The Rungs define all the connectable elements in the application.
- The LADDER editor provides intuitive and high performance programming:
 - Drag & drop operation
 - Choice of keyboard shortcuts and toolbar according to the user profile
 - List of Rung templates available to assist with the programming of high-level functions
 - Assistance for connection of LADDER elements when creating networks
 - Easy linking of variables to the LADDER elements
 - Context-sensitive online help ▲
 - Project backup, even if the LADDER networks are not complete
 - Automatic analysis and compilation
- Modification online and in Run mode: This mode allows the program of the connected controller to be modified.
- Animation tables.
- Search and replace function.

Commissioning

Tasks that are available and can be carried out during commissioning.

- Connection:
 - Automatic discovery of the controller connected to the PC, according to the type of connection port: USB, Ethernet, Bluetooth®
 - Transfer of application between PC and controller
- Firmware update of the controllers.
- Backup and restoration of all the controller data:
 - Application ▲
 - Firmware ▲
 - Memory area
 - SD memory card management ▲
- Controller information.
- Real-time clock management.

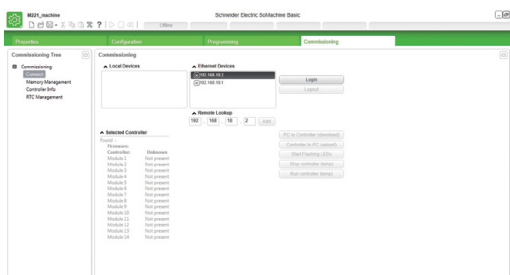

Commissioning

SoMachine Basic programming software

For Modicon M221 and M221 Book logic controllers
Counting

Functions

Counter function

SoMachine Basic provides two counting software functions for M221 logic controllers.

■ High Speed Counting HSC


The counter is accessed via the 32-bit %HSCi function block. It is programmed for execution of one of the following functions:

- ☐ Up/Down counter
- ☐ Bi-phase Up/Down counter
- ☐ Frequency meter


The pulses to be counted can come from an incremental encoder or proximity sensors (upcounting/downcounting) connected to fast inputs of the M221 logic controller.

■ Fast Counting FC

The 16-bit %FCi fast counter enables upcounting or downcounting of pulses (rising edge) on the fast inputs of the M221 logic controller.

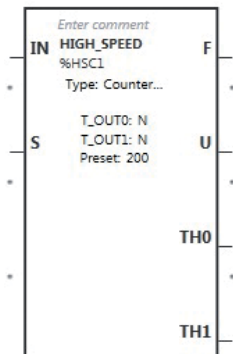


High speed counting HSC




Fast counting FC

SoMachine Basic programming software

For Modicon M221 and M221 Book logic controllers
Position control, event processing, process control (PID)



PLS function



PWM function

Functions

Position control

SoMachine Basic provides three positioning software functions for the M221 logic controllers. For example, they can be used for stepper motors.

■ PLS function

The PLS function block generates fixed ratio pulses. In some cases, the frequency can be fixed and in others it is variable (as in control of slopes when driving a stepper motor). The %PLS function block can be programmed to generate a specific number of pulses.

The %PLS function blocks are assigned to the %Q0.0 or %Q0.1 outputs of the M221 controllers.

The pulse generator signal has a variable period, but with a constant duty cycle which establishes an ON to OFF ratio of 50% of the period.

■ PWM function

The PWM function block generates pulses of fixed frequency, with a variable ON to OFF ratio for the output signal. The ON to OFF duration ratio is a dynamic variable called %PWM.R, with a range from 1% to 100%.

The PWM function blocks are assigned to the %Q0.0 or %Q0.1 outputs on a controller.

The %PWM function block, defined by the user, generates a signal on output %Q0.0 or %Q0.1 of the M221 controller.

■ PTO function ▲

The PTO function enables position control by pulse train - pulse/direction (P/D) or CW/CCW signals, depending on the type of servo drive.

These pulses are generated on outputs %Q0.0 and %Q0.1 of the Modicon M221 logic controller.

Event processing

Event management by the application.

■ Source types:

- ☐ Events on embedded inputs
- ☐ Threshold events on the high speed counter (HSC)
- ☐ Periodic event (Timer)

■ Each event executes a single subroutine of the program.

Process control (PID)


- 14 PID programming loops.
- Auto-tuning algorithm.
- Analog/PWM output.
- Linear conversion of measurement input.
- 2 alarm levels (high and low) on the measurement.
- Control output limits.
- Direct and Inverse action.

SoMachine Basic programming software

For Modicon M221 and M221 Book logic controllers



SoMachine Basic software



TCSXCNAMUM3P

References

SoMachine Basic software

- SoMachine Basic software runs on the following configurations:
 - Microsoft Windows® XP 32 and 64-bit (Service Pack 3), Microsoft Windows® 7 32 and 64-bit and Microsoft Windows® 8
 - 1 GHz Premium type processor, 1 GB hard disk and 1 GB RAM minimum
 - Minimum screen resolution of 1280 x 800 pixels recommended
- The software product is available on :
 - Our website www.schneider-electric.com
 - CD (see below).

Description	☐ Programming languages ☐ User languages	Version/ support	Reference	Weight kg/ lb
SoMachine Basic	☐ Instruction List (IL) language, ☐ LADDER (LD) language ☐ Languages available: English, French, German, Italian, Brazilian Portuguese, Simplified Chinese, Spanish and Turkish	V1.0/ CD	SOMBASAP10	—

Cable for connecting a PC to the M221 and M221 Book logic controllers

Description	For use		Length m/ft	Reference	Weight kg/ lb
	From	To			
Programming cable	Type A USB port of programming and firmware update PC	Mini-B USB port of M221 and M221 Book controllers	3/9.84	TCSXCNAMUM3P	0.065/ 0.143

Link via modem

please refer to our website www.schneider-electric.com

Bluetooth® wireless link

please refer to our website www.schneider-electric.com

chapter 6

Machine safety



Why safety?

Human life is the most important value in a company!

Schneider Electric helps protect people and improve your productivity



Functional safety

Simplifying your work to reach your required performance level and SIL

Due to directives and standards as guidelines and our certified safety chain solutions



All technical information about products listed in this chapter are available on www.schneider-electric.com

- General presentation
 - How can you improve productivity while simplifying machine safety? 6/4 to 6/7
 - Save cost and time with our offer powered by Preventa technology. 6/6 and 6/7
- Preventa safety modules
 - Selection guide6/8 to 6/13
- Preventa safety controllers
 - Selection guide6/14 and 6/15
- Preventa safety PLCs
 - Selection guide6/16 and 6/17

Machine safety

How can you improve productivity while simplifying machine safety?

How can you improve productivity while simplifying machine safety?



Approved

- > Safety chain solutions to achieve the safety level required



Machine Safety Expertise and Co-design

- > Worldwide support and assistance with a local engineers to help you implement machine safety solutions that meet or exceed the latest legislation and compliance with new functional machine safety standards

6



Be confident by using certified safety chain solutions provided by an automation leader

- > Save cost by avoiding external safety experts engineering
- > Reduce design time by our examples of calculation of the safety level for each safety function

Using our certified "Safety chain solutions". They can help you reduce your machine design time and simplify the determination of safety integrity (SIL) and performance (PL) levels


The concept:

- > Provides you certified safety solutions based upon the most common safety functions required on and around a machine. The safety chain solutions enable you to save time and costs when designing and manufacturing your machine in accordance with the European Machinery Directive

Each solution comes with:


- > Bill of materials and the system description file
- > Safety conceptual principle diagram
- > Layout of solution indicating performance level (PL) and safety integrity level (SIL)
- > Example description of the PL and SIL calculation for the safety function
- > Sistema Library file with corresponding solution
- > TÜV certification

Safety chain solutions





Emergency Stop with Embedded Safety Module

- > Emergency Stop Pushbutton / Contactor
- > Cat.3 PL d, SIL 2 / Stop Category 0




Emergency Stop with Embedded Safety Module

- > Emergency Stop Pushbutton / Contactor
- > Cat.4 PL e, SIL 3 / Stop Category 0




Emergency Stop with Embedded Safety PLC

- > Emergency Stop Push Button / PacDrive 3 Drive
- > Cat.4 PL e, SIL 3 / Stop Category 0




Guard Monitoring with Safety Module

- > Limit switch / Contactor
- > Cat.3 PL d, SIL 2 / Stop Category 0

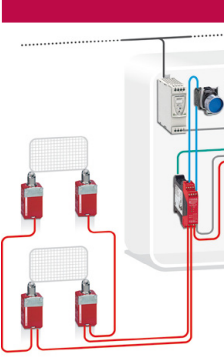

Guard Monitoring with Safety Module

- > Coded Magnetic Switch / Variable Speed Drive
- > Cat.4 PL e, SIL 3 / Stop Category 1

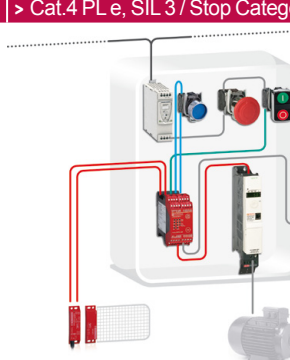


Machine safety

How can you improve productivity while simplifying machine safety?


Safety chain solutions




Guard Monitoring with Safety Module
 > Guard switch with lock / Variable Speed Drive
 > Cat.3 PL d, SIL 2 / Stop Category 1




Guard Monitoring with Safety Module
 > Coded Magnetic Switch / Servo Drive
 > Cat.3 PL e, SIL 3 / Stop Category 1




Guard Monitoring with Safety Module
 > Guard switch with lock / Contactor
 > Cat.4 PL e, SIL 3 / Stop Category 0




Guard Monitoring with Safety Module
 > Coded Magnetic Switch / Contactor
 > Cat.4 PL e, SIL 3 / Stop Category 0




Guard Monitoring with Embedded Safety Module
 > Guard switch with lock / Contactor
 > Cat.4 PL e, SIL 3 / Stop Category 0



Guard Monitoring with Safety Controller
 > Limit Switch / Contactor
 > Cat.4 PL e, SIL 3 / Stop Category 0

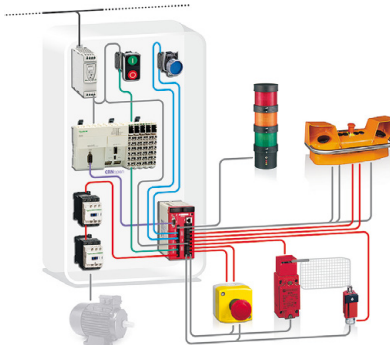

Guard Monitoring with Embedded Safety PLC
 > Guard Switch with lock/ PacDrive 3 Drive
 > Cat.4 PL e, SIL 3 / Stop Category 1



Machine safety

How can you improve productivity while simplifying machine safety?


How can you improve productivity while simplifying machine safety?

Safety chain solutions




Guard monitoring with Embedded Safety Servo Drive

- > Coded Magnetic Switch / Embedded Safety Servo Drive
- > Cat.4 PL e, SIL 3 / Stop Category 2




Guard monitoring with Well Tried Components

- > Limit Switch / Motor Starter
- > Cat.3 PL c, SIL 1 / Stop Category 0




Enabling movement with Safety Controller

- > Two Hand Control Station / Contactor
- > Cat.4 PL e, SIL 3 / Stop Category 0

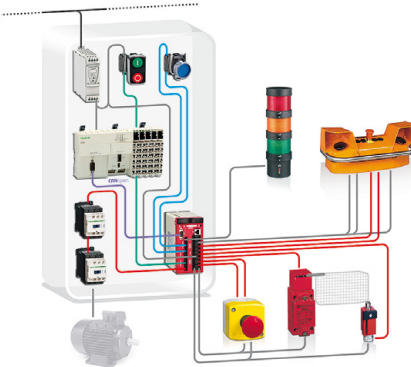


Speed Monitoring with Safety Module

- > Remanent Voltage detection and limit switch and Guard switch with lock / Contactor
- > Cat.4 PL e, SIL 3 / Stop Category 0

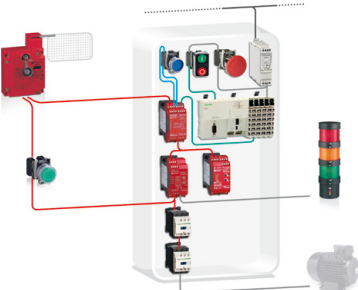

Speed Monitoring with Embedded Safety PLC


- > Selector Switch / PacDrive 3 Drive
- > Cat.4 PL e, SIL 3 / Safe Limited Speed

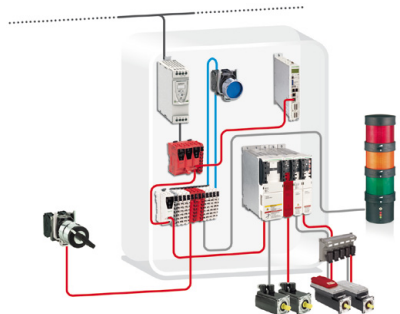

Machine safety


How can you improve productivity while simplifying machine safety?

Safety chain solutions




Position Monitoring with Embedded Safety PLC

- > Limit Switch / PacDrive 3 Drive
- > Cat.4 PL e, SIL 3 / Stop Category 2

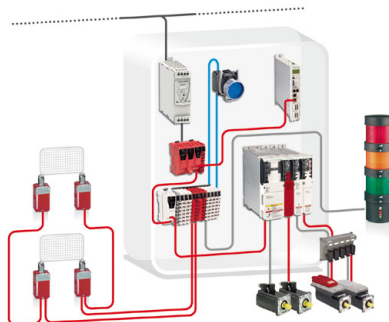


Perimeter Guarding with Safety Module

- > Safety Mat / Contactor
- > Cat.3 PL d, SIL 2 / Stop Category 0

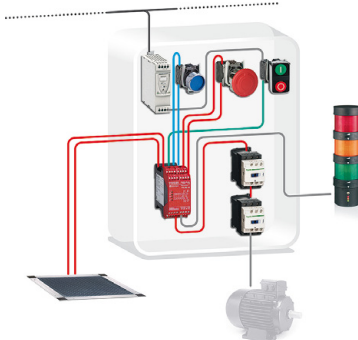


Perimeter Guarding with Safety Module

- > Single Beam Light curtains / Contactor
- > Cat.3 PL c, SIL 1 / Stop Category 0

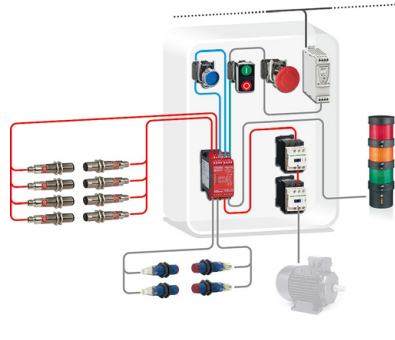



Perimeter Guarding with Embedded Safety Module

- > Light curtain / Contactor
- > Cat.4 PL e, SIL 3 / Stop Category 0

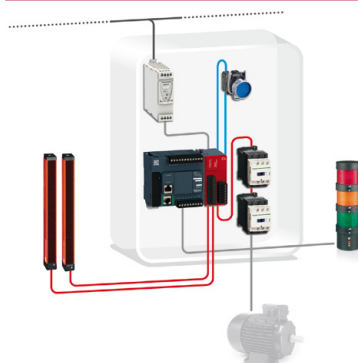

Perimeter Guarding with Embedded Safety Module

- > Light curtain / Variable Speed Drive
- > Cat.3 PL d, SIL 2 / Stop Category 1

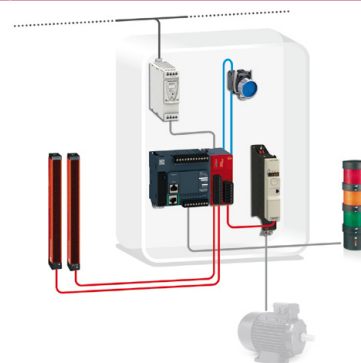


Don't wait more to implement easily the new functional standards, we guide you step by step on <http://www.schneider-electric.com>

- > download our Machine Safety guide
- > select the right safety chain with our online selection tools
- > evaluate the safety of your machine with Software-Assistent SISTEMA & download the Schneider Electric Preventa SISTEMA library

Machine safety

How can you improve productivity while simplifying machine safety?

Save cost and time with our offer powered by Preventa technology

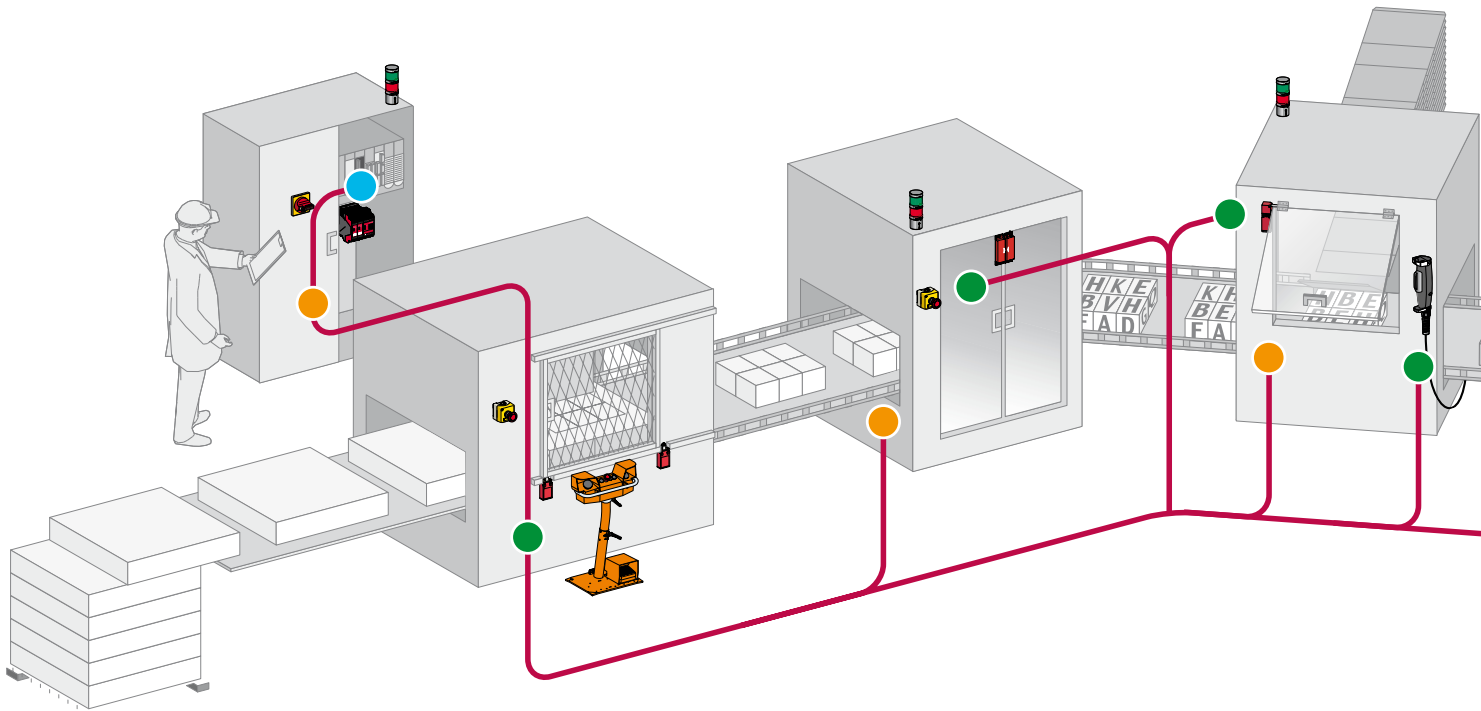

6

Safe signal transmission

Acquire the information:

- > Protective guard devices used as part of safeguarding systems to control the access under specific conditions of reduced risk
- > Light curtains to detect approach to dangerous and limited areas
- > Two hand control stations and enabling switches starting and enabling of dangerous movements
- > Generic protective measures - Emergency stop

Monitor and processing:

- > Safety modules: manage one safety function, monitoring inputs from safety devices and manages the outputs to contactors and drives
- > Safety configurable controllers: stand alone or modular safety controller capable of managing multiple safety functions simultaneously
- > Safety PLCs: programmable electronic systems to carry out safety or non-safety related tasks for machinery and equipment



Protective guard devices



Light curtains



Two hand control stations and enabling switches



Tripwire switch



Emergency stop




Safety modules



Safety Controller



Safety PLCs

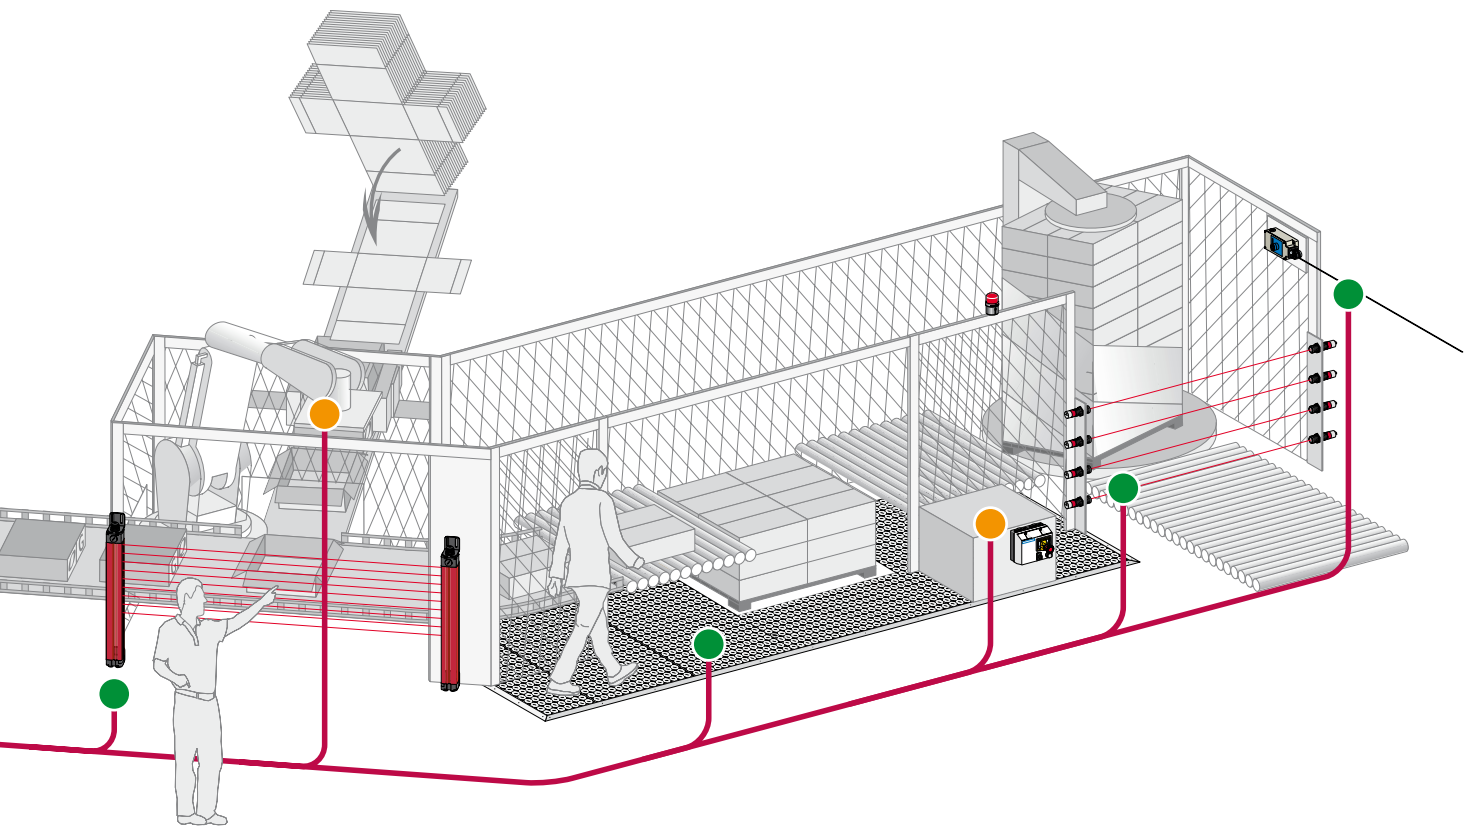

Stop the machine:

- > Contactors to cut-off the electrical power supply to the motors with mechanically linked mirror auxiliary contacts integrated for the feedback loop diagnosis used by the Safety modules, Controllers and PLCs
- > Variable speed drives and Servo drives provide controlled stopping of the machine by using embedded safety functions
- > Rotary switch disconnectors: for equipment isolation from the electrical supply and for emergency stop by direct interruption of the power supply



Variable speed drives



Servo drives







Contactors



Rotary switch disconnectors

Machine safety
Preventa safety modules

Applications	   
Modules	For Emergency stop and switch monitoring For Emergency stop and protective guard applications








Maximum achievable safety level	PLE/Category 4 conforming to EN/ISO 13849-1, SILCL3 conforming to EN/IEC 61508 and EN/IEC 62061	PLE/Category 4 conforming to EN/ISO 13849-1, SILCL3 conforming to EN/IEC 61508 and EN/IEC 62061	PLE/Category 4 (instantaneous safety outputs) and PLd/Category 3 (time delay safety outputs) conforming to EN/ISO 13849-1, SILCL3 (instantaneous safety outputs) and SILCL2 (time delay safety outputs) conforming to EN/IEC 61508 and EN/IEC 62061	PLE/Category 4 conforming to EN ISO 13849-1, SILCL3 conforming to EN/IEC 62061
Conformity to standards	EN/IEC 60204-1, EN 1088/ISO 14119, EN/ISO 13850, EN/IEC 60947-1, EN/IEC 60947-5-1	EN/IEC 60204-1, EN 1088/ISO 14119, EN/ISO 13850, EN/IEC 60947-1, EN/IEC 60947-5-1	EN/IEC 60204-1, EN/ISO 13850, EN 1088/ISO 14119, EN/IEC 60947-1, EN/IEC 60947-5-1	EN 62061, EN ISO 13849-1, EN 50156-1, EN 60204-1, EN/IEC 61496-1, EN/IEC 60947-5-1
Product certifications	UL, CSA, TÜV	UL, CSA, BG	UL, CSA, TÜV	UL, CSA, TÜV

Number of circuits	Safety	3 NO	3 NO	2 NO instantaneous + 3 NO time delay	3 NO instantaneous + 3 NO time delay
	Additional	1 solid-state output for signalling to PLC	1 relay output for signalling to PLC	4 solid-state outputs for signalling to PLC	1 NC
Display		2 LEDs	2 LEDs	4 LEDs	5 LEDs
Supply voltage		~ and 24 V $\overline{\text{---}}$ 48 V $\sim$ 115 V $\sim$ 230 V $\sim$	~ and 24 V $\overline{\text{---}}$	~ and 24 V $\overline{\text{---}}$ 115 V $\sim$ 230 V $\sim$	$\overline{\text{---}}$ 24 V ~ 115...230 V

Synchronisation time between inputs	Unlimited	Unlimited	75 ms (automatic start)	1
Input channel voltage				
24 V/48 V version	~ and 24 V $\overline{\text{---}}$ /48 V $\sim$	24 V $\overline{\text{---}}$	24 V $\overline{\text{---}}$ /–	24 V $\overline{\text{---}}$ /–
24 V/48 V or 110 V/120 V/230 V version	115 V $\sim$ /230 V –	–	48 V $\sim$ /48 V –	24 V $\overline{\text{---}}$ /–
Module type	XPSAC	XPSAXE	XPSATE	XPSATR

PagesPlease refer to our website www.schneider-electric.com

    
For Emergency stop and switch monitoring For Emergency stop, switch or solid-state output safety light curtain monitoring For Emergency stop, switch, sensing mat/edges or solid-state output safety light curtain monitoring










PLE/Category 4 conforming to EN/ISO 13849-1, SILCL3 conforming to EN/IEC 61508 and EN/IEC 62061	PLE/Category 4 (instantaneous safety outputs) and PLd/Category 3 (time delay safety outputs) conforming to EN/ISO 13849-1, SILCL3 (instantaneous safety outputs) and SILCL2 (time delay safety outputs) conforming to EN/IEC 61508 and EN/IEC 62061	PLE/Category 4 conforming to EN/ISO 13849-1, SILCL3 conforming to EN/IEC 61508 and EN/IEC 62061	PLE/Category 4 conforming to EN/ISO 13849-1, SILCL3 conforming to EN/IEC 61508 and EN/IEC 62061	PLE/Category 4 conforming to EN/ISO 13849-1, SILCL3 conforming to EN/IEC 61508 and EN/IEC 62061	PLE/Category 4 conforming to EN/ISO 13849-1, SILCL3 conforming to EN/IEC 61508 and EN/IEC 62061
EN/IEC 60204-1, EN 1088/ISO 14119, EN/ISO 13850, EN/IEC 60947-1, EN/IEC 60947-5-1	EN/IEC 60204-1, EN/IEC 60947-1, EN/ISO 13850, EN/ISO 13850, EN/IEC 60947-1, EN 1088/ISO 14119	EN/IEC 60204-1, EN 1088/ISO 14119, EN/ISO 13850, EN/IEC 60947-1, EN/IEC 60947-5-1	EN/IEC 60204-1, EN 1088/ISO 14119, EN/ISO 13850, EN/IEC 60947-1, EN/IEC 60947-5-1, EN/IEC 61496-1 (type 4)	EN/IEC 60204-1, EN 1088/ISO 14119, EN/ISO 13850, EN/IEC 60947-1, EN/IEC 60947-5-1	EN/IEC 60204-1, EN 1088/ISO 14119, EN/ISO 13850, EN/IEC 60947-1, EN/IEC 60947-5-1
UL, CSA, TÜV	UL, CSA, BG	UL, CSA, TÜV	UL, CSA, TÜV	UL, CSA, TÜV	UL, CSA, TÜV



3 NO instantaneous + 3 NO time delay	2 NO instantaneous + 1 NO time delay	3 NO	7 NO	3 NO instantaneous
3 solid-state outputs for signalling to PLC	–	–	2 NC + 4 solid-state outputs for signalling to PLC	1 NC + 4 solid-state outputs for signalling to PLC
11 LEDs	3 LEDs	3 LEDs	4 LEDs	4 LEDs
24 V $\overline{\text{---}}$	24 V $\overline{\text{---}}$	~ and 24 V $\overline{\text{---}}$	~ and 24 V $\overline{\text{---}}$ 115 V $\sim$ and 24 V $\overline{\text{---}}$ 230 V $\sim$ and 24 V $\overline{\text{---}}$	~ and 24 V $\overline{\text{---}}$ 48 V $\sim$ 110 V $\sim$ and 24 V $\overline{\text{---}}$ 120 V $\sim$ and 24 V $\overline{\text{---}}$ 230 V $\sim$ and 24 V $\overline{\text{---}}$








Unlimited or 1.5 s (depending on wiring)	Unlimited	Unlimited		Unlimited or 2 s, 4 s (depending on wiring)
24 V $\overline{\text{---}}$ /–	24 V $\overline{\text{---}}$ /–	$\overline{\text{---}}$ 24 V/–	24 V $\overline{\text{---}}$ /–	24 V $\overline{\text{---}}$ /–
–	–	–	24 V $\sim$ /24 V –	–
–	–	–	–	24 V $\overline{\text{---}}$ /24 V/24 V
XPSAV	XPSABV	XPSAF	XPSAFL	XPSAR
				XPSAK

Please refer to our website www.schneider-electric.com


Applications	 			
Modules	For enabling switch monitoring	For electrical monitoring of two-hand control stations		
				
Maximum achievable safety level	PLe/Category 4 conforming to EN/ISO 13849-1, SILCL3 conforming to EN/IEC 61508 and EN/IEC 62061	PLc/Category 1 conforming to EN/ISO 13849-1, SILCL1 conforming to EN/IEC 62061	PLe/Category 4 conforming to EN/ISO 13849-1, SILCL3 conforming to EN/IEC 61508 and EN/IEC 62061	
Conformity to standards	EN/IEC 60204-1, EN 61326, EN/IEC 60947-1, EN/IEC 60947-5-1	EN 574 type III A, EN/IEC 60204-1, EN/IEC 60947-5-1, EN 62061	EN/IEC 60204-1, EN/IEC 60947-1, EN/IEC 60947-5-1, EN 574 type III C/ISO 13851	
Product certifications	UL, CSA, TÜV	UL, CSA, TÜV	UL, CSA, BG	
Number of circuits	Safety	2 NO	1 NO	2 NO
	Additional	2 solid-state outputs for signalling to PLC	1 NC	1 NC
Display		3 LEDs	2 LEDs	3 LEDs
Supply voltage		24 V $\overline{\text{---}}$	$\sim$ and 24 V $\overline{\text{---}}$ 115/230 V $\sim$	$\sim$ and 24 V $\overline{\text{---}}$ 115/120 V $\sim$ 230 V $\sim$
Synchronisation time between inputs		–	500 ms	500 ms
Input channel voltage	24 V/48 V version	24 V/–	24 V $\overline{\text{---}}/\text{--}$	24 V $\overline{\text{---}}$
	115 V/230 V version	–	24 V $\sim$ /24 V	–
Module type	XPSVC	XPSBAE	XPSBCE	
Pages	Please refer to our website www.schneider-electric.com			

   				
For control of 1 to 4 single-beam photo-electric sensors XU2 S (transmitter-receiver pair)	For monitoring type 2 and type 4 light curtains Compact and slim ranges		For extending the number of safety contacts	
				
PLe/Category 4 conforming to EN/ISO 13849-1, SILCL3 conforming to EN/IEC 61508 and EN/IEC 62061	PLc/Category 2 conforming to EN/ISO 13849-1, SILCL1 conforming to EN/IEC 61508 and EN/IEC 62061	PLe/Category 4 conforming to EN/ISO 13849-1, SILCL3 conforming to EN/IEC 61508 and EN/IEC 62061	PLe/Category 4 conforming to EN/ISO 13849-1, SILCL3 conforming to EN/IEC 61508 and EN/IEC 62061 (when connected to the appropriate module)	PLe/Category 4 conforming to EN/ISO 13849-1, SILCL3 conforming to EN/IEC 61508 and EN/IEC 62061 (when connected to the appropriate module)
EN/IEC 60204-1, EN/IEC 60947-1, EN/IEC 60947-5-1, EN 574 type III C/ISO 13851	EN/IEC 61496-1, EN/IEC 61496-2, EN/IEC 60204-1, EN/IEC 60947-1, EN/IEC 60947-5-1	EN/IEC 61496-1, EN/IEC 61496-2, EN/IEC 60204-1, EN/IEC 60947-1, EN/IEC 60947-5-1	EN/IEC 60204-1, EN/IEC 60947-1, EN/IEC 60947-5-1	EN/IEC 60204-1, EN/IEC 60947-1, EN/IEC 60947-5-1
UL, CSA, TÜV	UL, CSA, IFA	UL, CSA, TÜV	UL, CSA, BG	UL, CSA, TÜV
2 NO	2 NO	2 solid-state	4 NO	8 NO
2 solid-state outputs for signalling to PLC	4 solid-state PNP NO outputs for signalling to PLC	1 PNP + 1 NPN output for signalling to PLC	2 NC	1 NC
3 LEDs	4 LEDs	14 LEDs + 2-digit display	2 LEDs	3 LEDs
24 V $\overline{\text{---}}$	24 V $\overline{\text{---}}$	24 V $\overline{\text{---}}$	$\sim$ and 24 V $\overline{\text{---}}$	$\sim$ and 24 V $\overline{\text{---}}$ 115 V $\sim$ 230 V $\sim$
500 ms	—	3 s or infinite	—	—
24 V $\overline{\text{---}}/\text{--}$	—	—	—	—
—	—	—	—	—
XPSBF	XPSCM	XPSLCM	XPSECME	XPSECPE
Please refer to our website www.schneider-electric.com				

Applications				
Modules	For the monitoring of applications requiring safety time delays		For coded magnetic switch monitoring	
			For 2 max.	For 6 max.
				
				
Maximum achievable safety level	PL d/Category 3 conforming to EN/ISO 13849-1, SILCL 2 conforming to EN/IEC 62061	PL d/Category 3 conforming to EN/ISO 13849-1, SILCL 2 conforming to EN/IEC 62061	PL e/Category 4 conforming to EN/ISO 13849-1, SILCL 3 conforming to EN/IEC 62061	PL e/Category 4 conforming to EN/ISO 13849-1, SILCL 3 conforming to EN/IEC 62061
Conformity to standards	EN/IEC 60204-1, EN/IEC 60947-1, EN/IEC 60947-5-1	EN/IEC 60204-1, EN/IEC 60947-1, EN/IEC 60947-5-1	EN/IEC 60204-1, EN 1088/ISO 14119, EN/IEC 60947-1, EN/IEC 60947-5-1, EN/IEC 60947-5-3	EN/IEC 60204-1, EN 1088/ISO 14119, EN/IEC 60947-1, EN/IEC 60947-5-1, EN/IEC 60947-5-3
Product certifications	UL, CSA, TÜV	UL, CSA, TÜV	UL, CSA, TÜV	UL, CSA, TÜV
Number of circuits	Safety		Additional	
Display	4 LEDs		3 LEDs	15 LEDs
Supply voltage	~ and 24 V $\overline{\text{---}}$ 115 V $\sim$ 230 V $\sim$		$\overline{\text{---}}$ 24 V	
Synchronisation time between inputs	—	—	500 ms	
Module type	XPSTSA	XPSTSW	XPSDMB	XPSDME
Pages	Please refer to our website www.schneider-electric.com			

				
For zero speed detection of AC or DC motors which produce a remanent voltage in their windings due to residual magnetism	For lift control	For dynamic monitoring of hydraulic valves on linear presses	For dynamic monitoring of double-bodied solenoid valves	For safety stop at top dead centre with automatic overtravel monitoring and control
				
PL d/Category 3 conforming to EN/ISO 13849-1, SILCL 2 conforming to EN/IEC 62061,	PL e/Category 4 conforming to EN/ISO 13849-1, SILCL 3 conforming to EN/IEC 62061	PL e/Category 4 conforming to EN/ISO 13849-1, SILCL 3 conforming to EN/IEC 62061	PL e/Category 4 conforming to EN/ISO 13849-1, SILCL 3 conforming to EN/IEC 62061	PL e/Category 4 conforming to EN/ISO 13849-1, SILCL 3 conforming to EN/IEC 62061
EN/IEC 60204-1, EN/IEC 60947-1, EN/IEC 60947-5-1	EN 81-1, EN 81-2, EN/IEC 60947-5-1, EN 12015, EN 12016	EN 693, EN/IEC 60204-1, EN/IEC 60947-1, EN/IEC 60947-5-1	EN 692, EN/IEC 60204-1, EN/IEC 60947-1, EN/IEC 60947-5-1	EN 692, EN/IEC 60204-1, EN/IEC 60947-1, EN/IEC 60947-5-1
UL, CSA, TÜV	TÜV	UL, CSA, TÜV	UL, CSA, TÜV	UL, CSA, TÜV
1 NO + 1 NC	2 NO	2 NO + 1 NC	1 NO + 1 NC	3 NO
2 solid-state outputs for signalling to PLC	—	4 solid-state outputs for signalling to PLC		
4 LEDs	4 LEDs	8 LEDs		
24 V $\overline{\text{---}}$ 115 V $\sim$ 230 V $\sim$	$\sim$ and 24 V $\overline{\text{---}}$	24 V $\overline{\text{---}}$	24 V $\overline{\text{---}}$ 115 V $\sim$ 230 V $\sim$	— 115 V $\sim$ 230 V $\sim$
—	Infinite	—	—	—
XPSVNE	XPSEDA	XPSPVT	XPSPVK	XPSOT
Please refer to our website www.schneider-electric.com				

Applications

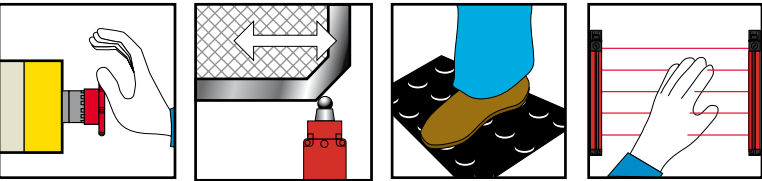

Modules

Controllers for monitoring 2 independent safety functions simultaneously. User selection of 2 functions from a choice of 15, programmable from front face of controller.



Functions

- ☐ Emergency stop monitoring
- ☐ Switch monitoring
- ☐ Enabling switch monitoring
- ☐ Sensing mat or edges monitoring
- ☐ Light curtain monitoring, relay output type
- ☐ etc.

Maximum achievable safety level

PL e/Category 4 conforming EN ISO 13849-1, SILCL 3 conforming to EN/IEC 61508 and EN/IEC 62061

Conformity to standards

EN/IEC 60204-1, EN/IEC 60947-1, EN/IEC 60947-5-1

Product certifications

UL, CSA, TÜV

Number of circuits

Safety
Additional

6 NO (3 NO per function)
3 solid-state outputs for signalling to PLC

Display

12 LEDs

Supply voltage

24 V ---

Communication

CANopen bus
Profibus bus
Modbus bus


—
—
—

Module type

XPSMP

Pages

Please refer to our website www.schneider-electric.com

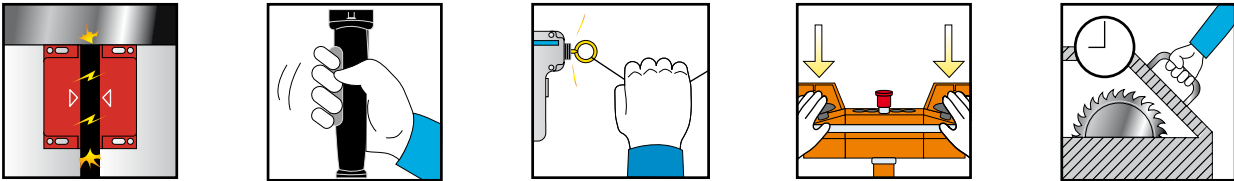

Configurable controllers using software, for several independent safety functions: selection of safety functions using configuration software running on Windows (16 or 32 inputs and 8 independent safety outputs)



- ☐ Emergency stop monitoring
- ☐ Limit switch monitoring
- ☐ Two-hand control monitoring
- ☐ Safety light curtain monitoring, with or without "muting" function
- ☐ Enabling switch monitoring, coded magnetic switch monitoring
- ☐ Safety mat monitoring
- ☐ Hydraulic press solenoid valve monitoring
- ☐ Eccentric press safety stop at top dead centre monitoring. Zero speed detection
- ☐ Hydraulic press monitoring
- ☐ Eccentric press monitoring
- ☐ Foot switch monitoring
- ☐ Chain shaft breakage monitoring
- ☐ Safe tool
- ☐ Position selector

PL e/Category 4 conforming to EN ISO 13849-1, SILCL 3 conforming to EN/IEC 61508 and EN/IEC 62061

EN/IEC 60204-1, EN 1760-1/ISO 13856-1, EN/IEC 61496-1, EN 574/ISO 13851, EN/IEC 60947-1, EN/IEC 60947-5-1

UL, CSA, TÜV

4 NO (2 NO per function) + 6 solid-state

1 "muting" signalling output

LED display on front face

24 V ---

Via SUB-D 9-pin male connector, only on XPS MC16ZC and XPS MC32ZC

Via SUB-D 9-pin female connector, only on XPS MC16ZP and XPS MC32ZP

Via RJ45 connector, on all controllers XPS MC●●Z●

XPSMC

Please refer to our website www.schneider-electric.com



More technical information on www.schneider-electric.com



More technical information on www.schneider-electric.com

Machine safety
Compact Preventa safety PLCs

Presentation			Compact PLCs: ■ Designed for use with numerous machine safety functions and for the protection of personnel. ■ Designed for use in safety related parts of control systems up to category 4, performance level "e" EN/ISO 13849-1 and up to SIL 3 EN/IEC 61508.	
				
User memory	Application		250 kB	
	Data		250 kB	
Response time			Depending on size of application	
Maximum consumption			8 A	
Supply			External --- 24 V supply (with separate protection conforming to EN/IEC 60950, SELV (Safety Extra Low Voltage) or PELV (Protection Extra Low Voltage) rated)	
Inputs	Digital	Number of channels	24, configurable, not electrically isolated	
		Current at state 0	1.5 mA max. at --- 24 V	
		Current at state 1	3.5 mA at --- 24 V 4.5 mA at --- 30 V	
Outputs	Digital	Number of channels	24, configurable, not electrically isolated	
		Output current	Channels 1 to 3, 5 to 7, 9 to 11, 13 to 15, 17 to 19, 21 to 23: 0.5 A at 60°C Channels 4, 8, 12, 16, 20 and 24: 1 A at 60 °C, 2 A at 50°C	
	Line control		2 x 4	
Input/output connections			Removable screw terminals are provided with all Safety compact PLCs. Reference XPSMF40●● is also provided with cage clamp terminal.	
Communication on Ethernet network			By integrated RJ45 switched Ethernet communication ports	
■ Safe communication using SafeEthernet protocol			Yes	Yes
■ Non safe communication using Modbus TCP/IP protocol, server (slave)			No	Yes
Communication on fieldbus				
Non safety using Modbus RTU protocol, slave (RS 485)			No	No
Non safety using PROFIBUS DP protocol (V0 slave)			No	No
Safety PLC type			XPSMF4000	XPSMF4002
Pages			Please refer to our website www.schneider-electric.com	

Compact PLCs: ■ Designed for use with numerous machine safety functions and for the protection of personnel. ■ Designed for use in safety related parts of control systems up to category 4, performance level "e" EN/ISO 13849-1 and up to SIL 3 EN/IEC 61508.			
			
250 kB			
250 kB			
Depending on size of application			
8 A			
External ~ 24 V supply (with separate protection conforming to EN/IEC 60950, SELV (Safety Extra Low Voltage) or PELV (Protection Extra Low Voltage) rated)			
24, configurable, not electrically isolated			
1.5 mA max. at ~ 24 V			
3.5 mA at ~ 24 V 4.5 mA at ~ 30 V			
24, configurable, not electrically isolated			
Channels 1 to 3, 5 to 7, 9 to 11, 13 to 15, 17 to 19, 21 to 23: 0.5 A at 60 °C Channels 4, 8, 12, 16, 20 and 24: 1 A at 60 °C, 2 A at 50 °C			
2 x 4			
Removable screw terminals are provided with all Safety compact PLCs. Reference XPSMF40●● is also provided with cage clamp terminal.			
By integrated RJ45 switched Ethernet communication ports			
Yes	Yes	Yes	Yes
No	Yes	No	Yes
Yes	Yes	No	No
No	No	Yes	Yes
XPSMF4020	XPSMF4022	XPSMF4040	XPSMF4042
Please refer to our website www.schneider-electric.com			

chapter 7

General Motion control



All technical information about products listed in this chapter
are available on www.schneider-electric.com

- General presentation
 - Maximum productivity for your machines 7/2
 - Whatever your performance needs are,
our high-performance drives and motors offer a range of choices 7/3
- Servo Drives and Motors
 - Lexium 23 Plus Servo Drives 7/4
 - Servo motors for Lexium 23 Plus 7/5
 - Lexium 32 Servo Drives 7/6
 - Motors for Lexium 32 7/7
- Integrated drives
 - Lexium 32i, ILA, ILE, ILS 7/8 and 7/9
- Lexium Linear Motion
 - Linear axes 7/10
 - Multi-axis systems 7/12



- > A complete product range
- > solution competency
- > the power of motion
- > connectivity
- > global availability

make Schneider Electric your partner of choice for cost-effective and energy-efficient machine automation

Schneider Electric, you can rely on us!

Maximum productivity for your machines

Complete Motion offer

- > Complete and scalable motion range with outstanding servo control loops for virtually all kinds of machines
- > Wide range of linear motion and robotic products and capacity for customization and 3rd party motors

Simplicity

- > Our motion products are designed for maximum simplicity over the entire machine lifecycle to reduce costs and make your machine processes even more productive
- > Our motion products are easy to integrate into your machine environments through standard software tools, motion libraries and application function blocks

Openness

- > Our products support standardized motion interfaces: Sercos, CANopen, CANmotion, Profibus, DeviceNet, Ethernet IP, EtherCAT, Ethernet Powerlink, Modbus TCP and Pulse Train
- > This allows you to efficiently design machines which can easily be integrated into your customers' automation architectures

Safety

- > Safe Torque Off (STO) embedded in the drives
- > Advanced safety functions: Safe Stop (SS1, SS2), Safety Limited Speed (SLS), Safe Operating Stop (SOS) as option available

With superior performance in the market and embedded safety, our wide range of motion products supports standardized motion interfaces to assist integration.

If you need even more performance, our PacDrive offer is your product of choice. With its centralized system architecture, PacDrive is the ideal solution for controlling a broad range of servo-driven production and packaging machines, as well as material handling equipment.



Whatever your performance needs are, our high-performance drives and motors offer a range of choices

If you need coordinated or synchronized motion control, Schneider Electric offers a wide range of servo drives and integrated drives for machine automation. With a power range up to 25 kW there is the right drive for your application.

Lexium 52/62


- > High-Performance servo drive
- > Single (LXM52) and multi axis (LXM62)
- > Safety on Sercos
- > 0.4 kW to 25 kW

Lexium 32

- > Flexible servo drive
- > Powerful control loop
- > Embedded safety
- > 0.15 kW to 7 kW

Lexium 23 Plus

- > Optimized servo drive
- > Small form factor
- > 0.1 kW to 7.5 kW

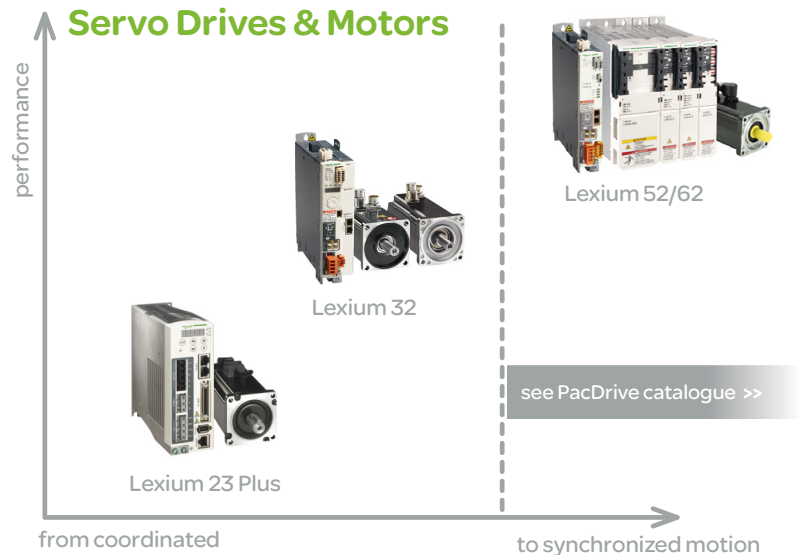

Lexium ILM62


- > Single cable solution
- > Sercos interface
- > Safety on Sercos
- > 0.3 kW to 2 kW

Lexium 32i

- > Modular servo drive
- > CANmotion interfaces
- > Embedded safety
- > 0.6 kW to 2.2 kW

Lexium ILA/ILS/ILE

- > Extremely compact drive
- > Servo, stepper and brushless
- > Large choice of interfaces
- > 0.1 kW to 0.4 kW

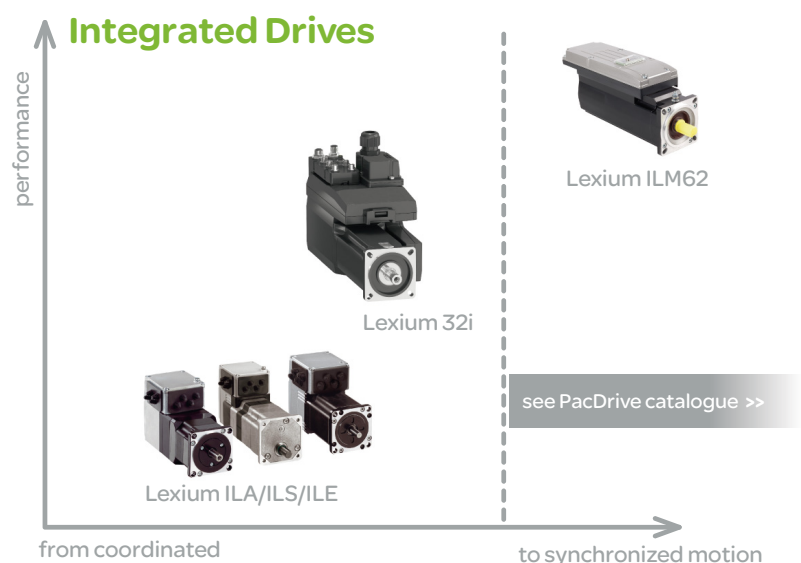

Servo drive	Lexium23A-CAN version	Lexium23D-Pulse Train version
		
Communication	CANopen CANmotion Pulse Train RS232	Pulse Train RS232
Operating modes	Jog mode Profile Position mode Profile Velocity mode Profile Torque mode Homing mode	Electronic gearbox Positioning mode Speed mode Torque mode
Functions	Auto-tuning 2-notch filters Position capture	Auto-tuning 2-notch filters Position capture
24V logic inputs	8 reassignable	8 reassignable
24V logic outputs	5 reassignable	5 reassignable
Analog inputs	2	2
Pulse control input	RS422 500 kHz (standard)/4 MHz (high-speed) 200 kHz open collector	
ESIM PTO output	1 RS422	1 RS422
Encoder	High-speed pulse train	High-speed pulse train
Architecture	Control via: CANopen CANmotion Pulse Train Analog input	Control via: Pulse Train Analog input
Type of servo drive	LXM23A	LXM23D

Servo motor	
	
Application type	From ultra-low inertia to high inertia, suitable for highly dynamic and high-load applications
Flange size	40, 60, 80, 100, 130 and 180 mm
Continuous stall torque	0.32 to 47.74 Nm
Encoder type	20-bit incremental
Degree of protection	Casing Shaft end
	IP65 IP40 (standard)/IP65 (option)
Type of servo motor	BCH



General Motion Control

Servo Drives and Motors

Lexium 32

Servo Drives		Lexium 32 Compact	Lexium 32 Advanced	Lexium 32 Modular	Lexium 32 Sercos
					
Communication	Integrated	Modbus serial link Pulse train	Modbus serial link CANopen, CANmotion machine bus	Modbus serial link Pulse train	Modbus serial link Sercos III
	As an option	–	–	CANopen, CANmotion machine bus, DeviceNet, EtherNet/IP, PROFIBUS DP, EtherCAT, I/O module	–
	Operating modes	Manual mode (JOG), Electronic gearbox, Speed control, Current control	Homing, Manual mode (JOG), Speed control, Current control, Position control	Homing, Manual mode (JOG), Motion sequence, Electronic gearbox, Speed control, Current control, Position control	Homing, Manual mode (JOG), Speed control, Current control, Position control
	Functions	Auto-tuning, monitoring, stopping, conversion			
		–	Stop window, Rapid entry of position values	Stop window, Rapid entry of position values, Rotary axes, Position register	Stop window, Rapid entry of position values
24 V $\square$ logic inputs		6, reassignable	3, reassignable	4, reassignable	4, reassignable
24 V $\square$ capture inputs (1) (2)		–	2	3	3
24 V $\square$ logic outputs (1)		5, reassignable	2, reassignable	3, reassignable	3, reassignable
Analog inputs		2	–		
Pulse control input		1, configurable as: ☐ RS 422 link ☐ 5 V or 24 V push-pull ☐ 5 V or 24 V open collector			
ESIM PTO output		RS 422 link	–	RS 422 link	–
Safety functions	Integrated	"Safe Torque Off" STO			
	As an option	–		Safe Stop 1 (SS1) and Safe Stop 2 (SS2) Safe Operating Stop (SOS) Safe Limited Speed (SLS)	
Sensor	Integrated	SinCos Hiperface® sensor			
	As an option	–		Resolver encoder Analog encoder Digital encoder	
Architecture	Control via	Logic or analog I/O	Motion controller via CANopen and CANmotion machine bus	Schneider Electric or third-party PLCs via communication buses and networks	Modicon LMC078 Sercos III network
Type of Servo Drive		LXM32C	LXM32A	LXM32M	LXM32S

(1) Unless otherwise stated, the logic I/O can be used in positive logic (Sink inputs, Source outputs) or negative logic (Source inputs, Sink outputs).

- (1) Unless otherwise stated, the logic I/O can be used in pos.
- (2) The capture inputs can be used as standard logic inputs.

General Motion Control

Servo Drives and Motors

Motors for Lexium 32

Servo motors			
			
Application type		High load, With robust adjustment of the movement	High dynamic range, Power density
Flange size		70, 100, 140, 190, and 205 mm (2.76, 3.94, 5.51, 7.48, and 8.07 in.)	55, 70, 100, and 140 mm (2.17, 2.76, 3.94, and 5.51 in.)
Continuous stall torque		1.2 to 84 Nm	0.5 to 33.4 Nm
Encoder type		□ Single turn SinCos: 32,768 points/turn and 131,072 points/turn □ Multiturn SinCos: 32,768 points/turn x 4,096 turns and 131,072 points/turn x 4,096 turns	□ Single turn SinCos: 131,072 points/turn □ Multiturn SinCos: 131,072 points/turn x 4,096 turns
Degree of protection	Casing	IP 65 (IP 67 conformity kit as an option)	
	Shaft end	IP 50 or IP 65 (IP 67 conformity kit as an option)	
Type of servo motor		BMH	BSH

Type of application	Machine auxiliary axes or low-power applications	Machines with high power applications
Type of solution	Integrated drive system in order to optimize the size of the enclosure	Integrated drive system in order to optimize the size of the enclosure



Type of process		Requiring high dynamic performance and precise positioning	Automatic format adjustment
Technology type		Integrated drive with servo motor	Integrated drive with DC brushless motor
Main characteristics		Compact Optional integrated holding brake	High holding torque with power off Optional integrated planetary gearbox
Dynamic response		★★★★	★★
Precision and stability		★★★★	★★
Economy mode		★★★★★	★★★★
Motor inertia		Medium	
Control interfaces	Control signals	I/O	
	Buses and networks	CANopen, PROFIBUS DP, RS 485 serial link, DeviceNet, EtherCAT, Ethernet/IP, Modbus TCP, Ethernet Powerlink	
	Motion bus	—	
Motor-drive combination	Nominal power	150...370 W	100...350 W
	Nominal speed	500...9000 rpm	1500...7000 rpm
	Nominal torque	0.26...0.78 Nm	0.18...0.5 Nm
Drive characteristics	Safety function	Safe Torque Off	
	Power section line supply	24...48 V $\overline{\text{---}}$	
	Power supply Input voltage control	Power supply shared with the power section line supply	
Motor characteristics	Type of sensor (resolution) (1)	☐ Single-turn SinCos encoder (16,384 pulses/rev) ☐ Multi-turn SinCos encoder (16,384 pulses/rev x 4096 revolutions)	Absolute encoder (12...1380 pulses/rev)
	Flange size	57 mm	66 mm
Type of integrated drive		ILA	ILE


(1) Sensor resolution given for the drive-motor combination.

Short distances and precise positioning		High power, dynamic and precise positioning
Integrated drive with 3-phase stepper motor		Integrated drive with servo motor
High torque at low speed		High power and flexibility
★★★		★★★★
★★★★		★★★★
★★		★★★★★
Medium		Medium
Pulse/direction (P/D) I/O		I/O
CANopen, PROFIBUS DP, RS 485 serial link, DeviceNet, EtherCAT, Ethernet/IP, Modbus TCP, Ethernet Powerlink		CANopen, EtherCAT
—		CANmotion
100...350 W		400...2100 W
0...1000 rpm		1500...4700 rpm
0.45...6 Nm		1.7...7.2 Nm
Safe Torque Off		Safe Torque Off
24-36-48 V $\overline{\text{---}}$		1 ~ 115...240 V $\sim$, 3 ~ 400...480 V $\sim$
Power supply shared with the power section line supply		Power supply shared with the power section line supply
Power supply shared with the power section line supply		Power supply shared with the power section line supply
Reference impulse sensor		☐ Single-turn SinCos encoder (32,768 points/turn and 131,072 points/turn) ☐ Multiturn SinCos encoder (32,768 points/turn x 4,096 turns and 131,072 points/turn x 4,096 turns)
57 and 85 mm		70 and 100 mm
ILS		LXM32i + BMI




General Motion Control
Lexium Linear Motion
Linear axes

Axis type		Portal axes	
Movement	Number of directions	1	
	Movement type	Generally horizontal	
	Position of the load	On carriage	
Drive		Toothed belt	Ballscrew
Type of guide		Ball or roller	Ball

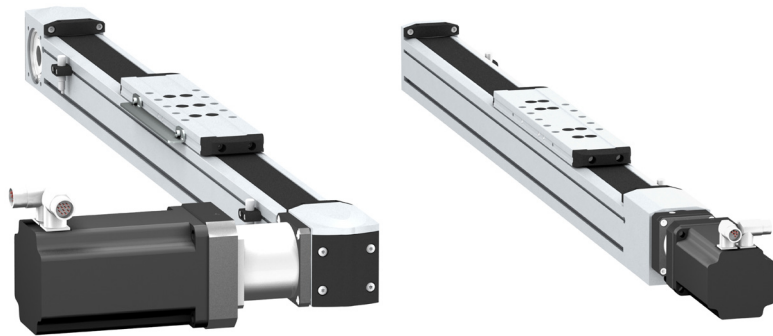


Main characteristics	☐ High dynamic response ☐ Long stroke length ☐ High positioning speed	☐ High precision movement (positioning, repeatability, guiding) ☐ High feed forces ☐ High rigidity
	★★★★★	★★★
Dynamic response	★★★★★	★★★
Precision	★★★	★★★★★
Maximum payload	100 kg	100 kg
Maximum driving force	2600 N	4520 N
Maximum speed of movement of the load	8 m/s	1.25 m/s
Maximum working stroke	5500 mm	3000 mm
Repeatability	± 0.05 mm	± 0.02 mm
Options	☐ Choice of guide type: Ball (for applications requiring high forces and torques) or roller (simple, cost-effective solution) ☐ Wide range of sensors for the limit switch function ☐ Choice of carriage type for adapting to the load ☐ Option to add carriages ☐ Anti-corrosion version ☐ Anti-static belt	☐ Choice of pitch ☐ Protective metal strip ☐ Wide range of sensors for the limit switch function ☐ Choice of carriage type for adapting to the load ☐ Option to add carriages ☐ Option to add ballscrew supports for longer axes
Type of Linear axes	PAS4●B	PAS4●S

Linear tables	Cantilever axes with mobile structure on profile	Cantilever axes with mobile structure on parallel rods	Telescopic axes
1	1		
Generally horizontal	Generally vertical		Generally horizontal
On carriage	On the side of the profile or on the 2 end blocks	On the 2 end blocks	On carriage
Ballscrew	Toothed belt	Toothed belt or rack	Toothed belt
Double, ball	Ball or roller	Ball	Ball or roller

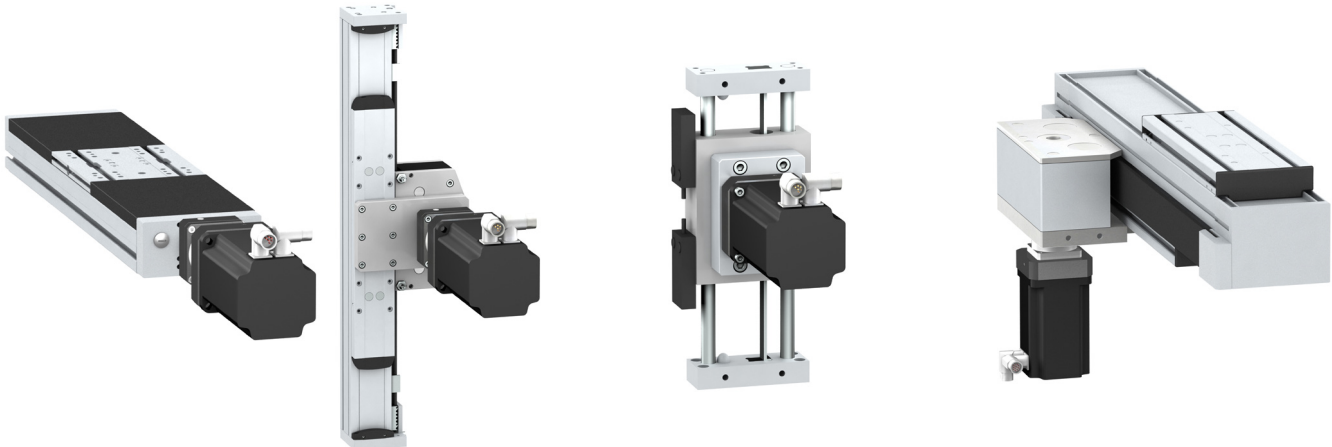

☐ High precision movement (positioning, repeatability, guiding) ☐ High feed forces ☐ High rigidity ☐ Feed movement without mechanical backlash	☐ Long stroke length ☐ High feed forces ☐ Option to mount the load on the side of the profile or on the end blocks ☐ High rigidity	☐ Compact ☐ Mobile structure with light travel weight	☐ Long stroke length from a compact unit ☐ High rigidity ☐ High dynamic response
★★	★★★★	★★★★	★★★★
★★★★★	★★★	★★★	★★
150 kg	50 kg	18 kg	35 kg
2580 N	2150 N	705 N	1500 N
1 m/s	3 m/s	3 m/s	3 m/s
1500 mm	1200 mm	500 mm	2400 mm
± 0.02 mm	± 0.05 mm	± 0.05 mm	± 0.1 mm
☐ Choice of pitch ☐ Several different motor mounting options	☐ Choice of guide type: Ball (for applications requiring high forces and torques) or roller (simple, cost-effective solution) ☐ Protective metal strip ☐ Anti-corrosion version ☐ Wide range of sensors for the limit switch function ☐ Anti-static belt	☐ Anti-corrosion version ☐ Anti-static belt	☐ Choice of guide type: Ball (for applications requiring high forces and torques) or roller (simple, cost-effective solution) ☐ Choice of carriage type for adapting to the load
TAS4	CAS4	CAS3	CAS2




Axis type	
Movement	Number of directions
	Movement type
	
Position of the load	
Multi-axis system type	
Drive	
Type of guide	
Double portal axes	
1	
Horizontal: Combination of two parallel axes X and X	
On two parallel carriages	
PAS 4●B axes + PAS 4●H support axis (driven by the load)	PAS 4●B + PAS 4●B axes (shaft-driven)
Toothed belt on one axis	Toothed belt on both axes
Ball or roller	Ball or roller



Main characteristics		☐ Long stroke length ☐ High dynamic response ☐ High precision movement (positioning, guiding)	☐ High precision movement (positioning, guiding) ☐ High feed forces
Maximum payload		250 kg	300 kg
Maximum working stroke	On the X axis	5500 mm	
	On the Y axis	–	
	On the Z axis	–	
Options		☐ Choice of guide type: Ball (for applications requiring high forces and torques) or roller (simple, cost-effective solution) ☐ Protective metal strip ☐ Anti-corrosion version ☐ Anti-static belt ☐ Wide range of sensors for the limit switch function ☐ Several different motor mounting options ☐ Variable distance between the two axes	
Type of Multi-axis systems		MAXH	MAXS

Linear positioners		Portal robots
2		3
Horizontal and vertical: Combination of one X axis and one Z axis		Horizontal: Combination of two perpendicular axes X and Y Horizontal and vertical: Combination of two perpendicular axes X and Y and one Z axis
On the side or on the end blocks of the Z axis profile ☐ MAX S + CAS 4 axes ☐ MAX S + CAS 3 axes		On the Y axis carriage ☐ MAX S + MAX H axes ☐ MAX S + PAS 4●B axes
Toothed belt on each axis		On the side or on the end blocks of the Z axis profile ☐ MAX S + MAX H + CAS 4 axes ☐ MAX S + MAX H + CAS 3 axes
Ball or roller		

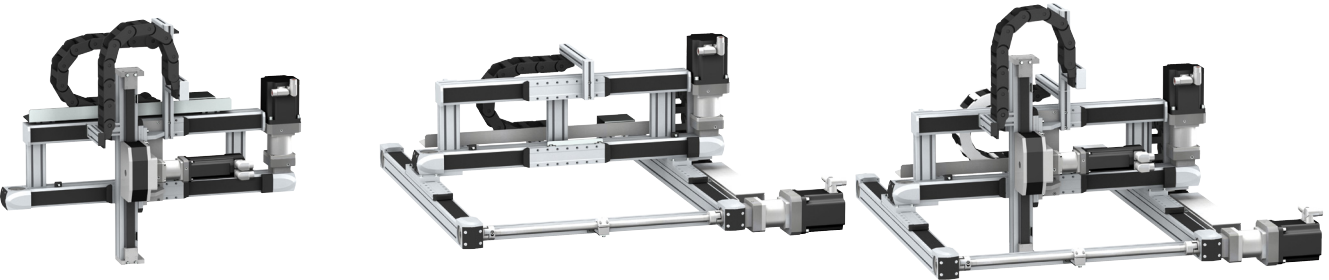

Main characteristics		☐ Dynamic load positioning	☐ Long stroke length on both axes	☐ Long stroke length on three axes
Maximum payload		50 kg	130 kg	50 kg
Maximum working stroke		5500 mm	5500 mm	5500 mm
		–	1500 mm	1500 mm
		1200 mm	–	1200 mm
Options		☐ Choice of guide type: Ball (for applications requiring high forces and torques) or roller (simple, cost-effective solution) ☐ Wide range of sensors for the limit switch function Supplied as standard: ☐ Protective metal strip ☐ Anti-corrosion version ☐ Anti-static belt		
Type of Multi-axis systems		MAXP	MAXR●2	MAXR●3

chapter 8

Related products



All technical information about products listed in this chapter
are available on www.schneider-electric.com

■ Soft starters for synchronous and asynchronous motors	
Selection guide	8/2
■ Variable speed drives	
Selection guide	8/4
■ Operator dialogue terminals	
□ Magelis™ Small panels	
Selection guide	8/6
□ Magelis™ Advanced Panels	
Selection guide	8/8 and 8/10
□ Magelis™ Optimum Advanced terminals	
Selection guide	8/12
■ Control and signaling components	
□ Control and signaling units	
Selection guide	8/14
□ Control stations and enclosures	
Selection guide	8/16
■ Control and protection components	
□ TeSys T Motor Management System	
Selection guide	8/18
□ Motor starter solutions with 1, 2 or 3 products	
Panorama	8/20
□ Short-circuit and overload protection	
Panorama	8/22
□ Incoming protection and switching	
Panorama	8/24
■ Phaseo Power supplies	
Selection guide	8/26
■ Indication and metering	
Panorama	8/28
■ Power distribution and connection systems	
Panorama	8/30
■ Spacial enclosures	
Panorama	8/32

Related products

Soft starters for synchronous and asynchronous motors

Application		Soft starter	Soft start/soft stop unit
		For conveyors, conveyor belts, pumps, fans, compressors, automatic doors, small gantries, belt-driven machines, etc.	
			
Power range for 50...60 Hz (kW) line supply		0.37...11	0.75...15
	Single-phase 110...230 V (kW)	0.37...2.2	–
	Three-phase 200...240 V (kW)	–	0.75...7.5
	Three-phase 200...480 V (kW)	0.37...11	–
	Three-phase 208...600 V (kW)	–	–
	Three-phase 208...690 V (kW)	–	–
	Three-phase 230...415 V (kW)	–	–
	Three-phase 230...440 V (kW)	–	–
	Three-phase 380...415 V (kW)	–	1.5...15
Degree of protection		IP 20	
Drive system	Number of controlled phases	1	2
	Type of control	–	–
	Operating cycle	–	–
Functions (number)		1 Bypass	
Safety functions	Integrated	–	
	Available as an option	–	
Number of preset speeds		–	
Number of I/O	Analog inputs	–	
	Logic inputs	–	
	Analog outputs	–	
	Logic outputs	–	
	Relay outputs	–	
Communication	Integrated	–	
	Available as an option	–	
Dialogue tools		–	
Configuration		–	
Standards and certifications		IEC/EN 60947-4-2	
		CE, UL, CSA, C-Tick, CCC	
References		ATS01N1●●●●	ATS01N2●●●●

Soft start/soft stop unit	
For centrifugal pumps, piston pumps, fans, screw compressors, conveyors, agitators, mixers, centrifugal machines, etc.	
	
4...400	
–	
–	
–	
4...400	
–	
–	
4...355	
–	
3	
Configurable voltage ramp	
Standard	
1 PTC probe	
3	
–	
–	
2 ("N/C"/"N/O")	
Modbus	
–	
Remote display terminal (option)	
SoMove	
IEC/EN 60947-4-2, EMC class A	
CE, UL, CSA, C-Tick, GOST, CCC	
ATS22●●●●	



Related products

Variable speed drives for asynchronous and synchronous motors

Application			Variable speed drive	
			For material handling (small conveyors), packing and packaging (small labelling machines, small bagging machines), suction pumps, centrifugal pumps, circulating pumps, air or smoke extractor fans, plastic film making machines, ovens, boilers, etc.	For material handling (small conveyors), hoists, packing and packaging (small labelling machines, small bagging machines), special machines (mixers, kneaders), textile machines, pumps, compressors, fans, etc.
				
Power range for 50...60 Hz (kW) line supply			0.18...4	0.18...15
Single-phase 100...120 V (kW)			0.18...0.75	–
Single-phase 200...240 V (kW)			0.18...2.2	0.18...2.2
Three-phase 200...230 V (kW)			–	–
Three-phase 200...240 V (kW)			0.18...4	0.18...15
Three-phase 380...480 V (kW)			–	–
Three-phase 380...500 V (kW)			–	0.37...15
Three-phase 500...600 V (kW)			–	–
Three-phase 525...600 V (kW)			–	0.75...15
Three-phase 500...690 V (kW)			–	–
Degree of protection			IP 20	IP 21
Type of cooling			Heatsink	
Drive system	Output frequency		0.1...400 Hz	0.1...500 Hz
	Type of control	Asynchronous motor	Standard (voltage/frequency) Performance (sensorless flux vector control) Pump/fan (Kn² quadratic ratio)	Standard (voltage/frequency) Performance (sensorless flux vector control) Energy saving ratio
		Synchronous motor	–	–
	Transient overtorque		150...170% of the nominal motor torque	170...200% of the nominal motor torque
Functions (number)			40	50
Safety functions	Integrated		–	–
	Available as an option		–	–
Number of preset speeds			8	16
Number of I/O	Analog inputs		1	3
	Logic inputs		4	6
	Analog outputs		1	1
	Logic outputs		1	–
	Relay outputs		1	2
Communication	Integrated		Modbus	Modbus and CANopen
	Available as an option		–	CANopen Daisy Chain, DeviceNet, PROFIBUS DP, Modbus TCP, Fipio
	Bluetooth link®		–	–
Options			–	
Dialogue tools			IP 54 or IP 65 remote terminal	IP 54 or IP 65 remote terminal IP 54 remote graphic display terminal
Configuration	Setup software		SoMove	
	Configuration tools		Simple Loader, Multi-Loader	
Standards and certifications			IEC 61800-5-1 IEC 61800-3 (environments 1 and 2, categories C1 to C3)	
			CE, UL, CSA, C-Tick, NOM, GOST	
References			ATV12	ATV312

Variable speed drives without sensor (velocity control)		Variable speed drive
For material handling (conveyors), transfer machines, packaging machines, hoisting, special machines (textile, transfer), wood-working or metal processing machines, etc.		For hoisting, material handling, packaging, textile machines, wood-working machines, process machines
		
0.18...15		0.37...630
–		–
0.18...2.2		0.37...5.5
–		–
–		0.37...75
–		0.75...500
0.37...15		–
–		1.5...7.5
–		–
–		1.5...630
IP 20		IP 20
Heatsink		Heatsink, base plate or water-cooled circuit
0.1...599 Hz		0.1...500 Hz across the entire range 0.1...599 Hz up to 37 kW at 200...240 V ~ and 380...480 V ~
Voltage/frequency ratios: U/f and 5-point U/f Sensorless flux vector control ratio Kn ² quadratic ratio (pump/fan) Energy saving ratio		Flux vector control with or without sensor Voltage/frequency ratio (2 or 5 points). ENA System
Ratio for synchronous motor without sensor		Vector control with or without speed feedback
170...200% of the nominal motor torque		220% of nominal motor torque for 2 seconds, 170% for 60 seconds
150		> 150
1: STO (Safe Torque Off)		“Power removal” (PWR) safety function
3: SLS (Safe Limited Speed), SDI (Safe Direction Information), SS1 (Safe Stop 1)		–
–		16
3		2...4
6		6...20
1: configurable as voltage (0-10 V) or current (0-20 mA)		1...3
1		0...8
2		2...4
Modbus, CANopen		Modbus, CANopen
DeviceNet, PROFIBUS DP V1, EtherNet/IP, Modbus TCP, EtherCat		Modbus TCP Daisy Chain, Modbus/Uni-Telway, EtherNet/IP, DeviceNet, PROFIBUS DP V0 and V1, INTERBUS, CC-Link
Integrated		–
Filters, braking resistors, line chokes		ATVIMC integrated controller card, interface cards for incremental, resolver, SinCos, SinCos Hiperface®, EnDat® or SSI encoders, I/O extension cards, “Controller Inside” programmable card
IP 54 or IP 55 drive navigator IP 54 or IP 55 remote graphic display terminal		IP 54 or IP 65 remote graphic display terminal
SoMove		SoMove
Simple Loader, Multi-Loader		Simple Loader, Multi-Loader
IEC 61800-5-1, IEC 61800-3 (environments 1 and 2, category C2), UL508C, EN 954-1 category 3, ISO/EN 13849-1/- 2 category 3 (PL e), IEC 61508 (parts 1 & 2) SIL 3 level, draft standard EN 50495E, IEC 60 721-3-3 classes 3C3 and 3S2		IEC 61800-5-1, IEC 61800-3 (environments 1 and 2, categories C1 to C3), IEC 61000-4-2/4-3/4-4/4-5/4-6/4-11
CE, UL, CSA, C-Tick, NOM, GOST		CE, UL, CSA, DNV, C-Tick, NOM, GOST
ATV32		ATV71



Related products

Operator dialogue terminals

Magelis™ Small panels

Applications		Display of graphic pages		
Type of terminal		Small panels with touch screen		
				
Display	Type	Monochrome STN LCD (200 x 80 pixels), backlit - Green, orange and red, or - White, pink and red		
	Capacity	3.4" (monochrome)	3.5" (color)	5.7" (color)
Data entry		Via touch screen		
Memory capacity	Application	16 MB Flash	32 MB Flash	
	Expansion	—		
Functions	Maximum number of pages	Limited by internal FLASH EPROM memory capacity		
	Variables per page	Unlimited		
	Representation of variables	Alphanumeric, bitmap, bargraph, gauge, curves, buttons, LEDs		
	Recipes	32 groups of 64 recipes		
	Curves	Yes, with log		
	Alarm logs	Yes		
	Real-time clock	Access to the PLC real-time clock		
	Alarm relay	—		
	Buzzer	Yes		
Communication	Asynchronous serial link	RS 232C/RS 485 (1) RS 232C using Zelio protocol (2)	RS 232C/RS 485	
	Downloadable protocols	Uni-TE, Modbus and for PLC brands: Allen-Bradley, Omron, Mitsubishi, Siemens		
	Printer link	USB for serial or parallel printer		
	USB ports	1 host type A and 1 device type mini-B		
	Networks	1 Ethernet TCP/IP port (10BASE-T/100BASE-TX) (3)	1 Ethernet TCP/IP port (10BASE-T/100BASE-TX)	
Development software		Vijeo Designer (on Windows XP Professional and Windows 7 Business 32-bit and 64-bit)		
Operating system		Magelis		
References		HMISTO5●●	HMISTU655 HMISTU655W	HMISTU855 HMISTU855W


(1) Only HMISTO511/512.
(2) Only HMISTO501.
(3) Only HMISTO531/532.

Display of text messages and/or semi-graphic pages		Display of text messages and/or semi-graphic pages Control and configuration of data	
Small panels with keypad		Small panels with keypad	Small panels with touch screen and keypad
			
Green backlit monochrome LCD, height 5.5 mm or Green, orange or red backlit monochrome LCD, height 4.34...17.36 mm		Green, orange or red backlit monochrome LCD, height 4.34...17.36 mm	
2 lines of 20 characters or 1 to 4 lines of 5 to 20 characters (monochrome)		1 to 4 lines of 5 to 20 characters (monochrome)	2 to 10 lines of 5 to 33 characters (monochrome)
Via keypad with 8 keys (4 customizable)		Via keypad with ■ 12 function keys or numeric entry (depending on context) ■ 8 service keys	Via keypad with ■ 4 function keys ■ 8 service keys Via touch screen and keypad with ■ 10 function keys ■ 2 service keys
512 KB Flash		512 KB Flash EPROM	
128/200 application pages 256 alarm pages 40...50 Alphanumeric — Yes Yes (5) Access to the PLC real-time clock — —		128/200 application pages 256 alarm pages 40...50, bargraph, buttons, LEDs Alphanumeric — Yes Access to the PLC real-time clock — —	200 application pages 256 alarm pages 50 Alphanumeric, bargraph, buttons, LEDs — — — Yes (4)
RS 232C/RS 485		RS 232C/RS 485	
Uni-TE, Modbus and for PLC brands: Allen-Bradley, Omron, Mitsubishi, Siemens		Uni-TE, Modbus and for PLC brands: Allen-Bradley, Omron, Mitsubishi, Siemens	
RS 232C serial link (5)		RS 232C serial link (5)	
—		—	
—		—	
Vijeo Designer Lite (on Windows 2000 Professional, Windows XP Professional and Windows Vista Business 32-bit)		Vijeo Designer Lite (on Windows 2000 Professional, Windows XP Professional and Windows Vista Business 32-bit)	
Magelis		Magelis	
XBTN●●●●		XBTR●●●	XBTRT●●●

(4) Only XBTRT511.
(5) Depending on model.



Related products
Operator dialogue terminals
Standard Advanced Panels
Magelis™ GT, GK, GH and GTW

Applications		Display of text messages, graphic objects and synoptic views Control and configuration of data			
Type of terminal		Touch screen Standard Advanced Panels			
					
Display	Type	Backlit monochrome (amber or red mode) STN LCD (320 x 240 pixels) or TFT LCD	Backlit monochrome or colour STN LCD or backlit colour TFT LCD (320 x 240 pixels) or (640 x 480 pixels) (3)	Backlit colour STN LCD or colour TFT LCD (640 x 480 pixels)	
	Capacity	3.8" (monochrome or colour)	5.7" (monochrome or colour)	7.5" (colour)	
Data entry		Via touch screen			
		–			
		–			
		–			
		–			
Memory capacity	Applications	32 MB Flash EPROM	16 MB Flash EPROM (3)	32 MB Flash EPROM	
	Expansion	–	By means of 128 MB, 256 MB, 512 MB, 1 GB or 2 GB CF card (except XBTGT2110)		
Functions	Maximum number of pages	Limited by internal Flash EPROM memory capacity	Limited by capacity of internal Flash EPROM memory or CF card memory		
	Variables per page	Unlimited (8000 variables max.)			
	Representation of variables	Alphanumeric, bitmap, bargraph, gauge, tank, tank level indicator, curves, polygon, button, LED			
	Recipes	32 groups of 64 recipes comprising 1024 ingredients max.			
	Curves	Yes, with log			
	Alarm logs	Yes			
	Real-time clock	Built-in			
	Discrete I/O	–		1 input (reset) and 3 outputs (alarm, buzzer, run)	
	Multimedia I/O	–	(3)	1 audio input (microphone), 1 composite video input (digital or analogue video camera), 1 audio output (loudspeaker) (1)	
Communication	Downloadable protocols	Uni-TE (2), Modbus, Modbus TCP/IP (1) and for PLC brands: Mitsubishi, Omron, Allen-Bradley and Siemens			
	Asynchronous serial link	RS 232C/485 (COM1)	RS 232C/RS 422/485 (COM1) and RS 485 (COM2)		
	USB ports	1	1 (3)	1	
	Bus and networks	–	Modbus Plus and Fipway with USB gateway, PROFIBUS DP and Device Net with optional card		
	Printer link	Ethernet TCP/IP (10BASE-T/100BASE-TX) (1) USB port for parallel printer RS 232C (COM1) serial link, USB port for parallel printer			
Development software		Vijeo Designer (on Windows XP Professional and Windows 7 Professional 32/64-bit)			
Operating system		Magelis (200 MHz RISC CPU)	Magelis (133 MHz RISC CPU) (3)	Magelis (266 MHz RIS CPU)	
Type of terminal		XBTGT11/13	XBTGT21/22/23/24/29	XBTGT42/43	

(1) Depending on model.
(2) Uni-TE version V2 for Twido controller and TSX Micro/Premium platform.
(3) For XBTGT 2430, 32 MB Flash EPROM, 1 sound output, 2 USB ports, 266 MHz RISC CPU.
(4) For XBTGT 5430.

Display of text messages, graphic objects and synoptic views Control and configuration of data		
Touch screen Standard Advanced Panels		
Backlit colour STN LCD or colour TFT LCD (640 x 480 pixels or 800 x 600 pixels) (4)	Backlit colour TFT LCD (800 x 600 pixels)	Backlit colour TFT LCD (1024 x 768 pixels)
10.4" (colour)	12.1" (colour)	15" (colour)
Via touch screen		
–		
–		
–		
–		
32 MB Flash EPROM		
By means of 128 MB, 256 MB, 512 MB, 1 GB or 2 GB CF card		
Limited by capacity of internal Flash EPROM memory or CF card memory		
Unlimited (8000 variables max.)		
Alphanumeric, bitmap, bargraph, gauge, tank, tank level indicator, curves, polygon, button, LED		
32 groups of 64 recipes comprising 1024 ingredients max.		
Yes, with log		
Yes		
Built-in		
1 input (reset) and 3 outputs (alarm, buzzer, run)		
1 audio input (microphone), 1 composite video input (digital or analogue video camera), 1 audio output (loudspeaker) (1)		
Uni-TE (2), Modbus, Modbus TCP/IP (1) and for PLC brands: Mitsubishi, Omron, Allen-Bradley and Siemens		
RS 232C/RS 422/485 (COM1) and RS 485 (COM2)		
2		
Modbus Plus with USB gateway		
Ethernet TCP/IP (10BASE-T/100BASE-TX)		
RS 232C (COM1) serial link, USB port for parallel printer		
Vijeo Designer (on Windows XP Professional and Windows 7 Professional 32/64-bit)		
Magelis (266 MHz RIS CPU)		
XBTGT52/53/54	XBTGT63	XBTGT73



Related products
Operator dialogue terminals
Standard Advanced Panels
Magelis™ GT, GK, GH and GTW

Applications		Display of text messages, graphic objects and synoptic views Control and configuration of data	
Type of terminal		Standard Advanced Panels with keypad	
			
Display	Type	Colour TFT LCD (320 x 240 pixels) or monochrome STN	Colour TFT LCD (640 x 480 pixels)
	Capacity	5.7" (monochrome or colour)	10.4" (colour)
Data entry		Via keypad and/or touch screen (configurable) and/or by industrial pointer	
	Static function keys	10	12
	Dynamic function keys	14	18
	Service keys	8	
	Alphanumeric keys	12	
Memory capacity	Application	16 MB Flash EPROM	32 MB Flash EPROM
	Expansion	By means of 128 MB, 256 MB, 512 MB, 1 GB or 2 GB CF card	
Functions	Maximum number of pages	Limited by capacity of internal Flash EPROM memory or CF card memory	
	Variables per page	Unlimited (8000 variables max.)	
	Representation of variables	Alphanumeric, bitmap, bargraph, gauge, tank, tank level indicator, curves, polygon, button, LED	
	Recipes	32 groups of 64 recipes comprising 1024 ingredients max.	
	Curves	Yes, with log	
	Alarm logs	Yes	
	Real-time clock	Built-in	
	Discrete I/O	–	1 input - 3 outputs
	Multimedia I/O	–	–
Communication	Downloadable protocols	Uni-TE (2), Modbus, Modbus TCP/IP (1) and for PLC brands: Mitsubishi, Omron, Allen-Bradley and Siemens	
	Asynchronous serial link	RS 232C/RS 422/485 (COM1) RS 485 (COM2)	
	USB ports	1	2
	Bus and networks	Modbus Plus, Fipway with USB gateway, PROFIBUS DP and Device Net with optional card Ethernet TCP/IP (10BASE-T/100BASE-TX)	
	Printer link	RS 232C (COM1) serial link, USB port for parallel printer	
Development software		Vijeo Designer (on Windows XP Professional and Windows 7 Professional 32/64-bit)	
Operating system		Magelis (CPU 266 MHz RISC)	
Type of terminal		XBTGK21/23	XBTGK53


(1) Depending on model.
(2) Uni-TE version V2 for Twido controller and TSX Micro/Premium platform.

Display of text messages, graphic objects and synoptic views Control and configuration of data				
Portable Standard Advanced Panels		Open touch screen Standard Advanced Panels		
				
Colour TFT LCD (640 x 480 pixels)		Colour TFT LCD (800 x 600 pixels)		Colour TFT LCD (800 x 600 pixels)
5.7" (colour)		10.4" (colour)		12" (colour)
Via touch screen		Via touch screen		
11		—		
—		—		
—		—		
—		—		
32 MB Flash EPROM		2 GB CF system card included with terminal, expandable to 4 GB		
By means of 128 MB, 256 MB, 512 MB, 1 GB or 2 GB CF card (3)				
Limited by capacity of internal Flash EPROM memory or CF card memory				
Unlimited (8000 variables max.)				
Alphanumeric, bitmap, bargraph, gauge, tank, tank level indicator, curves, polygon, button, LED				
32 groups of 64 recipes comprising 1024 ingredients max.				
Yes, with log				
Yes				
Built-in				
—				
1 audio output				
Uni-TE (2), Modbus, Modbus TCP/IP and for PLC brands: Mitsubishi, Omron, Rockwell Automation and Siemens		Uni-TE (2), Modbus, Modbus TCP/IP (1) and for PLC brands: Mitsubishi, Omron, Allen-Bradley and Siemens		
RS 232C/RS 422-485 (COM1)	RS 232C (COM1)	RS 232C (COM1)	RS 232C (COM1)	
1	2+1 frontal	4+1 frontal	2+1 frontal	
—	Modbus Plus with USB gateway			
1 Ethernet port (10BASE-T/100BASE-TX)	2 Ethernet ports (4) (10BASE-T/100BASE-TX/1 GB)			
—	RS 232C (COM1) serial link, USB port for parallel printer			
Vijeo Designer (on Windows XP Professional and Windows 7 Professional 32/64-bit)				
Magelis (266 MHz RISC CPU)		Windows XP Embedded		
XBTGH2460/ XBTGH2460B (5)		XBTGTW5354	XBTGTW652	HMIGTW7354 HMIGTW7354S (6)

(1) Depending on model.
(2) Uni-TE version V2 for Twido controller and TSX Micro/Premium platform.
(3) Except for HMIGTW652 with 4 GB SD memory card.
(4) Except on XBTGTW652 with 1 Ethernet TCP/IP port (10BASE-T/100BASE-TX) and 1 Ethernet TCP/IP port (10BASE-T/100BASE-TX/1 GB).
(5) Version without Emergency stop button.
(6) Version with stainless steel front panel.

Related products
Operator dialogue terminals
Magelis™ GTO Optimum Advanced Panels


Applications	Display of text messages, graphic objects and synoptic views Control and configuration of data
Type of terminal	Optimum Advanced Panels, touch screen
Degree of protection (according to IEC 60529)	IP 65 (IP 67 with addition of a cover)

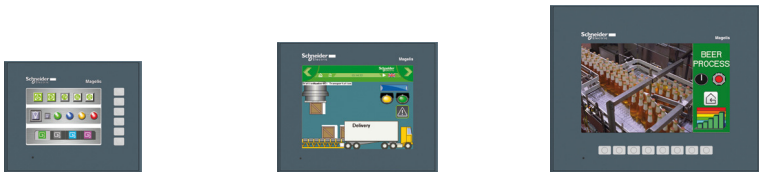

Display	Type	Color TFT LCD, backlit 320 x 240 pixels (QVGA)		Color TFT LCD, backlit 800 x 480 pixels (WVGA)
	Capacity	3.5"	5.7"	7.0 Wide
Data entry		Via touch screen	Via touch screen	Via touch screen
	Static function keys	6 function keys (static or dynamic)	–	8 function keys (static or dynamic)
	Dynamic function keys	–	–	–
	Service keys	–	–	–
	Alphanumeric keys	–	–	–
Memory capacity	Applications	64/96 MB Flash EPROM (1)		96 MB Flash EPROM
	Expansion	–	By 4 GB SD card (except HMIGTO2300)	
Functions	Maximum number of pages	Limited by internal Flash EPROM memory capacity	Limited by capacity of internal Flash EPROM memory or of SD card	
	Variables per page	Unlimited (8000 variables max.)		
	Representation of variables	Alphanumeric, bitmap, bargraph, gauge, tank, tank level indicator, curves, polygon, button, LED		
	Recipes	32 groups of 64 recipes comprising 1024 ingredients max.		
	Curves	Yes, with log		
	Alarm logs	Yes		
	Real-time clock	Built-in		
	Discrete I/O	–		
	Multimedia I/O	–		
	Communication	Downloadable protocols	Uni-TE (2), Modbus, Modbus TCP/IP (1) and for PLC brands: Mitsubishi, Omron, Allen-Bradley and Siemens	
Asynchronous serial link		RS 232C (COM1) and RS 485 (COM2) except HMIGTO1310: RS 232C/485 (COM1)		
USB ports		1 type A host connector + 1 mini-B connector		
Buses and networks		Ethernet TCP/IP (10BASE-T/100BASE-TX) (3), Modbus Plus and Fipway via USB gateway		
Printer link		RS 232C (COM1) serial link (4) and USB port for parallel printer		
Development software		Vijeo Designer (on Windows XP and Windows 7)		
Operating system		Magelis (333 MHz RISC CPU)		
Type of terminal		HMIGTO1300 HMIGTO1310	HMIGTO2300 HMIGTO2310	HMIGTO3510

(1) Depending on model.
(2) Uni-TE version V2 for Twido controller and TSX Micro/Premium platform.
(3) Except HMIGTO1300 and GTO2300 (Modbus Plus and Fipway via USB gateway only).
(4) Except HMIGTO1310 (USB port for parallel printer only).

Display of text messages, graphic objects and synoptic views Control and configuration of data	
Optimum Advanced Panels, touch screen	Optimum Advanced Panels, touch screen, “Stainless Steel” version
IP 65 (IP 67 with addition of a cover)	IP 66K (Front panel with stainless steel frame) for food & beverage environment

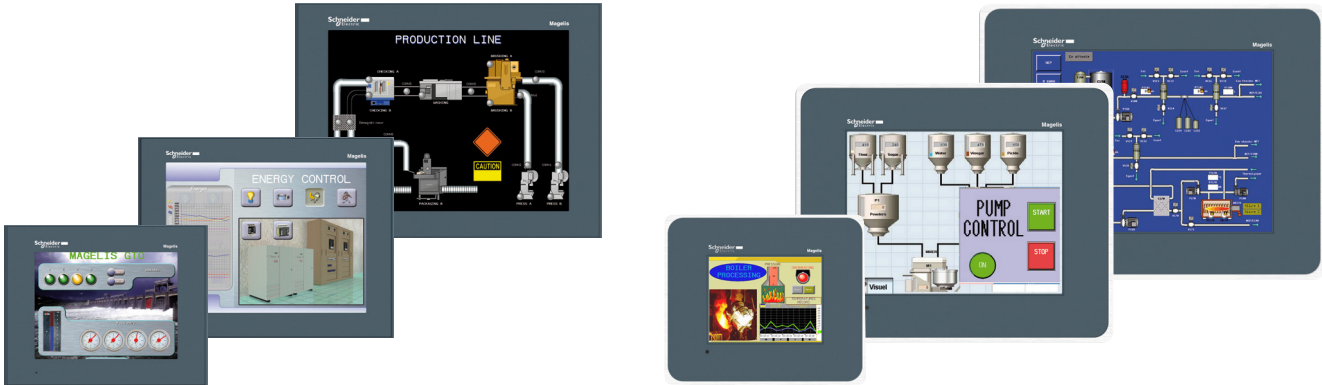

Color TFT LCD, backlit 640 x 480 pixels (VGA)	Color TFT LCD, backlit 640 x 480 pixels (VGA)	Color TFT LCD, backlit 800 x 600 pixels (SVGA)	Color TFT LCD, backlit 320 x 240 pixels (QVGA)	Color TFT LCD, backlit 640 x 480 pixels (VGA)	Color TFT LCD, backlit 800 x 600 pixels (SVGA)
7.5"	10.4"	12.1"	5.7"	10.4"	12.1"
Via touch screen					
—					
—					
—					
—					
96 MB Flash EPROM					
By 4 GB SD card					
Limited by capacity of internal Flash EPROM memory or of SD card					
Unlimited (8000 variables max.)					
Alphanumeric, bitmap, bargraph, gauge, tank, tank level indicator, curves, polygon, button, LED					
32 groups of 64 recipes comprising 1024 ingredients max.					
Yes, with log					
Yes					
Built-in					
—					
—					
Uni-TE (2), Modbus, Modbus TCP/IP (1) and for PLC brands: Mitsubishi, Omron, Allen-Bradley and Siemens					
RS 232C (COM1) and RS 485 (COM2)					
1 type A host connector + 1 mini-B connector					
Ethernet TCP/IP (10BASE-T/100BASE-TX), Modbus Plus and Fipway via USB gateway					
RS 232C (COM1) serial link and USB port for parallel printer					
Vijeo Designer (on Windows XP and Windows 7)					
Magelis (333 MHz RISC CPU)					
HMIGTO4310	HMIGTO5310	HMIGTO6310	HMIGTO2315	HMIGTO5315	HMIGTO6315

(1) Depending on model.
(2) Uni-TE version V2 for Twido controller and TSX Micro/Premium platform.
(3) Except HMIGTO1300 and GTO2300 (Modbus Plus and Fipway via USB gateway only).
(4) Except HMIGTO1310 (USB port for parallel printer only).

Type of products		Pilot lights		Pushbuttons, selector switches and pilot lights		Biometric switches	
							
Description of range		■ LED pilot lights		■ Pushbuttons ■ Multiple-headed pushbuttons ■ Emergency Stop pushbuttons ■ Selector switches and key switches ■ Illuminated pushbuttons ■ Pilot lights		Fingerprint readers 24V ~ ■ Stand-alone biometric switches ■ Stand-alone USB biometric switches ■ USB biometric switches dedicated to Schneider HMI (1)	
Features	Products	Monolithic, compact, low consumption		Complete units or sub-assemblies (body + head)		Monolithic	
	Bezel	Double insulated		Double insulated (3)	Metal, chromium plated or black	Double insulated	Double insulated, dark grey
	Shape of head	Circular		Circular, square or rectangular	Circular	Circular or square	—
Drilling or cut-out for fixing		Ø 8 mm and Ø 12 mm/0.315 in. and 0.472 in.		Ø 16 mm/0.630 in.		Ø 22 mm/0.866 in.	
Degree of protection	Conforming to IEC 60529	IP 40 IP 65 with seal		IP 65	IP 66 IP 69K (Selector switches and key switches, multiple-headed pushbuttons and Emergency Stop pushbuttons with bellows)	IP 65 (control button)	
	Conforming to UL 508 and CSA C22-2 N° 14	—		Enclosure type 4, 4X and 13		Enclosure type 12	
Cabling		Tags for 2.8 x 0.5 mm/0.110 x 0.020 in. connectors or threaded connector		Faston connectors Solder pins for printed circuit boards (3) Fast connector socket (4)	Spring clamp terminal connections Screw clamp terminal connections Faston connectors Connector With adaptor for printed circuit board	Cable or connectors	
Mounting	Panel thickness	1...8 mm/0.039...0.315 in.		1...6 mm/0.039...0.236 in.			
Type references		XVLA		XB6, XB6E	XB4	XB5	XB5S

(1) Compatible with Magelis iPC, STU, OT, GXO, GT (except GT1000 series), GK, GH, and GTO models.
(2) Wireless and batteryless pushbutton and receiver ready-paired at the factory.


Wireless and batteryless pushbuttons		Pushbuttons, selector switches and pilot lights		Joystick controllers		Pushbuttons, selector switches and pilot lights		Cam switches	
									
■ Wireless and batteryless pushbuttons and rope pull switch ■ Configurable receivers ■ Access point ■ Relay-antenna ■ Mobile handy box or plastic boxes for wall mounting		■ Pushbuttons ■ Emergency Stop and Emergency switching off pushbuttons ■ Selector switches and key switches ■ Illuminated pushbuttons ■ Pilot lights		■ 2 or 4 direction ■ Stay put or spring return		■ Pushbuttons ■ Emergency Stop buttons ■ Selector switches and key switches ■ Illuminated pushbuttons ■ Pilot lights		■ Switches ■ Stepping switches ■ Reversing and changeover switches ■ Ammeter switches ■ Voltmeter switches ■ Reversing switches ■ Star-delta and reversing star-delta switches ■ Pole change switches	
Ready-to-use packs (2) and "components" range		Monolithic		Complete units or sub-assemblies (body + head with lever)		Complete units or sub-assemblies (body + head)		Complete units or sub-assemblies (body + front panel + head)	
Metal, chromium plated or double insulated, black		Double insulated, dark grey (or white for pilot lights)		Metal, chromium plated	Double insulated, black	Metal, chromium plated or double insulated, black			
Transmitter with circular head		Circular		Circular		Hexagonal	Square		
Ø 22 mm/0.866 in.						Ø 30 mm/1.181 in.	Ø 16 or Ø 22 mm/0.630 or 0.866 in.: series K10 Ø 22 mm/0.866 in. and multifixing: series K1/K2 4 holes, 48 or 68 centres: series K30...K150		
IP 65	IP 65 (control buttons and pilot lights) IP 54 (Emergency switching off pushbuttons)	IP 65	IP 66	IP 65	IP 66	IP 65: series K10 IP 40, IP 65 with seal: series K1/K2 IP 40: series K30...K150			
Enclosure type 12	Enclosure type 3 (pushbuttons and Emergency stop) and 4 (pilot lights)	Enclosure type 4, 4X and 13		Enclosure type 4 and 13 (9001K) Enclosure type 4, 4X, 13 (9001SK)		—			
Wireless (transmitter) Through cable (receiver)	Screw and captive clamp terminal connections Faston clip connections (pilot lights)		Screw and captive clamp terminal connections						
1...6 mm/0.039...0.236 in.						0.5...6 mm/0.020...0.236 in. (depending on model)			
XB5R, XB4R		XB7		XD4PA	XD2GA	XD5PA	9001K, 9001SK		K10, K1, K2, K30, K50, K63, K115, K150

(3) For Harmony® XB6 only.
(4) For Harmony® XB6E only.

Related products


Control stations and enclosures

Type of applications	All applications			
Enclosures	Plastic		Glass-reinforced polyester	
	Complete stations and separate components for customer assembly		Empty insulated enclosures	
				
Main feature	Pre-drilled control stations		Pre-drilled or undrilled enclosures	
Associated control and signalling units	Harmony XB5® with plastic bezel		Harmony® XB7, monolithic, plastic	Harmony XB4® with metal bezel Harmony XB5 with plastic bezel
Number of cut-outs for Ø 22 control and signalling units	1, 2, 3, 4 or 5	1, 2 or 3 (complete stations) 1, 2, 3, 4 or 5 (empty enclosures)	1, 2 or 3	1, 2, 4, 8 or 16
Material	Polycarbonate		ABS	Glass-reinforced polyester
Colour	Yellow lid Light grey base	Dark grey lid Light grey base	Light grey or yellow lid Light grey base	Coloured grey throughout
Degree of protection	IP 65 / NEMA Enclosure type 4, 4X and 13		IP 54	IP 65
Function	Emergency Stop or Emergency switching off	Start or Stop Start-Stop with pilot light Motion control	According to equipment fitted: ☐ Start or Stop ☐ Start-Stop with pilot light ☐ Motion control ☐ Emergency stop	
Cable entries	Knock-outs (CM12, Pg 13.5)		Knock-outs (ISO 20)	Undrilled
Type references	XALK	XALD	XALE	XAPA

			Specific applications		
Metal		Metal front plate, insulated protective rear cover	Plastic		Metal
Empty enclosures		Empty, flush mounting enclosures: front plate + rear cover	Control stations for severe environments	Lift inspection stations	Key operated control stations
					
Pre-drilled enclosures	Pre-drilled or undrilled enclosures	Pre-drilled front plates & rear covers	Pre-drilled empty control stations	Pre-drilled empty enclosures or fitted stations	Fitted stations
Harmony XB4® with metal bezel Harmony XB5® with plastic bezel			Harmony XB5® with plastic bezel	Harmony XB5® or XB7® with plastic bezel	With key lock
8, 16, 24, 30 or 40	1, 2, 3, 4, 6, 8 or 12	1, 2, 3, 4 or 5	1, 2, 3, 4 or 5	1, 2, 3, 4, 5 or 6 with or without power socket	—
Aluminium alloy or sheet steel	Zinc or aluminium alloy	Front plate: brushed aluminium Rear cover: polystyrene	Mineral reinforced polyamide	Polycarbonate	Zinc alloy
Blue lid and base	XAP M: Blue lid Blue base XAP J: Yellow lid Blue base	Unpainted aluminium	Black lid Black base	Yellow lid Light grey base	Grey
IP 54	IP 65		IP 66 IP 69K	IP 44 (with power socket) IP 55 or IP 66 depending on model	IP 54
According to equipment fitted: ☐ Start or Stop ☐ Start-Stop with pilot light ☐ Motion control ☐ Emergency stop					Start-Stop
☐ Tapped entries for cable-glands ☐ or undrilled	Tapped entries for cable-glands	Knock-outs (with protective rear cover)	Two ISO 20 open entries	☐ Knock-outs (CM12, Pg 13.5) ☐ or undrilled	Tapped for cable-glands
XB2SL	XAPM, XAPJ	XAPE	XALG	XALF	XAPS



Related products
Protection components
TeSys T Motor Management System

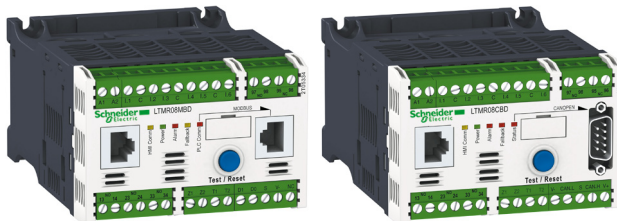Applications	Multifunction motor and machine protection							
								
Device type	Controllers					Input extension modules, for all LTM R controllers		Operator control unit
For network/bus	Modbus	CANopen	DeviceNet	Profibus DP	Ethernet TCP/IP	–		–
Current range	0.4...100 A (with internal current transformer) 100...810 A (with external current transformer)					–		–
Control voltage	⎓ 24 V ~ 100...240 V					⎓ 24 V (1)		~ 100...240 V (1)
Number of I/O	6 inputs 4 outputs					4 independent inputs		–
Measurements	- Current between phases - Earth fault. - Motor temperature.					Voltage between phases		–
Functions	Protection and monitoring functions: - thermal overload, - motor temperature monitoring, - phase imbalance and phase failure, - locked rotor, - long starting times, - phase reversal, - earth fault.					Monitoring functions: - voltage, - power, - Cos φ (power factor)		Display functions: - measurements, - faults and alarms, - statistics, etc...
Device type	LTMR●●M●●	LTMR●●C●●	LTMR●●D●●	LTMR●●P●●	LTMR●●E●●	LTMEV40BD	LTMEV40FM	LTMCU

(1) Input control voltage. The electronics are powered via the controller.



Related Products
Motor starter solutions with 1, 2 or 3 products

Advantages

■ Simple manual motor starter
■ Fast wiring
■ Compacity

Separate components

1 product solution

Motor circuit breaker


GV2 GV3 GV7

Up to 110 kW

2 products solution

Motor circuit breaker


GV2 GV3 GV7
+ Compact NSX


LC1 K LC1 D LC1 F and LC1 B

Up to 110 kW

Pre-assembled:
Ready to incorporate
in the panel


Pre-assembled:
Ready to incorporate
Up to 15 kW GV2ME...K1... GV2DP

3 products solution

Magnetic circuit breaker


GV2 GV3 Compact NSX


+ Contactor


LC1 K LC1 D LC1 F and LC1 B

+ Thermal relay


LRD

Controller


LTM LUTM

LR2K

Up to 110 kW

Switch-disconnector fuse


GS2


+ Contactor


LC1 K LC1 D LC1 F and LC1 B

+ Thermal relay


LRD

Controller


LTM LUTM

LR2K

Up to 560 kW

Enclosed:
Ready to mount on the machine

Enclosed: Ready to mount


VxF
VCFN
VxFY

Up to 45 kW

Enclosed: Ready to mount


GV2MC
GV2MP
GV2PC
GV3PC


Up to 30 kW

Enclosed: Ready to mount


GV2ME
LE1M LE1D

Up to 37 kW

All in one: TeSys U


Control unit

Up to 33 kW LUB12, LUB32

Basic to extended functionalities

- Short circuit, overload protection.
- Overload indication and alarming.
- Status, remote control via communication bus.

Advantages

- Fast wiring.
- Compact motor starter.
- Flexibility: last minute customization.
- Full electrical coordination.

Compliant standards



Legend of symbols

 Switch-disconnector

 Circuit breaker with short-circuit protection


 Fuse switch-disconnector

 Circuit breaker with short-circuit and overload protection

 Thermal relay

 Relay, contactor

Solink integration system into PLC architecture

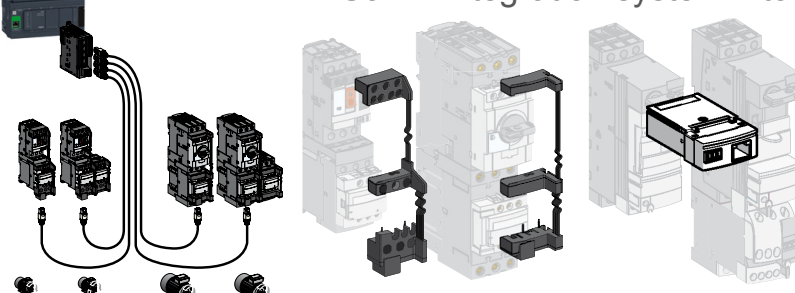
LAD5C... LUFC00...

Easy connection of motor starters to PLC

- RJ45 cables to PLC IO modules.
- LAD5C...: RJ45 connection module for GV + LC1D assembly.
- LUFC00...: RJ45 connection module for LUB...

NEW

Related Products

Short-circuit and overload protection

Applications	DC circuit protection and disconnection: DC power supplies, generators, batteries, etc.	AC circuit protection and disconnection of machines, electrical distribution in buildings
--------------	---	---



Description		Miniature circuit-breaker	Miniature circuit-breaker	Miniature circuit-breaker	Miniature circuit-breaker
Characteristics	Voltage	60 V DC/pole	250 V DC/pole	230 / 400 V AC	
	Number of poles	1 or 2		1, 2, 3 and 4	
	Nominal current (A)	1 to 63		63 to 125	
	Breaking capacity (kA)	6		10	
	Type of loads / Tripping curve (1)	B, C, D	C	B, C, D	
	Width	18 mm/pole		27 mm/pole	
	Product reference	Acti 9 iC60N	Acti 9 C60H-DC	Acti 9 iC60N	Acti 9 C120N
		Multi 9 C60N	Multi 9 C60H-DC	Multi 9 C60N	–
				IEC	IEC/UL

(1) Tripping curve:
B (3 In < Im < 5 In) standard.
C (5 In < Im < 10 In) inrush current.
D (10 In < Im < 14 In) electronics or long cable length.

Protection and disconnection of electrical circuits	Protection of operators against electrical shocks in event of direct or indirect contact with live equipment	Protection of operators against electrical shocks in event of direct or indirect contact with live equipment	Protection of operators against electrical shocks in event of direct or indirect contact with live equipment	Protection of sensitive equipments against voltage surges due to lightning, high power switching, etc.
---	--	--	--	--



Fuse holder				RCBO (3)	RCBO (3)	RCCB (4)	Surge arrester
500 VAC	690 VAC			230/400 V AC			
–				1P+N	2, 3 and 4P		
25	32	50	25	6 to 32		25 to 63	–
8 x 32 mm	10 x 38 mm	14 x 51 mm	22 x 58 mm				
20	120			–	–	–	20
–				C class A 30 or 300 mA	–	C class A 30 or 300 mA	Type 2
–				36 mm	27 to 63 mm	36 to 72 mm	72 to 120 mm
–				Acti 9 DPN Vigi	Acti 9 Vigi iC60 blocks (2)	Acti 9 RCCB ID	Quick PRD 20r
DF8	DF10	DF14	DF22	–	–	Multi9 GFP	–

Related Products

Incoming protection and switching

Applications		On-load switching of motors, resistive and inductive loads	Control and disconnection of electrical distribution circuits
		TeSys Vario	Compact
			
Description		Switch disconnectors Rotary switch with fully visible breaking	Switch disconnectors
	Isolation and Disconnection	✔	
	Protection	—	
Characteristics	Rated operational current (A)	12 to 175	40 to 2500
	Number of poles	3 to 6	3 and 4
	Short-circuit making capacity at 400 V Icm (kA)	0.5 to 3	50 to 220
	Product name	V	INS
	Embedded metering	—	—
Standards and certifications		IEC 60947-3 UL508	IEC 60947-3 UL508

Protection and switching of motors	Protection in industrial and tertiary applications	Feeder protection and circuit disconnection for multistandard motor circuit design	Power circuit protection and disconnection in industrial, infrastructure and building applications
TeSys GS	NG	Powerpact	Compact
			
Switch fuse disconnecter	Circuit-breakers	Moulded case circuit-breakers with optional integrated communication and metering possibilities	
✔	✔		
✔	✔		
32 to 1250	10 to 125	15 to 600	16 to 3200
3 and 4			
5 to 90	10 to 50	18 to 65	25 to 150
GS	NG125	NH, NJ, NL	NSX/NS
—	—	Micrologic metering adapters	
IEC 60947-3	IEC 60947-2	IEC 60947-2 UL508	IEC 60947-2



Related products
Power supplies Phaseo
Regulated switch mode power supplies


Power supplies Function modules	Regulated switch mode						Function modules							
	ABL8MEM, ABL7RM: 7 to 60 W - Mounting on rail ABL8REM, ABL7RP: 60 to 144 W - Mounting on rail				ABL8RPS/8RPM/8WPS: 72 to 960 W - Wide input voltage range Mounting on rail		ABL8DCC: converter modules 24 V/5-12 V		ABL8B: solutions to microbreaks and power outages		ABL8RED24400 : redundancy solution		ABL8PRP24100: solution for discriminating protection of the application	
														
Input voltage	100...240 V ~ 120...250 V ~													
Connection to world-wide line supplies	Single-phase (N-L1) or 2-phase (L1-L2) connection													
	Single-phase (N-L1) connection													
	-													
IEC/EN 61000-3-2 conformity	Yes for ABL7RP, not for ABL8REM and not applicable for ABL8MEM and ABL7RM													
Protection against undervoltage	Yes													
Protection against overloads and short-circuits	Yes, voltage detection. Automatic restart on elimination on the fault													
Diagnostic relay	-													
Compatibility	-													
	-													
Power reserve (Boost)	1,25 to 1,4 In during 1 minute, depending on model (with ABL8MEM) No													
Output voltage	5 V ~ 12 V ~ 24 V ~ 48 V ~													
Output current	ABL8MEM24003													
	ABL8MEM24006													
	ABL8MEM24012													
	ABL8MEM12020													
	ABL7RM24025 ABL7RP4803													
	ABL8REM24030													
	ABL8MEM05040													
	ABL7RP1205 ABL8REM24050													
24 V ~ 5 V ~ 7...12 V ~ 24 V ~ 24 V ~ 24 V ~														
ABL8DCC12020 (2)														
ABL8RPS24030														
ABL8RPS24050														
ABL8DCC05060 (2)														
ABL8RPS24100														
ABL8RPM24200 ABL8WPS24200														
ABL8WPS24400														
ABL8BBU24200 ABL8RED24400														
ABL8BUF24400 ABL8BBU24400 2x ABL8RED24400														
ABL8PRP24100														

Related Products

Indication and metering

Applications	Current transformers	Basic meters	
	Current sensor: the current value is converted into a 0 to 5 A scale. To be used with ammeter, power meter, energy metering	Display of simple electrical values, volts or amps Meters for mounting on DIN rails	Display of simple electrical values, volts or amps Meters for mounting on front panels

CTiVLT iAMPVLT AMP

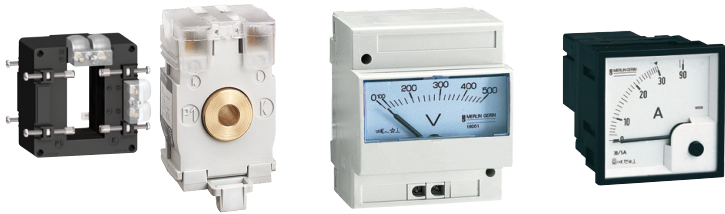

Description		Current transformers	Voltmeter Ammeter	Voltmeter Ammeter
Electrical indications		–	I / U	I / U
Characteristics	Measurement accuracy	Class 0.5 to 3	Class 1.5	Class 1.5
	Installation	On conductor (cable, bar..) Double terminal blocks on type D provide alternative cabling possibility	DIN rail 4 x 18 mm modules	Flush mounted 72 x 72 mm / 96 x 96 mm
	Voltage measurement	Maximum rated operational voltage: 720 V AC	VLT: 500 V AC direct or external VT	VLT: 500 V AC direct or external VT
	Current measurement	Ranges from 40/5 A to 6000/5 A	AMP: 30 A direct or external CT	AMP: external CT
	Communication ports	–	–	–
	Inputs / Outputs	–	–	–
	Memory capacity	–	–	–

Select switches for ammeter and voltmeter



• Din Rail panel mounted 48x48

Basic energy meters		Basic multi-function metering		
Recording and display of energy consumption The meters are mounted on a DIN rail		Simple indication of the current passing through a Compact NSX circuit-breaker	Full indication of electrical values and energy metering of a circuit protected by a Compact NSX circuit-breaker	Full indication of electrical values and energy metering of a circuit

iEM2000 iEM2010 iEM2000TiME1iEM3000 SeriesMicrologic A trip unitMicrologic E trip unitPM3200 PM3210 PM3250 PM3255PM5100 PM5300 PM5500



Kilowatt-hour meters	Kilowatt-hour meters	Kilowatt-hour meters	Ammeter	Power meter	Metering & sub-metering Class 0.5S IEC 62053-22 Class 1 IEC 62053-21 Class 2IEC 62053-23	Metering & sub-metering Class 0.5S IEC 62053-22 Class 0.2S (PM55●●) IEC 62053-22 Class 1/2 IEC 62053-24
E			I	I, U, F, P, Q, S, PF, E	I, U, F, P, Q, S, PF, E (Power demand and current demand)	I, U, F, P, Q, S, PF, E (Power demand and current demand)
Class 1			Current: class 1	Current: class 1 Voltage: 0.5% Power: class 2	Class 0.5	Class 0.2S (PM55●●) Class 0.5S
DIN rail 1.2 or 4 x 18 mm modules			Embedded into circuit-breaker. Remote LCD display available	Embedded into circuit-breaker, remote LCD display available	DIN rail	Flush mounted 96 mm x 96 mm
400 V AC direct				690 V AC	50 V to 330 V AC (Ph-N) 80 V to 570 V AC (Ph-Ph) up to 1 MV AC (ext. VT)	20 V L-N / 35 V L-L to 277 V L-N / 480 V L-L / 600 V L-L (PM55●●)
40 to 63 A direct or external CT			0.2 x In 1.2 x In of circuit-breaker	0.2 x In 1.2 x In of circuit-breaker	External CT	External CT
–			1	1	1	2
–			–	–	–	4 I/O 6 I/O (PM55●●)
–			–	–	–	256 KB 1.1 MB (PM55●●)

StruxureWare Power Monitoring Expert




- Real-time data viewing and sharing via smart dashboards
- Intuitive data formats to customize views
- Historical trending of any measurement
- Alarm and event notification and logging
- Comprehensive reporting

Related Products
Power distribution and connection systems

Applications	Power busbars	Device feeders
	This power busbar system is designed for distributing the power vertically to device feeders or as a horizontal device feeder for circuit-breakers, motor controllers, etc.	These device feeder systems are designed for feeding the power to modular and non-modular protection device on single or multiple DIN rail rows

Lineryg BZ Lineryg FH Lineryg FT Lineryg FM Lineryg HK

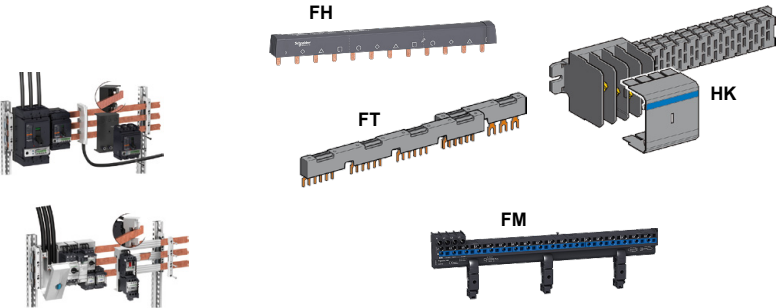

Description		630 A/60 mm busbar system for connection of circuit-breakers, contactors, motor controllers, etc. using a range of snap-on mounting plates and snap-on cable connectors Suitable for both horizontal and vertical power distribution	Insulated comb busbars, with accessories FT simplifies cabling of TeSys motor starters FH is specifically for Acti 9 miniature circuit-breakers, even when lateral auxiliaries are mounted	Insulated busbars, with spring connectors and accessories Quick connection simplifies phase balancing	Insulated busbars, with plug-in pre-wired connectors and mounting plates, accessories Hot-plug: Safely plug-in and unplug live connectors
Characteristics	Rating	630 A	63 to 100 A	63, 80, 160 A	160 A
	Connection technology	–	–	–	–
	Cabling range (mm2)	–	–	–	–
Standards and certifications		IEC - UL	IEC IEC - UL	IEC	IEC - UL

Distribution blocks	Terminal blocks
The wired power distribution is a flexible solution for feeding various components when their electrical connections are on multiple levels	Screw, spring and push-in modular terminal blocks and earth/neutral bars offer a universal solution when a reliable and simple connection is needed in distribution and control panel boards

Lineryg DX Lineryg DS Lineryg BS Lineryg TRV Lineryg TRR Lineryg TRP Lineryg TB



Quick distribution block, for flexible or rigid cables Installation on rail (63 A) or mounting plate (125, 160 A)	Single and four pole multistage distribution blocks Lateral upstream cable terminals for easier connection. Installation on DIN rail or mounting plate	Multistage distribution blocks Plain or threaded holes in copper bars Cabling accessories Horizontal or vertical mounting.	Common range of accessories Copper bars with plain or threaded holes	Common range of accessories For extra reliable connections	Common range of accessories Single-handed installation	Various lengths, accessories
63, 125, 160 A	100, 125, 160, 250 A	160, 250, 400, 630 A	Up to 309 A (IEC), 300 A (UL-CSA)	Up to 76 A (IEC), 85 A (UL-CSA)	Up to 20 A (IEC-UL-CSA)	–
Spring	Screw	Screw	Screw	Spring	Push-in	Spring/screw
6 to 16	1.5 to 120	M6 holes, 16 to 50 mm²	0.18 to 150	0.16 to 16	2.5, 4	2.5 to 16
IEC	IEC	IEC	IEC - UL	IEC - UL	IEC - UL	IEC

Wall-mounting



- S3D Wall-mounting enclosures
- S3DEX Potentially explosive atmospheres
- S3DM Distribution modular enclosures

Most common pumping architectures can be protected by Wall Mounting enclosures Spacial S3D, especially in indoor applications.

Characteristics

- From 300 x 200 mm to 1400 x 1000 mm
- Up to IP66
- Up to IK10

Options
Large choice of enclosure versions and accessories.

Why should I choose it?
Durable, with high UV resistance, coated hinges, aluminium hinge pins and folded gutters that avoids the entry of water, oil and other liquids .

Floor-standing



- SM Floor-standing compact
- SF Floor-standing modular

For more equipment and heavy loads, pumping solutions can be installed in robust sheet metal compact enclosures (Spacial SM) or modular enclosures (Spacial SF). Up to 600 different possible configurations. Spacial SF is also available in kit version.


Characteristics

- From 500 x 500 mm to 2200 x 1800 mm
- IP55
- Up to IK10

Options
Large choice of enclosure versions and accessories.

Why should I choose it?
High level of modularity and flexibility. Save up 25 % of time in assembly.

Outdoor

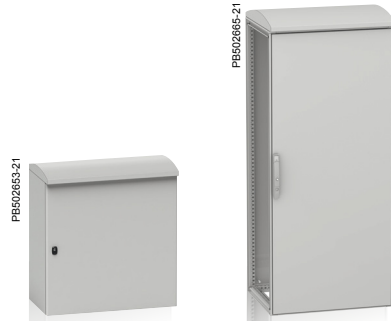

- S3HD Wall-mounting Heavy Duty enclosures
- SFHD Floor-standing Heavy Duty enclosures

New

Spacial S3HD and SFHD are engineered to resist aggressive environments (anti-corrosion certification class C4 H, ISO 12.944).

Characteristics

- From 300 x 200 mm to 2000 x 800 mm
- Up to IP66
- IK10

Options
Ventilated plinths, roof ventilation module, slim fanbox, Heavy Duty fixings.

Why should I choose it?
Designed to resist in outdoor private areas.

ClimaSys

Thermal Management

CV-CA Ventilation/Airing

CU Cooling Units

CE Exchangers

CC Thermal Control

CR Resistance Heaters

Accessories

Mounting

Power distribution

Cable management

Insulating material enclosures

Details and technical datasheets available on www.schneider-electric.com

Wall-mounting Thalassa insulating enclosures are made of Polyester which avoids any electrical contact risks.

Characteristics

- From 430 x 330 mm to 1050 x 850 mm
- Up to IP66
- Up to IK10

Options
Plinths, cable entries, mounting accessories and thermal management devices, as for other enclosures.



- PLM Wall-mounting polyester
 - PLMEX Potentially explosive atmospheres
- Why should I choose it?**
Thalassa PLM ensure a long-life lasting without maintenance.

Thalassa PLA are floor-standing enclosures with a large choice of dimensions and combinations, for pumping solution in harsh environments where corrosion has to be taken in account.

Characteristics

- From 500 x 500 mm to 1500 x 1250 mm
- Up to IP65
- Up to IK10

Options
A variety of versions (completely sealed, open bottom, with or without canopy), mounting accessories and thermal management devices.



- PLA Floor-standing polyester enclosures
 - PLD Floor-standing DIN polyester enclosures
- Why should I choose it?**
Thalassa PLA protect large and heavy control equipment.

New

Thalassa PHD has multiple virtues:


- pressure and shock resistant (IEC 61439-5),
- anti-posting thanks to its special front door,
- insulated (Class II).

Characteristics

- From 500 x 500 mm to 2000 x 750 mm
- Up to IP65
- IK10

Options
Anti-burglary accessory, ventilated plinths, roof ventilation module, slim fanbox.

Why should I choose it?
Suitable for harsh environments in outdoor public areas.



- PHD polyester Heavy Duty enclosures

Project & Services

Configured offer
Adapted services: cut-outs, painting, assemblies...

Specific offer
The co-development service tailor-made for you

Spare Parts

Cable gland plate

Doors

Door accessories

Fixing hardware

Roof accessories

softwares

Spacial.pro
Graphic
configurator

Digital Rules
Enclosures selector

New

Spacial.conf
Services
configurator

ProClima
Thermal calculation
software

chapter 9

Index

■ Product reference index

□ Product reference index 9/2

490NAD91103	4/3	ABFT20E050	2/21	SOMBASAP10	5/11	TCSCN023F13M03	4/13	TCSXCN1M1F1E	4/35
490NAD91104	4/3		2/96	SOMNACCZXEPAAZ	5/5		4/20	TCSXCN1M1F2E	4/35
490NAD91105	4/3	ABFT20E100	2/21	SOMNACCZXSPAZZ	5/5	TCSCN026M16M	4/13	TCSXCN1M1F03E	4/35
490NTC00005	4/49		2/96	SOMNACCZXTPAAZ	5/5		4/20	TCSXCN1M1F5E	4/35
490NTC00005U	4/49	ABFT20E200	2/21	SOMNACS41	5/5	TCSECE3M3M1S4	4/47	TCSXCN1M1F10E	4/35
490NTC00015	4/49		2/96	SOMNADCZXEPAAZ	5/5	TCSECE3M3M2S4	4/47	TCSXCN1M1F15E	4/35
490NTC00040	4/49	ABFTE20EP100	3/13	SOMNADCZXSPAZZ	5/5	TCSECE3M3M3S4	4/47	TCSXCN1M2SA	4/35
490NTC00040U	4/49	ABFTE20EP200	3/13	SOMNADCZXTPAAZ	5/5	TCSECE3M3M5S4	4/47	TCSXCN1M5SA	4/35
490NTC00080	4/49	ABFTE20EP300	3/13	SOMNSDCZXTPAAZ	5/5	TCSECE3M3M10S4	4/47	TCSXCN1M15SA	4/35
490NTC00080U	4/49	ABFTE20SP100	3/13	STBNDP2212	4/3	TCSECL1M3M1S2	4/49	TCSXCN1MNX1E	4/35
490NTW00002	4/47	ABFTE20SP200	3/13	T		TCSECL1M3M3S2	4/49	TCSXCN1MNX3E	4/35
490NTW00002U	4/47	ABFTE20SP300	3/13			TCSECL1M3M5S2	4/49	TCSXCN1MNX10E	4/35
	4/49	ABL8BBU24200	8/26			TCSECL1M3M10S2	4/49	TCSXCN1MNX25E	4/35
	4/49	ABL8BUF24400	8/26			TCSECL1M3M25S2	4/49	TCSXCN2FNX1E	4/34
490NTW00005	4/47	ABL8PRP24100	8/26	TCSCAR01NM120	4/13	TCSECL1M3M40S2	4/49	TCSXCN2FNX3E	4/34
	4/49	ABL8RED24400	8/26		4/20	TCSECN300R2	4/47	TCSXCN2FNX10E	4/34
490NTW00005U	4/47	AM02CA001V000	4/21	TCSCAR013M120	4/13		4/48	TCSXCN2FNX25E	4/34
	4/49		4/39		4/20	TCSECU3M3M1S4	4/47	TCSXCN2M2F1E	4/35
490NTW00012	4/47	B		TCSCCN1FNX1SA	4/34	TCSECU3M3M2S4	4/47	TCSXCN2M2F2E	4/35
	4/49			TCSCCN1FNX3SA	4/34	TCSECU3M3M3S4	4/47	TCSXCN2M2F03E	4/35
490NTW00012U	4/47			TCSCCN1FNX10SA	4/34	TCSECU3M3M5S4	4/47	TCSXCN2M2F5E	4/35
	4/49			TCSCCN1FNX25SA	4/34	TCSECU3M3M10S4	4/47	TCSXCN2M2F10E	4/35
490NTW00040	4/47	BMXXCAUSBH018	2/20	TCSCCN1M1F1	4/34	TCSEK1MDRS	4/48	TCSXCN2M2F15E	4/35
	4/49		2/31	TCSCCN1M1F2	4/34	TCSEK3MDS	4/47	TCSXCN2M2SA	4/35
	4/49		2/41	TCSCCN1M1F03	4/34		4/48	TCSXCN2M5SA	4/35
	4/49		2/85	TCSCCN1M1F5	4/34	TCSESM043F1CS0	4/49	TCSXCN2M15SA	4/35
490NTW00040U	4/47	F		TCSCCN1M1F10	4/34	TCSESM043F1CU0	4/49	TCSXCN2MNX1E	4/35
	4/49			TCSCCN1M1F15	4/34	TCSESM043F2CS0	4/49	TCSXCN2MNX3E	4/35
490NTW00080	4/47			TCSCCN1MNX1SA	4/34	TCSESM043F2CU0	4/49	TCSXCN2MNX10E	4/35
	4/49			TCSCCN1MNX3SA	4/34	TCSESM083F1CS0	4/49	TCSXCN2MNX25E	4/35
490NTW00080U	4/47	FTXCN12F5	4/20	TCSCCN1MNX10SA	4/34	TCSESM083F1CU0	4/49	TCSXCNAMUM3P	2/20
	4/49	FTXCN12M5	4/20	TCSCCN1MNX25SA	4/34	TCSESM083F2CS0	4/49		2/31
	4/49	FTXES01	4/19	TCSCCN1MNX10SA	4/34	TCSESM083F2CU0	4/49		2/41
	4/49	H		TCSCCN1MNX3SA	4/34	TCSESM083F23F0	4/49		2/51
499NEH10410	4/49			TCSCCN1MNX10SA	4/34	TCSESU033FN0	4/47		2/63
499NES18100	4/49			TCSCCN1MNX25SA	4/34		4/49		2/75
499NMS25101	4/49			TCSCCN2FNX1SA	4/34	TCSESU043F1N0	4/47		5/11
499NMS25102	4/49	HMISCU6A5	2/85	TCSCCN2FNX3SA	4/34	TCSESU043FN0	4/49	TCSXCNDNFNX1V	4/35
499NSS25101	4/49	HMISCU8A5	2/85	TCSCCN2FNX10SA	4/34	TCSESU051F0	4/49	TCSXCNDNFNX3V	4/35
499NSS25102	4/49	HMISCU8B5	2/85	TCSCCN2FNX25SA	4/34	TCSESU053FN0	4/47	TCSXCNDNFNX10V	4/35
	4/49	HMIZSDIO	2/85	TCSCCN2M2F1	4/34		4/49	TCSXCNDNFNX25V	4/35
	4/49	HMIZSUKIT	2/85	TCSCCN2M2F2	4/34	TCSMCN3M4F3C2	2/51	TCSXCNDMDF1V	4/35
	4/49	HMIZSURDP	2/85	TCSCCN2M2F03	4/34		2/63	TCSXCNDMDF2V	4/35
	4/49	HMIZSURDP5	2/85	TCSCCN2M2F5	4/34		4/5	TCSXCNDMDF03V	4/35
	4/49	HMIZSUSBB	2/85	TCSCCN2M2F10	4/34		4/7	TCSXCNDMDF5V	4/35
	4/49	L		TCSCCN2M2F15	4/34		4/9	TCSXCNDMDF10V	4/35
499NEH10410	4/49			TCSCCN2MNX1SA	4/34			TCSXCNDMDF15V	4/35
499NES18100	4/49			TCSCCN2MNX3SA	4/34			TCSXCNDMNX1V	4/35
499NMS25101	4/49			TCSCCN2MNX10SA	4/34			TCSXCNDMNX3V	4/35
499NMS25102	4/49	LMC058LF42	2/62	TCSCCN2MNX25SA	4/34			TCSXCNDMNX10V	4/35
499NSS25101	4/49	LMC058LF424	2/62	TCSCCN4F3M1T	4/13	TCSXCN1FNX1E	4/34	TCSXCNDMNX25V	4/35
499NSS25102	4/49	LMC078CECS20T	2/69		4/21	TCSXCN1FNX3E	4/34	TCSXCNEFNX1V	4/35
	4/49	LU9GC3	4/5		4/39	TCSXCN1FNX10E	4/34	TCSXCNEFNX3V	4/35
	4/49		4/7		4/39	TCSXCN1FNX25E	4/34	TCSXCNEFNX10V	4/35
	4/49		4/9		4/39				
ABE7E16SPN20	2/21	O		TCSCCN4F3M05T	4/13				
ABE7E16SPN22	2/21				4/21				
ABE7E16SRM20	2/21				4/39				
	2/96				4/39				
ABE7FU012	2/96	OTB1C0DM9LP	4/19		4/21				
ABE7FU030	2/96	OTB1S0DM9LP	4/19		4/39				
ABE7FU100	2/96	OTB9ZZ61JP	4/19		4/21				
ABE7FU200	2/96	S			4/39				
ABFC20R200	2/97				4/39				
					4/39				
					4/39				

TCSXCNEFNX25V	4/35	TM3AI2H	3/29	TM3TM3G	3/29	TM5ACTB06	3/45	TM5SAI4LK	3/63
TCSXCNEMEF1V	4/35	TM3AI2HG	3/29	TM3XREC1	3/37		3/49	TM5SAI4PH	3/53
TCSXCNEMEF2V	4/35	TM3AI4	3/29	TM3XTRA1	3/37		3/53	TM5SAI6TH	3/53
TCSXCNEMEF03V	4/35	TM3AI4G	3/29	TM3XTYS4	3/31		3/61	TM5SAO2H	3/53
TCSXCNEMEF5V	4/35	TM3AI8	3/29	TM4ES4	4/41	TM5ACTB12	3/41	TM5SAO2L	3/53
TCSXCNEMEF10V	4/35	TM3AI8G	3/29	TM4PDPS1	4/41		3/45	TM5SAO4H	3/53
TCSXCNEMEF15V	4/35	TM3AM6	3/29	TM5ACADL100	3/62		3/49	TM5SAO4L	3/53
TCSXCNEEXNX1V	4/35	TM3AM6G	3/29		4/27		3/53	TM5SAO4LK	3/63
TCSXCNEEXNX3V	4/35	TM3AQ2	3/29	TM5ACBM01R	3/59		3/57	TM5SBER2	3/61
TCSXCNEEXNX10V	4/35	TM3AQ2G	3/29		3/61	TM5ACTB12PS	3/59	TM5SBET1	3/61
TCSXCNEEXNX25V	4/35	TM3AQ4	3/29	TM5ACBM01R10	3/59		3/61	TM5SBET7	3/61
TCSXCNNXNX100	3/61	TM3AQ4G	3/29		3/61		4/27	TM5SD000	3/49
TLACDCBA005	4/13	TM3DI8	3/25	TM5ACBM05R	3/59	TM5ACTB16	3/45	TM5SDI2A	3/47
	4/21	TM3DI8A	3/25		3/61	TM5ACTB32	3/47	TM5SDI2D	3/45
	4/39	TM3DI8G	3/25	TM5ACBM05R10	3/59	TM5ACTB0610	3/45	TM5SDI2DF	3/57
TLACDCBA015	4/13	TM3DI16	3/25		3/61		3/49	TM5SDI4A	3/47
	4/21	TM3DI16G	3/25	TM5ACBM11	3/45		3/53	TM5SDI4D	3/45
	4/39	TM3DI16K	3/25		3/49		3/61	TM5SDI6D	3/45
TLACDCBA030	4/13	TM3DI32K	3/25		3/53	TM5ACTB1210	3/41	TM5SDI6U	3/47
	4/21	TM3DM8R	3/25		3/57		3/45	TM5SDI12D	3/45
	4/39	TM3DM8RG	3/25	TM5ACBM12	3/47		3/49	TM5SDI12DK	3/63
TLACDCBA50	4/13	TM3DM24R	3/25	TM5ACBM15	3/45		3/53	TM5SDI16D	3/45
TLACDCBA050	4/21	TM3DM24RG	3/25		3/49	TM5ACTB3210	3/47	TM5SDM12DT	3/45
	4/39	TM3DQ8R	3/25		3/53	TM5ACTCH100	2/51	TM5SDO2R	3/47
TM2ALM3LT	3/17	TM3DQ8RG	3/25		3/57		2/63	TM5SDO2S	3/47
TM2AMI2HT	3/17	TM3DQ8T	3/25		3/61		3/62	TM5SDO2T	3/45
TM2AMI2LT	3/17	TM3DQ8TG	3/25	TM5ACBM1110	3/45		4/27	TM5SDO4R	3/47
TM2AMI4LT	3/17	TM3DQ8U	3/25		3/49	TM5ACTLC100	2/51	TM5SDO4R4	3/47
TM2AMI8HT	3/17	TM3DQ8UG	3/25		3/53		2/63	TM5SDO4RK	3/63
TM2AMM3HT	3/17	TM3DQ16R	3/25		3/57		3/62	TM5SDO4T	3/45
TM2AMM6HT	3/17	TM3DQ16RG	3/25	TM5ACBM1210	3/47	TM5ACTLS100	2/51	TM5SDO4TA	3/45
TM2AMO1HT	3/17	TM3DQ16T	3/25	TM5ACBM1510	3/45		2/63	TM5SDO6T	3/45
TM2ARI8HT	3/17	TM3DQ16TG	3/25		3/49		3/62	TM5SDO8TA	3/45
TM2ARI8LRJ	3/17	TM3DQ16TK	3/25		3/53		4/27	TM5SDO12T	3/45
TM2ARI8LT	3/17	TM3DQ16U	3/25		3/57	TM5C12D6T6L	3/41	TM5SDO12TK	3/63
TM2AVO2HT	3/17	TM3DQ16UG	3/25		3/61	TM5C12D8T	3/41	TM5SDO16T	3/45
TM2DAI8DT	3/12	TM3DQ16UK	3/25	TM5ACBN1	4/27	TM5C24D12R	3/41	TM5SDO1024	3/57
TM2DDI8DT	3/12	TM3DQ32TK	3/25	TM5ACLTB1	2/51	TM5C24D18T	3/41	TM5SE1IC02505	3/57
TM2DDI16DK	3/12	TM3DQ32UK	3/25		2/63	TM5CAI8O8CL	3/41	TM5SE1SC10005	3/57
TM2DDI16DT	3/12	TM3SAC5R	3/35		3/62	TM5CAI8O8CVL	3/41	TM5SE2IC01024	3/57
TM2DDI32DK	3/12	TM3SAC5RG	3/35	TM5ACLITR1	2/51	TM5CAI8O8VL	3/41	TM5SMM6D2L	3/45
TM2DDO8TT	3/12	TM3SAF5R	3/35		2/63	TM5NCO1	4/27	TM5SPDD12F	3/49
TM2DDO8UT	3/12	TM3SAF5RG	3/35		4/27	TM5NCO1K	4/27	TM5SPDG5D4F	3/49
TM2DDO16TK	3/12	TM3SAFL5R	3/35	TM5ACLITW1	2/51	TM5PCDPS	4/3	TM5SPDG6D6F	3/49
TM2DDO16UK	3/12	TM3SAFL5RG	3/35		2/63	TM5PCRS2	4/11	TM5SPDG12F	3/49
TM2DDO32TK	3/12	TM3SAK6R	3/35		4/27	TM5PCRS4	4/11	TM5SPS1	3/59
TM2DDO32UK	3/12	TM3SAK6RG	3/35	TM5ACLPL10	3/62	TM5SAI2H	3/53	TM5SPS1F	3/59
TM2DMM8DRT	3/12	TM3TI4	3/29		4/27	TM5SAI2L	3/53	TM5SPS2	3/59
TM2DMM24DRF	3/12	TM3TI4G	3/29	TM5ACLPR10	3/62	TM5SAI2PH	3/53	TM5SPS2F	3/59
TM2DRA8RT	3/12	TM3TI8T	3/29		4/27	TM5SAI2TH	3/53	TM5SPS3	4/27
TM2DRA16RT	3/12	TM3TI8TG	3/29	TM5ACLT1	2/51	TM5SAI4H	3/53	TM7ACCA	4/37
TM2XMTGB	3/17	TM3TM3	3/29		2/63	TM5SAI4HK	3/63	TM7ACCB	4/37
	3/19				3/62	TM5SAI4L	3/53		
	3/29				4/27				
	3/53								

TM7ACMP	4/37	TM221ME32TK	2/19	TMC2SL1	2/18	TSXCANKCDF180T	4/13	TWDXMT5	3/13
TM7ACMP10	4/37	TM241C24R	2/30	TMC2TI2	2/18		4/20		3/17
TM7ACTHA	4/36	TM241C24T	2/30	TMC4AI2	2/30		4/38		3/19
TM7ACTLA	4/36	TM241C24U	2/30	TMC4AQ2	2/30	TSXCANKCDF90T	4/13		3/53
TM7ACTW	4/37	TM241C40R	2/30	TMC4HOIS01	2/30		4/20		4/19
TM7ACYC	4/36	TM241C40T	2/30	TMC4PACK01	2/30		4/38		
TM7ACYCJ	4/36	TM241C40U	2/30	TMC4TI2	2/30	TSXCANKCDF90TP	4/13	V	
TM7BAI4CLA	3/72	TM241CE24R	2/30	TMH2GDB	2/20		4/20	VDIP184546005	3/37
TM7BAI4PLA	3/72	TM241CE24T	2/30	TSXCANCA50	4/13		4/38	VDIP184546010	3/37
TM7BAI4TLA	3/72	TM241CE24U	2/30		4/21	TSXCANTDM4	4/13	VDIP184546020	3/37
TM7BAI4VLA	3/72	TM241CE40R	2/30		4/39		4/20	VDIP184546030	3/37
TM7BAM4CLA	3/72	TM241CE40T	2/30	TSXCANCA100	4/13		4/38	VDIP184546050	3/37
TM7BAM4VLA	3/72	TM241CE40U	2/30		4/21	TSXCSA100	4/5	VW3A3521	2/75
TM7BAO4CLA	3/72	TM241CE40U	2/30		4/39		4/7	VW3A8306D30	4/5
TM7BAO4VLA	3/72	TM241CEC24R	2/30	TSXCANCA300	4/13		4/9		4/7
TM7BDI8B	3/69	TM241CEC24T	2/30		4/21	TSXCSA200	4/5		4/9
TM7BDI16A	3/69	TM241CEC24U	2/30	TSXCANCADD03	4/13		4/7	VW3A8306R03	4/5
TM7BDI16B	3/69	TM251MESC	2/41		4/21	TSXCSA500	4/7		4/7
TM7BDM8B	3/69	TM251MESE	2/41	TSXCANCADD1	4/13		4/9	VW3A8306R10	4/5
TM7BDM16A	3/69	TM258LD42DT	2/50		4/21		4/5		4/7
TM7BDM16B	3/69	TM258LD42DT4L	2/50		4/39	TSXCX100	4/9		4/9
TM7BDO8TAB	3/69	TM258LF42DR	2/50	TSXCANCADD3	4/13	TSXPBSCA100	4/3	VW3A8306R30	4/7
TM7NCOM08B	4/33	TM258LF42DT	2/50		4/21	TSXPBSCA400	4/3		4/9
TM7NCOM16A	4/33	TM258LF42DT4L	2/50		4/39	TSXSXA50	4/5		4/5
TM7NCOM16B	4/33	TM258LF66DT4L	2/50	TSXCANCADD5	4/13		4/7	VW3A8306RC	4/5
TM7SPS1A	3/73	TMACBL1	2/20		4/21		4/9		4/7
TM200HSC206DF	3/19	TMAM2	2/20	TSXCANCB100	4/13	TWDFCN2K20	2/97	VW3A8306TF03	4/5
TM200HSC206DT	3/19		3/25		4/21		3/13		4/7
TM200RSRCEMC	3/17		3/29	TSXCANCB300	4/13	TWDFCN2K26	2/97		4/9
	3/29		3/31		4/21		3/13	VW3A8306TF10	4/5
	3/53		3/35	TSXCANCB50	4/13	TWDFCW30K	2/21		4/7
TM221C16R	2/18	TMASD1	2/20		4/39		2/97		4/9
TM221C16T	2/18		2/30	TSXCANCBDD03	4/13		3/13	VW3CANA71	4/13
TM221C24R	2/18		2/41		4/21	TWDFCW50K	2/21		4/21
TM221C24T	2/18	TMASD2	2/69	TSXCANCBDD1	4/13		2/97		4/39
TM221C40R	2/18	TMAT2CSET	2/20		4/21	TWDFTB2T10	2/97	VW3CANCARR03	4/13
TM221C40T	2/18	TMAT2MSET	2/20	TSXCANCBDD3	4/13	TWDFTB2T11	2/97		4/21
TM221CE16R	2/18		3/25		4/21	TWDXCAF010	4/9	VW3CANCARR1	4/13
TM221CE16T	2/18	TMAT2MSETG	2/20		4/39	TWDXCAFJ010	4/5		4/21
TM221CE24R	2/18		3/25	TSXCANCBDD5	4/13		4/7		4/39
TM221CE24T	2/18		3/29		4/21	TWDXCAISO	4/5	VW3CANKCDF180T	4/21
TM221CE40R	2/18	TMAT2PSET	2/20		4/39		4/9		4/39
TM221CE40T	2/18		2/31	TSXCANCBDD5	4/13		4/6	VW3CANTAP2	4/13
TM221M16R	2/19		2/41		4/21	TWDXCARJ003	4/9		4/20
TM221M16RG	2/19	TMAT2PSETG	3/37		4/39		4/9		4/38
TM221M16T	2/19	TMAT4CSET	2/31	TSXCANCD100	4/13	TWDXCARJ010	4/9	VW3E5001R005	2/69
TM221M16TG	2/19	TMC2AI2	2/18		4/39	TWDXCARJ030	4/9	VW3E5001R010	2/69
TM221M32TK	2/19	TMC2AQ2C	2/18	TSXCANCD300	4/13	TWDXCARJP03	4/9	VW3E5001R015	2/69
TM221ME16R	2/19	TMC2AQ2V	2/18		4/21	TWDXCARJP03P	4/9	VW3E5001R020	2/69
TM221ME16RG	2/19	TMC2CONVO1	2/18		4/39		4/9	VW3E5001R030	2/69
TM221ME16T	2/19	TMC2HOIS01	2/18	TSXCANCD50	4/13	TWDXCARJP03R	4/5	VW3E5001R050	2/69
TM221ME16TG	2/19	TMC2PACK01	2/18		4/21		4/6	VW3E5001R100	2/69
					4/39	TWDXCAT3RJ	4/9	VW3E5001R150	2/69
								VW3E5001R200	2/69

VW3E5001R250	2/69	XGSZ24	4/5
VW3E5001R300	2/69		4/7
VW3E5001R400	2/69		4/9
VW3E5001R500	2/69	Z	
VW3E704000000	2/69		
VW3E704100000	2/69	ZB5AZ901	2/85
VW3M3805R010	4/13	ZB5AZ905	2/85
	4/21		
	4/39		
VW3M3805R030	4/13		
	4/21		
VW3M4701	2/63		
X			
XBTZ9980	2/51		
	2/63		
XBTZG61	2/85		
XBTZG62	2/85		
XBTGC1100T	2/92		
XBTGC1100U	2/92		
XBTGC2120T	2/92		
XBTGC2120U	2/92		
XBTGC2230T	2/92		
XBTGC2230U	2/92		
XBTZ9008	4/5		
	4/7		
	4/9		
XBTZ938	2/51		
	2/63		
	4/5		
	4/7		
	4/9		
XBTZ9980	4/5		
	4/7		
	4/9		
XBTZ9982	4/5		
	4/7		
XBTZG51	2/92		
XBTZG52	2/92		
XBTZG60	2/92		
XBTZG62	2/92		
XBTZG935	2/92		
XBTZGABE1	2/96		
XBTZGABE2	2/96		
XBTZGCANM	4/17		
XBTZGCCAN	4/17		
XBTZGCCAN	2/92		
XBTZGCHOK	2/92		
XBTZGCLP2	2/92		
XBTZGCLP4	2/92		
XBTZGDIO1	2/92		
XBTZGDIO2	2/92		
XBTZGFIX	2/92		
XBTZGPWS1	2/92		
XBTZGUSB	2/85		
	2/92		
XBTZGUSBB	2/92		

Schneider Electric Industries SAS

Head Office
35, rue Joseph Monier
F-92500 Reuil-Malmaison
France



www.schneider-electric.com

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Design: Schneider Electric
Photos: Schneider Electric

MKTED2140202EN