

---

# Radio frequency identification XG range

Compact smart antennas, Ø 22 mm mounting

## Catalogue



Simply easy!™





Radio frequency identification  
XG range  
Compact smart antennas, Ø 22 mm mounting

---

|                            |               |
|----------------------------|---------------|
| ■ General presentation     | pages 2 and 3 |
| ■ Characteristics          |               |
| □ Compact smart antennas   | page 4        |
| □ Electronic tags          | page 5        |
| ■ References               |               |
| □ Compact smart antennas   | page 6        |
| □ Electronic tags          | page 6        |
| □ Accessories              | page 7        |
| ■ Dimensions               | page 8        |
| ■ Installation precautions | page 8        |
| ■ Connections              | page 9        |
| ■ Product reference index  | page 10       |

# Radio frequency identification 13.56 MHz XG range

Compact smart antennas, Ø 22 mm mounting

### XG range

RFID is the abbreviated term used to designate radio frequency identification systems. These frequencies range between 50 kHz and 2.5 GHz. The most widely used is 13.56 MHz.

The XG range RFID system is used to identify operators on machines by means of contactless RFID cards or key fobs.

Operator ID information is stored in a memory that can be accessed using a simple radio frequency link. This memory is in the form of an electronic tag, which contains an antenna and an integrated circuit.

When a tag enters the field generated by the reader/smart antenna, it detects the signal and exchanges data (read or write) between its memory and the reader/smart antenna.

Telemecanique Sensors offers 3 smart antennas for mounting on a control panel. These XG smart antennas are designed for identifying operators on systems such as:

- mobile access platforms for trucks and elevators
- electric vehicle charging stations
- machine control panels
- automated tools, presses, and assembly lines, etc.

Mounted in a standard  
Ø 22 mm hole



### Rapid and efficient access control

- > XG smart antennas identify operators by means of their RFID card or electronic key fob in order to determine which operations they are authorized to access.
- > One model has 2 integrated LEDs on the front. These multi-color LEDs are used to guide the operator by means of visual indications controlled by the automation system via the smart antenna's Modbus serial link. There is a choice of 7 different colors that can also be combined with flashing.

### Easy to install

- > Less machining: The smart antenna is mounted on a panel through a standard Ø 22 mm hole and manually tightened to secure in place using a single locking nut.
- > Less wiring: A single M12 connector is required for the smart antenna power supply (and network connection for XGCS49LB201 and XGCS490B201 smart antennas).
- > Dedicated accessories, such as network T-connectors and M12 cables, are available to facilitate daisy-chain connections (1).

### Easy to configure

- > The network address can be set simply by presenting the RFID card supplied with the smart antenna.
- > Integrated network and RFID functions
- > No programming
- > Automatic detection of RFID electronic tags (read or write)
- > Automatic setting of communication parameters (speed, format, parity, protocol, etc.)
- > Read/write compatibility with the majority of 13.56 MHz tags on the market
- > Low sensitivity to metal environments
- > User cards for the XGCS491B201 standalone smart antenna can be enrolled without the need for any special software using configuration kit XGSZCNFAC.

(1) Up to 15 XG compact smart antennas can be connected to the same network. All connections are made via M12 connectors, using a complete range of cables and T-connectors. Please consult our website [www.tesensors.com](http://www.tesensors.com).



**+** Easily integrate operator ID functionality into your machines

# Radio frequency identification 13.56 MHz XG range

Compact smart antennas, Ø 22 mm mounting

## Rugged and compact

### A monobloc device designed for harsh environments

- > XG smart antennas, with their sleek, clean design with no screws on the front face, are intended for use in industrial environments, particularly in cleaning applications in the medical and food and beverage sectors.
- > The extended operating temperature range means that XG smart antennas can operate in some of the harshest conditions.
- > XG smart antennas are highly compact, measuring just 40 x 40 x 40 mm, and have a simple mounting system via a nut on the rear, meaning they can be easily integrated into even the smallest of spaces.
- > XG compact smart antennas offer a tried-and-tested solution that has been validated through numerous laboratory and field tests.

## Worldwide compatibility

### With 13.56 MHz standards


- > The XG identification system is open to the majority of ISO 18000-3, ISO 15693, and ISO 14443 electronic tags.
- > With their low power consumption (< 60 mA) and a choice of suitable materials, XG smart antennas are environmentally-friendly.

## Use

- > The **XGCS49LB201** compact smart antenna features integrated multi-color LEDs that can be controlled remotely by the automation system via the Modbus RTU communication network.
- > These LEDs provide intuitive information to the operator when they present their RFID card to the reader and their profile is read by the automation system (for example, steady green light if they are authorized to use the control station, or flashing red if their profile is not accepted, etc.).  
The 2 integrated LEDs are controlled in parallel via Modbus word write requests. They are visible from all angles regardless of the operator's viewing angle.
- > The **XGCS490B201** compact smart antenna can be easily combined with any industrial terminal that supports Modbus RTU. No specific driver or dedicated function is required, since all exchanges are managed by standard word read or write requests.
- > Example of use: A user or operator profile is contained in the RFID card. When the card is read, the terminal automatically selects the accessible pages. It is capable of differentiating between an inexperienced operator who is not authorized to access machine settings and a maintenance engineer who has access to these settings.
- > The **XGCS491B201** standalone compact smart antenna can be used to identify one or more operators on a simple machine or enclosure without an automated system, both inside and outside a building. This smart antenna directly controls a relay or a contactor.
- > The tamper-resistant RFID cards are configured manually with no need for a computer or software.  
The number of user cards is unlimited. The smart antenna is compatible with a wide range of RFID cards on the market.
- > Example of use: Helping to make the Start/Stop function secure on a loading bay (opening the door, raising/lowering the access platform, etc.) to avoid having to leave keys on the unit.

## Description

- 1 LEDs for informing the operator (7 different colors can be selected and combined with flashing)
- 2 Network address configuration
- 3 RFID and communication diagnostic LEDs
- 4 Seal
- 5 M12 connector for power supply (and connection to the Modbus RTU network for XGCS49LB201 and XGCS490B201 smart antennas)
- 6 Locking nut for mounting in Ø 22 mm hole

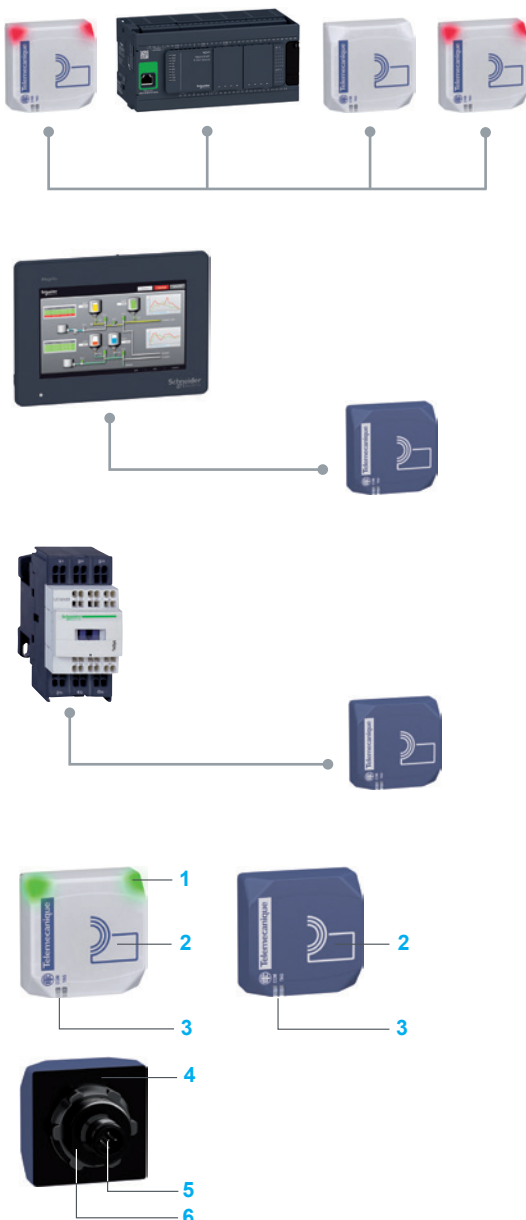

# Radio frequency identification 13.56 MHz XG range


Compact smart antennas, Ø 22 mm mounting

## Characteristics of XG compact smart antennas

| Smart antenna type                       |                                            | XGCS49LB201                                                                                                                                                                           | XGCS490B201                                                                                   | XGCS491B201                                                                         |
|------------------------------------------|--------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                                          |                                            |                                                                                                      |             |  |
| Certification                            |                                            | CE, cULus, IC, FCC part 15                                                                                                                                                            |                                                                                               |                                                                                     |
| Conforming to standards                  |                                            | EN 301489-1, EN 301489-3, EN 300330-1, and EN 300330-2                                                                                                                                |                                                                                               |                                                                                     |
| Ambient air temperature                  | For operation                              | °C                                                                                                                                                                                    | -25...+70                                                                                     | -25...+70                                                                           |
|                                          | For storage                                | °C                                                                                                                                                                                    | -40...+85                                                                                     | -40...+85                                                                           |
| Degree of protection                     | Conforming to IEC 60529                    |                                                                                                                                                                                       | IP 69K (front)<br>IP 65 (rear)                                                                | IP 65                                                                               |
|                                          |                                            |                                                                                                                                                                                       |                                                                                               |                                                                                     |
| Vibration resistance                     | Conforming to EN 60068.2.6                 | 2 mm from 5 to 29.5 Hz/7 gn from 29.5 to 150 Hz                                                                                                                                       |                                                                                               |                                                                                     |
| Shock resistance                         | Conforming to EN 60068.2.27                | 30 gn/11 ms                                                                                                                                                                           |                                                                                               |                                                                                     |
|                                          | Conforming to EN 50102                     | IK 04                                                                                                                                                                                 |                                                                                               |                                                                                     |
| Resistance to interference               | Conforming to IEC 61000                    | Resistance to electrostatic discharge, radiated electromagnetic fields, fast transients, electrical surges, conducted and induced interference, and network frequency magnetic fields |                                                                                               |                                                                                     |
| Dimensions (W x H x D)                   |                                            | mm                                                                                                                                                                                    | 40 x 40 x 40                                                                                  |                                                                                     |
| RFID frequency                           |                                            | MHz                                                                                                                                                                                   | 13.56                                                                                         |                                                                                     |
| Nominal sensing distance                 |                                            | mm                                                                                                                                                                                    | 20 to 70 depending on associated tags                                                         |                                                                                     |
| Type of associated tag                   |                                            |                                                                                                                                                                                       | ISO 15693 and ISO 14443 standardized tags<br>Automatic detection of tag type                  |                                                                                     |
| Examples of RFID compatible chips        |                                            |                                                                                                                                                                                       | Fujitsu (MB89R118), NXP (I-Code SL2, SL1, Ultralight, Std 1K/4K), Texas (Tag-it HFI), µEM4135 |                                                                                     |
| Nominal supply voltage                   |                                            | V                                                                                                                                                                                     | 24 --- PELV (protective extra-low voltage)                                                    |                                                                                     |
| Supply voltage limits (including ripple) |                                            | V                                                                                                                                                                                     | 19.2...29 ---                                                                                 |                                                                                     |
| Power consumption                        |                                            | mA                                                                                                                                                                                    | < 60                                                                                          |                                                                                     |
| Interface                                | Physical interface                         |                                                                                                                                                                                       | RS 485                                                                                        | PNP discrete output<br>300 mA protected against short-circuits and overloads        |
|                                          | Protocol                                   |                                                                                                                                                                                       | Modbus RTU                                                                                    | —                                                                                   |
|                                          | Data rate                                  |                                                                                                                                                                                       | 9,600...115, 000 baud (automatic detection)                                                   | —                                                                                   |
|                                          | Medium<br>(see cable references on page 7) |                                                                                                                                                                                       | 2-pair shielded twisted pair cable with M12 connector, A-coded                                | 3-wire unshielded cable with M12 connector, A-coded                                 |
| Display                                  | To inform the operator                     |                                                                                                                                                                                       | 2 multi-color LEDs (choice of 7 colors) controlled by Modbus requests                         | —                                                                                   |
|                                          | For communication                          |                                                                                                                                                                                       | 1 bi-color LED (Tag presence/Dialog between smart antenna and tag)                            |                                                                                     |
|                                          |                                            |                                                                                                                                                                                       | 1 bi-color LED (Modbus network activity)                                                      | 1 bi-color LED (output/status)                                                      |
| Connections                              |                                            |                                                                                                                                                                                       | 1 male M12 5-pin connector (see connections on page 9)                                        |                                                                                     |
| Tightening torque                        | Locking nut                                |                                                                                                                                                                                       | 2.2 Nm ± 0.2/19.5 lb-in ± 1.8                                                                 |                                                                                     |

# Radio frequency identification 13.56 MHz XG range

Compact smart antennas, Ø 22 mm mounting

| Characteristics of electronic tags       |                                                  |    |                                                                                   |                                                                                     |                                                                                     |
|------------------------------------------|--------------------------------------------------|----|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Tag type                                 |                                                  |    | Electronic key fob<br>XGHBPB3345                                                  | ISO RFID card<br>XGHB90E340                                                         | ISO RFID card<br>XGHB90E341                                                         |
|                                          |                                                  |    |  |  |  |
| Ambient air temperature                  | For operation                                    | °C | -5...+80                                                                          | -25...+50                                                                           | -25...+50                                                                           |
|                                          | For storage                                      | °C | -25...+80                                                                         | -40...+55                                                                           | -40...+55                                                                           |
| Degree of protection                     |                                                  |    | IP 67                                                                             | IP 65                                                                               | IP 65                                                                               |
| Standard supported                       |                                                  |    | ISO 15693                                                                         | ISO 15693                                                                           | ISO 14443                                                                           |
| Vibration resistance                     | Conforming to EN 60068.2.6                       |    | 2 mm from 5 to 29.5 Hz<br>7 gn from 29.5 to 150 Hz                                | 2 mm from 5 to 29.5 Hz<br>7 gn from 29.5 to 150 Hz                                  | 2 mm from 5 to 29.5 Hz<br>7 gn from 29.5 to 150 Hz                                  |
| Shock resistance                         | Conforming to EN 60068.2.27                      |    | 30 gn/11 ms                                                                       | 30 gn/11 ms                                                                         | 30 gn/11 ms                                                                         |
|                                          | Conforming to EN 50102                           |    | IK02                                                                              | IK02                                                                                | IK02                                                                                |
| Dimensions                               |                                                  |    | mm                                                                                | 40 x 31 x 4.8                                                                       | 54 x 85.5 x 1                                                                       |
| Housing material                         |                                                  |    |                                                                                   | PC                                                                                  | PVC                                                                                 |
| Memory capacity                          |                                                  |    | Bytes                                                                             | 112                                                                                 | 256                                                                                 |
| Type of memory                           |                                                  |    |                                                                                   | EEPROM                                                                              | EEPROM                                                                              |
| Type of operation                        |                                                  |    |                                                                                   | Read/Write                                                                          | Read/Write                                                                          |
| Nominal sensing distance<br>(Read/Write) | With compact smart antennas,<br>Ø 22 mm mounting | mm | 30                                                                                | 70                                                                                  | 30                                                                                  |
| Number of read cycles                    |                                                  |    |                                                                                   | Unlimited                                                                           | Unlimited                                                                           |
| Number of write cycles                   |                                                  |    |                                                                                   | 100,000                                                                             | 100,000                                                                             |
|                                          |                                                  |    |                                                                                   | 100,000                                                                             | 100,000                                                                             |

# Radio frequency identification

## 13.56 MHz

### XG range

Compact smart antennas, Ø 22 mm mounting



XGCS491B201




XGCS49LB201




XGCS490B201



XGHBPB3345



XGHB90E340  
XGHB90E341



XGSZCNF01



ZB5AZ905

#### Compact smart antennas, 13.56 MHz

| Description                                                                          | Interface  | Dimensions<br>mm | Reference          | Weight<br>kg |
|--------------------------------------------------------------------------------------|------------|------------------|--------------------|--------------|
| <b>Standalone compact smart antenna for panel mounting (1)</b><br>M12 male connector | PNP output | 40 x 40 x 40     | <b>XGCS491B201</b> | 0.257        |
| <b>Compact smart antenna for panel-mounting (2)</b><br>M12 male connector            | Modbus RTU | 40 x 40 x 40     | <b>XGCS490B201</b> | 0.257        |
| <b>Compact smart antenna for panel-mounting with LEDs (2)</b><br>M12 male connector  | Modbus RTU | 40 x 40 x 40     | <b>XGCS49LB201</b> | 0.257        |

#### Electronic tags

| Tag type                                                        | Nominal sensing distance<br>mm | For use with                              | Order in multiples of | Unit reference    | Weight<br>kg |
|-----------------------------------------------------------------|--------------------------------|-------------------------------------------|-----------------------|-------------------|--------------|
| <b>Tag with EEPROM type memory</b>                              |                                |                                           |                       |                   |              |
| <b>Electronic key fob</b><br>112 bytes<br>40 x 31 x 4.8 mm      | 10                             | XGCS49LB201<br>XGCS490B201<br>XGCS491B201 | 10                    | <b>XGHBPB3345</b> | 0.005        |
| <b>ISO 15693 RFID card (3)</b><br>256 bytes<br>54 x 85.5 x 1 mm | 70                             | XGCS49LB201<br>XGCS490B201                | 10                    | <b>XGHB90E340</b> | 0.005        |
| <b>ISO 14443 RFID card (3)</b><br>736 bytes<br>54 x 85.5 x 1 mm | 30                             | XGCS49LB201<br>XGCS490B201<br>XGCS491B201 | 25                    | <b>XGHB90E341</b> | 0.005        |

#### Configuration and mounting accessories

| Description                                                                                                                                                     | For use with                              | Unit reference   | Weight<br>kg |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|------------------|--------------|
| <b>RFID card</b><br>For smart antenna address configuration (supplied with the smart antenna)                                                                   | XGCS49LB201<br>XGCS490B201                | <b>XGSZCNF01</b> | 0.005        |
| <b>Configuration kit for standalone compact smart antenna, comprising:</b><br>■ 2 identical "Master" RFID cards<br>■ 1 Reset RFID card<br>■ 1 instruction sheet | XGCS491B201                               | <b>XGSZCNFAC</b> | 0.025        |
| <b>Locking nut tightening tool (4)</b>                                                                                                                          | XGCS49LB201<br>XGCS490B201<br>XGCS491B201 | <b>ZB5AZ905</b>  | 0.016        |

(1) Supplied with a locking nut and the User Guide.

(2) Supplied with configuration RFID card **XGSZCNF01**, a locking nut, and the User Guide.

(3) Customized versions available on request.

(4) Schneider Electric product.

# Radio frequency identification

## 13.56 MHz

### XG range

Compact smart antennas, Ø 22 mm mounting

#### Connection accessories

##### For standalone compact smart antenna XGCS491B201

| Description                                                            | Length<br>m | Reference           | Weight<br>kg |
|------------------------------------------------------------------------|-------------|---------------------|--------------|
| <b>Pre-wired connector</b><br>Straight female M12 connector/bare wires | 2           | <b>XZCPV11V2L2</b>  | 0.073        |
|                                                                        | 5           | <b>XZCPV11V2L5</b>  | 0.158        |
|                                                                        | 10          | <b>XZCPV11V2L10</b> | 0.306        |
| <b>Pre-wired connector</b><br>Elbow female M12 connector/bare wires    | 2           | <b>XZCPV12V2L2</b>  | 0.074        |
|                                                                        | 5           | <b>XZCPV12V2L5</b>  | 0.160        |
|                                                                        | 10          | <b>XZCPV12V2L10</b> | 0.302        |

##### For compact smart antennas XGCS49LB201 and XGCS490B201

| Description                                                                                         | Used for                                                                                                                | Length<br>m | Reference            | Weight<br>kg |
|-----------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|-------------|----------------------|--------------|
| <b>Black IP 67 Modbus shielded cable with male/female M12 connectors A-coded (1)</b>                | RS 485 connection and supplying power between 2 smart antennas or between a compact smart antenna and a tap-off box (2) | 1           | <b>TCSMCN1M1F1</b>   | 0.080        |
|                                                                                                     |                                                                                                                         | 2           | <b>TCSMCN1M1F2</b>   | 0.115        |
|                                                                                                     |                                                                                                                         | 5           | <b>TCSMCN1M1F5</b>   | 0.270        |
|                                                                                                     |                                                                                                                         | 10          | <b>TCSMCN1M1F10</b>  | 0.520        |
| <b>Modbus IP 67 shielded pre-wired connector with female M12 connector/ bare wires, A-coded (1)</b> | Connecting a smart antenna to a Modbus network and a power supply                                                       | 2           | <b>TCSMCN1F2</b>     | 0.115        |
|                                                                                                     |                                                                                                                         | 5           | <b>TCSMCN1F5</b>     | 0.270        |
|                                                                                                     |                                                                                                                         | 10          | <b>TCSMCN1F10</b>    | 0.520        |
| <b>M12 network T-connector 1M/2F A-coded, 5-pin</b><br>For RS 485 network                           | Daisy-chain connection between 2 smart antennas using TCSMCN1M1F● cables                                                | —           | <b>TCSCTN011M11F</b> | 0.035        |
| <b>Straight male M12 connector</b><br>5-pin, A-coded                                                | —                                                                                                                       | —           | <b>XZCC12MDB50R</b>  | 0.050        |

(1) Supplied with holder for identification legend included with product.

(2) Please refer to the "Radio frequency identification. XG range" catalogue.



TCSMCN1M1F●



TCSMCN1F●



TCSCTN011M11F




XZCC12MDB50R

# Radio frequency identification 13.56 MHz XG range

Compact smart antennas, Ø 22 mm mounting


## Dimensions

Electronic key fob XGHBPB3345




ISO RFID cards

XGHB90E340 and XGHB90E341

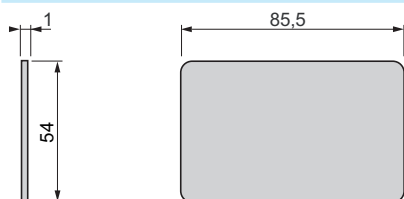

Compact smart antennas XGCS49LB201, XGCS490B201, and XGCS491B201

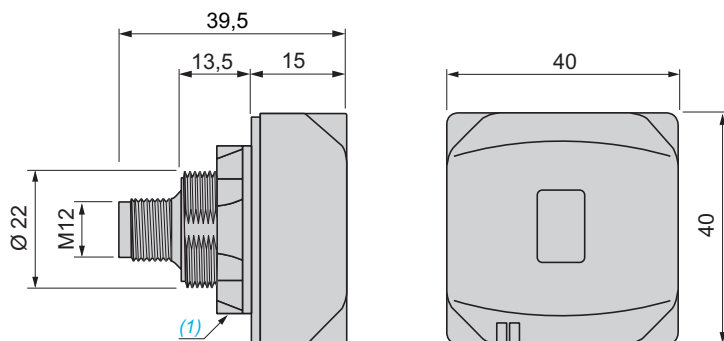


(1) Locking nut

## Installation precautions


Minimum mounting distances between system components

Minimum distance between 2 identical smart antennas according to their positioning and the type of tag used (mm)



| Tag        | XGCS490B201 smart antennas |     |
|------------|----------------------------|-----|
|            | e1                         | e2  |
| XGHBPB3345 | 90                         | 90  |
| XGHB90E340 | 310                        | 310 |
| XGHB90E341 | 90                         | 90  |

## Mounting on metal support

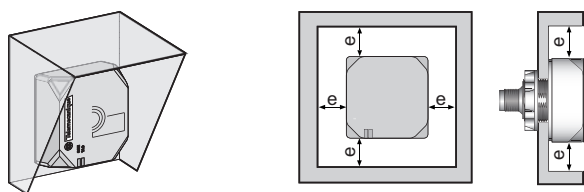


$e > 20 \text{ mm}$

# Radio frequency identification 13.56 MHz XG range

Compact smart antennas, Ø 22 mm mounting

## Connections


### Standalone compact smart antenna XGCS491B201



| Pin no. | Description   |
|---------|---------------|
| 1       | + 24 V ---    |
| 2       | Not connected |
| 3       | 0 V           |
| 4       | PNP output    |
| 5       | Not connected |

## Modbus connections


### Compact smart antennas XGCS49LB201 and XGCS490B201

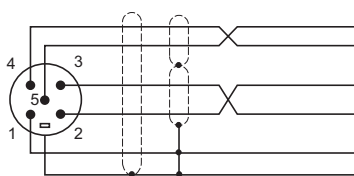


| Pin no. | Modbus smart antenna signal |
|---------|-----------------------------|
| 1       | Drain (Modbus-SHLD)         |
| 2       | + 24 V ---                  |
| 3       | 0 V/Modbus-GND              |
| 4       | D0                          |
| 5       | D1                          |

## Connection examples


### Connection to a Schneider Electric Magelis terminal

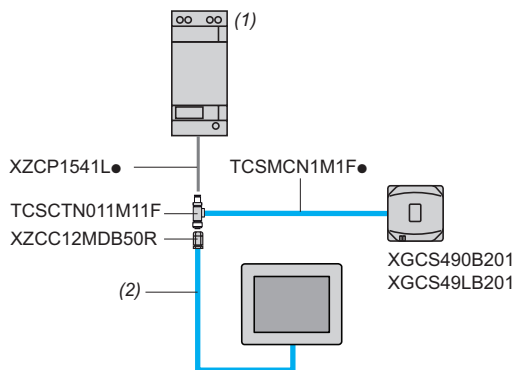

### Daisy-chain connection to a Schneider Electric automation platform

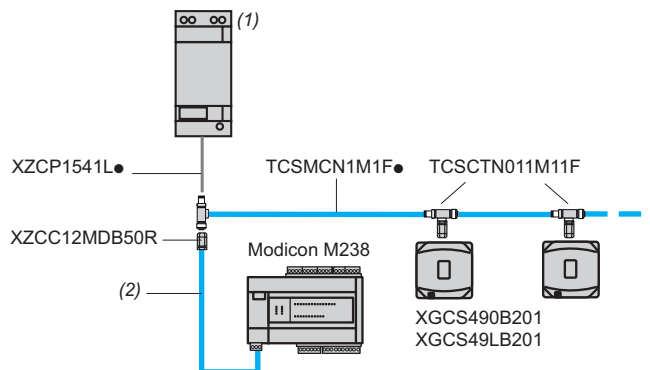

### Connection to a contactor to replace the Start button function on a simple machine

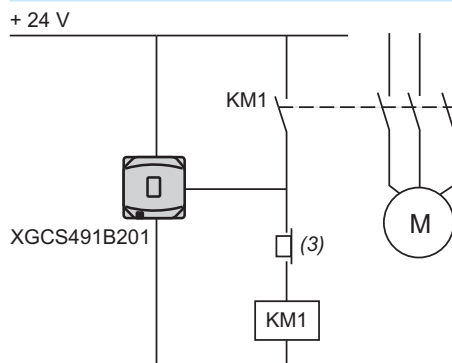

(1) Schneider Electric ABL8 power supply

(2) Schneider Electric VW3A8306R03 cable

(3) Stop button

| T             |   |
|---------------|---|
| TCSCTN011M11F | 7 |
| TCSMCN1F2     | 7 |
| TCSMCN1F5     | 7 |
| TCSMCN1F10    | 7 |
| TCSMCN1M1F1   | 7 |
| TCSMCN1M1F2   | 7 |
| TCSMCN1M1F5   | 7 |
| TCSMCN1M1F10  | 7 |

| X            |   |
|--------------|---|
| XGCS49LB201  | 6 |
| XGCS490B201  | 6 |
| XGCS491B201  | 6 |
| XGHB90E340   | 6 |
| XGHB90E341   | 6 |
| XGHBPB3345   | 6 |
| XGSZCNF01    | 6 |
| XGSZCNFAC    | 6 |
| XZCC12MDB50R | 7 |
| XZCPV11V2L2  | 7 |
| XZCPV11V2L5  | 7 |
| XZCPV11V2L10 | 7 |
| XZCPV12V2L2  | 7 |
| XZCPV12V2L5  | 7 |
| XZCPV12V2L10 | 7 |

| Z        |   |
|----------|---|
| ZB5AZ905 | 6 |



## Schneider Electric Industries SAS

Head Office  
35, rue Joseph Monier  
F-92500 Rueil-Malmaison  
France

[www.tesensors.com](http://www.tesensors.com)

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Design: Schneider Electric  
Photos: Schneider Electric

July 2020 - V4.0

DIA4ED2160801EN