Aluminum High Vacuum Angle Valve ROHS






Aluminum bodied


- Uniform baking temperature Lightweight, Compact
- Minimal contamination from heavy metals Minimal outgassing
- High corrosion resistance to fluorine gas

Bellows are replaceable

(Bellows seal type)

The bellows assembly can be replaced, which reduces maintenance costs and waste materials.



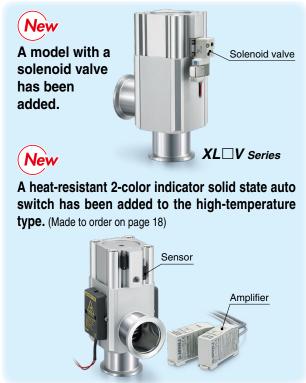







Uniform baking temperature

Excellent thermal conductivity results in a uniform temperature for the entire valve body and a marked decrease in the condensation of gases inside the valve.

Comparison with a KF25 flange




Temperature distribution of the 120°C specification



Lightweight, Compact

Large conductance, small body, excellent resistance against fluorine corrosion (body)

XLA series



Model	A *1 [mm]	B [mm]	Weight [kg]	Conductance*1 [L/s]
XLA-16-2	40	108	0.28	5
XLA-25-2	50	121	0.47	14
XLA-40-2	65	171	1.1	45
XLA-50-2	70	185	1.8	80
XLA-63-2	88	212	3.1	160
XLA-80-2	90	257	5.1	200


^{*1} The same for all series

Minimal outgassing

Low outgassing makes it possible to use a lower capacity pump and also shorten exhaust time.

Minimal contamination from heavy metals

The valve does not contain heavy metals such as Ni (nickel) or Cr (chrome) and it's low sputtering yield also helps to minimize the heavy metal contamination of semiconductor wafers.





A heat-resistant 2-color indicator solid state auto switch is available for models with a heater. (Option)

- · Ambient temperature: Max. 150°C (Sensor)
- · 2-color indicator



An optional heater is available.


For 100/120°C



Auto switches are mountable from 4 directions.



High Vacuum Angle Valve XL□-2 Series New Variations

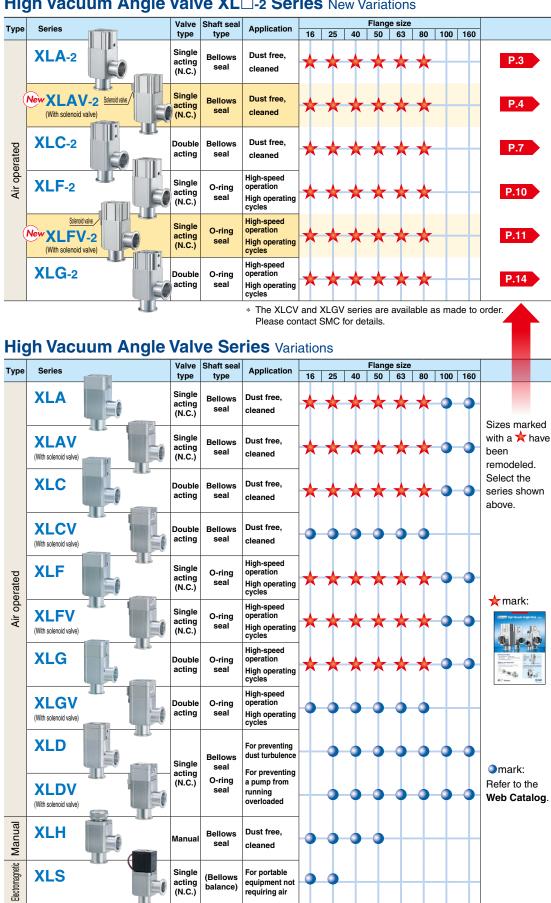



(Bellows

balance)

equipment not requiring air


acting (N.C.)

Aluminum High Vacuum Angle Valve Normally Closed, Bellows Seal XLA/XLAV Series





How to Order



1 Flange size


Size	
16	
25	
40	
50	
63	
80	

2 Flange type

Symbol	Type	Applicable flange size
Nil	KF (NW)	16, 25, 40, 50, 63, 80
D	K (DN)	63, 80

③ Indicator/Pilot port direction

Symbol	Indicator	Pilot port direction
Nil	Without indicator	Flange side
Α		Flange side
F	With	Left flange surface
G indicator		Rear flange surface
J		Right flange surface
K	Without	Left flange surface
L	indicator	Rear flange surface
M	indicator	Right flange surface



4 Temperature specifications/Heater

Symbol	l	Temperature	Heater
Nil		5 to 60°C	_
High-	H0		_
temperature	H4	5 to 150°C	With 100°C heater
type	H5		With 120°C heater

- * Size 16 is not applicable to H4, H5. Size 25 is not applicable to H4.
- Heater cannot be retrofitted for the H0 type

6 Number of auto switches/Mounting position

Symbol	Quantity	Mounting position
Nil	Without auto switch	_
Α	2	Valve open/closed
B 1		Valve open
C 1		Valve closed

5 Auto switch type

Symbol	Model	Remarks
Nil	_	Without auto switch (without magnet)
M9N(M)(L)(Z)	D-M9N(M)(L)(Z)	
M9P(M)(L)(Z)	D-M9P(M)(L)(Z)	Solid state auto switch
M9B(M)(L)(Z)	D-M9B(M)(L)(Z)	
A90(L)	D-A90(L)	Reed auto switch (Not applicable
A93(M)(L)(Z)	D-A93(M)(L)(Z)	to flange size 16)
M9//	_	Without auto switch (with magnet)

- * For the high-temperature type, select the heat-resistant auto switch. (Refer to page 18.)
- * Standard lead wire length is 0.5 m. Add M to the end of the part number for 1 m, L for 3 m, and Z for 5 m.

 Example) -2M9NL

OBODY Surface treatment/Seal material and changed parts

Body surface treatment

Symbol	Surface treatment
Nil	External: Hard anodized Internal: Raw material
Α	External: Hard anodized Internal: Oxalic acid anodized

Seal material

Symbol	Seal material	Compound no.
Nil FKM		1349-80*1
N1	EPDM	2101-80*1
P1	Barrel Perfluoro®	70W
Q1 Kalrez [®]		4079
R1		SS592
R2	Chemraz [®]	SS630
R3		SSE38
S1	VMQ	1232-70*1
T1	FKM for Plasma	3310-75*1

*1 Produced by Mitsubishi Cable Industries, Ltd.

Barrel Perfluoro® is a registered trademark of Matsumura Oil Co., Ltd. Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

Chemraz® is a registered trademark of Greene, Tweed Technologies, Inc.

Part with changed seal material and leakage

Svi	mbol	Changed *2	Leakage [Pa·ı	m ³ /s or less] *1
Oyi	111001	part	Internal	External
1	Nil None		1.3 x 10 ⁻¹⁰ (FKM)	1.3 x 10 ⁻¹¹ (FKM)
	A 2, 3, 4		1.3 x 10 ^{−8}	1.3 x 10 ⁻⁹
	B 2,3		1.3 x 10 ⁻⁸	1.3 x 10 ⁻⁹
	C (4)		1.3 x 10 ⁻¹⁰ (FKM)	1.3 x 10 ⁻⁹
	D 2		1.3 x 10 ⁻⁸	1.3 x 10 ⁻¹¹ (FKM)
	E (2), (4)		1.3 x 10 ⁻⁸	1.3 x 10 ⁻⁹


- *1 Values at normal temperature, excluding gas permeation
- *2 Refer to Construction on page 5 for changed part. Number corresponds with the parts number on the construction drawing.

To order something other than Nil (standard), list the symbols starting with X, followed by each symbol for body surface treatment, seal material, and then changed part.

Example) XLA-16-2M9NA-XAN1A



Air Operated, With Solenoid Valve

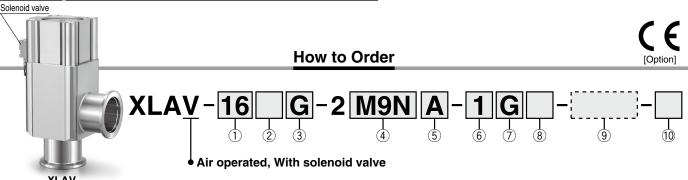

1 Flange size

Size
16
25
40
50
63
80

2 Flange type

Symbol	Type	Applicable flange size
Nil	KF (NW)	16, 25, 40, 50, 63, 80
D	K (DN)	63, 80

(3) Indicator/Solenoid valve direction

Symbol	Indicator	Solenoid valve direction		
F	With	Left flange surface		
G	indicator	Rear flange surface		
J	indicator	Right flange surface		
K	Without	Left flange surface		
L M	indicator	Rear flange surface		
	indicator	Right flange surface		


* M type plug connector (AC power supply) not attached for J, M of sizes 16 and 25.

> Symbol Nil

> > Α

В

C



Mounting position

Valve open/closed

Valve open

Valve closed

4 Auto switch type

	71	
Symbol	Model	Remarks
Nil	_	Without auto switch (without magnet)
M9N(M)(L)(Z)	D-M9N(M)(L)(Z)	
M9P(M)(L)(Z)	D-M9P(M)(L)(Z)	Solid state auto switch
M9B(M)(L)(Z)	D-M9B(M)(L)(Z)	
A90(L)	D-A90(L)	Reed auto switch (Not applicable
A93(M)(L)(Z)	D-A93(M)(L)(Z)	to flange size 16)
M9//	_	Without auto switch (with magnet)

Standard lead wire length is 0.5 m. Add M to the end of the part number for 1 m, L for 3 m, and Z for 5 m.

CE-compliant

0

0

Example) -2M9NL

2 3

4

5 6

6 Rated voltage

(7) Electrical entry

G Grommet (Lead wire length 300 mm)						
H Grommet (Lead wire length 600 mm)						
L	L type plug connector					
М	M type plug connector					

8 Light/surge voltage suppressor

Solumber of auto switches/Mounting position Quantity

Without auto switch

2

Nil	None
S	With surge voltage suppressor
Z	With light/surge voltage suppressor
U	With light/surge voltage suppressor (Non-polar type)

S type: Not available for AC

U type: DC only

10 CE-compliant

Nil	_
Q	CE-compliant

9 Body surface treatment/Seal material and changed parts

Body surface treatment

100 VAC, 50/60 Hz 200 VAC, 50/60 Hz

110 VAC, 50/60 Hz

220 VAC, 50/60 Hz 24 VDC

12 VDC

Symbol	Surface treatment				
Nil	External: Hard anodized Internal: Raw material				
Α	External: Hard anodized Internal: Oxalic acid anodized				

Seal material

Symbol	Seal material	Compound no.					
Nil	FKM	1349-80* ¹					
N1	EPDM	2101-80*1					
P1	Barrel Perfluoro®	70W					
Q1	Kalrez [®]	4079					
R1		SS592					
R2	Chemraz [®]	SS630					
R3		SSE38					
S1	VMQ	1232-70*1					
T1	FKM for Plasma	3310-75* ¹					

*1 Produced by Mitsubishi Cable Industries, Ltd.

Barrel Perfluoro® is a registered trademark of Matsumura Oil Co., Ltd. Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

Chemraz® is a registered trademark of Greene, Tweed Technologies, Inc.

Part with changed seal material and leakage

Cumbal	Changed part *2	Leakage [Pa·m³/s or less] *1				
Symbol	Changeu part	Internal	External			
Nil	None	1.3 x 10 ⁻¹⁰ (FKM)	1.3 x 10 ⁻¹¹ (FKM)			
Α	2, 3, 4	1.3 x 10 ⁻⁸	1.3 x 10 ⁻⁹			
В	2,3	1.3 x 10 ^{−8}	1.3 x 10 ⁻⁹			
С	4	1.3 x 10 ⁻¹⁰ (FKM)	1.3 x 10 ⁻⁹			
D	2	1.3 x 10 ^{−8}	1.3 x 10 ⁻¹¹ (FKM)			
E	2,4	1.3 x 10 ^{−8}	1.3 x 10 ⁻⁹			

*1 Values at normal temperature, excluding gas permeation

*2 Refer to Construction on page 5 for changed part. Number corresponds with the parts number on the construction drawing.

To order something other than Nil (standard), list the symbols starting with X, followed by each symbol for body surface treatment, seal material, and then changed part.

Example) XLAV-16L-2M9NA-1G-XAN1A

- With solenoid valve: Option specifications/Combinations This model has indicator, auto switch, and K (DN) flange options, but hightemperature/heater options are not available.
- Solenoid valves XLAV-16, 25, 40, 50: SYJ319, XLAV-63, 80: SYJ519

Example) SYJ319-1GS, etc.

For details, please contact your SMC sales representative. ** For option "Q," the solenoid valve should be a CE-compliant product.


XLA/XLAV Series


Specifications

Model		XLA(V)-16-2	XLA(V)-25-2	XLA(V)-40-2	XLA(V)-50-2	XLA(V)-63-2	XLA(V)-80-2	
Valve type			Norma	lly closed (Pressu	rize to open, Sprin	ig seal)		
Fluid				Inert gas un	ider vacuum			
Operating	XLA		5 1	to 60 (High-tempe	rature type: 5 to 15	50)		
temperature [°C]	XLAV			5 to	50			
Operating pressure [F	Pa(abs)]			1 x 10 ⁻⁶ to atmo	spheric pressure			
Conductance [L/s]*1		5	5 14 45 80				200	
Laskawa [Da wa3/a]	Internal	For standard seal material (FKM): 1.3 x 10 ⁻¹⁰ at normal temperature, excluding gas permeation						
Leakage [Pa·m³/s]	External	For standard seal material (FKM): 1.3 x 10 ⁻¹¹ at normal temperature, excluding gas permeation						
Flange type		KF (NW) KF (NW), K (DN)), K (DN)		
Principal materials		Body: Aluminum alloy, Bellows: Stainless steel 316L, Chief part: Stainless steel, FKM (Standard seal material)						
Surface treatment		External: Hard anodized Internal: Raw material						
Pilot pressure [MPa(G	i)]	0.4 to 0.7						
Dilet neut eine	XLA	M5 Rc1/8						
Pilot port size	XLAV		M5: Port	1(P), 3(R)		Rc1/8: Port 1(P), M5: Port 3(R)		
Mainht [kg]	XLA	0.28	0.47	1.1	1.7	3.1	5.1	
Weight [kg]	XLAV	0.33	0.52	1.2	1.8	3.2	5.2	

^{*1} Conductance is the value for the elbow with the same dimensions.

Construction/Operation

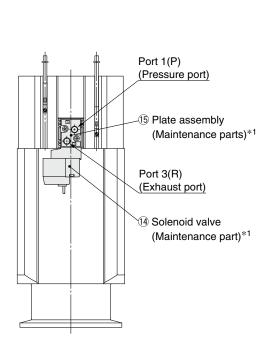

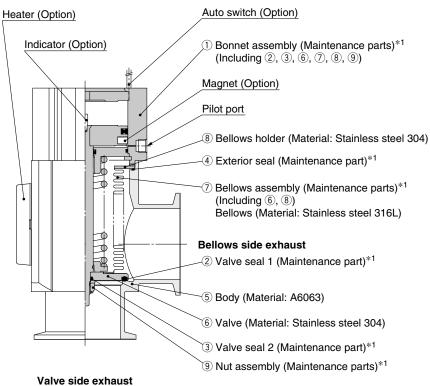

With solenoid valve

<Working principle>

By applying pilot pressure from the pilot port, the piston-coupled valve overcomes the force of the spring or operating force by pressure, and the valve opens.

In the case of the XLAV, port 1(P) is normally pressurized, and the valve opens when the solenoid valve is turned ON and closes when it is turned OFF.

<Option>

Auto switch: The magnet activates the auto switch. With 2 auto switches, the open and closed positions are detected, and with 1 auto switch, either the open or closed position is detected. The temperature range is only available for general use (5 to 60°C).

*1 Refer to Maintenance Parts on page 24.

Heater: Heating is performed simply using thermistors. The valve body can be heated to approximately 100 or 120°C, depending on the size of the product. The type and number of thermistors to be used will vary depending on the size and setting temperature. For the high-temperature type, the bonnet assembly is a heat-resistant structure.


Indicator: When the valve is open, a marker appears in the center of the upper surface of the bonnet.



Aluminum High Vacuum Angle Valve XLA/XLAV Series

Dimensions

XLA: Air operated

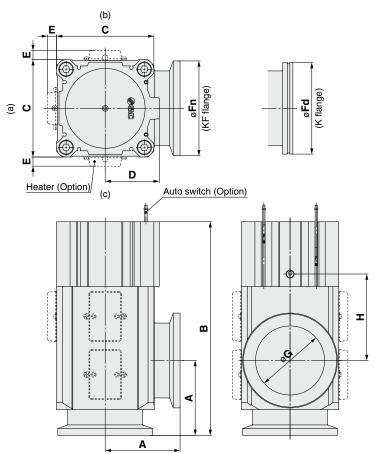




									[mm
Model	Α	В	С	D	E*1	Fn	Fd	G	Н
XLA-16-2	40	108	38	20	_	30	_	17	44
XLA-25-2	50	121	48	27	12	40	_	26	44
XLA-40-2	65	171	66	39	11	55	_	41	67
XLA-50-2	70	185	79	46	11	75	_	52	72
XLA-63-2	88	212	100	55	11	87	95	70	76
XLA-80-2	90	257	117	65	11	114	110	83	104

- *1 The E dimension applies when the heater option is included. (Lead wire length: Approx. 1 m)
- (a), (b), (c) in the above drawing indicate heater mounting positions.
 Moreover, heater mounting positions will differ depending on the type of heater.

For details, refer to Common Option [2] Mounting position of the heater on page 17.

XLAV: Air operated, With solenoid valve

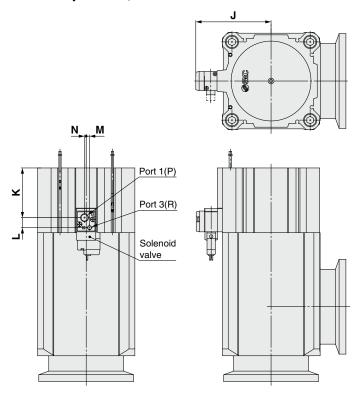

					[mm]
Model	J	K	L	M	N
XLAV-16-2	41	17.2	10.2	3.6	3.6
XLAV-25-2	46	21.4	10.2	3.6	3.6
XLAV-40-2	54.5	33.9	10.2	3.6	3.6
XLAV-50-2	61	38.2	10.2	3.6	3.6
XLAV-63-2	80.5	43.8	12	4	2
XLAV-80-2	90.5	59.8	12	4	2




Aluminum High Vacuum Angle Valve Double Acting, Bellows Seal

XLC Series





How to Order



1 Flange size


Size	
16	
25	
40	
50	
63	
80	

2 Flange type

Symbol	Type	Applicable flange size
Nil	KF (NW)	16, 25, 40, 50, 63, 80
D	K (DN)	63, 80

3 Pilot port direction

Symbol	Pilot port direction
Nil	Flange side
K	Left flange surface
L	Rear flange surface
М	Right flange surface



4 Temperature specifications/Heater

Symbo	I	Temperature	Heater
Nil		5 to 60°C	_
High-	Ю		_
temperature	H4	5 to 150°C	With 100°C heater
type	H5		With 120°C heater

- Size 16 is not applicable to H4, H5. Size 25 is not applicable to H4.
- * Heater cannot be retrofitted for the H0 type

6 Number of auto switches/Mounting position

Symbol	Quantity	Mounting position	
Nil	Without auto switch	_	
Α	2	Valve open/closed	
В	1	Valve open	
С	1	Valve closed	

(5) Auto switch type

Symbol	Model	Remarks			
Nil	_	Without auto switch (without magnet)			
M9N(M)(L)(Z)	D-M9N(M)(L)(Z)				
M9P(M)(L)(Z)	D-M9P(M)(L)(Z)	Solid state auto switch			
M9B(M)(L)(Z)	D-M9B(M)(L)(Z)				
A90(L)	D-A90(L)	Reed auto switch (Not applicable			
A93(M)(L)(Z)	D-A93(M)(L)(Z)	to flange size 16)			
M9//	_	Without auto switch (with magnet)			

- * For the high-temperature type, select the heat-resistant auto switch. (Refer to page 18.)
- * Standard lead wire length is 0.5 m. Add M to the end of the part number for 1 m, L for 3 m, and Z for 5 m.

 Example) -2M9NL

OBODY Surface treatment/Seal material and changed parts

Body surface treatment

	Symbol	Surface treatment					
	Nil	External: Hard anodized Internal: Raw material					
	Α	External: Hard anodized Internal: Oxalic acid anodized					

Seal material

Symbol	Seal material	Compound no.				
Nil	FKM	1349-80* ¹				
N1	EPDM	2101-80* ¹				
P1	Barrel Perfluoro®	70W				
Q1	Kalrez [®]	4079				
R1		SS592				
R2	Chemraz [®]	SS630				
R3		SSE38				
S1	VMQ	1232-70* ¹				
T1	FKM for Plasma	3310-75* ¹				

*1 Produced by Mitsubishi Cable Industries, Ltd.

Barrel Perfluoro® is a registered trademark of Matsumura Oil Co., Ltd. Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

Chemraz® is a registered trademark of Greene, Tweed Technologies, Inc.

Part with changed seal material and leakage

Symbol	Changed *2	Leakage [Pa·m³/s or less] *1				
Cymbol	part	Internal	External			
Nil	None	1.3 x 10 ⁻¹⁰ (FKM)	1.3 x 10 ⁻¹¹ (FKM)			
Α	2, 3, 4	1.3 x 10 ⁻⁸	1.3 x 10 ⁻⁹			
В	2,3	1.3 x 10 ⁻⁸	1.3 x 10 ⁻⁹			
С	4	1.3 x 10 ⁻¹⁰ (FKM)	1.3 x 10 ⁻⁹			
D	2	1.3 x 10 ⁻⁸	1.3 x 10 ⁻¹¹ (FKM)			
E	2,4	1.3 x 10 ⁻⁸	1.3 x 10 ⁻⁹			

- *1 Values at normal temperature, excluding gas permeation
- *2 Refer to Construction on page 8 for changed part. Number corresponds with the parts number on the construction drawing.

To order something other than Nil (standard), list the symbols starting with X, followed by each symbol for body surface treatment, seal material, and then changed part.

Example) XLC-16-2M9NA-XAN1A

* The XLCV (With solenoid valve) is available as made to order. Please contact SMC for details.




Specifications

Model		XLC-16-2	XLC-25-2	XLC-40-2	XLC-50-2	XLC-63-2	XLC-80-2	
Valve type			Double ac	ting (Dual operation	on), Pressurize to	open/close		
Fluid				Inert gas un	der vacuum			
Operating temperature [°C]	XLC		5 t	to 60 (High-temper	rature type: 5 to 15	50)		
Operating pressure [Page 1]	[abs)]			1 x 10 ⁻⁶ to atmos	spheric pressure			
Conductance [L/s]*1		5	14	45	80	160	200	
Lockers [Do m³/o]	Internal	For standard seal material (FKM): 1.3 x 10 ⁻¹⁰ at normal temperature, excluding gas permeation						
Leakage [Pa·m³/s]	External	For standard seal material (FKM): 1.3 x 10 ⁻¹¹ at normal temperature, excluding gas permeation						
Flange type	,	KF (NW) KF (NW), K (DN)						
Principal materials		Body: Aluminum alloy, Bellows: Stainless steel 316L, Chief part: Stainless steel, FKM (Standard seal material)						
Surface treatment		External: Hard anodized Internal: Raw material						
Pilot pressure [MPa(G)]		0.3 to 0.6 0.4 to 0.6						
Pilot port size	XLC	N	15	Rc1/8				
Weight [kg]	XLC	0.27	0.27 0.45		1.4	2.4	3.9	

^{*1} Conductance is the value for the elbow with the same dimensions.

Construction/Operation

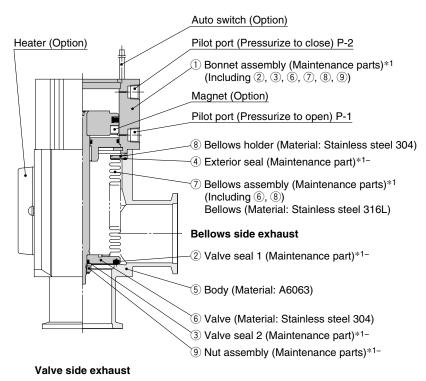

*1 Refer to Maintenance Parts on page 24.

<Working principle>

By applying pilot pressure from the pilot port P-1, the piston-coupled valve overcomes the operating force by the pressure, and the valve opens. (Pilot port P-2 is open.) Alternatively, by applying pilot pressure to pilot port P-2, the valve closes. (Pilot port P-1 is open.)

<Option>

Auto switch: The magnet activates the auto switch. With 2 auto switches, the open and closed positions are detected, and with 1 auto switch, either the open or closed position is detected. The temperature range is only available for general use (5 to 60°C).

Heater: Heating is performed simply using thermistors. The valve body can be heated to approximately 100 or 120°C, depending on the size of the product. The type and number of thermistors to be used will vary depending on the size and setting temperature. For the high-temperature type, the bonnet assembly is a heat-resistant structure.




^{*} For heater specifications, refer to Common Option [1] Heater on page 17.

XLC Series


Dimensions

XLC: Air operated


Size 16, 25, 40





(b)



Size 50, 63, 80

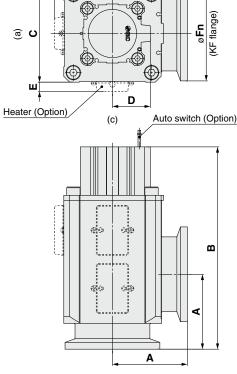





											[[[[[]]
Model	Α	В	С	D	E*1	Fn	Fd	G	Н	J	K
XLC-16-2	40	108	38	20	_	30	_	17	44	19	_
XLC-25-2	50	121	48	27	12	40	_	26	44	21	_
XLC-40-2	65	171	66	39	11	55	_	41	67	29	_
XLC-50-2	70	181	79	31	11	75	_	52	76	29	9
XLC-63-2	88	206	100	39	11	87	95	70	77	33	9
XLC-80-2	90	244	117	46	11	114	110	83	104	39	9

^{*1} The E dimension applies when the heater option is included. (Lead wire length: Approx. 1 m)


^{* (}a), (b), (c) in the above drawing indicate heater mounting positions. Moreover, heater mounting positions will differ depending on the type of heater. For details, refer to Common Option [2] Mounting position of the heater on page 17.

Aluminum High Vacuum Angle Valve Normally Closed, O-ring Seal XLF/XLFV Series





How to Order



1 Flange size


Size	
16	
25	
40	
50	
63	
80	1

2 Flange type

Symbol	Type	Applicable flange size			
Nil	KF (NW)	16, 25, 40, 50, 63, 80			
D	K (DN)	63, 80			

3 Indicator/Pilot port direction

Symbol	Indicator	Pilot port direction
Nil	Without indicator	Flange side
Α		Flange side
F	With	Left flange surface
G	indicator	Rear flange surface
J		Right flange surface
K	Without indicator	Left flange surface
L		Rear flange surface
M		Right flange surface



4 Temperature specifications/Heater

Symbol		Temperature	Heater
Nil		5 to 60°C	_
High-	Ю		_
temperature	H4	5 to 150°C	With 100°C heater
type	H5		With 120°C heater

- Size 16 is not applicable to H4, H5. Size 25 is not applicable to H4.
- * Heater cannot be retrofitted for the H0 type

6 Number of auto switches/Mounting position

Symbol	Quantity	Mounting position
Nil	Without auto switch	_
Α	2	Valve open/closed
B 1		Valve open
С	1	Valve closed

5 Auto switch type

Symbol	Model	Remarks
Nil	_	Without auto switch (without magnet)
M9N(M)(L)(Z)	D-M9N(M)(L)(Z)	
M9P(M)(L)(Z)	D-M9P(M)(L)(Z)	Solid state auto switch
M9B(M)(L)(Z)	D-M9B(M)(L)(Z)	
A90(L)	D-A90(L)	Reed auto switch (Not applicable
A93(M)(L)(Z)	D-A93(M)(L)(Z)	to flange size 16)
M9//	_	Without auto switch (with magnet)

- For the high-temperature type, select the heat-resistant auto switch.
 (Refer to page 18.)
- Standard lead wire length is 0.5 m. Add M to the end of the part number for 1 m, L for 3 m, and Z for 5 m.
 Example) -2M9NL

(7) Body surface treatment/Seal material and changed parts

Body surface treatment

Symbol	Surface treatment		
Nil	External: Hard anodized Internal: Raw material		
Α	External: Hard anodized Internal: Oxalic acid anodized		

Seal material

		
Symbol	Seal material	Compound no.
Nil	FKM	1349-80*1
N1	EPDM	2101-80*1
P1	Barrel Perfluoro®	70W
Q1	Kalrez [®]	4079
R1		SS592
R2	Chemraz [®]	SS630
R3		SSE38
S1	VMQ	1232-70*1
T1	FKM for Plasma	3310-75*1

*1 Produced by Mitsubishi Cable Industries, Ltd.

Barrel Perfluoro® is a registered trademark of Matsumura Oil Co., Ltd. Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

Chemraz® is a registered trademark of Greene, Tweed Technologies, Inc.

• Part with changed seal material and leakage

S	/mbol	Changed *2	Leakage [Pa·m³/s or less] *1		
Symbol		part	Internal	External	
	Nil	None	1.3 x 10 ⁻¹⁰ (FKM)	1.3 x 10 ⁻¹⁰ (FKM)	
	Α	2, 3, 4	1.3 x 10 ⁻⁸	1.3 x 10 ⁻⁸	
	В	2,3	1.3 x 10 ⁻⁸	1.3 x 10 ⁻¹⁰ (FKM)	
	С	4	1.3 x 10 ⁻¹⁰ (FKM)	1.3 x 10 ⁻⁸	
	D	2	1.3 x 10 ⁻⁸	1.3 x 10 ⁻¹⁰ (FKM)	
	Е	2,4	1.3 x 10 ⁻⁸	1.3 x 10 ⁻⁸	

- *1 Values at normal temperature, excluding gas permeation
- *2 Refer to Construction on page 12 for changed part. Number corresponds with the parts number on the construction drawing.

To order something other than Nil (standard), list the symbols starting with X, followed by each symbol for body surface treatment, seal material, and then changed part.

Example) XLF-16-2M9NA-XAN1A



XLF/XLFV Series


Air Operated, With Solenoid Valve



How to Order

Air operated, With solenoid valve





Symbol

Nil

Α

В

C

1 Flange size


Size
16
25
40
50
63
80


2 Flange type

Symbol	Type	Applicable flange size
Nil	KF (NW)	16, 25, 40, 50, 63, 80
D	K (DN)	63, 80

(3) Indicator/Solenoid valve direction

Symbol	Indicator	Solenoid valve direction
F	With	Left flange surface
G		Rear flange surface
J		Right flange surface
K	Without	Left flange surface
L		Rear flange surface
M	indicator	Right flange surface





Mounting position

Valve open/closed

Valve open

Valve closed

4 Auto switch type

Model	Remarks
	Without auto switch (without magnet)
D-M9N(M)(L)(Z)	
D-M9P(M)(L)(Z)	Solid state auto switch
D-M9B(M)(L)(Z)	
D-A90(L)	Reed auto switch (Not applicable
D-A93(M)(L)(Z)	to flange size 16)
_	Without auto switch (with magnet)
	D-M9N(M)(L)(Z) D-M9P(M)(L)(Z) D-M9B(M)(L)(Z) D-A90(L)

^{*} Standard lead wire length is 0.5 m. Add M to the end of the part number for 1 m, L for 3 m, and Z for 5 m.

CE-compliant

0

0

Example) -2M9NL

2 3

4

5 6

6 Rated voltage

(7) Electrical entry

G	Grommet (Lead wire length 300 mm)	
Н	Grommet (Lead wire length 600 mm)	
L	L type plug connector	
M	M type plug connector	

8 Light/surge voltage suppressor

Solumber of auto switches/Mounting position Quantity

Without auto switch

2

Nil	None
S	With surge voltage suppressor
Z	With light/surge voltage suppressor
U	With light/surge voltage suppressor (Non-polar type)

S type: Not available for AC

U type: DC only

10 CE-compliant

Nil	_
Q	CE-compliant

9 Body surface treatment/Seal material and changed parts

Body surface treatment

100 VAC, 50/60 Hz 200 VAC, 50/60 Hz

110 VAC, 50/60 Hz

220 VAC, 50/60 Hz 24 VDC

12 VDC

Symbol	Surface treatment		
Nil	External: Hard anodized Internal: Raw material		
Α	External: Hard anodized Internal: Oxalic acid anodized		

Seal material

		
Symbol	Seal material	Compound no.
Nil	FKM	1349-80* ¹
N1	EPDM	2101-80* ¹
P1	Barrel Perfluoro®	70W
Q1	Kalrez®	4079
R1		SS592
R2	Chemraz [®]	SS630
R3		SSE38
S1	VMQ	1232-70* ¹
T1	FKM for Plasma	3310-75* ¹

*1 Produced by Mitsubishi Cable Industries, Ltd.

Barrel Perfluoro® is a registered trademark of Matsumura Oil Co., Ltd. Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

Chemraz® is a registered trademark of Greene, Tweed Technologies, Inc.

Part with changed seal material and leakage

Cymbol	Changed part *2	Leakage [Pa·m³/s or less] *1			
Symbol	Changeu part	Internal	External		
Nil	None	1.3 x 10 ⁻¹⁰ (FKM)	1.3 x 10 ⁻¹¹ (FKM)		
Α	2, 3, 4	1.3 x 10 ⁻⁸	1.3 x 10 ⁻⁹		
B 2,3		1.3 x 10 ^{−8}	1.3 x 10 ⁻⁹		
С	4	1.3 x 10 ⁻¹⁰ (FKM)	1.3 x 10 ⁻⁹		
D	2	1.3 x 10 ^{−8}	1.3 x 10 ⁻¹¹ (FKM)		
E	2,4	1.3 x 10 ^{−8}	1.3 x 10 ⁻⁹		

*1 Values at normal temperature, excluding gas permeation

*2 Refer to Construction on page 12 for changed part. Number corresponds with the parts number on the construction drawing.

To order something other than Nil (standard), list the symbols starting with X, followed by each symbol for body surface treatment, seal material, and then changed part.

Example) XLFV-40L-2M9NA-1G-XAN1A

- With solenoid valve: Option specifications/Combinations This model has indicator, auto switch, and K (DN) flange options, but hightemperature/heater options are not available.
- Solenoid valves XLFV-16, 25, 40: SYJ319, XLFV-50, 63, 80: SYJ519 Example) SYJ319-1GS, etc.

For details, please contact your SMC sales representative. ** For option "Q," the solenoid valve should be a CE-compliant product.




Aluminum High Vacuum Angle Valve XLF/XLFV Series

Specifications

Model		XLF(V)-16-2	XLF(V)-25-2	XLF(V)-40-2	XLF(V)-50-2	XLF(V)-63-2	XLF(V)-80-2
Valve type			Normally closed (Pressurize to open, Spring seal)				
Fluid				Inert gas un	der vacuum		
Operating	XLF		5 1	to 60 (High-tempe	rature type: 5 to 15	50)	
temperature [°C]	XLFV			5 to	50		
Operating pressure [Pa(abs)]			1 x 10 ⁻⁵ to atmo	spheric pressure		
Conductance [L/s]*1		5	14	45	80	160	200
Laskawa [Da m3/a]	Internal	For standard seal material (FKM): 1.3 x 10 ⁻¹⁰ at normal temperature, excluding gas permeation					
Leakage [Pa·m³/s]	External	For standard seal material (FKM): 1.3 x 10 ⁻¹⁰ at normal temperature, excluding gas permeation					
Flange type		KF (NW) KF (NW), K (DN)					
Principal materials*2		Body: Aluminum alloy, Chief part: Stainless steel, FKM (Standard seal material)					
Surface treatment		External: Hard anodized Internal: Raw material					
Pilot pressure [MPa(0	G)]	0.4 to 0.7					
Dillet and aller	XLF	N	15	Rc1/8			
Pilot port size	XLFV		M5: Port 1(P), 3(R	Rc1/8: Port 1(P), M5: Port 3(R)			ort 3(R)
Weight [kg]	XLF	0.29	0.49	1.2	1.9	3.3	5.7
	XLFV	0.34	0.54	1.3	2.0	3.4	5.8

^{*1} Conductance is the value for the elbow with the same dimensions.

Construction/Operation

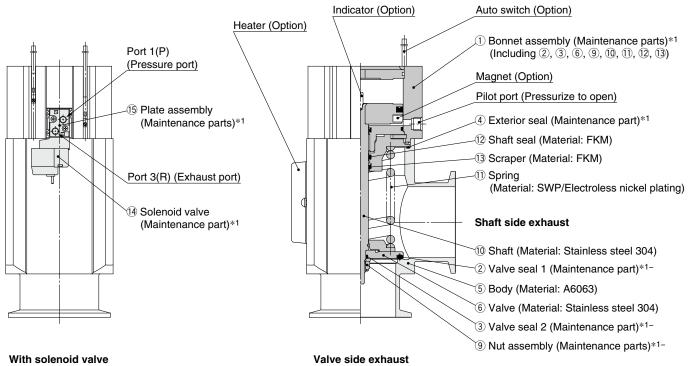

*1 Refer to Maintenance Parts on page 24.

<Working principle>

By applying pilot pressure from the pilot port, the piston-coupled valve overcomes the force of the spring or operating force by pressure, and the valve opens.

In the case of the XLFV, port 1(P) is normally pressurized, and the valve opens when the solenoid valve is turned ON and closes when it is turned OFF.

<Option>

Auto switch: The magnet activates the auto switch. With 2 auto switches, the open and closed positions are detected, and with 1 auto switch, either the open or closed position is detected. The temperature range is only available for general use (5 to 60°C).

Heater: Heating is performed simply using thermistors. The valve body can be heated to approximately 100 or 120°C, depending on the size of the product. The type and number of thermistors to be used will vary depending on the size and setting temperature. For the high-temperature type, the bonnet assembly is a heat-resistant structure.

Indicator: When the valve is open, a marker appears in the center of the upper surface of the bonnet.




^{*2} A coating of vacuum grease [Y-VAC2] is applied to the seal-material sliding portion of the vacuum part.

XLF/XLFV Series

Dimensions

XLF: Air operated

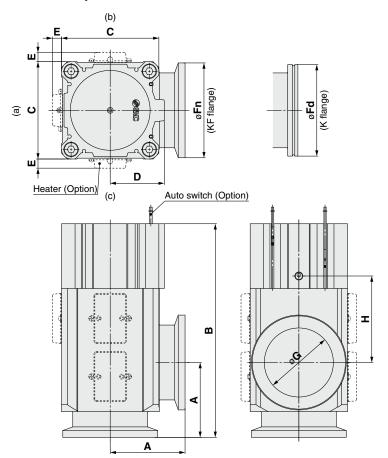




									_[mm
Model	Α	В	С	D	E*1	Fn	Fd	G	Н
XLF-16-2	40	108	38	20	_	30	_	17	44
XLF-25-2	50	121	48	27	12	40	_	26	44
XLF-40-2	65	171	66	39	11	55	_	41	67
XLF-50-2	70	185	79	46	11	75	_	52	72
XLF-63-2	88	212	100	55	11	87	95	70	76
XLF-80-2	90	257	117	65	11	114	110	83	104

- *1 The E dimension applies when the heater option is included. (Lead wire length: Approx. 1 m)
- (a), (b), (c) in the above drawing indicate heater mounting positions.
 Moreover, heater mounting positions will differ depending on the type of heater.

For details, refer to Common Option [2] Mounting position of the heater on page 17.

XLFV: Air operated, With solenoid valve

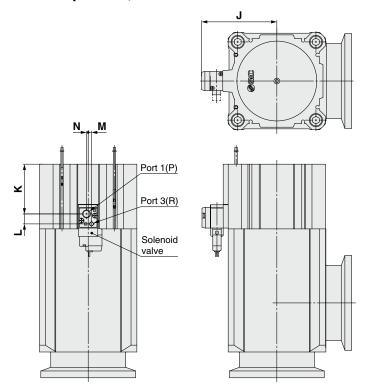

					[mm]
Model	J	K	L	M	N
XLFV-16-2	41	17.2	10.2	3.6	3.6
XLFV-25-2	46	21.4	10.2	3.6	3.6
XLFV-40-2	54.5	33.9	10.2	3.6	3.6
XLFV-50-2	71	35.3	12	4	2
XLFV-63-2	80.5	43.8	12	4	2
XLFV-80-2	90.5	59.8	12	4	2




Aluminum High Vacuum Angle Valve Double Acting, O-ring Seal XLG Series





How to Order



1 Flange size


Size	
16	
25	
40	
50	
63	
80	

2 Flange type

Symbol	Type	Applicable flange size
Nil	KF (NW)	16, 25, 40, 50, 63, 80
D	K (DN)	63, 80

3 Pilot port direction

	Symbol	Pilot port direction
Nil F		Flange side
	K	Left flange surface
		Rear flange surface
		Right flange surface



4 Temperature specifications/Heater

Symbol		Temperature	Heater
Nil		5 to 60°C	_
High-	H0		_
temperature	H4	5 to 150°C	With 100°C heater
type	H5		With 120°C heater

- Size 16 is not applicable to H4, H5. Size 25 is not applicable to H4.
- * Heater cannot be retrofitted for the H0 type

6 Number of auto switches/Mounting position

Symbol	Quantity	Mounting position
Nil	Without auto switch	_
Α	2	Valve open/closed
В	1	Valve open
С	1	Valve closed

5 Auto switch type

Symbol	Model	Remarks
Nil	_	Without auto switch (without magnet)
M9N(M)(L)(Z)	D-M9N(M)(L)(Z)	
M9P(M)(L)(Z)	D-M9P(M)(L)(Z)	Solid state auto switch
M9B(M)(L)(Z)	D-M9B(M)(L)(Z)	
A90(L)	D-A90(L)	Reed auto switch (Not applicable
A93(M)(L)(Z)	D-A93(M)(L)(Z)	to flange size 16)
M9//	_	Without auto switch (with magnet)

- For the high-temperature type, select the heat-resistant auto switch. (Refer to page 18.)
- * Standard lead wire length is 0.5 m. Add M to the end of the part number for 1 m, L for 3 m, and Z for 5 m.

 Example) -2M9NL

OBODY Surface treatment/Seal material and changed parts

Body surface treatment

Symbol	Surface treatment			
Nil	External: Hard anodized Internal: Raw material			
Α	External: Hard anodized Internal: Oxalic acid anodized			

Seal material

Ocai materio	••	
Symbol	Seal material	Compound no.
Nil	FKM	1349-80*1
N1	EPDM	2101-80* ¹
P1	Barrel Perfluoro®	70W
Q1	Kalrez [®]	4079
R1		SS592
R2	Chemraz [®]	SS630
R3		SSE38
S1	VMQ	1232-70*1
T1	FKM for Plasma	3310-75* ¹

*1 Produced by Mitsubishi Cable Industries, Ltd.

Barrel Perfluoro® is a registered trademark of Matsumura Oil Co., Ltd. Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

Chemraz® is a registered trademark of Greene, Tweed Technologies, Inc.

Part with changed seal material and leakage

S	/mbol	Changed *2	Leakage [Pa·m³/s or less] *1			
ال	/111001	part	Internal	External		
	Nil	None	1.3 x 10 ⁻¹⁰ (FKM)	1.3 x 10 ⁻¹⁰ (FKM)		
	Α	2, 3, 4	1.3 x 10 ⁻⁸	1.3 x 10 ⁻⁸		
	В	2,3	1.3 x 10 ⁻⁸	1.3 x 10 ⁻¹⁰ (FKM)		
	С	4	1.3 x 10 ⁻¹⁰ (FKM)	1.3 x 10 ⁻⁸		
	D	2	1.3 x 10 ⁻⁸	1.3 x 10 ⁻¹⁰ (FKM)		
	Е	2,4	1.3 x 10 ⁻⁸	1.3 x 10 ⁻⁸		

- *1 Values at normal temperature, excluding gas permeation
- *2 Refer to Construction on page 15 for changed part. Number corresponds with the parts number on the construction drawing.

To order something other than Nil (standard), list the symbols starting with X, followed by each symbol for body surface treatment, seal material, and then changed part.

Example) XLG-16-2M9NA-XAN1A

* The XLGV (With solenoid valve) is available as made to order. Please contact SMC for details.




XLG Series

Specifications

Model		XLG-16-2	XLG-25-2	XLG-40-2	XLG-50-2	XLG-63-2	XLG-80-2
Valve type		Double acting (Dual operation), Pressurize to open/close					
Fluid				Inert gas un	der vacuum		
Operating temperature [°C]	XLG		5 1	to 60 (High-tempe	rature type: 5 to 15	50)	
Operating pressure [Page 1]	abs)]	Atmospheric pressure to 1 x 10 ⁻⁵					
Conductance [L/s]*1		5	14	45	80	160	200
Laskana [Da m3/s]	Internal	For standard seal material (FKM): 1.3 x 10 ⁻¹⁰ at normal temperature, excluding gas permeation					
Leakage [Pa·m³/s]	External	For standard seal material (FKM): 1.3 x 10 ⁻¹⁰ at normal temperature, excluding gas permeation					
Flange type	,		KF (NW)		KF (NW), K (DN)
Principal materials*2		Boo	ly: Aluminum alloy	, Chief part: Stain	ess steel, FKM (S	tandard seal mate	rial)
Surface treatment			Exterr	nal: Hard anodized	Internal: Raw m	aterial	
Pilot pressure [MPa(G)]		0.3 to 0.6			0.4 to 0.6		
Pilot port size	XLG	M5			Rc	1/8	
Weight [kg]	XLG	0.26	0.44	1.0	1.5	2.4	4.1

^{*1} Conductance is the value for the elbow with the same dimensions.

Construction/Operation

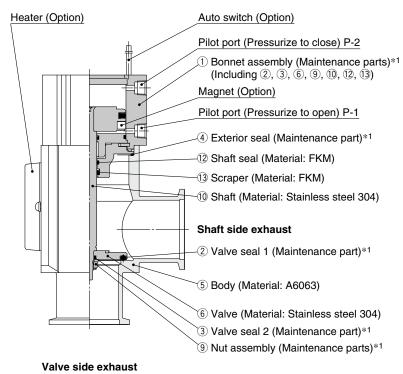

*1 Refer to Maintenance Parts on page 24.

<Working principle>

By applying pilot pressure from the pilot port P-1, the piston-coupled valve overcomes the operating force by the pressure, and the valve opens. (Pilot port P-2 is open.) Alternatively, by applying pilot pressure to pilot port P-2, the valve closes. (Pilot port P-1 is open.)

<Option>

Auto switch: The magnet activates the auto switch. With 2 auto switches, the open and closed positions are detected, and with 1 auto switch, either the open or closed position is detected. The temperature range is only available for general use (5 to 60°C).

Heater: Heating is performed simply using thermistors. The valve body can be heated to approximately 100 or 120°C, depending on the size of the product. The type and number of thermistors to be used will vary depending on the size and setting temperature. For the high-temperature type, the bonnet assembly is a heat-resistant structure.




^{*2} A coating of vacuum grease [Y-VAC2] is applied to the seal-material sliding portion of the vacuum part.


^{*} For heater specifications, refer to Common Option [1] Heater on page 17.

Dimensions


XLG: Air operated

Size 16, 25, 40






Size 50, 63, 80

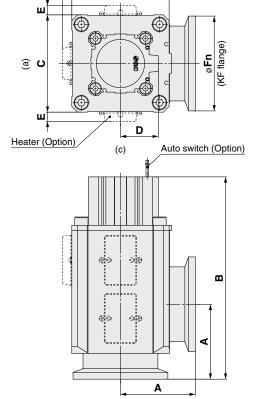

(b)



											[mm]
Model	Α	В	С	D	E*1	Fn	Fd	G	Н	J	K
XLG-16-2	40	108	38	20	_	30	_	17	44	19	
XLG-25-2	50	121	48	27	12	40	_	26	44	21	_
XLG-40-2	65	171	66	39	11	55	_	41	67	29	_
XLG-50-2	70	181	79	31	11	75	_	52	76	29	9
XLG-63-2	88	206	100	39	11	87	95	70	77	33	9
XLG-80-2	90	244	117	46	11	114	110	83	104	39	9

^{*1} The E dimension applies when the heater option is included. (Lead wire length: Approx. 1 m)

⁽a), (b), (c) in the above drawing indicate heater mounting positions. Moreover, heater mounting positions will differ depending on the type of heater. For details, refer to Common Option [2] Mounting position of the heater on page 17.



XL□ Series Common Option


1 Heater

Power consumption specifications are shown below.

Model			XL□-25-2	XL□-40-2	XL□-50-2	XL□-63-2	XL□-80-2	
Rated voltage for heater	Rated voltage for heater			90 to 240 VAC				
	Heater asser	mbly quantity	_	1	1	1	1	
Heater assembly quantity used	H4	100 V	_	200/40	200/50	400/100	600/150	
Heater power W (Nominal value)	100°C	200 V	<u> </u>	800/40	800/50	1600/100	2400/150	
Inrush/Power consumption (Option symbol, Operating voltage)	Heater assembly quantity		1	1	1	1	2	
	H5	100 V	200/40	400/70	400/80	600/130	800/180	
	120°C	200 V	800/40	1600/80	1600/80	2400/130	3200/180	


- * The inrush current of the heater flows for several tens of seconds when using 100 V, while it flows for several seconds when using 200 V. However, this inrush current will decrease shortly after.
- * When the product uses multiple heater assemblies, do not turn on the power to each heater assembly at the same time. Turn on the power to each heater assembly one-by-one at intervals of 30 sec. since the inrush current is large.
- * The heater temperature will decrease several % from the start of heating and then becomes stable. (The heater temperature may decrease approximately 5 to 10% due to individual differences.)
- * For mounting, refer to the Specific Product Precautions 2 on page 22. For details about quantity and type, refer to Maintenance Parts in the Specific Product Precautions 4 on page 24.

Inrush Current Flow Time (Reference)

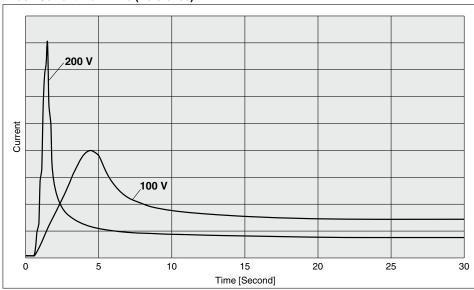

2 Mounting position of the heater

Heater symbol	XL□-25-2	XL□-40-2	XL□-50-2	XL□-63-2	XL□-80-2
H4 (100°C)	_	(a)	(a)	(b), (c)	(a), (b), (c)
H5 (120°C)	(a)	(b), (c)	(b), (c)	(a), (b), (c)	(b), (c)





Aluminum High Vacuum Angle Valve: With Heat-resistant Auto Switch

XL Series

Made to Order

RoHS

Sensor




Please contact SMC for detailed dimensions, specifications, and lead times.

With Heat-resistant Auto Switch (D-M9□J)

OHigh-temperature type (Heater is mountable.)

OWith heat-resistant 2-color indicator solid state auto switch

How to Order

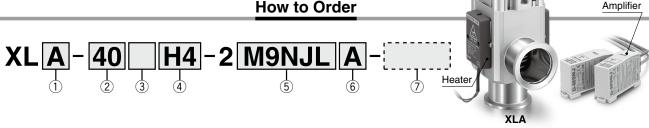

1 Series

	©						
Symbol	Valve type	Shaft seal type					
Α	Single acting (N.C.)	Bellows seal					
С	Double acting	Bellows seal					
F	Single acting (N.C.)	O-ring seal					
G	Double acting	O-ring seal					

(2) Flange size

\sim	· J	_	-
	Size		
	25		
	40		
	50		

(4) Temperature specifications/Heater

Symbol	Temperature	Heater
H0		_
H4	5 to 150°C	With 100°C heater
H5		With 120°C heater

Size 25 is not applicable to H4.


6 Number of auto switches/Mounting position

Symbol	Quantity	Mounting position		
Α	2	Valve open/closed		
В	1	Valve open		
С	1	Valve closed		

(3) Indicator/Pilot port direction

Symbol	Indicator	Pilot port direction			
Nil	Without indicator	Flange side			
Α		Flange side			
F	With	Left flange surface			
G	indicator	Rear flange surface			
J		Right flange surface			
K	Without	Left flange surface			
L	indicator	Rear flange surface			
M	indicator	Right flange surface			
* A, F, G, and J are only for series A and F.					





(5) Auto switch type

	71.	
Symbol	Model	Remarks
M9NJL	D-M9NJL	Lead wire length 3000 mm
M9NJZ	D-M9NJZ	Lead wire length 5000 mm
M9PJL	D-M9PJL	Lead wire length 3000 mm
M9PJZ	D-M9PJZ	Lead wire length 5000 mm
M9J/	_	Without auto switch (with magnet)

For details about auto switches, refer to page 20.

Body surface treatment/Seal material and changed parts

Body surface treatment

Symbol	Surface treatment
Nil	External: Hard anodized Internal: Raw material
Α	External: Hard anodized Internal: Oxalic acid anodized

Seal material

Symbol	Seal material	Compound no.		
Nil	FKM	1349-80* ¹		
N1	EPDM	2101-80* ¹		
P1	Barrel Perfluoro®	70W		
Q1	Kalrez [®]	4079		
R1		SS592		
R2	Chemraz [®]	SS630		
R3		SSE38		
S1	VMQ	1232-70* ¹		
T1	FKM for Plasma	3310-75* ¹		

*1 Produced by Mitsubishi Cable Industries, Ltd. Barrel Perfluoro® is a registered trademark of Matsumura Oil Co., Ltd.

Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

Chemraz® is a registered trademark of Greene, Tweed Technologies,

Part with changed seal material and leakage For XLA/XLC

Leakage [Pa·m³/s or less]*1 Changed Symbol part*2 Internal External 1.3 x 10⁻¹⁰ (FKM) Nil 1.3 x 10⁻¹¹ (FKM) None 3,4 1.3 x 10⁻⁸ 1.3 x 10⁻⁹ 1.3 x 10⁻⁸ 1.3 x 10⁻⁹ В 2,3 1.3 x 10⁻⁹ 1.3 x 10⁻¹⁰ (FKM) 4 1.3 x 10⁻⁸ D 1.3 x 10⁻¹¹ (FKM) 1.3 x 10⁻⁸ 1.3 x 10⁻⁹ Ε 2),

For XLF/XLG

. 4. ////								
Symbol	Changed	Leakage [Pa·r	m ³ /s or less]*1					
Symbol	Changed part*2	Internal	External					
Nil	None	1.3 x 10 ⁻¹⁰ (FKM)	1.3 x 10 ⁻¹⁰ (FKM)					
Α	2, 3, 4	1.3 x 10 ⁻⁸	1.3 x 10 ⁻⁸					
В	2,3	1.3 x 10 ⁻⁸	1.3 x 10 ⁻¹⁰ (FKM)					
С	4)	1.3 x 10 ⁻¹⁰ (FKM)	1.3 x 10 ⁻⁸					
D	2	1.3 x 10 ⁻⁸	1.3 x 10 ⁻¹⁰ (FKM)					
F	(2). (4)	1.3 x 10 ⁻⁸	1.3 x 10 ⁻⁸					

- *1 Values at normal temperature, excluding gas permeation
- *2 Refer to Construction on page 5 for changed part.

Number corresponds with the parts number on the construction drawing.

To order something other than Nil (standard), list the symbols starting with X, followed by each symbol for body surface treatment, seal material, and then changed part.


Example) XLA-25H0-2M9NJLA-XAN1A





XL Series

Dimensions

XLA/F (With D-M9□J□)










									[mm]
Series	Valve size	Α	В	С	D	E	Fn	G	Н
VIA	25	50	121	48	27	12	40	26	44
XLA XLF	40	65	171	66	39	11	55	41	67
ALI	50	70	185	79	46	11	75	52	72


XLC/G25, 40 (With D-M9□**J**□**)**







XLC/G50 (With D-M9 J)



											[mm]
Series	Valve size	Α	В	С	D	E	Fn	G	Н	J	K
VI C	25	50	121	48	27	12	40	26	44	21	_
XLC XLG	40	65	171	66	39	11	55	41	67	29	_
	50	70	185	79	31	11	75	52	76	29	9

Heat-resistant 2-Color Indicator Solid State Auto Switch: Direct Mounting Type D-M9NJ/D-M9PJ

Refer to the SMC website for details on products that are compliant with international standards.

Grommet

- Improved heat-resistant type
- The optimal operating range can be determined by the color of the light.

 $(Red \rightarrow Green \leftarrow Red)$





Auto Switch Specifications

PLC: Programmable Logic Controller

D-M9NJ/D-M9PJ (With indicator light)						
Auto switch model	D-M9NJ	D-M9PJ				
Output type	NPN	PNP				
Power supply voltage	5, 12, 24 VDC (4.5 to 28 V)					
Current consumption	25 mA or less					
Load voltage	28 VDC or less	_				
Load current	40 mA or less					
Internal voltage drop	0.8 V or less					
Leakage current	100 μA or less at 24 VDC					
Indicator light	Operating range Red LED illuminates Optimal operating range Green LED illuminates					
Ambient temperature	Sensor section: 0 to 150°C Amplifier section: 0 to 60°C					
Impact resistance	Sensor section: 1000 m/s ² Amplifier section: 300 m/s ²					
Standard	CE marki	ng, RoHS				


Oilproof Heavy-duty Lead Wire Specifications (Grommet)


Auto switch model		D-M9NJ	D-M9PJ		
Sheath	Outside diameter [mm]	ø3.4			
Insulator	Number of cores	3 cores (Brow	n/Blue/Black)		
insulator	Outside diameter [mm]	ø1.1			
Conductor	Effective area [mm²]	0.2			
	Strand diameter [mm]	ø0.	08		
Minimum bending radius [mm] (Reference values)		21			

Weight [g]

Auto swit	tch model	D-M9PJ D-M9PJ		
Lood wire longth	3 m (L)	160		
Lead wire length	5 m (Z)	20	00	

Dimensions [mm]



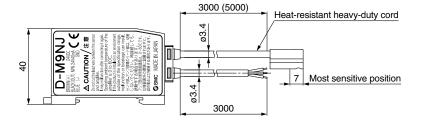





XL□ Series Specific Product Precautions 1

Be sure to read this before handling the products. Refer to the back cover for safety instructions. For auto switch and 3/4/5 port solenoid valve precautions, refer to the "Handling Precautions for SMC Products" and the "Operation Manual" on the SMC website: http://www.smcworld.com

Piping

⚠ Caution

1. Refer to the Fittings & Tubing Precautions on the SMC website for handling One-touch fittings.

2. Preparation before piping

Before piping is connected, it should be thoroughly flushed out with air or washed to remove chips, cutting oil, and other debris from inside the pipe.

3. Winding of sealant tape

When connecting pipes, fittings, etc., be sure that chips from the pipe threads and sealing material do not enter the valve. Furthermore, when sealant tape is used, leave 1.5 to 2 thread ridges exposed at the end of the threads.



Air Supply

1. Type of fluids

Please consult with SMC when using the product in applications other than compressed air.

2. When there is a large amount of drainage

Compressed air containing a large amount of drainage can cause the malfunction of pneumatic equipment. An air dryer or water separator should be installed upstream from filters.

3. Drain flushing

If condensation in the drain bowl is not emptied on a regular basis, the bowl will overflow and allow the condensation to enter the compressed air lines. This causes the malfunction of pneumatic equipment. If the drain bowl is difficult to check and remove, the installation of a drain bowl with an auto drain option is recommended.

For compressed air quality, refer to the Product Selection Guide.

4. Use clean air.

Do not use compressed air that contains chemicals, synthetic oils that include organic solvents, salt, corrosive gases, etc., as it can cause damage or malfunction.

Air Supply

- When extremely dry air is used as the fluid, degradation of the lubrication properties inside the equipment may occur, resulting in reduced reliability (or reduced service life) of the equipment. Please consult with SMC.
- 2. Install an air filter.

Install an air filter upstream near the valve. Select an air filter with a filtration size of 5 μm or smaller.

3. Take measures to ensure air quality, such as by installing an aftercooler, air dryer, or water separator.

Compressed air that contains a large amount of drainage can cause the malfunction of pneumatic equipment, such as valves. Therefore, take appropriate measures to ensure air quality, such as by providing an aftercooler, air dryer, or water separator.

4. Ensure that the fluid and ambient temperatures are within the specified range.

If the fluid temperature is 5°C or less, the moisture in the circuit could freeze, causing damage to the seals and equipment malfunction. Therefore, take appropriate measures to prevent freezing.

For compressed air quality, refer to the Product Selection Guide.

5. Precautionary measures against condensation

Moisture condensation can occur inside pneumatic systems due to a drop in temperature caused by the piping or operating conditions. This can degrade or wash away grease, resulting in a shortened service life or malfunction.

For details, refer to the catalog "Precautionary measures against condensation in a pneumatic system" (CAT.P-E01-11).





XL□ Series Specific Product Precautions 2

Be sure to read this before handling the products. Refer to the back cover for safety instructions. For auto switch and 3/4/5 port solenoid valve precautions, refer to the "Handling Precautions for SMC Products" and the "Operation Manual" on the SMC website: http://www.smcworld.com

Air-operated Angle Valve XLA/XLC/XLF/XLG Series

Design

⚠ Warning

All models

1. The body material is A6063, the bellows are made of stainless steel 316L, and the other metal material in the vacuum section is stainless steel 304.

The standard seal material in the vacuum section is FKM, but it can be changed to an other material if desired (refer to How to Order). Confirm that fluids are compatible with the materials before use.

Select materials for the actuation pressure piping, and heat resistance for fittings that are suitable for the applicable operating temperatures.

For XLF/XLG

Vacuum grease is applied to the sliding part of the vacuum (Y-VAC2).

Model with auto switch

- 1. The auto switch section temperature should not exceed 60°C.
- For models with a heat-resistant auto switch, set the temperature of the auto switch section to 150°C or less.

Model with heater

- For models with a heater, a device should be installed to prevent overheating.
- 2. If using gases that cause a large amount of deposits, heat the valve body to prevent deposits in the valve.

Model with solenoid valve

For models with a solenoid valve, the temperature of the solenoid valve section should be no greater than 50°C.

Selection

All models

- For high vacuum valves used in the main exhaust lines of flat panel display manufacturing equipment and other large manufacturing equipment, the XLF(V) or XLG(V) series, which employ O-ring seals for improved durability, is recommended.
- When controlling product responsiveness, take note of the size and length of piping, as well as the flow rate characteristics of the pilot solenoid valve.
- Pilot pressure should be kept within the specified range. 0.4 to 0.5 MPa is recommended.
- 4. Use within the operating pressure range.
- **5.** Use within the operating temperature range.
- The actuating piston chamber and the bellows chamber are directly connected to atmosphere.
 - Use in an environment where dust emissions will not cause problems. (Please consult with SMC if the release of dust must be avoided.)
- If a product without auto switches (other than the built-in magnet type) is selected, please note that an auto switch cannot be retrofitted.
- 8. For models with a solenoid valve, keep residual voltage leakage to 3% or less of the rated voltage for DC and 8% or less of the rated voltage for AC.

Mounting

⚠ Caution

All models

- In high-humidity environments, keep valves in packaging until the time of installation.
- For models with an auto switch or solenoid valve, secure the lead wires so that they have sufficient slack, without any unreasonable force applied to them.
- 3. Perform piping so that excessive force is not applied to the flange section. When there is vibration of heavy objects, attachments, etc., secure them so that torque is not applied directly to the flanges.
- 4. Vibration resistance allows for normal operation up to 30 m/s² (45 to 250 Hz), but continuous vibration may cause a decline in durability. Arrange piping to avoid excessive vibrations or shocks.


• High-temperature type (H0, H4, H5)

- For models with a heater, take care not to damage the insulation components of the lead wires and the connector section.
- 2. The setting temperature for models with a heater should be established without a draft or heat insulation. It will change depending on conditions such as heat-retaining measures and the heating of other piping. Fine adjustment is not possible.
- 3. When installing heater accessories or mounting a heater, check insulation resistance at the actual operating temperature. Installation of a short circuit breaker, etc., is recommended.
- When a product is to be heated, only the body section should be heated, excluding the bonnet section.
- When a heater is in operation, the entire product becomes hot. Be careful not to touch it with bare hands, as burns will result.

• Model with solenoid valve

1. When mounting the fitting to the pilot port, mount it so that the solenoid valve and plate are secured at the same time.

Additionally, when replacing the solenoid valve, mount the screws in the same manner.







XL□ Series Specific Product Precautions 3


Be sure to read this before handling the products. Refer to the back cover for safety instructions. For auto switch and 3/4/5 port solenoid valve precautions, refer to the "Handling Precautions for SMC Products" and the "Operation Manual" on the SMC website: http://www.smcworld.com

Air-operated Angle Valve XLA/XLC/XLF/XLG Series

Piping

- Before mounting, clean the flange seal surface and the O-ring with ethanol, etc.
- 2. There is an indentation of 0.1 to 0.2 mm in order to protect the flange seal surface, and it should be handled so that the seal surface is not damaged in any way. When using an outer ring, be sure that the O-ring is compressed sufficiently. (There is basically no problem with the outer ring.)
- 3. Exhaust direction
 - During operation, the direction of the exhaust may be determined freely, but in cases where a flow is generated by the exhaust, a decline in durability may result.
 - The exhaust direction shown in the figure below (bellows side exhaust) is recommended.
 - Take all available precautions, as the life of the equipment is affected by the conditions of usage.
- 4. Valves may not be able to be mounted depending on the piping material type (clamp, etc.). Be sure to check the piping material before use.

Recommended exhaust direction [Vacuum pump connected on bellows side]



Wiring

- When the solenoid valve with a DC type light/surge voltage suppressor is electrically connected, check whether there is polarity.
 - If there is polarity, incorrect polarity may cause damage to the elements inside the valve or power supply equipment, and malfunction may result.
- When electric power is connected to the solenoid valve, be careful to apply the proper voltage. Improper voltage may cause a malfunction or the coil to burn out.
- After completing the wiring, confirm that the connections are correct
- Secure the lead wire of the switch so that it has sufficient slack, without any excessive force applied to it.

Maintenance

⚠ Warning

If there are any concerns about safety in regards to the fluid or reaction product (deposit) have someone with sufficient knowledge and experience (a specialist of the field) disassemble, clean, and assemble the products.

- When removing deposits from a valve, take care not to damage any of its parts.
- 2. Replace the product or bonnet assembly when the end of its service life has approached.
- 3. If damage is suspected prior to the end of the product's service life, perform early maintenance. If there are scratches, dents, or cracks on the seals (bellows or valve) due to handling or operating conditions, replace the parts.
 - For maintenance parts, refer to Construction or Maintenance
- 4. SMC specified parts should be used for service.
- 5. When removing valve seals or exterior seals, take care not to damage the sealing surfaces. When installing the valve seal or exterior seal, be sure that the O-ring is not twisted.
- When the bellows assembly is replaced, do not hold the bellows directly.





XL Series **Specific Product Precautions 4**

Be sure to read this before handling the products. Refer to the back cover for safety instructions. For auto switch and 3/4/5 port solenoid valve precautions, refer to the "Handling Precautions for SMC Products" and the "Operation Manual" on the SMC website: http://www.smcworld.com

Air-operated Angle Valve XLA/XLC/XLF/XLG Series

Maintenance Parts

Air-operated angle valve

Bonnet Assembly

Series	Temperature	Indicator						
Series	specification	mulcator	16	25	40	50	63	80
	General	None	XLA16-30-1-2	XLA25-30-1-2	XLA40-30-1-2	XLA50-30-1-2	XLA63-30-1-2	XLA80-30-1-2
XLA	use	Yes	XLA16A-30-1-2	XLA25A-30-1-2	XLA40A-30-1-2	XLA50A-30-1-2	XLA63A-30-1-2	XLA80A-30-1-2
ALA	High	None	XLA16-30-1H-2	XLA25-30-1H-2	XLA40-30-1H-2	XLA50-30-1H-2	XLA63-30-1H-2	XLA80-30-1H-2
	temperature	Yes	XLA16A-30-1H-2	XLA25A-30-1H-2	XLA40A-30-1H-2	XLA50A-30-1H-2	XLA63A-30-1H-2	XLA80A-30-1H-2
XLAV	General	None	XLAV16-30-1-2	XLAV25-30-1-2	XLAV40-30-1-2	XLAV50-30-1-2	XLAV63-30-1-2	XLAV80-30-1-2
ALAV	use	Yes	XLAV16A-30-1-2	XLAV25A-30-1-2	XLAV40A-30-1-2	XLAV50A-30-1-2	XLAV63A-30-1-2	XLAV80A-30-1-2
XLC	General use	None	XLC16-30-1-2	XLC25-30-1-2	XLC40-30-1-2	XLC50-30-1-2	XLC63-30-1-2	XLC80-30-1-2
ALC	High temperature	None	XLC16-30-1H-2	XLC25-30-1H-2	XLC40-30-1H-2	XLC50-30-1H-2	XLC63-30-1H-2	XLC80-30-1H-2
	General	None	XLF16-30-1-2	XLF25-30-1-2	XLF40-30-1-2	XLF50-30-1-2	XLF63-30-1-2	XLF80-30-1-2
XLF	use	Yes	XLF16A-30-1-2	XLF25A-30-1-2	XLF40A-30-1-2	XLF50A-30-1-2	XLF63A-30-1-2	XLF80A-30-1-2
ALI	High	None	XLF16-30-1H-2	XLF25-30-1H-2	XLF40-30-1H-2	XLF50-30-1H-2	XLF63-30-1H-2	XLF80-30-1H-2
	temperature	Yes	XLF16A-30-1H-2	XLF25A-30-1H-2	XLF40A-30-1H-2	XLF50A-30-1H-2	XLF63A-30-1H-2	XLF80A-30-1H-2
XLFV	General	None	XLFV16-30-1-2	XLFV25-30-1-2	XLFV40-30-1-2	XLFV50-30-1-2	XLFV63-30-1-2	XLFV80-30-1-2
ALFV	use	Yes	XLFV16A-30-1-2	XLFV25A-30-1-2	XLFV40A-30-1-2	XLFV50A-30-1-2	XLFV63A-30-1-2	XLFV80A-30-1-2
XLG	General use	None	XLG16-30-1-2	XLG25-30-1-2	XLG40-30-1-2	XLG50-30-1-2	XLG63-30-1-2	XLG80-30-1-2
ALG	High temperature	None	XLG16-30-1H-2	XLG25-30-1H-2	XLG40-30-1H-2	XLG50-30-1H-2	XLG63-30-1H-2	XLG80-30-1H-2



- In cases where the material of the valve seal 1, 2 is anything other than the standard (FKM: Compound no. 1349-80: made by Mitsubishi Cable Industries, Ltd.), add suffix symbol for the seal material (as shown below) to the end of the part number.
- An auto switch magnet is not installed. In cases where an auto switch magnet is installed, add M9// to the end of the part number. (Not available for the high-temperature type)
- Auto switch and solenoid valve are not attached. When a product with an auto switch and solenoid valve is required, add the symbols for the auto switch and solenoid valve to the end of the part number. Bonnet assembly does not include exterior seal. Order separately if it is required.

Bellows Assembly/Nut Assembly

Description		Valve size				
(Construction no.)	16	25	40	50	63	80
Bellows assembly 7	XL1A16-2-101	XL1A25-2-101□	XL1A40-2-101	XL1A50-2-101	XL1A63-2-101□	XL1A80-2-101□
Nut assembly 9	XL1A16-10-1	XL1A25-10-1	XL1A40-10-1	XL1A5	0-10-1	XL1A80-10-1



- Bellows assembly includes the valve seal 1 (Standard material: FKM). (It does not include the valve seal 2.) In cases where the material of the valve seal 1 is anything other than the standard (FKM: Compound no. 1349-80: made by Mitsubishi Cable Industries, Ltd.), add suffix symbol for the seal material (as shown below) to the end of the part number (In place of \Box).

Exterior Seal/Valve Seal 1, 2

Description	Material			Valve	e size		
(Construction no.)	ivialeriai	16	25	40	50	63	80
Exterior seal (4)	Standard	AS568-025V	AS568-030V	AS568-035V	AS568-039V	AS568-043V	AS568-045V
Exterior sear 4	Special	AS568-025□	AS568-030□	AS568-035□	AS568-039□	AS568-043□	AS568-045□
Value seel 1 @	Standard	B2401-V15V	B2401-V24V	B2401-P42V	AS568-227V	AS568-233V	B2401-V85V
Valve seal 1 ②	Special	B2401-V15□	B2401-V24□	B2401-P42□	AS568-227□	AS568-233□	B2401-V85□
Value and 2 2	Standard	B2401-P4V	B2401-P5V	B2401-P6V	B240	1-P8V	B2401-P10V
Valve seal 2 ③	Special	B2401-P4□	B2401-P5□	B2401-P6□	B240	1-P8□	B2401-P10□

- * In cases where the seal material is anything other than the standard (FKM: Compound no. 1349-80: made by Mitsubishi Cable Industries, Ltd.), add suffix symbol for the seal material (as shown below) to the end of the part number (In place of \Box).
- * Refer to the Construction section of each series for component part numbers.

Refer to the Construction section of each series for component part numbers

Table 1: Suffix Symbol for Seal Material

Symbol	-XN1	-XP1	-XQ1	-XR1	-XR2	-XR3	-XS1	-XT1
Seal material	EPDM	Barrel Perfluoro®	Kalrez®		Chemraz [®]		VMQ	FKM for Plasma
Compound no.	2101-80*1	70W	4079	SS592	SS630	SSE38	1232-70*1	3310-75*1

Barrel Perfluoro® is a registered trademark of Matsumura Oil Co., Ltd. Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

Chemraz® is a registered trademark of Greene, Tweed Technologies, Inc.

Heater (CE)

*1 Produced by Mitsubishi Cable Industries, Ltd.

Valve size Temperature specification 25 40 50 63 80 H4 (100°C) XL1A25-60S-1 XL1A25-60S-1 XL1A25-60S-2 XL1A25-60S-3 XL1A25-60S-2 XL1A25-60S-3 XL1A25-60S-2 (2 sets) H5 (120°C) XL1A25-60S-1 XL1A25-60S-2

Example) For the XLA-80H5-2 with a heater, 2 sets of the XL1A25-60S-2 are required.

Solenoid Valve/Plate Assembly

Series	Description	Valve size					
Series	(Construction no.)	16	25	40	50	63	80
XLAV	Solenoid valve 14	SYJ319-□□ (SYJ519-□□ only for XLFV-50-2)			SYJ51	19-□□	
XLFV	Plate assembly 15	XL1AV16-90-2 (XLAV63-90-1 only for XLFV-50-2) XLAV63-90-				3-90-1	

The - 🗆 at the end of the solenoid valve part number is the selection symbol for voltage, electrical entry, and other specifications. For details about selection symbols, refer to the Web Catalog.

The plate assembly includes the plate, gasket, and mounting screws.



⚠ Safety Instructions

These safety instructions are intended to prevent hazardous situations and/or equipment damage. These instructions indicate the level of potential hazard with the labels of "Caution," "Warning" or "Danger." They are all important notes for safety and must be followed in addition to International Standards (ISO/IEC)*1), and other safety regulations.

Caution: Caution indicates a hazard with a low level of risk which, If not avoided, could result in minor or moderate injury.

Warning: Warning indicates a hazard with a medium level of risk which, if not avoided, could result in death or serious injury.

⚠ Danger: Danger if not avoided, will result in death or serious injury. **Danger** indicates a hazard with a high level of risk which, *1) ISO 4414: Pneumatic fluid power - General rules relating to systems.

ISO 4413: Hydraulic fluid power – General rules relating to systems.

IEC 60204-1: Safety of machinery - Electrical equipment of machines. (Part 1: General requirements)

ISO 10218-1: Manipulating industrial robots - Safety.

⚠Warning

1. The compatibility of the product is the responsibility of the person who designs the equipment or decides its specifications.

Since the product specified here is used under various operating conditions, its compatibility with specific equipment must be decided by the person who designs the equipment or decides its specifications based on necessary analysis and test results. The expected performance and safety assurance of the equipment will be the responsibility of the person who has determined its compatibility with the product. This person should also continuously review all specifications of the product referring to its latest catalog information, with a view to giving due consideration to any possibility of equipment failure when configuring the equipment.

2. Only personnel with appropriate training should operate machinery and equipment.

The product specified here may become unsafe if handled incorrectly. The assembly, operation and maintenance of machines or equipment including our products must be performed by an operator who is appropriately trained and experienced.

- 3. Do not service or attempt to remove product and machinery/ equipment until safety is confirmed.
 - 1. The inspection and maintenance of machinery/equipment should only be performed after measures to prevent falling or runaway of the driven objects have been confirmed.
 - 2. When the product is to be removed, confirm that the safety measures as mentioned above are implemented and the power from any appropriate source is cut, and read and understand the specific product precautions of all relevant products carefully.
 - 3. Before machinery/equipment is restarted, take measures to prevent unexpected operation and malfunction.
- 4. Contact SMC beforehand and take special consideration of safety measures if the product is to be used in any of the following conditions.
 - 1. Conditions and environments outside of the given specifications, or use outdoors or in a place exposed to direct sunlight.
 - 2. Installation on equipment in conjunction with atomic energy, railways, air navigation, space, shipping, vehicles, military, medical treatment, combustion and recreation, or equipment in contact with food and beverages, emergency stop circuits, clutch and brake circuits in press applications, safety equipment or other applications unsuitable for the standard specifications described in the product catalog.
 - 3. An application which could have negative effects on people, property, or animals requiring special safety analysis.
 - 4. Use in an interlock circuit, which requires the provision of double interlock for possible failure by using a mechanical protective function, and periodical checks to confirm proper operation.

⚠ Caution

1. The product is provided for use in manufacturing industries.

The product herein described is basically provided for peaceful use in manufacturing industries.

If considering using the product in other industries, consult SMC beforehand and exchange specifications or a contract if necessary.

If anything is unclear, contact your nearest sales branch.

Limited warranty and Disclaimer/ **Compliance Requirements**

The product used is subject to the following "Limited warranty and Disclaimer" and "Compliance Requirements".

Read and accept them before using the product.

Limited warranty and Disclaimer

- 1. The warranty period of the product is 1 year in service or 1.5 years after the product is delivered, whichever is first.*2)
 - Also, the product may have specified durability, running distance or replacement parts. Please consult your nearest sales branch.
- 2. For any failure or damage reported within the warranty period which is clearly our responsibility, a replacement product or necessary parts will be provided. This limited warranty applies only to our product independently, and not to any other damage incurred due to the failure of the product.
- 3. Prior to using SMC products, please read and understand the warranty terms and disclaimers noted in the specified catalog for the particular products.
 - 2) Vacuum pads are excluded from this 1 year warranty.

A vacuum pad is a consumable part, so it is warranted for a year after it is delivered.

Also, even within the warranty period, the wear of a product due to the use of the vacuum pad or failure due to the deterioration of rubber material are not covered by the limited warranty.

Compliance Requirements

- 1. The use of SMC products with production equipment for the manufacture of weapons of mass destruction (WMD) or any other weapon is strictly prohibited.
- 2. The exports of SMC products or technology from one country to another are governed by the relevant security laws and regulations of the countries involved in the transaction. Prior to the shipment of a SMC product to another country, assure that all local rules governing that export are known and followed.

⚠ Caution

SMC products are not intended for use as instruments for legal metrology.

Measurement instruments that SMC manufactures or sells have not been qualified by type approval tests relevant to the metrology (measurement) laws of each country. Therefore, SMC products cannot be used for business or certification ordained by the metrology (measurement) laws of each country.

Revision History

Edition B * The XLC/F/G series has been added.

* Number of pages increased from 12 to 24.

UR

Edition C * The XLAV-2/FV-2 has been added.

 Heat-resistant 2-color indicator solid state auto switch has been added to the high-temperature type.

* Number of pages increased from 24 to 28.

VO

↑ Safety Instructions Be sure to read the "Handling Precautions for SMC Products" (M-E03-3) and "Operation Manual" before use.

Aluminum High Vacuum Angle Valve

XL□ Series

The production of flange sizes 16, 25, 40, 50, 63, and 80 for the XLA(V)/XLC(V)/XLF(V)/XLG(V) series has been discontinued. Please select the new XL□-2 type. See here for details.



High fluorine Minimal outgassing Minimal contamination resistance from heavy metals Ø100, Ø160 XLA(V)

XLA

XL□ XL□0

XMU XYU

XSA XVD

XGT


CYV

Aluminum High Vacuum Angle Valve

L Series

Lightweight, Compact

Large conductance, small body Excellent resistance against fluorine corrosion (body)



XI * Spring Case

AL OCTIOS OF	CE Oches Case					
Model	A * (mm)	B (mm)	Weight (kg)	Conductance* (L/s)		
XLA-16	40	103	0.25	5		
XLA-25	50	113	0.45	14		
XLA-40	65	158	1.1	45		
XLA-50	70	170	1.6	80		
XLA-63	88	196	2.9	160		
XLA-80	90	235	5.0	200		
XLA-100	108	300	10.6	300		
XLA-160	138	315	18.5	800		

^{*} Common to all series.



Low outgassing makes it possible to use a lower capacity pump and also to shorten evaluation time





Little heavy metal contamination

The valve does not contain heavy metals such as Ni (nickel) or Cr (chrome) and a low sputtering yield also helps to minimize heavy metal contamination of semiconductor

Uniform baking temperature

Excellent thermal conductivity results in a uniform Temperature distribution of 120°C specifications temperature for the entire valve body and a marked decrease in the condensation of gases inside the valve.





High Vacuum Angle Valves XL□ Series Features

XLA/XLAV (Bellows seal, Single acting) Particulate-free and clean room compatible bellows

type Pressure-balance mechanism XLC/XLCV (Bellows seal, Double acting)

· Particulate-free and clean room compatible bellows type
• Pressure-balance mechanism

XLF/XLFV (O-ring seal, Single acting)

High speed response

 Particulates are reduced through special surface treatment of shaft seal.

XLG/XLGV (O-ring seal, Double acting)

- High speed response
- · Particulates are reduced through special surface treatment of shaft seal


- XLD/XLDV (2-Step control, Single acting) Initial stage exhaust valve and main exhaust valve
 - are combined. (flow rate 2-step control valve)
- . Designed with a compact system and reduced piping
 • Prevents particulate turbulence inside the
- chamber during exhaustion.
- · Prevents pumps from running while overloaded. Initial exhaust valve flow is adjustable.
- XLH (Bellows seal, Manual)
- Bellows type is particulate free and cleaned.
- Pressure balance mechanism allows unrestricted exhaust direction.
- Low actuation torque (0.5 N·m or less) Spring provides standard sealing load
- Handle height is the same when valve is open or closed · Indicator to confirm opening and closing of valve
 - is standard equipment

- XLS (Bellows pressure balance, Normally closed electromagnetic)
- · Particulates are reduced because there are no sliding metal parts.
- Pressure balance mechanism allows unrestricted exhaust direction.
- . A control power supply circuit for solenoid valve drive has been made standard.
- . Can be used in portable equipment since air for drive is not necessary.

Series Variations

The production of flange sizes 16, 25, 40, 50, 63, and 80 for the XLA(V)/XLC(V)/XLF(V)/XLG(V) series has been discontinued. Please select the new XLII-2 type. See here for details.

High Vacuum Angle Valves

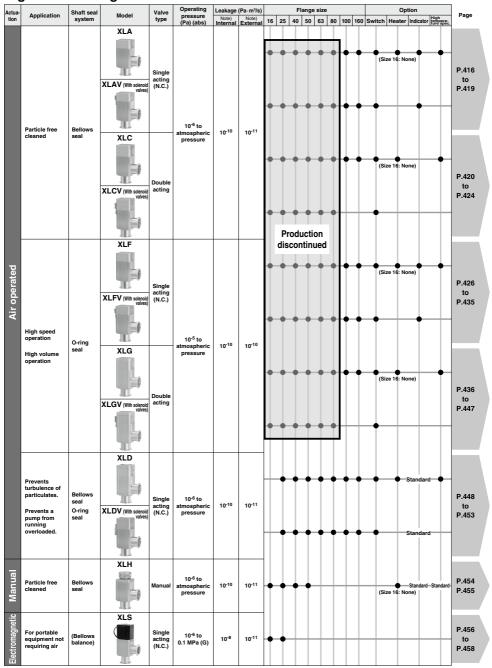

Note) In case of standard seal material (FKM)

* Heater and high temperature specifications are not available with switches.

XLA

XL_0

XM□ XY□

D-□

XSA

XVD

XGT

CYV

Aluminum High Vacuum Angle Valve Normally Closed/Bellows Seal




XLA/XLAV Series



How to Order

The production of flange sizes 16, 25, 40, 50, 63, and 80 for the XLA(V) series has been discontinued. Please select the new XLA(V)-2 type. See here for details.



(1) Flange size

Size	
16	
25	
40	
50	
63	
80	
100	
160	


2 Flange type

Symbol	Type	Applicable flange
Nil	KF (NW)	16, 25, 40, 50, 63, 80 100, 160
D	K (DN)	63, 80, 100, 160

ge	
, 80	
0	

(3) Indicator/Pilot port direction

Symbol	Indicator	Pilot port direction
Nil	Without indicator	Flange side
Α		Flange side
F	With	Left flange surface
G	indicator	Rear flange surface
J		Right flange surface
K	Without	Left flange surface
L	indicator	Rear flange surface
M	mulcator	Right flange surface



4 Temperature specifications/Heater

Symbo	1	Temperature	Heater
Nil		5 to 60°C	_
High	H0		_
temperature	H4	5 to 150°C	With 100°C heater
type	H5		With 120°C heater

Note) Size 16 is not applicable for H4, H5, Size 25 not for H4.

6 Number of auto switches/Mounting position

Symbol	Quantity	Mounting position
Nil	Without auto switch	_
Α	2 pcs.	Valve open/closed
В	1 pc.	Valve open
С	1 pc.	Valve closed
•		

5 Auto switch type

Auto switch model	Remarks
	Without auto switch (without built-in magnet)
D-M9N(M)(L)(Z)	
D-M9P(M)(L)(Z)	Solid state auto switch
D-M9B(M)(L)(Z)	
D-A90(L)	Reed auto switch (Not applicable
D-A93(M)(L)(Z)	to flange size 16)
_	Without auto switch (with built-in magnet)
	D-M9N(M)(L)(Z) D-M9P(M)(L)(Z) D-M9B(M)(L)(Z) D-A90(L) D-A93(M)(L)(Z)

Note 1) Auto switches shown above cannot be mounted on the high temperature type. For the high temperature type, a semi-standard product that uses the heat resistant auto switch D-F7NJ* is available. For details, please contact SMC

Note 2) Standard lead wire length is 0.5 m. Add "L" to the end of the part number when 3 m is desired, "M" when 1 m, and "Z" when 5 m.

Example) -M9NL

Body surface treatment/Seal material and its changed part

• Body surface treatment

ŀ	Symbol	Surface treatment	
i	Nil	External: Hard anodized Internal: Raw material External: Hard anodized Internal: Oxalic acid anodized	
i	Α		

• Seal material

Symbol	Seal material Compound No.	
Nil	FKM 1349-80*	
N1	EPDM	2101-80*
P1	Barrel Perfluoro®	70W
Q1	Kalrez [®]	4079
R1	SS592	
R2	R2 Chemraz® SS630 R3 SSE38 S1 VMQ 1232-70* T1 FKM for Plasma 3310-75* U1 ULTIC ARMOR® UA4640	
R3		
S1		
T1		
U1		

| * Produced by Mitsubishi Cable Industries, Ltd.

Seal material changed part and leakage

- Cour material changes part and realings			
Note 2) Changed	Leakage (Pa·m³/s or less) Note 1)		
part	Internal	External	
None	1.3 x 10 ⁻¹⁰ (FKM)	1.3 x 10 ⁻¹¹ (FKM)	
2,3	1.3 x 10 ⁻⁸	1.3 x 10 ⁻⁹	
2	1.3 x 10 ⁻⁸	1.3 x 10 ⁻¹¹ (FKM)	
3	1.3 x 10 ⁻¹⁰ (FKM)	1.3 x 10 ⁻⁹	
	Changed part None (2), (3)	Changed Leakage (Pa·m part Internal None 1.3 x 10 ⁻¹⁰ (FKM) 2, (3) 1.3 x 10 ⁻⁸	

Note 1) Values at normal temperature, excluding gas permeation. Note 2) Refer to parts number of "Construction" on page 418 for changed part. Number indicates parts number of "Construction" accordingly.

To order something other than "Nil" (standard), list the symbols starting with "X," followed by each symbol for "body surface treatment," "seal material" and then "changed part".

Example) XLA-16-M9NA-XAN1A

Barrel Perfluoro® is a registered trademark of Matsumura Oil Co., Ltd. Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

Chemraz® is a registered trademark of Greene, Tweed Technologies, Inc. ULTIC ARMOR® is a registered trademark of Nippon Valgua Industries, Ltd.

[®] 416



Air Operated/with Solenoid Valve


The production of flange sizes 16, 25, 40, 50, 63, and 80 for the XLA(V) series has been discontinued. Please select the new XLA(V)-2 type. See here for details.



How to Order

 ϵ

[Option



XLAV

1) Flange size

Size
16
25
40
50
63
80
100
160
-

2 Flange type

<u> </u>	_ r lange type		
Symbol	Type	Applicable flange	
Nil	KF (NW)	16, 25, 40, 50, 63, 80 100, 160	
D	K (DN)	63, 80, 100, 160	

3 Indicator/Pilot port direction

Symbol	Indicator	Pilot port direction
F		Left flange surface
G		Rear flange surface
J		Right flange surface
K	Without indicator	Left flange surface
L		Rear flange surface
M		Right flange surface



* M type plug connector (AC power supply) not attached for J, M of sizes 16 and 25.

4 Auto switch type

Symbol	Auto switch model	Remarks	
Nil	_	Without auto switch (without built-in magnet)	
M9N(M)(L)(Z)	D-M9N(M)(L)(Z)		
M9P(M)(L)(Z)	D-M9P(M)(L)(Z)	Solid state auto switch	
M9B(M)(L)(Z)	D-M9B(M)(L)(Z)		
A90(L)	D-A90(L)	Reed auto switch (Not applicable to flange size 16)	
A93(M)(L)(Z)	D-A93(M)(L)(Z)		
M9//	_	Without auto switch (with built-in magnet)	

Standard lead wire length is 0.5 m. Add "L" to the end of the part number when 3 m is desired, "M" when 1 m, and "Z" when 5 m. Example) -M9NL

(5) Number of auto switches/Mounting position

Symbol	Quantity	Mounting position	
Nil	Without auto switch	_	
Α	2 pcs.	Valve open/closed	
В	1 pc.	Valve open	
С	1 pc.	Valve closed	

6 Rated voltage

U Ha	CE-compliant	
1	100 VAC, 50/60 Hz	_
2	200 VAC, 50/60 Hz	_
3	110 VAC, 50/60 Hz	
4	220 VAC, 50/60 Hz	_
5	24 VDC	0
6	12 VDC	$\overline{}$

Electrical entry

G	Grommet (Lead wire length 300 mm)	
Н	Grommet (Lead wire length 600 mm)	
L	L type plug connector	
M M type plug connector		
M	M type plug connector	

8 Light/Surge voltage suppressor 10 CE-compliant

Nil	None		
S	With surge voltage suppressor		
Z	With light/surge voltage suppressor		
U	With light/surge voltage suppressor (Non-polar type)		

Nil — CE-compliant

XLA

XL\(\pi \)

XM

XY□ D-□

XSA XVD

XGT

- * S type: Not available for AC.
- * U type: DC only.

Body surface treatment/Seal material and its changed part

• Body surface treatment

ŀ	Symbol	Surface treatment	
i	Nil	External: Hard anodized Internal: Raw material	
i	Α	External: Hard anodized Internal: Oxalic acid anodized	

Seal material

Symbol	Seal material	Compound No.				
Nil	FKM	1349-80*				
N1	EPDM	2101-80*				
P1	Barrel Perfluoro®	70W				
Q1	Kalrez [®]	4079				
R1		SS592				
R2	Chemraz [®]	SS630				
R3		SSE38				
S1	VMQ	1232-70*				
T1	FKM for Plasma	3310-75*				
U1	ULTIC ARMOR®	UA4640				
* Produced by Mit	subishi Cable Industries, Ltd.	* Produced by Mitsubishi Cable Industries, Ltd.				

Barrel Perfluoro® is a registered trademark of Matsumura Oil Co., Ltd. Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

Chemraz® is a registered trademark of Greene, Tweed Technologies, Inc. ULTIC ARMOR® is a registered trademark of Nippon Valqua Industries, Ltd.

Seal material changed part and leakage

Note 2) Changed	Leakage (Pa·m	3/s or less) Note 1)
part	Internal	External
None	1.3 x 10 ⁻¹⁰ (FKM)	1.3 x 10 ⁻¹¹ (FKM)
②, ③	1.3 x 10 ⁻⁸	1.3 x 10 ⁻⁹
2	1.3 x 10 ⁻⁸	1.3 x 10 ⁻¹¹ (FKM)
3	1.3 x 10 ⁻¹⁰ (FKM)	1.3 x 10 ⁻⁹
	Changed part None 2, 3	Changed part Internal None 1.3 x 10 ⁻¹⁰ (FKM) ②, ③ 1.3 x 10 ⁻⁸ ② 1.3 x 10 ⁻⁸

Note 1) Values at normal temperature, excluding gas permeation.

Note 2) Refer to parts number of "Construction" on page 418 for changed part. Number indicates parts number of "Construction" accordingly.

To order something other than "Nil" (standard), list the symbols starting with "X," followed by each symbol for "body surface treatment," "seal material" and then "changed part".

Example) XLAV-16-M9NA-1G-XAN1A

Note 1) Option specifications/Combinations

This model has indicator, auto switch and K(DN) flange options, but high temperature/heater options are not available. Note 2) Solenoid valves

XLAV-16, 25, 40, 50: SYJ319, XLAV-63, 80, 100, 160: SYJ519 Example) SYJ319-1GS, etc.

- For details, consult your SMC sales representative.
- * For option "Q", the solenoid valve should be a CE-compliant product.

SIVIC

XLA/XLAV Series


Specifications

Model		XLA(V)-16 XLA(V)-25 XLA(V)-40 XLA(V)-50 XLA(V)-63 XLA(V)-80 XLA(V)-100 XLA(V)					XLA(V)-160		
Valve type				Normally cl	osed (Pressu	rize to open, S	Spring seal)		
Fluid					Inert gas un	der vacuum			
Operating	XLA			5 to 60	(High temper	rature type: 5	to 150)		
temperature (°C)	XLAV				5 to	50			
Operating pressure (F	Pa) (abs)	1 x 10 ⁻⁶ to atmospheric pressure							
Conductance (L/s) Not	e 1)	5	14	45	80	160	200	300	800
L (D3(-)	Internal	In case	In case of standard material FKM: 1.3 x 10 ⁻¹⁰ at normal temperature, excluding gas permeation						
Leakage (Pa·m³/s)	External	In case of standard material FKM: 1.3 x 10 ⁻¹¹ at normal temperature, excluding gas permeation							
Flange type		KF (NW) KF (NW), K (DN)							
Principal materials		Body: Alumir	um alloy, Bell	ows: Stainless	steel 316L, N	Main part: Stair	nless steel, FK	M (Standard s	eal material)
Surface treatment				External: H	lard anodized	Internal: Ra	aw material		
Pilot pressure (MPa)	(G)				0.4 t	o 0.7			
Pilot port size XLA XLAV		M5 Rc1/8			Rc1/4				
		M5: Port 1(P), Port 3(R)			Rc1/8: Port 1(P), M5: Port 3(R)			R)	
Waight (kg)	XLA	0.25	0.45	1.1	1.6	2.9	5.0	10.6	18.5
Weight (kg)	XLAV	0.29	0.49	1.14	1.64	2.96	5.06	10.7	18.6

Note 1) Conductance is the value for an elbow with the same dimensions.

Note 2) For valve heater specifications, refer to "Common Option [1] Heater" on page 459.

Construction/Operation

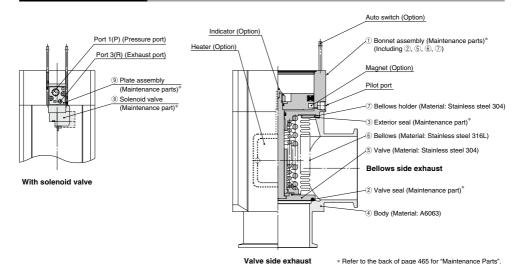

<Working principle>

By applying the pilot pressure from the pilot port, the piston-coupled valve overcomes the spring force or operating force by pressure, and the valve opens.

For the XLAV, the pilot pressure is always applied to the port 1(P), and the valve opens when the solenoid valve is turned ON and closes when it is turned OFF.

<Options>

Auto switch: The magnet activates the auto switch. With 2 auto switches, the open and closed positions are detected, and with 1 auto switch, either the open or closed position is detected. Auto switches are applicable at ordinary temperatures only (5 to 60°C).

Heater: Simple heating is performed using thermistors. The valve body can be heated to approximately 100 or 120°C, depending on the heater option and the valve size. The type and number of thermistors to be used will vary depending upon size and setting temperature. In the case of high temperature specifications, the bonnet assembly is a heat resistant structure. This does not apply in cases where a solenoid valve is


Indicator: When the valve is open, an orange marker appears in the center of the name plate.



Aluminum High Vacuum Angle Valve XLA/XLAV Series

Dimensions

XLA/Air operated



									(mm)
Model	Α	В	С	D	E Note 1)	Fn	Fd	G	Н
XLA-16	40	103	38	1	-	30	-	17	40
XLA-25	50	113	48	1	12	40	-	26	39
XLA-40	65	158	66	2	11	55	-	41	63
XLA-50	70	170	79	2	11	75	-	52	68
XLA-63	88	196	100	3	11	87	95	70	69
XLA-80	90	235	117	3	11	114	110	83	96
XLA-100	108	300	154	3	11	134	130	102	131
XLA-160	138	315	200	3	11	190	180	153	112


Note 1) Dimension E applies when heater option is included. (Lead wire length: approx. 1 m)

Note 2) (a), (b) and (c) in the above drawing indicate heater mounting positions.


Moreover, heater mounting positions will differ depending on the type of heater.

For further details, refer to mounting positions under "Replacement Heaters" on page 465.

XLAV/With solenoid valve



#	



					(mm)
Model	J	K	L	M	N
XLAV-16	35.5	12.3	10.2	3.6	3.6
XLAV-25	40.5	13.8	10.2	3.6	3.6
XLAV-40	50.5	21.6	10.2	3.6	3.6
XLAV-50	57	24.6	10.2	3.6	3.6

- * Other dimensions are the same as the XLA.
- * For details, consult your SMC sales representative.

					(mm)
Model	J	K	L	M	N
XLAV-63	78.5	28.7	12	4	2
XLAV-80	87	38.7	12	4	2
XLAV-100	105.5	50.7	12	4	2
XLAV-160	128.5	57.7	12	4	2

- * Other dimensions are the same as the XLA.
- * For details, consult your SMC sales representative.





XLA

 $XL\square$ XL□Q XM□ XY□

D-□


XSA XVD XGT CYV

Aluminum High Vacuum Angle Valve Double Acting/Bellows Seal

The production of flange sizes 16, 25, 40, 50, 63, and 80 for the XLC(V) series has been discontinued. Please select the new XLC(V)-2 type. See here for details.



XLC/XLCV Series

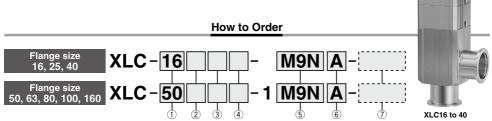

1) Flange size


Trange Size
Size
16
25
40
50
63
80
100
160

2 Flange type

_ r lange type				
Symbol	Type	Applicable flange		
Nil	KF (NW)	16, 25, 40, 50, 63, 80 100, 160		
D	K (DN)	63, 80, 100, 160		

3 Pilot port direction

Symbol	Pilot port direction
Nil	Flange side
K	Left flange surface
L	Rear flange surface
M	Right flange surface



4 Temperature specifications/Heater

Symbol		Temperature	Heater
Nil	5 to 60°C		_
High F	H0		_
temperature F	H4	5 to 150°C	With 100°C heater
type	H5		With 120°C heater

Note) Size 16 is not applicable for H4, H5, Size 25 not for H4.

6 Number of auto switches/Mounting position

Symbol	Quantity	Mounting position
Nil	Without auto switch	_
Α	2 pcs.	Valve open/closed
В	1 pc.	Valve open
С	1 pc.	Valve closed

5 Auto switch type

Symbol	Auto switch model	Remarks	
Nil	_	Without auto switch (without built-in magnet)	
M9N(M)(L)(Z)	D-M9N(M)(L)(Z)		
M9P(M)(L)(Z)	D-M9P(M)(L)(Z)	Solid state auto switch	
M9B(M)(L)(Z)	D-M9B(M)(L)(Z)		
A90(L)	D-A90(L)	Reed auto switch (Not applicable	
A93(M)(L)(Z)	D-A93(M)(L)(Z)	to flange size 16)	
M9//	_	Without auto switch (with built-in magnet)	

Note 1) Auto switches shown above cannot be mounted on the high temperature type. For the high temperature type, a semi-standard product that uses the heat resistant auto switch D-F7NJ* is available. For details, please contact SMC.

Note 2) Standard lead wire length is 0.5 m. Add "L" to the end of the part number when 3 m is desired, "M" when 1 m, and "Z" when 5 m. Example) -M9NL

Dody surface treatment/Seal material and its changed part

Body surface treatment

Symbol	Surface treatment	
Nil	External: Hard anodized Internal: Raw material	
Α	External: Hard anodized Internal: Oxalic acid anodized	

Seal material

Symbol	Seal material Compound No.		
Nil	FKM	1349-80*	
N1	EPDM	2101-80*	
P1	Barrel Perfluoro®		
Q1	Kalrez®	4079	
R1		SS592	
R2	Chemraz [®]	SS630	
R3	SSE38		
S1	VMQ	1232-70*	
T1	FKM for Plasma	3310-75*	
U1	ULTIC ARMOR®	UA4640	
* Produced by Mitsubishi Cable Industries, Ltd.			

· Seal material changed part and leakage

Symbol	Changed	Leakage (Pa·m³/s or less) Note 1)		
Cymbol	part	Internal	External	
Nil	None	1.3 x 10 ⁻¹⁰ (FKM)	1.3 x 10 ⁻¹¹ (FKM)	
Α	2,3	1.3 x 10 ⁻⁸	1.3 x 10 ⁻⁹	
В	2	1.3 x 10 ⁻⁸	1.3 x 10 ⁻¹¹ (FKM)	
С	3	1.3 x 10 ⁻¹⁰ (FKM)	1.3 x 10 ⁻⁹	
N. J. W. L. S. L.				

Note 1) Values at normal temperature, excluding gas permeation.

Note 2) Refer to parts number of "Construction" on page 422 for changed part.

Number indicates parts number of "Construction" accordingly.

To order something other than "Nil" (standard), list the symbols starting with "X," followed by each symbol for "body surface treatment," "seal material" and then "changed part".

Example) XLC-16-M9NA-XAN1A


Barrel Perfluoro® is a registered trademark of Matsumura Oil Co., Ltd. Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

Chemraz® is a registered trademark of Greene, Tweed Technologies, Inc. ULTIC ARMOR® is a registered trademark of Nippon Valqua Industries, I tri

Aluminum High Vacuum Angle Valve XLC/XLCV Series

Operated/with Solenoid

The production of flange sizes 16, 25, 40, 50, 63, and 80 for the XLC(V) series has been discontinued. Please select the new XLC(V)-2 type. See here for details.

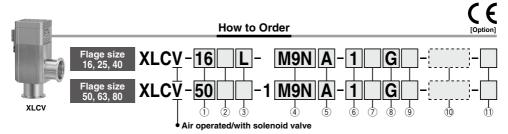

1 Flance size

· i iuiige oiz
Size
16
25
40
50
63
80

(2) Flange type

<u> </u>	.90 ., po	
Symbol	Type	Applicable flange
Nil	KF (NW)	16, 25, 40, 50, 63, 80
D	K (DN)	63, 80

③ Pilot port direction

Symbol	Solenoid valve direction
K	Left flange surface
L	Rear flange surface
М	Right flange surface
Nil	flange surface

- Rear flange surface surface surface Right flange flange Left
- * M type plug connector (AC power supply) not attached for M of sizes 16 and 25.
- M: Size 16, 25, 40 only. * Nil: Size 50, 63, 80 only

4 Auto switch type

Symbol	Auto switch model	Remarks
Nil	_	Without auto switch (without built-in magnet)
	D-M9N(M)(L)(Z)	
M9P(M)(L)(Z)	D-M9P(M)(L)(Z)	Solid state auto switch
M9B(M)(L)(Z)	D-M9B(M)(L)(Z)	
A90(L)	D-A90(L)	Reed auto switch (Not applicable
A93(M)(L)(Z)	D-A93(M)(L)(Z)	to flange size 16)
M9//	_	Without auto switch (with built-in magnet)

Standard lead wire length is 0.5 m. Add "L" to the end of the part number when 3 m is desired, "M" when 1 m, and "Z" when 5 m. Example) -M9NL

5 Number of auto switches/Mounting position

Symbol	Quantity	Mounting position
Nil	Without auto switch	1
Α	2 pcs.	Valve open/closed
В	1 pc.	Valve open
С	1 pc.	Valve closed

(6) Rated voltage

o nateu voitage		CE-compliant
1	100 VAC, 50/60 Hz	_
2	200 VAC, 50/60 Hz	_
3	110 VAC, 50/60 Hz	_
4	220 VAC, 50/60 Hz	_
5	24 VDC	0
6	12 VDC	

7 Type of actuation (8) Electrical entry

· ,	oc or aotaation	
Nil	2 position single	
W	2 position double	

G	Grommet (Lead wire length 300 mm)
Н	Grommet (Lead wire length 600 mm)
L	L type plug connector
М	M type plug connector

9 Light/Surge voltage suppressor

Nil	None						
S	With surge voltage suppressor						
Z	With light/surge voltage suppressor						
U	With light/surge voltage suppressor (Non-polar type)						

* S type: Not available for AC.

10 Body surface treatment/Seal material and its changed part

Body surface treatment

Symbol	Surface treatment						
Nil	External: Hard anodized Internal: Raw material						
Α	External: Hard anodized Internal: Oxalic acid anodized						

Seal material

Symbol	Seal material	Compound No.				
Nil	FKM	1349-80*				
N1	EPDM	FKM 1349-80* EPDM 2101-80* arrel Perfluoro® 70W Kalrez® 4079 SS592 SS630 Chemraz® SS630 SSE38 VMQ VMQ 1232-70* KM for Plasma 3310-75*				
P1	Barrel Perfluoro®	70W				
Q1	Kalrez [®]	4079				
R1		SS592				
R2	Chemraz [®]	SS630				
R3		SSE38				
S1	VMQ	1232-70*				
T1	FKM for Plasma	3310-75*				
U1	ULTIC ARMOR®	UA4640				

* Produced by Mitsubishi Cable Industries, Ltd.

U CL-compilant			
Nil	_		
Q	CE-compliant	ľ	
		и	

(1) CE-compliant | Barrel Perfluoro® is a registered trademark of Matsumura Oil Co., Ltd. Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates

> Chemraz® is a registered trademark of Greene, Tweed Technologies, Inc. ULTIC ARMOR® is a registered trademark of Nippon Valqua Industries,

ı	INII	None						
	S	With surge voltage suppressor						
I	Z	With light/surge voltage suppressor						
	U	With light/surge voltage suppressor (Non-polar type)						

* U type: DC only.

Seal material changed part and leakage

Symbol	Note 2) Changed	Leakage (Pa·m³/s or less) Note 1)					
Cymbol	part	Internal	External				
Nil	None	1.3 x 10 ⁻¹⁰ (FKM)	1.3 x 10 ⁻¹¹ (FKM)				
Α	2,3	1.3 x 10 ⁻⁸	1.3 x 10 ⁻⁹				
В	2	1.3 x 10 ⁻⁸	1.3 x 10 ⁻¹¹ (FKM)				
С	3	1.3 x 10 ⁻¹⁰ (FKM)	1.3 x 10 ⁻⁹				

Note 1) Values at normal temperature, excluding gas permeation. Note 2) Refer to parts number of "Construction" on page 422 for changed part. Number indicates parts number of "Construction" accordingly.

To order something other than "Nil" (standard), list the symbols

starting with "X," followed by each symbol for "body surface treatment," "seal material" and then "changed part".

Example) XLCV-16-M9NA-1G-XAN1A

Note 1) Option specifications/Combinations

This model has auto switch and K(DN) flange options, but high temperature/heater options are not available.

Note 2) Solenoid valves

2 position single; XLCV-16, 25, 40; SYJ3190 XLCV-50, 63, 80, 100, 160; SY3120 2 position double: XLCV-16, 25, 40: SYJ3290 XLCV-50, 63, 80, 100, 160: SY3220 Example) SYJ3190-1GS, SYJ3290-1GS, SY3120-1GS-C4, SY3220-1GS-C4 * For details, consult your SMC sales representative

* For option "Q", the solenoid valve should be a CE-compliant product.



XLA

XL□Q

XM□

XY□ D-□

XSA XVD

XGT

XLC/XLCV Series

Specifications


Model		XLC(V)-16	XLC(V)-25	XLC(V)-40	XLC(V)-50	XLC(V)-63	XLC(V)-80	XLC-100	XLC-160
Valve type		Double acting (Dual operation), Pressurize to open/close							
Fluid			Inert gas under vacuum						
Operating XLC		5 to 60 (High temperature type: 5 to 150)							
temperature (°C)	XLCV		5 to 50 —					_	
Operating pressure (Pa) (abs)				1	x 10 ⁻⁶ to atmo	spheric pressu	ıre		
Conductance (L/s) Note 1)		5	14	45	80	160	200	300	800
Leakage (Pa·m³/s)	Internal	In cas	In case of standard material FKM: 1.3 x 10 ⁻¹⁰ at normal temperature, excluding gas permeation						
Leakage (Pa·III /S)	External	In case of standard material FKM: 1.3 x 10 ⁻¹¹ at normal temperature, excluding gas permeation							
Flange type		KF(NW) KF (NW),			, K (DN)				
Principal materials		Body: Aluminum alloy, Bellows: Stainless steel 316L, Main part: Stainless steel, FKM (Standard seal material)						al material)	
Surface treatment		External: Hard anodized Internal: Raw material							
Pilot pressure (MPa) (G)		0.3 to 0.6 0.4 to 0.6			0.4 to 0.6				
Pilot port size	XLC	M5		Rc1/8				Rc1/4	
	XLCV	M5: Port 1(P), Po			Port 1(P), Port 3(R), Port 5(R)				_
Woight (kg)	XLC	0.28	0.46	1.1	1.4	2.3	4.0	8.7	14.5
Weight (kg)	XLCV	0.32	0.5	1.15 1.5 2.4 4.1			-	_	

Magnet (Option)


Note 1) Conductance is the value for an elbow with the same dimensions.

Note 2) For valve heater specifications, refer to "Common Option [1] Heater" on page 459.

Construction/Operation




With solenoid valve (XLCV16 to 40)





<Working principle>

By applying the pilot pressure from the pilot port P-1, the piston-coupled valve overcomes the operating force by pressure, and the valve opens. (Pilot port P-2 is open.) Conversely, by applying the pilot pressure to the pilot port P-2, the valve closes. (Pilot port P-1 is open.) For the XLCV, the pilot pressure is always applied to the port 1(P), and the valve opens when the solenoid valve is turned ON and closes when it is turned OFF. For the double solenoid, the valve moves to the opposite side from that in which the solenoid valve is turned ON.



Auto switch (Option)

<Options>


Auto switch: The magnet activates the auto switch. With 2 auto switches, the open and closed positions are detected, and with 1 auto switch, either the open or closed position is detected. Auto switches are applicable at

ordinary temperatures only (5 to 60°C).

Heater: Simple heating is performed using thermistors. The valve body can be heated to approximately 100 or 120°C, depending on the heater option and the valve size. The type and number of thermistors to be used will vary depending upon size and setting temperature. In the case of high temperature specifications, the bonnet assembly is a heat resistant structure. This does not apply in cases where a solenoid valve is attached.

Dimensions


XLC16, 25, 40/ Air operated



Model	_ ~		U		E	FII	G	- 11	J	
XLC-16	40	110	38	1	_	30	17	40	26	
XLC-25	50	121	48	1	12	40	26	39	28	
XLC-40	65	171	66	2	11	55	41	63	36	
Note 1) Dime	ension F	annliae w	han haat	er ontion	is include	d (Lead	wire lena	th: annro	v 1 m)	

Note 1) Dimension E applies when heater option is included. (Lead wire length: approx. 1 m Note 2) (a), (b) and (c) in the above drawing indicate heater mounting positions. Moreover, heater mounting positions will differ depending on the type of heater. For further details, refer to mounting positions under "Replacement Heaters" on page 465.

XLC50, 63, 80, 100, 160/ Air operated



											(111111)
Model	Α	В	С	D	E Note 1)	Fn	Fd	G	Н	J	K
XLC-50	70	183	80	31	10.5	75	_	52	77	29	10.5
XLC-63	88	209	100	39	11	87	95	70	76.5	36	9
XLC-80	90	250	117	45.5	11	114	110	83	105	44	9
XLC-100	108	317.5	154	55	11	134	130	102	139	58	9
XLC-160	138	339	200	65	11	190	180	153	124	62	12.5

Note 1) Dimension E applies when heater option is included. (Lead wire length: approx. 1 m)

Note 2) (a), (b) and (c) in the above drawing indicate heater mounting positions. Moreover, heater mounting
positions will differ depending on the type of heater. For further details, refer to mounting positions under
"Replacement Heaters" on page 465.




XLA

XLQ XMQ XYQ D-Q XSA XVD XGT

XLC/XLCV Series

Dimensions


XLCV/With solenoid valve

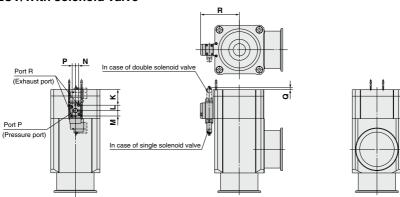

							(111111)
Model	K	L	M	N	P	Q	R
XLCV-16	14.3	9.2	6.4	3.5	2.7	17.3	36
XLCV-25	15.8	9.2	6.4	3.5	2.7	15.8	41
XLCV-40	29	9.2	6.4	3.5	2.7	2.6	51

^{*} Other dimensions are the same as the XLC.

Note) For details, consult your SMC sales representative.

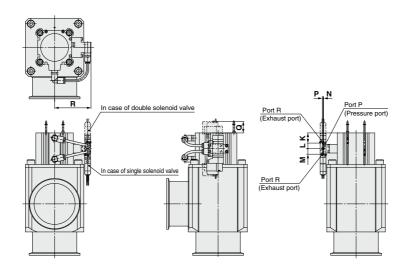

						(mm)			
Model	K	L	M	N	P	Q	R		
XLCV-50	12.5	9.5	9.5	1	1	23.5	52.6		
XLCV-63	17.4	9.5	9.5	1	1	18.6	62.3		
XLCV-80	23.5	9.5	9.5	1	1	12.4	70.8		

^{*} Other dimensions are the same as the XLC. Note) For details, consult your SMC sales representative.

Aluminum High Vacuum Angle Valve Normally Closed/O-ring Seal

The production of flange sizes 16, 25, 40, 50, 63, and 80 for the XLF(V) series has been discontinued. Please select the new XLF(V)-2 type. See here-production of flange sizes 16, 25, 40, 50, 63, and 80 for the XLF(V)-2 type. See here-production of flange sizes 16, 25, 40, 50, 63, and 80 for the XLF(V)-2 type. See here-production new-xlf (N) 2 type. See here-production new-xlf (N) 2 type. See here-production-new-xlf (N) 3 type (N) 3 type (N) 4 t




XLF/XLFV Series



How to Order



Made to Order specifications (For details, refer to pages 430 to 435)



XLF

1 Flange size


<u></u>
Size
16
25
40
50
63
80
100
160

2 Flange type

Symbol	Type	Applicable flange
Nil	KF (NW)	16, 25, 40, 50, 63 80, 100, 160
D	K (DN)	63, 80, 100, 160

③ Indicator/Pilot port direction

Symbol	Indicator	Pilot port direction		
Nil	Without indicator	Flange side		
Α		Flange side		
F	With	Left flange surface		
G	indicator	Rear flange surface		
J		Right flange surface		
K	Without	Left flange surface		
L	indicator	Rear flange surface		
M	indicator	Right flange surface		



(4) Temperature specifications/Heater

Symbol		Temperature	Heater	
Nil		5 to 60°C	_	
High	H0		_	
temperature	High H0 temperature H4	5 to 150°C	With 100°C heater	
type	H5	1 1	With 120°C heater	

Note) Size 16 is not applicable for H4, H5, Size 25 not for H4.

6 Number of auto switches/Mounting position

Symbol	Quantity	Mounting position	
Nil	Without auto switch	_	
Α	2 pcs.	Valve open/closed	
В	1 pc.	Valve open	
С	1 pc.	Valve closed	

5 Auto switch type

Symbol	Auto switch model	Remarks
Nil	_	Without auto switch (without built-in magnet)
M9N(M)(L)(Z)	D-M9N(M)(L)(Z)	
M9P(M)(L)(Z)	D-M9P(M)(L)(Z)	Solid state auto switch
M9B(M)(L)(Z)	D-M9B(M)(L)(Z)	
A90(L)	D-A90(L)	Reed auto switch (Not applicable
A93(M)(L)(Z)	D-A93(M)(L)(Z)	to flange size 16)
M9//	_	Without auto switch (with built-in magnet)

Note 1) Auto switches shown above cannot be mounted on the high temperature type. For the high temperature type, a semi-standard product that uses the heat resistant auto switch D-F7NJ* is available. For details, please contact SMC.

Note 2) Standard lead wire length is 0.5 m. Add "L" to the end of the part number when 3 m is desired, "M" when 1 m, and "Z" when 5 m. Example) -M9NL

Dody surface treatment/Seal material and its changed part

Body surface treatment

ï	Symbol	Surface treatment				
i	Nil	External: Hard anodized	Internal: Raw material			
i	Α	External: Hard anodized In	ternal: Oxalic acid anodized			
1	Seal materia	al				
ï	Symbol	Seal material	Compound No.			

Symbol	Seal material	Compound No.
Nil	FKM	1349-80*
N1	EPDM	2101-80*
P1	Barrel Perfluoro®	70W
Q1	Kalrez [®]	4079
R1		SS592
R2	Chemraz [®]	SS630
R3		SSE38
S1	VMQ	1232-70*
T1	FKM for Plasma	3310-75*
U1	ULTIC ARMOR®	UA4640

^{*} Produced by Mitsubishi Cable Industries, Ltd.

Seal material changed part and leakage

Symbol	Note 2) Changed	Leakage (Pa·m³/s or less) Note 1)		
Cyrribor	part	Internal	External	
Nil	None	1.3 x 10 ⁻¹⁰ (FKM)	1.3 x 10 ⁻¹⁰ (FKM)	
Α	2,3	1.3 x 10 ⁻⁸	1.3 x 10 ⁻⁸	
В	2	1.3 x 10 ⁻⁸	1.3 x 10 ⁻¹⁰ (FKM)	
С	3	1.3 x 10 ⁻¹⁰ (FKM)	1.3 x 10 ⁻⁸	

Note 1) Values at normal temperature, excluding gas permeation.

Note 2) Refer to parts number of "Construction" on page 428 for changed part. Number indicates parts number of "Construction" accordingly.

Note 3) Part ③ (exterior seal) is not changeable for sizes 16 and 25.

To order something other than "Nil" (standard), list the symbols starting with "X," followed by each symbol for "body surface | treatment," "seal material" and then "changed part".

Example) XLF-40-M9NA-XAN1A

Barrel Perfluoro® is a registered trademark of Matsumura Oil Co., Ltd. Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

Chemraz® is a registered trademark of Greene, Tweed Technologies, Inc. ULTIC ARMOR® is a registered trademark of Nippon Valqua Industries, Ind

Aluminum High Vacuum Angle Valve XLF/XLFV Series

Air Operated/with Solenoid Valve

The production of flange sizes 16, 25, 40, 50, 63, and 80 for the XLF(V) series has been discontinued. Please select the new XLF(V)-2 type. See here for details.





How to Order




② Flange type

1) Flange size	е
Size	
16	
25	
40	
50	
63	
80	
100	
160	

E i lalige type				
Symbol	Type	Applicable flange		
Nil	KF (NW)	16, 25, 40, 50, 63 80, 100, 160		
D	K (DN)	63, 80, 100, 160		

3 Indicator/Pilot port direction

Symbol	Indicator	Pilot port direction	
F	With	Left flange surface	
G	indicator	Rear flange surface	
J	iriulcator	Right flange surface	
K		Left flange surface	
L		Rear flange surface	
M		Right flange surface	





4 Auto switch type

Symbol	Auto switch model	Remarks	
Nil	_	Without auto switch (without built-in magnet)	
M9N(M)(L)(Z)	D-M9N(M)(L)(Z)		
M9P(M)(L)(Z)	D-M9P(M)(L)(Z)	Solid state auto switch	
M9B(M)(L)(Z)	D-M9B(M)(L)(Z)		
A90(L)	D-A90(L)	Reed auto switch (Not applicable	
A93(M)(L)(Z)	D-A93(M)(L)(Z)	to flange size 16)	
M9// — Without auto switch (with		Without auto switch (with built-in magnet)	

Standard lead wire length is 0.5 m. Add "L" to the end of the part number when 3 m is desired, "M" when 1 m, and "2" when 5 m. Example) -M9NL

Number of auto switches/Mounting position Symbol Quantity Mounting p

Symbol	Quantity	Mounting position
Nil	Without auto switch	
Α	2 pcs.	Valve open/closed
В	1 pc.	Valve open
C 1 pc.		Valve closed
C 1 pc.		vaive closed

(6) Rated voltage

· iia	UE-compliant	
1	100 VAC, 50/60 Hz	_
2	200 VAC, 50/60 Hz	_
3	110 VAC, 50/60 Hz	_
4	220 VAC, 50/60 Hz	_
5	24 VDC	0
6	12 VDC	0

(7) Electrical entry

G	Grommet (Lead wire length 300 mm)	
Н	Grommet (Lead wire length 600 mm)	
L	L type plug connector	
M M type plug connector		

8 Light/Surge voltage suppressor 10 CE-compliant

Nil	None	
S With surge voltage suppressor		
Z With light/surge voltage suppres		
U	With light/surge voltage suppressor (Non-polar type)	

Nil — Q CE-compliant

XLA

XL\(\Bar{Q}\)

XM

XY□ D-□ XSA XVD

XGT

CYV

- * S type: Not available for AC.
- * U type: DC only.

Body surface treatment/Seal material and its changed part

Symbol Surface treatment Symbol Surface treatment

ŀ	Symbol	Surface treatment		
i	Nil	External: Hard anodized Internal: Raw material		
i	Α	External: Hard anodized Internal: Oxalic acid anodized		
ı	• Saal material			

• Seal materia

Symbol	Seal material	Compound No
Nil	FKM	1349-80*
N1	EPDM	2101-80*
P1	Barrel Perfluoro®	70W
Q1	Kalrez [®]	4079
R1		SS592
R2	Chemraz [®]	SS630
R3		SSE38
S1	VMQ	1232-70*
T1	FKM for Plasma	3310-75*
U1	ULTIC ARMOR®	UA4640

^{*} Produced by Mitsubishi Cable Industries, Ltd.

Barrel Perfluoro® is a registered trademark of Matsumura Oil Co., Ltd. Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

Chemraz[®] is a registered trademark of Greene, Tweed Technologies, Inc. ULTIC ARMOR[®] is a registered trademark of Nippon Valqua Industries, Ltd.

Seal material changed part and leakage

Symbol	Note 2) Changed	Leakage (Pa·m³/s or less) Note 1)		
Cyllibol	part	Internal	External	
Nil	None	1.3 x 10 ⁻¹⁰ (FKM)	1.3 x 10 ⁻¹⁰ (FKM)	
Α	2,3	1.3 x 10 ⁻⁸	1.3 x 10 ⁻⁸	
В	2	1.3 x 10 ⁻⁸	1.3 x 10 ⁻¹⁰ (FKM)	
С	3	1.3 x 10 ⁻¹⁰ (FKM)	1.3 x 10 ⁻⁸	

Note 1) Values at normal temperature, excluding gas permeation.

Note 2) Refer to parts number of "Construction" on page 428 for changed part. Number indicates parts number of "Construction" accordingly.

Note 3) Part ③ (exterior seal) is not changeable for sizes 16 and 25.

To order something other than "Nil" (standard), list the symbols starting with "X," followed by each symbol for "body surface treatment," "seal material" and then "changed part".

Example) XLFV-40-M9NA-1G-XAN1A

Note 1) Option specifications/Combinations

This model has indicator, auto switch and K(DN) flange options, but high temperature/heater options are not available.

Note 2) Solenoid valves

XLFV-16, 25, 40: SYJ319, XLFV-50, 63, 80, 100, 160: SYJ519 Example) SYJ319-1GS.

* For details, consult your SMC sales representative.

* For option "Q", the solenoid valve should be a CE-compliant product.

XLF/XLFV Series

Specifications


Model		XLF(V)-16	XLF(V)-25	XLF(V)-40	XLF(V)-50	XLF(V)-63	XLF(V)-80	XLF(V)-100	XLF(V)-160
Valve type		Normally closed (Pressurize to open, Spring seal)							
Fluid					Inert gas un	der vacuum			
Operating	XLF			5 to 60	(High temper	rature type: 5	to 150)		
temperature (°C)	XLFV				5 to	50			
Operating pressure (F			1 >	10 ⁻⁵ to atmos	spheric pressi	ure			
Conductance (L/s) Not	e 1)	5	14	45	80	160	200	300	800
Leakage (Pa·m³/s)	Internal	In case of standard material FKM: 1.3 x 10 ⁻¹⁰ at normal temperature, excluding gas permeation							
Leakage (Fa•III /s)	External	In case	In case of standard material FKM: 1.3 x 10 ⁻¹⁰ at normal temperature, excluding gas permeation				neation		
Flange type		KF (NW), K (DN)							
Principal materials No	te 3)		Body: Alumi	num alloy, Ma	in part: Stainl	ess steel, FKI	M (Standard s	eal material)	
Surface treatment				External: H	lard anodized	Internal: Ra	aw material		
Pilot pressure (MPa) ((G)				0.4 t	o 0.7			
Pilot port size	XLF	M	15			Rc1/8 Rc1/4			Rc1/4
Filot port size	XLFV	M5: F	Port 1(P), Port	t 3(R)		Rc1/8: Port 1(P), M5: Port 3(R)			
Weight (kg)	XLF	0.25	0.45	1.1	1.6	3.0	4.8	10	18
weight (kg)	XLFV	0.29	0.49	1.14	1.66	3.06	4.86	10.1	18.1

Note 1) Conductance is the value for an elbow with the same dimensions.

Note 2) For valve heater specifications, refer to "Common Option [1] Heater" on page 459.

Note 3) A coating of vacuum grease [Y-VAC2] is applied to the seal-material sliding portion of the vacuum part.

Construction/Operation

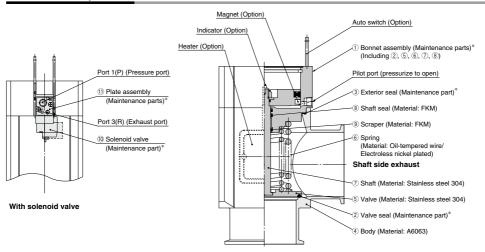

Valve side exhaust * Refer to the back

* Refer to the back of page 465 for "Maintenance Parts".

<Working principle>

By applying the pilot pressure from the pilot port, the piston-coupled valve overcomes the spring force or operating force by pressure, and the valve opens. For the XLFV, the pilot pressure is always applied to the port 1(P), and the valve opens when the solenoid valve is turned OFF.

<Options>

Auto switch: The magnet activates the auto switch. With 2 auto switches, the open and closed positions are detected, and with 1 auto switch, either the open or closed position is detected. Auto switches are applicable at ordinary temperatures only (5 to 60°C).

Heater: Simple heating is performed using thermistors. The valve body can be heated to approximately 100 or 120°C, depending on the heater option and the valve size. The type and number of thermistors to be used will vary depending upon size and setting temperature. In the case of high temperature specifications, the bonnet assembly is a heat resistant structure. This does not apply in cases where a solenoid valve is


Indicator: When the valve is open, an orange marker appears in the center of the name plate.



Aluminum Aluminum Angle Valve XLF/XLFV Series

Dimensions

XLF/Air operated



									(mm)
Model	Α	В	С	D	E Note 1)	Fn	Fd	G	Н
XLF-16	40	103	38	1	_	30	_	17	40
XLF-25	50	113	48	1	12	40	_	26	39
XLF-40	65	158	66	2	11	55	_	41	63
XLF-50	70	170	79	2	11	75	_	52	68
XLF-63	88	196	100	3	11	87	95	70	69
XLF-80	90	235	117	3	11	114	110	83	96
XLF-100	108	299	154	3	11	134	130	102	131
XLF-160	138	315	200	3	11	190	180	153	112


Note 1) Dimension E applies when heater option is included. (Lead wire length: approx. 1 m)

Note 2) (a), (b) and (c) in the above drawing indicate heater mounting positions.


Moreover, heater mounting positions will differ depending on the type of heater.

For further details, refer to mounting positions under "Replacement Heaters" on page 465.

XLFV/With solenoid valve



- -	1
	•



					(111111)
Model	J	K	L	M	N
XLFV-16	35.5	12.3	10.2	3.6	3.6
XLFV-25	40.5	13.8	10.2	3.6	3.6
XLFV-40	50.5	21.6	10.2	3.6	3.6
XLFV-50	67	21.7	12	4	2

^{*} Other dimensions are the same as the XLF. Note) For details, consult your SMC sales representative.

					(mm)
Model	J	K	L	M	N
XLFV-63	78.5	28.7	12	4	2
XLFV-80	87	38.7	12	4	2
XLFV-100	105.5	49.7	12	4	2
XLFV-160	128.5	58	12	4	2

* Other dimensions are the same as the XLF.

Note) For details, consult your SMC sales representative.



XLA

 $XL\square$ XL□Q XM□ XY□

D-□

XSA XVD XGT

CYV


Aluminum High Vacuum Angle Valve/Normally Closed/O-ring Seal


XLF Series

Made to Order Specifications 1



With Bypass Valve (Flange size: 80)

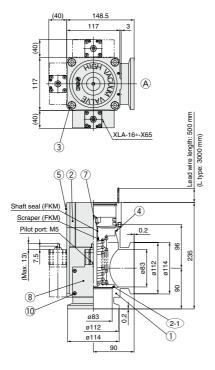



Symbol



Component Parts

00	ponent i arte		
No.	Description	Material	Remarks
1	Body	A6063	
2	Bonnet assembly		Refer to part no.
2-1	O-ring		Refer to part no.
3	Hexagon socket head cap screw	Stainless steel	M10, L = 60
4	O-ring		Refer to part no.
5	Computer name plate		
6	Auto switch		Option
7	Indicator		Option
8	Bypass valve		Refer to part no.
8-1	O-ring		Refer to part no.
8-2	O-ring		Refer to part no.
9	O-ring		Refer to part no.
10	Hexagon socket head cap screw	Stainless steel	M4, L = 40

O-ring Part No.


Internal seal 2-1	External seal 4
B2401-V85V	AS568-045V
B2401-V85-XN1	AS568-045-XN1
B2401-V85-XP1	AS568-045-XP1
B2401-V85-XQ1	AS568-045-XQ1
B2401-V85-XR1	AS568-045-XR1
B2401-V85-XR2	AS568-045-XR2
B2401-V85-XR3	AS568-045-XR3
B2401-V85-XS1	AS568-045-XS1
B2401-V85-XT1	AS568-045-XT1
B2401-V85-XU1	AS568-045-XU1
	B2401-V85V B2401-V85-XN1 B2401-V85-XP1 B2401-V85-XC1 B2401-V85-XR1 B2401-V85-XR2 B2401-V85-XR2 B2401-V85-XR3 B2401-V85-XR3

O-ring Part No.

Seal material symbol	Internal seal 8-1	External seal 8-2	External seal 9
Nil	B2401-V15V	AS568-025V	AS568-017V
N1	B2401-V15-XN1	AS568-025-XN1	AS568-017-XN1
P1	B2401-V15-XP1	AS568-025-XP1	AS568-017-XP1
Q1	B2401-V15-XQ1	AS568-025-XQ1	AS568-017-XQ1
R1	B2401-V15-XR1	AS568-025-XR1	AS568-017-XR1
R2	B2401-V15-XR2	AS568-025-XR2	AS568-017-XR2
R3	B2401-V15-XR3	AS568-025-XR3	AS568-017-XR3
S1	B2401-V15-XS1	AS568-025-XS1	AS568-017-XS1
T1	B2401-V15-XT1	AS568-025-XT1	AS568-017-XT1
U1	B2401-V15-XU1	AS568-025-XU1	AS568-017-XU1

Note) A coating of vacuum grease (fluorinated grease: Y-VAC2) is applied to the shaft seal, scraper and O-ring 9.

How to Order Valve

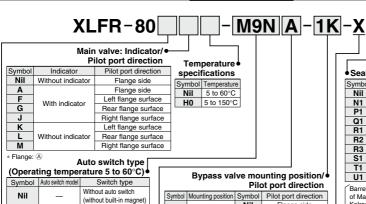

Solid state

auto switch

Reed auto switch

Bypass valve mounting position/ Pilot port direction

Cyllibol	INIOUTILITY POSITION	Cyllibol	i not port un conorr			
1		Nil	Flange side			
	Left flange surface	K	Left flange surface			
	Suriace	L	Rear flange surface			
	District floor	Nil	Flange side			
2	Right flange surface	L	Rear flange surface			
		M	Right flange surface			
	D #	K	Left flange surface			
3	Rear flange surface	L	Rear flange surface			
	Surface	M	Right flange surface			
* Flange: A						

Saal matarial

Jean material						
Symbol	Seal material	Compound No.				
Nil	FKM	1349-80				
N1	N1 EPDM					
P1 Barrel Perfluoro®		70W				
Q1	Kalrez®	4079				
R1		SS592				
R2	Chemraz [®]	SS630				
R3		SSE38				
S1	VMQ	1232-70				
T1	FKM FOR PLASMA	3310-75				
U1 ULTIC ARMOR®		UA4640				
(D D (I 0)						

Barrel Perfluoro® is a registered trademark of Matsumura Oil Co., Ltd. Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its

affiliates.
Chemraz® is a registered trademark of Greene, Tweed Technologies, Inc. ULTIC ARMOR® is a registered trademark of Nippon Valqua Industries, Ltd.

When the seal material is not being changed, there is no need to select a symbol.

Flange type

M9N(M)(L)(Z) D-M9N(M)(L)(Z)

M9P(M)(L)(Z) D-M9P(M)(L)(Z)

M9B(M)(L)(Z) D-M9B(M)(L)(Z)

A90(L) D-A90(L)

A93(M)(L)(Z) D-A93(M)(L)(Z) Heed auto switch

M9// Without auto switch (with built-in magnet)

Note) Types with auto switches are not available

in case of high temperature types. L type: Lead wire length 3000 mm

Symbol Type Nil KF(NW) D K(DN)

Number of auto switches/Mounting position

Symbol	Quantity	Mounting position
Nil	Without auto switch	_
Α	2 pcs.	Valve open/closed
В	1 pc.	Valve open
С	1 pc.	Valve closed

Seal material changed part

6	ymbol	Changed part	Leakage (Pa·m ³ /s or less) Note)				
3	ymboi	Changeu part	Internal	External			
	Nil None		1.3 x 10 ⁻⁹ (FKM)	1.3 x 10 ⁻⁹ (FKM)			
	Α	2-1 8-1 4 8-2 9	1.3 x 10 ⁻⁷	1.3 x 10 ⁻⁷			
	В	2-1 8-1	1.3 x 10 ⁻⁷	1.3 x 10 ⁻⁹ (FKM)			
	ဂ	4 8-2 9	1.3 x 10 ⁻⁹ (FKM)	1.3 x 10 ⁻⁷			

Note) Values at normal temperature, excluding gas permeation.

Maintenance Parts

2 Bonnet Assembly Part No.

 $20.1 \square - MONA - YN11$

ווו -טכ	INIZINE	4-VIA I

Symbol

Nil

• Donnet assembly		
Indicator	Part no.	
Without indicator	XLF80-30-1	
With indicator	XLF80A-30-1	
Without indicator	XLF80-30-1H	
With indicator	XLF80A-30-1H	
	Indicator Without indicator With indicator Without indicator	

Same as How to Order

8 Bypass Valve Part No. **XLA-16**

Pilot port direction Pilot port direction Rear (as seen from body connection point) Left (as seen from body connection point) Right (as seen from body connection point)

Temperatu

iture specifications		
	Symbol	Temperature
	Nil	5 to 60°C
	H0	5 to 150°C

Seal material changed part

X65

•	onangea part	
Symbol	Changed par	
Nil	None	
Α	8-1 8-2	
В	8-1	
С	8-2	

Seal material: Same as the seal materials of How to **Order Valve**

Specifications		
Valve type	Main valve: Normally closed	Bypass valve: Normally closed
Shaft seal type	O-ring seal	Bellows seal
Operating pressure range	Atmospheric pressure to 1 x 10 ⁻⁵ Pa	
Fluid	Inert gas under vacuum	
Operating temperature	5 to 60°C (Option: 5 to 150°C)	
Conductance	200 L/s	Max. 25 L/s (Calculated value)
Operating pressure	0.4 to 0.7 MPa	
Flange	KF80	

SMC

XLA

XL\(\pi 0

XM□

 $XY\square$

D-□

XSA

XVD

XGT

CYV


Aluminum High Vacuum Angle Valve/Normally Closed/O-ring Seal


XLF Series

Made to Order Specifications 2



With Bypass Valve (Flange size: 100)

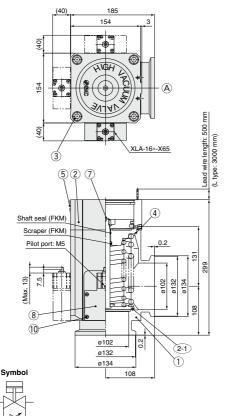



O-ring Part No


O-ring Part No.		
Seal material symbol	Internal seal 2-1	External seal 4
Nil	AS568-349V	AS568-050V
N1	AS568-349-XN1	AS568-050-XN1
P1	AS568-349-XP1	AS568-050-XP1
Q1	AS568-349-XQ1	AS568-050-XQ1
R1	AS568-349-XR1	AS568-050-XR1
R2	AS568-349-XR2	AS568-050-XR2
R3	AS568-349-XR3	AS568-050-XR3
S1	AS568-349-XS1	AS568-050-XS1
T1	AS568-349-XT1	AS568-050-XT1
U1	AS568-349-XU1	AS568-050-XU1


Component Parts			
No.	Description	Material	Remarks
1	Body	A6063	
2	Bonnet assembly		Refer to part no.
2-1	O-ring		Refer to part no.
3	Hexagon socket head cap screw	Stainless steel	M12, L = 70
4	O-ring		Refer to part no.
5	Computer name plate		
6	Auto switch		Option
7	Indicator		Option
8	Bypass valve		Refer to part no.
8-1	O-ring		Refer to part no.
8-2	O-ring		Refer to part no.
9	O-ring		Refer to part no.
10	Hexagon socket head cap screw	Stainless steel	M4, L = 40

O-ring Part No.

•g . a			
Seal material symbol	Internal seal 8-1	External seal 8-2	External seal 9
Nil	B2401-V15V	AS568-025V	AS568-017V
N1	B2401-V15-XN1	AS568-025-XN1	AS568-017-XN1
P1	B2401-V15-XP1	AS568-025-XP1	AS568-017-XP1
Q1	B2401-V15-XQ1	AS568-025-XQ1	AS568-017-XQ1
R1	B2401-V15-XR1	AS568-025-XR1	AS568-017-XR1
R2	B2401-V15-XR2	AS568-025-XR2	AS568-017-XR2
R3	B2401-V15-XR3	AS568-025-XR3	AS568-017-XR3
S1	B2401-V15-XS1	AS568-025-XS1	AS568-017-XS1
T1	B2401-V15-XT1	AS568-025-XT1	AS568-017-XT1
U1	B2401-V15-XU1	AS568-025-XU1	AS568-017-XU1

Note) A coating of vacuum grease (fluorinated grease: Y-VAC2) is applied to the shaft seal, scraper and O-ring 9.



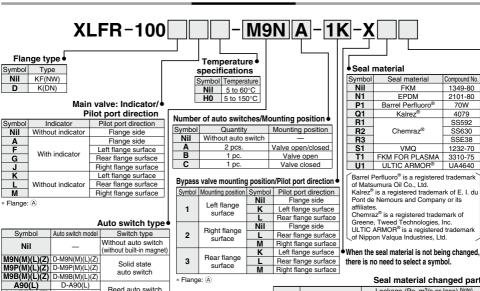

A93(M)(L)(Z) D-A93(M)(L)(Z)
M9// Without auto swit Without auto switch (with built-in magnet) Note 1) Standard lead wire length is 0.5 m. Add "L" to the end of the part number when 3 m is desired, "M"

when 1 m. and "Z" when 5 m. Note 2) Types with auto switches are not available in case of high temperature types.

Seal material changed part

Symbol	Changed part	Leakage (Pa·m ³ /s or less) Note)		
Symbol		Internal	External	
Nil	None	1.3 x 10 ⁻⁹ (FKM)	1.3 x 10 ⁻⁹ (FKM)	
Α	2-1 8-1 4 8-2 9	1.3 x 10 ⁻⁷	1.3 x 10 ⁻⁷	
В	2-1 8-1	1.3 x 10 ⁻⁷	1.3 x 10 ⁻⁹ (FKM)	
С	4 8-2 9	1.3 x 10 ⁻⁹ (FKM)	1.3 x 10 ⁻⁷	
N. I. W. I.				

Note) Values at normal temperature, excluding gas permeation.

Maintenance Parts



8 Bypass Valve Part No. VI A _ 16 [

ALA IU		JL
Pilot port direction		
Pilot port direction		
seen from body connection point)		
seen from body connection point)		
seen from body connection point)		

Bonnet assembly			
Temperature	Indicator	Part no.	
5 to 60°C	Without indicator	XLF100-30-1	
	With indicator	XLF100A-30-1	
5 to 150°C	Without indicator	XLF100-30-1H	
5 to 150 C	With indicator	XLF100A-30-1H	

Same as How to Order

Symbol

Rear (as

Left (as

Right (as Temperature specifications

Symbol	Temperature
Nil	5 to 60°C
H0	5 to 150°C

Seal material changed part

XLA

XL

XL\(\pi\)

XM□

XY□

D-□

XSA

XVD

XGT

CYV

Symbol	Changed par
Nil	None
Α	8-1 8-2
В	8-1
С	8-2

Seal material: Same as the seal materials of How to Order Valve

Specifications

Valve type	Main valve: Normally closed	Bypass valve: Normally closed
Shaft seal type	O-ring seal	Bellows seal
Operating pressure range	Atmospheric pressure to 1 x 10-5 Pa	
Fluid	Inert gas under vacuum	
Operating temperature	5 to 60°C (Option: 5 to 150°C)	
Conductance	300 L/s	Max. 31.5 L/s (Calculated value)
Operating pressure	0.4 to 0.7 MPa	
Flange	KF100	


Aluminum High Vacuum Angle Valve/Normally Closed/O-ring Seal


XLF Series

Made to Order Specifications 3



With Bypass Valve (Flange size: 160)

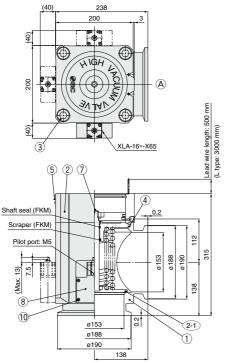



Symbol



O-ring Part No.

Seal material symbol	Internal seal (2-1)	External seal 4
Nil	B2401-G155V	AS568-167V
N1	B2401-G155-XN1	AS568-167-XN1
P1	B2401-G155-XP1	AS568-167-XP1
Q1	B2401-G155-XQ1	AS568-167-XQ1
R1	B2401-G155-XR1	AS568-167-XR1
R2	B2401-G155-XR2	AS568-167-XR2
R3	B2401-G155-XR3	AS568-167-XR3
S1	B2401-G155-XS1	AS568-167-XS1
T1	B2401-G155-XT1	AS568-167-XT1
U1	B2401-G155-XU1	AS568-167-XU1
		•


Component Parts				
No.	Description	Material	Remarks	
1	Body	A6063		
2	Bonnet assembly		Refer to part no.	
2-1	O-ring		Refer to part no.	
3	Hexagon socket head cap screw	Stainless steel	M20, L = 70	
4	O-ring		Refer to part no.	
5	Computer name plate			
6	Auto switch		Option	
7	Indicator		Option	
8	Bypass valve		Refer to part no.	
8-1	O-ring		Refer to part no.	
8-2	O-ring		Refer to part no.	
9	O-ring		Refer to part no.	
10	Hexagon socket head cap screw	Stainless steel	M4, L = 40	

O-ring Part No.

•g . u			
Seal material symbol	Internal seal 8-1	External seal 8-2	External seal 9
Nil	B2401-V15V	AS568-025V	AS568-017V
N1	B2401-V15-XN1	AS568-025-XN1	AS568-017-XN1
P1	B2401-V15-XP1	AS568-025-XP1	AS568-017-XP1
Q1	B2401-V15-XQ1	AS568-025-XQ1	AS568-017-XQ1
R1	B2401-V15-XR1	AS568-025-XR1	AS568-017-XR1
R2	B2401-V15-XR2	AS568-025-XR2	AS568-017-XR2
R3	B2401-V15-XR3	AS568-025-XR3	AS568-017-XR3
S1	B2401-V15-XS1	AS568-025-XS1	AS568-017-XS1
T1	B2401-V15-XT1	AS568-025-XT1	AS568-017-XT1
U1	B2401-V15-XU1	AS568-025-XU1	AS568-017-XU1

Note) A coating of vacuum grease (fluorinated grease: Y-VAC2) is applied to the shaft seal, scraper and O-ring 9.



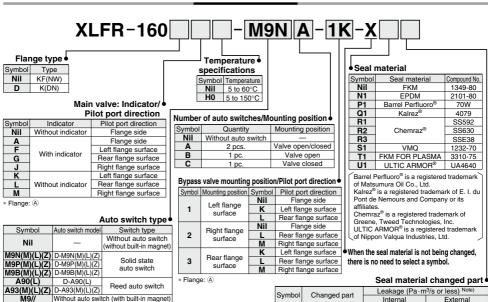

Note 1) Standard lead wire length is 0.5 m. Add "L" to the end of the part number when 3 m is desired, "M" when 1 m, and "Z" when 5 m.


Note 2) Types with auto switches are not available in case of high temperature types

materials of How to Order Valve

Symbol	Changed part	Leakage (Pa·m ³ /s or less) Note)		
Symbol		Internal	External	
Nil	None	1.3 x 10 ⁻⁹ (FKM)	1.3 x 10 ⁻⁹ (FKM)	
Α	2-1 8-1 4 8-2 9	1.3 x 10 ⁻⁷	1.3 x 10 ⁻⁷	
В	2-1 8-1	1.3 x 10 ⁻⁷	1.3 x 10 ⁻⁹ (FKM)	
С	4 8-2 9	1.3 x 10 ⁻⁹ (FKM)	1.3 x 10 ⁻⁷	

Note) Values at normal temperature, excluding gas permeation.

Maintenance Parts

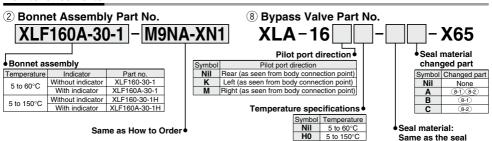

Specifications

Valve type	Main valve: Normally closed	Bypass valve: Normally closed
Shaft seal type	O-ring seal	Bellows seal
Operating pressure range	Atmospheric pressure to 1 x 10-5 Pa	
Fluid	Inert gas under vacuum	
Operating temperature	5 to 60°C (Option: 5 to 150°C)	
Conductance	800 L/s	Max. 31.5 L/s (Calculated value)
Operating pressure	0.4 to 0.7 MPa	
Flange	KF160	

ØSMC

435 ®

XLA

 $XL \square$

XL\(\pi\)

XM□

XY□

D-□

XSA

XVD

XGT

CYV

Aluminum High Vacuum Angle Valve Double Acting/O-ring Seal

The production of flange sizes 16, 25, 40, 50, 63, and 80 for the XLG(V) series has been discontinued. Please select the new XLG(V)-2 type. See <a href="https://example.com/here/be/h



XLG/XLGV Series




How to Order



Made to Order specifications (For details, refer to pages 442 to 447)

Flange size 16, 25, 40

Flange size 50, 63, 80, 100, 160



M9N A -


1 Flange size

2 Flange type

Symbol	Type	Applicable flange
Nil	KF (NW)	16, 25, 40, 50 63, 80, 100, 160
D	K (DN)	63, 80, 100, 160

3 Pilot port direction

Symbol	Pilot port direction
Nil	Flange side
K	Left flange surface
L	Rear flange surface
М	Right flange surface



(4) Temperature specifications/Heater

9 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 -			
Symbol		Temperature	Heater
Nil		5 to 60°C	_
High	H0		_
temperature	H4	5 to 150°C	With 100°C heater
type	H5		With 120°C heater

Note) Size 16 is not applicable for H4, H5, Size 25 not for H4.

6 Number of auto switches/Mounting position

Symbol	Quantity	Mounting position
Nil	Without auto switch	_
Α	2 pcs.	Valve open/closed
В	1 pc.	Valve open
С	1 pc.	Valve closed

5 Auto switch type

Symbol	Auto switch model	Remarks
Nil	_	Without auto switch (without built-in magnet)
M9N(M)(L)(Z)	D-M9N(M)(L)(Z)	
M9P(M)(L)(Z)	D-M9P(M)(L)(Z)	Solid state auto switch
M9B(M)(L)(Z)	D-M9B(M)(L)(Z)	
A90(L)	D-A90(L)	Reed auto switch (Not applicable
A93(M)(L)(Z)	D-A93(M)(L)(Z)	to flange size 16)
M9//	_	Without auto switch (with built-in magnet)

Note 1) Auto switches shown above cannot be mounted on the high temperature type. For the high temperature type, a semi-standard product that uses the heat resistant auto switch D-F7NJ* is available. For details, please contact SMC.

Note 2) Standard lead wire length is 0.5 m. Add "L" to the end of the part number when 3 m is desired, "M" when 1 m, and "Z" when 5 m. Example)-M9NL

7 Body surface treatment/Seal material and its changed part

Body surface treatment

١.		
H	Symbol	Surface treatment
i	Nil	External: Hard anodized Internal: Raw material
i	Α	External: Hard anodized Internal: Oxalic acid anodized
ı		

Seal material

Symbol	Seal material	Compound No.
Nil	FKM	1349-80*
N1	EPDM	2101-80*
P1	Barrel Perfluoro®	70W
Q1	Kalrez [®]	4079
R1		SS592
R2	Chemraz [®]	SS630
R3		SSE38
S1	VMQ	1232-70*
T1	FKM for Plasma	3310-75*
U1	ULTIC ARMOR®	UA4640
D 1 1 11 14	audiahi Cabla Isaluskias 1 kd	

* Produced by Mitsubishi Cable Industries, Ltd.

Seal material changed part and leakage

Symbol	Note 2) Changed	Leakage (Pa·m	3/s or less) Note 1)
Cyllibol	part	Internal	External
Nil	None	1.3 x 10 ⁻¹⁰ (FKM)	1.3 x 10 ⁻¹⁰ (FKM)
Α	2,3	1.3 x 10 ⁻⁸	1.3 x 10 ⁻⁸
В	2	1.3 x 10 ⁻⁸	1.3 x 10 ⁻¹⁰ (FKM)
С	3	1.3 x 10 ⁻¹⁰ (FKM)	1.3 x 10 ⁻⁸

Note 1) Values at normal temperature, excluding gas permeation.

Note 2) Refer to parts number of "Construction" on page 438 for changed part. Number indicates parts number of "Construction" accordingly. Note 3) Part ③ (exterior seal) is not changeable for sizes 16 and 25.

To order something other than "Nil" (standard), list the symbols starting with "X," followed by each symbol for "body surface treatment," "seal material" and then "changed part".

Example) XLG-40-M9NA-XAN1A


Barrel Perfluoro® is a registered trademark of Matsumura Oil Co., Ltd. Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

Chemraz® is a registered trademark of Greene, Tweed Technologies, Inc. ULTIC ARMOR® is a registered trademark of Nippon Valqua Industries, Ltd.

Aluminum High Vacuum Angle Valve XLG/XLGV Series

Air Operated/with Solenoid Valve

The production of flange sizes 16, 25, 40, 50, 63, and 80 for the XLG(V) series has been discontinued. Please select the new XLG(V)-2 type. See here for details.

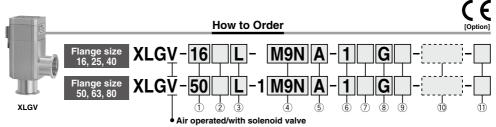

1) Flange size

<u></u>
Size
16
25
40
50
63
80

2 Flange type

Symbol	Type	Applicable flange
Nil	KF (NW)	16, 25, 40, 50, 63, 80
D	K (DN)	63, 80

3 Pilot port direction

Symbol	Solenoid valve direction
K	Left flange surface
L	Rear flange surface
M	Right flange surface
Nil	Flange surface

- * M type plug connector (AC power supply) not attached for M of sizes 16 and 25.
- * M: Size 16, 25, 40 only.
- * Nil: Size 50, 63, 80 only

Symbol

Nil

Α

R

C



Mounting position

Valve open/closed

Valve open

Valve closed

4 Auto switch type

Symbol	Auto switch model	Remarks
Nil	_	Without auto switch (without built-in magnet)
M9N(M)(L)(Z)	D-M9N(M)(L)(Z)	-
M9P(M)(L)(Z)	D-M9P(M)(L)(Z)	Solid state auto switch
M9B(M)(L)(Z)	D-M9B(M)(L)(Z)	
A90(L)	D-A90(L)	Reed auto switch (Not applicable
A93(M)(L)(Z)	D-A93(M)(L)(Z)	to flange size 16)
M9//	_	Without auto switch (with built-in magnet)
Standard lead wire	e length is 0.5 m. Δα	ld "I " to the end of the part number when

3 m is desired, "M" when 1 m, and "Z" when 5 m. Example) -M9NL

Nil 2 position single 2 position double

7 Type of actuation 8 Electrical entry

	· ourrour orrur y
G	Grommet (Lead wire length 300 mm)
Н	Grommet (Lead wire length 600 mm)
L	L type plug connector
M	M type plug connector

9 Light/Surge voltage suppressor

Nil	None
S	With surge voltage suppressor
Z	With light/surge voltage suppressor
U	With light/surge voltage suppressor (Non-polar type)

- * U type: DC only.

10 Body surface treatment/Seal material and its changed part

CE-complian

Body surface treatment

100 VAC, 50/60 Hz

200 VAC, 50/60 Hz

110 VAC, 50/60 Hz

220 VAC, 50/60 Hz

24 VDC 12 VDC

Symbol	Surface treatment
Nil	External: Hard anodized Internal: Raw material
Α	External: Hard anodized Internal: Oxalic acid anodized
Seal materia	

6 Rated voltage

2

3

4

5

Symbol	Seal material	Compound No.
Nil	FKM	1349-80*
N1	EPDM	2101-80*
P1	Barrel Perfluoro [®]	70W
Q1	Kalrez [®]	4079
R1		SS592
R2	Chemraz [®]	SS630
R3		SSE38
S1	VMQ	1232-70*
T1	FKM for Plasma	3310-75*
U1	ULTIC ARMOR®	UA4640

| * Produced by Mitsubishi Cable Industries, Ltd.

11 CE-compliant Nil Q CE-compliant

Barrel Perfluoro® is a registered trademark of Matsumura Oil Co., Ltd. Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates

Chemraz® is a registered trademark of Greene, Tweed Technologies, Inc. ULTIC ARMOR® is a registered trademark of Nippon Valqua Industries,

* S type: Not available for AC.

(5) Number of auto switches/Mounting position

Quantity

Without auto switch 2 pcs.

1 pc

1 pc.

- Seai i	materiai cii	angeu part and leak	aye
Symbol C	Note 2) Changed	Leakage (Pa·m	3/s or less) Note 1)
Cymbol	part	Internal	External
Nil	None	1.3 x 10 ⁻¹⁰ (FKM)	1.3 x 10 ⁻¹⁰ (FKM)
Α	2,3	1.3 x 10 ⁻⁸	1.3 x 10 ⁻⁸
В	2	1.3 x 10 ⁻⁸	1.3 x 10 ⁻¹⁰ (FKM)
С	3	1.3 x 10 ⁻¹⁰ (FKM)	1.3 x 10 ⁻⁸

Note 1) Values at normal temperature, excluding gas permeation.

Seal material changed part and leakage

Note 2) Refer to parts number of "Construction" on page 438 for changed part. Number indicates parts number of "Construction" accordingly. Note 3) Part 3 (exterior seal) is not changeable for sizes 16 and 25.

To order something other than "Nil" (standard), list the symbols starting with "X," followed by each symbol for "body surface treatment," "seal material" and then "changed part".

Example) XLGV-40-M9NA-1G-XAN1A

Note 1) Option specifications/Combinations

This model has auto switch and K(DN) flange options, but high temperature/heater options are not available.

Note 2) Solenoid valves

- 2 position single: XLGV-16, 25, 40: SYJ3190 XLGV-50, 63, 80: SY3120 2 position double: XLGV-16, 25, 40: SYJ3290 XLGV-50, 63, 80: SY3220 Example) SYJ3190-1GS, SYJ3290-1GS, SY3120-1GS-C4, SY3220-1GS-C4
- * For details, consult your SMC sales representative.
- * For option "Q", the solenoid valve should be a CE-compliant product.



XLA

XL\(\Bar{Q}\) XM□ XY□ D-□ XSA

XVD

XGT

CYV

XLG/XLGV Series

Specifications


Model		XLG(V)-16	XLG(V)-25	XLG(V)-40	XLG-50	XLG-63	XLG-80	XLG-100	XLG-160
Valve type				Double acting	(Dual operation	n), Pressurize	to open/close	9	
Fluid					Inert gas un	der vacuum			
Operating	XLG			5 to 60) (High temper	rature type: 5 t	to 150)		
temperature (°C)	XLGV		5 to 50				_		
Operating pressure	Pa) (abs)			At	mospheric pre	ssure to 1 x 1	0-5		
Conductance (L/s) N	ote 1)	5	14	45	80	160	200	300	800
Leakage (Pa·m³/s)	Internal	In ca	In case of standard material FKM: 1.3 x 10 ⁻¹⁰ at normal temperature, excluding gas permeation						ation
Leakage (Pa•III78)	External	In ca	In case of standard material FKM: 1.3 x 10 ⁻¹⁰ at normal temperature, excluding gas permeation						ation
Flange type		KF (NW), K (DN)							
Principal materials		Body: Aluminum alloy, Main part: Stainless steel, FKM (Standard seal material)							
Surface treatment				External: I	Hard anodized	Internal: Ra	aw material		
Pilot pressure (MPa)	(G)		0.3 to 0.6		0.4 to 0.6				
Dilet pert size	XLG	N	15		Rc1/8				
Pilot port size	XLGV		M5	: Port 1(P), Po	ort 3(R), Port 5	(R)		-	_
Waight (kg)	XLG	0.28	0.46	1.1	1.4	2.3	4.1	7.6	14.9
Weight (kg)	XLGV	0.32	0.5	1.14	1.5	2.4	4.2	-	_

Note 1) Conductance is the value for an elbow with the same dimensions.

Note 2) For valve heater specifications, refer to "Common Option [1] Heater" on page 459.

Note 3) A coating of vacuum grease [Y-VAC2] is applied to the seal-material sliding portion of the vacuum part.

Construction/Operation

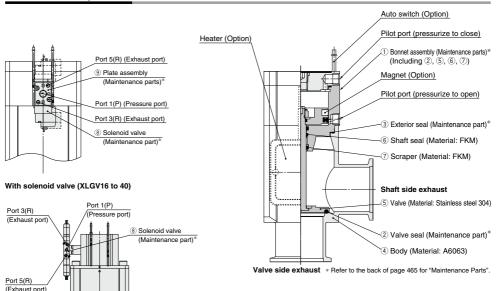

With solenoid valve (XLGV50 to 80)

<Working principle>

By applying the pilot pressure from the pilot port P-1, the piston-coupled valve overcomes the operating force by pressure, and the valve opens. (Pilot port P-2 is open.) Conversely, by applying the pilot pressure to the pilot port P-2, the valve closes. (Pilot port P-1 is open.) For the XLGV, the pilot pressure is always applied to the port 1(P), and the valve opens when the solenoid valve is turned ON and closes when it is turned OFF. For the double solenoid, the valve moves to the opposite side from that in which the solenoid valve is turned ON.

<Options>

Auto switch: The magnet activates the auto switch. With 2 auto switches, the open and closed positions are detected, and with 1 auto switch, either the open or closed position is detected. Auto switches are applicable at


ordinary temperatures only (5 to 60°C).

Heater: Simple heating is performed using thermistors. The valve body can be heated to approximately 100 or 120°C, depending on the heater option and the valve size. The type and number of thermistors to be used will vary depending upon size and setting temperature. In the case of high temperature specifications, the bonnet assembly is a heat resistant structure. This does not apply in cases where a solenoid valve is attached

Aluminum High Vacuum Angle Valve XLG/XLGV Series

Dimensions

XLG16, 25, 40/ Air operated




										(mm)
ĺ	Model	Α	В	С	D	E Note 1)	Fn	G	Н	J
	XLG-16	40	110	38	1	_	30	17	40	26
Ī	XLG-25	50	121	48	1	12	40	26	39	28
	XLG-40	65	171	66	2	11	55	41	63	36

Note 1) Dimension E applies when heater option is included. (Lead wire length: approx. 1 m) Note 2) (a), (b) and (c) in the above drawing indicate heater mounting positions. Moreover, heater mounting positions will differ depending on the type of heater.

For further details, refer to mounting positions will differ depending on the type of neater.

XLG50, 63, 80, 100, 160/ Air operated



											(111111)
Model	Α	В	С	D	E Note 1)	Fn	Fd	G	Н	J	K
XLG-50	70	183	80	31	10.5	75	_	52	77	29	10.5
XLG-63	88	209	100	39	11	87	95	70	76.5	36	9
XLG-80	90	250	117	45.5	11	114	110	83	105	44	9
XLG-100	108	270.5	154	55	11	134	130	102	92	58	9
XLG-160	138	339	200	65	11	190	180	153	124	62	12.5

Note 1) Dimension E applies when heater option is included. (Lead wire length: approx. 1 m) Note 2) (a), (b) and (c) in the above drawing indicate heater mounting positions.

Moreover, heater mounting positions will differ depending on the type of heater.

For further details, refer to mounting positions under "Replacement Heaters" on page 465.




XLA


XLQ XMQ D-Q XSA XVD XGT

XLG/XLGV Series

Dimensions


XLGV/With solenoid valve






							(mm)
Model	K	L	M	N	Р	Q	R
XLGV-16	14.3	9.2	6.4	3.5	2.7	17.3	36
XLGV-25	15.8	9.2	6.4	3.5	2.7	15.8	41
XLGV-40	29	9.2	6.4	3.5	2.7	2.6	51

* Other dimensions are the same as the XLG. Note) For details, consult your SMC sales representative.





							(mm)
Model	K	L	M	N	P	Q	R
XLGV-50	12.5	9.5	9.5	1	1	23.5	52.6
XLGV-63	17.4	9.5	9.5	1	1	18.6	62.3
XLGV-80	23.5	9.5	9.5	1	1	12.4	70.8

^{*} Other dimensions are the same as the XLG. Note) For details, consult your SMC sales representative.




Aluminum High Vacuum Angle Valve/Double Acting/O-ring Seal

XLG Series

Made to Order Specifications 1



With Bypass Valve (Flange size: 80)

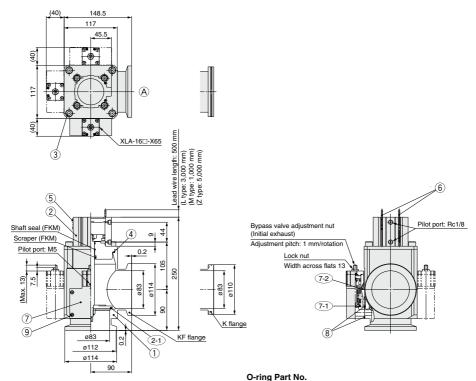

Symbol



Component Parts


COIII	policiii raits		
No.	Description	Material	Remarks
1	Body	A6063	
2	Bonnet assembly		Refer to maintenance parts
2-1	O-ring		Refer to part no.
3	Hexagon socket head cap screw	SS	M10, L = 20
4	O-ring		Refer to part no.
5	Computer name plate		
6	Auto switch		Option
7	High vacuum angle valve (Bypass valve)		Refer to maintenance parts
7-1	O-ring		Refer to part no.
7-2	O-ring		Refer to part no.
8	O-ring		Refer to part no.
9	Hexagon socket head cap screw	Stainless steel	M4, L = 40

Seal material symbol	Internal seal (2-1)	External seal (4)
Nil	B2401-V85V	AS568-045V
N1	B2401-V85-XN1	AS568-045-XN1
P1	B2401-V85-XP1	AS568-045-XP1
Q1	B2401-V85-XQ1	AS568-045-XQ1
R1	B2401-V85-XR1	AS568-045-XR1
R2	B2401-V85-XR2	AS568-045-XR2
R3	B2401-V85-XR3	AS568-045-XR3
S1	B2401-V85-XS1	AS568-045-XS1
T1	B2401-V85-XT1	AS568-045-XT1
U1	B2401-V85-XU1	AS568-045-XU1

O-ring Part No.

Seal material symbol	Internal seal (7-1)	External seal (7-2)	External seal ®
Nil	B2401-V15V	AS568-025V	AS568-017V
N1	B2401-V15-XN1	AS568-025-XN1	AS568-017-XN1
P1	B2401-V15-XP1	AS568-025-XP1	AS568-017-XP1
Q1	B2401-V15-XQ1	AS568-025-XQ1	AS568-017-XQ1
R1	B2401-V15-XR1	AS568-025-XR1	AS568-017-XR1
R2	B2401-V15-XR2	AS568-025-XR2	AS568-017-XR2
R3	B2401-V15-XR3	AS568-025-XR3	AS568-017-XR3
S1	B2401-V15-XS1	AS568-025-XS1	AS568-017-XS1
T1	B2401-V15-XT1	AS568-025-XT1	AS568-017-XT1
U1	B2401-V15-XU1	AS568-025-XU1	AS568-017-XU1

Note) A coating of vacuum grease (fluorinated grease: Y-VAC2) is applied to the shaft seal, scraper and O-ring ®.



M9// Without auto switch (with built-in magnet) Note) Types with auto switches are not available in case of high temperature types. Standard lead wire length is 0.5 m. Add "L" to the end of the part number when 3 m is

desired, "M" when 1 m, and "Z" when 5 m.

	Left flange	S	Flange side			
1	surface	K	Left flange surface			
	Surface		Rear flange surface			
	B: 1. #	S	Flange side			
2	Right flange			surface	L	Rear flange surface
	Surface	M	Right flange surface			
	Rear flange	K	Left flange surface			
3	surface	L	Rear flange surface			
	M		Right flange surface			

Seal material

Symbol	Seal material	Compound No.						
Nil	FKM	1349-80						
N1	EPDM	2101-80						
P1	Barrel Perfluoro®	70W						
Q1	Kalrez [®]	4079						
R1		SS592						
R2	Chemraz [®]	SS630						
R3		SSE38						
S1	VMQ	1232-70						
T1	FKM FOR PLASMA	3310-75						
U1	ULTIC ARMOR®	UA4640						

Barrel Perfluoro® is a registered trademark of Matsumura Oil Co., Ltd. Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates

Chemraz® is a registered trademark of Greene, Tweed Technologies, Inc.
ULTIC ARMOR® is a registered trademark of Nippon Valqua Industries, Ltd.

Seal material changed part

XLA

XL

XL\(\Bar{Q}\)

XM□ XY□

D-□

XSA

XVD

XGT

When the seal material is not being changed, there is no need to select a symbol.

* Flange: (A) witches/Mounting position

Symbol

ei oi auto	o switches/woulding	ĮΡ
Quantity	Mounting position	
_	Without auto switch	
2 pcs.	Valve open/closed	
1 pc.	Valve open	
1 pc.	Valve closed	
	Quantity — 2 pcs. 1 pc.	 Without auto switch 2 pcs. Valve open/closed 1 pc. Valve open

Leakage (Pa·m3/s or less) Note Symbol Changed part Internal External 1.3 x 10⁻⁹ (FKM) 1.3 x 10⁻⁹ (FKM) Nil None Α 2-1 (7-1)(4)(7-2)(8) 1.3 x 10⁻⁷ 1.3 x 10⁻⁷ 1.3 x 10-9 (FKM) В 1.3 x 10-7 С 4 7-2 8 1.3 x 10⁻⁹ (FKM) 1.3 x 10⁻⁷

Note) Values at normal temperature, excluding gas permeation

Maintenance Parts

2 Bonnet Assembly Part No.

XLG80-30-1H-1 M9NA-XN1

Bonnet as	sembly	
Temperature	Part no.	
5 to 60°C	XLG80-30-1-1	
5 to 150°C	XLG80-30-1H-1	
0 10 100 0	712000 00 111 1	

Same as How to Order

XLA-16 🔲 🗆	
Pilot port direction	L
Pilot port direction	
(

8 Bypass Valve Part No.

Rear (as seen from body connection point) Left (as seen from body connection point) Right (as seen from body connection point)

Temperature specifications

Symbol	Temperature
Nil	5 to 60°C
H0	5 to 150°C

Seal material changed part

X65

Symbol	Changed pa
Nil	None
Α	7-1) (7-2)
В	7-1
С	7-2

Seal material: Same as the seal materials of How to Order Valve

Specifications			
Valve type	Main valve: Double acting	Bypass valve: Normally closed	
Shaft seal type	O-ring seal	Bellows seal	
Operating pressure range	Atmospheric pressure to 1 x 10 ⁻⁵ Pa		
Fluid	Inert gas under vacuum		
Operating temperature	5 to 60°C (Option: 5 to 150°C)		
Conductance	200 L/s* Max. 25 L/s (Calculated value		
Operating pressure	0.4 to 0.6 MPa		
Flange	KF80, K80		
Weight	4.9 kg		

^{*} Conductance is the value for the "molecular flow" of an elbow with the same dimensions




Aluminum High Vacuum Angle Valve/Double Acting/O-ring Seal

XLG Series

Made to Order Specifications 2



With Bypass Valve (Flange size: 100)

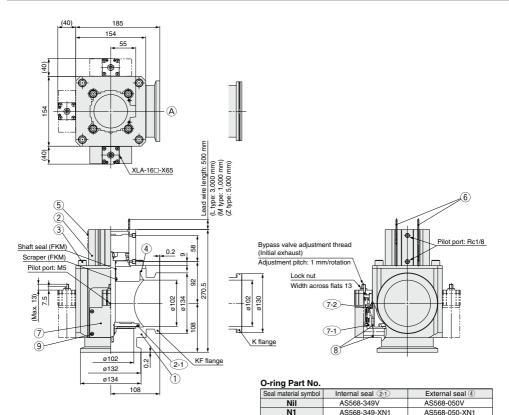

Symbol



Component Parts

ponent i arts		
Description	Material	Remarks
Body	A6063	
Bonnet assembly		Refer to maintenance parts
O-ring		Refer to part no.
Hexagon socket head cap screw	SS	M12, L = 20
O-ring		Refer to part no.
Computer name plate		
Auto switch		Option
High vacuum angle valve (Bypass valve)		Refer to maintenance parts
O-ring		Refer to part no.
O-ring		Refer to part no.
O-ring		Refer to part no.
Hexagon socket head cap screw	Stainless steel	M4, L = 40
	Description Body O-ring Hexagon socket head cap screw O-ring Computer name plate Auto switch High vacuum angle valve (Bypass valve) O-ring O-ring O-ring	Description Material Body A6063 Bonnet assembly O-ring Hexagon socket head cap screw O-ring Computer name plate Auto switch High vacuum angle valve (Bypass valve) O-ring O-ring O-ring O-ring

U1 O-ring Part No.

P1

Q1

R1

R2

R3

<u>S1</u>

T1

Seal material symbol	Internal seal (7-1)	External seal (7-2)	External seal ®
Nil	B2401-V15V	AS568-025V	AS568-017V
N1	B2401-V15-XN1	AS568-025-XN1	AS568-017-XN1
P1	B2401-V15-XP1	AS568-025-XP1	AS568-017-XP1
Q1	B2401-V15-XQ1	AS568-025-XQ1	AS568-017-XQ1
R1	B2401-V15-XR1	AS568-025-XR1	AS568-017-XR1
R2	B2401-V15-XR2	AS568-025-XR2	AS568-017-XR2
R3	B2401-V15-XR3	AS568-025-XR3	AS568-017-XR3
S1	B2401-V15-XS1	AS568-025-XS1	AS568-017-XS1
T1	B2401-V15-XT1	AS568-025-XT1	AS568-017-XT1
U1	B2401-V15-XU1	AS568-025-XU1	AS568-017-XU1

AS568-349-XP1

AS568-349-XQ1

AS568-349-XR1

AS568-349-XR2

AS568-349-XR3

AS568-349-XS1

AS568-349-XT1

AS568-349-XU1

AS568-050-XP1

AS568-050-XQ1

AS568-050-XR1

AS568-050-XR2


AS568-050-XR3

AS568-050-XS1

AS568-050-XT1

AS568-050-XU1

Note) A coating of vacuum grease (fluorinated grease: Y-VAC2) is applied to the shaft seal, scraper and O-ring ®.

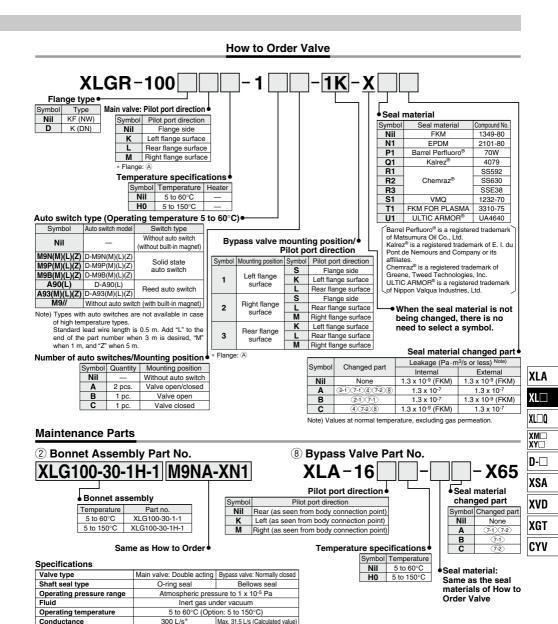



0.4 to 0.6 MPa

KF100, K100

8.3 kg

* Conductance is the value for the "molecular flow" of an elbow with the same dimensions

Operating pressure

Flange

Weight


Aluminum High Vacuum Angle Valve/Double Acting/O-ring Seal

XLG Series

Made to Order Specifications 3



With Bypass Valve (Flange size: 160)

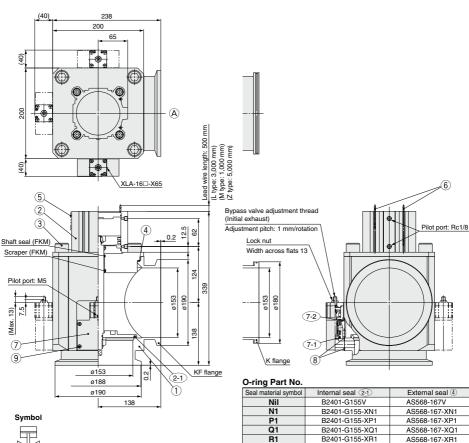

Component Parts				
No.	Description	Material	Remarks	
1	Body	A6063		
2	Bonnet assembly		Refer to maintenance parts	
2-1	O-ring		Refer to part no.	
3	Hexagon socket head cap screw	SS	M20, L = 30	
4	O-ring		Refer to part no.	
5	Computer name plate			
6	Auto switch		Option	
7	High vacuum angle valve (Bypass valve)		Refer to maintenance parts	
7-1	O-ring		Refer to part no.	
7-2	O-ring		Refer to part no.	
8	O-ring		Refer to part no.	
9	Hexagon socket head cap screw	Stainless steel	M4, L = 40	

O-ring Part No.

R2

R3

S1

T1

Seal material symbol	Internal seal (7-1)	External seal 7-2	External seal ®
Nil	B2401-V15V	AS568-025V	AS568-017V
N1	B2401-V15-XN1	AS568-025-XN1	AS568-017-XN1
P1	B2401-V15-XP1	AS568-025-XP1	AS568-017-XP1
Q1	B2401-V15-XQ1	AS568-025-XQ1	AS568-017-XQ1
R1	B2401-V15-XR1	AS568-025-XR1	AS568-017-XR1
R2	B2401-V15-XR2	AS568-025-XR2	AS568-017-XR2
R3	B2401-V15-XR3	AS568-025-XR3	AS568-017-XR3
S1	B2401-V15-XS1	AS568-025-XS1	AS568-017-XS1
T1	B2401-V15-XT1	AS568-025-XT1	AS568-017-XT1
U1	B2401-V15-XU1	AS568-025-XU1	AS568-017-XU1

B2401-G155-XR2

B2401-G155-XR3

B2401-G155-XS1

B2401-G155-XT1

B2401-G155-XU1

AS568-167-XR2

AS568-167-XR3


AS568-167-XS1

AS568-167-XT1

AS568-167-XU1

Note) A coating of vacuum grease (fluorinated grease: Y-VAC2) is applied to the shaft seal, scraper and O-ring ®.

How to Order Valve



Symbol Auto switch model Switch type Without auto switch

(without built-in magnet) M9N(M)(L)(Z) D-M9N(M)(L)(Z) Solid state M9P(M)(L)(Z) D-M9P(M)(L)(Z) auto switch M9B(M)(L)(Z) D-M9B(M)(L)(Z) **A90(L)** D-A90(L) Reed auto switch A93(M)(L)(Z) D-A93(M)(L)(Z) Without auto switch (with built-in magnet) M9//

Note) Types with auto switches are not available in case of high temperature types. Standard lead wire length is 0.5 m. Add "L" to the end of the part number when 3 m is desired, "M" when 1 m, and "Z" when 5 m.

Number of auto switches/Mounting position

71	or auto switches/wounting position				
	Symbol	Quantity	Mounting position		
Nil —		_	Without auto switch		
	Α	2 pcs.	Valve open/closed		
	В	1 pc.	Valve open		
	С	1 pc.	Valve closed		

Bypass valve mounting position/ Pilot port direction

l Oyl	IIDUI	I Mounting position	Syllibol	Filot port direction [
		S	Flange side	
	1	Left flange surface	K	Left flange surface
		Surface	L	Rear flange surface
	2 Right flange surface	S	Flange side	
		L	Rear flange surface	
		suriace	M	Right flange surface
	Rear flange surface	Poor flongs	K	Left flange surface
		L	Rear flange surface	
		ounass	M	Right flange surface
* Flange: (A)				

Seal material

Symbol	Seal material	Compound No.		
Nil	FKM	1349-80		
N1	EPDM	2101-80		
P1	Barrel Perfluoro®	70W		
Q1	Kalrez [®]	4079		
R1		SS592		
R2	Chemraz®	SS630		
R3		SSE38		
S1 VMQ		1232-70		
T1	T1 FKM FOR PLASMA			
U1 ULTIC ARMOR® UA4640		UA4640		
Barrel Perfluoro® is a registered trademark				

of Matsumura Oil Co., Ltd. Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates

Chemraz[®] is a registered trademark of Greene, Tweed Technologies, Inc. ULTIC ARMOR® is a registered trademark of Nippon Valqua Industries, Ltd.

When the seal material is not being changed, there is no need to select a symbol.

Seal material changed part

(M)
(M)

Note) Values at normal temperature, excluding gas permeation.

Maintenance Parts

2 Bonnet Assembly Part No.

XLG160-30-1H-1 M9NA-XN1

Bonnet assembly				
Temperature	Part no.			
5 to 60°C	XLG160-30-1-1			
5 to 150°C	XLG160-30-1H-1			

Symbol

Nil

_				_	
Same	as	How	tο	Or	der

Specifications			
Valve type	Main valve: Double acting	Bypass valve: Normally closed	
Shaft seal type	O-ring seal	Bellows seal	
Operating pressure range	nge Atmospheric pressure to 1 x 10 ⁻⁵ Pa		
Fluid	Inert gas under vacuum		
Operating temperature	5 to 60°C (Option: 5 to 150°C)		
Conductance	800 L/s*	Max. 31.5 L/s (Calculated value)	
Operating pressure	0.4 to 0.6 MPa		
Flange	KF160, K160		
Woight	15	7 ka	

^{*} Conductance is the value for the "molecular flow" of an elbow with the same dimensions

(8) Bypass Valve Part No.

Left (as seen from body connection point)

Right (as seen from body connection point)

XLA-16 X65

Pilot port direction Seal material changed part Pilot port direction Rear (as seen from body connection point)

5 to 150°C

Temperature specifications					
	Symbol	Temperature	П		
	Nil	5 to 60°C	1		

Symbol	Changed part		
Nil	None		
Α	7-1 (7-2)		
В	7-1		
С	(7-2)		

Seal material:

Same as the seal materials of How to Order Valve

XLA

XL□Q

XM□ XY□

D-□

XSA

XVD

XGT


CYV

Aluminum High Vacuum Angle Valve 2-Step Control, Single Acting/Bellows Seal, O-ring Seal

XLD/XLDV Series RoHS



How to Order



XLD

1 Flange size


Size	
25	
40	
50	
63	
80	
100	
160	1

2 Flange type

Symbol	Type	Applicable flange
Nil	KF (NW)	25, 40, 50, 63, 80 100, 160
D	K (DN)	63, 80, 100, 160

3 Pilot port direction

-	
Symbol	Pilot port direction
Nil	Flange side
K	Left flange surface
L	Rear flange surface
M	Right flange surface



(4) Temperature specifications/Heater

Symbol		Temperature	Heater
Nil		5 to 60°C	_
High I	H0		_
temperature	H4	5 to 150°C	With 100°C heater
type	H5		With 120°C heater

Note) Size 25 is not applicable for H4.

6 Number of auto switches/Mounting position

Symbol	Quantity	Mounting position
Nil	Without auto switch	_
Α	2 pcs.	Valve open/closed
В	1 pc.	Valve open
С	1 pc.	Valve closed

⑤ Auto switch type

Symbol	Auto switch model	Remarks
Nil	_	Without auto switch (without built-in magnet)
M9N(M)(L)(Z)	D-M9N(M)(L)(Z)	
M9P(M)(L)(Z)	D-M9P(M)(L)(Z)	Solid state auto switch
M9B(M)(L)(Z)	D-M9B(M)(L)(Z)	
A90(L)	D-A90(L)	Donal auto audiele
A93(M)(L)(Z)	D-A93(M)(L)(Z)	Reed auto switch
M9//	_	Without auto switch (with built-in magnet)

the heat resistant auto switch D-F7NJ* is available. For details, please contact SMC.

Note 2) Standard lead wire length is 0.5 m. Add "L" to the end of the part number when 3 m is desired, "M" when 1 m, and "Z" when 5 m.

Note 1) Auto switches shown above cannot be mounted on the high temperature type. For the high temperature type, a semi-standard product that uses

when 3 m is desired, "M" when 1 m, and "Z" when 5 m.

Example) -M9NL

Dody surface treatment/Seal material and its changed part

Body surface treatment

* Produced by Mitsubishi Cable Industries, Ltd.

!	Symbol	Surface treatment	
ı	Nil	External: Hard anodized Internal: Raw material	
i	Α	External: Hard anodized Internal: Oxalic acid anodized	

Seal material

Symbol Seal material		Compound No.
Nil	FKM	1349-80*
N1	EPDM	2101-80*
P1	Barrel Perfluoro®	70W
Q1	Kalrez®	4079
R1		SS592
R2	Chemraz®	SS630
R3		SSE38
S1	VMQ	1232-70*
T1	FKM for Plasma	3310-75*
U1	ULTIC ARMOR®	UA4640

· Seal material changed part and leakage

Symbo	Changed	Leakage (Pa·m³/s or less) Note 1)		
Cymb	part	Internal	External	
Nil	None	1.3 x 10 ⁻¹⁰ (FKM)	1.3 x 10 ⁻¹¹ (FKM)	
Α	2, 3, 4, 5	1.3 x 10 ⁻⁸	1.3 x 10 ⁻⁹	
В	2, 4, 5	1.3 x 10 ⁻⁸	1.3 x 10 ⁻¹¹ (FKM)	
С	3	1.3 x 10 ⁻¹⁰ (FKM)	1.3 x 10 ⁻⁹	

Note 1) Values at normal temperature, excluding gas permeation.

Note 2) Refer to parts number of "Construction" on page 451 for changed part.

Number indicates parts number of "Construction" accordingly.

To order something other than "Nil" (standard), list the symbols starting with "X," followed by each symbol for "body surface treatment," "seal material" and then "changed part".

Example) XLD-25-M9NA-XAN1A

Barrel Perfluoro® is a registered trademark of Matsumura Oil Co., Ltd. Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.


Chemraz® is a registered trademark of Greene, Tweed Technologies, Inc. ULTIC ARMOR® is a registered trademark of Nippon Valqua Industries, I trd

Operated/with Solenoid



How to Order





1) Flange size

· runge oi
Size
25
40
50
63
80
100
160

(2) Flange type

- riunge type			
ſ	Symbol	Type	Applicable flange
	Nil	KF (NW)	25, 40, 50, 63, 80 100, 160
	D	K (DN)	63, 80, 100, 160

3 Solenoid valve direction

Symbol	Solenoid valve direction
K	Left flange surface
L	Rear flange surface
M	Right flange surface

^{*} M type is not available for size 25



(4) Auto switch type

Symbol	Auto switch model	Remarks
Nil	_	Without auto switch (without built-in magnet)
	D-M9N(M)(L)(Z)	
M9P(M)(L)(Z)	D-M9P(M)(L)(Z)	Solid state auto switch
M9B(M)(L)(Z)	D-M9B(M)(L)(Z)	
A90(L)	D-A90(L)	Reed auto switch
A93(M)(L)(Z)	D-A93(M)(L)(Z)	need auto Switch
M9//	_	Without auto switch (with built-in magnet)

Standard lead wire length is 0.5 m. Add "L" to the end of the part number when 3 m is desired, "M" when 1 m, and "Z" when 5 m. Example) -M9NL

(5) Number of auto switches/Mounting position

Symbol	Quantity	Mounting position
Nil	Without auto switch	1
Α	2 pcs.	Valve open/closed
В	1 pc.	Valve open
С	1 pc.	Valve closed

6 Rated voltage CE-compliant

1	100 VAC, 50/60 Hz	_
2	200 VAC, 50/60 Hz	_
3	110 VAC, 50/60 Hz	
4	220 VAC, 50/60 Hz	_
5	24 VDC	0
6	12 VDC	0

Electrical entry

G	Grommet (Lead wire length 300 mm)
Н	Grommet (Lead wire length 600 mm)
L	L type plug connector
M	M type plug connector

8 Light/Surge voltage suppressor 10 CE-compliant

Nil	None
S	With surge voltage suppressor
Z	With light/surge voltage suppressor
U	With light/surge voltage suppressor (Non-polar type)

* U type: DC only.

Nil

Q	CE-compliant

XLA

XL□O

XM□ XY□ D-□

XSA

XVD

XGT

CYV

(9) Body surface treatment/Seal material and its changed part

Body surface treatment

Symbol	Surface treatment					
Nil	External: Hard anodized Internal: Raw material					
Α	External: Hard anodized Internal: Oxalic acid anodized					

Seal material

Symbol	Seal material	Compound No.
Nil	FKM	1349-80*
N1	EPDM	2101-80*
P1	Barrel Perfluoro®	70W
Q1	Kalrez®	4079
R1		SS592
R2	Chemraz [®]	SS630
R3		SSE38
S1	VMQ	1232-70*
T1	FKM for Plasma	3310-75*
U1	ULTIC ABMOR®	UA4640

Barrel Perfluoro® is a registered trademark of Matsumura Oil Co., Ltd. Kalrez® is a registered trademark of E. I. du Pont de Nemours and

Chemraz® is a registered trademark of Greene, Tweed Technologies, Inc. ULTIC ARMOR® is a registered trademark of Nippon Valqua Industries, Ltd.

* Produced by Mitsubishi Cable Industries, Ltd.

Company or its affiliates.

* S type: Not available for AC

· Seal material changed part and leakage

Symbol	Changed Note 2)	Leakage (Pa·m	3/s or less) Note 1)	
Syllibol	part	Internal	External	
Nil None		1.3 x 10 ⁻¹⁰ (FKM)	1.3 x 10 ⁻¹¹ (FKM)	
Α	2, 3, 4, 5	1.3 x 10 ⁻⁸	1.3 x 10 ⁻⁹	
B 2, 4, 5		1.3 x 10 ⁻⁸	1.3 x 10 ⁻¹¹ (FKM)	
С	3	1.3 x 10 ⁻¹⁰ (FKM)	1.3 x 10 ⁻⁹	

Note 1) Values at normal temperature, excluding gas permeation. Note 2) Refer to parts number of "Construction" on page 451 for changed part. Number indicates parts number of "Construction" accordingly.

To order something other than "Nil" (standard), list the symbols starting with "X," followed by each symbol for "body surface treatment," "seal material" and then "changed part".

Example) XLDV-25-M9NA-1G-XAN1A

Note 1) Option specifications/Combinations

This model has auto switch and K(DN) flange options, but high temperature/heater options are not available.

Note 2) Solenoid valves

Model	Initial exhaust valve	Main exhaust valve	Example
XLDV-25	V114	V114	V114-1GS
XLDV-40/50/63/80/100/160	V114	SYJ314	SYJ314-1GS

* For details, consult your SMC sales representative.

* For option "Q", the solenoid valve should be a CE-compliant product.



XLD/XLDV Series

Specifications

Model			XLD(V)-25	XLD(V)-40	XLD(V)-50	XLD(V)-63	XLD(V)-80	XLD(V)-100	XLD(V)-160
Valve type			Norr	Normally closed (Spring Return and seal) [Both main & initial exhaust valves]					
Fluid					Inert	gas under va	cuum		
Operating temperature (%	ć	XLD			5 to 60 (High	temperature t	ype: 5 to 150)		
Operating temperature (°	٠,	XLDV				5 to 50			
Operating pressure (Pa) (abs)					1 x 10 ⁻⁶ to	atmospheric	pressure		
Conductance (L/s) Note 1)	Maii	n exhaust valve	14	45	80	160	200	300	800
Conductance (L/S)	Initi	al exhaust valve	0.5 to 3	2 to 8	2.5 to 11	4 to 18	4 to 18	6.5 to 31.5	6.5 to 31.5
Leakage (Pa·m³/s)		Internal	In case of standard material FKM: 1.3 x 10 ⁻¹⁰ at normal temperature, excluding gas permeation						s permeation
Leakage (Pa•III /S)		External	In case of standard material FKM: 1.3 x 10 ⁻¹¹ at normal temperature, excluding gas permeation					s permeation	
Flange type			KF (NW)			KF (NW), K (DN)			
Principal materials Note 3)			Body: Aluminum alloy, Bellows: Stainless steel 316L, Main part: Stainless steel, FKM (Standard seal material)						
Surface treatment			External: Hard anodized Internal: Raw material						
Pilot pressure (MPa) (G)			0.4 to 0.7 [Both main & initial exhaust valves]						
XLD		XLD	M5	M5 Rc1/8 Rc1/4					Rc1/4
Pilot port size		XLDV	M5: Port 1(P), Port 3(R)						
Weight (kg)		XLD	0.5	1.2	1.8	3.4	5.6	11.5	20
		XLDV	0.57	1.3	1.9	3.5	5.7	11.6	20.1


Note 1) The main exhaust valve conductance is the valve for the "molecular flow" of an elbow with the same dimensions. The initial exhaust valve conductance is the value for the "viscous flow".

Note 2) For valve heater specifications, refer to "Common Option [1] Heater" on page 459.

Note 3) A coating of vacuum grease [Y-VAC2] is applied to the seal-material sliding portion (initial exhaust valves sliding parts) of the vacuum part.

Aluminum High Vacuum Angle Valve XLD/XLDV Series

Construction/Operation

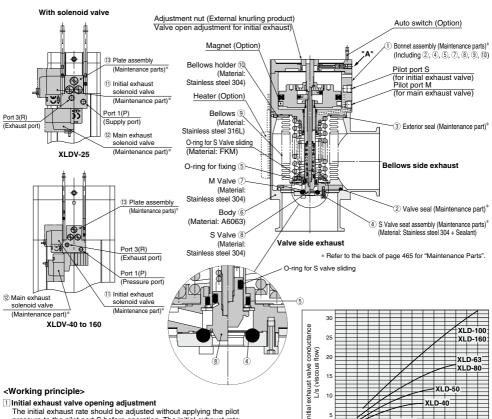

The initial exhaust rate should be adjusted without applying the pilot pressure to the pilot port S before operation. The initial exhaust rate is set to zero by gently turning the adjustment nut clockwise until it stops. (Do not use any tools.) The initial exhaust rate is adjusted by turning the adjustment nut counterclockwise.

2 Opening of the initial exhaust valve (valve S)

When the pilot pressure is applied to the pilot port S, the valve S is removed from the valve S seal assembly, and the valve opens the adjusted amount. For the XLDV, when the pilot pressure is always applied to the port 1(P) and the initial exhaust solenoid valve is turned ON, the valve opens the adjusted amount.

3 Opening of the main exhaust valve (valve M)

When the pilot pressure is applied to the pilot port M, the valve M is removed from the body seat portion, and the valve fully opens. For the XLDV, when the pilot pressure is applied to the port 1(P) and the initial exhaust solenoid valve is turned ON, the valve fully opens.

4 Closing of the initial exhaust / main exhaust valves

By removing the pilot pressure from the pilot port S and pilot port M, both S and M valves return to their previous positions and they are sealed. For the XLDV, by turning OFF the initial exhaust valve and main exhaust valve, both S and M valves return to their previous positions and they are sealed.

<Options>

(for main exhaust valve

Auto switch: The magnet actuates the auto switch. With two auto switches, the open and closed positions are detected, and with one auto switch, either the open or closed position is detected. Auto switches are applicable at ordinary temperatures only (5 to 60°C).

XI D-25

3 3.5 4

Adjustment nut rotations n

Initial exhaust valve conductance

Heater: Simple heating is performed using thermistors. The valve body can be heated to approximately 100 or 120°C, depending on the heater option and valve size. The type and number of thermistors to be used will vary depending upon size and setting temperature. In the case of high temperature specifications, the bonnet assembly is a heat resistant structure. This is not available with solenoid valve.

0.5

Note) The adjustment nut does not rotate during valve operation. However, rotation of the adjustment nut can be fixed to prevent incorrect operation. When fixing the adjustment nut after setting, tighten it with the tightening torque shown in the table below. (Tightening with excessive torque can result in damaged components or the generation of abnormal noise.)

"A" Section Thread Tightening Torque

Model	XLD(V)-25	XLD(V)-40	XLD(V)-50	XLD(V)-63	XLD(V)-80	XLD(V)-100	XLD(V)-160
Tightening torque	1 80.0	N·m (0.8 kgf·cm) c	or less		0.3 N⋅m (3 kg	gf·cm) or less	

XLA

XL\(\pi\)

XM□

XY□

D-□

XSA

XVD

XGT


CYV

4.5 5 5.5 6 6.5 7

XLD/XLDV Series

Dimensions

XLD/Air operated



											(mm)
Model	Α	В	С	D	E	Fn	Fd	G	Н	J	K
XLD-25	50	123	48	1	12	40	_	26	41	16	7.5
XLD-40	65	170	66	2	11	55	_	41	63	20	15
XLD-50	70	183	79	2	11	75	_	52	68	20	17.5
XLD-63	88	217	100	3	11	87	95	70	72	20	20
XLD-80	90	256	117	3	11	114	110	83	98	20	26.5
XLD-100	108	321	154	3	11	134	130	102	133	20	38
XLD-160	138	335	200	3	11	190	180	153	114	30	40
No. 1 Diament	No. 4) Browning From the Leading Street Laboratory and the Laboratory										

Note 1) Dimension E applies when heater option is included. (Lead wire length: approx. 1 m)


Note 2) (a), (b) and (c) in the above drawing indicate heater mounting positions.


Moreover, heater mounting positions will differ depending on the type of heater.

For further details, refer to mounting positions under "Replacement Heaters" on page 465.

Aluminum High Vacuum Angle Valve XLD/XLDV Series

Dimensions

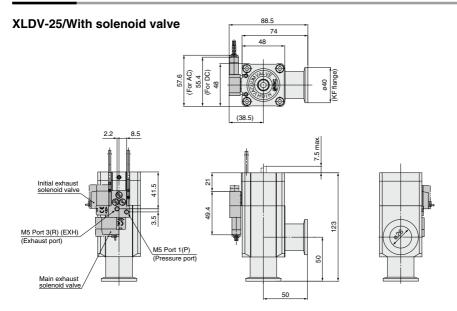

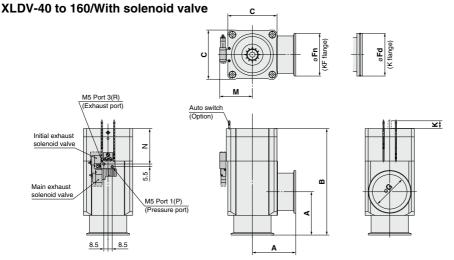

									(mm)
Model	Α	В	С	Fn	Fd	G	M	N	K
XLDV-40	65	170	66	55	_	41	48.5	53.5	15
XLDV-50	70	183	79	75	_	52	55	57.5	17.5
XLDV-63	88	217	100	87	95	70	66.5	72.2	20
XLDV-80	90	256	117	114	110	83	75	82.6	26.5
XLDV-100	108	321	154	134	130	102	93.5	95.2	38
XLDV-160	138	335	200	190	180	153	116.5	101.2	40

Note) For details, consult your SMC sales representative.

XLA XI

XL□Q

XM□

XY□

D-□ XSA

XVD


XGT CYV

Aluminum High Vacuum Angle Valve Manual/Bellows Seal XLH Series





How to Order



(Bellows seal)

Triange Size	e
Size	
16	
25	
40	
50	

(2) Heater

Svmbol	Heaten	Applicable flange size						
Symbol	Heater	16	25	40	50			
Nil	_	•	•	•	•			
H4	With 100°C heater	I	I	•	•			
H5	With 120°C heater		•	•				

Note) Size 16 is not applicable for H4, H5, Size 25 not for H4.

3 Body surface treatment/Seal material and its changed part

Body surface treatment

Symbol	Surface treatment							
Nil	External: Hard anodized Internal: Raw material							
Α	External: Hard anodized Internal: Oxalic acid anodized							

Seal material

Seal material	Compound No.
FKM	1349-80*
EPDM	2101-80*
Barrel Perfluoro®	70W
Kalrez®	4079
	SS592
Chemraz®	SS630
	SSE38
VMQ	1232-70*
FKM for Plasma	3310-75*
ULTIC ARMOR®	UA4640
	FKM EPDM Barrel Perfluoro® Kalrez® Chemraz® VMQ FKM for Plasma ULTIC

· Seal material changed part and leakage

Symbol	Changed part	Leakage (Pa·m³/s or less) Note 1)					
	part	Internal	External				
Nil	None	1.3 x 10 ⁻¹⁰ (FKM)	1.3 x 10 ⁻¹¹ (FKM)				
Α	2,3	1.3 x 10 ⁻⁸	1.3 x 10 ⁻⁹				
В	2	1.3 x 10 ⁻⁸	1.3 x 10 ⁻¹¹ (FKM)				
С	3	1.3 x 10 ⁻¹⁰ (FKM)	1.3 x 10 ⁻⁹				

Note 1) Values at normal temperature, excluding gas permeation. Note 2) Refer to parts number of "Construction" on page 455 for changed part. Number indicates parts number of "Construction" accordingly.

To order something other than "Nil" (standard), list the symbols starting with "X", followed by each symbol for "body surface treatment", "seal material" and then "changed part".

Example) XLH-16-XAN1A

Barrel Perfluoro® is a registered trademark of Matsumura Oil Co., Ltd. Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

Chemraz® is a registered trademark of Greene, Tweed Technologies, Inc. ULTIC ARMOR® is a registered trademark of Nippon Valgua Industries, Ltd.

Specifications


A 454

Model		XLH-16	XLH-25	XLH-40	XLH-50			
Valve type		Inert gas under vacuum						
Fluid (°C)		5 to 150						
Operating pressure (Pa) (abs)		10 ⁻⁶ to atmospheric pressure						
Conductance (L/s) Note 1)		5	14	45	80			
11(5	Internal	In case of standard material FKM: 1.3 x 10 ⁻¹⁰ at normal temperature, excluding gas permeation						
Leakage (Pa·m³/s)	External	In case of standard material FKM: 1.3 x 10 ⁻¹¹ at normal temperature, excluding gas permeation						
Flange type		KF (NW)						
Principal materials		Body: Aluminum alloy, Bellows: Stainless steel 316L, Main part: Stainless steel, FKM (Standard seal material)						
Surface treatment		External: Hard anodized Internal: Raw material						
Actuation torque (N·m)		0.1 ≤	0.15 ≤	0.35 ≤	0.5 ≤			
Handle revolutions		5	7	10	13			
Weight (kg)		0.23	0.41	1.05	1.62			

Note 1) The conductance is the same as that of an elbow of the same dimensions.

Note 2) For valve heater specifications, refer to "Common Option [1] Heater" on page 459.

Construction/Operation

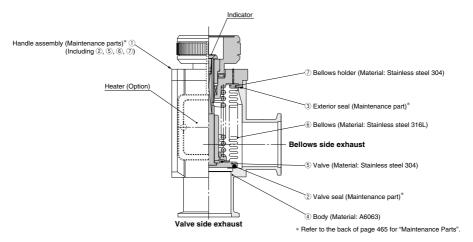

<Working principle>

By turning the handle to the left, the valve opens. The handle does not move up and down, but the indicator shows the open or closed position of the valve. As the handle is turned to the right, the valve closes, and when the turning force of the handle suddenly ceases to be felt, the valve is sealed. The sealing force for the valve comes from the spring, and is constant.

<Options>

Heater: Simple heating is performed using thermistors. The valve body can be heated to approximately 100 or


120°C, depending on the valve size. The type and number of thermistors to be used will vary

depending upon size and setting temperature.

Indicator: When the valve is open, an orange marker appears in

the center of the name plate.

Dimensions



								(111111)
Model	Α	В	С	D	E Note 1)	F	G	Н
XLH-16	40	100.5	38	1	_	30	17	35
XLH-25	50	114	48	1	12	40	26	41
XLH-40	65	162.5	66	2	11	55	41	57
XLH-50	70	179.5	79	2	11	75	52	70

Note 1) Dimension E applies when heater option is included. (Lead wire length: approx. 1 m) Note 2) (a), (b) and (c) in the above drawing indicate heater mounting positions.

Moreover, heater mounting positions will differ depending on the type of heater.

For further details, refer to mounting positions under "Replacement Heaters" on page 465.



XLA

XL□O XM□ XY□ D-□ XSA XVD XGT CYV


Aluminum High Vacuum Angle Valve Electromagnetic/Bellows Pressure Balance

XLS Series






How to Order

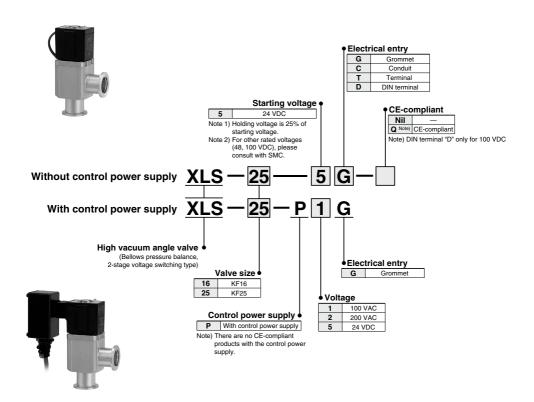

\land Warning

(1) In case there is no control power supply (XLS-25-□□: 24/48/100 VDC), starting voltage should be applied for only 0.15 to 0.2 s, in accordance with the prescribed method (indicated on the back of the coil). Continuously applying starting voltage can cause overheating of the coil and fire. Holding voltage is 25% of the starting voltage (the application method is shown on the back of the solenoid coil).



Specifications

Model		XLS-16	XLS-25	XLS-16-P□G	XLS-25-P□G			
Valve type		Normally closed (N.C.)						
Fluid		Inert gas under vacuum						
Operating temperature (°C)		5 to 40						
Operating pressure (Pa)		0.1 MPa (G) to 1 x 10 ⁻⁶ (abs)						
Conductance (L/s) Note 1)		5	8	5	8			
Internal		1.3 x	10 ⁻⁸ at normal temperati	re, excluding gas perme	eation			
Leakage (Pa·m³/s)	External	1.3 x	10 ⁻¹¹ at normal tempera	ture, excluding gas perm	eation			
Flange type/size		KF16	KF25	KF16	KF25			
Principal materials Note 2)		Body: Aluminum alloy, Main part: Stainless steel, PFA, FKM (Standard seal material)						
Surface treatment		External: Hard anodized Internal: Raw material						
Control power supply		N	lo	Yes				
Operating power supply volta	age	24/6, 48/12,	100/24 VDC	24 VDC, 100/200 VAC				
Allowable voltage fluctuation	(%)	±10						
Electrical entry		G, C, D), T type	G type only				
Lead wire		AWG20, O.D.: 2.63 mm VCTF2 x 0.75, O.D.: 2.3 mm, Sheath C			nm, Sheath O.D.: 6.6 mm			
Coil insulation		Class B						
Maximum operating frequence	y (Hz)	0.17						
Weight (kg)		0.4	0.7	0.7	1.0			

Note 1) Conductance is the value for an elbow with the same dimensions.


Note 2) A coating of vacuum grease [Y-VAC3] is applied to the valve seat of the vacuum part.

Power/Voltage

At the Rated Voltage

	Model			rting	Holding		
iviodel			Power (W)	Current (A)	Power (W)	Current (A)	
	□G/C/D/T,	P5G	36	1.5	4.8	0.38	
	P1G	50 Hz	30.5	0.47	14.8	0.35	
XLS-16-	PIG	60 Hz	30.5	0.47	10	0.27	
	P2G	50 Hz	- 30	0.24	4.9	0.11	
	FZG	60 Hz	30	0.24	2.3	0.10	
	□G/C/D/T,	P5G	47	2.0	5.3	0.5	
	P1G	50 Hz	42	0.62	20	0.46	
XLS-25-		60 Hz		0.62	13.5	0.36	
	Bac	50 Hz	45	0.35	6.7	0.15	
	P2G	60 Hz		0.35	3.0	0.12	

Construction/Operation

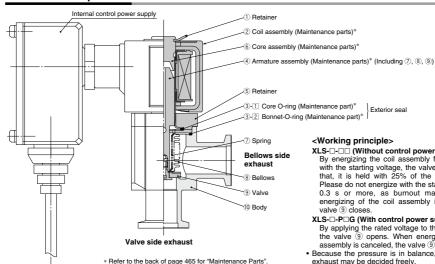

<Working principle>

XLS-□-□□ (Without control power supply) By energizing the coil assembly for 0.15 to 0.2 s

Exterior seal

with the starting voltage, the valve 9 opens. After that, it is held with 25% of the starting voltage. Please do not energize with the starting voltage for 0.3 s or more, as burnout may result. When energizing of the coil assembly is canceled, the valve 9 closes.

XLS-□-P□G (With control power supply)

By applying the rated voltage to the coil assembly, the valve 9 opens. When energizing of the coil assembly is canceled, the valve 9 closes.

· Because the pressure is in balance, the direction of exhaust may be decided freely.

XLA

 $XL\square$

XL□Q

XM□

XY□

D-□ XSA


XVD

XGT


CYV

Dimensions

XLS/Without control power supply

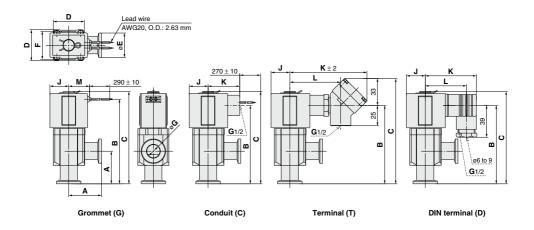

XLS/With control power supply

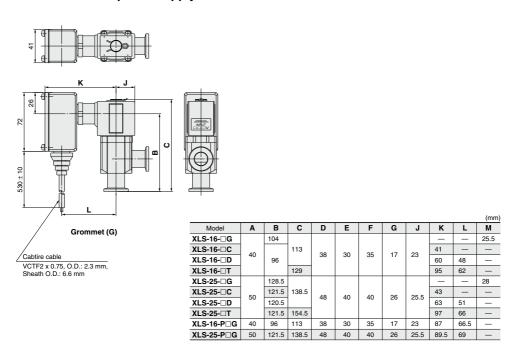

XL□ Series Common Option


1 Heater

Valve heaters are common for models **XLA**, **XLC**, **XLD**, **XLF**, **XLG** and **XLH**. Power consumption specifications are shown in the below table.

Item	XL□-25	XL□-40	XL□-50	XL□-63	XL□-80	XL□-100	XL□-160		
Rated heater voltage	90 to 240 VAC								
	Heater assembly quantity		_	1 pc.	1 pc.	1 pc.	1 pc.	2 pcs.	3 pcs.
Heater assembly quantity used	H4	100V	_	200/40	200/50	400/100	600/150	800/220	1200/350
Heater power W (Nominal value)	100°C	200V	_	800/40	800/50	1600/100	2400/150	3200/220	4800/350
In-rush/Power consumption	Heater asser	mbly quantity	1 pc.	1 pc.	1 pc.	1 pc.	2 pcs.	3 pcs.	4 pcs.
(Option symbol-Operating voltage)	H5 120°C	100V	200/40	400/70	400/80	600/130	800/180	1200/300	1600/400
		200V	800/40	1600/80	1600/80	2400/130	3200/180	4800/300	6400/400

^{*} The inrush current of the heater flows for several ten seconds when using 100V while it flows for several seconds when using 200V. However, this inrush current decreases momentarily.

Inrush current flow time (Reference)

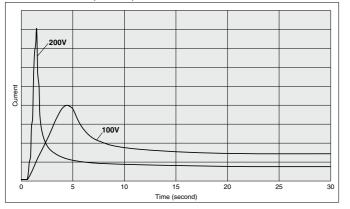



XGT CYV



^{*} When the valve uses multiple heater assemblies, do not turn ON the power to each heater assembly at the same time. Turn ON the power to each heater assembly one-by-one in order at intervals of 30 sec. since the inrush current is large.

^{*} The heater temperature will decrease several % from the start of heating and then becomes stable. (The heater temperature may decrease approximately 5 to 10% due to individual differences.)

^{*} Refer to "Maintenance Parts" on page 465 for further details regarding quantity and type.

XL□ Series Glossary

1 Seal Materials

Please note that the following are general features and subject to change depending on processing conditions. For details, please contact sealing component manufacturerers.

FKM (Fluororubber)

With low outgassing, low permanent-setting and low gas permeation rates, this is the most popular seal material for high vacuums. Standard material used by SMC's high vacuum angle valve is Mitsubishi Cable Industries, Ltd. (Compound No. 1349-80).

It is advisable to choose a model depending on its application, because an improved material compound (3310-75) which reduces the weight reduction ratio with O_2 plasma is also available.

Kalrez® * Kalrez® is a registered trademark of E.I. du Pont de Nemours and Company or its affiliates. This material, perfluoroelastomer (FFKM), has excellent heat and chemical resistance, but its permanent-setting is large, and special caution is required. Variations are available with improved plasma (O₂, CF₄) and particulate resistance; therefore it is advisable to select types based upon the application.

Compound No. 4079: Standard Kalrez®, excellent in gas and heat resistance.

Chemraz® + Chemraz® is a registered trademark of Greene, Tweed Technologies, Inc.
This material, perfluoroelastomer (FFKM), has excellent chemical and plasma resistance and has slightly higher heat resistance than FKM. Several variations of Chemraz® are available and it is advisable to choose based upon the particular plasma being used and other conditions, etc.

Compound No. SS592: Excellent physical properties and especially effective for moving parts.

Compound No. SS630: Applicable to both fixed and moving parts and compatible with a wide variety of applications.

Compound No. SSE38: The cleanest material among Chemraz®, developed for high-density plasma instruments.

Barrel Perfluoro® • Barrel Perfluoro® is a registered trademark of Matsumura Oil Co.,Ltd.
Compound No. 70W: Perfluoroelastomer (FFKM) which does not contain a metal filler. Resistant against NF3, NH3. Low particle generation under dry process conditions.

ULTIC ARMOR® • ULTIC ARMOR® is a registered trademark of Nippon Valqua Industries, Ltd. Fluoro-based rubber which does not contain a metal filler. Seal material which is plasma-resistant and has low gas emittance and heat resistance.

Silicone (Silicone rubber, VMQ)

This material is relatively inexpensive, has good plasma resistance, but its gas permeation rate is high.

Optional seal material used by SMC's high vacuum angle valve is Mitsubishi Cable Industries, Ltd. (Compound No. 1232-70, White)

It has a low weight-reduction ratio and low particle generation within O_2 plasma and NH $_3$ gas environments.

EPDM (Ethylenepropylene rubber)

Relatively lower priced and excellent in weatherability, chemical and heat resistance, but with no resistance at all to general mineral oil. Optional seal material used by SMC's high vacuum angle valve is Mitsubishi Cable Industries, Ltd. (Compound No. 2101-80)

Resistant to NH3 gas, etc.

® 460

2 Shaft Sealing Method

Bellows

Bellows offer cleaner sealing with reduced particle generation and less outgassing. The two major bellow types are: Formed-bellows and Welded-bellows. Formed-bellows produce less dusts and offer higher dust resistance. Welded-bellows allow longer strokes, but generate more dust particles and offer less dust resistance. Please note, the endurance depends on length and speed of the strokes.

O-ring, etc.

Due to entrainment of gases and generation of particulates, vacuum performance is somewhat inferior to the bellows type. However, high speed operation is possible and durability is comparatively high. In general, fluorinated grease is affixed to the shaft seal portion.

3 Response Time/Operation Time

Valve opening

The time from the application of voltage to the actuation solenoid valve (XL \square) until 90% of the valve stroke has been completed is the valve opening response time. Valve opening operation time indicates the time from the start of the stroke until 90% of movement has been completed. Both of these become faster as the operating pressure is increased.

Valve closing

The time from the cut off of power to the actuation solenoid valve (XL□) until 90% of the valve return stroke has been completed is the valve closing response time. Valve closing operation time indicates the time from valve opening until 90% of return movement has been completed. Both of these become slower as the operating pressure is increased.

4 Molecular Flow Conductance

Orifice conductance

In the case of a $\emptyset A$ (cm²) hole in an ultra-thin plate, conductance "C" results from "V", the average velocity of the gas; "F", the gas constant; "M", the molecular weight; and "T", the absolute temperature. From the formula C=11.6A (L/sec) at an air tempearture of $20^{\circ}C$.




Cylinder conductance

With length "L" (cm) and diameter "D" (cm) where L>>D, from the formula C= $(2\pi RT/M)^{0.5}D^3/6L$, the conductance C=12.1 D³/L (L/sec) at an air temperature of 20°C.

Short pipe conductance

From the Clausing's factor "K" and hole conductance "C" in Graph 1. (Clausing's factor drawing), the short pipe conductance C_K is easily found as C_K =KC.



Conductances combined

When each of the separate conductances are given as C_1 , C_2 and C_1 , the composite conductance ΣC is expressed as: $\Sigma C=1/(1/C_1+1/C_2+\cdots+1/C_1)$ when in series, and $\Sigma C=C_1+(C_2+\cdots+C_1)$, when in parallel.

5 He Leakage

Surface leakage

This leakage occurs between surfaces of the sealing and the seal material. In the case of elastic body seal (elastomer), leakage values are confirmed within minutes of operation. Leakage rate is measured at room temperature (20 to 30°C).

Gas permeation

This is leakage caused by diffusion through the elastic body seal material. As temperature increases, the diffusion rate increases, and in many cases, becomes greater than surface leakage. The diffusion rate is proportional to the cross-sectional area (cm²) of the seal, and inversely proportional to the seal width (distance between the atmosphere and the vacuum side). In the case of metal gaskets, only hydrogen diffusion should be considered.

6 Outgassing


This is a phenomenon where gases adhered or adsorbed to the metallic surface or its inside parts are released from the surface and drawn into the vacuum according to the pressure decrease. The smoothness of the surface and closeness of the oxidized layer can effect (increase/decrease) this.

7 Ultimate Pressure

Ultimate pressure P (Pa) is P=Q/S, where the sum of Weight flow rates for outgassing (Qg) and leakage Q(L) is Q(Pa-m³/s), and the exhaust speed is S(m³/s). The ultimate pressure is measured with Qg, Q(L)S shown as above, and the ultimate pressure of the pump itself. In the case of very low pressure, the exhaust characteristics of the actual pump can be the limiting factor. In particular, a deterioration of exhaust characteristics due to an unclean pump and invasion of the atmospheric moisture can be the major factor.

8 Exhaust Time (Low/Medium Vacuum)

The time (\triangle t) required to exhaust a chamber at low vacuum with volume V (L), from pressure P1 to P2, using a pump with pumping speed S (L/sec) is \triangle t=2.3(V/S)log(P1/P2). In high vacuum, this is subject to the ultimate pressure limit imposed by outgasing and leakage as characterized above.



9 Baking

Gases such as oxygen and nitrogen, which have a small adsorption activation energy (E) and a short adsorption residence time (r), are evacuated quickly. However, in the case of water, which has a high activation energy, evacuation does not progress quickly unless the temperature (T: absolute temperature) is raised to shorten residence time. This time is characterized as $\tau=0$ exp(E/RT) where R is the ideal gas constant and $\tau0=(approx.)$ 10^{-13} sec.

Residence time of water at 20° C is 5.5×10^{-6} sec, whereas at 150° C, it is 2.8×10^{-8} sec, or about 200 times shorter. The objective of baking is to exhaust water with long adsorption residence time more quickly.

XLA XI

XL\(\

XM□ XY□

D-□ XSA

XVD

XGT

CYV



Be sure to read this before handling the products.

Air Operated Angle Valves/XLA(V), XLC(V), XLD(V), XLF(V), XLG(V) Series

Design

⚠ Warning

All models

- 1. The body material is A6063, the bellows are stainless steel 316L, and other metal seal material is stainless steel 304. Standard seal material in the vacuum section is FKM that can be changed to the other materials (please refer to "How to Order"). Use fluids which are compatible with materials after confirming.
- Select materials for the actuation pressure piping, and heat resistance for fittings that are suitable for the applicable operating temperatures.
- Model with auto switch/XLA(V), XLC(V), XLD(V), XLF(V), XLG(V)
- The switch section should be kept at a temperature no greater than 60°C.
- Model with heater/XLA, XLC, XLD, XLF, XLG
- 1. When using a model with a heater (thermistor), a device should be installed to prevent overheating.
- Model with solenoid valve/XLAV, XLCV, XLDV, XLFV, XLGV
- For models with a solenoid valve, the temperature of the solenoid valve section should be no greater than 50°C.

Selection

⚠ Caution

All models

- For high vacuum valves used in the main exhaust lines of flat panel display manufacturing equipment and other large manufacturing equipment, the XLF(V) or XLG(V) series, employing O-ring seal type for improved durability, is recommended.
- When controlling valve responsiveness, take note of the size and length of piping, as well as the flow rate characteristics of the actuating solenoid valve.
- Actuating pressure should be kept within the specified range.
 0.4 to 0.5 MPa is recommended.
- 4. Use within the limits of the operating pressure range.
- The actuating piston chamber and the bellows chamber [except for XLF(V)/XLG(V)] are directly connected to atmosphere.

Please use in an environment in which dust emissions will not cause problems. (Please consult SMC if the release of dust must be avoided.)

High temperature type/XLA, XLC, XLD, XLF, XLG

 In the case of gases which cause a large amount of deposits, heat the valve body to prevent deposits in the valve.

Mounting

All models

- In high humidity environments, keep valves packaged until the time of installation.
- In case with switches and solenoid valves, secure the lead wires so that they have sufficient slack, without any unreasonable force applied to them.
 The surface of the surface o
- Perform piping so that excessive force is not applied to the flange sections. In case there is vibration of heavy objects or attachments, etc., secure them so that torque is not applied directly to the flanges.

Mounting

- 4. Vibration resistance allows for normal operation up to 30 m/s² (45 to 250 Hz), but continuous vibration may cause a decline in durability. Arrange piping to avoid excessive vibrations or shocks.
- High temperature type (Model/XLA, XLC, XLD, XLF, XLG; Temperature specifications/H0, H2, H3)
- In models with heater (thermistor), take care not to damage the insulation components of the lead wires and connector section.
- 2. The setting temperature for models with heater should be established without a draft or heat insulation. It will change depending on conditions such as heat retaining measures and the heating of other piping. Fine adjustment is not possible.
- When installing heater accessories or mounting a heater, check insulation resistance at the actual operating temperature. A short circuit breaker or fuse should be installed.
- When a valve is to be heated, only the body section should be heated, excluding the bonnet section.
- When a heater is in operation, the entire valve becomes hot. Be careful not to touch it with bare hands, as burns will result.


Piping

- Before mounting, clean the surface of the flange seal and the O-ring with ethanol, etc.
- 2. There is an indentation of 0.1 to 0.2 mm in order to protect the flange seal surface, and it should be handled so that the seal surface is not damaged in any way. When using an outer ring, be sure that the O-ring is compressed sufficiently. (There is basically no problem with the outer ring.)
- 3. Exhaust direction
 - During operation, the direction of the exhaust may be determined freely, but in cases where a flow is generated by the exhaust, a decline in durability may result.

The exhaust direction shown in the figure below (bellows side exhaust) is recommended.

Please take all available precautions, as the life of the equipment is affected by conditions of usage.

Recommended exhaust direction [Vacuum pump connected on bellows side]



4. The valve may not be mounted depending on the piping material type (clamp, etc.). Be sure to check the piping material before use.



Be sure to read this before handling the products.

Air Operated Angle Valves/XLA(V), XLC(V), XLD(V), XLF(V), XLG(V) Series

Maintenance

⚠ Caution

- When removing deposits from a valve, take care not to damage any of its parts.
- Replace the bonnet assembly when the end of its service life is approached.
- If damage is suspected prior to the end of the service life, perform early maintenance.

Maintenance

- **4.** SMC specified parts should be used for service. Refer to "Construction", "Replacement Parts," or "Maintenance Parts."
- When removing valve or exterior seals, take care not to damage the sealing surfaces. When installing the valve seal, be sure that the O-ring is not twisted.

Manual Angle Valve/XLH Series

Design

⚠ Warning

interfere with the material

- 1. The body material is A6063, the bellows are stainless steel 316L, other vacuum parts are stainless steel 304. FKM is the standard seal material for the vacuum part, but other materials may be selected (please refer to How to Order). Please check the material used, and use only fluids that will not
- 2. When using a model with a heater (thermistor), a device should be installed to prevent over heating.

Selection

⚠ Caution

- 1. Use within the limits of the operating pressure range.
- In the case of gases which cause a large amount of deposits, heat the valve body or use a model with heater to prevent deposits in the valve.

Mounting

- In models with heater (thermistor), take care not to damage the insulation components of the lead wires and connector section.
- The setting temperature for models with heater should be established without a draft or heat insulation. It will change depending on conditions such as heat retaining measures and the heating of other piping. Fine adjustment is not possible.
- When installing heater accessories or mounting a heater, check insulation resistance at the actual operating temperature. A short circuit breaker or fuse should be installed.
- When a valve is to be heated, only the body section (excluding handle part) should be heated.
- 5. In high humidity environments, keep valves packaged until the time of installation.6. When a heater is in operation, the entire valve becomes hot. Be
- careful not to touch it with bare hands, as burns will result.

 7. Perform piping so that excessive force is not applied to the flange sections. In case there is vibration of heavy objects or attachments, etc., secure them so that torque is not applied directly to the flanges.

Piping

⚠ Caution

- Before mounting, clean the surface of the flange seal and the O-ring with ethanol, etc.
- 2. There is an indentation of 0.1 to 0.2 mm in order to protect the flange seal surface, and it should be handled so that the seal surface is not damaged in any way. When using an outer ring, be sure that the O-ring is compressed sufficiently. (There is basically no problem with the outer ring.)
- The valve may not be mounted depending on the piping material type (clamp, etc.). Be sure to check the piping material before use.

Maintenance

⚠ Caution

- When removing deposits from a valve, take care not to damage any of its parts.
- Replace the handle assembly when the end of its service life is approached.
- If damage is suspected prior to the end of the service life, perform early maintenance.
- 4. SMC specified parts should be used for service. Refer to "Construction", "Replacement Parts," or "Maintenance Parts."
- When removing valve or exterior seals, take care not to damage the sealing surfaces. When installing the valve seal, be sure that the O-ring is not twisted.

XLA

XL_Q

D-

XSA XVD

XGT

CYV





Be sure to read this before handling the products.

Angle Solenoid Valve/XLS Series

Design

- 1. The body material is A6063, the bellows are stainless steel 316L, the other metal materials used in the vacuum part are 13Cr stainless steel, stainless steel 304, and A2017, and the seal material is FKM. In addition, a fluorinated resin (PFA) is used in the armature assembly of the vacuum part. The valve of the vacuum part has a fluorinated grease coating. Please check the material used, and in the course of maintenance, use only liquids that will not interfere with the material.
- 2. In cases without an operating power supply, the starting voltage is applied for only 0.15 to 0.2 s, and after this, a holding voltage (25% of the starting voltage) must be applied. If not performed properly, this can cause burning of the coil and fire, etc.
- Be certain to install a fuse or short circuit breaker in the power supply circuit.

Selection

⚠ Caution

1. Use within the limits of the operating pressure range

Mounting

⚠ Caution

- In high humidity environments, keep valves packaged until the time of installation.
- 2. Please secure in such a way that the lead wire has sufficient curvature, and that no excessive force is applied to it.

Changing the entry of DIN terminal connector

After separating the terminal block and housing, the cord entry can be changed by attaching the housing in the desired direction (4 directions at 90° intervals).

Piping

- Before mounting, clean the surface of the flange seal and the O-ring with ethanol, etc.
- 2. There is an indentation of 0.1 to 0.2 mm in order to protect the flange seal surface, and it should be handled so that the seal surface is not damaged in any way. When using an outer ring, be sure that the O-ring is compressed sufficiently. (There is basically no problem with the outer ring.)
- The valve may not be mounted depending on the piping material type (clamp, etc.). Be sure to check the piping material before use.

Maintenance

- Replace the core and armature assemblies when the end of their service life is approached.
- If damage is suspected prior to the end of the service life, perform early maintenance.
- **3.** SMC specified parts should be used for service parts. Refer to "Replacement Parts" on back of page 465 for further details.



Be sure to read this before handling the products.

Maintenance Parts

Air operated angle valve/Manual valve



1. When replacing seal materials, please replace bonnet assembly or handle assembly. This may not be applicable in cases where the seal material differs from that used in





Bonnet Assembly, Handle Assembly Component Parts No.: (1)

Temperature						Valve	e size			
Model	specifications	Indicator	16	25	40	50	63	80	100	160
	General use	None	XLA16-30-1	XLA25-30-1	XLA40-30-1	XLA50-30-1	XLA63-30-1	XLA80-30-1	XLA100-30-1	XLA160-30-1
XLA		Yes	XLA16A-30-1	XLA25A-30-1	XLA40A-30-1	XLA50A-30-1	XLA63A-30-1	XLA80A-30-1	XLA100A-30-1	XLA160A-30-1
ALA	High	None	XLA16-30-1H	XLA25-30-1H	XLA40-30-1H	XLA50-30-1H	XLA63-30-1H	XLA80-30-1H	XLA100-30-1H	XLA160-30-1H
	High temperature	Yes	XLA16A-30-1H	XLA25A-30-1H	XLA40A-30-1H	XLA50A-30-1H	XLA63A-30-1H	XLA80A-30-1H	XLA100A-30-1H	XLA160A-30-1H
XLAV	General use	None	XLAV16-30-1	XLAV25-30-1	XLAV40-30-1	XLAV50-30-1	XLAV63-30-1	XLAV80-30-1	XLAV100-30-1	XLAV160-30-1
ALAV	General use	Yes	XLAV16A-30-1	XLAV25A-30-1	XLAV40A-30-1	XLAV50A-30-1	XLAV63A-30-1	XLAV80A-30-1	XLAV100A-30-1	XLAV160A-30-1
XLC	General use	None	XLC16-30-1	XLC25-30-1	XLC40-30-1	XLC50-30-1-1	XLC63-30-1-1	XLC80-30-1-1	XLC100-30-1-1	XLC160-30-1-1
ALC	High temperature	None	XLC16-30-1H	XLC25-30-1H	XLC40-30-1H	XLC50-30-1H-1	XLC63-30-1H-1	XLC80-30-1H-1	XLC100-30-1H-1	XLC160-30-1H-1
XLCV	General use	None	XLCV16-30-1 XLCV25-30-1 XLCV40-30-1		XLCV40-30-1	XLCV50-30-1-1	XLCV63-30-1-1	XLCV80-30-1-1	_	_
	General use	None	XLF16-30-1	XLF25-30-1	XLF40-30-1	XLF50-30-1	XLF63-30-1	XLF80-30-1	XLF100-30-1	XLF160-30-1
XLF		Yes	XLF16A-30-1	XLF25A-30-1	XLF40A-30-1	XLF50A-30-1	XLF63A-30-1	XLF80A-30-1	XLF100A-30-1	XLF160A-30-1
ALF	High temperature	None	XLF16-30-1H	XLF25-30-1H	XLF40-30-1H	XLF50-30-1H	XLF63-30-1H	XLF80-30-1H	XLF100-30-1H	XLF160-30-1H
	temperature	Yes	XLF16A-30-1H	XLF25A-30-1H	XLF40A-30-1H	XLF50A-30-1H	XLF63A-30-1H	XLF80A-30-1H	XLF100A-30-1H	XLF160A-30-1H
XLFV	General use	None	XLFV16-30-1	XLFV25-30-1	XLFV40-30-1	XLFV50-30-1	XLFV63-30-1	XLFV80-30-1	XLFV100-30-1	XLFV160-30-1
ALFV	General use	Yes	XLFV16A-30-1	XLFV25A-30-1	XLFV40A-30-1	XLFV50A-30-1	XLFV63A-30-1	XLFV80A-30-1	XLFV100A-30-1	XLFV160A-30-1
XLD	General use			XLD25-30-1	XLD40-30-1	XLD50-30-1	XLD63-30-1	XLD80-30-1	XLD100-30-1	XLD160-30-1
ALD	High temperature	Standard	_	XLD25-30-1H	XLD40-30-1H	XLD50-30-1H	XLD63-30-1H	XLD80-30-1H	XLD100-30-1H	XLD160-30-1H
XLDV	General use			XLDV25-30-1	XLDV40-30-1	XLDV50-30-1	XLDV63-30-1	XLDV80-30-1	XLDV100-30-1	XLDV160-30-1
XLG	General use	None	XLG16-30-1	XLG25-30-1	XLG40-30-1	XLG50-30-1-1	XLG63-30-1-1	XLG80-30-1-1	XLG100-30-1-1	XLG160-30-1-1
	High temperature	None	XLG16-30-1H	XLG25-30-1H	XLG40-30-1H	XLG50-30-1H-1	XLG63-30-1H-1	XLG80-30-1H-1	XLG100-30-1H-1	XLG160-30-1H-1
XLGV	General use	None	XLGV16-30-1	XLGV25-30-1	XLGV40-30-1	XLGV50-30-1	XLGV63-30-1	XLGV80-30-1	_	_
XLH	Standard	Standard	XLH16-30-1	XLH25-30-1	XLH40-30-1	XLH50-30-1		-	_	_

Note 1) In cases where the valve seal material is other than the standard (FKM: includes Compound no. 1349-80; made by Mitsubishi Cable Industries. Inc.), please add suffix symbol for seal material (Refer to the Note 2) An auto switch magnet is not attached. In cases where an auto was where an auto was with magnet is not attached. In cases where an auto was with magnet is not attached. In cases where an auto was with magnet is not attached. In cases where an auto was with magnet is attached, please and "Allof" (Mg/ Mg/ CLC/LG with a size of 50 or more) at the end of the part number. (Not available Not 9) Auto with magnet is not attached. When a set including auto switch and solenoid valve is required, please add the symbols after the auto switch in "How to Order" at the end of the part number.

Exterior Seal. (M) Valve Seal. S Valve Seal Assembly

	kichiol deal, (m) valve deal, d valve deal Addenibly									
Model	Description		Valve size							
Iviodei	Construction No.	Material	16	25	40	50	63	80	100	160
XLA(V) XLC(V)	Exterior seal	Standard	AS568-025V	AS568-030V	AS568-035V	AS568-039V	AS568-043V	AS568-045V	AS568-050V	AS568-167V
XLD(V) XLH	3	Special	AS568-025□	AS568-030□	AS568-035□	AS568-039□	AS568-043□	AS568-045□	AS568-050□	AS568-167□
XLF(V)	Exterior seal	Standard	XLF16-6	XLF25-6	AS568-035V	AS568-039V	AS568-043V	AS568-045V	AS568-050V	AS568-167V
XLG(V)	3	Special	_	-	AS568-035□	AS568-039□	AS568-043□	AS568-045□	AS568-050□	AS568-167□
Common	Valve seal	Standard	B2401-V15V	B2401-V24V	B2401-P42V	AS568-227V	AS568-233V	B2401-V85V	AS568-349V	B2401-G155V
Common	2	Special	B2401-V15□	B2401-V24□	B2401-P42□	AS568-227□	AS568-233□	B2401-V85□	AS568-349□	B2401-G155□
VI 540	S valve seal assembly	Standard	_	AS568-009V	XLD40-2-9-1A AS568-016V	XLD50-2-9-1A AS568-016V	XLD63-2-9-1A	XLD80-2-9-1A	XLD100-2-9-1A	XLD160-2-9-1A AS568-020V
XLD(V)	4	Special	_	AS568-009□	XLD40-2-9-1A□ AS568-016□	XLD50-2-9-1A□ AS568-016□	XLD63-2-9-1A□	XLD80-2-9-1A□	XLD100-2-9-1A□	XLD160-2-9-1A□ AS568-020□

Note 1) In cases where the seal material is other than the standard (FKM; includes Compound no. 1349-80; made by Mitsubishi Cable Industries, Inc.), please add suffix symbol for seal material (Refer to the table 1 on page 465-1) at the end of the part number (the place of □).

Note 2) Refer to "Construction" of each series for component parts numbers.

Solenoid Valve/Plate Assembly

Solellolu v	Soletion Valve/Flate Assembly										
Model	Description				Valve	e size					
Wodel	Construction No.	16	25	40	50	63	80	100	160		
XLAV	Solenoid valve ®		SYJ31	19-□□		SYJ519-□□					
ALAV	Plate assembly 9		XLAV1	16-90-2		XLAV63-90-1					
XLFV	Solenoid valve 10		SYJ319-□□			SYJ519-□□					
ALFV	Plate assembly 11		XLAV16-90-2			XLAV63-90-1					
XLCV	Solenoid valve ®	SYJ3190-□□ (single)			SY3120-□□-C4 (single)						
XLGV	Soleriold valve (6)	SY	J3290-□□ (doub	ble)	SY3220-□□-C4 (double)				_		
ALGV	Plate assembly 9		XLCV16-90-1			_			_		
	Initial exhaust solenoid valve 11	_				V114-□□					
XLDV	Main exhaust solenoid valve 12	_	— V114-□□			SYJ314-□□					
	Plate assembly 13	_	— XLDV25-90-2			XLDV40-90-2					

Note 1) The -t at the end of the solenoid valve part number is the selection symbol for voltage, electrical entry, and other specifications. For details about selection symbols, refer to the Web Catalog. Note 2) The plate assembly includes the plate, gasket, and mounting screws. Note 3) The plate assembly includes the plate, gasket, and mounting screws. Note 3) Feler to 'Construction' of each series for component parts numbers.

XL□O XM XY□ D-□

XSA

XVD

XGT CYV



Be sure to read this before handling the products.

Maintenance Parts

Table 1: Seal Material Symbol

Symbol	-XN1	-XP1	-XQ1	-XR1	-XR2	-XR3	-XS1	-XT1	-XU1
Seal material	EPDM	Barrel Perfluoro®	Kalrez®	Chemraz [®]		VMQ	FKM for Plasma	ULTIC ARMOR®	
Compound no.	2101-80*	70W	4079	SS592	SS630	SSE38	1232-70*	3310-75*	UA4640

Note 1) This may not be applicable in cases where the seal material differs from that used in the products, although the seal material is changed.

* Produced by Mitsubishi Cable Industries, Ltd.

Barrel Perfluoro® is a registered trademark of Matsumura Oil Co., Ltd.

Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

Chemraze is a registered trademark of Greene, Tweed Technologies, Inc.

ULTIC ARMOR® is a registered trademark of Nippon Valqua Industries, Ltd.

Replacement Heaters

Temperature	Valve size									
specification	25	40	50	63	80	100	160			
H4 (100°C heater)	_	XLA25-60S-1	XLA25-60S-1	XLA25-60S-2	XLA25-60S-3	XLA25-60S-2 (2 sets)	XLA25-60S-2 (3 sets)			
H5 (120°C heater)	XLA25-60S-1	XLA25-60S-2	XLA25-60S-2	XLA25-60S-3	XLA25-60S-2 (2 sets)	XLA25-60S-2 (3 sets)	XLA25-60S-2 (4 sets)			

Example) In the case of a replacement heater for XL□-80-H5, two sets of XLA25-80M-2 are required.

Angle Solenoid Valve

Construction No.	Description	XLS-16-□□	XLS-16-P□□	XLS-25-□□	XLS-25-P□□	
2	Coil assembly	XLS16-20-®G, C, T, D	XLS16-20-P®G	XLS25-20-⊞G, C, T, D	XLS25-20-P⊞G	
6	Core assembly	XLS16	5-30-1	XLS25-30-1		
4	Armature assembly	XLS16	5-30-2	XLS2	5-30-2	
3-1	O-ring	AS568	I-018V	AS568	3-018V	
3-2	O-ring	AS568	I-025V	AS568	3-030V	

Note 1) In case of coil assembly, please enter voltage symbol in 🗉 .
"G" after 🖹 is grommet, "C" for conduit, "T" for terminal, and "D" for DIN.
Note 2) Refer to "Construction" for component parts numbers.




- Improved durability of bellows (Flange sizes 100 and 160)
- Service life of two million cycles^{*1}
 - *1 The service life is based on SMC's testing. Refer to the operation manual for details


Space required for equipment can be reduced

Without restriction on exhaust direction (two ways: from valve element side to bellows side and vice versa)

Increased flexibility of mounting orientation

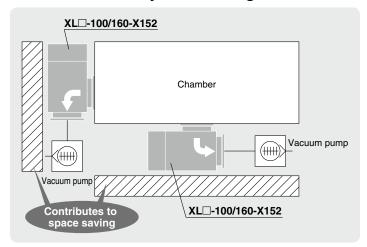

With restriction on exhaust direction (one way only: from valve element side to bellows side)






XLA-□-**X152**

■ Lightweight, Compact

Large conductance, small body, excellent resistance against fluorine corrosion (body)



Model	A [mm]	B [mm]	Weight [kg]	Conductance [L/s]
XLA-100-X152	108	300	10.6	300
XLA-160-X152	138	315	18.5	800

Variations

		Operating	Leakage	[Pa·m³/s]	Flang	e size		Op	tion	
Model	Valve type	pressure [Pa(abs)]	Internal*1	External*1	100	160	Switch	Heater	Indicator	High-temperature type
XLA-100/160-X152	Single acting (N.C.)	10 ⁻⁶ to	10 ⁻¹⁰	10 ⁻¹¹	•	•	•	•	•	•
XLC-100/160-1-X152	Double acting	pressure	10	10	•	_	-	-		-

*1 When the standard seal material (FKM) is used

XLA/C-100/160(-1)-X152




Aluminum High Vacuum Angle Valve Normally Closed, Bellows Seal



XLA-100/160-X152

How to Order



Flange size

Size
100
160

2 Flange type

Symbol	Туре
Nil	KF (NW)
D	K (DN)

4 Temperature specifications/Heater


Symbol		Temperature	Heater		
Nil		5 to 60°C —			
High-	H0				
temperature	H4	5 to 150°C	With 100°C heater		
type	H5		With 120°C heater		

6 Number of auto switches/Mounting position

Symbol Quantity		Mounting position		
Nil	Without auto switch	_		
Α	2	Valve open/closed		
В	1	Valve open		
С	1	Valve closed		

3 Indicator/Pilot port direction

Symbol	Indicator	Pilot port direction		
Nil	Without indicator	Flange side		
Α		Flange side		
F	With indicator	Left flange surface		
G	vvitri indicator	Rear flange surface		
J		Right flange surface		
K		Left flange surface		
L		Rear flange surface		
M		Right flange surface		
IVI		Right liange surface		



Auto switch type

Symbol	Model	Remarks
Nil	_	Without auto switch (without magnet)
M9N(M)(L)(Z)	D-M9N(M)(L)(Z)	
M9P(M)(L)(Z)	D-M9P(M)(L)(Z)	Solid state auto switch
M9B(M)(L)(Z)	D-M9B(M)(L)(Z)	
A90(L)	D-A90(L)	Reed auto switch
A93(M)(L)(Z)	D-A93(M)(L)(Z)	need auto switch
M9//	_	Without auto switch (with magnet)

- * Auto switches shown above cannot be mounted on the high-temperature type. For the high-temperature type, a semi-standard product that uses the heat resistant auto switch D-F7NJ is available. For details, please contact SMC.
- Standard lead wire length is 0.5 m. Add L to the end of the part number for 3 m, M for 1 m, and Z for 5 m.
 Example) -M9NL

Body surface treatment/Seal material and changed parts

· Body surface treatment

Symbol	Surface treatment	
Nil External: Hard anodized Internal: Raw material		
Α	External: Hard anodized Internal: Oxalic acid anodized	

· Seal material

Symbol	Seal material	Compound no.
Nil	FKM	1349-80*1
N1	EPDM	2101-80*1
P1	Barrel Perfluoro®	70W
Q1	Kalrez [®]	4079
R1		SS592
R2	Chemraz [®]	SS630
R3		SSE38
S1	VMQ	1232-70*1
T1	FKM for Plasma	3310-75* ¹
U1	ULTIC ARMOR®	UA4640

*1 Produced by MITSUBISHI CABLE INDUSTRIES, LTD.

· Part with changed seal material and leakage

Cymbol	Changed	Leakage [Pa·m³/s or less]*1			
Symbol	part*2	Internal	External		
Nil	None	1.3 x 10 ⁻¹⁰ (FKM)	1.3 x 10 ⁻¹¹ (FKM)		
Α	2,3	1.3 x 10 ^{−8}	1.3 x 10 ^{−9}		
В	2	1.3 x 10 ⁻⁸	1.3 x 10 ⁻¹¹ (FKM)		
С	3	1.3 x 10 ⁻¹⁰ (FKM)	1.3 x 10 ^{−9}		

- *1 Values at normal temperature, excluding gas permeation
- *2 Refer to Construction on page 2 for changed part. Number corresponds with the parts number on the construction drawing.

To order something other than Nil (standard), followed by each symbol for body surface treatment, seal material, and then changed part.

Example) XLA-100-M9NA-AN1A-X152

Barrel Perfluoro® is a registered trademark of MATSUMURA OIL Co., Ltd. Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

Chemraz® is a registered trademark of Greene, Tweed Technologies, Inc. ULTIC ARMOR® is a registered trademark of NIPPON VALQUA INDUSTRIES, LTD.




Specifications

Model		XLA-100-X152 XLA-160-X1				
Valve type		Normally closed (Pressurize to open, Spring seal)				
Fluid		Inert gas under vacuum				
Operating tem	perature	5 to 60 (High-temper	5 to 60 (High-temperature type: 5 to 150)			
Operating pr [Pa(abs)]	ressure	1 x 10 ⁻⁶ to atmo	spheric pressure			
Conductanc [L/s]*1	е	300	800			
Leakage	Internal	For standard seal material (FKM): 1.3 x 10 ⁻¹⁰ at normal temperature, excluding gas permeation				
[Pa·m³/s]	External	For standard seal material (FKM): 1.3 x 10 ⁻¹¹ at normal temperature, excluding gas permeation				
Flange type		KF (NW), K (DN)				
Principal materials		Body: Aluminum alloy Bellows: Stainless steel Chief part: Stainless steel, FKM (standard seal material)				
Surface treatment		External: Hard anodized Internal: Raw material				
Pilot pressure [MPa(G)]		0.4 to 0.7				
Pilot port size		Rc1/8	Rc1/4			
Weight [kg]		10.6 18.5				

- *1 Conductance is the value for the elbow with the same dimensions.

 * For valve heater specifications, refer to Common Option [1] Heater
- For valve heater specifications, refer to Common Option [1] Heater on page 5.

Construction/Operation

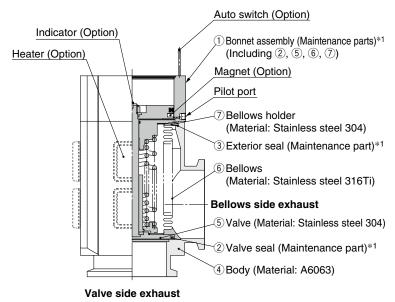

*1 Refer to Maintenance Parts on page 6.

<Working principle>

By applying pilot pressure from the pilot port, the piston-coupled valve overcomes the force of the spring or operating force by pressure, and the valve opens.

<Option>

Auto switch: The magnet activates the auto switch. With 2 auto switches, the open and closed positions are detected, and with 1 auto switch, either the open

and closed positions are detected, and with 1 auto switch, either the open or closed position is detected. The temperature range is only available for general use (5 to 60° C).

Heater : Heating is performed simply using thermistors. The valve body can be heated to approximately 100 or 120°C, depending on the size of the valve.

The type and number of thermistors to be used will vary depending on the size and setting temperature. For the high-temperature type, the bonnet assembly is a heat-resistant structure. This does not apply in cases where


a solenoid valve is attached.

Indicator : When the valve is open, an orange marker appears in the center of the

name plate

Dimensions

XLA-100/160-X152: Air operated

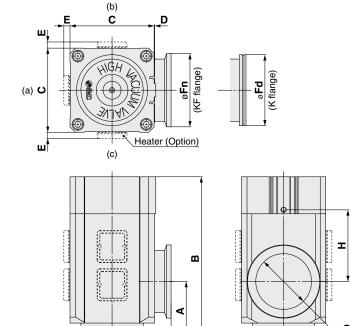


									[mm]
Model	Α	В	С	D	E*1	Fn	Fd	G	Н
XLA-100-X152	108	300	154	3	11	134	130	102	131
XLA-160-X152	138	315	200	3	11	190	180	153	112

- *1 The E dimension applies when the heater option is included. (Lead wire length: Approx. 1 m)
- (a), (b), (c) in the above drawing indicate heater mounting positions.
 Moreover, heater mounting positions will differ depending on the type of heater.
 For details, refer to Common Option [2] Mounting position of the heater on page 5.



Aluminum High Vacuum Angle Valve Double Acting, Bellows Seal XLC-100/160-1-X152

How to Order



1 Flange size

Size	
100	
160	

Plange type

Symbol	Туре
Nil	KF (NW)
D	K (DN)

4 Temperature specifications/Heater


Symbol		Temperature	Heater		
Nil		5 to 60°C			
High-	H0		_		
temperature	H4	5 to 150°C	With 100°C heater		
type	H5		With 120°C heater		

6 Number of auto switches/Mounting position

Symbol	Quantity	Mounting position
Nil	Without auto switch	_
Α	2	Valve open/closed
В	1	Valve open
С	1	Valve closed

Pilot port direction

Symbol	Pilot port direction
Nil	Flange side
K	Left flange surface
L	Rear flange surface
M	Right flange surface



5 Auto switch type

Symbol	Model	Remarks
Nil	_	Without auto switch (without magnet)
M9N(M)(L)(Z)	D-M9N(M)(L)(Z)	
M9P(M)(L)(Z)	D-M9P(M)(L)(Z)	Solid state auto switch
M9B(M)(L)(Z)	D-M9B(M)(L)(Z)	
A90(L)	D-A90(L)	Reed auto switch
A93(M)(L)(Z)	D-A93(M)(L)(Z)	need adio Switch
M9//	_	Without auto switch (with magnet)
		•

- * Auto switches shown above cannot be mounted on the high-temperature type. For the high-temperature type, a semi-standard product that uses the heat resistant auto switch D-F7NJ is available. For details, please contact SMC.
- Standard lead wire length is 0.5 m. Add L to the end of the part number for 3 m, M for 1 m, and Z for 5 m.
 Example) -M9NL

7 Body surface treatment/Seal material and changed parts

· Body surface treatment

Symbol	Surface treatment
Nil	External: Hard anodized Internal: Raw material
Α	External: Hard anodized Internal: Oxalic acid anodized

· Seal material

Symbol	Seal material	Compound no.
Nil	FKM	1349-80* ¹
N1	EPDM	2101-80* ¹
P1	Barrel Perfluoro®	70W
Q1	Kalrez [®]	4079
R1		SS592
R2	Chemraz [®]	SS630
R3		SSE38
S1	VMQ	1232-70*1
T1	FKM for Plasma	3310-75* ¹
U1	ULTIC ARMOR®	UA4640

*1 Produced by MITSUBISHI CABLE INDUSTRIES, LTD.

· Part with changed seal material and leakage

Cumbal	Changed	Leakage [Pa-	m ³ /s or less]*1
Symbol	part*2	Internal	External
Nil	None	1.3 x 10 ⁻¹⁰ (FKM)	1.3 x 10 ⁻¹¹ (FKM)
Α	2,3	1.3 x 10 ^{−8}	1.3 x 10 ⁻⁹
В	2	1.3 x 10 ⁻⁸	1.3 x 10 ⁻¹¹ (FKM)
С	3	1.3 x 10 ⁻¹⁰ (FKM)	1.3 x 10 ⁻⁹

- *1 Values at normal temperature, excluding gas permeation
- *2 Refer to Construction on page 4 for changed part. Number corresponds with the parts number on the construction drawing.

To order something other than Nil (standard), followed by each symbol for body surface treatment, seal material, and then changed part.

Example) XLC-100-1M9NA-AN1A-X152

Barrel Perfluoro® is a registered trademark of MATSUMURA OIL Co., Ltd. Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

Chemraz® is a registered trademark of Greene, Tweed Technologies, Inc. ULTIC ARMOR® is a registered trademark of NIPPON VALQUA INDUSTRIES, LTD.




Specifications

		VI 0 100 1 VIII	VI A 122 1 VI = 2	
Mode		XLC-100-1-X152	XLC-160-1-X152	
Valve type		Double acting (Dual operation), Pressurize to open/close		
Fluid		Inert gas un	der vacuum	
Operating tem	perature	5 to 60 (High-temper	rature type: 5 to 150)	
Operating pr [Pa(abs)]	ressure	1 x 10 ⁻⁶ to atmos	spheric pressure	
Conductance [L/s]*1		300	800	
Leakage	Internal	For standard seal material (FKM): 1.3 x 10 ⁻¹⁰ at normal temperature, excluding gas permeation		
[Pa·m³/s]	External	For standard seal material (FKM): 1.3 x 10 ⁻¹¹ at normal temperature, excluding gas permeation		
Flange type		KF (NW), K (DN)		
Principal ma	iterials	Body: Aluminum alloy Bellows: Stainless steel Chief part: Stainless steel, FKM (standard seal material)		
Surface treatment		External: Hard anodized Internal: Raw material		
Pilot pressure [MPa(G)]		0.4 to 0.6		
Pilot port siz	ze	Rc1/8	Rc1/4	
Weight [kg]		8.7	14.5	

- *1 Conductance is the value for the elbow with the same dimensions. * For valve heater specifications, refer to Common Option [1] Heater
- For valve heater specifications, refer to Common Option [1] Heate on page 5.

Construction/Operation

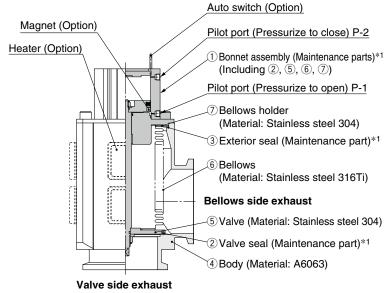

*1 Refer to Maintenance Parts on page 6.

<Working principle>

By applying pilot pressure from the pilot port P-1, the piston-coupled valve overcomes the operating force by the pressure, and the valve opens. (Pilot port P-2 is open.) Alternatively, by applying pilot pressure to pilot port P-2, the valve closes. (Pilot port P-1 is open.)

<Option>

Auto switch: The magnet activates the auto switch. With 2 auto switches, the open and closed positions are detected, and with 1 auto switch, either the open or closed position is detected. The temperature range is only available for general use (5 to 60°C).

Heater


: Heating is performed simply using thermistors. The valve body can be heated to approximately 100 or 120°C, depending on the size of the valve. The type and number of thermistors to be used will vary depending on the size and setting temperature. For the high-temperature type, the bonnet assembly is a heat-resistant structure. This does not apply in cases where a solenoid valve is attached.


Indicator


: When the valve is open, an orange marker appears in the center of the name plate.

Dimensions

XLC-100/160-1-X152: Air operated







											[mm]
Model	Α	В	С	D	E*1	Fn	Fd	G	Н	J	K
XLC-100-1-X152	108	317.5	154	55	11	134	130	102	139	58	9
XLC-160-1-X152	138	339	200	65	11	190	180	153	124	62	12.5

- *1 The E dimension applies when the heater option is included. (Lead wire length: Approx. 1 m)
- * (a), (b), (c) in the above drawing indicate heater mounting positions.
 Moreover, heater mounting positions will differ depending on the type of heater.
 For details, refer to Common Option [2] Mounting position of the heater on page 5.



XL□-100/160(-1)-X152 Common Option

1 Heater


Valve heaters are common for models XLA and XLC. Power consumption specifications are shown below.

Model			XL□-100(-1)-X152	XL□-160(-1)-X152	
Rated voltage for heater			90 to 240 VAC		
	Heater assembly quantity		2	3	
Heater assembly quantity used	H4 100°C	100 V	800/220	1200/350	
Heater power W (Nominal value)		200 V	3200/220	4800/350	
Inrush/Power consumption	Heater assembly quantity		3	4	
(Option symbol, Operating voltage)	H5	100 V	1200/300	1600/400	
	120°C	200 V	4800/300	6400/400	

^{*} The inrush current of the heater flows for several tens of seconds when using 100 V, while it flows for several seconds when using 200 V. However, this inrush current will decrease shortly after.


* Refer to Maintenance Parts on page 6 for further details regarding quantity and type.

Inrush Current Flow Time (Reference)

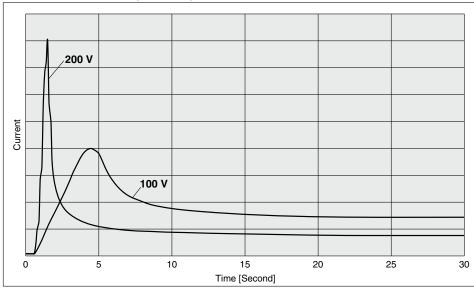

2 Mounting Position of the Heater

Heater symbol	XL□-100(-1)-X152	XL□-160(-1)-X152
H4 (100°C)	(b), (c)	(a), (b), (c)
H5 (120°C)	(a), (b), (c)	(b), (c)





When the valve uses multiple heater assemblies, do not turn on the power to each heater assembly at the same time. Turn on the power to each heater assembly one-by-one at intervals of 30 sec. since the inrush current is large.

^{*} The heater temperature will decrease several % from the start of heating and then becomes stable. (The heater temperature may decrease approximately 5 to 10% due to individual differences.)



XL□-100/160(-1)-*X*152 **Specific Product Precautions**

Be sure to read this before handling the products.

Maintenance Parts

Air operated angle valve



Caution 1. Replace the bonnet assembly when changing the seal material. It may not be applicable when a seal material different from the current one has been chosen.



Bonnet Assembly

Model	Madel Temperature		Valve size			
Model	specification	Indicator	100	160		
	General use	None	XLA100-30-1-X152	XLA160-30-1-X152		
XLA-X152	General use	Yes	XLA100A-30-1-X152	XLA160A-30-1-X152		
ALA-A 152	1 link 4 t	None	XLA100-30-1H-X152	XLA160-30-1H-X152		
	High-temperature		XLA100A-30-1H-X152	XLA160A-30-1H-X152		
VI C 1 V1E0	General use	None	XLC100-30-1-1-X152	XLC160-30-1-1-X152		
XLC-1-X152	High-temperature	None	XLC100-30-1H-1-X152	XLC160-30-1H-1-X152		

- * In cases where the material of the valve seal is anything other than the standard (FKM: Compound no. 1349-80: made by MITSUBISHI CABLE INDUSTRIES, LTD.), add the symbol for the seal material (see Table 1) to the part number.
- * An auto switch magnet is not installed. In cases where an auto switch magnet is installed, add -M9// to the part number. (Not available for the high-temperature type)
- An auto switch is not attached. When a product with an auto switch is required, add the symbol for the auto switch

Example) In cases where the material of the valve seal is changed: XLA100-30-1-N1-X152

Exterior Seal/Valve Seal

Model	Description	Material	Valve size		
Model	(Construction no.)	Material	100	160	
	Exterior seal	Standard	AS568-050V	AS568-167V	
XLA-X152	3	3	Special	AS568-050□	AS568-167□
XLC-1-X152	Valve seal	Standard	AS568-349V	B2401-G155V	
2	2	Special	AS568-349□	B2401-G155□	

^{*} In cases where the seal material is anything other than the standard (FKM: Compound no. 1349-80: made by MITSUBISHI CABLE INDUSTRIES, LTD.), add the symbol for the seal material (see Table 1) to the end of the part number (in place of \square).

Table 1: Symbol for Seal Material

Symbol	-XN1	-XP1	-XQ1	-XR1	-XR2	-XR3	-XS1	-XT1	-XU1
Seal material	EPDM	Barrel Perfluoro®	Kalrez®	Chemraz [®]			VMQ	FKM for Plasma	ULTIC ARMOR®
Compound no.	2101-80*1	70W	4079	SS592	SS630	SSE38	1232-70*1	3310-75*1	UA4640

^{*} It may not be applicable when a seal material different from the current one has been chosen.

Chemraz® is a registered trademark of Greene, Tweed Technologies, Inc.

*1 Produced by MITSUBISHI CABLE INDUSTRIES, LTD.

Barrel Perfluoro® is a registered trademark of MATSUMURA OIL Co., Ltd. Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

ULTIC ARMOR® is a registered trademark of NIPPON VALQUA INDUSTRIES, LTD.

Replacement Heaters

Temperature	Valve size				
specification	100	160			
H4 (100°C heater)	XLA25-60S-2 (2 sets)	XLA25-60S-2 (3 sets)			
H5 (120°C heater)	XLA25-60S-2 (3 sets)	XLA25-60S-2 (4 sets)			

Example) For the XL□-100H5-X152 with a heater, 3 sets of the XLA25-60S-2 are required.



Refer to the Construction section of each series for component part numbers.

↑ Safety Instructions Be sure to read the "Handling Precautions for SMC Products" (M-E03-3) and "Operation Manual" before use. **SMC** Corporation

4-14-1, Sotokanda, Chiyoda-ku, Tokyo 101-0021, JAPAN Phone: 03-5207-8249 Fax: 03-5298-5362 http://www.smcworld.com © 2018 SMC Corporation All Rights Reserved

Akihabara UDX 15F