





3-8

Single Pole Distribution Blocks



7-8

Power Solar Blocks



9-13

Two and Four Pole Distribution Blocks



14-19

Power Blocks & Terminals



20-25

Power Terminals



26-27

Four Pole Distribution Blocks & Insulating Supports



28-29

Disconnectable PEN System



30

Spacers & Accessories

WARNING

ERICO products shall be installed and used only as indicated in ERICO's product instruction sheets and training materials. Instruction sheets are available at www.erico.com and from your ERICO customer service representative. Improper installation, misuse, misapplication or other failure to completely follow ERICO's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death.

WARRANTY

ERICO products are warranted to be free from defects in material and workmanship at the time of shipment. NO OTHER WARRANTY, WHETHER EXPRESS OR IMPLIED (INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE), SHALL EXIST IN CONNECTION WITH THE SALE OR USE OF ANY ERICO PRODUCTS. Claims for errors, shortages, defects or nonconformities ascertainable upon inspection must be made in writing within 5 days after Buyer's receipt of products. All other claims must be made in writing to ERICO within 6 months from the date of shipment or transport. Products claimed to be nonconforming or defective must, upon ERICO's prior written approval in accordance with its standard terms and procedures governing returns, promptly be returned to ERICO for inspection. Claims not made as provided above and within the applicable time period will be barred. ERICO shall in no event be responsible if the products have not been stored or used in accordance with its specifications and recommended procedures. ERICO will, at its option, either repair or replace nonconforming or defective products for which it is responsible or return the purchase price to the Buyer. THE FOREGOING STATES BUYER'S EXCLUSIVE REMEDY FOR ANY BREACH OF ERICO WARRANTY AND FOR ANY CLAIM, WHETHER SOUNDING IN CONTRACT, TORT OR NEGLIGENCE, FOR LOSS OR INJURY CAUSED BY THE SALE OR USE OF ANY PRODUCT.

LIMITATION OF LIABILITY

ERICO excludes all liability except such liability that is directly attributable to the willful or gross negligence of ERICO's employees. Should ERICO be held liable its liability shall in no event exceed the total purchase price under the contract. ERICO SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS OF BUSINESS OR PROFITS, DOWNTIME OR DELAY, LABOR, REPAIR OR MATERIAL COSTS OR ANY SIMILAR OR DISSIMILAR CONSEQUENTIAL LOSS OR DAMAGE INCURRED BY BUYER.

Pictures, drawings and technical descriptions of this catalogue are not contractual. ERICO reserves the right to change at any time and without advanced notice, its manufacturing according to the evolution of standards/techniques.


UNITED KINGDOM
52 Milford Road
Reading, Berkshire RG1 8LJ
United Kingdom
Phone 0808 2344 695
Fax 0808 2344 676

NORTH AMERICA
34600 Solon Road
Solon, Ohio 44139
United States of America
Phone 1-800-497-4304
Fax 1-800-944-4296

OTHER COUNTRIES
B.P. 31 - 42161 Andrézieux
Cedex
France
Phone 00 33 477 36 56 56
Fax 00 33 477 36 18 10

Single Pole Distribution Blocks

Compact

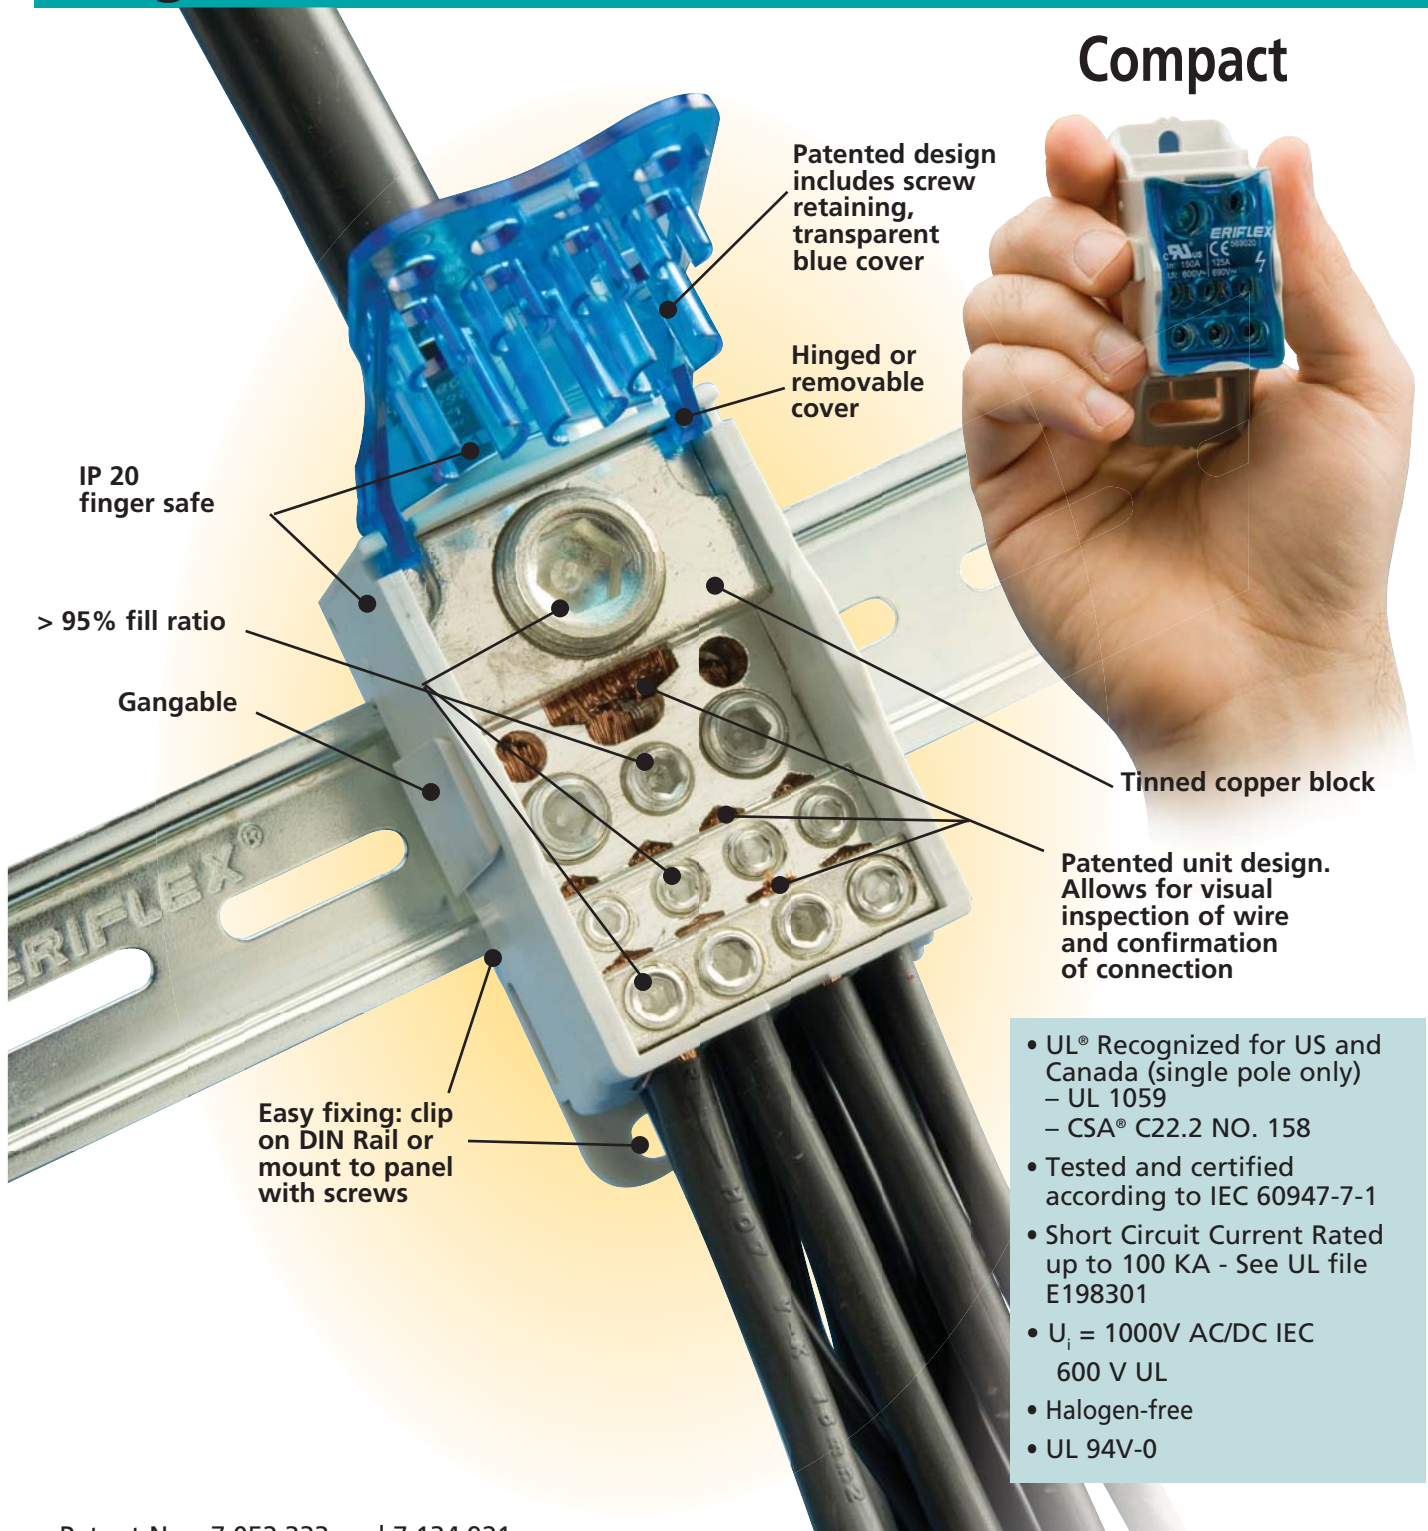

- UL® Recognized for US and Canada (single pole only)
 - UL 1059
 - CSA® C22.2 NO. 158
- Tested and certified according to IEC 60947-7-1
- Short Circuit Current Rated up to 100 KA - See UL file E198301
- $U_i = 1000V$ AC/DC IEC
600 V UL
- Halogen-free
- UL 94V-0

Patent Nos: 7,052,333 and 7,134,921



Single Pole Distribution Blocks




- Visual inspection of wire and confirmation of connection
- Halogen-free
- IP 20 finger safe
- 95% fill ratio
- Self extinguishing: UL94 V-0
- Tinned copper blocks: Copper or Aluminum Cable
- Short circuit current rated up to 100 KA - See UL file E198301
- RoHS Compliant

UD 80 A 80 A - IEC 85 Amp -

- Modular: keeping only one input, the blocks can be supplied in parallel using a jumper wire. Easily double the neutral.

* CENTER TO CENTER DRILLING: 54 mm (2.12")




- I = 80 A IEC
I = 85 A UL/CSA
- Icw KA rms 1s : 3
 - IPk KA : 22
 - Ui : 1000 V AC/DC IEC
 - Vin : 600 V UL

UDJ 125 A 125 A - IEC 150 Amp -

- Modular: keeping only one input, the blocks can be supplied in parallel using a jumper. Easily double the neutral.

I = 125 A IEC
I = 150 A UL/CSA

- Icw KA rms 1s : 4.2
- IPk KA : 30
- Ui : 1000 V AC/DC IEC
- Vin : 600 V UL

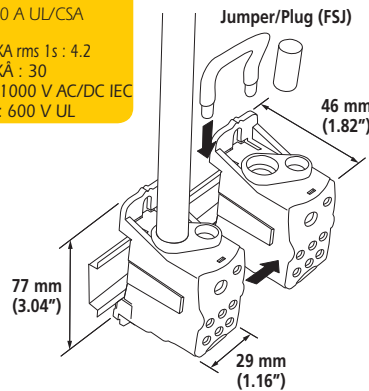


* CENTER TO CENTER DRILLING: 64 mm (2.53")

UDJ 160 A 160 A - IEC 200 Amp -

- Modular: keeping only one input, the blocks can be supplied in parallel using a jumper. Easily double the neutral.

I = 160 A IEC
I = 200 A UL/CSA

- Icw KA rms 1s : 11.8
- IPk KA : 30
- Ui : 1000 V AC/DC IEC
- Vin : 600 V UL

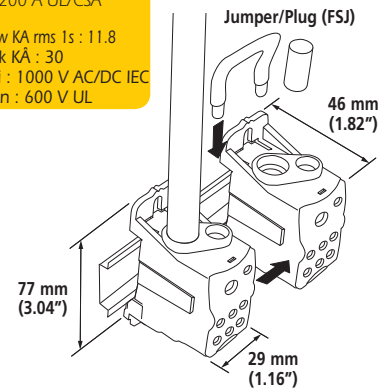

* CENTER TO CENTER DRILLING: 64 mm (2.53")

METRIC	mm²		Ø		I(N.m)
	6...16	x1	6.8		3,5
	2,5...6	x4	4.5		1,2
	2,5...16	x2	6.8		3,5

IMPERIAL	AWG		Ø		Torque inch/Lbs.
	16...4	x1	0.27		19.5
	16...8	x4	0.177		10.6
	16...4	x2	0.27		19.5

Part No.	Description		kg/lbs
569010	UD 80 A	1	0,07/0.15

 Flexible stranded cable (including terminal up to 50 mm²)

 Rigid cable



METRIC	mm²		Ø		I(N.m)
	10...35	x1	10		8,5
	6...16**	x1	6.8		3,5
	2,5...16	x4  x6 	6.8		3,5

** or common jumper

IMPERIAL	AWG		Ø		Torque inch/Lbs.
	8...1/0	x1	0.394		57
	10...4	x1	0.27		31
	10...4	x6	0.27		31

Part No.	Description		kg/lbs
569020	UDJ 125 A	1	0,15/0.33
569150	FSJ*	25	0,03/0.07

METRIC	mm²		Ø		I(N.m)
	10...70	x1	12.3		8,5
	6...16**	x1	6.8		3,5
	2,5...16	x4  x6 	6.8		3,5

** or common jumper

IMPERIAL	AWG		Ø		Torque inch/Lbs.
	8...3/0	x1	0.484		75
	10...4	x1	0.27		31
	10...4	x6	0.27		31

Part No.	Description		kg/lbs
569030	UDJ 160 A	1	0,15/0.32
569150	FSJ*	25	0,03/0.07

* Not UL® Recognized


Single Pole Distribution Blocks



- ERICO® FLEXIBAR® connection at input, using flag terminals (FLG 250 A & FLG 400 A)

UD 250 A 250 A - IEC 255 Amp - cULus

- Modular: allows versatile building of power blocks single pole, two pole, three pole or four pole.

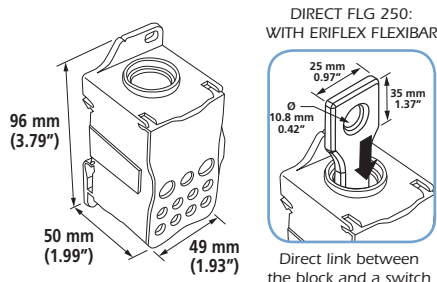

I = 250 A IEC
I = 255 A UL/CSA

- Icw KA rms 1s : 24,5
- IPk KA : 51
- Ui : 1000 V AC/DC IEC
- Vin : 600 V UL

CENTER TO CENTER DRILLING:
85 X 29 mm (3.35" x 1.14")


METRIC	mm²	mm²		Ø		I'(N.m)
➡	35...120	35...120	x1	15	⌋	19
➡	6...35	6...25	x2	9	⌋	4,4
➡	2,5...16	2,5...16	x5	6.8	⌋	2,7
➡	2,5...10	2,5...10	x4	6.1	⌋	2,7

IMPERIAL	AWG		Ø		Torque inch/Lbs.
➡	6...250 Kcmil	x1	0.59	⌋	168
➡	8...1	x2	0.354	⌋	39
➡	8...4	x5	0.27	⌋	24
➡	8...6	x4	0.24	⌋	24

Part No.	Description	kg/lbs
569040	UD 250 A	1 0,42/0.89
569160	FLG 250*	10 0,05/0.12

UD 400 A 400 A - IEC 335 Amp - cULus

- Modular: allows versatile building of power blocks single pole, two pole, three pole or four pole.

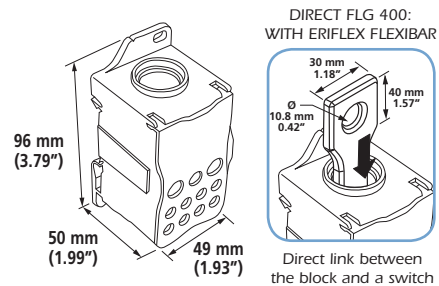

I = 400 A IEC
I = 335 A UL/CSA

- Icw KA rms 1s : 24,5
- IPk KA : 51
- Ui : 1000 V AC/DC IEC
- Vin : 600 V UL

CENTER TO CENTER DRILLING:
85 X 29 mm (3.35" x 1.14")


METRIC	mm²	mm²		Ø		I'(N.m)
➡	95...185	95...185	x1	19	⌋	25
➡	6...35	6...25	x2	9	⌋	4,4
➡	2,5...16	2,5...16	x5	6.8	⌋	2,7
➡	2,5...10	2,5...10	x4	6.1	⌋	2,7

IMPERIAL	AWG		Ø		Torque inch/Lbs.
➡	3/0...400 Kcmil	x1	0.748	⌋	221
➡	8...1	x2	0.354	⌋	39
➡	8...4	x5	0.27	⌋	24
➡	8...6	x4	0.24	⌋	24

Part No.	Description	kg/lbs
569050	UD 400 A	1 0,4/0.89
569170	FLG 400*	10 0,1/0.21

* Not UL® Recognized
* Not IP 20

Single Pole Distribution Blocks

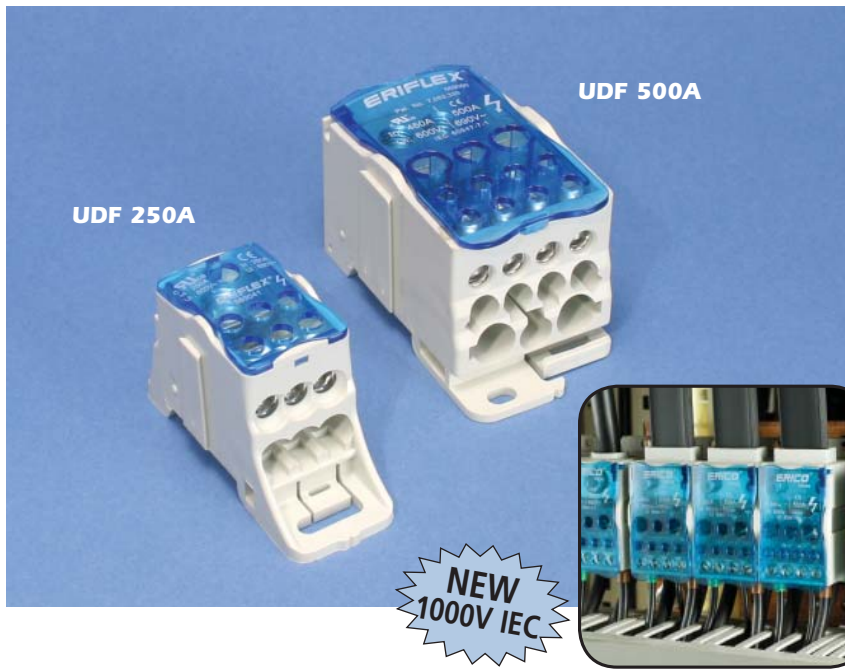


- Input connection using ERICO® FLEXIBAR®
- Visual inspection of wire and confirmation of connection
- Halogen Free
- IP 20 finger safe
- 95% fill ratio
- Tinned Copper Block : Copper or Aluminium Cables
- RoHS Compliant
- Short Circuit Rated up to 100 KA (UDF 250A)
- See UL file E198301
- Self extinguishing: UL94 V-0

UDF 250A 250 A - IEC 255 A - cULus

I = 250 A IEC
I = 255 A UL/CSA

- Icw KA rms 1s : 9.0
- IPk KA : 23
- Ui : 1000 V AC/DC IEC
- Vin : 600 V UL

- **DIRECT CONNECTION WITH ERICO FLEXIBAR.**
- Modular: allows versatile building of power blocks single pole, two pole, three pole or four pole.



ERICO FLEXIBAR INPUT	
3 x 9 x 0,8 - 6 x 9 x 0,8	
3 x 13 x 0,5 - 6 x 13 x 0,5	
2 x 15,5 x 0,8 - 6 x 15,5 x 0,8	

METRIC	 mm²	 mm²		Ø		I'(N.m)
	ERICO FLEXIBAR	x1	-			13,5
	2,5...16	x6	6.8			3,5

IMPERIAL	AWG		Ø		I'(in/lb)
	ERICO FLEXIBAR	x1	-		120
	10...4	x6	0.27		31

Part No.	Description		 kg/lbs
569041	UDF 250A	1	0,15 / 0.33

 Flexible stranded cable
(including terminal up to 50 mm²)


 Rigid cable

UDF 500A 500 A - IEC 335 A - cULus

I = 500 A IEC
I = 335 A UL/CSA

- Icw KA rms 1s : 24.5
- IPk KA : 51
- Ui : 1000 V AC/DC IEC
- Vin : 600 V UL

- **DIRECT CONNECTION WITH ERICO FLEXIBAR.**
- Modular: allows versatile building of power blocks single pole, two pole, three pole or four pole.



ERICO FLEXIBAR INPUT	
4 x 15,5 x 0,8 - 6 x 15,5 x 0,8	
2 x 20 x 1 - 6 x 20 x 1	
2 x 24 x 1 - 8 x 24 x 1	


METRIC	 mm²	 mm²		Ø		I'(N.m)
	ERICO FLEXIBAR	x1	-			13,5
	2,5...16	x5	6.8			2,7
	2,5...10	x4	6.1			2,7
	6...35	6...25	x2	9		4,4

IMPERIAL	AWG		Ø		I'(in/lb)
	ERICO FLEXIBAR	x1	-		120
	8...4	x5	0.27		24
	8...6	x4	0.24		24
	8...1	x2	0.354		39

Part No.	Description		 kg/lbs
569060	UDF 500A	1	0,37 / 0.82



Single Pole Distribution Blocks

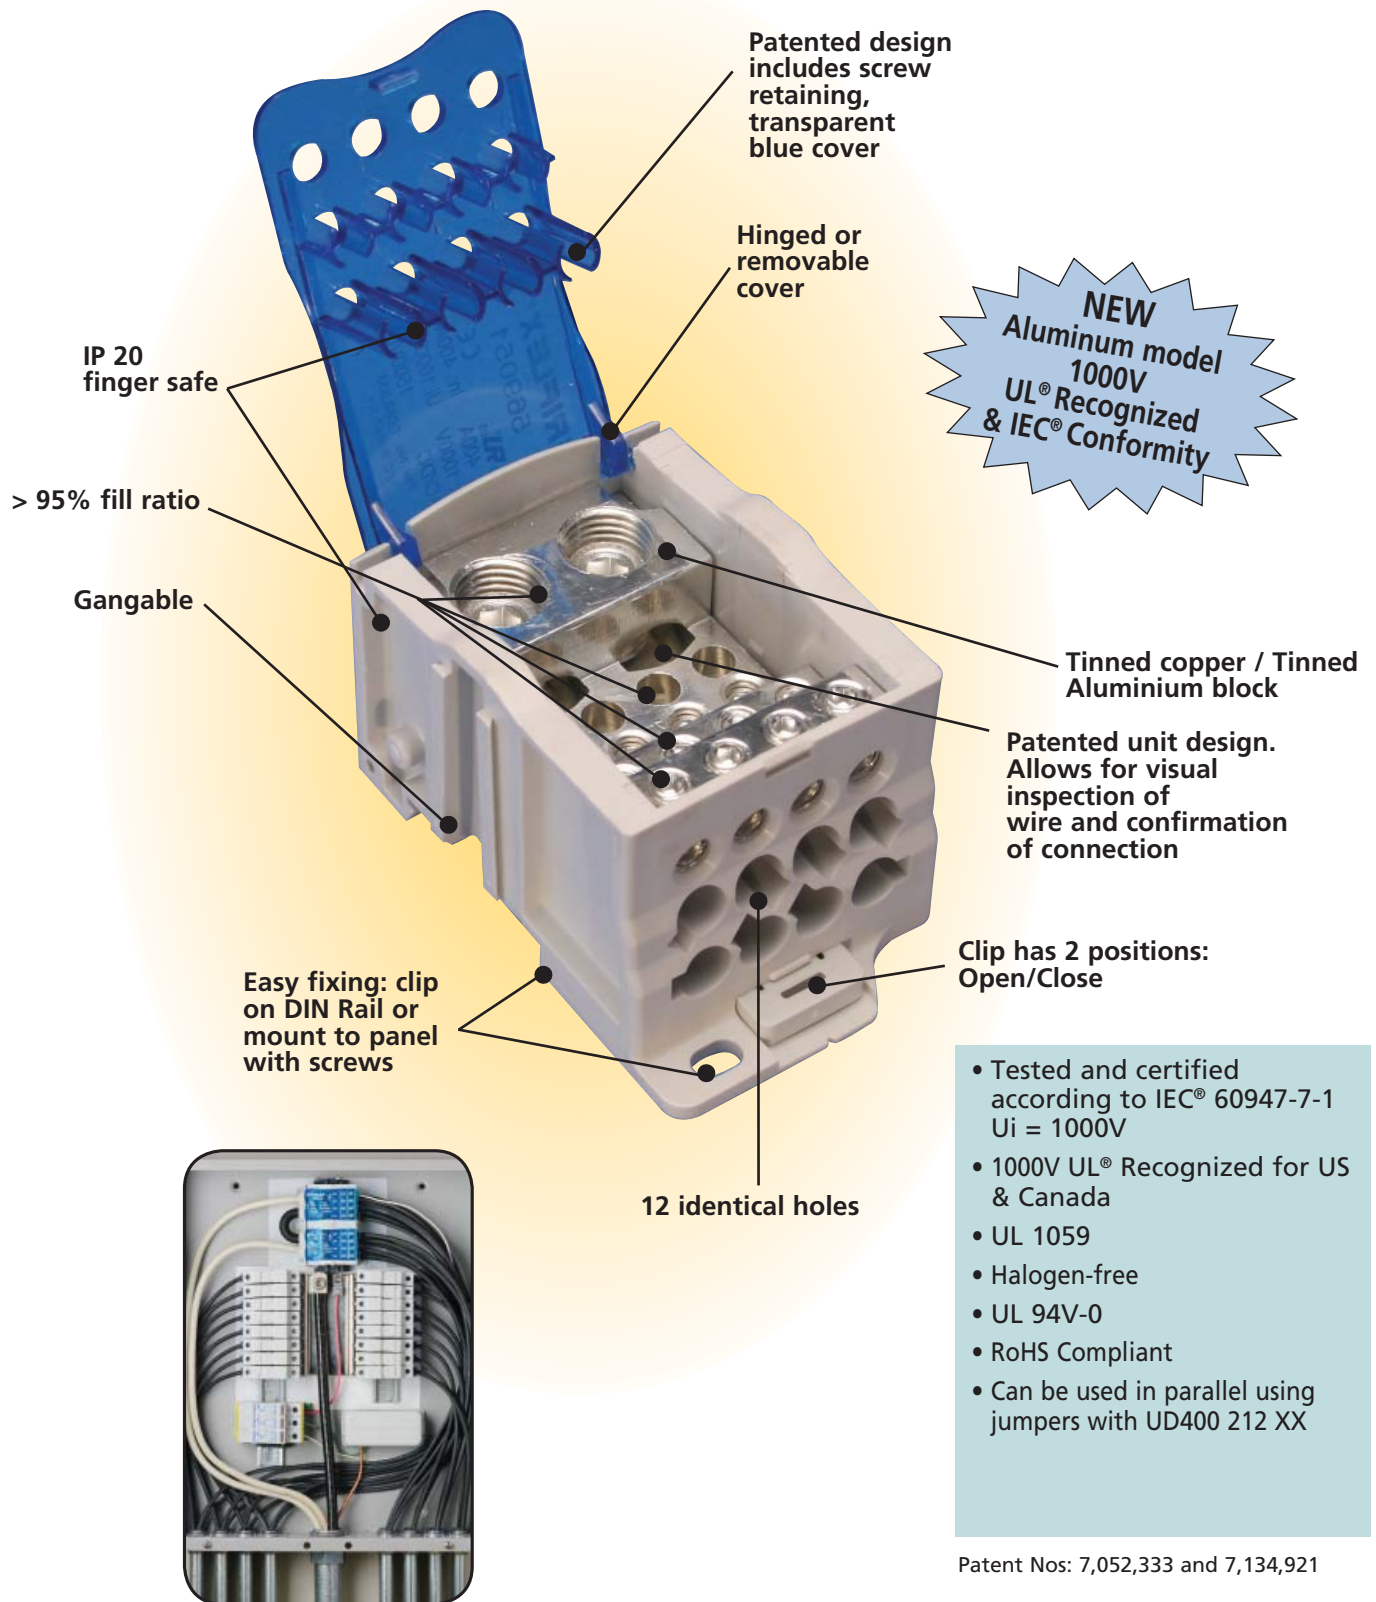


UL Recognized for 1000V AC/DC and IEC certified for 1000V AC/ 1500V DC -
Ideal for solar applications

Single Pole Distribution Blocks




- Tinned Copper or Tinned Aluminium Block: Copper or Aluminium Cables
- Visual inspection of wire and confirmation of connection
- Halogen Free
- IP 20 finger safe
- 95% Fill Ratio
- Self extinguishing: UL 94 V-0
- Easy fixing: clip on din rail or mount to panel with screws
- RoHS Compliant

UD 400 212 XX 2 inputs / 12 outputs 400 A - IEC 400 A - UL®



Jumper UD400J



- I = 400 A IEC
- I = 400 A UL/CSA
- Icw KA rms 1s : 24,5
- IPk KA : 51
- Ui : 1000 V AC
1500 V DC IEC
- Vin : 1000 V AC/DC UL

CENTER TO CENTER DRILLING:
85 X 29 mm (3.35" x 1.14")

Copper/Aluminium Block

METRIC	mm²	mm²		Ø		I'(N.m)
	2,5...10	2,5...10	x12	6,1		2,7
	35...95	35...95	x2	13,5		13,6

Aluminium Block

IMPERIAL	AWG		Ø		Torque inch/Lbs.
	14...6	x12	0,24		45
	8...3/0	x2	0,53		120

Copper Block

IMPERIAL	AWG		Ø		Torque inch/Lbs.
	14...6	x12	0,24		24
	8...3/0	x2	0,53		120

Part No.	Description	Box	kg
569051	Unipolar Distribution Block UD400212CU - Copper	1	0,380
569251	Unipolar Distribution Block UD400212AL - Aluminium	1	0,160
569200	Jumper UD400J*	10	0,060


Flexible stranded cable
(including terminal up to 50 mm²)

Rigid cable

* 380A max

UL® Recognized for 1000V AC/DC and IEC® certified for 1000V AC/1500V DC - Ideal for Solar applications

UD 400 112 XX 1 input / 12 outputs 400 A - IEC 335 A - UL®



- I = 400 A IEC
- I = 335 A UL/CSA

- Icw KA rms 1s : 24,5
- IPk KA : 51
- Ui : 1000 V AC
1500 V DC IEC
- Vin : 1000 V AC/DC UL

CENTER TO CENTER DRILLING:
85 X 29 mm (3.35" x 1.14")

Copper/Aluminium Block

METRIC	mm²	mm²		Ø		I'(N.m)
	2,5...10	2,5...10	x12	6,1		2,7
	95...185	95...185	x1	19		25

Aluminium Block

IMPERIAL	AWG		Ø		Torque inch/Lbs.
	14...6	x12	0,24		45
	3/0...400MCM	x1	0,787		221



Copper Block

IMPERIAL	AWG		Ø		Torque inch/Lbs.
	14...6	x12	0,24		24
	3/0...400MCM	x1	0,787		221


Part No.	Description	Box	kg
569052	Unipolar Distribution Block UD400112CU - Copper	1	0,400
569252	Unipolar Distribution Block UD400112AL - Aluminium	1	0,180



Two and Four Pole Distribution Blocks

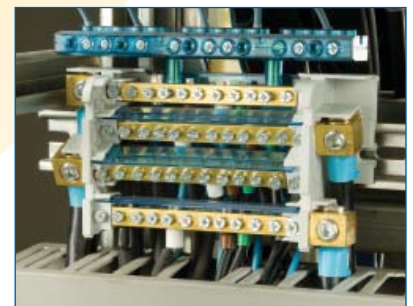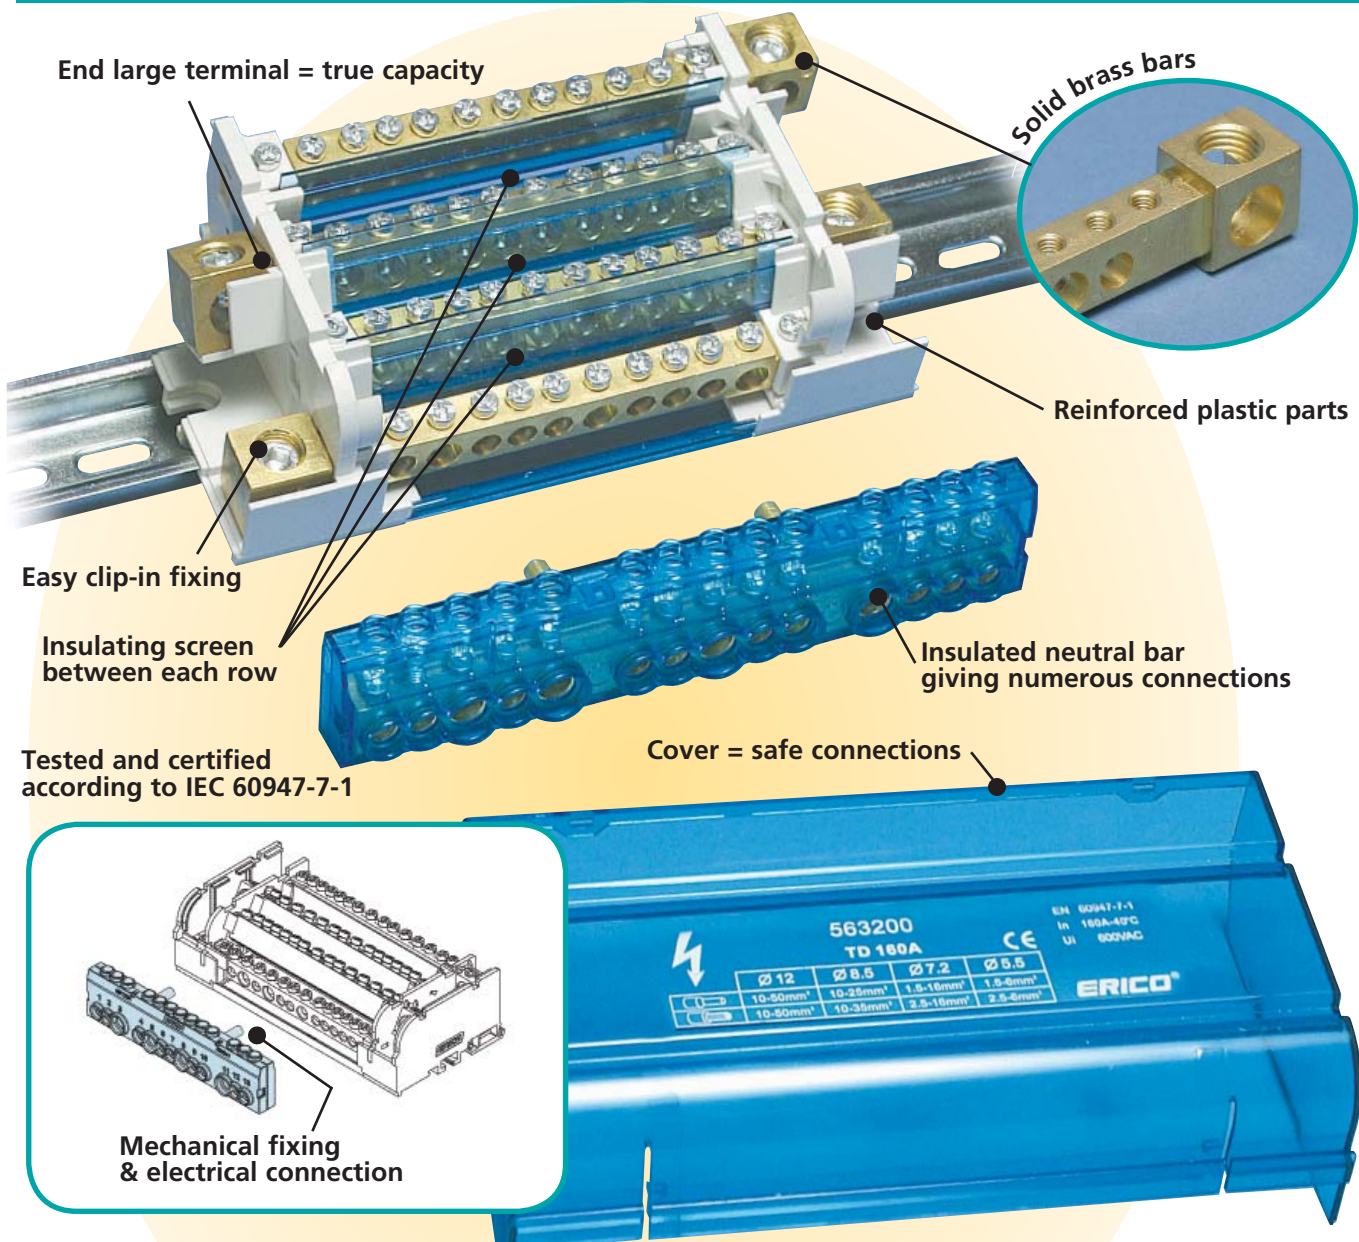

Two and Four Pole Distribution Blocks

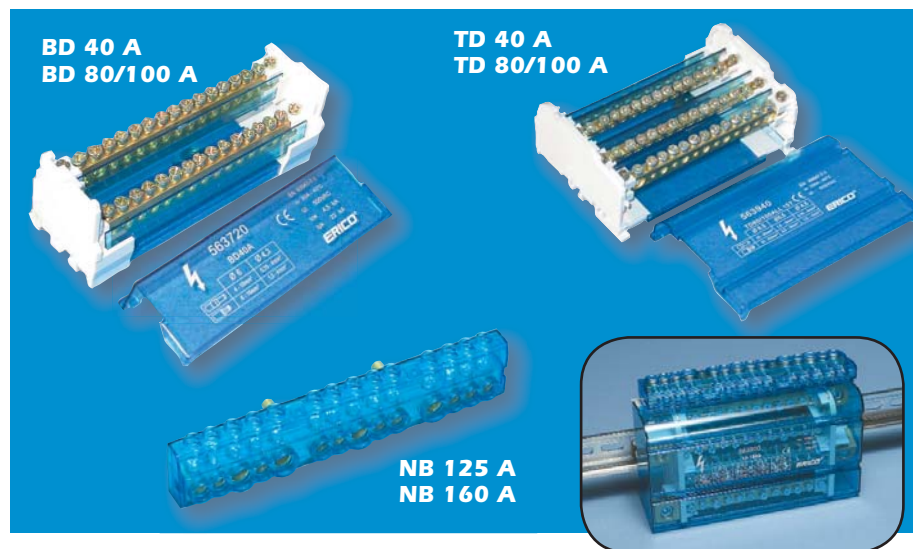


- Minimum space for maximum power
- Easy connections
- Protection: Transparent cover and screen
- Self extinguishing: UL94 V-0
- Safe connections
- Rail or screw mounting*
- Halogen Free
- Rohs Compliant

IEC 60947-7-1

2 & 4 POLE 40 A

2 pole BD 40 A

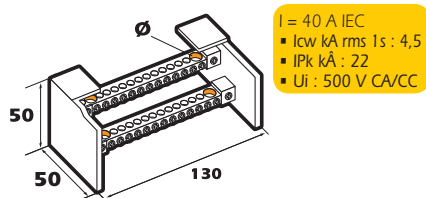


I = 40 A IEC
 • Icw kA rms 1s : 4,5
 • IPk kA : 22
 • Ui : 500 V CA/CC

BD 40 A - 16 TERMINALS

	mm²	mm²		Ø		I'(N.m)
→	6-16	4-10	x2	6		2-3
→	1,5-4	0,75-4	x15	4,3		1,2-1,5

4 pole TD 40 A

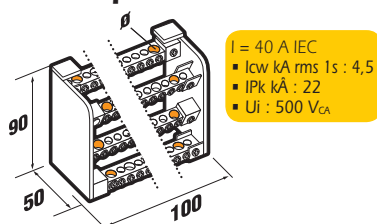

I = 40 A IEC
 • Icw kA rms 1s : 4,5
 • IPk kA : 22
 • Ui : 500 V_{CA}

TD 40 A - 12 TERMINALS

	mm²	mm²		Ø		I'(N.m)
→	6-16	4-10	x2	6		2-3
→	1,5-4	0,75-4	x11	4,3		1,2-1,5

* Center to drilling :
 • BD 40 A = 110 mm
 • TD 40 A = 80 mm


Part No.	Description		kg/lbs
563720	BD 40 A	1	0,22/0.49
563740	TD 40 A	1	0,33/0.73

Flexible stranded cable
 (including terminal up to 50 mm²)
 Rigid cable



2 & 4 POLE 80/100 A

2 pole BD 80/100 A



I = 100 A IEC
 • Icw kA rms 1s : 4,5
 • IPk kA : 20
 • Ui : 500 V CA/CC


BD 80/100 A - 6 TERMINALS

	mm²	mm²		Ø		I'(N.m)
→	10...25	10...25	x1	8,5		2-3
→	1,5...4	0,75...4	x3	4,5		1,2-1,5
→	2,5...6	1,5...6	x3	5,5		2-3

BD 80/100 AL - 14 TERMINALS

	mm²	mm²		Ø		I'(N.m)
→	10...25	10...25	x2	8,5		2-3
→	1,5...4	0,75...4	x6	4,5		1,2-1,5
→	2,5...6	1,5...6	x7	5,5		2-3

4 pole TD 80/100 A



I = 100 A IEC
 • Icw kA rms 1s : 4,5
 • IPk kA : 20
 • Ui : 500 V_{CA}

TD 80/100 A - 6 TERMINALS

	mm²	mm²		Ø		I'(N.m)
→	10...25	10...25	x1	8,5		2-3
→	1,5...4	0,75...4	x3	4,5		1,2-1,5
→	2,5...6	1,5...6	x3	5,5		2-3

TD 80/100 AL - 10 TERMINALS

	mm²	mm²		Ø		I'(N.m)
→	10...25	10...25	x2	8,5		2-3
→	1,5...4	0,75...4	x4	4,5		1,2-1,5
→	2,5...6	1,5...6	x5	5,5		2-3

TD 80/100 ALL - 14 TERMINALS

	mm²	mm²		Ø		I'(N.m)
→	10...25	10...25	x2	8,5		2-3
→	1,5...4	0,75...4	x6	4,5		1,2-1,5
→	2,5...6	1,5...6	x7	5,5		2-3


* Center to drilling :

• BD 80/100 A = 45 mm
 • BD 80/100 AL = 110 mm
 • TD 80/100 A = 45 mm
 • TD 80/100 AL = 80 mm
 • TD 80/100 ALL = 110 mm

Part No.	Description		kg	L
563900	BD 80/100 A	1	0,11	64
563910	BD 80/100 AL	1	0,21	130
563920	TD 80/100 A	1	0,21	64
563930	TD 80/100 AL	1	0,31	100
563940	TD 80/100 ALL	1	0,40	130

NEUTRAL BARS

- Improved wiring capacity
- Direct electrical connection
- Strong mechanical assembly
- Transparent cover

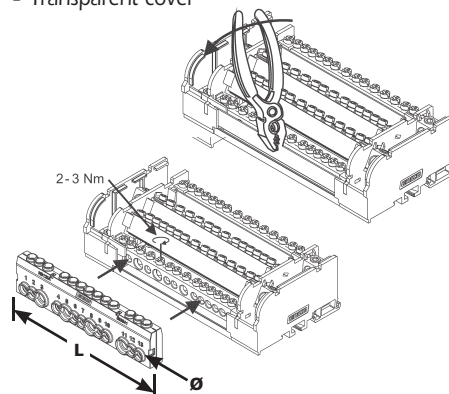

Neutral Bar 563841 → 563830 - Solid Bar
 563841 → 563840 - Solid Bar
 Neutral Bar 563201 → 563200 - Solid Bar
 563201 → 563990 - Solid Bar

NB 125 A

I = 125 A IEC
 • Icw kA rms 1s : 4,5
 • IPk kA : 30

	mm²	mm²		Ø		I'(N.m)
→	10-25	6-16	x3	7,5		2-3
→	2,5-6	1,5-6	x9	5,5		2-3


NB 160 A

I = 160 A IEC
 • Icw kA rms 1s : 6,2
 • IPk kA : 35

	mm²	mm²		Ø		I'(N.m)
→	10-35	10-25	x4	8,5		2-3
→	2,5-16	1,5-16	x10	7,2		2-3

Part No.	Description	L	kg	kg/lbs
563841	NB 125 A	142	10	0,17
563201	NB 160 A	170	10	0,20

Two and Four Pole Distribution Blocks

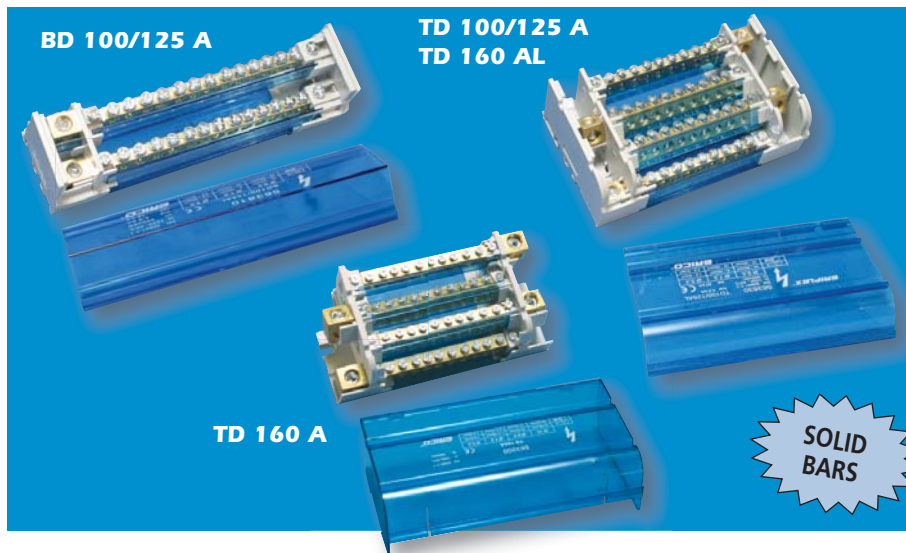


- Easy connections: Input separated from outputs
- Neutral bar: 125A & 160A
- Rail or screw mounting*
- End large terminals: Safe connections
- New Design: solid bars provide reliability
- Improved Icc withstanding up to 35 KA
- Strong mechanical assembly

IEC 60947-7-1

2 & 4 POLE 100/125 A

2 pole BD 100/125 A

I = 125 A IEC
• U_i : 690 VCA/VCC



BD 100/125 A - 6 TERMINALS


	mm ²	mm ²		Ø		I'(N.m)
➡	10...35	10...35	x1	9,5		6-7
➡	2,5...6	1,5...6	x5	5,5		2-3
➡	10...25	6...16	x1	7,5		2-3

BD 100/125 AL - 14 TERMINALS

➡	10...35	10...35	x1	9,5		6-7
➡	2,5...6	1,5...6	x11	5,5		2-3
➡	10...25	6...16	x3	7,5		2-3

4 pole TD 100/125 A

I = 125 A IEC
• U_i : 690 V_{CA}



TD 100/125 A - 6 TERMINALS

	mm ²	mm ²		Ø		I'(N.m)
➡	10...35	10...35	x1	9,5		6-7
➡	2,5...6	1,5...6	x5	5,5		2-3
➡	10...25	6...16	x1	7,5		2-3

TD 100/125 AL - 10 TERMINALS

➡	10...35	10...35	x1	9,5		6-7
➡	2,5...6	1,5...6	x7	5,5		2-3
➡	10...25	6...16	x3	7,5		2-3

TD 100/125 ALL - 14 TERMINALS

➡	10...35	10...35	x1	9,5		6-7
➡	2,5...6	1,5...6	x11	5,5		2-3
➡	10...25	6...16	x1	7,5		2-3
➡	10...35	10...25	x2	8,5		2-3

* Center to drilling :

- BD 100/125 A = 74 mm
- BD 100/125 AL = 142 mm


- TD 100/125 A = 89 mm
- TD 100/125 AL = 127 mm
- TD 100/125 ALL = 162 mm

Part No.	Description	Icw	Ipk			L
563800	BD 100/125 A	4,5	30	1	0,16	94
563810	BD 100/125 AL	4,5	25	1	0,27	162
563820	TD 100/125 A	4,5	30	1	0,33	109
563830	TD 100/125 AL	4,5	30	1	0,44	147
563840	TD 100/125 ALL	4,5	21	1	0,55	182

4 POLE 160 A

TD 160 A

I = 160 A IEC
• Icw KA rms 1s : 8,2
• IPk KA : 35
• U_i : 690 V_{CA}



TD 160 A : 11 TERMINALS

	mm ²	mm ²		Ø		I'(N.m)
➡	10...50	10...50	x1	12		8-10
➡	10...35	10...25	x3	8,5		2-3
➡	2,5...16	1,5...16	x7	7,2		2-3
➡	2,5...6	1,5...6	x1	5,5		2-3


* Center to center drilling : 160 mm

Part No.	Description		
563200	TD 160A	1	0.606

4 POLE 160 A

TD 160 AL

I = 160 A IEC
• Icw KA rms 1s : 8,2
• IPk KA : 35
• U_i : 690 V_{CA}




TD 160 AL - 11 TERMINALS

	mm ²	mm ²		Ø		I'(N.m)
➡	10...50	10...50	x1	12		8-10
➡	10...35	10...25	x3	8,5		2-3
➡	2,5...16	1,5...16	x8	7		2-3

* Center to drilling : 150 mm.

Part No.	Description		
563990	TD 160 AL	1	0,74

Four Pole Distribution Blocks – TDL

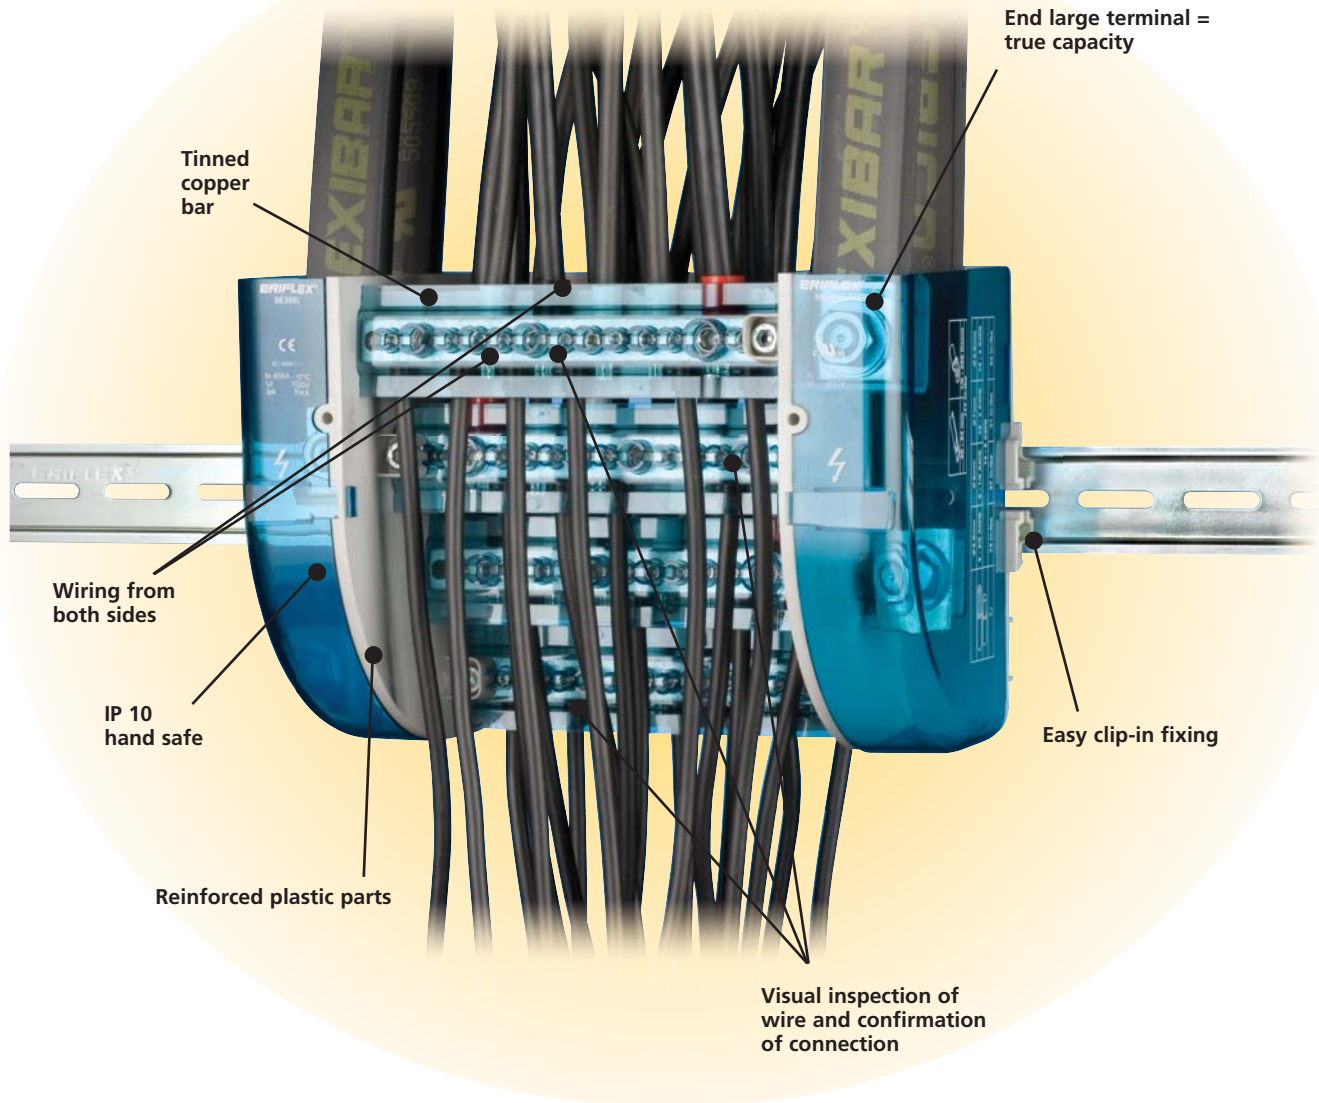

- Tested and Certified according to IEC 60947-7-1 $U_i=1000V$
- UL® Recognized for US & Canada
- UL 1059 $U_i=600V$
- Halogen Free
- UL94 V-0
- RoHS Compliant
- CE Conformity
- GOST



Four Pole Distribution Blocks – TDL

TDL 250/400A




- Easy connections: Input separated from outputs
- End large terminals: Safe connections
- Easy input connection : ERICO® FLEXIBAR® - IBS - Cable
- Wiring from Both sides
- Tinned Copper Bars : Copper or Aluminum Cables
- Visual inspection of wire and confirmation of connection
- New Design: solid bars provide reliability
- Strong mechanical assembly
- IP 10 hand safe
- High % of Fill Ratio
- Easy fixing: clip on din rail or mount to panel with screws
- Halogen Free

TDL 250/400A 400 A - IEC /



I = 400 A IEC
I = 400 A UL/CSA

- Icw KA rms 1s : 23
- IPk KA : 51
- Ui : 1000 VAC
1500 VDC IEC
- Vin : 600 V UL

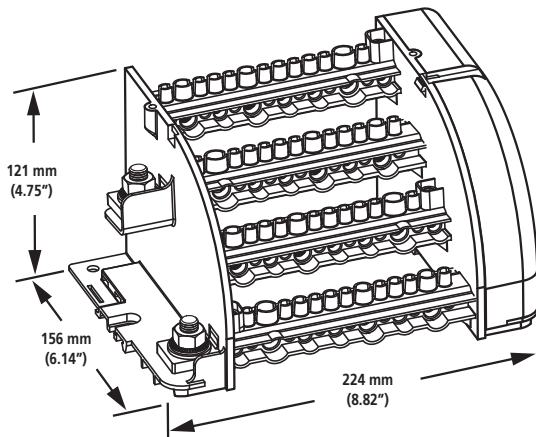

Part No.	Description		 kg/lbs
563995	TDL250A	1	1,69 / 3.73


-  Flexible stranded cable (including terminal up to 50 mm²)
-  Rigid cable




METRIC	ERICO® FLEXIBAR®, IBS (width)	 mm²	I' (N.m)	 mm²	I' (N.m)	Ø	
	20 - 24 mm	35...120 mm²	20	35...120 mm²	20	x1	10
	-	10...50 mm²	8,5	10...35 mm²	8,5	x1	9.5
	-	10...35 mm²	6,4	10...25 mm²	6,4	x2	9
	-	6...25 mm²	3,5	6...16 mm²	3,5	x4	7
	-	2.5...16 mm²	2,7	2.5...10 mm²	2,7	x7	5.5

IMPERIAL	ERICO® FLEXIBAR®, IBS (width)	AWG	I' (in/lb)	Ø	
	20 - 24 mm	1/0 - 250	177	x1	0.394
	-	6 - 1/0	75	x1	0.374
	-	8 - 1	57	x2	0.354
	-	10 - 3	31	x4	0.276
	-	10 - 5	24	x7	0.217

Power Blocks – SB Series

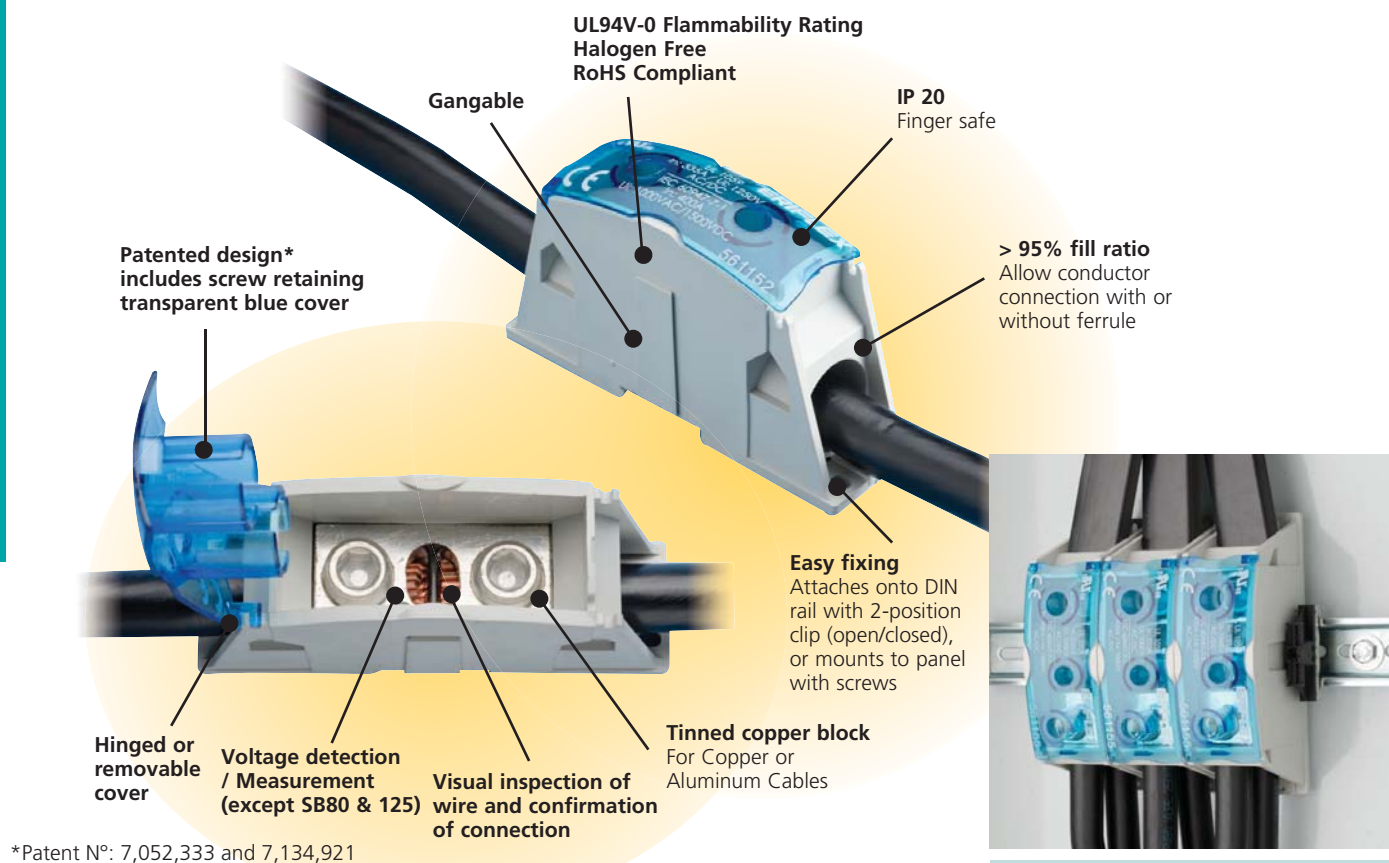

Power Terminals – SBLL

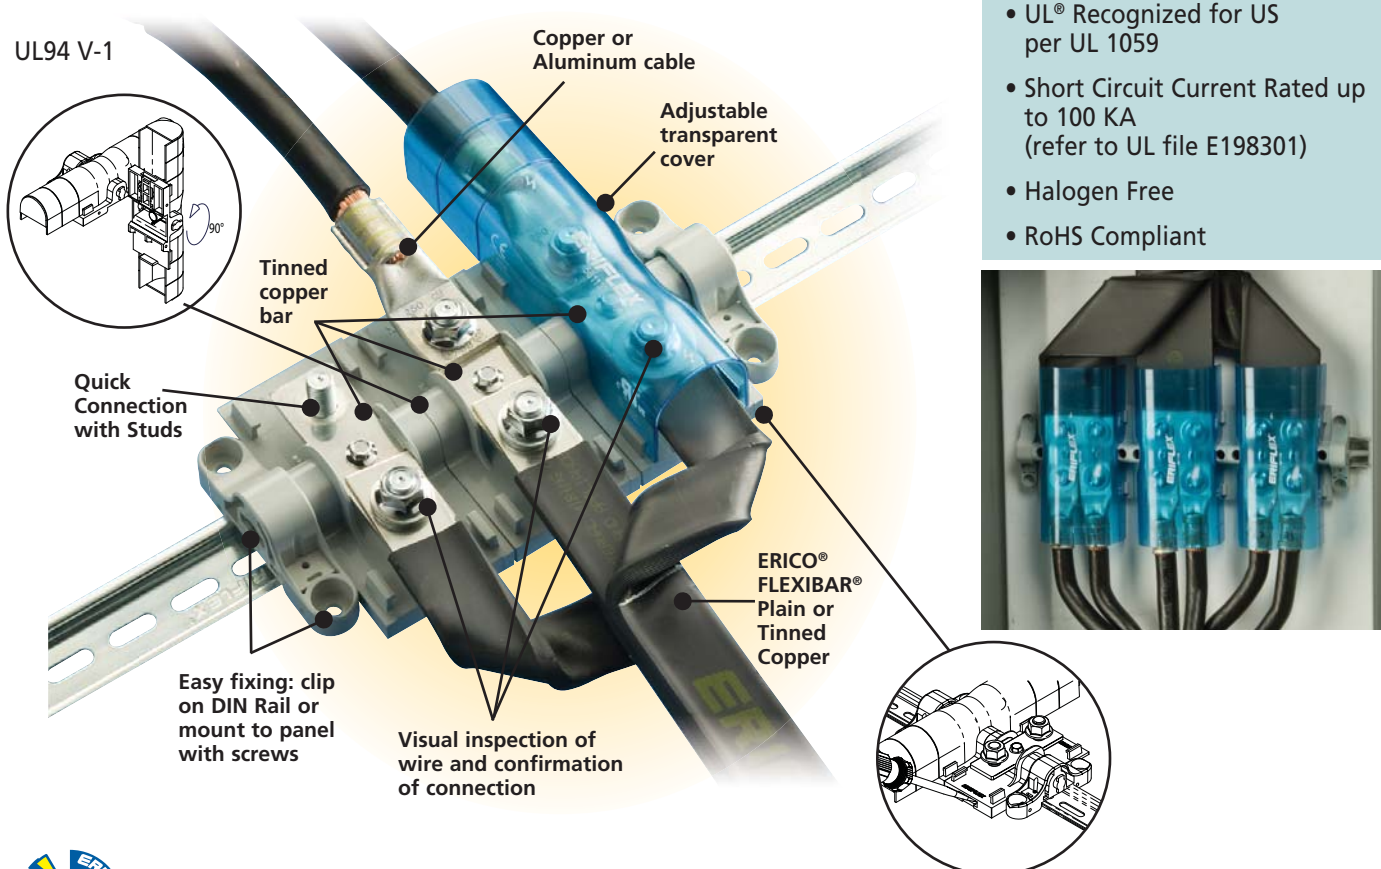

Power Blocks & Terminals




- Complete Power Blocks range, from 80A up to 630A IEC® - 85A up to 545A UL®
- Offer multiple connection possibilities with One cable, Two cables or ERICO® FLEXIBAR® and IBSB/IBSBR Power Braid
- Large cross section aluminum/ copper conductor connection
- Offer time savings and reliability
- High short-circuit current rating
 - 100kA SCCR (UL)
 - lpk up to 51kA (IEC)
- High voltage values under IEC & UL certification (minimum of 1000V AC/DC)
- Modular: individual modules are stackable for multiple applications

SB 80 110 A - IEC 85 A - UL

■ Cable to Cable

I = 110 A IEC
I = 85 A UL

- Icw KA rms 1s : 3.0
- IPk KA : 25
- Ui : 1000 V AC IEC
- Ui : 1500 V DC IEC
- Vin : 1000 V UL

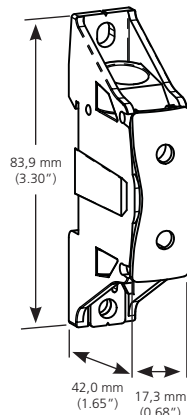


SB 125 170 A - IEC 150 A - UL

■ Cable to Cable

I = 170 A IEC
I = 150 A UL

- Icw KA rms 1s : 6.0
- IPk KA : 25
- Ui : 1000 V AC IEC
- Ui : 1500 V DC IEC
- Vin : 1250 V UL

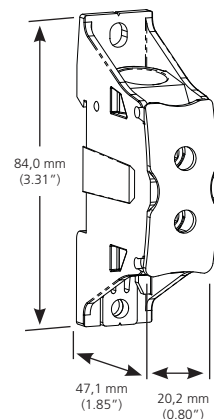

Metric (Imperial) Chart							
	No. Terminals	Conductor	Size mm ² (AWG)	Ø mm (in)	Torque N-m (in-lbs)	Strip Length mm (in)	mm (in)
	x1		2,5...6 (16...10)	8,2 (.32)	3,5 (19.5)	17,0 (.67)	4 (5/32)
			6...16 (16...4)				
			6...16				
	x1		2,5 - 6 (16...10)	8,2 (.32)	3,5 (19.5)	17,0 (.67)	4 (5/32)
			6 - 16 (16...4)				
			6...16				

Metric solid cable / AWG solid cable

Metric rigid stranded cable / AWG stranded cable

Metric flexible stranded cable

Part No.	Description		kg/lbs
561150	SB 80	1	0,04/0.10

Metric (Imperial) Chart							
	No. Terminals	Conductor	Size mm ² (AWG)	Ø mm (in)	Torque N-m (in-lbs)	Strip Length mm (in)	mm (in)
	x1		10...35 (8...1/0)	10,1 (.40)	6,4 (57.0)	15,2 (.60)	5 (3/16)
			10...35				
	x1		10...35 (8...1/0)	10,1 (.40)	6,4 (57.0)	15,2 (.60)	5 (3/16)
			10...35				

Metric rigid stranded cable / AWG stranded cable

Metric flexible stranded cable

Part No.	Description		kg/lbs
561158	SB 125	1	0,07/0.15


Power Blocks & Terminals

SB 160 250 A - IEC 200 A -

▪ Cable to Cable

I = 250 A IEC
I = 200 A UL

- Icw KA rms 1s : 14.4
- IPk KA : 42
- Ui : 1000 V AC IEC
- Ui : 1500 V DC IEC
- Vin : 1000 V UL

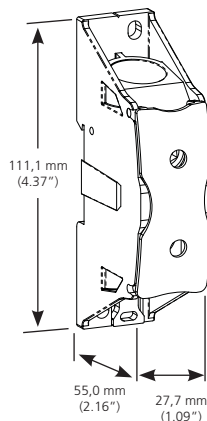


SB 250 400 A - IEC 255 A -

▪ Cable to Cable

I = 400 A IEC
I = 255 A UL

- Icw KA rms 1s : 14.4
- IPk KA : 42
- Ui : 1000 V AC IEC
- Ui : 1500 V DC IEC
- Vin : 1250 V UL

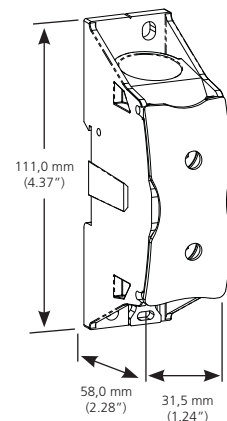

Metric (Imperial) Chart							
	No. Terminals	Conductor	Size mm ² (AWG)	Ø mm (in)	Torque N-m (in-lbs)	Strip Length mm (in)	mm (in)
	x1		35...70 (2...3/0)	14,0 (.55)	10,7 (95.0)	25,0 (.98)	8 (5/16)
			35...70	14,0	10,7	25,0	8
	x1		35...70 (2...3/0)	14,0 (.55)	10,7 (95.0)	25,0 (.98)	8 (5/16)
			35...70	14,0	10,7	25,0	8

 Metric rigid stranded cable / AWG stranded cable

 Metric flexible stranded cable

Part No.	Description		 kg/lbs
561151	SB 160	1	0,18/0.40



Metric (Imperial) Chart							
	No. Terminals	Conductor	Size mm ² (AWG)	Ø mm (in)	Torque N-m (in-lbs)	Strip Length mm (in)	mm (in)
	x1		35...120 (6...250)	15,1 (.59)	19,0 (168)	26,0 (1.02)	8 (5/16)
			35...120	15,1	19,0	26,0	8
	x1		35...120 (6...250)	15,1 (.59)	19,0 (168)	26,0 (1.02)	8 (5/16)
			35...120	15,1	19,0	26,0	8

 Metric rigid stranded cable / AWG stranded cable

 Metric flexible stranded cable

Part No.	Description		 kg/lbs
561159	SB 250	1	0,30/0.66




Power Blocks & Terminals

SB 400 500 A - IEC 335 A -

- Cable to Cable

I = 500 A IEC
I = 335 A UL

- Icw KA rms 1s : 28.8
- IPk KA : 51
- Ui : 1000 V AC IEC
- Ui : 1500 V DC IEC
- Vin : 1250 V UL

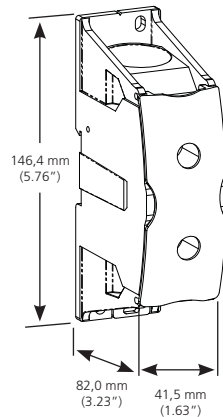


SBF 400 405/445* A - IEC 335 A -

- Cable to ERICO® FLEXIBAR® / Insulated power braid

I = 405/445* A IEC
I = 335 A UL

- Icw KA rms 1s : 28.8
- IPk KA : 51
- Ui : 1000 V AC IEC
- Ui : 1500 V DC IEC
- Vin : 1000 V UL

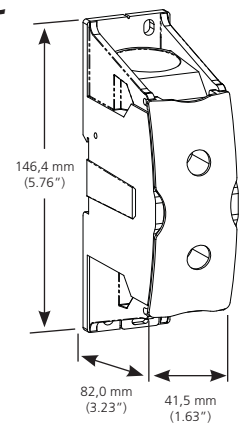

*405 A IEC: IBSB/IBSBR
*445 A IEC: ERICO® FLEXIBAR®


Metric (Imperial) Chart

	No. Terminals	Conductor	Size mm ² (AWG)	Ø mm (in)	Torque N-m (in-lbs)	Strip Length mm (in)	mm (in)
	x1		95...240 (3/0...400)	21,0 (.83)	29,8 (264)	30,0 (1.18)	10 (3/8)
			95...240	21,0	29,8	30,0	10
	x1		95...240 (3/0...400)	21,0 (.83)	29,8 (264)	30,0 (1.18)	10 (3/8)
			95...240	21,0	29,8	30,0	10

 Metric rigid stranded cable / AWG stranded cable

 Metric flexible stranded cable

Part No.	Description		 kg/lbs
561152	SB 400	1	0,51/1.13

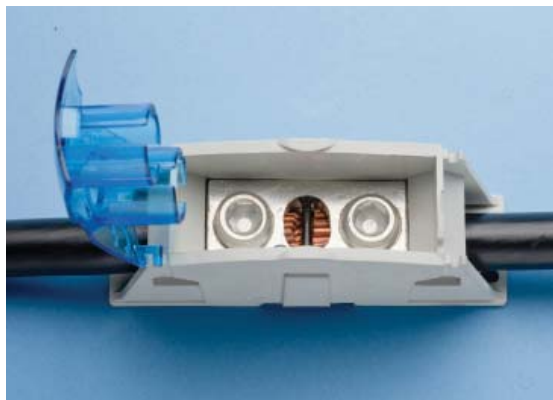

Metric (Imperial) Chart

	No. Terminals	Conductor	Size	Ø mm (in)	Torque N-m (in-lbs)	Strip Length mm (in)	mm (in)
	x1	ERICO® FLEXIBAR®	2x20x1 - 5x24x1	N/A	13,5 (120)	30,0 (1.18)	10 (3/8)
		IBSB/IBSBR	100				
	x1		95...240 (3/0...400)	21,0 (.83)	29,8 (264)	30,0 (1.18)	10 (3/8)
			95...240	21,0	29,8	30,0	10

 Metric rigid stranded cable / AWG stranded cable

 Metric flexible stranded cable

Part No.	Description		 kg/lbs
561153	SBF 400	1	0,56/1.23




Power Blocks & Terminals

SB2C 400 600 A - IEC 335 A -

- Cable to Two Cables

I = 600 A IEC
I = 335 A UL

- Icw KA rms 1s : 28.8
- IPk KA : 51
- Ui : 1000 V AC IEC
- Ui : 1500 V DC IEC
- Vin : 1000 V UL

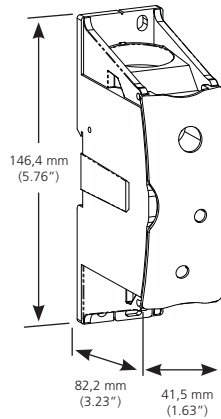


SBF2C 400 500/560* A - IEC 335 A -

- Two Cable to ERICO® FLEXIBAR® / Insulated Power braid

I = 500/560* A IEC
I = 335 A UL

- Icw KA rms 1s : 28.8
- IPk KA : 51
- Ui : 1000 V AC IEC
- Ui : 1500 V DC IEC
- Vin : 1000 V UL

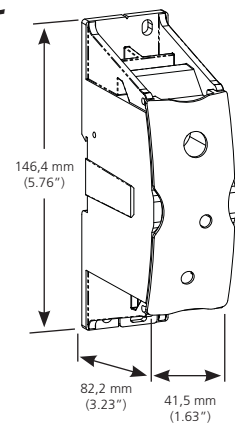

*500 A IEC: IBSB/IBSBR
*560 A IEC: ERICO® FLEXIBAR®

Metric (Imperial) Chart

	No. Terminals	Conductor	Size mm² (AWG)	Ø mm (in)	Torque N-m (in-lbs)	Strip Length mm (in)	mm (in)
	x1		95...240 (3/0...400)	21,0 (.83)	29,8 (264)	30,0 (1.18)	10 (3/8)
			95...240	21,0	29,8	30,0	10
	x2		35...120 (2...250)	15,0 (.59)	19,0 (168)	A. 26 B. 52 (A. 1.02) (B. 2.04)	8 (5/16)
			35...120	15,0	19,0	A. 26 B. 52	8

 Metric rigid stranded cable / AWG stranded cable

 Metric flexible stranded cable

Part No.	Description		 kg/lbs
561154	SB2C 400	1	0,73/1.61



Metric (Imperial) Chart

	No. Terminals	Conductor	Size	Ø mm (in)	Torque N-m (in-lbs)	Strip Length mm (in)	mm (in)
	x1	ERICO® FLEXIBAR®	2x20x1 - 5x24x1	N/A	13,5 (120)	33,0 (1.30)	10 (3/8)
		IBSB/IBSBR	100				
	x2		35...120 (2...250)	15,0 (0.59)	19,0 (168)	A. 26 B. 52 (A. 1.02) (B. 2.04)	8 (5/16)
			35...120	15,0	19,0	A. 26 B. 52	8

 Metric rigid stranded cable / AWG stranded cable

 Metric flexible stranded cable

Part No.	Description		 kg/lbs
561155	SBF2C 400	1	0,76/1.67




Power Blocks & Terminals

SB 630 870 A - IEC 545 A -

- Cable to Cable

I = 870 A IEC
I = 545 A UL

- Icw KA rms 1s : 60.0
- IPk KA : 51
- Ui : 1000 V AC IEC
- Ui : 1500 V DC IEC
- Vin : 1250 V UL

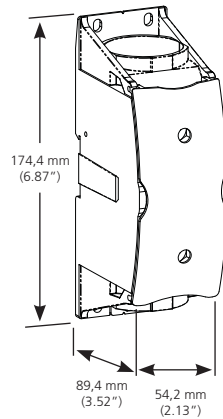


SBF 630 800/805* A - IEC 545 A -

- Cable to ERICO® FLEXIBAR® / Insulated Power braid

I = 800/805* A IEC
I = 545 A UL

- Icw KA rms 1s : 60.0
- IPk KA : 51
- Ui : 1000 V AC IEC
- Ui : 1500 V DC IEC
- Vin : 1000 V UL

*800 A IEC: IBSB/IBSBR
*805 A IEC: ERICO® FLEXIBAR®

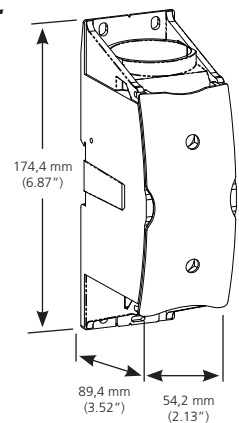

Metric (Imperial) Chart

	No. Terminals	Conductor	Size mm ² (kcmil)	Ø mm (in)	Torque N-m (in-lbs)	Strip Length mm (in)	mm (in)
	x1		240...500 (400...1000)	31,0 (1.22)	45,2 (400)	50,0 (1.97)	10 (3/8)
			240...500	31,0	45,2	50,0	10
	x1		240...500 (400...1000)	31,0 (1.22)	45,2 (400)	50,0 (1.97)	10 (3/8)
			240...500	31,0	45,2	50,0	10

 Metric rigid stranded cable / AWG stranded cable

 Metric flexible stranded cable

Part No.	Description		 kg/lbs
561156	SB 630	1	1,20/2.64



Metric (Imperial) Chart

	No. Terminals	Conductor	Size	Ø mm (in)	Torque N-m (in-lbs)	Strip Length mm (in)	mm (in)
	x1	ERICO® FLEXIBAR®	2x20x1 - 8x32x1	N/A	13,5 (120)	50,0 (1.97)	10 (3/8)
		IBSB/IBSBR	100, 240				
	x1		240...500 (400...1000)	31,0 (1.22)	45,2 (400)	50,0 (1.97)	10 (3/8)
			240...500	31,0	45,2	50,0	10

 Metric rigid stranded cable / AWG stranded cable

 Metric flexible stranded cable

Part No.	Description		 kg/lbs
561157	SBF 630	1	1,39/3.07



Power Terminals – SBLL






- Tinned Copper Bar
- Visual inspection of wire and confirmation of connection
- Quick connection with studs
- Easy connection on ERICO® FLEXIBAR®
- Adjustable transparent cover
- Halogen Free
- Self extinguishing: UL94 V-1
- Easy fixing: clip on din rail with end cap or mount to panel with screws
- Short Circuit Rated up to 100 KA - See UL file E198301
- RoHS Compliant

SBLL 250 290 A - IEC 255 A - cULus

- Modular: individual modules are stackable for multipole applications.
- SBLEC required for direct panel mount.

I = 290 A IEC
I = 255 A UL/CSA
 ▪ Icw KA rms 1s : 14.4
 ▪ IPk KA : 42
 ▪ Ui : 1000 VAC/
 1500 VDC IEC
 ▪ Vin : 1000 V UL




Part No.	Description	Box	kg/lbs
561132	SBLL 250	1	0,16/0.35



SBLL 500 750 A - IEC 475 A - cULus

- Modular: individual modules are stackable for multipole applications.

I = 750 A IEC
I = 475 A UL/CSA
 ▪ Icw KA rms 1s : 36
 ▪ IPk KA : 51
 ▪ Ui : 1000 VAC/
 1500 VDC IEC
 ▪ Vin : 1000 V UL



* CENTER TO CENTER DRILLING:
66 mm (2.6")




Part No.	Description	Box	kg/lbs
561134	SBLL 500	1	0,34/0.75



SBLL 800 1250 A - IEC 800 A - cULus

- Modular: individual modules are stackable for multipole applications.

I = 1250 A IEC
I = 800 A UL/CSA
 ▪ Icw KA rms 1s : 57.6
 ▪ IPk KA : 75
 ▪ Ui : 1000 VAC/
 1500 VDC IEC
 ▪ Vin : 1000 V UL




* CENTER TO CENTER DRILLING:
96 mm (3.78")

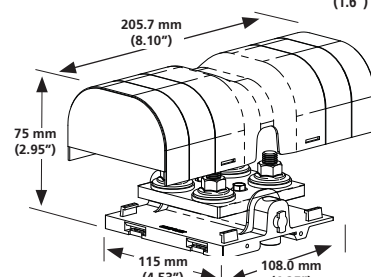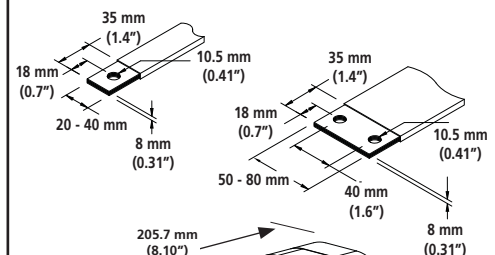

Part No.	Description	Box	kg/lbs
561136	SBLL 800	1	0,7/1.54


SBLEC

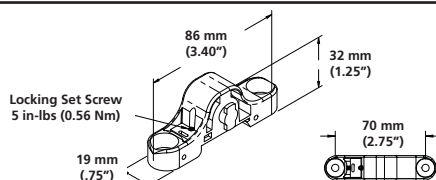

Part No.	Description	Box	kg/lbs
561138	SBLEC	1	0,01/0.02




Power Terminals – SBLT

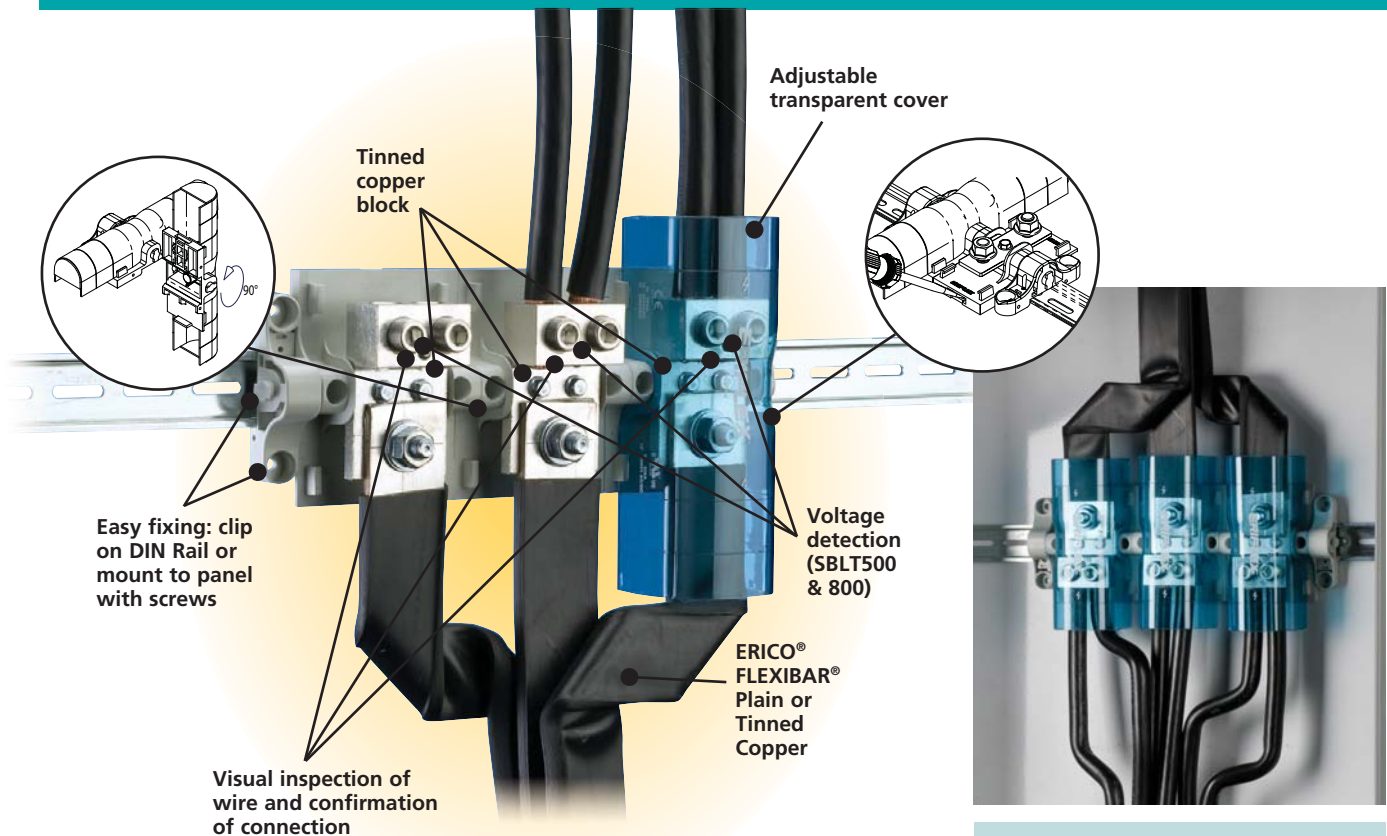

- Tested and Certified according to IEC 60947-7-1
Ui=1000VAC / 1500VDC
- UL® Recognized for US & Canada
- UL 1059
- Short Circuit Current Rated up to 100 KA
- Halogen Free
- UL94 V-1
- RoHS Compliant
- CE Conformity
- GOST

Power Terminals – SBTT

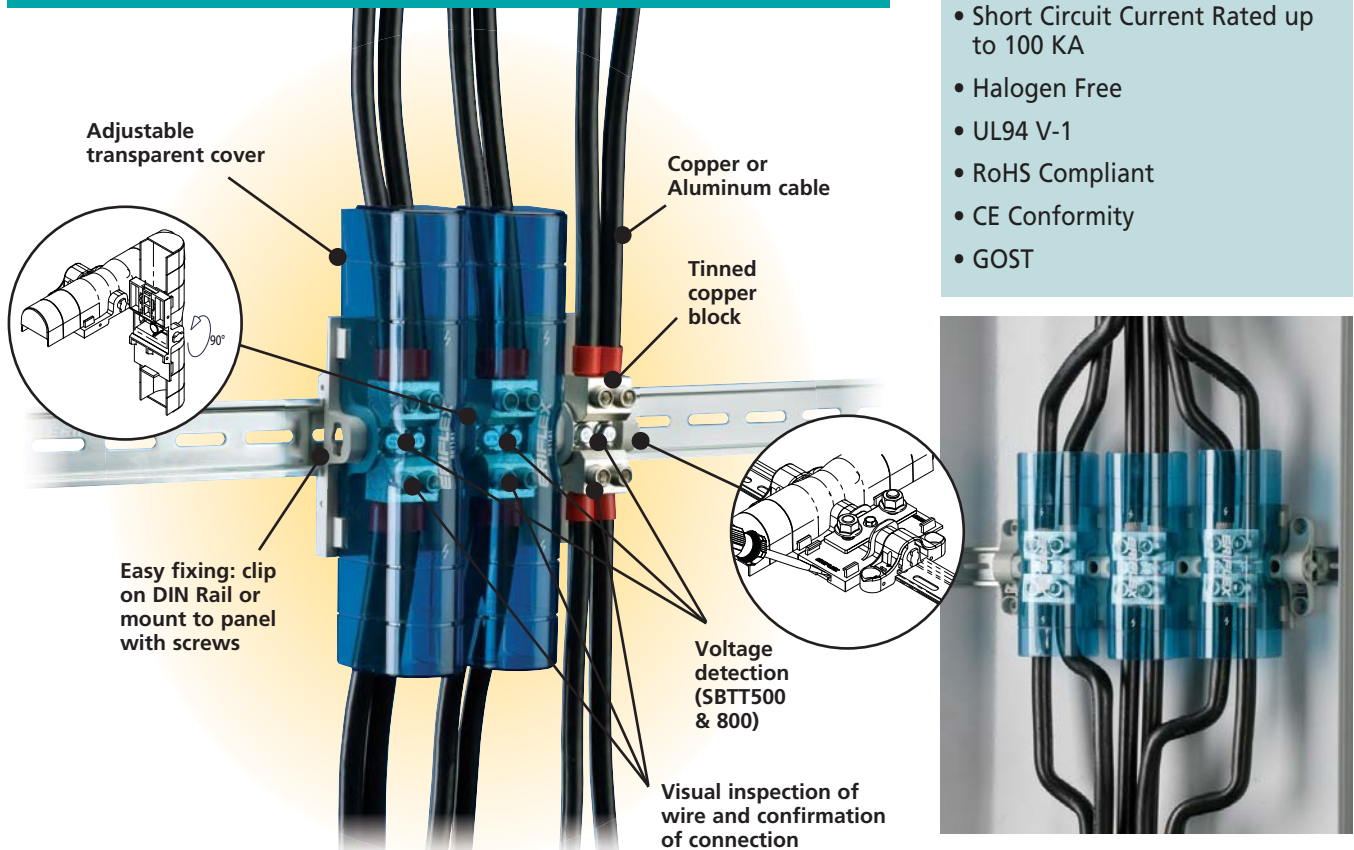

Power Terminals – SBLT



- Tinned Copper Block : Copper or Aluminum Cables
- Visual inspection of wire and confirmation of connection
- Quick connection with studs or tunnel
- Easy connection on ERICO® FLEXIBAR® or Cable
- Adjustable transparent cover
- Halogen Free
- Self extinguishing: UL94 V-1
- Easy fixing: clip on din rail with end cap or mount to panel with screws
- Short Circuit Rated up to 100 KA
- See UL® file E198301
- RoHS Compliant






SBLT 250 350 A - IEC 300 A - cUL^{us}

- Modular: individual modules are stackable for multipole applications.
- SBLEC required for direct panel mount.

I = 350 A IEC
I = 300 A UL/CSA

- Icw KA rms 1s : 8,4
- IPk KA : 30
- Ui : 1000 VAC / 1500 VDC IEC
- Vin : 1000 V AC/DC UL

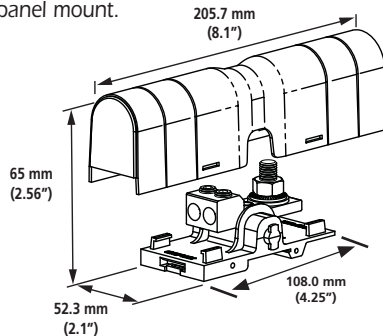

METRIC*	mm²	I'(N.m)	mm²	I'(N.m)	Ø	
ERICO FLEXIBAR or cable with lug						
10...50	8.5	10...35	8.5	x2	10	

IMPERIAL	AWG	I'(in/lb)	Ø	
ERICO FLEXIBAR or cable with lug				
8...1/0	168	x2	0.394	

Part No.	Description	kg/lbs
561140	SBLT 250	1 0,27 / 0.60

- * Flexible stranded cable (including terminal up to 50 mm²)
Rigid cable






SBLT 350 500 A - IEC 310 A - cUL^{us}

- Modular: individual modules are stackable for multipole applications.
- SBLEC required for direct panel mount.

I = 500 A IEC
I = 310 A UL/CSA

- Icw KA rms 1s : 22,2
- IPk KA : 43
- Ui : 1000 VAC / 1500 VDC IEC
- Vin : 1000 V AC/DC UL

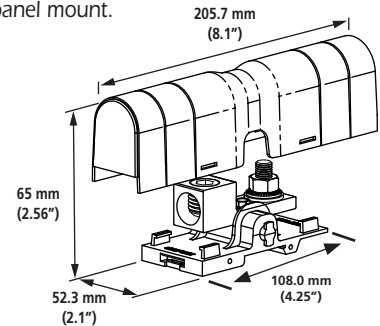

METRIC*	mm²	I'(N.m)	mm²	I'(N.m)	Ø	
ERICO FLEXIBAR or cable with lug						
35...185	25	35...150	25	x1	20	

IMPERIAL	AWG	I'(in/lb)	Ø	
ERICO FLEXIBAR or cable with lug				
2...350	221	x1	0.787	

Part No.	Description	kg/lbs
561142	SBLT 350	1 0,35 / 0.77




Power Blocks & Terminals

SBLT 500 750 A - IEC 500 A - cUL[®] US

- Modular: individual modules are stackable for multipole applications.

I = 750 A IEC
I = 500 A UL/CSA

- Icw KA rms 1s : 28,8
- IPk KA : 52
- Ui : 1000 VAC / 1500 VDC IEC
- Vin : 1000 V AC/DC UL

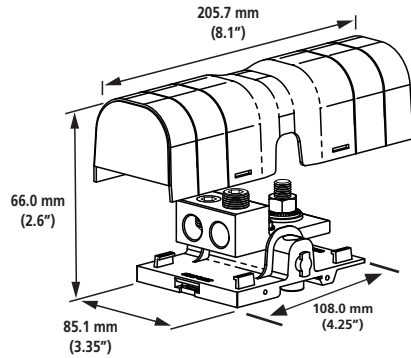

METRIC*	mm²	I'(N.m)	mm²	I'(N.m)	Ø	
ERICO FLEXIBAR or cable with lug						
	16...120	19	16...120	19	x2	15

IMPERIAL	AWG	I'(in/lb)	Ø	
ERICO FLEXIBAR or cable with lug				
	6...250	168	x2	0.59





Part No.	Description	kg/lbs
561144	SBLT 500	1 / 0,61 / 1.34

SBLT 800 1250 A - IEC 760 A - cUL[®] US

- Modular: individual modules are stackable for multipole applications.

I = 1250 A IEC
I = 760 A UL/CSA

- Icw KA rms 1s : 57,6
- IPk KA : 75
- Ui : 1000 VAC / 1500 VDC IEC
- Vin : 1000 V AC/DC UL

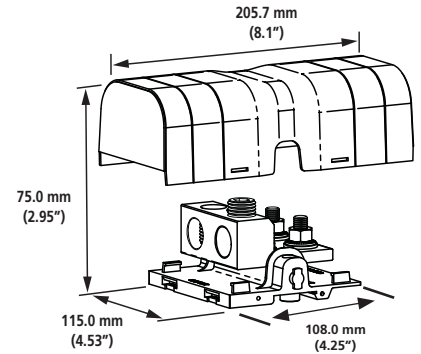


METRIC*	mm²	I'(N.m)	mm²	I'(N.m)	Ø	
ERICO FLEXIBAR or cable with lug						
	95...240	34	50...185	34	x2	22

IMPERIAL	AWG	I'(in/lb)	Ø	
ERICO FLEXIBAR or cable with lug				
	3/0...500	300	x2	0.866

Part No.	Description	kg/lbs
561146	SBLT 800	1 / 1,09 / 2.40


- * Flexible stranded cable (including terminal up to 50 mm²)
 Rigid cable

SBLEC

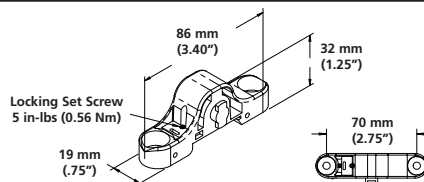

Part No.	Description	kg/lbs
561138	SBLEC	1 / 0,01/0.02

Power Terminals – SBTT

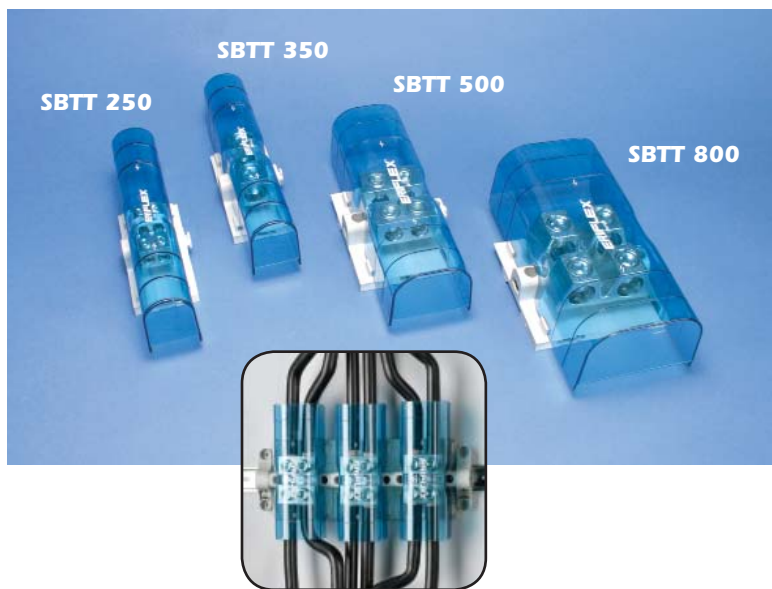

- Tinned Copper Block : Copper or Aluminum Cables
- Visual inspection of wire and confirmation of connection
- Quick connection with studs or tunnel
- Easy connection on ERICO® FLEXIBAR® or Cable
- Adjustable transparent cover
- Halogen Free
- Self extinguishing: UL94 V-1
- Easy fixing: clip on din rail with end cap or mount to panel with screws
- Short Circuit Rated up to 100 KA
- See UL® file E198301
- RoHS Compliant




SBTT 250 350 A - IEC 300 A - cULus

- Modular: individual modules are stackable for multipole applications.
- SBLEC required for direct panel mount.

I = 350 A IEC
I = 300 A UL/CSA

- Icw KA rms 1s : 8.4
- IPk KA : 30
- Ui : 1000 VAC / 1500 VDC IEC
- Vin : 1000 V AC/DC UL

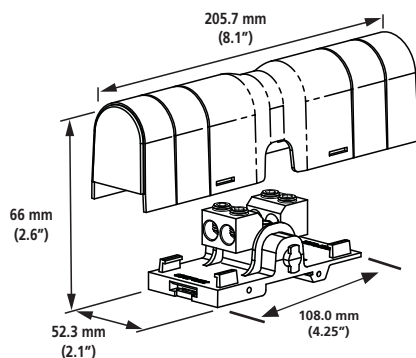

METRIC*		I'(N.m)		I'(N.m)		Ø	
 / 	10...50	8.5	10...35	8.5	x4	10	

IMPERIAL	AWG	I'(in/lb)		Ø	
 / 	8...1/0	168	x4	0,394	


Part No.	Description		 kg/lbs
561141	SBTT 250	1	0,26 / 0.57

SBTT 350 500 A - IEC 310 A - cULus

- Modular: individual modules are stackable for multipole applications.
- SBLEC required for direct panel mount.

I = 500 A IEC
I = 310 A UL/CSA

- Icw KA rms 1s : 22.2
- IPk KA : 43
- Ui : 1000 VAC / 1500 VDC IEC
- Vin : 1000 V AC/DC UL

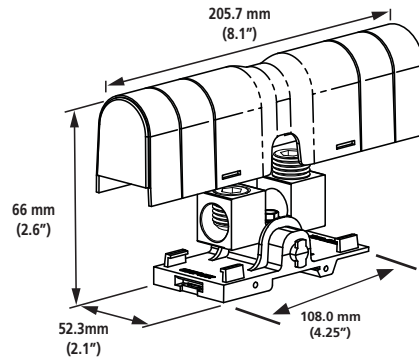

METRIC*		I'(N.m)		I'(N.m)		Ø	
 / 	35...185	25	35...150	25	x2	20	

IMPERIAL	AWG	I'(in/lb)		Ø	
 / 	2...350	221	x2	0,787	

Part No.	Description		 kg/lbs
561143	SBTT 350	1	0,33 / 0.73

*  Flexible stranded cable
(including terminal up to 50 mm²)
 Rigid cable




Power Blocks & Terminals

SBTT 500 750 A - IEC 500 A - cUL[®]us

- Modular: individual modules are stackable for multipole applications.

I = 750 A IEC
I = 500 A UL/CSA

- Icw KA rms 1s : 28.8
- IPk KA : 52
- Ui : 1000 VAC / 1500 VDC IEC
- Vin : 1000 V AC/DC UL

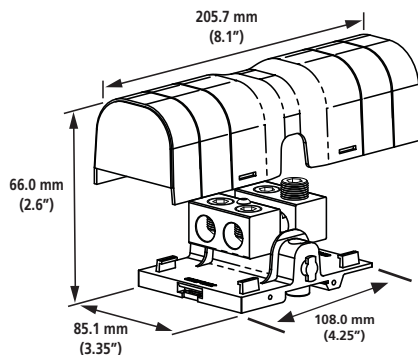

METRIC*		I ² (N.m)		I ² (N.m)	Ø	
 / 	16...120	19	16...120	19	x4	15

IMPERIAL	AWG	I ² (in/lb)	Ø	
 / 	6...250	168	x4	0.59


Part No.	Description		 kg/lbs
561145	SBTT 500	1	0,60 / 1.32

SBTT 800 1250 A - IEC 760 A - cUL[®]us

- Modular: individual modules are stackable for multipole applications.

I = 1250 A IEC
I = 760 A UL/CSA

- Icw KA rms 1s : 57,6
- IPk KA : 75
- Ui : 1000 VAC / 1500 VDC IEC
- Vin : 1000 V AC/DC UL

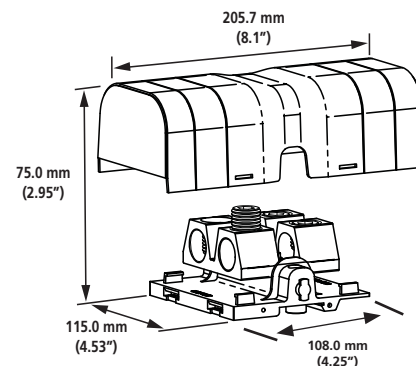


METRIC*		I ² (N.m)		I ² (N.m)	Ø	
 / 	95...240	34	50...185	34	x4	22

IMPERIAL	AWG	I ² (in/lb)	Ø	
 / 	3/0...500	300	x4	0.866

Part No.	Description		 kg/lbs
561147	SBTT 800	1	1,04 / 2.29


- *  Flexible stranded cable (including terminal up to 50 mm²)
 Rigid cable

SBLEC

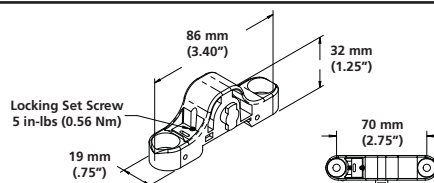

Part No.	Description		 kg/lbs
561138	SBLEC	1	0,01/0.02

Four Pole Distribution Blocks

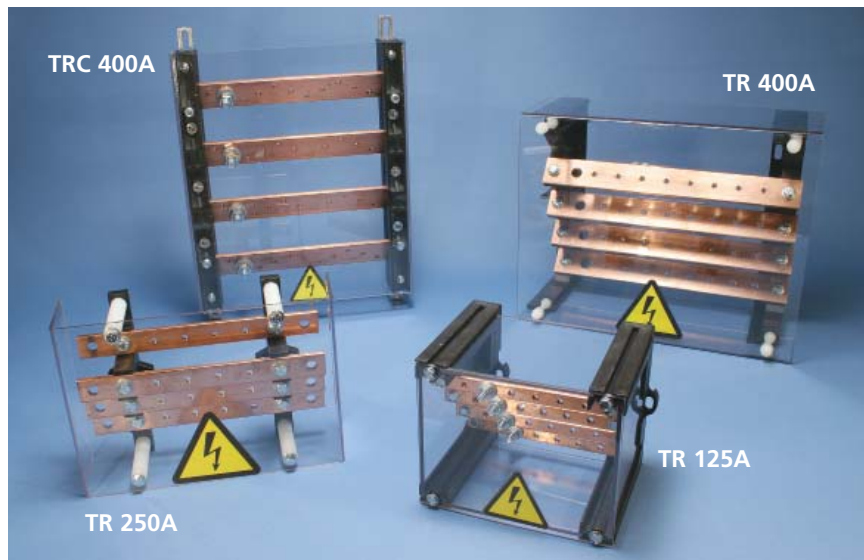

- A complete range from 125 A to 630 A
- Transparent protection cover
- Large accessibility for wiring
- Pre-assembled
- Self Extinguishing: UL94 V-0
- RoHS Compliant


IEC 61439.1

TR 125A

Threaded bars

12 x 4 - I = 125 A

- Easy clip in fixing for DIN rail or sheet steel
- Protection screen on 5 sides
- Equipped with a current input plug M6
- 5 outlets M5 per phase




- Icw KA rms 1s: 20
- IPk KÄ: 40
- Ui = 1000V

TR 250A

Threaded bars

20 x 5 - I = 250 A

- Easy fixing for DIN rail G or sheet steel
- Incomers right or left Ø 8 mm
- 4 outlets M6 per phase




- Icw KA rms 1s: 17
- IPk KÄ: 34
- Ui = 630V

TRC 400A

Threaded bars

32 x 5 in W - I = 400 A

- Easy connections due to inclined bars
- Equipped with a current input plug M10
- 10 outlets M6 per phase



- Icw KA rms 1s: 54
- IPk KÄ: 118
- Ui = 1000V

Part No.	Description		
563150	TR 125A	1	0,684

Part No.	Description		
563170	TR 250A	1	1,30


Part No.	Description		
563180	TRC 400A	1	2,65

TRS 160A

Threaded bars

15 x 5 - I = 160 A

- Easy fixing for DIN rail G or sheet steel
- Incomers right or left Ø 8 mm
- 6 outlets M6 per phase




- Icw KA rms 1s: 17
- IPk KÄ: 34
- Ui = 630V

TR 400A

Threaded bars

32 x 5 - I = 400 A

- Easy fixing for DIN rail or sheet steel
- 1 incomer Ø 10 mm
- 8 outlets M6 per phase




- Icw KA rms 1s: 21
- IPk KÄ: 44
- Ui = 1000V

TRC 630A

Threaded bars

30 x 10 - I = 630 A

- Incomers Ø 10 mm
- 8 outlets M8 per phase



- Icw KA rms 1s: 46
- IPk KÄ: 96
- Ui = 1000V

Part No.	Description		
563160	TRS 160A	1	1,15

Part No.	Description		
562010	TR 400A	1	2,83

Part No.	Description		
563190	TRC 630A	1	4,80



Four Pole Insulating Supports



To assemble customized distribution blocks 4 poles stair type


- Glass fiber reinforced polyamide
- Self-extinguishing material: UL 94 V-0
- Direct fixing of screen
- Easy clip in fixing for DIN rail or sheet steel
- RoHS Compliant
- Halogen Free

IEC 61439.1

BS/BSC 125A 125A - 160A

- For copper bars 12 x 4 and 15 x 5
- Easy connection
- Can be fixed on DIN rail using the DR clips or on metal sheet with the M6 screws enclosed in the packing.
- Halogen-free

- 1) Screw to lock the support
- 2) Direct fixing of the screen with self-tapping screw
- 3) Assemble on metal sheet

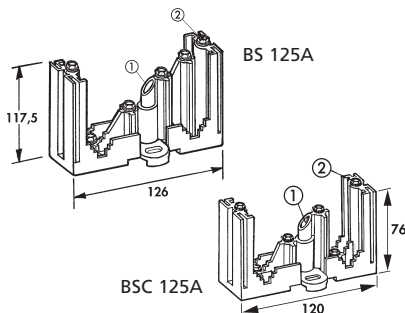

- BS 125A $U_i = 1000 \text{ V}$
- BSC 125A $U_i = 630 \text{ V}$


Part No.	Description		
551311	BS-B 125A	10	0,100
551321	BSC-B 125A	10	0,100

Spacing calculation accordingly to Icc withstanding:
see Technical Section

Transparent cover: See page 30

BS 250A 160A - 250A

- For copper bars M6 15 x 5 and 20 x 5
- Compact
- Mounting with M6 screws
- Possible fitting of a protective screen, by adding spacers
- Halogen-free




- $U_i = 630 \text{ V}$

Part No.	Description		
551300	BS 250A	10	0,050

BS 400A 160A - 630A

- For copper bars 15 x 5 – 20 x 5 – 32 x 5 – 20 x 10 – 30 x 10
- Easy clip in fixing for DIN rail or sheet steel
- Can be equipped with a protective screen or adjustable height
- Halogen-free



- $U_i = 1000 \text{ V}$

Part No.	Description		
551250	BS 400A	2	0,220

Disconnectable PEN System

A Unique solution for TN-C/TN-S Networks





Unique in the Market

- Application : dedicated product allowing separation from PEN to PE+N
- Composition : safe disconnectable system
- Clear identification
- Prevent measurement errors
- Avoid reconnection errors
- Complies to requests from inspection bodies
- Screen stickers included in 12 languages



PEN-D 75²



$I_n : 125A \text{ max}$

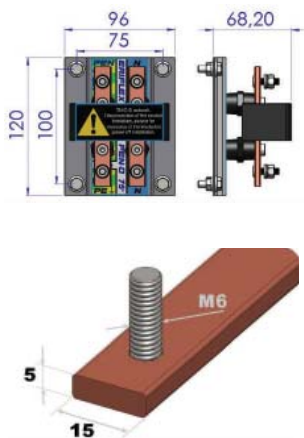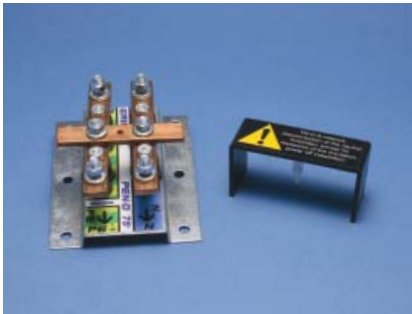

Part No.	Description		kg/lbs
568800	PEN-D 75 ²	1	0,55/1.21

PEN-D 100²


$I_n : 250A \text{ max}$

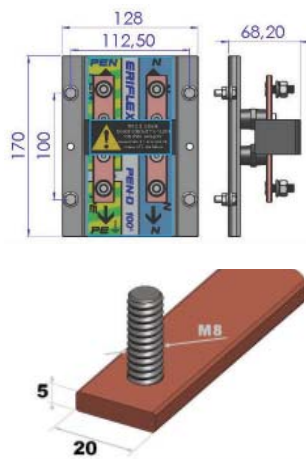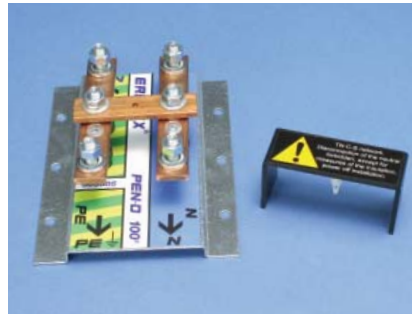

Part No.	Description		kg/lbs
568805	PEN-D 100 ²	1	0,80/1.76

PEN-D 300²

$I_n : 630A \text{ max}$

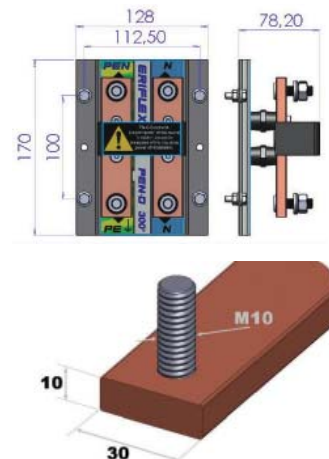


Part No.	Description		kg/lbs
568810	PEN-D 300 ²	1	1,52/3.35




PEN-D Wiring in distribution board


TN-S Distribution

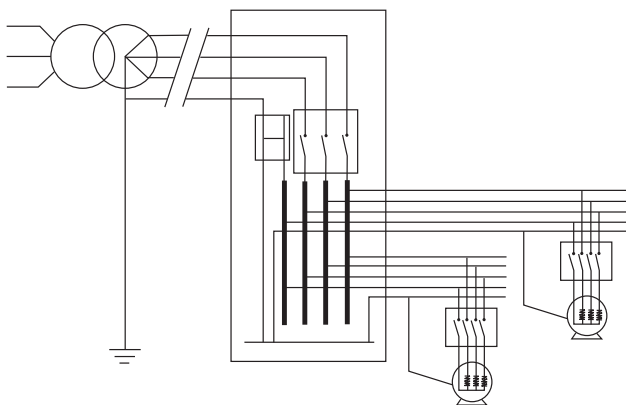

Dedicated TN-S Power Supply

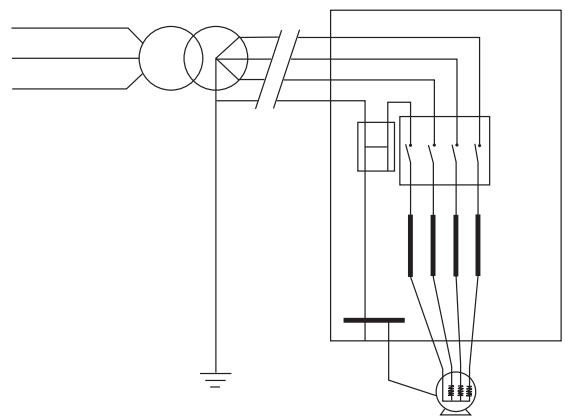

Spacers & Accessories

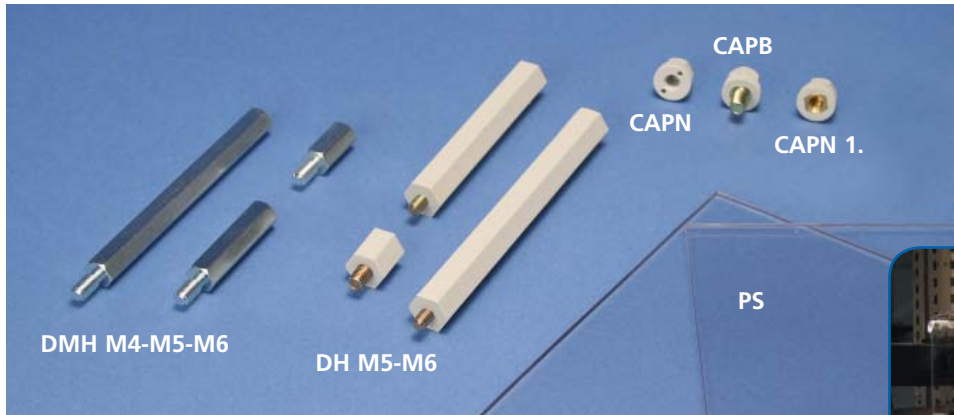

- A complete range of accessories for easy distribution block assembly



DMH M4/M5/M6 Metallic spacers

- Metallic hexagonal spacers
- Zinc-plated steel
- To make higher plates, screens or profiles
- Male-female allowing stable mounting
- See drawing on DH


Part No.	Description	L mm	Ø mm	A mm	B mm		
561560	DMH 10M4	10	M4	8-10	7	100	0,003
561570	DMH 15M4	15	M4	8-10	7	100	0,005
561580	DMH 20M4	20	M4	8-10	7	100	0,007
561590	DMH 25M4	25	M4	8-10	7	50	0,008
561600	DMH 30M4	30	M4	8-10	7	50	0,010
561610	DMH 35M4	35	M4	8-10	7	50	0,012
561620	DMH 40M4	40	M4	8-10	7	50	0,0125
561630	DMH 50M4	50	M4	8-10	7	50	0,017
561640	DMH 60M4	60	M4	8-10	7	25	0,019

Part No.	Description	L mm	Ø mm	A mm	B mm		
561660	DMH 15M5	15	M5	10	8	50	0,006
561670	DMH 20M5	20	M5	10	8	50	0,008
561680	DMH 25M5	25	M5	10	8	50	0,010
561690	DMH 30M5	30	M5	10	8	50	0,012
561700	DMH 35M5	35	M5	10	8	25	0,014
561710	DMH 40M5	40	M5	10	8	25	0,016
561720	DMH 50M5	50	M5	10	8	25	0,022
561730	DMH 60M5	60	M5	10	8	25	0,027
561740	DMH 70M5	70	M5	10	8	25	0,029
561750	DMH 80M5	80	M5	10	8	25	0,033

Part No.	Description	L mm	Ø mm	A mm	B mm		
561760	DMH 15M6	15	M6	10	10	50	0,010
561770	DMH 20M6	20	M6	12	10	50	0,012
561780	DMH 30M6	30	M6	12	10	25	0,018
561790	DMH 40M6	40	M6	12	10	25	0,025
561800	DMH 50M6	50	M6	12	10	25	0,032
561810	DMH 60M6	60	M6	12	10	25	0,038
561820	DMH 70M6	70	M6	12	10	25	0,043
561830	DMH 80M6	80	M6	12	10	25	0,052
561840	DMH 90M6	90	M6	12	10	25	0,058
561850	DMH 100M6	100	M6	12	10	10	0,064

DH M5/M6 Spacers


- Male-female
- Electrotechnical applications
- Insulating part made from polystyrol
- Threaded-end, made from zinc-plated steel
- Working temperature up to 80°C
- Insulation voltage 1000 V

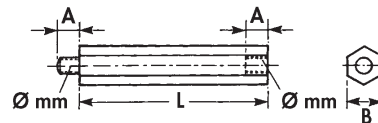

Part No.	Description	L mm	Ø mm	A mm	B mm		
560660	DH 15M5	15	M5	7	13	100	0,004
560670	DH 20M5	20	M5	7	13	100	0,005
560680	DH 30M5	30	M5	7	13	100	0,006
560690	DH 45M5	45	M5	7	13	100	0,009
560700	DH 55M5	55	M5	7	13	100	0,011
560710	DH 70M5	70	M5	7	13	100	0,014
560720	DH 85M5	85	M5	7	13	100	0,017
560730	DH 120M5	120	M5	7	13	100	0,024

Part No.	Description	L mm	Ø mm	A mm	B mm		
560740	DH 15M6	15	M6	7-8	13	100	0,004
560750	DH 20M6	20	M6	7-8	13	100	0,005
560760	DH 30M6	30	M6	7-8	13	100	0,009
560770	DH 45M6	45	M6	7-8	13	100	0,013
560780	DH 70M6	70	M6	7-8	13	100	0,020
560790	DH 120M6	120	M6	7-8	13	100	0,035


CAPN-CAPB Cap nuts

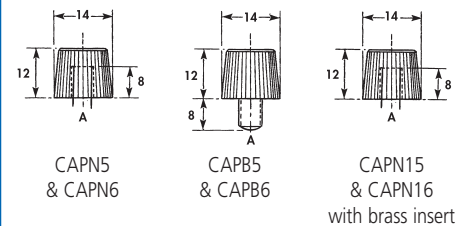

Part No.	Description	A		
560800	CAPN5	M5	100	0,001
560810	CAPN6	M6	100	0,001
560820	CAPN15	M5	100	0,003
560830	CAPN16	M6	100	0,003
560840	CAPB5	M5	100	0,004
560850	CAPB6	M6	100	0,004


PS Protection screen (made from PVC)

- $U_i = 1000 \text{ V}$




Part No.	Description	L mm	A mm	e mm	Mounts to		
563120	PS1000x60x3	1000	60	3	BSC 125A/S	10	0,302
563130	PS500x120x3	500	120	3	BSC 125A/T	10	0,213
551330	PS500x126x3	500	126	3	BS 125A/T	10	0,224
551340	PS1000x99x3	1000	99	3	BS 125A/S	10	0,498
551260	PS1000x250x3	1000	250	3	BS 400T	1	1,030
551280	PS1000x2000x3	1000	2000	3	-	1	8,4



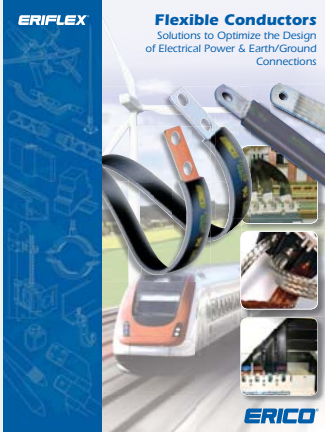

The Flexible Conductors catalog highlights a range of high-quality products to optimize the design of low-voltage power and ground connections for a variety of applications.

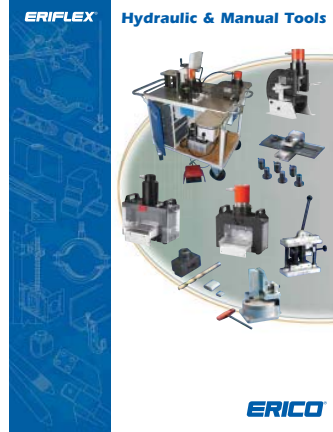

ERIFLEX® hydraulic and manual tools for ERIFLEX FLEXIBAR flexible busbar and copper busbar manipulation and transformation.




Solutions for Electrical Power & Earth Connections catalog.



Fold and bend ERIFLEX® FLEXIBAR quickly without insulation damage, up to 10x120x1 / 12x100x1 with manual bending and folding tools.



Specific document for earthing and grounding solutions.

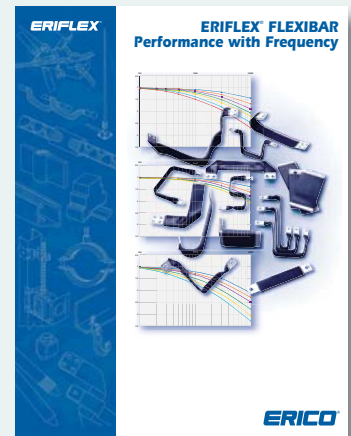

Specific ERIFLEX FLEXIBAR technical data for high frequency applications.



Foundation grounding and construction, power connections, surge protection and lightning protection products for the wind energy industry.




Grounding, lightning protection, electrical connection and cable management solutions for the solar power industry.



www.erico.com



AUSTRALIA
Phone 1-800-263-508
Fax 1-800-423-091



CHINA
Phone +86-21-3430-4878
Fax +86-21-5831-8177



HUNGARY
Phone 06-800-16538
Fax +39-0244-386-107



NORWAY
Phone 800-100-73
Fax 800-100-66



SWITZERLAND
Phone 0800-55-86-97
Fax 0800-55-96-15



BELGIUM
Phone 0800-757-48
Fax 0800-757-60



DENMARK
Phone 808-89-372
Fax 808-89-373



INDONESIA
Phone +62-21-575-0941
Fax +62-21-575-0942



POLAND
Phone +48-71-349-04-60
Fax +48-71-349-04-61



THAILAND
Phone +66-2-267-5776
Fax +66-2-636-6988



BRAZIL
Phone +55-11-3623-4333
Fax +55-11-3621-4066



FRANCE
Phone 0-800-901-793
Fax 0-800-902-024



ITALY
Phone 800-870-938
Fax 800-873-935



SINGAPORE
Phone +65-6-268-3433
Fax +65-6-268-1389



UNITED ARAB EMIRATES
Phone +971-4-881-7250
Fax +971-4-881-7270



CANADA
Phone +1-800-677-9089
Fax +1-800-677-8131



GERMANY
Phone 0-800-189-0272
Fax 0-800-189-0274



MEXICO
Phone +52-55-5260-5991
Fax +52-55-5260-3310



SPAIN
Phone 900-993-154
Fax 900-807-333



UNITED KINGDOM
Phone 0808-2344-670
Fax 0808-2344-676



CHILE
Phone +56-2-370-2908
Fax +56-2-369-5657



HONG KONG
Phone +852-2764-8808
Fax +852-2764-4486



NETHERLANDS
Phone 0800-0200-135
Fax 0800-0200-136



SWEDEN
Phone 020-790-908
Fax 020-798-964



UNITED STATES
Phone 1-800-753-9221
Fax +1-440-248-0723