


Single Receptacles

Heavy-Duty Industrial Specification Grade

Weather- and Tamper-Resistant and Tamper-Resistant

15 A & 20 A, 250 V

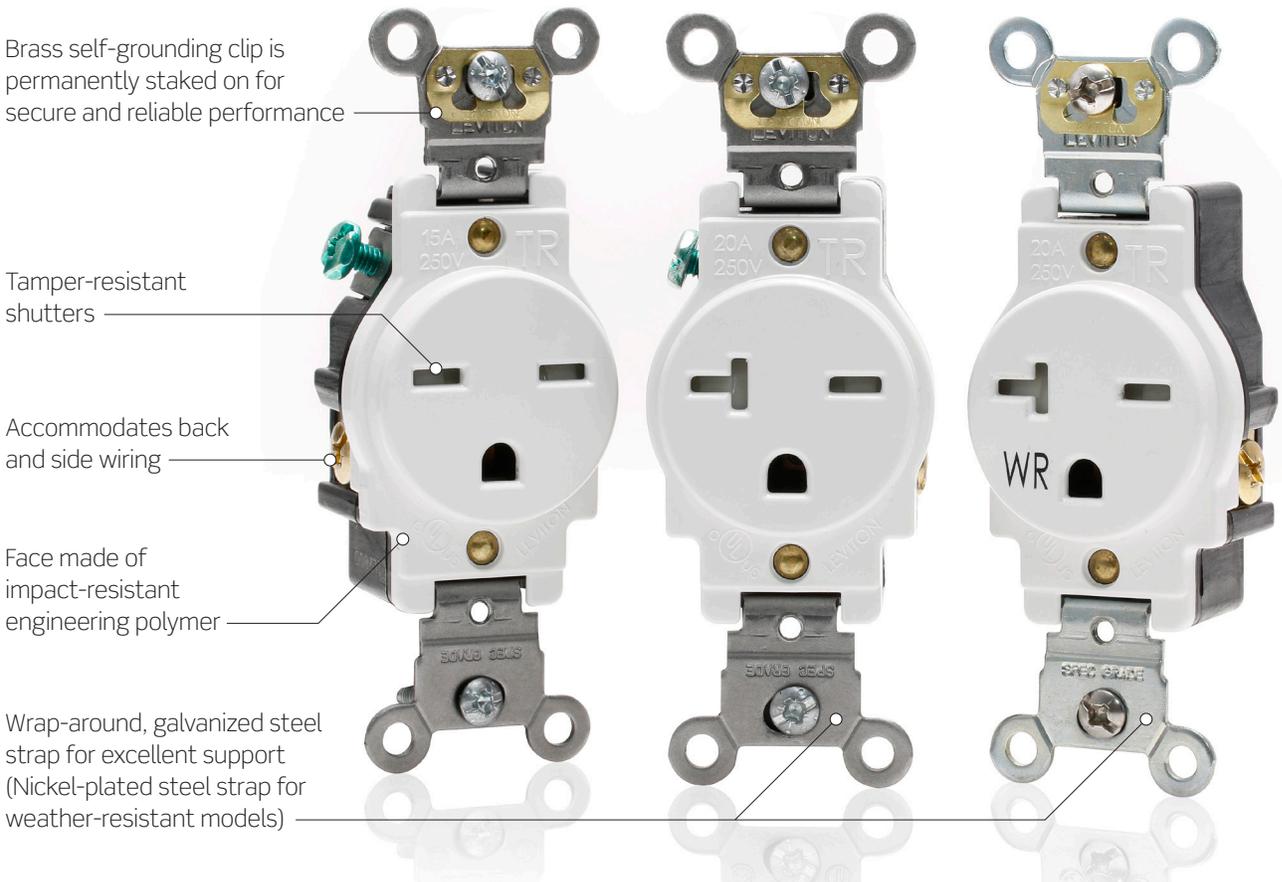

Brass self-grounding clip is permanently staked on for secure and reliable performance

Tamper-resistant shutters

Accommodates back and side wiring

Face made of impact-resistant engineering polymer

Wrap-around, galvanized steel strap for excellent support (Nickel-plated steel strap for weather-resistant models)

Common Applications:

- Education Facilities
- Commercial Buildings
- Health Care Facilities
- Transportation Facilities
- Hospitality
- Multiple Dwelling Units (MDUs)

Ordering Information


| Feature | | Tamper-Resistant | | Weather- and Tamper-Resistant | |
|-------------|--------------|------------------|------------|-------------------------------|------------|
| Ratings | | 15 A/250 V | 20 A/250 V | 15 A/250 V | 20 A/250 V |
| NEMA Config | | 6-15R | 6-20R | 6-15R | 6-20R |
| Order ID | Brown | T5661 | T5461 | W5661-T00 | W5461-T00 |
| | Ivory | T5661-I | T5461-I | W5661-T0I | W5461-T0I |
| | White | T5661-W | T5461-W | W5661-T0W | W5461-T0W |
| | Gray | T5661-GY | T5461-GY | W5661-TGY | W5461-TGY |
| | Black | T5661-E | T5461-E | W5661-T0E | W5461-T0E |
| | Light Almond | T5661-T | T5461-T | W5661-T0T | W5461-T0T |
| | Yellow | N/A | N/A | W5661-T0Y | W5461-T0Y |

Specifications


| Order ID | T5661 | T5461 | W5661-T | W5461-T |
|---------------------------------------|---|--|----------|---------|
| Electrical Specifications | | | | |
| Horsepower Rating | 1-1/2 hp | 2 hp | 1-1/2 hp | 2 hp |
| Amperage | 15 A | 20 A | 15 A | 20 A |
| Voltage | 250 V | 250 V | 250 V | 250 V |
| Grounding | Self-Grounding | | | |
| Pole(s) | 2 | | | |
| Wire(s) | 3 | | | |
| Dielectric Voltage | 2000 VAC | | | |
| Temperature Rise | Max 30°C | | | |
| Environmental Specifications | | | | |
| Flammability Rating | V-2 | | | |
| Operating Temperature | Maximum Continuous 75°C, Minimum -40°C (w/o impact) | | | |
| Material Specifications | | | | |
| Face | PBT | | | |
| Body | Nylon | | | |
| Mounting Strap | Galvanized Steel | Nickel-Plated Steel | | |
| Line Contacts | Brass Triple Wipe 0.040" | | | |
| Self-Grounding Clip | Brass | | | |
| Grounding Screw | #8 Brass | | | |
| Ground Contacts | Phosphor Bronze | | | |
| Mounting Screws | #6 Plated Steel | #6 Stainless Steel | | |
| Terminal Clamps | Galvanized Steel | Brass | | |
| TR Shutter | Thermoplastic | | | |
| Terminal Screws | #10 Brass | | | |
| Mechanical Specifications | | | | |
| Product ID | Ratings are marked on device | | | |
| Wire Accomodation | #14-#10 AWG Solid or Stranded | | | |
| Termination | Back and Side Wire | | | |
| Strap Construction | Wraparound Strap | | | |
| Product Features | | | | |
| Feature(s) | Tamper-Resistant, Smooth Face, RoHS Compliant | Weather- and Tamper-Resistant, Smooth Face, RoHS Compliant | | |
| Device Type | Single Receptacle Outlet | | | |
| Grade | Heavy-Duty Industrial Specification Grade | | | |
| NEMA Configuration | 6-15R | 6-20R | 6-15R | 6-20R |
| Standards & Certifications | | | | |
| NEMA | WD-1 and WD-6 | | | |
| Applicable Standards & Certifications | UL 498; CSA C22.2, No. 42; Fed Spec WC-596; NOM | | | |
| Warranty | | | | |
| Warranty | 10-Year Limited | | | |

Dimensions

Front View

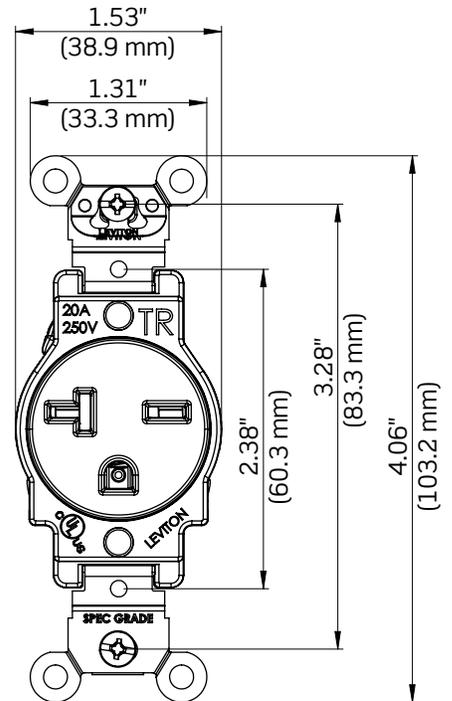

Side View

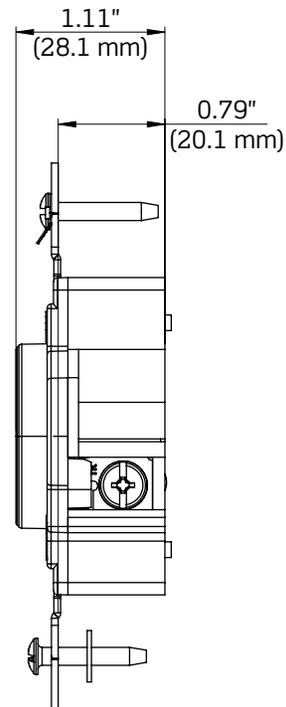

Visit our Website at:
www.leviton.com/commercial
 email: commercial@leviton.com

Q-1156

012419

Leviton Manufacturing Co., Inc.
 201 N Service Rd, Melville, NY 11747
 Telephone: 1-800-323-8920 • FAX: 1-800-832-9538
 Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): 1-800-824-3005

© 2019 Leviton Manufacturing Co., Inc. All rights reserved.

