

Related Products

Pressure Relief 3-Port Valve with Locking Hole VHS 20/30/40/50

Manually operated valve can be used to prevent accidents caused by residual pressure in pneumatic lines.

Can prevent accidents due to inadvertent air supply.

When in the exhaust position, the valve may be padlock secured, preventing accidental start-ups while personnel are cleaning or servicing equipment.

The supply/exhaust status of the air flow can be verified at a glance in the indicating window.




SUP : Supply
EXH : Exhaust

For energy isolation purposes, the compressed air supply is disconnected, residual pressure is relieved, and the handle can either be locked or labeled with a warning tag.



Combination with a modular style FRL is possible.

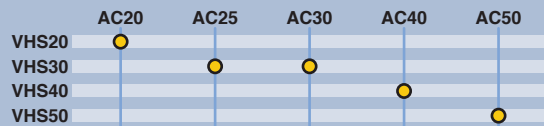

An interface part is required if a spacer or spacer with bracket shown in the table below is attached to a modular FRL.

Pressure relief 3-port valve	Interface P/N	Spacer with bracket P/N	Applicable air preparation equipment
VHS20	Y200-A	Y200T-A	AC20
VHS30	Y300-A	Y300T-A	AC25, AC30
VHS40	Y400-A	Y400T-A	AC40
VHS40-06	Y500-A	Y500T-A	AC40-06
VHS50	Y600-A	Y600T-A	AC50, AC60 (Note)

Note) Although connection to AC60 is possible, the flow rate may decrease due to the mounting position.

Worldwide Subsidiaries

Europe

Austria
Belgium
Bulgaria
Croatia
Czech Republic
Denmark
Estonia
Finland
France
Germany
Greece
Hungary
Ireland
Italy
Kazakhstan
Lithuania
Latvia
Netherlands
Norway
Poland
Romania
Russia
Slovakia
Slovenia
Spain / Portugal
Sweden
Switzerland
Turkey
UK


Asia / Oceania

Australia
China
Hong Kong
India
Indonesia
Japan
Malaysia
New Zealand
Philippines
Singapore
South Korea
Taiwan
Thailand
United Arab Emirates
Vietnam

Africa

South Africa
North America
USA
Canada
South America
Argentina
Bolivia
Brazil
Chile
Colombia
Mexico
Peru
Venezuela

U.S. & Canadian Sales Offices

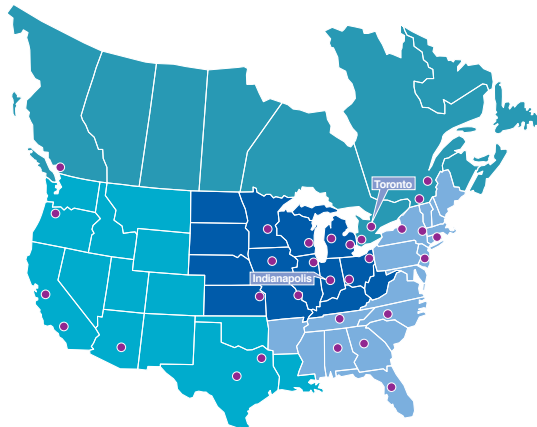

WEST

Austin
Dallas
Los Angeles
Phoenix
Portland
San Jose

EAST

Albany
Atlanta
Birmingham
Boston
Charlotte
Knoxville
Nashville
New Jersey
Rochester
Tampa

CENTRAL

Chicago
Cincinnati
Cleveland
Detroit
Des Moines
Grand Rapids
Indianapolis
Kansas City
Milwaukee
Minneapolis
St. Louis

CANADA

Montreal
Quebec City
Toronto
Vancouver
Windsor

SMC Corporation of America

10100 SMC Blvd., Noblesville, IN 46060

www.smcusa.com

SMC Automation Canada Ltd.

www.smcautomation.ca

(800) SMC.SMC1 (762-7621)

e-mail: sales@smcusa.com

For International inquiries: www.smcworld.com



Soft Start-Up Valve With Lock Out



Series AVL2000/3000/4000/5000

© 2020 SMC Corporation of America, All Rights Reserved.

All reasonable efforts to ensure the accuracy of the information detailed in this catalog were made at the time of publishing. However, SMC can in no way warrant the information herein contained as specifications are subject to change without notice.

Courtesy of Steven Engineering, Inc - (800) 258-9200 - sales@steveneng.com - www.stevenengineering.com

Soft start up valve with lock out

- Large effective area ● Low power consumption
- Manual/Manual solenoid lock out ● Modular design

How to Order

AVL 20 00 - F 02 G - 5 DZM - R - X238-Q

Soft start valve with lock out

Body size	Port thread
20	1/4
30	3/8
40	1/2
50	3/4, 1

Port size	Port thread
Nil	Rc
N	NPT
F	G

Port size	Port thread
02	1/4 (AVL2000)
03	3/8 (AVL3000)
04	1/2 (AVL4000)
06	3/4 (AVL5000)
10	1 (AVL5000)

Option	Option
Nil	No gauge
G	Pressure gauge (Unit: MPa)
P	Pressure gauge (Unit: MPa, psi)

Rated coil voltage

Rated coil voltage	Rated coil voltage
Nil	Manual lockout
1	100VAC (50/60Hz)
2	200VAC (50/60Hz)
3	110 to 120VAC (50/60Hz)
4	220VAC (50/60Hz)
5	24VDC
6	12VDC
9	Others

Air direction

Air direction	Air direction
Nil	Left to Right
R	Right to Left

Button Color

Button Color	Button Color
Nil	Red button, manual or electrical lockout
X238	Black button, manual lockout
X238-Q	Black button, electrical lockout, CE marked

Electric entry

Electric entry	Electric entry
Nil	Manual lockout
D	D type DIN connector
DZ	D type DIN connector with indicator light & suppressor
DZM	D type DIN connector with M12 connector, indicator light & surge voltage suppressor

Note:

The AVL is not an emergency stop device. It is an energy isolation unit.

AVL2000/3000/4000/5000


Lockable soft start valve. Gradual increase of supply pressure and rapid exhaust of system air when the supply is shut off.



Dimension AVL2000 to AVL5000

(mm)

Model	Port size	A	B	C	D	E	F	G	H
AVL2000-02	1/4	67	-	111	31	55	-	40	64 (Max. 73)
AVL2000-02-DZM	1/4	67	20.5	111	31	55	34	40	64 (Max. 73)
AVL3000-03	3/8	76	-	118	36	57	-	48	64 (Max. 73)
AVL3000-03-DZM	3/8	76	12.5	118	36	57	34	48	64 (Max. 73)
AVL4000-04	1/2	98	-	133	47	61	-	52	64 (Max. 73)
AVL4000-04-DZM	1/2	98	-	133	47	61	34	52	64 (Max. 73)
AVL5000-06 to 10	3/4 & 1	128	-	161	59	77	-	74	64 (Max. 73)
AVL5000-06 to 10-DZM	3/4 & 1	128	-	161	59	77	34	74	64 (Max. 73)

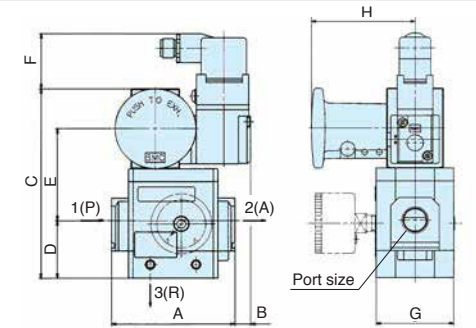


AVL2000 push button protrudes by 1mm over the body.

Dimension AC20* to AC60*

(mm)


Model	A1	A2	A3
AC20*	41.5	43	67.5
AC25*	55	57	78
AC30*	55	57	78
AC40*	72.5	75	100.5
AC50*	93	96	131
AC55*	98	96	131
AC60*	98	101	131

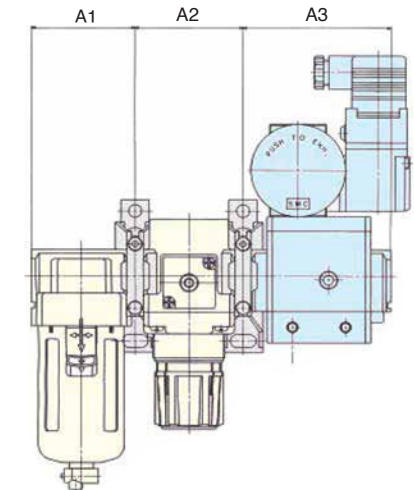

Specifications

Model			AV2000	AV3000	AV4000	AV5000	
Port size			1/4	3/8	1/2	3/4	1
Proof pressure			225 psi (1.5 MPa)				
Operating pressure range			30 to 150 psi (0.2 to 1 MPa)				
Ambient and fluid temp.			32 to 140°F (0 to 60°C)				
Effective area (mm²)	1(P) to 2(A)		20	37	61	113	122
	2(A) to 3(R)		24	49	76	132	141
Weight manual/solenoid lb (kg)			1.14 (0.64)	1.63 (0.74)	2.21(1.00)	4.19 (1.90)	4.06(1.84)
Weight manual lb (kg)			1.15 (0.52)	1.37 (0.62)	1.94(0.88)	3.93 (1.78)	3.79 (1.72)
Electrical specification	Rated coil voltage		100, 200, 110 to 120, 220VAC (50/60 Hz), 12, 24VDC				
	Allowable voltage fluctuation		-15% to +10% of rated voltage				
	Coil insulation type		Equivalent to B type [266°F (130°C)]				
	Current consumption	AC	Inrush	5.6V (50 Hz), 5.0VA (60 Hz)			
			Energized	3.4VA (2.1W) 50 Hz, 2.3VA (1.5W) 60 Hz			
	Current consumption DC		1.8W				
	Electric entry		Type D DIN Terminal, M12 connector				
	Optional specification		Indicator light/Surge voltage suppressor				

Piston B Switching Pressure (Close to Open)

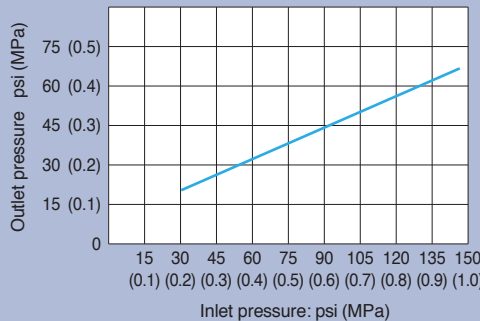

Combination with a modular style FRL is possible.

	AC20	AC25	AC30	AC40	AC50
AVL2000	●				
AVL3000		●	●		
AVL4000				●	
AVL5000					●