

TS8 316L Stainless Disconnect Module – Type 4X



ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL


IT INFRASTRUCTURE

SOFTWARE & SERVICES

TS8 316L Stainless Disconnect Module – Type 4X

Strong Design




- Converts standard TS8 into fully functional disconnect enclosure
- Fits TS8 316L and 304 stainless steel enclosures
- Available in 5 standard sizes
 - 1800, 2000 and 2200mm high
 - 500 and 600mm deep
- Universal mounting – left or right side
- UL Type 4X environmental seal
- Single person installation
- Works in conjunction with most major manufacturers flange disconnect handles

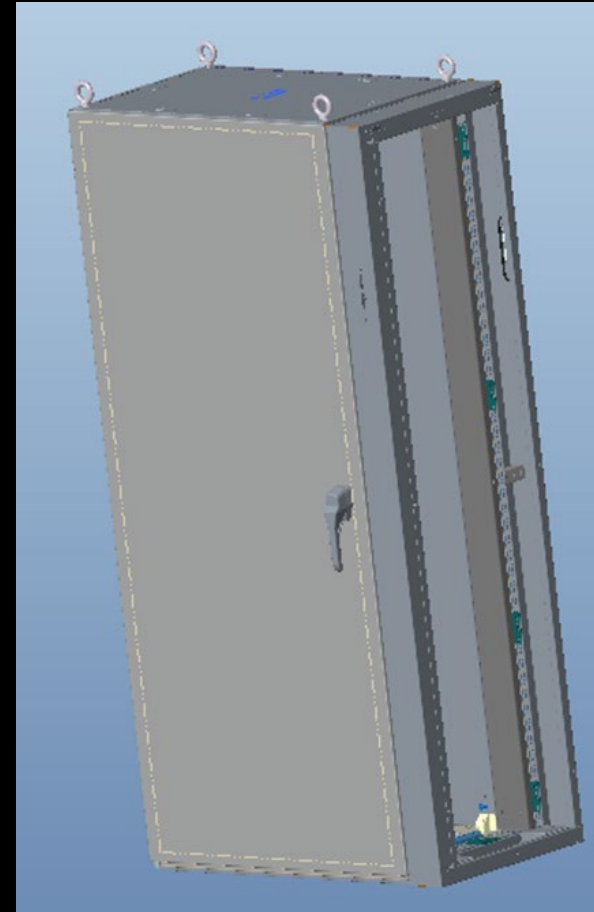

TS8 316L Stainless Disconnect Module – Type 4X

Simple installation

- Easy to follow installation instructions
- Includes standard baying clamps
- Master door interlock functionality
 - Rittal FMD hardware compatibility
 - Adjustability built-in
- Accepts standard MPL joining piece
- Accepts standard TS 316 sidewall

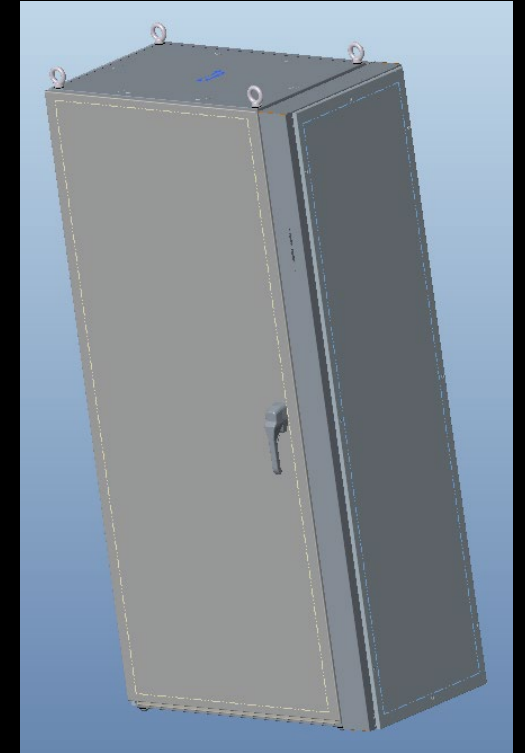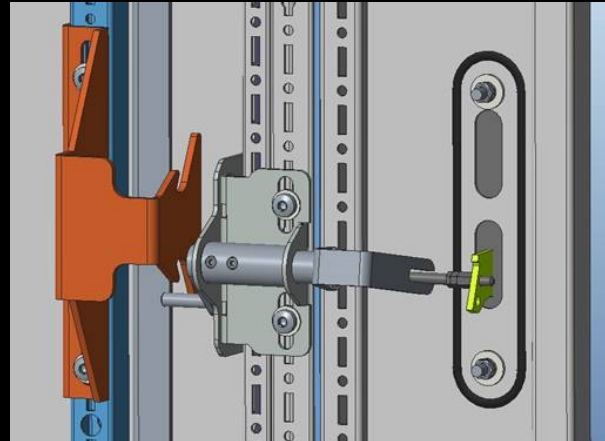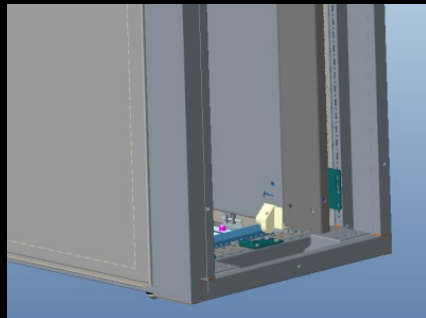

TS8 316L Stainless Disconnect Module – Type 4X

Part Number	Description
9957851	1800H x 500D TS8 Disconnect Module – SS 316L
9957852	1800H x 600D TS8 Disconnect Module – SS 316L
9957853	2000H x 500D TS8 Disconnect Module – SS 316L
9957854	2000H x 600D TS8 Disconnect Module – SS 316L
9957855	2200H x 600D TS8 Disconnect Module – SS 316L

North American Innovations



Thank you.

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE

SOFTWARE & SERVICES

