

Pro-face

by **Schneider** Electric

Basic Web HMI
STW6000 Series



Achieve a high level of visualization with the

New Basic Web HMI

Refined

An innovative HMI with a sophisticated design that transforms simple machines.



Simple & Easy

The simple design and interface help increase productivity and efficiency.



- Go to start page
- Refresh page
- Stop loading
- Next page
- Previous page
- Show Menu

Connected & Secured

Agnostic connectivity with web devices to enhance their flexibility and increase value with secured.




What is Web HMI?

Many industrial automation devices support HTML5, which can be displayed on PCs, tablets, and smartphones. As a Basic Web HMI, STW6000 can easily display HTML5 data from multiple devices. We are the HMI specialist, and the superior quality display, maintainability and robustness of our Basic Web HMI meets the needs of simple machine applications for factory automation.




Main Display

Main display for simple machine is alternative to basic terminal.

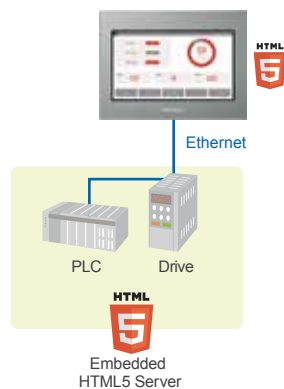

Secondary Display

Secondary cost effective display can also visualize small information for maintenance-diagnostic directly from PLC Servers or from the main display if it embeds its own server.

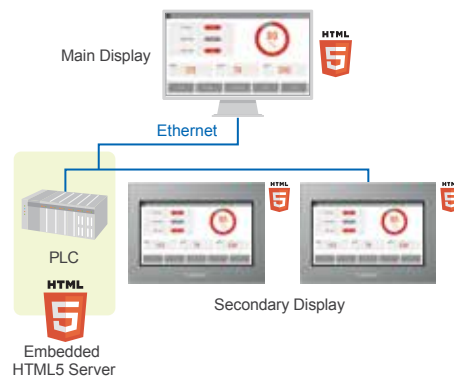

	STW-6200WA	STW-6400WA	STW-6500WA	STW-6600WA	STW-6700WA
Display	4.3" Wide (480 x 272)	7.0" Wide (800 x 480)	10.1" Wide (1,024 x 600)	12.1" Wide (1,280 x 800)	15.6" Wide (1,366 x 768)
	16M colors White LED 16 level brightness control				
Touch Panel	Type:Resistive film (analog), Service life:1,000,000 times or more				
Interface*	Ethernet : IEEE802.3i / IEEE802.3u, 10BASE-T / 100BASE-TX x 1 USB : Type A x 1(HOST)				
Input voltage	19.2 to 28.8 Vdc				
Certifications	IP65, NEMA #250 TYPE4X / 13, CE, UL and cUL, RCM, KC, RoHS, WEEE				

* Ethernet1 and Ethernet2 have the same IP address and MAC address.

Please check our website for more details.

⚠ WARNING

HAZARD OF OPERATOR INJURY, OR UNINTENDED EQUIPMENT DAMAGE
Before operating any of these products, be sure to read all related manuals thoroughly.
Failure to follow these instructions can result in death, serious injury or equipment damage.

- For printing purposes, the colors in this catalog may differ from those of the actual unit.
 - All product names used in this catalog are the registered trademarks or trademarks of their respective companies.
 - Actual user screens may differ from the screens shown here.
 - All information contained in this catalog is subject to change without notice.
 - Electrical equipment should be installed, operated, serviced, and maintained only by qualified personnel.
- No responsibility is assumed by Schneider Electric Japan Holdings Ltd. for any consequences arising out of the use of this material.

Pro-face
by Schneider Electric

Visit our website for more information.
www.profaceamerica.com

Global Headquarters
Schneider Electric Japan Holdings Ltd.
[JAPAN] Tel: +81-(0)6-6208-3133

North/South American Headquarters
Pro-face America, Inc.
[U.S.A.] Tel: +1-734-477-0600

European Headquarters
Pro-face Europe B.V.
[THE NETHERLANDS] Tel: +31 (0)23 55 44 099