

THE FUTURE IS ON

LEVITON®



# LEV Series Pin & Sleeve Devices

IEC 60309-1 & IEC 60309-2

30 & 60 Amp  
Mechanical Interlocks




Designed to be more durable and easier to assemble for the most efficient installation and superior performance in any environment.

**Strongest handle and interlock design** validated through above & beyond endurance testing for improved safety

**Longer length, overmold handle provides an improved grip** and features 3 lockout/tagout provisions for OSHA Compliance

Embossed ON/OFF markings





**Constructed of impact-resistant, UV stable PBT**  
Tested to endure impact at the most extreme temperatures

**Mounting feet standoff ¼" from surface** - Meets NEC® 300.6 air space requirement & NSF Certified

**Bottom hinged cover** on mechanical interlocks designed with installer in mind

**Captive screws** for an easier installation

**Mounting feet attachment** does not require drilling into the enclosure and can be adjusted for several angles

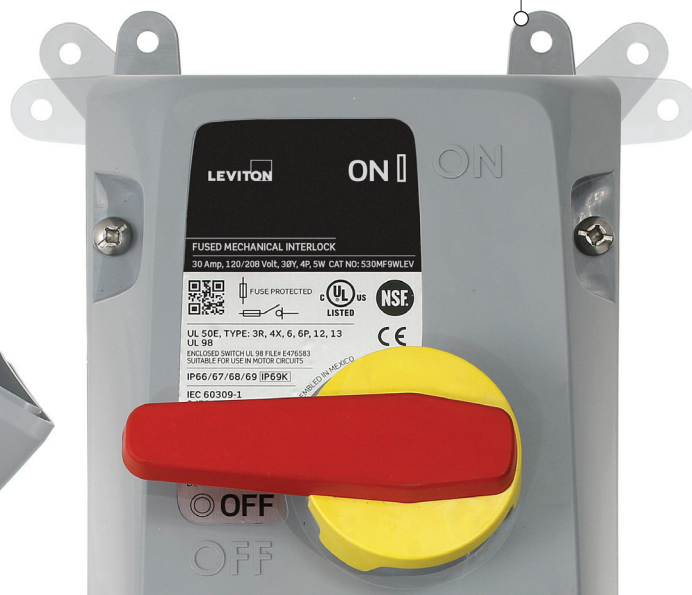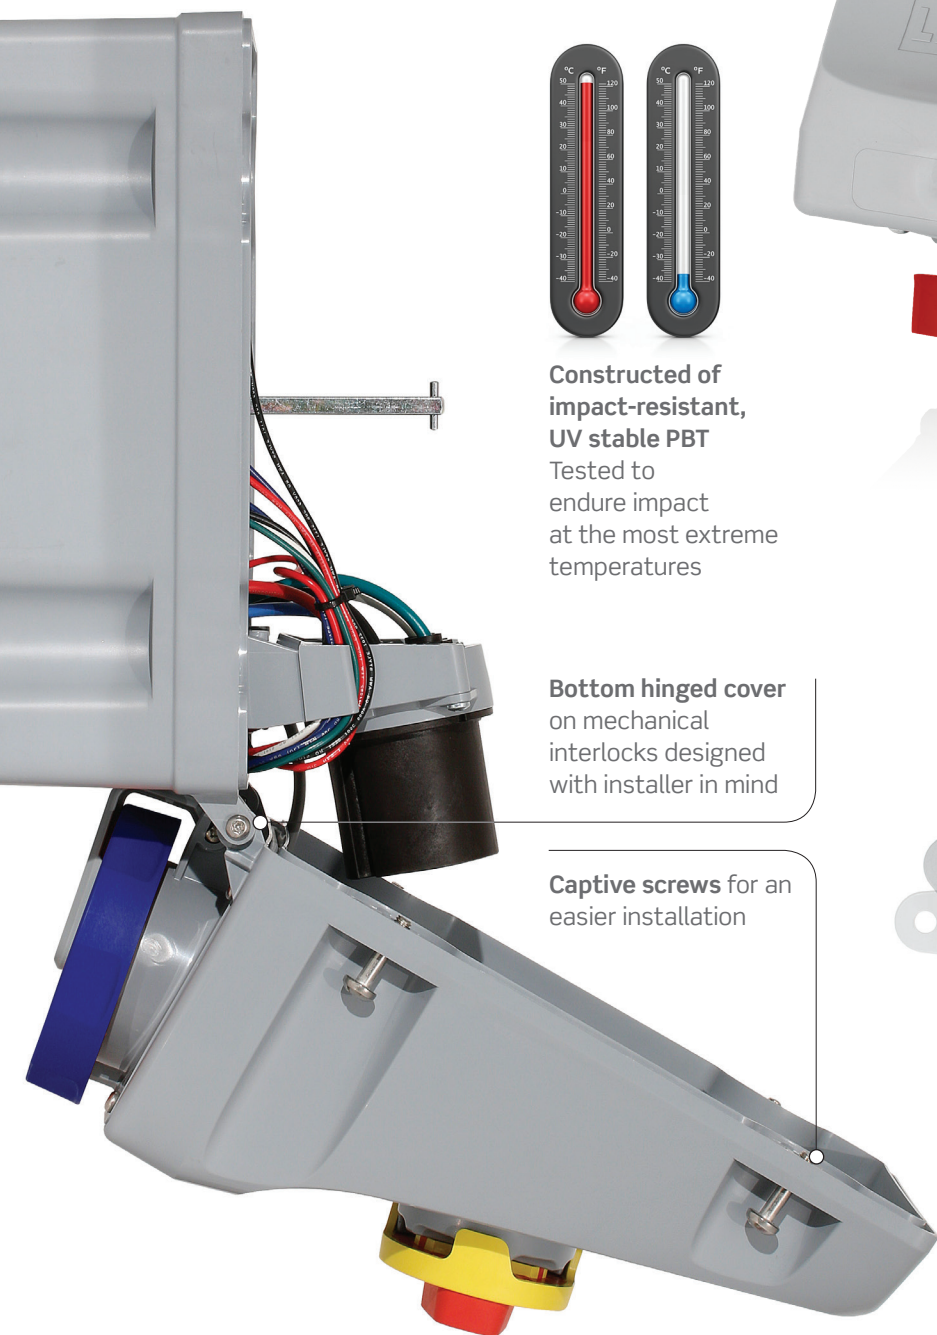

# LEV Series: North American Configurations

30 A and 60 A Mechanical Interlocks | **Industrial**

INDUSTRY  
**BEST**

**5**  
YEAR

WARRANTY

## LEV SERIES

### Product Features

- Impact, UV and chemical-resistant PBT enclosure
- Pre-wired IEC receptacle accepts all manufacturer's IEC 60309-1 & 60309-2 plugs
- Fused models accept "Class J" time-delay fuses
- Watertight and dust-tight rated to IP66, IP67, IP68 and IP69K
- NSF certified sanitary design trusted for use in food & beverage facilities
- Meets North American IEC 60309-1 and 60309-2 standards
- Listed to UL 231 and 1686, CSA and NOM-ANCE requirements, CE Marked
- Backed by an industry best 5-year warranty



30 A and 60 A Mechanical Interlocks								
Amps	Wiring	Color	Voltage AC	Clock Position	Fused Mechanical Interlock	Fused Mechanical Interlock HP Rating	Non-Fused Mechanical Interlock	Non-Fused Mechanical Interlock HP Rating
30	2p3w	Blue	240	6			330MI6WLEV	5 HP
		Red	480	7			330MI7WLEV	10 HP
	3p4w	Orange	125/250	12	430MF12WLEV	2 HP @ 120 VAC 3 HP @ 208-240 VAC L-L	430MI12WLEV	2 HP @ 120 VAC 3 HP @ 208-240 VAC L-L
		Blue	3Ø240	9	430MF9WLEV	7.5 HP	430MI9WLEV*	10 HP
		Red	3Ø480	7	430MF7WLEV	15 HP	430MI7WLEV	20 HP
		Black	3Ø600	5	430MF5WLEV	20 HP	430MI5WLEV	25 HP
	4p5w	Blue	3ØY120/208	9			530MI9WLEV	10 HP
		Red	3ØY277/480	7	530MF7WLEV	15 HP	530MI7WLEV	20 HP
		Black	3ØY347/600	5	530MF5WLEV	20 HP	530MI5WLEV	25 HP
60	2p3w	Blue	240	6	360MF6WLEV	7.5 HP	360MI6WLEV	10 HP
		Red	480	7			360MI7WLEV	10 HP
	3p4w	Orange	125/250	12	460MF12WLEV	2 HP @ 120 VAC 7.5 HP @ 208-240 VAC L-L	460MI12WLEV	2 HP @ 120 VAC 10 HP @ 208-240 VAC L-L
		Blue	3Ø240	9	460MF9WLEV	15 HP	460MI9WLEV**	20 HP
		Red	3Ø480	7	460MF7WLEV	30 HP	460MI7WLEV	40 HP
		Black	3Ø600	5	460MF5WLEV	50 HP	460MI5WLEV	40 HP
	4p5w	Blue	3ØY120/208	9	560MF9WLEV	15 HP	560MI9WLEV	20 HP
		Red	3ØY277/480	7			560MI7WLEV	40 HP
		Black	3ØY347/600	5			560MI5WLEV	40 HP

\*430MI9WLEVAC - Available with Factory-Installed Auxiliary Contact

\*\*460MI9WLEVAC - Available with Factory-Installed Auxiliary Contact

Auxiliary Contacts available separately for all configurations

**Accessories can be found on the back cover >**



Withstands any wet and harsh location with the highest and most comprehensive ratings on the market

**IP66, IP67,  
IP68 & IP69K**



## LEV Series: Mechanical Interlock Accessories



Catalog Number	Description
MOUNT-LDS	Mounting Feet
HNDLE	Replacement Handle
AUXNO	30/60/80 Amp Non-Fused Aux Contact - Normally Open
AUXNC-NF	30/60/80 Amp Non-Fused Aux Contact - Normally Closed
AUXNC-F1	30 Amp Fused Aux Contact - Normally Closed
AUXNO-F1	30 Amp Fused Aux Contact - Normally Open
AUXNO-F2	60 Amp/100 Amp Fused Aux Contact - Normally Open
AUXNO-NF1	100 Amp Non-Fused Aux Contact - Early Break
AUXNC-F2	60/100 Amp Fused Aux Contact - Normally Closed
30ASW	30 Amp Non-Fused Replacement Switch
6080A-NF	60/80 Amp Non-Fused Replacement Switch
100SW-NF	100 Amp Non-Fused Replacement Switch
30ASW-F	30 Amp Fused Replacement Switch
60ASW-F	60 Amp Fused Replacement Switch
100SW-F	100 Amp Fused Replacement Switch
HUB-34	3/4" Conduit Hub
HUB-100	1" Conduit Hub
HUB-114	1-1/4" Conduit Hub
HUB-112	1-1/2" Conduit Hub
HUB-200	2" Conduit Hub

Built for safety,  
performance  
& reliability

A Complete Offering of  
Mechanical Interlocks &  
Safety Disconnect Switches



**Leviton Manufacturing Co., Inc.**

201 N Service Rd, Melville, NY 11747

Telephone: 1-800-323-8920 • FAX: 1-800-832-9538

Tech Line (8:30AM-7:00PM E.S.T. Monday-Friday): 1-800-824-3005

**Visit our Website at: [www.leviton.com/LEVseries](http://www.leviton.com/LEVseries) • email: [industrial@leviton.com](mailto:industrial@leviton.com)**

© 2019 Leviton Manufacturing Co., Inc. All rights reserved. Specifications subject to change without notice.

Q-1204