



# Guide Cylinder

## MLGC Series

### Built-in Fine Lock Cylinder Compact Type

## Compact integration of guide rods and a fine lock cylinder with a built-in locking mechanism

- **9% weight reduction using a new guide body**  
(In comparison with MLGCLB20-100)
- **Locking in both directions is possible.**  
Locking in either side of cylinder stroke is possible, too.
- **Maximum piston speed: 500 mm/s**  
It can be used at 50 to 500 mm/s provided that it is within the allowable kinetic energy range.
- **Air cushion is standard.**  
Enables the impact to be absorbed at the stroke end when the cylinder is operated at high speeds.
- **Cylinder position can be detected.**  
Built-in magnet for auto switches is provided in all models.

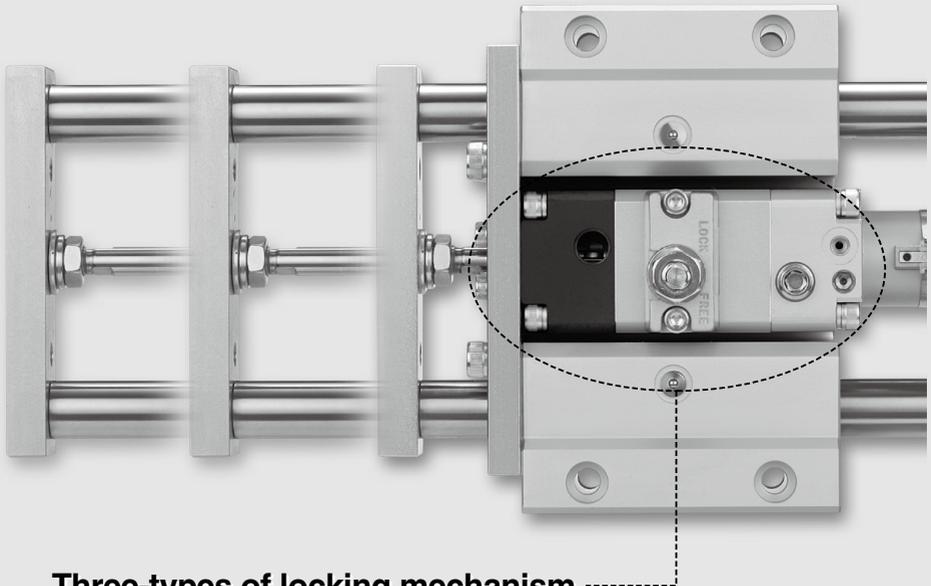

### Three-types of locking mechanism

| Locking method | Spring locking  | Pneumatic locking  | Spring and pneumatic locking  |
|----------------|---|--|---|
| Features       | <ul style="list-style-type: none"> <li>● Discharging the unlocking air causes the lock to operate.</li> </ul> | <ul style="list-style-type: none"> <li>● Supplying a pressure to the pressurized locking port enables the change of holding force as desired.</li> </ul> | <ul style="list-style-type: none"> <li>● Supplying a pressure to the pressurized locking port enables the change of holding force as desired.</li> <li>● Discharging the unlocking air causes the lock to operate.</li> </ul> |

|             |
|-------------|
| CLJ2        |
| CLM2        |
| CLG1        |
| CL1         |
| <b>MLGC</b> |
| CNG         |
| MNB         |
| CNA2        |
| CNS         |
| CLS         |
| CLQ         |
| RLQ         |
| MLU         |
| MLGP        |
| ML1C        |

|                             |
|-----------------------------|
| D- <input type="checkbox"/> |
| -X <input type="checkbox"/> |




# Guide Cylinder/Built-in Fine Lock Cylinder Compact Type

# MLGC Series

ø20, ø25, ø32, ø40

## How to Order

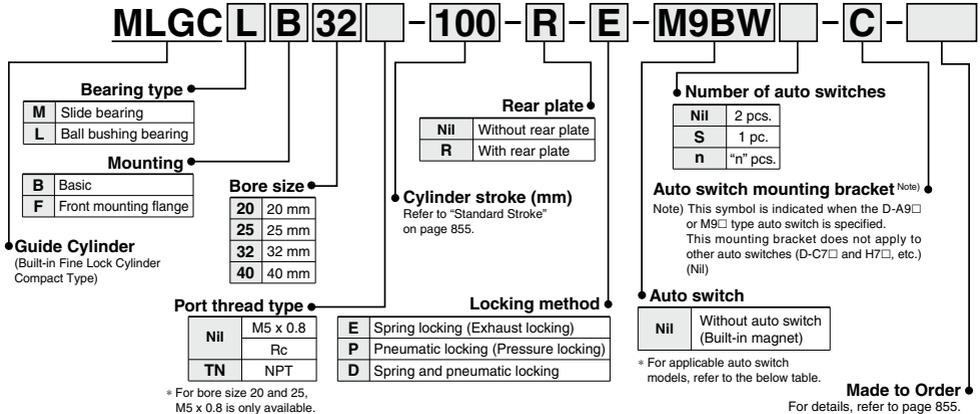

## Applicable Auto Switches/Refer to pages 1119 to 1245 for further information on auto switches.

| Type                    | Special function                          | Electrical entry | Indicator/light | Wiring (Output)         | Load voltage |              | Auto switch model        |          |              |       | Lead wire length (m) |       |       |       |            | Pre-wired connector | Applicable load |            |
|-------------------------|---|------------------|-----------------|-------------------------|--------------|--------------|--------------------------|----------|--------------|-------|----------------------|-------|-------|-------|------------|---------------------|-----------------|------------|
|                         |   |                  |                 |                         | DC           | AC           | Perpendicular ø20 to ø40 | In-line  |              |       | 0.5 (Nil)            | 1 (M) | 3 (L) | 5 (Z) | None (N)   |                     |                 |            |
|                         |   |                  |                 |                         |              |              |                          | ø20, ø25 | ø32          | ø40   |                      |       |       |       |            |                     |                 |            |
| Solid state auto switch | —   | Grommet          | —               | 3-wire (NPN)            | 5V, 12V      | —            | M9NV                     | M9N      | ●            | —     | ●                    | ○     | —     | ○     | IC circuit | Relay, PLC          |                 |            |
|                         |   |                  |                 | 3-wire (PNP)            |              |              | M9PV                     | M9P      | ●            | —     | ●                    | ○     | —     | ○     |            |                     |                 |            |
|                         |   | Connector        |                 | 2-wire                  | M9BV         | M9B          | ●                        | —        | ●            | ○     | —                    | ○     | —     |       |            |                     |                 |            |
|                         |   |                  |                 | —                       | H7C          | ●            | —                        | ●        | ●            | —     | —                    | —     |       |       |            |                     |                 |            |
|                         | Diagnostic indication (2-color indicator) | Grommet          | Yes             | 3-wire (NPN)            | 24V          | 5V, 12V      | —                        | M9NWV    | M9NW         | ●     | ●                    | ●     | ○     | —     | ○          |                     | IC circuit      |            |
|                         |   |                  |                 | 3-wire (PNP)            |              |              |                          | M9PwV    | M9PW         | ●     | ●                    | ●     | ○     | —     | ○          |                     |                 |            |
|                         |   | Connector        |                 | 2-wire                  | M9BwV        | M9Bw         | ●                        | ●        | ●            | ○     | —                    | ○     | —     |       |            |                     |                 |            |
|                         |   |                  |                 | 3-wire (NPN)            | M9NAV*1      | M9NA*1       | ○                        | ○        | ○            | ○     | —                    | ○     |       |       |            |                     |                 |            |
|                         |   |                  |                 | 3-wire (PNP)            | M9PAV*1      | M9PA*1       | ○                        | ○        | ●            | ○     | —                    | ○     |       |       |            |                     |                 |            |
|                         |   |                  |                 | 2-wire                  | M9BAV*1      | M9BA*1       | ○                        | ○        | ●            | ○     | —                    | ○     |       |       |            |                     |                 |            |
| Reed auto switch        | —   | Grommet          | —               | 3-wire (NPN equivalent) | 24V          | 5V           | A96V                     | A96      | ●            | —     | ●                    | —     | —     | —     | IC circuit |                     |                 |            |
|                         |   |                  |                 | 100V                    |              |              | A93V*2                   | A93      | ●            | ●     | ●                    | —     | —     | —     |            |                     |                 |            |
|                         |   | Connector        |                 | None                    | Yes          | 2-wire       | 24V                      | 12V      | 100V or less | A90V  | A90                  | ●     | —     | ●     | —          | —                   | IC circuit      |            |
|                         |   |                  |                 |                         |              | 100V, 200V   |                          |          | —            | (B54) | B54                  | ●     | —     | ●     | ●          | —                   |                 |            |
|                         |   |                  |                 |                         |              | 200V or less |                          |          | —            | (B64) | B64                  | ●     | —     | ●     | ●          | —                   |                 |            |
|                         |   |                  |                 |                         |              | —            |                          |          | —            | C73C  | —                    | ●     | —     | ●     | ●          | —                   |                 |            |
|                         |   |                  |                 | None                    | Yes          | None         | 24V or less              | —        | —            | —     | C80C                 | —     | ●     | —     | ●          | ●                   | —               | IC circuit |
|                         |   |                  |                 |                         |              |              | —                        | —        | (B59W)       | B59W  | ●                    | —     | ●     | —     | —          |                     |                 |            |

\*1 Water resistant type auto switches can be mounted on the above models, but in such case SMC cannot guarantee water resistance. Consult with SMC regarding water resistant types with the above model numbers.

\*2 1 m lead wire is only applicable to D-A93.

\* Lead wire length symbols: 0.5 m ..... Nil (Example) M9NW  
1 m ..... M (Example) M9NM  
3 m ..... L (Example) M9NWL  
5 m ..... Z (Example) M9NwZ  
None ..... N (Example) H7CN

\* Solid state auto switches marked with "○" are produced upon receipt of order.

\* Since there are other applicable auto switches than listed, refer to page 861 for details.

\* For details about auto switches with pre-wired connector, refer to pages 1192 and 1193.


\* The D-A9□(V)/M9□(V)/M9□(V)/M9□(A)(V) are shipped together, (but not assembled). (Only switch mounting bracket is assembled at the time of shipment.)

### Caution

When using auto switches shown inside ( ), stroke end detection may not be possible depending on the One-touch fitting or speed controller model. Please contact SMC in this case.

# Guide Cylinder Built-in Fine Lock Cylinder Compact Type **MLGC Series**

## Symbol



**Made to Order**  
(For details, refer to pages 1247 to 1440.)

| Symbol | Specifications  |
|--------|---|
| -XC79  | Tapped hole, drilled hole, pin hole machined additionally |

## Model/Specifications

### Model/Stroke

| Model (Bearing type)         | Bore size (mm) | Standard stroke (mm)             | Long stroke (mm)                  |
|------------------------------|----------------|----------------------------------|-----------------------------------|
| MLGCM (Slide bearing)        | 20             | 75, 100, 125, 150, 200           | 250, 300, 350, 400                |
|                              | 25             |                                  | 350, 400, 450, 500                |
|                              | 32             | 75, 100, 125, 150, 200, 250, 300 | 350, 400, 450, 500, 600           |
| MLGCL (Ball bushing bearing) | 40             |                                  | 350, 400, 450, 500, 600, 700, 800 |

\* Intermediate strokes and short strokes other than the above are produced upon receipt of order.

### Specifications

| Model                              | MLGC□□20   | MLGC□□25  | MLGC□□32    | MLGC□□40 |
|------------------------------------|--|-----------|-------------|----------|
| Base cylinder                      | CDLG1BA  | Bore size | Thread type | Stroke   |
| Bore size (mm)                     | 20   | 25        | 32          | 40       |
| Action                             | Double acting  |           |             |          |
| Fluid                              | Air  |           |             |          |
| Proof pressure                     | 1.5 MPa  |           |             |          |
| Maximum operating pressure         | 1.0 MPa  |           |             |          |
| Minimum operating pressure         | 0.2 MPa (Horizontal, No load)  |           |             |          |
| Ambient and fluid temperature      | -10 to 60°C  |           |             |          |
| Piston speed <sup>1</sup>          | 50 to 500 mm/s   |           |             |          |
| Cushion                            | Air cushion  |           |             |          |
| Base cylinder lubrication          | Non-lube   |           |             |          |
| Stroke length tolerance            | +1.9<br>+0.2 mm  |           |             |          |
| Non-rotating accuracy <sup>2</sup> | Slide bearing  | ±0.06°    | ±0.05°      | ±0.05°   |
|                                    | Ball bushing bearing   | ±0.04°    | ±0.04°      | ±0.04°   |
| Piping port size <sup>3</sup>      | Cylinder port  | M5 x 0.8  |             | 1/8      |
| (Rc, NPT)                          | Lock port  | 1/8       |             |          |
| Locking method                     | <input type="checkbox"/> Spring locking (Exhaust locking) <input type="checkbox"/> Pneumatic locking (Pressure locking)<br><input type="checkbox"/> Spring and pneumatic locking |           |             |          |

\*1 Constraints associated with the allowable kinetic energy are imposed on the speeds at which the piston can be locked. The maximum speed of 750 mm/s can be accommodated if the piston is to be locked in the stationary state for the purpose of drop prevention.


\*2 When the cylinder is retracted (initial value), the non-rotating accuracy without loads or deflection of the guide rods will be below the values shown in the above table as a guideline.

\*3 For bore size 20 and 25, M5 x 0.8 is only available.

## Fine Lock Specifications

| Locking method             | Spring locking (Exhaust locking) | Spring and pneumatic locking | Pneumatic locking (Pressure locking) |
|----------------------------|----------------------------------|------------------------------|--------------------------------------|
| Fluid                      | Air                              |                              |                                      |
| Maximum operating pressure | 0.5 MPa                          |                              |                                      |
| Unlocking pressure         | 0.3 MPa or more                  |                              | 0.1 MPa or more                      |
| Lock starting pressure     | 0.25 MPa or less                 |                              | 0.05 MPa or less                     |
| Locking direction          | Both directions                  |                              |                                      |

## Theoretical Output



| Bore size (mm) | Rod size (mm) | Operating direction | Piston area (mm <sup>2</sup> ) | Operating pressure (MPa) |      |     |     |     |     |      |      |      |
|----------------|---------------|---------------------|--------------------------------|--------------------------|------|-----|-----|-----|-----|------|------|------|
|                |               |                     |                                | 0.2                      | 0.3  | 0.4 | 0.5 | 0.6 | 0.7 | 0.8  | 0.9  | 1.0  |
| 20             | 8             | OUT                 | 314                            | 62.8                     | 94.2 | 126 | 157 | 188 | 220 | 251  | 283  | 314  |
|                |               | IN                  | 264                            | 52.8                     | 79.2 | 106 | 132 | 158 | 185 | 211  | 238  | 264  |
| 25             | 10            | OUT                 | 491                            | 98.2                     | 147  | 196 | 246 | 295 | 344 | 393  | 442  | 491  |
|                |               | IN                  | 412                            | 82.4                     | 124  | 165 | 206 | 247 | 288 | 330  | 371  | 412  |
| 32             | 12            | OUT                 | 804                            | 161                      | 241  | 322 | 402 | 482 | 563 | 643  | 724  | 804  |
|                |               | IN                  | 691                            | 138                      | 207  | 276 | 346 | 415 | 484 | 553  | 622  | 691  |
| 40             | 16            | OUT                 | 1260                           | 252                      | 378  | 504 | 630 | 756 | 882 | 1010 | 1130 | 1260 |
|                |               | IN                  | 1060                           | 212                      | 318  | 424 | 530 | 636 | 742 | 848  | 954  | 1060 |

Note) Theoretical output (N) = Pressure (MPa) x Piston area (mm<sup>2</sup>)

CLJ2

CLM2

CLG1

CL1

MLGC

CNG

MNB

CNA2

CNS

CLS

CLQ

RLQ

MLU

MLGP

ML1C

D-□

-X□

# MLGC Series

## Weight

|  | (kg)           |      |      |      |
|--|----------------|------|------|------|
|  | Bore size (mm) |      |      |      |
|  | 20             | 25   | 32   | 40   |
| <b>Basic weight</b>                                  |                |      |      |      |
| LB type (Ball bushing bearing/Basic)                 | 2.52           | 3.92 | 4.04 | 7.16 |
| LF type (Ball bushing bearing/Front mounting flange) | 3.24           | 4.89 | 5.01 | 8.65 |
| MB type (Slide bearing/Basic)                        | 2.48           | 3.86 | 3.98 | 7.06 |
| MF type (Slide bearing/Front mounting flange)        | 3.2            | 4.83 | 4.95 | 8.56 |
| <b>Additional weight with rear plate</b>             | 0.32           | 0.53 | 0.53 | 0.88 |
| <b>Additional weight per each 50 mm of stroke</b>    | 0.21           | 0.32 | 0.34 | 0.54 |
| <b>Additional weight for long stroke</b>             | 0.01           | 0.01 | 0.02 | 0.03 |

Calculation: (Example)

### MLGCLB32-500-R-D

(Ball bushing bearing/Basic, ø32/500 st., with rear plate)

- Basic weight..... 4.04 (LB type)
  - Additional weight with rear plate..... 0.53
  - Additional stroke weight..... 0.34/50 st
  - Stroke..... 500 st
  - Additional weight for long stroke..... 0.02
- 4.04 + 0.53 + 0.34 x 500/50 + 0.02 = 7.99 kg

## Allowable Kinetic Energy when Locking

| Bore size (mm)               | 20   | 25   | 32   | 40   |
|------------------------------|------|------|------|------|
| Allowable kinetic energy (J) | 0.26 | 0.42 | 0.67 | 1.19 |

In terms of specific load conditions, the allowable kinetic energy indicated in the table above is equivalent to a 50% load ratio at 0.5 MPa, and a piston speed of 300 mm/sec. Therefore, if the operating conditions are below these values, calculations are unnecessary.

1. Apply the following formula to obtain the kinetic energy of the load.

Ek: Kinetic energy of load (J)


$$E_k = \frac{1}{2} m v^2$$

m: Load mass (kg)

(Load mass + Moving parts weight)

v: Piston speed (m/s) (Average speed x 1.4)

2. The piston speed will exceed the average speed immediately before locking. To determine the piston speed for the purpose of obtaining the kinetic energy of load, use 1.4 times the average speed as a guide.
3. The relation between the speed and the load of the respective tube bores is indicated in the diagram below. Use the cylinder in the range below the line.
4. In order to insure the proper braking force, even within a given allowable kinetic energy level, there is an upper limit to the size of the load. Thus, a horizontally mounted cylinder must be operated below the solid line, and a vertically mounted cylinder must be operated below the dotted line.

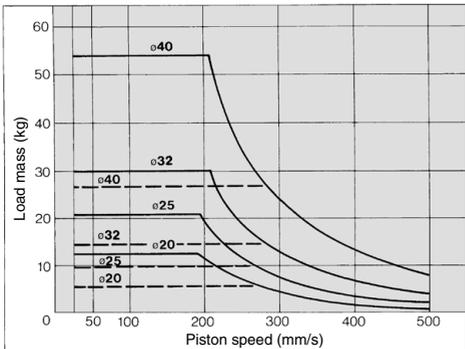

## Holding Force of Spring Locking (Max. static load)

| Bore size (mm)    | 20  | 25  | 32  | 40  |
|-------------------|-----|-----|-----|-----|
| Holding force (N) | 196 | 313 | 443 | 784 |

Note) Holding force at piston rod extended side decreases approximately 15%.

## Moving Parts Weight


|   | (kg)           |      |      |      |
|---|----------------|------|------|------|
|   | Bore size (mm) |      |      |      |
|   | 20             | 25   | 32   | 40   |
| <b>Moving parts basic weight</b>                  | 0.57           | 1.0  | 1.03 | 1.97 |
| <b>Additional weight with rear plate</b>          | 0.32           | 0.53 | 0.53 | 0.88 |
| <b>Additional weight per each 50 mm of stroke</b> | 0.18           | 0.28 | 0.29 | 0.46 |

Calculation: (Example)

### MLGCLB32-500-R-D

- Moving parts basic weight..... 1.03
  - Additional weight with rear plate..... 0.53
  - Additional stroke weight..... 0.29/50 st
  - Stroke..... 500 st
- 1.03 + 0.53 + 0.29 x 500/50 = 4.46 kg

## Holding Force of Pneumatic Locking (Max. static load)

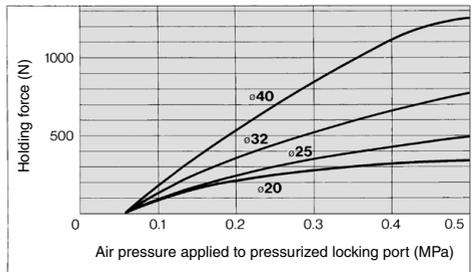

1. The holding force is the lock's ability to hold a static load that does not involve vibrations or shocks, after it is locked without a load. Therefore, to use the cylinder near the upper limit of the constant holding force, be aware of the following:
  - If the piston rod slips because the lock's holding force has been exceeded, the brake shoe could become damaged, resulting in a reduced holding force or shortened life.
  - To use the lock for drop prevention purposes, the load to be attached to the cylinder must be within 35% of the cylinder's holding force.
  - Do not use the cylinder in the locked state to sustain a load that involves impact.

## Stopping Accuracy (Not including tolerance of control system)

| Locking method                       | Piston speed (mm/s) |      |      |      |
|--------------------------------------|---------------------|------|------|------|
|                                      | 50                  | 100  | 300  | 500  |
| Spring locking (Exhaust locking)     | ±0.4                | ±0.5 | ±1.0 | ±2.0 |
| Pneumatic locking (Pressure locking) | ±0.2                | ±0.3 | ±0.5 | ±1.5 |
| Spring and pneumatic locking         | ±0.2                | ±0.3 | ±0.5 | ±1.5 |

Condition/ Load: 25% of thrust force at 0.5 MPa


Solenoid valve: mounted to the lock port

## ⚠ Caution

### Recommended Pneumatic Circuit/Caution on Handling

For detailed specifications about the fine lock cylinder CLG1 series, refer to pages 786 to 789.

**Construction: With Rear Plate**

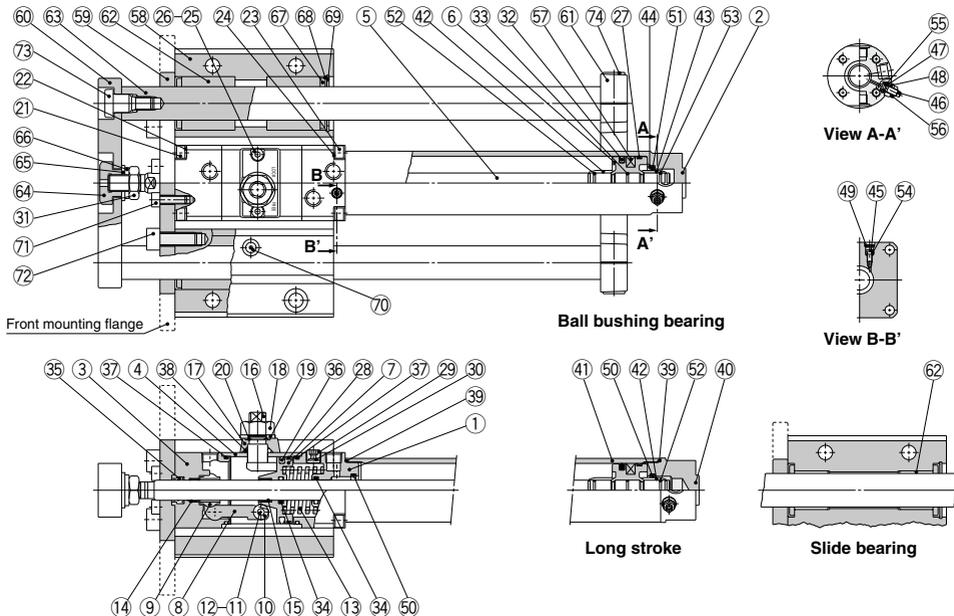

**Component Parts**

| No. | Description               | Material                  | Note  |
|-----|---------------------------|---------------------------|---|
| 1   | Rod cover                 | Aluminum alloy            | Clear hard anodized                                     |
| 2   | Tube cover                | Aluminum alloy            | Hard anodized   |
| 3   | Cover                     | Carbon steel              | Nitrided  |
| 4   | Intermediate cover        | Aluminum alloy            | Clear hard anodized                                     |
| 5   | Piston rod                | Carbon steel              | Hard chrome plated (ø20, ø25 are stainless steel)       |
| 6   | Piston                    | Aluminum alloy            | Chromated   |
| 7   | Brake piston              | Carbon steel              | Nitrided  |
| 8   | Brake arm                 | Carbon steel              | Nitrided  |
| 9   | Brake shoe                | Special friction material |   |
| 10  | Roller                    | Carbon steel              | Nitrided  |
| 11  | Pin                       | Carbon steel              | Heat treated  |
| 12  | Retaining ring            | Stainless steel           |   |
| 13  | Brake spring              | Spring steel wire         | Dacrodized For spring locking, spring/pneumatic locking |
| 14  | Bushing                   | Bearing alloy             |   |
| 15  | Bushing                   | Bearing alloy             |   |
| 16  | Manual lock release cam   | Chromium molybdenum steel | Nitrided, Nickel plated                                 |
| 17  | Cam guide                 | Carbon steel              | Nitrided, painted                                       |
| 18  | Lock nut                  | Roller steel              | Nickel plated   |
| 19  | Flat washer               | Roller steel              | Nickel plated   |
| 20  | Retaining ring            | Stainless steel           |   |
| 21  | Hexagon socket head bolt  | Chromium molybdenum steel | Nickel plated   |
| 22  | Spring washer             | Steel wire                | Nickel plated   |
| 23  | Hexagon socket head bolt  | Chromium molybdenum steel | Nickel plated   |
| 24  | Spring washer             | Steel wire                | Nickel plated   |
| 25  | Hexagon socket head bolt  | Chromium molybdenum steel | Nickel plated   |
| 26  | Spring washer             | Steel wire                | Nickel plated   |
| 27  | Wear ring                 | Resin                     |   |
| 28  | Wear ring                 | Resin                     |   |
| 29  | Hexagon socket head plug  | Carbon steel              | Nickel plated   |
| 30  | Element                   | Bronze                    | Type E only   |
| 31  | Rod end nut               | Roller steel              | Nickel plated   |
| 32  | Piston seal               | NBR                       |   |
| 33  | Piston gasket             | NBR                       |   |
| 34  | Rod seal A                | NBR                       |   |
| 35  | Rod seal B                | NBR                       |   |
| 36  | Brake piston seal         | NBR                       |   |
| 37  | Intermediate cover gasket | NBR                       |   |
| 38  | Cam gasket                | NBR                       |   |

Note) ⑥, ⑦ are not required for without rear plate.

**Component Parts**

| No. | Description                    | Material   | Note   |
|-----|--------------------------------|--|--|
| 39  | Cylinder tube gasket           | NBR  |  |
| 40  | Head cover                     | Aluminum alloy                                   | Clear hard anodized  |
| 41  | Cylinder tube                  | Aluminum alloy                                   | Hard anodized  |
| 42  | Cushion ring A                 | Aluminum alloy                                   | Anodized   |
| 43  | Cushion ring B                 | Aluminum alloy                                   | Anodized   |
| 44  | Seal retainer                  | Roller steel                                     | Zinc chromated   |
| 45  | Cushion valve A                | Chromium molybdenum steel                        | Electroless nickel plated  |
| 46  | Cushion valve B                | Roller steel                                     | Electroless nickel plated  |
| 47  | Valve retainer                 | Roller steel                                     | Electroless nickel plated  |
| 48  | Lock nut                       | Roller steel                                     | Nickel plated  |
| 49  | Retaining ring                 | Stainless steel                                  |  |
| 50  | Cushion seal A                 | Urethane   |  |
| 51  | Cushion seal B                 | Urethane   |  |
| 52  | Cushion ring gasket A          | NBR  |  |
| 53  | Cushion ring gasket B          | NBR  |  |
| 54  | Valve seal A                   | NBR  |  |
| 55  | Valve seal B                   | NBR  |  |
| 56  | Valve retainer gasket          | NBR  |  |
| 57  | Magnet                         | —  |  |
| 58  | Guide body                     | Aluminum alloy                                   | Clear anodized   |
| 59  | Small flange                   | Roller steel                                     | Nickel plated For basic  |
| 59  | Large flange                   | Roller steel                                     | Nickel plated For front mounting flange  |
| 60  | Front plate                    | Roller steel                                     | Nickel plated  |
| 61  | Rear plate                     | Cast iron  | Platinum silver  |
| 62  | Slide bearing                  | Bearing alloy                                    | For slide bearing  |
| 63  | Ball bushing bearing           | —  | For ball bushing bearing   |
| 63  | Guide rod                      | Carbon steel<br>High carbon chrome bearing steel | Hard chrome plated<br>Quenched, Hard chrome plated For slide bearing<br>For ball bushing bearing |
| 64  | End bracket                    | Carbon steel                                     | Nickel plated  |
| 65  | Washer                         | Roller steel                                     | Nickel plated  |
| 66  | Spring washer                  | Steel wire                                       | Nickel plated  |
| 67  | Felt                           | Felt   |  |
| 68  | Holder                         | Stainless steel                                  |  |
| 69  | Type C retaining ring for hole | Carbon tool steel                                | Phosphate coated   |
| 70  | Grease nipple                  | —  | Nickel plated  |
| 71  | Hexagon socket head bolt       | Chromium molybdenum steel                        | Nickel plated For cylinder mounting  |
| 72  | Hexagon socket head bolt       | Chromium molybdenum steel                        | Nickel plated For large/small flange mounting  |
| 73  | Guide bolt                     | Chromium molybdenum steel                        | Nickel plated For front plate mounting   |
| 74  | Hexagon socket head bolt       | Chromium molybdenum steel                        | Nickel plated For rear plate mounting  |

- CLJ2
- CLM2
- CLG1
- CL1
- MLGC**
- CNG
- MNB
- CNA2
- CNS
- CLS
- CLQ
- RLQ
- MLU
- MLGP
- ML1C


- D-□
- X□

# MLGC Series

## Dimensions

### Basic: With rear plate

MLGC□B□□-□-R-□

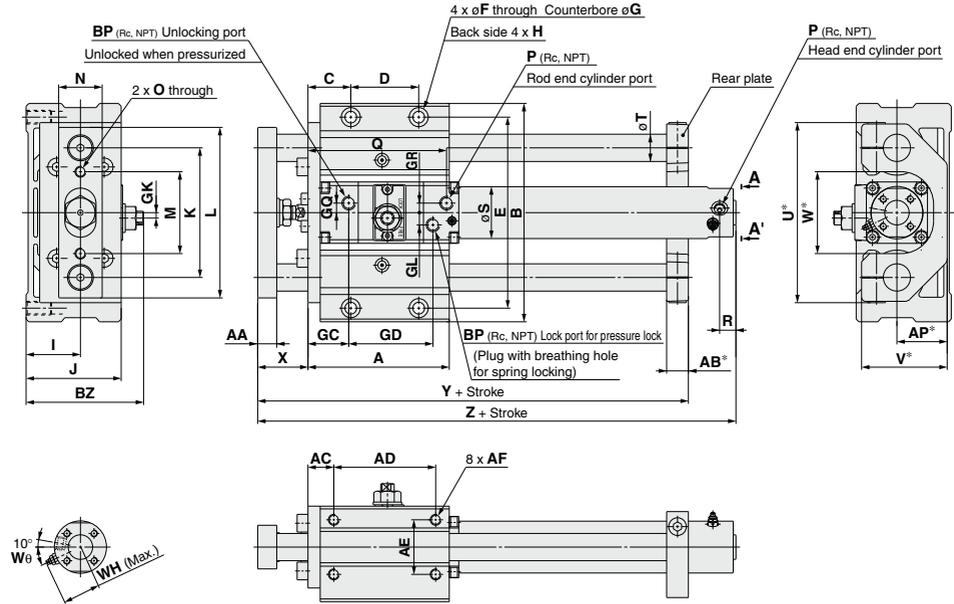

View A-A'

### Standard Stroke

| Bore size (mm) | Stroke range (mm)      | A   | AA | AB* | AC   | AD  | AE | AF                 | AP* | B   | B <sup>(Note 3)</sup> | BZ   | C    | D  | E   | F    | G           | GC |
|----------------|------------------------|-----|----|-----|------|-----|----|--------------------|-----|-----|-----------------------|------|------|----|-----|------|-------------|----|
| 20             | 75, 100, 125, 150, 200 | 94  | 11 | 13  | 16.5 | 70  | 35 | M6 x 1 depth 12    | 32  | 135 | 1/8                   | 73.5 | 26.5 | 50 | 118 | 6.8  | 11 depth 8  | 28 |
| 25             | 75, 100, 125           | 104 | 14 | 16  | 19   | 75  | 40 | M8 x 1.25 depth 16 | 37  | 160 | 1/8                   | 86.5 | 31.5 | 50 | 140 | 8.6  | 14 depth 10 | 29 |
| 32             | 150, 200, 250          | 104 | 14 | 16  | 19   | 75  | 40 | M8 x 1.25 depth 16 | 37  | 160 | 1/8                   | 86.5 | 31.5 | 50 | 140 | 8.6  | 14 depth 10 | 30 |
| 40             | 300                    | 142 | 17 | 19  | 22   | 110 | 45 | M10 x 1.5 depth 20 | 42  | 194 | 1/8                   | 95   | 37   | 80 | 170 | 10.5 | 17 depth 12 | 35 |

| Bore size (mm) | GD | GK  | GL  | GQ | GR | H                   | I  | J    | K   | L   | M  | N  | O         | P (Note 2) | Q   | R  | S  |
|----------------|----|-----|-----|----|----|---------------------|----|------|-----|-----|----|----|-----------|------------|-----|----|----|
| 20             | 54 | 3.5 | 5.5 | 4  | 4  | M6 x 1.25 depth 14  | 35 | 60   | 80  | 105 | 50 | 25 | M6 x 1    | M5 x 0.8   | 94  | 12 | 26 |
| 25             | 62 | 4   | 9   | 7  | 7  | M10 x 1.5 depth 18  | 40 | 70   | 95  | 125 | 60 | 32 | M8 x 1.25 | M5 x 0.8   | 104 | 12 | 31 |
| 32             | 62 | 4   | 9   | 7  | 7  | M10 x 1.5 depth 18  | 40 | 70   | 95  | 125 | 60 | 32 | M8 x 1.25 | 1/8        | 104 | 12 | 38 |
| 40             | 67 | 4   | 11  | 8  | 7  | M12 x 1.75 depth 21 | 45 | 82.5 | 115 | 150 | 75 | 38 | M8 x 1.25 | 1/8        | 115 | 12 | 47 |

| Bore size (mm) | T  | U*  | V* | W* | WH   | Wθ  | X  | Y   | Z   |
|----------------|----|-----|----|----|------|-----|----|-----|-----|
| 20             | 16 | 112 | 53 | 50 | 23   | 30° | 30 | 146 | 182 |
| 25             | 20 | 132 | 63 | 60 | 25   | 30° | 37 | 167 | 199 |
| 32             | 20 | 132 | 63 | 60 | 28.5 | 25° | 37 | 167 | 202 |
| 40             | 25 | 162 | 73 | 70 | 33   | 20° | 44 | 210 | 227 |

### Without Rear Plate

| Bore size (mm) | Y   |
|----------------|-----|
| 20             | 129 |
| 25             | 146 |
| 32             | 146 |
| 40             | 191 |

### Long Stroke

| Bore size (mm) | Stroke range (mm) | R  | Z   |
|----------------|-------------------|----|-----|
| 20             | 250 to 400        | 14 | 190 |
| 25             | 350 to 500        | 14 | 207 |
| 32             | 350 to 600        | 14 | 210 |
| 40             | 350 to 800        | 15 | 236 |

Note 1) Dimensions marked with "\*" are not required for without rear plate.

Note 2) For bore size 20 and 25, M5 x 0.8 is only available.


Rc, NPT port are available for bore size 32 or greater.

Note 3) Rc, NPT port are available.

## Dimensions

### Front mounting flange: With rear plate

MLGC□F□□-□-R-□

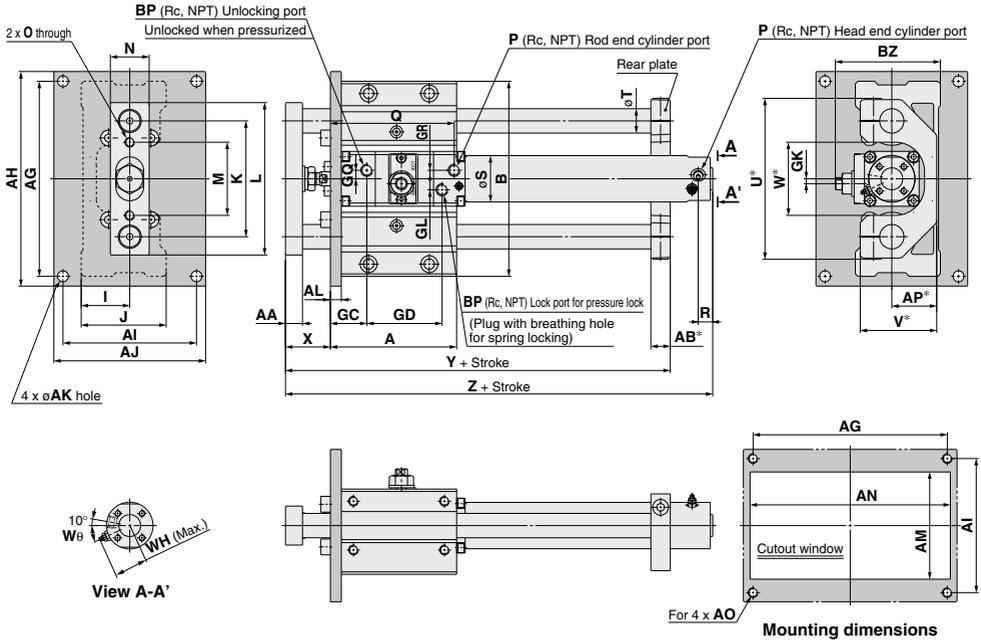

- CLJ2
- CLM2
- CLG1
- CL1
- MLGC**
- CNG
- MNB
- CNA2
- CNS
- CLS
- CLQ
- RLQ
- MLU
- MLGP
- ML1C

### Standard Stroke

| Bore size (mm) | Stroke range (mm)      | A   | AA | AB <sup>1)</sup> | AG  | AH  | AI  | AJ  | AK | AL | AM | AN  | AO  | AP <sup>1)</sup> | B   | B <sup>2) Note 3</sup> | BZ   | GC | GD | GK  |
|----------------|------------------------|-----|----|------------------|-----|-----|-----|-----|----|----|----|-----|-----|------------------|-----|------------------------|------|----|----|-----|
| 20             | 75, 100, 125, 150, 200 | 94  | 11 | 13               | 134 | 150 | 92  | 108 | 9  | 9  | 75 | 140 | M8  | 32               | 135 | 1/8                    | 73.5 | 28 | 54 | 3.5 |
| 25             | 75, 100, 125           | 104 | 14 | 16               | 160 | 176 | 110 | 125 | 9  | 9  | 88 | 165 | M8  | 37               | 160 | 1/8                    | 86.5 | 29 | 62 | 4   |
| 32             | 150, 200, 250          | 104 | 14 | 16               | 160 | 176 | 110 | 125 | 9  | 9  | 88 | 165 | M8  | 37               | 160 | 1/8                    | 86.5 | 30 | 62 | 4   |
| 40             | 300                    | 142 | 17 | 19               | 190 | 210 | 115 | 135 | 11 | 12 | 96 | 200 | M10 | 42               | 194 | 1/8                    | 95   | 35 | 67 | 4   |

| Bore size (mm) | GL  | GQ | GR | I  | J    | K   | L   | M  | N  | O         | P <sup>Note 2)</sup> | Q   | R  | S  | T  | U <sup>3)</sup> | V <sup>3)</sup> | W <sup>3)</sup> |
|----------------|-----|----|----|----|------|-----|-----|----|----|-----------|----------------------|-----|----|----|----|-----------------|-----------------|-----------------|
| 20             | 5.5 | 4  | 4  | 35 | 60   | 80  | 105 | 50 | 25 | M6 x 1    | M5 x 0.8             | 94  | 12 | 26 | 16 | 112             | 53              | 50              |
| 25             | 9   | 7  | 7  | 40 | 70   | 95  | 125 | 60 | 32 | M8 x 1.25 | M5 x 0.8             | 104 | 12 | 31 | 20 | 132             | 63              | 60              |
| 32             | 9   | 7  | 7  | 40 | 70   | 95  | 125 | 60 | 32 | M8 x 1.25 | 1/8                  | 104 | 12 | 38 | 20 | 132             | 63              | 60              |
| 40             | 11  | 8  | 7  | 45 | 82.5 | 115 | 150 | 75 | 38 | M8 x 1.25 | 1/8                  | 115 | 12 | 47 | 25 | 162             | 73              | 70              |

| Bore size (mm) | WH   | Wθ  | X  | Y   | Z   |
|----------------|------|-----|----|-----|-----|
| 20             | 23   | 30° | 30 | 146 | 182 |
| 25             | 25   | 30° | 37 | 167 | 199 |
| 32             | 28.5 | 25° | 37 | 167 | 202 |
| 40             | 33   | 20° | 44 | 210 | 227 |

### Without Rear Plate

| Bore size (mm) | Y   |
|----------------|-----|
| 20             | 129 |
| 25             | 146 |
| 32             | 146 |
| 40             | 191 |

### Long Stroke

| Bore size (mm) | Stroke range (mm) | R  | Z   |
|----------------|-------------------|----|-----|
| 20             | 250 to 400        | 14 | 190 |
| 25             | 350 to 500        | 14 | 207 |
| 32             | 350 to 600        | 14 | 210 |
| 40             | 350 to 800        | 15 | 236 |

Note 1) Dimensions marked with "\*" are not required for without rear plate.

Note 2) For bore size 20 and 25, M5 x 0.8 is only available.

Rc, NPT port are available for bore size 32 or greater.

Note 3) Rc, NPT port are available.

- D-□
- X□



# Auto Switch Mounting

## Auto Switch Proper Mounting Position (Detection at Stroke End) and Mounting Height

D-M9□/M9□W

D-M9□A



D-A9□

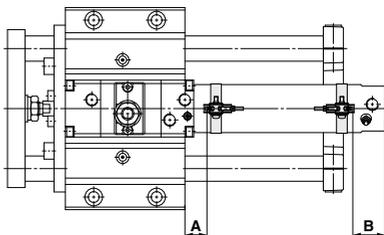

D-M9□V/M9□WV

D-M9□AV

D-A9□V

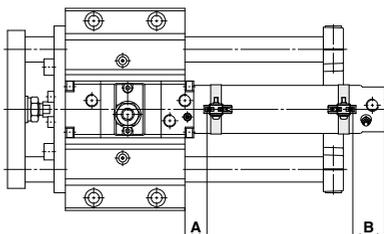



D-H7□/H7□W

D-H7NF/H7BA

D-H7C

D-B5/B6/B59W

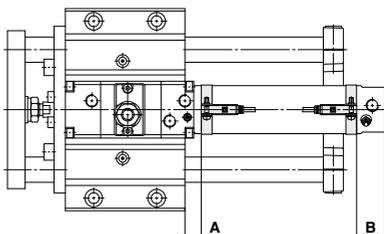

D-G5/K5/G5□W/G5BA



D-K59W

D-G59F

D-G5NT

D-C7/C8

D-C73C/C80C

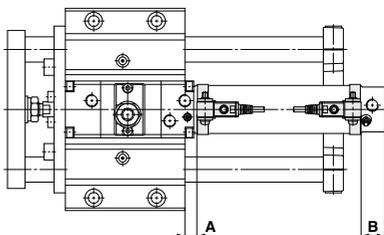

### Auto Switch Proper Mounting Position

| Auto switch model | D-M9□(V)<br>D-M9□W(V)<br>D-M9□A(V) |            | D-A9□(V) |            | D-C7/C8<br>D-C73C<br>D-C80C |                | D-B5<br>D-B6 |                | D-B59W |                | D-H7□<br>D-H7C<br>D-H7□W<br>D-H7BA<br>D-H7NF |                | D-G5□W<br>D-K59W<br>D-G59F<br>D-G5<br>D-K5<br>D-G5NT<br>D-G5BA |            |
|-------------------|------------------------------------|------------|----------|------------|-----------------------------|----------------|--------------|----------------|--------|----------------|--|----------------|--|------------|
|                   | A                                  | B          | A        | B          | A                           | B              | A            | B              | A      | B              | A  | B              | A  | B          |
| <b>20</b>         | 10.5                               | 27<br>(35) | 6.5      | 23<br>(31) | 7                           | 23.5<br>(31.5) | 1            | 17.5<br>(25.5) | 4      | 20.5<br>(28.5) | 6  | 22.5<br>(30.5) | 2.5  | 19<br>(27) |
| <b>25</b>         | 10.5                               | 27<br>(35) | 6.5      | 23<br>(31) | 7                           | 23.5<br>(31.5) | 1            | 17.5<br>(25.5) | 4      | 20.5<br>(28.5) | 6  | 22.5<br>(30.5) | 2.5  | 19<br>(27) |
| <b>32</b>         | 10.5                               | 29<br>(37) | 6.5      | 25<br>(33) | 7                           | 25.5<br>(33.5) | 1            | 19.5<br>(27.5) | 4      | 22.5<br>(30.5) | 6  | 24.5<br>(32.5) | 2.5  | 21<br>(29) |
| <b>40</b>         | 13.5                               | 32<br>(41) | 9.5      | 28<br>(37) | 10                          | 28.5<br>(37.5) | 4            | 22.5<br>(31.5) | 7      | 25.5<br>(34.5) | 9  | 27.5<br>(36.5) | 5.5  | 24<br>(33) |

( ) : Values for long stroke

Note) Adjust the auto switch after confirming the operating conditions in the actual setting.


### Auto Switch Mounting Height

| Auto switch model | D-M9□(V)<br>D-M9□W(V)<br>D-M9□A(V)<br>D-A9□(V) |      | D-C7/C8<br>D-H7□<br>D-H7□W<br>D-H7NF<br>D-H7BA |      | D-C73C<br>D-C80C |    | D-B5/B6<br>D-B59W<br>D-G5/K5<br>D-G59F<br>D-G5□W<br>D-G5BA |  |
|-------------------|--|------|--|------|------------------|----|--|--|
|                   | Hs   | Hs   | Hs   | Hs   | Hs               | Hs |  |  |
| <b>20</b>         | 25   | 24.5 | 27   | 27.5 |                  |    |  |  |
| <b>25</b>         | 27.5   | 27   | 29.5   | 30   |                  |    |  |  |
| <b>32</b>         | 31   | 30.5 | 33   | 33.5 |                  |    |  |  |
| <b>40</b>         | 35.5   | 35   | 37.5   | 38   |                  |    |  |  |

## Minimum Stroke for Auto Switch Mounting

| Auto switch model                   | n: Number of auto switches (mm) |                            |  |
|-------------------------------------|---------------------------------|----------------------------|--|
|                                     | Number of auto switches mounted |                            |  |
|                                     | 1 pc.                           | 2 pcs.                     | "n" pcs.                               |
| D-M9□/M9□W/A9□                      | 10                              | 45<br><small>Note)</small> | 45 + 45 (n - 2)<br>(n = 2, 3, 4, 5...) |
| D-C7□/C80                           | 10                              | 50                         | 50 + 45 (n - 2)<br>(n = 2, 3, 4, 5...) |
| D-H7□/H7□W/H7BA/H7NF                | 10                              | 60                         | 60 + 45 (n - 2)<br>(n = 2, 3, 4, 5...) |
| D-C73C/C80C/H7C<br>D-B73C/B80C/K79C | 10                              | 65                         | 65 + 50 (n - 2)<br>(n = 2, 3, 4, 5...) |
| D-B5□/B64/G5□/K59□                  | 10                              | 75                         | 75 + 55 (n - 2)<br>(n = 2, 3, 4, 5...) |
| D-B59W                              | 15                              | 75                         | 75 + 55 (n - 2)<br>(n = 2, 3, 4, 5...) |
| D-B7□/B80/G79/K79                   | 10                              | 45                         | 50 + 45 (n - 2)<br>(n = 2, 3, 4, 5...) |

Note) Mounting of auto switches

| Auto switch model | With 2 auto switches  |  |
|-------------------|---|--|
|                   | Same surface  |  |
|                   |  | The auto switch is mounted by slightly displacing it in a direction (cylinder tube circumferential exterior) so that the auto switch and lead wire do not interfere with each other. |
| D-M9□/M9□W        | Less than 45 to 55 strokes  |  |
| D-A93             | Less than 45 to 50 strokes  |  |

## Operating Range

| Auto switch model                       | Bore size (mm) |     |     |     |
|---|----------------|-----|-----|-----|
|   | 20             | 25  | 32  | 40  |
| D-M9□/M9□W                              | 5              | 5.5 | 5   | 5.5 |
| D-A9□                                   | 7              | 6   | 8   | 8   |
| D-B7□/B80<br>D-B73C/B80C                | 8              | 10  | 9   | 10  |
| D-C7□/C80<br>D-C73C/C80C                | 8              | 10  | 9   | 10  |
| D-B5□/B64                               | 8              | 10  | 9   | 10  |
| D-B59W                                  | 13             | 13  | 14  | 14  |
| D-G79/K79/K79C                          | 8              | 10  | 9   | 10  |
| D-H7BA<br>D-H7□/H7□W<br>D-H7NF          | 4              | 4   | 4.5 | 5   |
| D-H7C                                   | 7              | 8.5 | 9   | 10  |
| D-G5□/K59<br>D-G5□W/K59W<br>D-G5NT/G5BA | 4              | 4   | 4.5 | 5   |
| D-G59F                                  | 5              | 5   | 5.5 | 6   |
| D-G5NB                                  | 35             | 40  | 40  | 45  |

\* Since this is a guideline including hysteresis, not meant to be guaranteed (assuming approximately ±30% dispersion). There may be the case it will vary substantially depending on the ambient environment.

### [Mounting screws set made of stainless steel]

The following set of mounting screws made of stainless steel is also available. Use it in accordance with the operating environment. (Please order the auto switch mounting bracket separately, since it is not included.)

- BBA3: For D-B5/B6/G5/K5 types
- BBA4: For D-C7/C8/H7 types
- Note 3) Refer to page 1225 for details of BBA3.

The D-H7BA/G5BA are set on the cylinder with the stainless steel screws above when shipped. When an auto switch is shipped independently, BBA3 or BBA4 is attached.

## Auto Switch Mounting Bracket/Part No.


| Auto switch model  | Bore size (mm)       |                      |                      |                      |
|--|----------------------|----------------------|----------------------|----------------------|
|  | 20                   | 25                   | 32                   | 40                   |
| D-M9□(V)/M9□W(V)<br>D-A9□(V)   | Note 1)<br>BMA3-020  | Note 1)<br>BMA3-025  | Note 1)<br>BMA3-032  | Note 1)<br>BMA3-040  |
| D-M9□A(V)  | Note 2)<br>BMA3-020S | Note 2)<br>BMA3-025S | Note 2)<br>BMA3-032S | Note 2)<br>BMA3-040S |
| D-C7□/C80<br>D-C73C/C80C<br>D-H7□/D-H7□W<br>D-H7NF/D-H7BA  | BMA2-020A            | BMA2-025A            | BMA2-032A            | BMA2-040A            |
| D-B5□/B64/D-B59W<br>D-G5□/K59/D-G5□W/K59W<br>D-G5BA/G59F<br>D-G5NT/D-G5NB<br>D-B7□/B80/B73C/B80C<br>D-G79/K79/K79C | BA-01                | BA-02                | BA-32                | BA-04                |
|  | BM1-01               | BM1-02               | BM1-32               | BM1-04               |

Note 1) Set part number which includes the auto switch mounting band (BMA2-□□□A) and the holder kit (BJ5-1/Switch bracket: Transparent).

Since the switch bracket (made from nylon) are affected in an environment where alcohol, chloroform, methylamines, hydrochloric acid or sulfuric acid is splashed over, so it cannot be used. Please consult SMC regarding other chemicals.

Note 2) Set part number which includes the auto switch mounting band (BMA2-□□□AS/Stainless steel screw) and the holder kit (BJ4-1/Switch bracket: White).

Note 3) For the D-M9□A (V) type auto switch, do not install the switch bracket on the indicator light.



- (1) BJ□-1 is a set of "a" and "b". BJ4-1 (Switch bracket: White) BJ5-1 (Switch bracket: Transparent)
- (2) BMA2-□□□A(S) is a set of "c" and "d". Band (c) is mounted so that the projected part is on the internal side (contact side with the tube).

Other than the applicable auto switches listed in "How to Order", the following auto switches can be mounted. Refer to pages 1119 to 1245 for detailed specifications.

(Consult with SMC for the D-B7□/B80, D-B73C/B80C, D-G79/K79, D-K79C.)

| Type        | Model                                      | Electrical entry    | Features                                  |
|-------------|--|---------------------|---|
| Reed        | D-C73, C76, B53, B73, B76                  | Grommet (In-line)   | —   |
|             | D-C80, B80                                 | —                   | Without indicator light                   |
|             | D-B73C                                     | Connector (In-line) | —   |
|             | D-B80C                                     | —                   | Without indicator light                   |
| Solid state | D-H7A1, H7A2, H7B, G59, G5P, K59, G79, K79 | Grommet (In-line)   | —   |
|             | D-K79C                                     | Connector (In-line) | —   |
|             | D-H7BW, H7NW, H7PW, G59W, G5PW, K59W       | —                   | Diagnostic indication (2-color indicator) |
|             | D-G5BA                                     | Grommet (In-line)   | Water resistant                           |
|             | D-G5NT                                     | —                   | With timer                                |

\* With pre-wired connector is also available with solid state auto switches. Refer to pages 1192 and 1193 for details.

\* Normally closed (NC = b contact) solid state auto switches (D-F9G/F9H) are also available. Refer to page 1137 for details.

\* Wide range detection solid state auto switch (D-G5NB) is also available. Refer to page 1182 for details.



## MLGC Series

# Specific Product Precautions

Be sure to read this before handling the products.

Refer to back page 50 for Safety Instructions and pages 3 to 12 for Actuator and Auto Switch Precautions.

### Installations/Adjustment


#### Warning

##### 1. Installing a protective cover (In the case of rear plate)

During mounting, handling and operation, the rear plate makes reciprocating movements. Therefore, pay careful attention not to insert your hand, etc., between the cylinder and the rear plate.

When you are going to fit this product to the outside of your equipment, take preventative measures such as installing a protective cover.

MLGC Protective cover installation example

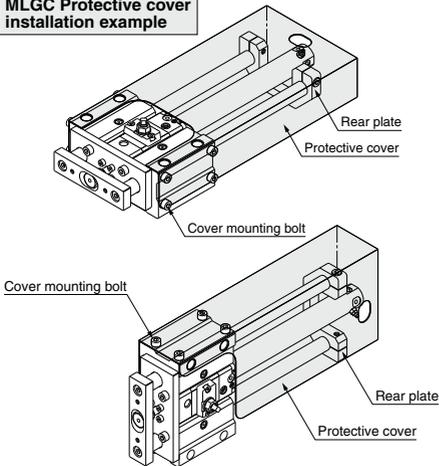

#### Caution on Handling the Fine Lock Cylinder

#### Caution

1. For details, make sure to refer to “Fine Lock Cylinder (CLG1 series)” on pages 786 to 789.

#### Caution

##### 1. Use caution that no scratch or dent will be given to the slide part of the guide rod.

Because the outer circumference of the guide rod is manufactured with precise tolerances, even a slight deformation, scratch, or gouge can lead to faulty operation or reduced durability.

##### 2. When fitting the guide body, use the guide body which has high flatness of the fitting surface.

If the guide rod has twisted, operation resistance will become abnormally higher and the bearing will wear at an early stage, thereby resulting in poor performance.

##### 3. Mount in locations where maintenance will be easy.

Ensure enough clearance around the cylinder to allow for unobstructed maintenance and inspection work.

##### 4. Do not adjust the rod stroke by moving the rear plates,

as doing so will cause the rear plates to come into direct contact with the guide body or the bracket mounting bolt. The resulting impact cannot be absorbed easily, the stroke position cannot be maintained, and faulty operation may result.

##### 5. Lubrication

When you are going to oil the bearings, do so by using a nipple so that no foreign matter will be mixed.

For the grease, we recommended using high-quality lithium soap-based grease no. 2.

##### 6. Mounting orientation

For ceiling mounting (the opening of the rear plate is downward.), the rear plate may interfere with the basic cylinder head end due to the deflection of guide rods. Please consult with SMC.

##### 7. Fixing of base cylinder

When the product is mounted and operated in a location with low rigidity, bending moment may be applied to the base cylinder by vibrations generated at the stroke end, causing damage to the cylinder. In such cases, install a support bracket to suppress the vibration of the body of the base cylinder or reduce the piston speed until the body does not vibrate at the stroke end.