


# K50 Pro Devices with IO-Link



## Datasheet

### 50 mm IO-Link Controlled Multicolor RGB Devices (Touch Button, Push Button, and Optical Sensor)


- IO-Link gives full access to color, flashing, rotating, and dimming settings as well as advanced animations such as dynamic sequence mode and LED control
- Output settings, including on and off delays, output function, and output state are also available with IO-Link
- 18 V DC to 30 V DC operation




Standard Model: Touch Button



Compact Model: Touch Button



Optical Sensor



Push Button




#### WARNING:

- **Do not use this device for personnel protection**
- Using this device for personnel protection could result in serious injury or death.
- This device does not include the self-checking redundant circuitry necessary to allow its use in personnel safety applications. A device failure or malfunction can cause either an energized (on) or de-energized (off) output condition.

## Models


### Touch Button Models

- Excellent immunity to false triggering by water spray, oils, and other foreign materials
- Rated IEC IP67 and IP69K per DIN 40050-9
- Vibration feedback models available for an unmistakable touch confirmation
- Can be actuated with bare hands or gloves; adjustable sensitivity
- Compact models available for lower profile applications
- Models constructed from FDA-grade materials available

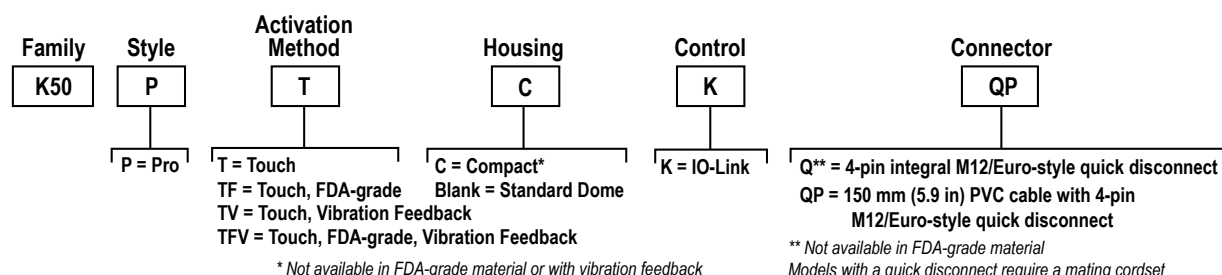


### Push Button and Optical Sensor Models

- Fixed-field models are immune to ambient light, EMI and RFI interference
- Fixed-field models rated IEC IP67 and IP69K per DIN 40050-9
- Push Button models rated IEC IP65

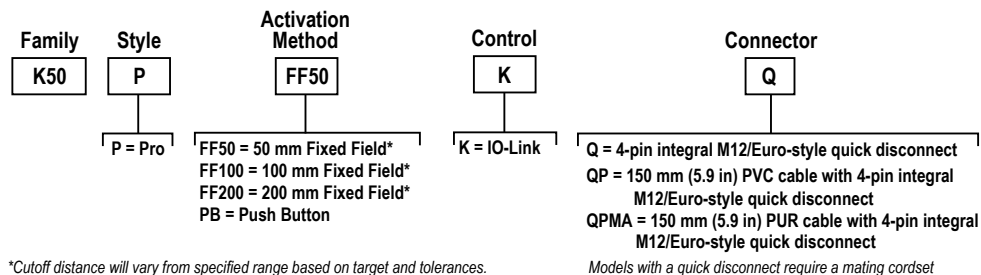

## Wiring Diagram

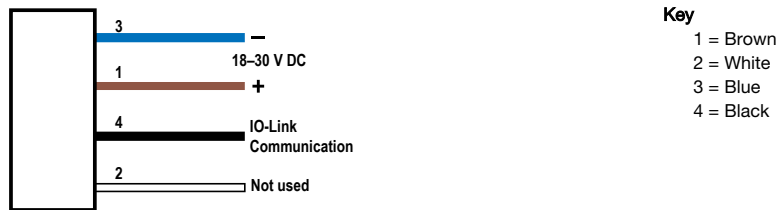

## IO-Link®

IO-Link® is a point-to-point communication link between a master device and a sensor and/or light. It can be used to automatically parameterize sensors or lights and to transmit process data. For the latest IO-Link protocol and specifications, please visit [www.io-link.com](http://www.io-link.com).

For the latest IODD files, please refer to the Banner Engineering Corp website at: [www.bannerengineering.com](http://www.bannerengineering.com).

## IO-Link Process Data In (Device to Master)

Use process data to read the device output state. When the device is in Four State Full Logic mode, use process data to read the device logic state in addition to the output state.

Name	Description
<b>Output State</b>	Output state follows touch, optical sensor, or push button input
<b>Device State</b>	Current state (State 1, State 2, State 3, State 4). Only available with Operation Mode set to Four State Full Logic or Multicolor

## IO-Link Process Data Out (Master to Device)

Use process data out to define device states. Use parameter data to define device modes, states, touch settings, output settings, vibration feedback, and custom colors.

### Advanced Mode

Use process data to control delays, color, intensity, flash, and other animation types. Process data is also used to control the sequence value dynamically. Use parameter data to create custom colors, intensity, speeds, and to define output and touch settings.

### Four State Full Logic Mode

Use process data to define the Job Input state and to read the touch, optical sensor, or push button state and device state (State 1, State 2, State 3, State 4). See below for more information about how to achieve legacy logic types (C, D, E, and H). Use parameter data to change color, intensity, flash, speed, select animation type, and define output settings.

### Multicolor Mode

Use process data to activate the defined device state. Use parameter data to define output settings, control delays, color, intensity, flash, and other animation types for State 1, State 2, State 3, and State 4.

Definitions for device states in Advanced Mode, Four State Full Logic Mode, and Multicolor Mode	
Name	Description
<b>Animation Type</b>	
Off	Indicator is off
Steady	Color 1 is solid on at defined intensity
Flash	Color 1 flashes at defined speed, color intensity, and pattern
Two Color Flash	Color 1 and Color 2 flash alternately at defined speed, color intensities, and pattern
50/50	Color 1 is displayed on 50% of the indicator and Color 2 is displayed on the other 50% of the indicator at the defined color intensities
50/50 Rotate	Color 1 is displayed on 50% of the indicator and Color 2 is displayed on the other 50% of the indicator while rotating at the defined speed, color intensities, and rotational direction
Chase	Color 1 is displayed as a single spot against the background of Color 2 while rotating at the defined speed, color intensities, and rotational direction
Intensity Sweep	Color 1 repeatedly increases and decreases intensity between 0% to 100% at defined speed and color intensity
Color Sweep	Color 1 and Color 2 transition alternately at defined speed and color intensities
Sequence	Color 1 increments against the background of Color 2 at defined Dynamic or Static Sequence Value (Advanced mode and other modes respectively)
<b>Animation Direction</b>	Defines the direction of rotation for the 50/50 rotate, chase, and sequence animations (CW or CCW)
<b>Animation Pattern</b>	Defines the flash pattern for flash and two color flash animations (normal, strobe, three pulse, SOS, or random); also defines the pattern of the vibration feedback
<b>Animation Speed</b>	Defines the animation speed (slow, medium, fast, or custom); also defines the speed of the vibration feedback pattern
<b>Vibration Feedback</b>	Defines the type of vibration response when the button is touched (Off, On, Animation Pattern) (Touch models with vibration only)
<b>Off Delay Type</b>	Defines if the Off Delay should be measured from when the conditions for the State began (Leading Edge) or from when the conditions ended (Trailing Edge)
<b>Off Delay (ms)</b>	The duration of the animation Off Delay. Leading Edge Off Delays can be used to ensure the animation is active for at least a minimum amount of time.

Definitions for device states in Advanced Mode, Four State Full Logic Mode, and Multicolor Mode	
Name	Description
<b>Dynamic/Static Sequence Value</b>	Defines the span of Color 1 in the Sequence animation [0-255]. 0 means no portion of the animation will be Color 1, and it increases in a circular manner to 255 which indicates the full circumference will be Color 1. In Advanced Mode, this is in process data and is called Dynamic Sequence Value. In the other modes, this is in parameter data and is called Static Sequence Value.
<b>Sequence Shift</b>	Shifts the beginning of the sequence animation to the specified LED (LED1 at 12 o'clock continuing in the direction indicated by the Animation Direction parameter)
<b>Color 1</b>	Defines Color 1 of defined animation
<b>Color 1 Intensity</b>	Defines the intensity of Color 1 in the animation (high, medium, low, off, or custom)
<b>Color 2</b>	Defines Color 2 of defined animation
<b>Color 2 Intensity</b>	Defines the intensity of Color 2 in the animation (high, medium, low, off, or custom)

#### Four State Full Logic Mode State Descriptions

Use process data job input and the touch button, optical sensor, or push button input to dictate which one of these states the device should be in. Use parameter data to define the state characteristics.

**State 1:** Process Data job input off and touch, optical sensor, or push button inactive

**State 2:** Process Data job input on and touch, optical sensor, or push button inactive

**State 3:** Process Data job input off and touch, optical sensor, or push button active

**State 4:** Process Data job input on and touch, optical sensor, or push button active

Four State Full Logic			Legacy Logic Definitions (Four State Full Logic)	
	<b>Not Actuated</b>	<b>Actuated</b>	<b>C Logic</b>	State 1 is Off. State 2 is Color 1/Job Input. State 3 is Color 2/Acknowledge. State 4 is defined the same as State 3
<b>No Input</b>	State 1	State 3	<b>D Logic</b>	State 1 is Off. State 2 is Color 1/Job Input. State 3 is Off. State 4 is defined the same as State 2
<b>Job Input</b>	State 2	State 4	<b>E Logic</b>	State 1 is Off. State 2 is Color 1/Job Input. State 3 is Color 2/Mispick. State 4 is defined the same as State 2
			<b>H Logic</b>	State 1 is power, defined as Color 1. State 2 is defined the same as State 1. State 3 is Color 2/Sense. State 4 is defined the same as State 3

#### LED Control Mode

Use process data to define the color and intensity of each individual LED. Use parameter data to define customer colors and intensities. LED1 is oriented at the 12 o'clock position continuing clockwise through LED8 near 11 o'clock position.

Name	Description
<b>LED 1 Color...LED 8 Color</b>	Defines the color of the designated LED.
<b>LED 1 Intensity...LED 8 Intensity</b>	Defines the intensity of the designated LED [Values: 0-10]
<b>Vibration Feedback</b>	Defines the type of vibration response when the button is touched (Off, On, Pattern) (Touch models with vibration only)
<b>Vibration Pattern</b>	Defines the pattern of the vibration feedback (normal, strobe, three pulse, SOS, or random) (Touch models with vibration only)
<b>Vibration Speed</b>	Defines the speed of the vibration feedback pattern (slow, medium, fast, or custom) (Touch models with vibration only)

#### Demo Mode

Cycles through color spectrum, 50/50 rotate, intensity sweep, and sequence mode. Touch, optical sensor, or push button speeds cycle rate up or down (can be either Momentary or Latching). Touch, optical sensor, or push button initiates state showing individually colored LEDs. When set to demo mode, the device will cycle through the defined sequence when power is applied regardless of its connection to an IO-Link master.

#### Touch Settings

Use Parameter Data to define the following settings.

Setting	Description
<b>Touch Sensitivity</b>	Defines the sensitivity of the touch button as either Standard, High or Low. Low sensitivity resists false activation. High sensitivity can be used for improved touch response (Touch models only)
<b>Function</b>	Latching or Momentary Options. Momentary function toggles output on only during a touch, optical sensor, or push button input. Latching function toggles output on or off for each touch, optical sensor, or push button input
<b>Mute Enable</b>	Turning on mute disables the touch, optical sensor, or push button input
<b>On Delay (ms)</b>	Length of time the button needs to be pressed or the sensor needs to be blocked to trigger an active state. 0-60,000 ms

#### Output Settings

Use Parameter Data to define the following settings.

Setting	Description
<b>Output State</b>	Normally Open or Normally Closed. Normally Open turns the output on with a touch, optical sensor, or push button input. Normally Closed turns the output off with a touch, optical sensor, or push button input
<b>Off Delay Type</b>	Leading Edge or Trailing Edge. Leading Edge delays will begin once a touch, optical sensor, or push button has been sensed. Trailing edge delays will begin once the touch, optical sensor, or push button has been released

Setting	Description
Off Delay (ms)	Length of time before the output state returns to a touch, optical sensor, or push button inactive state after the button has been released or sensor has been unblocked. 0-60,000 ms

## Specifications

### Supply Voltage

18 V DC to 30 V DC

### Supply Current

132 mA maximum current at 18 V DC  
 Touch Models: 93 mA typical at 24 V DC  
 Optical Models: 75 mA typical at 24 V DC  
 Push Button Models: 65 mA typical at 24 V DC

### Supply Protection Circuitry

Protected against reverse polarity and transient voltages

### Touch Dwell Time

If touch dwells for longer than 60 seconds, the output will revert to the untouched state

### Vibration Feedback Characteristics

Max Total On-Time Per Touch: 3 seconds  
 Mechanical Life: 500,000 cycles  
 For all touch conditions, the default Vibration Feedback is On and the type of vibration feedback is Steady

### Touch Response Time

Input Response: 5 ms minimum  
 Touch Response: 300 ms maximum (Standard Sensitivity touch response)

### Optical Sensor Emitter LED

Infrared, 870 nm

### Operating Conditions

–40 °C to +50 °C (–40 °F to +122 °F)  
**Humidity:** 90% at +50 °C maximum relative humidity (non-condensing)  
**Storage:** –40 °C to +70 °C (–40 °F to +158 °F)

### Environmental Rating

Touch and Optical Models: IEC IP67, IP69K per DIN 40050-9<sup>1</sup>  
 Push Button Models: IEC IP65

### Mounting

M30 x 1.5 threaded base, maximum torque 4.5 N-m (40 in-lbf)

### Construction

Standard Model Base, Dome, and Nut: Polycarbonate  
 FDA Model Base, Dome, and Nut: FDA-grade copolyester  
 Push Button: Thermoplastic

### Vibration and Mechanical Shock

Meets IEC 60068-2-6 requirements (Vibration: 10 Hz to 55 Hz, 1.0 mm amplitude, 5 minutes sweep, 30 minutes dwell)  
 Meets IEC 60068-2-27 requirements (Shock: 30G 11 ms duration, half sine wave)

### IO-Link Interface

Supports Smart Sensor Profile: No  
 Baud Rate: 38400 bps (COM2)  
 Process Data In: 16 bits (2 bytes)  
 Process Data Out: 80 bits (10 bytes)  
 IODD Files: Provides all programming options, plus additional functionality

### Connections

Integral 4-pin M12/Euro-style quick disconnect or 150 mm (5.9 inch) PVC cable with a M12/Euro-style quick disconnect, depending on model  
 Models with a quick disconnect require a mating cordset

### Certifications



### Default Indicator Characteristics

Color	Dominant Wavelength (nm) or Color Temperature (CCT)	Color Coordinates <sup>2</sup>		Lumen Output for Touch Models (Typical at 25 °C) <sup>3</sup>
		x	y	
Green	522	0.154	0.700	16.5
Red	620	0.689	0.309	8.3
Yellow	576	0.477	0.493	23.8
Blue	466	0.140	0.054	4.6
White	5700K	0.328	0.337	25.1
Cyan	493	0.170	0.340	18.4
Magenta	–	0.379	0.172	11.1
Amber	589	0.556	0.420	15.7
Rose	–	0.515	0.220	9.1
Lime Green	562	0.388	0.561	21.4
Sky Blue	486	0.155	0.247	19.5
Orange	599	0.616	0.370	12.1
Violet	–	0.217	0.089	9.7
Spring Green	508	0.177	0.536	17.0

### Required Overcurrent Protection



**WARNING:** Electrical connections must be made by qualified personnel in accordance with local and national electrical codes and regulations.


Overcurrent protection is required to be provided by end product application per the supplied table.  
 Overcurrent protection may be provided with external fusing or via Current Limiting, Class 2 Power Supply.  
 Supply wiring leads < 24 AWG shall not be spliced.  
 For additional product support, go to [www.bannerengineering.com](http://www.bannerengineering.com).

Supply Wiring (AWG)	Required Overcurrent Protection (Amps)
20	5.0
22	3.0
24	2.0
26	1.0
28	0.8
30	0.5


## Dimensions

All measurements are listed in millimeters [inches], unless noted otherwise.

### Standard Models: Touch Button

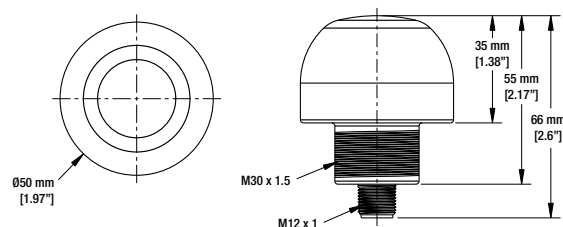

### Compact Models: Touch Button

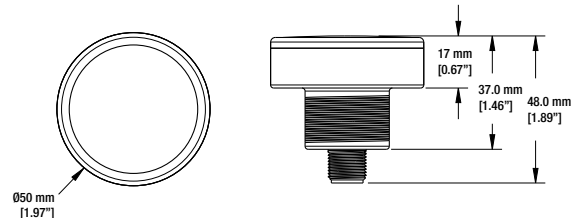


<sup>1</sup> QP models must be installed to protect the cable and cable entrance from high-pressure spray to meet IP69K.


<sup>2</sup> Refer to the CIE 1931 (x,y) Chromaticity Diagram to show equivalent color with indicated color coordinates. Actual coordinates may differ  $\pm 5\%$ .

<sup>3</sup> Values shown apply to touch dome models only. Lumen output for compact models is 20% lower, optical sensor models is 14% lower, and push button models is 10% lower.

Optical Sensor

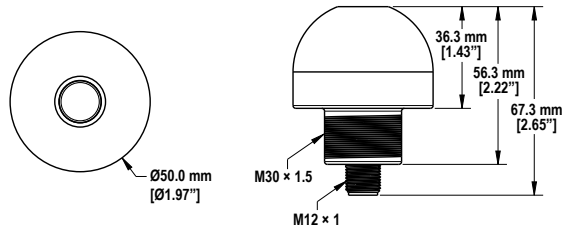

Push Button



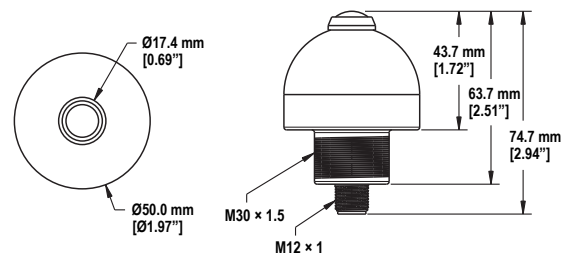


## Accessories

### Cordsets

4-Pin Threaded M12/Euro-Style Cordsets—Double Ended				
Model	Length	Style	Dimensions	Pinout
MQDEC-401SS	0.31 m (1 ft)	Male Straight/Female Straight		Female
MQDEC-403SS	0.91 m (3 ft)			
MQDEC-406SS	1.83 m (6 ft)			Male
MQDEC-412SS	3.66 m (12 ft)			
MQDEC-420SS	6.10 m (20 ft)			
MQDEC-430SS	9.14 m (30 ft)			
MQDEC-450SS	15.2 m (50 ft)			<p>1 = Brown 2 = White 3 = Blue 4 = Black</p>


4-Pin Threaded M12/Euro-Style Cordsets—Double Ended, Oil Resistant				
Model	Length	Style	Dimensions	Pinout
MQDEC-401SS-PUR	0.3 m (1 ft)	Male Straight/Female Straight		Female
MQDEC-403SS-PUR	1 m (3.28 ft)			
MQDEC-406SS-PUR	2 m (6.56 ft)			Male
MQDEC-415SS-PUR	5 m (16.40 ft)			
MQDEC-430SS-PUR	10 m (32.81 ft)			<p>1 = Brown 2 = White 3 = Blue 4 = Black</p>

4-Pin Threaded M12/Euro-Style Cordsets—Double Ended, Washdown, Stainless Steel				
Model	Length	Style	Dimensions	Pinout
MQDEC-WDSS-401SS	0.3 m (1 ft)	Male Straight/Female Straight		Female
MQDEC-WDSS-403SS	0.91 m (3 ft)			
MQDEC-WDSS-406SS	1.83 m (6 ft)			Male
MQDEC-WDSS-412SS	3.66 m (12 ft)			 <p>1 = Brown 2 = White 3 = Blue 4 = Black</p>

## Brackets

### SMB30A


- Right-angle bracket with curved slot for versatile orientation
- Clearance for M6 (¼ in) hardware
- Mounting hole for 30 mm sensor
- 12-ga. stainless steel



**Hole center spacing:** A to B=40  
**Hole size:** A=ø 6.3, B= 27.1 x 6.3, C=ø 30.5

### SMB30FA


- Swivel bracket with tilt and pan movement for precise adjustment
- Mounting hole for 30 mm sensor
- 12-ga. 304 stainless steel
- Easy sensor mounting to extrude rail T-slot
- Metric and inch size bolt available



**Bolt thread:** SMB30FA, A= 3/8 - 16 x 2 in; SMB30FAM10, A= M10 - 1.5 x 50  
**Hole size:** B= ø 30.1

### SMB30FVK


- V-clamp, flat bracket and fasteners for mounting to pipe or extensions
- Clamp accommodates 28 mm dia. tubing or 1 in. square extrusions
- 30 mm hole for mounting sensors



**Hole size:** A= ø 31

### SMB30MM


- 12-ga. stainless steel bracket with curved mounting slots for versatile orientation
- Clearance for M6 (¼ in) hardware
- Mounting hole for 30 mm sensor



**Hole center spacing:** A = 51, A to B = 25.4  
**Hole size:** A = 42.6 x 7, B = ø 6.4, C = ø 30.1

### SMB30RAVK


- V-clamp, right-angle bracket and fasteners for mounting sensors to pipe or extrusion
- Clamp accommodates 28 mm dia. tubing or 1 in. square extrusions
- 30 mm hole for mounting sensors



**Hole size:** A = ø 30.5

### SMB30SC


- Swivel bracket with 30 mm mounting hole for sensor
- Black reinforced thermoplastic polyester
- Stainless steel mounting and swivel locking hardware included



**Hole center spacing:** A=ø 50.8  
**Hole size:** A=ø 7.0, B=ø 30.0

**SMBAMS30P**


- Flat SMBAMS series bracket
- 30 mm hole for mounting sensors
- Articulation slots for 90°+ rotation
- 12-ga. 300 series stainless steel



**Hole center spacing:** A=26.0, A to B=13.0  
**Hole size:** A=26.8 x 7.0, B=ø 6.5, C=ø 31.0

**SMBAMS30RA**


- Right-angle SMBAMS series bracket
- 30 mm hole for mounting sensors
- Articulation slots for 90°+ rotation
- 12-ga. (2.6 mm) cold-rolled steel



**Hole center spacing:** A=26.0, A to B=13.0  
**Hole size:** A=26.8 x 7.0, B=ø 6.5, C=ø 31.0

**TC-K50-CL**


- Touch cover




**Diameter:** A = 67 mm  
**Height:** B = 42.5 mm

**LMB30LP**

- Low profile
- 30 mm mounting hole
- 300 series stainless steel

**LMB30LPC**

- For 28 mm tubular racking
- LMB30LP attached to clamp bracket
- Toolless mount to racking
- 30 mm mounting hole



## Banner Engineering Corp. Limited Warranty

Banner Engineering Corp. warrants its products to be free from defects in material and workmanship for one year following the date of shipment. Banner Engineering Corp. will repair or replace, free of charge, any product of its manufacture which, at the time it is returned to the factory, is found to have been defective during the warranty period. This warranty does not cover damage or liability for misuse, abuse, or the improper application or installation of the Banner product.

**THIS LIMITED WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES WHETHER EXPRESS OR IMPLIED (INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE), AND WHETHER ARISING UNDER COURSE OF PERFORMANCE, COURSE OF DEALING OR TRADE USAGE.**

This Warranty is exclusive and limited to repair or, at the discretion of Banner Engineering Corp., replacement. **IN NO EVENT SHALL BANNER ENGINEERING CORP. BE LIABLE TO BUYER OR ANY OTHER PERSON OR ENTITY FOR ANY EXTRA COSTS, EXPENSES, LOSSES, LOSS OF PROFITS, OR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES RESULTING FROM ANY PRODUCT DEFECT OR FROM THE USE OR INABILITY TO USE THE PRODUCT, WHETHER ARISING IN CONTRACT OR WARRANTY, STATUTE, TORT, STRICT LIABILITY, NEGLIGENCE, OR OTHERWISE.**

Banner Engineering Corp. reserves the right to change, modify or improve the design of the product without assuming any obligations or liabilities relating to any product previously manufactured by Banner Engineering Corp. Any misuse, abuse, or improper application or installation of this product or use of the product for personal protection applications when the product is identified as not intended for such purposes will void the product warranty. Any modifications to this product without prior express approval by Banner Engineering Corp will void the product warranties. All specifications published in this document are subject to change; Banner reserves the right to modify product specifications or update documentation at any time. Specifications and product information in English supersede that which is provided in any other language. For the most recent version of any documentation, refer to: [www.bannerengineering.com](http://www.bannerengineering.com).

For patent information, see [www.bannerengineering.com/patents](http://www.bannerengineering.com/patents).

## FCC Part 15 and CAN ICES-3 (B)/NMB-3(B)

This device complies with part 15 of the FCC Rules and CAN ICES-3 (B)/NMB-3(B). Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules and CAN ICES-3 (B)/NMB-3(B). These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:


- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the manufacturer.

## Datasheet


### 50 mm Multicolor RGB Devices (Indicator, Touch Button, Push Button, and Optical Sensor)

This datasheet contains limited information on K50 Pro Devices with PICK-IQ™. For complete information on configuration, performance, troubleshooting, dimensions, and accessories, please refer to the PICK-IQ™ Devices Instruction Manual. Go to [www.bannerengineering.com](http://www.bannerengineering.com) and search 206185 to view the PICK-IQ™ Devices Instruction Manual or 209995 to view the Device Register Map. Use of this document assumes familiarity with pertinent industry standards and practices.


- PICK-IQ gives full access to color, flashing, rotating, and dimming settings as well as advanced animations such as dynamic sequence mode and LED control
- Output settings, including on and off delays, output function, and output state are also available with PICK-IQ
- PICK-IQ brings faster response speed and simplified programming to Modbus RTU communication




Indicator



Optical Sensor



Touch Button



Push Button




#### WARNING:

- Do not use this device for personnel protection**
- Using this device for personnel protection could result in serious injury or death.
- This device does not include the self-checking redundant circuitry necessary to allow its use in personnel safety applications. A device failure or malfunction can cause either an energized (on) or de-energized (off) output condition.

## Models

### Touch Button Models


- Excellent immunity to false triggering by water spray, oils, and other foreign materials
- Rated IEC IP67 and IP69K per DIN 40050-9
- Can be actuated with bare hands or gloves; adjustable sensitivity

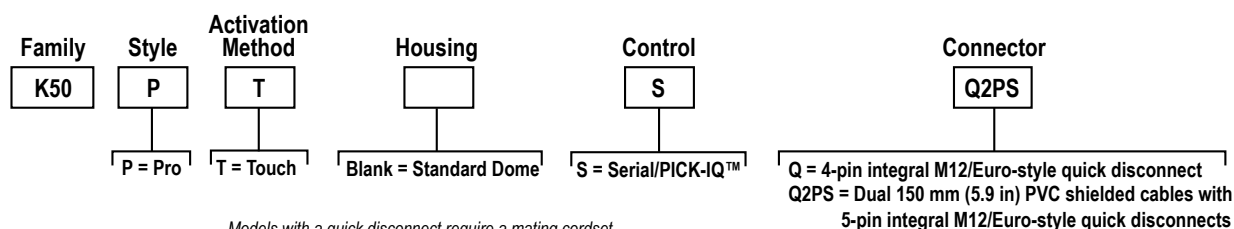



## Push Button and Optical Sensor Models

- Optical sensor models are immune to ambient light, EMI and RFI interference
- Optical sensor models rated IEC IP67 and IP69K per DIN 40050-9
- Push Button models rated IEC IP65

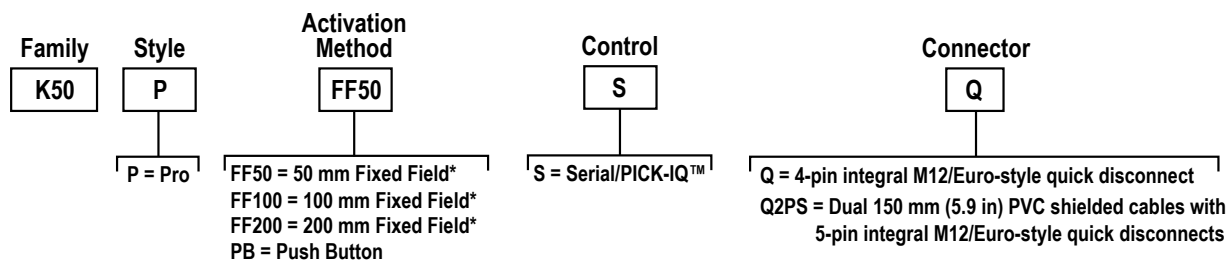


\*Cutoff distance will vary from specified range based on target and tolerances

Models with a quick disconnect require a mating cordset

## Indicator Models



- Bright, uniform indicator light
- Rated IEC IP67 and IP69K per DIN 40050-9


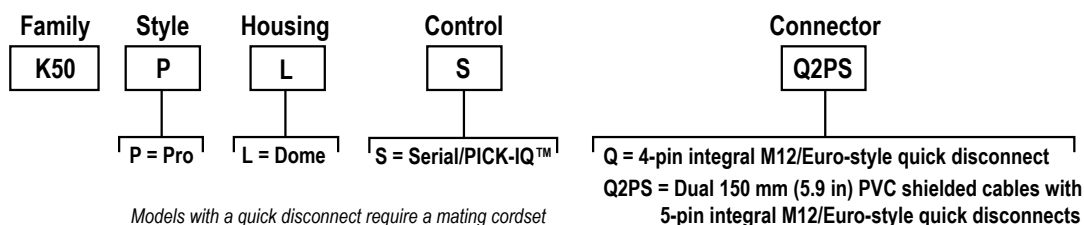


Models with a quick disconnect require a mating cordset

## Wiring

Compatible cordsets can be found in the PICK-IQ™ Devices Instruction Manual (206185).

Wiring for the Q Models				
4-pin M12/Euro-style Male	4-pin M12/Euro-style Female	Pin	Wire Color	Connection
		1	brown	10 V DC to 30 V DC
		3	blue	DC common
		4	black	RS-485 (-)
		2	white	RS-485 (+)

Wiring for the Q2PS Models				
5-pin M12/Euro-style Male	5-pin M12/Euro-style Female	Pin	Wire Color	Connection
		1	brown	10 V DC to 30 V DC
		3	blue	DC common
		4	black	RS-485 (-)
		2	white	RS-485 (+)
		5	gray	Shield

## Specifications

### Supply Voltage

10 V DC to 30 V DC

### Supply Current

210 mA maximum current at 10 V DC  
 Touch Models: 55 mA typical at 24 V DC  
 Optical Models: 70 mA typical at 24 V DC  
 Push Button/Indicator Models: 55 mA typical at 24 V DC

### Supply Protection Circuitry

Protected against reverse polarity and transient voltages

### Touch Dwell Time

If touch dwells for longer than 60 seconds, the output will revert to the untouched state

### Touch Response Time

Input Response: 5 ms minimum  
 Touch Response: 300 ms maximum (Standard Sensitivity touch response)

### Optical Sensor Emitter LED

Infrared 870 nm

### Operating Conditions

–40 °C to +50 °C (–40 °F to +122 °F)  
**Humidity:** 90% at +50 °C maximum relative humidity (non-condensing)  
**Storage:** –40 °C to +70 °C (–40 °F to +158 °F)

### Environmental Rating

Touch, Indicator, and Optical Models: IEC IP67, IP69K per DIN 40050-9<sup>1</sup>  
 Push Button Models: IEC IP65

### Mounting

M30 × 1.5 threaded base, maximum torque 4.5 N·m (40 in-lbf)

### Construction

Base, Dome, and Nut: Polycarbonate  
 Push Button: Thermoplastic

### Vibration and Mechanical Shock

Meets IEC 60068-2-6 requirements (Vibration: 10 Hz to 55 Hz, 1.0 mm amplitude, 5 minutes sweep, 30 minutes dwell)  
 Meets IEC 60068-2-27 requirements (Shock: 30G 11 ms duration, half sine wave)

### Connections

Integral 4-pin M12/Euro-style quick disconnect or dual 240 mm (9.4 in), shielded PVC cables with 5-pin M12/Euro-style quick disconnects, depending on model  
 Models with a quick disconnect require a mating cordset

### Certifications



### Default Indicator Characteristics

Color	Dominant Wavelength (nm) or Color Temperature (CCT)	Color Coordinates <sup>2</sup>		Lumen Output (Typical at 25 °C)	
		x	y	Touch Button Models <sup>3</sup>	Indicator Models <sup>3</sup>
Green	522	0.154	0.700	16.5	23
Red	620	0.689	0.309	8.3	7.2
Yellow	576	0.477	0.493	23.8	18
Blue	466	0.140	0.054	4.6	5.2
White	5700K	0.328	0.337	25.1	21.7
Cyan	493	0.170	0.340	18.4	26.2
Magenta	–	0.379	0.172	11.1	9.3
Amber	589	0.556	0.420	15.7	13
Rose	–	0.515	0.220	9.1	7.9
Lime Green	562	0.388	0.561	21.4	27.9
Sky Blue	486	0.155	0.247	19.5	28
Orange	599	0.616	0.370	12.1	10.2
Violet	–	0.217	0.089	9.7	10.7
Spring Green	508	0.177	0.536	17	24.1

### Required Overcurrent Protection



**WARNING:** Electrical connections must be made by qualified personnel in accordance with local and national electrical codes and regulations.

Overcurrent protection is required to be provided by end product application per the supplied table.  
 Overcurrent protection may be provided with external fusing or via Current Limiting, Class 2 Power Supply.  
 Supply wiring leads < 24 AWG shall not be spliced.  
 For additional product support, go to [www.bannerengineering.com](http://www.bannerengineering.com).

Supply Wiring (AWG)	Required Overcurrent Protection (Amps)
20	5.0
22	3.0
24	2.0
26	1.0
28	0.8
30	0.5

<sup>1</sup> Q2PS models must be installed to protect the cable and cable entrance from high-pressure spray to meet IP69K.


<sup>2</sup> Refer to the CIE 1931 (x,y) Chromaticity Diagram to show equivalent color with indicated color coordinates. Actual coordinates may differ ± 5%.

<sup>3</sup> Values shown apply to dome models only. Lumen output for optical sensor models is 14% lower and push button models is 10% lower.


## Dimensions

All measurements are listed in millimeters [inches], unless noted otherwise. Compatible brackets can be found in the PICK-IQ™ Devices Instruction Manual (206185).


### Touch Button

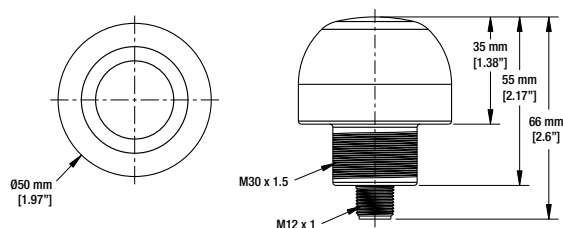


### Indicator

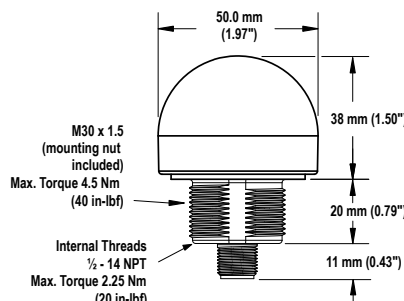

### Push Button

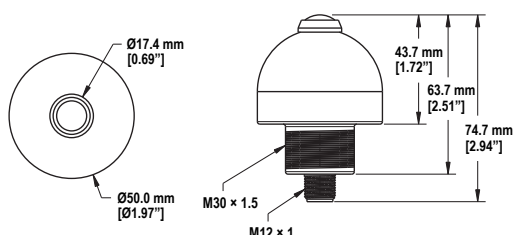

### Optical Sensor

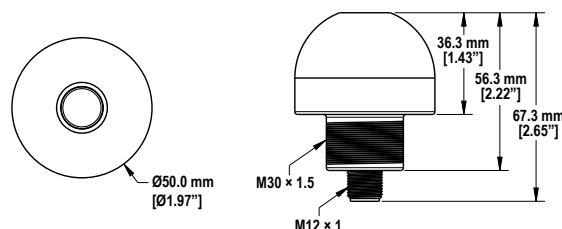

## Banner Engineering Corp. Limited Warranty

Banner Engineering Corp. warrants its products to be free from defects in material and workmanship for one year following the date of shipment. Banner Engineering Corp. will repair or replace, free of charge, any product of its manufacture which, at the time it is returned to the factory, is found to have been defective during the warranty period. This warranty does not cover damage or liability for misuse, abuse, or the improper application or installation of the Banner product.

**THIS LIMITED WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES WHETHER EXPRESS OR IMPLIED (INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE), AND WHETHER ARISING UNDER COURSE OF PERFORMANCE, COURSE OF DEALING OR TRADE USAGE.**

This Warranty is exclusive and limited to repair or, at the discretion of Banner Engineering Corp., replacement. **IN NO EVENT SHALL BANNER ENGINEERING CORP. BE LIABLE TO BUYER OR ANY OTHER PERSON OR ENTITY FOR ANY EXTRA COSTS, EXPENSES, LOSSES, LOSS OF PROFITS, OR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES RESULTING FROM ANY PRODUCT DEFECT OR FROM THE USE OR INABILITY TO USE THE PRODUCT, WHETHER ARISING IN CONTRACT OR WARRANTY, STATUTE, TORT, STRICT LIABILITY, NEGLIGENCE, OR OTHERWISE.**

Banner Engineering Corp. reserves the right to change, modify or improve the design of the product without assuming any obligations or liabilities relating to any product previously manufactured by Banner Engineering Corp. Any misuse, abuse, or improper application or installation of this product or use of the product for personal protection applications when the product is identified as not intended for such purposes will void the product warranty. Any modifications to this product without prior express approval by Banner Engineering Corp will void the product warranties. All specifications published in this document are subject to change; Banner reserves the right to modify product specifications or update documentation at any time. Specifications and product information in English supersede that which is provided in any other language. For the most recent version of any documentation, refer to: [www.bannerengineering.com](http://www.bannerengineering.com).

For patent information, see [www.bannerengineering.com/patents](http://www.bannerengineering.com/patents).

## FCC Part 15 and CAN ICES-3 (B)/NMB-3(B)

This device complies with part 15 of the FCC Rules and CAN ICES-3 (B)/NMB-3(B). Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules and CAN ICES-3 (B)/NMB-3(B). These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the manufacturer.



more sensors, more solutions