

# SECTION R


## Table of Contents



### Powered Seating Boxes



### Cabled Charging Stations

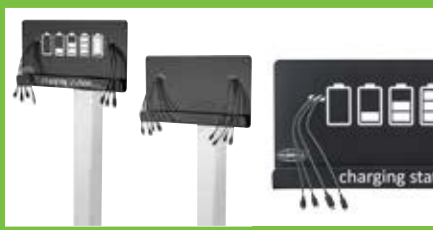

### Power Charging Pedestals



Product	Page
Powered Seating Boxes	R-3
Cabled Charging Stations	R-5
Power Charging Pedestals	R-7
Hubbell Artwork Logo Guidelines	R-10

Product	Page
USB Charging Receptacles	
Type-C, Type A&C and Type A	R-8
SNAPConnect® USB Charger	R-9
4 Port and 2 Port, Switch Combo Outlets	R-9
2X2 USB Work Surface Pop-Up Boxes	R-9
PlugTrak® Raceway with USB Charger Outlets	R-9

## Features and Benefits

### Powered Seating Boxes

Hubbell's On-the-Go Powered Seating Boxes fulfill customers' need for power accessibility. As the use of electronic devices has increased, the demand for charging has followed. Powered Seating Boxes provide an easy means of charging user's devices while meeting custom space requirements. Seating boxes can easily be attached to waiting area seating arrangements, conference tables, lecture halls, anywhere convenient power is needed.

## HUBBELL ON-the-GO CHARGING

### Convenient Charging Stations



#### Housing Design

- Rugged design features satin aluminum construction body with impact-resistant polycarbonate end caps
- Make any furniture or seating area into a convenient charging station
- Available with up to 4 boxes per unit



#### Powered Seating Boxes

- Parallel module wiring keeping individual seating boxes from losing power up and downstream
- Push to reset circuit breaker—trip electronically and reset manually



#### Charging Power

- Fast charging speeds delivering up to 5 amps of charging power
- Green power LED provides visual indication of power to the devices



#### Installation

- Security Torx-screw minimizes the potential for customers to open or tamper with units
- Hardwired permanently connected power and interconnecting cords
- Available with heavy-gauge durable powder coated steel mounting bracket



#### USB ports

- Smooth insertion tamper-resistant devices provide an extra level of safety to your customers
- Overcurrent protection—12 amp string and 5 amp individual module protection



#### Configurations

- Powered seating boxes are available in convenient bracketed configurations that easily attach to any flat surface
- Unbracketed configurations are also available



SP15USB1

## Powered Seating Boxes


Description	Cord Length*	Boxes per Unit*	Without Mounting Bracket	With Mounting Bracket
Powered Seating Box with (2) USB Type A high power 5 Amp, 5 volt USB output and a Commercial Grade Tamper-Resistant duplex receptacle.	10 ft power and 5 ft connecting cords	1	<b>SP15USB1</b>	<b>SP15USB1B</b>
		2	<b>SP15USB2</b>	<b>SP15USB2B</b>
		3	<b>SP15USB3</b>	<b>SP15USB3B</b>
		4	<b>SP15USB4</b>	<b>SP15USB4B</b>

Note: \*Special constructions are available with up to 7 boxes and up to 25 ft. of power cord. Contact your local Hubbell representative for more information.  
Options for USB Type-C and Combination Type A & C configurations and hospital grade receptacles are also available

## Specifications

- UL, cULus
- Meets construction and safety testing standards for UL962A Furniture Power Distribution Units
- Assembled in the USA

## Dimensions Inches (mm)

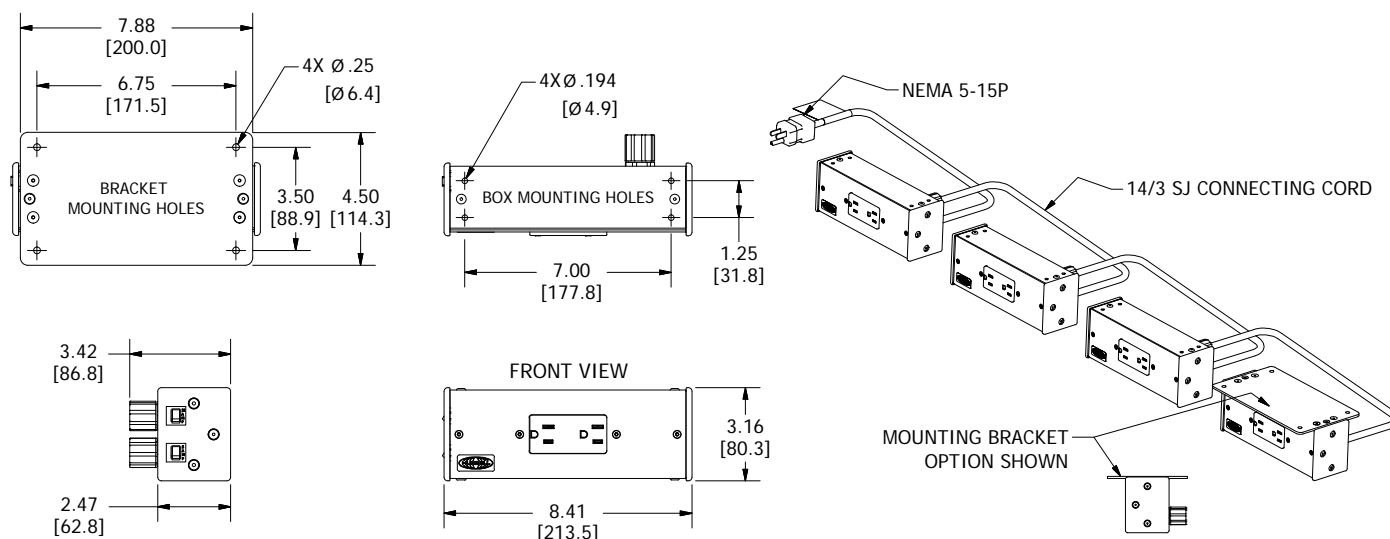

Dimensions in Inches (mm)

## Features and Benefits

### Cabled Charging Stations

Hubbell's On-the-Go Cabled Charging Stations require minimal assembly and install easily. There are two styles available; a semi-permanent wall-mount unit or a relocatable floor stand.

The standard configuration includes (3) Apple® Lightning, (3) Micro USB and (2) USB Type-C cords, allowing for 8 devices to be charging at once. Each unit features an 18 inch wide by 1 inch deep device tray to accommodate a wide range of wireless devices.

Cabled Charging Stations can be ordered with the standard design (as shown below), blank, or with a custom logo or graphic. Custom artwork will be applied and shipped from the factory.

## HUBBELL ON-the-GO CHARGING

### Cabled Charging Stations



#### Housing Design

- Eight charging connectors provide flexibility to charge a variety of smart devices
- The 18 inch tray holds multiple devices at once



#### Power Stands

- Blank charging stations available



#### Charging Power

- Charge up to 8 devices simultaneously without slowing charging speeds, up to 2.4A per port
- Efficient charging technology with automatic authentication of nearly all mobile devices



#### Installation

- Each unit includes a 6 foot cord with a 15A 125V plug
- Ships as kit making for easy installation and assembly
- Floor stand unit is 4 feet tall and weighs approximately 30 pounds



#### Wall Mount

- Wall mount unit includes mounting bracket and hardware



#### Custom Branding

- Custom branding/graphics available
- Designed for indoor use

Apple® is a registered trademarks of Apple Inc.

## Cabled Charging Stations

Description	Floor Stand Unit	Wall Mount Unit
Standard Cabled Charging Stations.	<b>HCSFS</b>	<b>HCSWM</b>
Blank Cabled Charging Stations.	<b>HCSFSBLANK</b>	<b>HCSWMBLANK</b>
Replacement floor stand with power supply.	<b>HCSREPFKIT</b>	—
Replacement wall mounting hardware kit.	—	<b>HCSWMREPWMKIT</b>
Replacement USB cord sets (Floor and Wall Units).	<b>HCSUSBREPCORDSET</b>	

## Specifications

- UL, cUL, FCC, CE, RoHS, MFi Certified

## Custom Branding

Custom branding or graphic artwork can be added to both the wall mount and floor stands with three templates to choose from (Template A, B or C as shown below). Contact your local Hubbell Territory Manager to special order a custom charging station. **See Guidelines on page R-10.**

Description	Floor Stand Unit	Wall Mount Unit
Custom Branded Charging Station.	<b>HCSFSLOGOxxxx</b>	<b>HCSFSLOGOxxxx</b>
Custom Artwork Specification.	Maximum print area: 10" W x 6" H Preferred file formats: Adobe Illustrator, Vector File, Encapsulated Postscript and Layered PDF.	

*Note: No Minimum Order Quantity for special order units.*



Template A




Template B



Template C

## Dimensions Inches (mm)

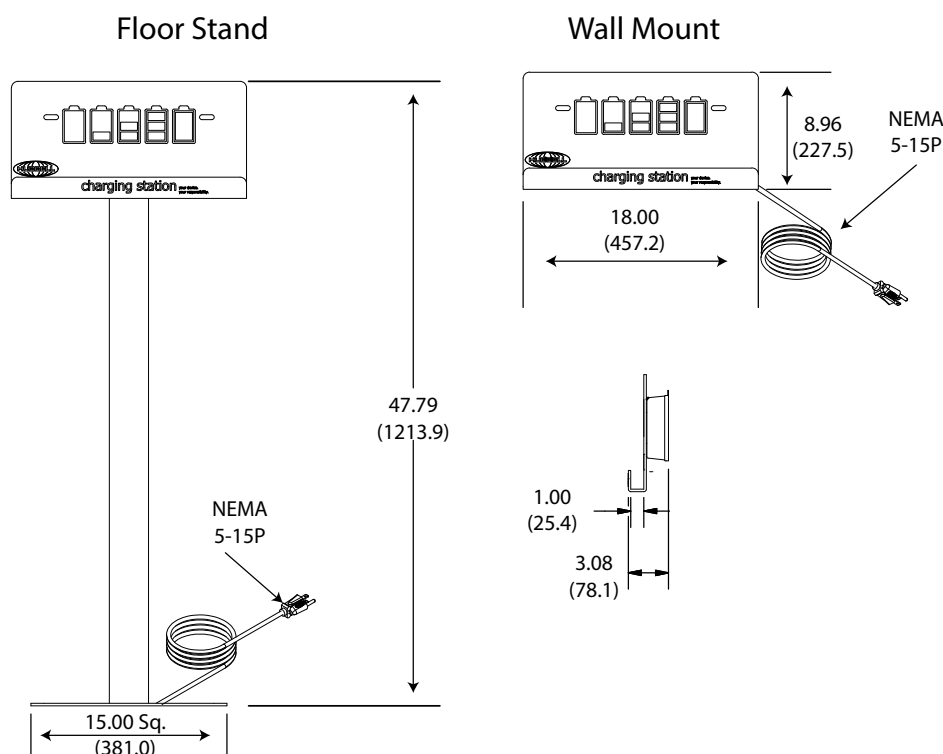

*Dimensions in Inches (mm)*



HCSFS



HCSWMBLANK



HCSFSBLANK



HCSREPFKIT

## Features and Benefits

### Power Charging Pedestals

Hubbell's On-the-Go Power Charging pedestals ships ready to install with four 20A 125V tamper-resistant USB Type A and Type C combination duplex receptacles, with a ¾ inch NPT hub in the base and 36 inch long wire leads the assembly will accommodate all installations when fed from the floor below. The pedestal can also be mounted and wired over one of Hubbell's flush round floor boxes or single gang rectangular floor boxes.

Our 2 inch by 8 inch wing-shaped aluminum extrusion has a sturdy ¼ inch thick aluminum base plate with four pre-drilled counter sunk holes for mounting. Because of its shallow design, the pedestals can be mounted between most back-to-back transportation seating arrangements.

# HUBBELL ON-the-GO CHARGING

## Power Charging Pedestals



(Front View)



(Side View)



### Housing Design

- Durable powder coated aluminum extrusion offers a permanent solution for high traffic areas
- Ships ready to install



### Power Stands

- Back to back 39.79 inch and 34.29 inch receptacle heights will clear backs of transportation seating chairs



### Charging Power

- Duplex receptacles include Hubbell's patented tamper-resistant technology allowing the plug to slide in effortlessly
- Combination Type A and Type-C USB configuration meets most charging needs



### Installation

- Integral ¾ inch conduit hub in base
- Single circuit pre-wired assembly with 36 inch long #12 AWG wire leads
- Sleek 2 inch by 8 inch powder coated aluminum extrusion design at 52.40 inches tall



### USB Ports

- Heavy-duty stainless steel USB ports are rated for 10,000 cord insertions and removals



### Custom Branding

- Custom branding/graphics available for light kit
- Available with energy efficient LED light kit to add visibility
- Indoor use only

## Power Charging Pedestals

Description	Color	Catalog Number
Hubbell Charging Power Stand, 52.40 inches tall.	Gray	<b>HCPWRPED52GRY</b>
Hubbell Charging Power Stands, 52.40 inches tall, Light Kit.	Gray	<b>HCPWRPED52LKGRY</b>

## Custom Branding

At the factory, custom branding/graphic artwork can be added to the Power Charging Pedestals with light kits. Contact your local Hubbell Territory Manager to special order a custom pedestal. **See Guidelines on page R-10.**

Description	Color	Catalog Number
Hubbell Charging Power Stands, 52.40 inches tall, Light Kit with Custom Branding.	Gray	<b>HCPWRPED52LKGRYxxx</b>
Custom Artwork Specification.	Maximum print area: 6.75" W x 9.13" H Preferred file formats: Adobe Illustrator, Vector File, Encapsulated Postscript and Layered PDF	

*Note: No Minimum Order Quantity for special order units.*



**HCPWRPED52LKGRY**  
Standard Light Kit



**HCPWRPED52LKGRYxxx**  
- Example-  
Custom Light Kit Graphics



**HCPWRPED52GRY**




**HCPWRPED52LKGRY**

## Specifications

- UL/cUL 1773 Listed

## Dimensions Inches (mm)

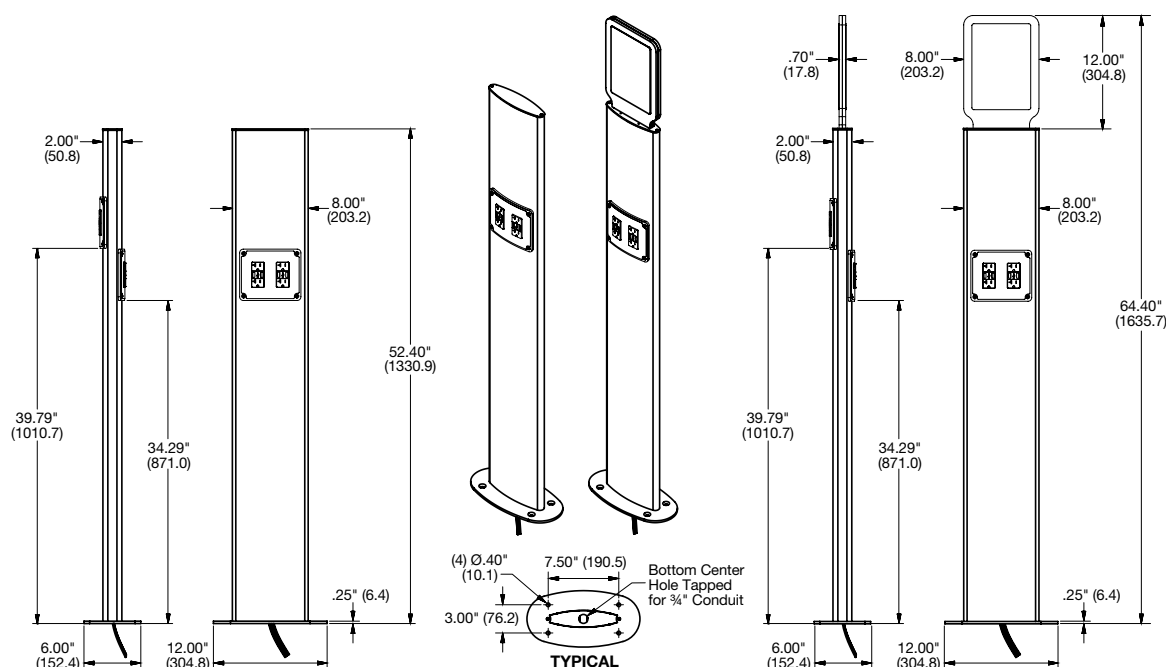

Dimensions in Inches (mm)





## USB Charging Receptacles Type-C • Type A&C • Type A

Hubbell USB Chargers are available in the new Type-C port, a combination unit with Type A&C, and the legacy Type A. All with the increase in power to a 5 Amp 5 Volt USB port adds capacity so that there is always ample current to support multiple device charging. Portable mobile manufacturers are using the faster Type-C ports. More phones, tablets and other electronic devices are expected to use this new standard.

- Compliant with USB BC1.2 battery charging and 3.0 power delivery. Compatible with USB 2.0, 3.0 and 3.1 devices
- USB Type-C port is legacy USB Type A compatible (adapter cord - not included)
- Heavy duty stainless steel USB ports; rated for 10,000 cord insertions and removals
- Patented Hubbell Tamper-Resistant technology uses cam action shutters
- Designed for commercial, industrial and home use
- Weather resistant receptacles Meets Section 406.9 of NEC®
- Weather resistant receptacles available in Type A&C USB ports only



## Weather Resistant USB Charger Duplex Receptacles

Description	Color	15A 125V	20A 125V
Type A&C USB Charger Receptacle, One Type A and one Type-C port configurations, high power 5 Amp, 5 Volt USB output, Tamper-Resistant Commercial Grade USB ports rated 10,000 cycles.	Black Brown Gray Ivory Light Almond White	<b>USB15AC5BKWR</b> <b>USB15AC5WR</b> <b>USB15AC5GYWR</b> <b>USB15AC5IWR</b> <b>USB15AC5LAWR</b> <b>USB15AC5WWR</b>	<b>USB20AC5BKWR</b> <b>USB20AC5WR</b> <b>USB20AC5GYWR</b> <b>USB20AC5IWR</b> <b>USB20AC5LAWR</b> <b>USB20AC5WWR</b>


Note: Outdoor circuits should be GFCI protected per national and local electric codes.

## USB Charger Duplex Receptacles Type-C, Type A&C and Type A


Description	Color	15A 125V	20A 125V
Hospital Grade USB Charger Receptacle, two Type-C port configurations, high power 5 Amp, 5 Volt USB output, Tamper-Resistant duplex receptacle, USB ports rated 10,000 cycles.	Black Brown Gray Ivory Light Almond Red White	<b>USB8200C5BK</b> <b>USB8200C5</b> <b>USB8200C5GY</b> <b>USB8200C5I</b> <b>USB8200C5LA</b> <b>USB8200C5R</b> <b>USB8200C5W</b>	<b>USB8300C5BK</b> <b>USB8300C5</b> <b>USB8300C5GY</b> <b>USB8300C5I</b> <b>USB8300C5LA</b> <b>USB8300C5R</b> <b>USB8300C5W</b>
Hospital Grade USB Charger Receptacle, one Type A and one Type-C port configurations, high power 5 Amp, 5 Volt USB output, Tamper-Resistant duplex receptacle, USB ports rated 10,000 cycles.	Black Brown Gray Ivory Light Almond Red White	<b>USB8200AC5BK</b> <b>USB8200AC5</b> <b>USB8200AC5GY</b> <b>USB8200AC5I</b> <b>USB8200AC5LA</b> <b>USB8200AC5R</b> <b>USB8200AC5W</b>	<b>USB8300AC5BK</b> <b>USB8300AC5</b> <b>USB8300AC5GY</b> <b>USB8300AC5I</b> <b>USB8300AC5LA</b> <b>USB8300AC5R</b> <b>USB8300AC5W</b>
Hospital Grade USB Charger Receptacle, two Type A port configurations, high power 5 Amp, 5 Volt USB output, Tamper-Resistant duplex receptacle, USB ports rated 10,000 cycles.	Black Brown Gray Ivory Light Almond Red White	<b>USB8200A5BK</b> <b>USB8200A5</b> <b>USB8200A5GY</b> <b>USB8200A5I</b> <b>USB8200A5LA</b> <b>USB8200A5R</b> <b>USB8200A5W</b>	<b>USB8300A5BK</b> <b>USB8300A5</b> <b>USB8300A5GY</b> <b>USB8300A5I</b> <b>USB8300A5LA</b> <b>USB8300A5R</b> <b>USB8300A5W</b>
Commercial Grade USB Charger Receptacle, two Type-C port configurations, high power 5 Amp, 5 Volt USB output, Tamper-Resistant duplex receptacle, USB ports rated 10,000 cycles.	Black Brown Gray Ivory Light Almond White	<b>USB15C5BK</b> <b>USB15C5</b> <b>USB15C5GY</b> <b>USB15C5I</b> <b>USB15C5LA</b> <b>USB15C5W</b>	<b>USB20C5BK</b> <b>USB20C5</b> <b>USB20C5GY</b> <b>USB20C5I</b> <b>USB20C5LA</b> <b>USB20C5W</b>
Commercial Grade USB Charger Receptacle, one Type A and one Type-C port configurations, high power 5 Amp, 5 Volt USB output, Tamper-Resistant duplex receptacle, USB ports rated 10,000 cycles.	Black Brown Gray Ivory Light Almond White	<b>USB15AC5BK</b> <b>USB15AC5</b> <b>USB15AC5GY</b> <b>USB15AC5I</b> <b>USB15AC5LA</b> <b>USB15AC5W</b>	<b>USB20AC5BK</b> <b>USB20AC5</b> <b>USB20AC5GY</b> <b>USB20AC5I</b> <b>USB20AC5LA</b> <b>USB20AC5W</b>
Commercial Grade USB Charger Receptacle, two Type A port configurations, high power 5 Amp, 5 Volt USB output, Tamper-Resistant duplex receptacle, USB ports rated 10,000 cycles.	Black Brown Gray Ivory Light Almond White	<b>USB15A5BK</b> <b>USB15A5</b> <b>USB15A5GY</b> <b>USB15A5I</b> <b>USB15A5LA</b> <b>USB15A5W</b>	<b>USB20A5BK</b> <b>USB20A5</b> <b>USB20A5GY</b> <b>USB20A5I</b> <b>USB20A5LA</b> <b>USB20A5W</b>

Note: See page Tech-10 for Tamper-Resistant description. See section N for wallplates.


NEC® is a registered trademark of the National Fire Protection Association (NFPA).




USB15AC5WWR



USB8300C5W



USB15AC5GY



USB20A5I


Dimensions in Inches (mm)




## SNAPConnect® USB Charger Duplex Receptacles



Description	Color	15A 125V AC	20A 125V AC
Hospital Grade SNAPConnect® USB Charger Tamper-Resistant Receptacle, two USB type 2.0 ports, 3.0 Amp, 5 Volt DC, 15 or 20 Amp, 125 Volt AC, Style Line® decorator duplex.	Black Brown Gray Ivory Light Almond Red White	<b>SNAP8200USBBK</b> <b>SNAP8200USB</b> <b>SNAP8200USBGY</b> <b>SNAP8200USBI</b> <b>SNAP8200USBLA</b> <b>SNAP8200USBR</b> <b>SNAP8200USBW</b>	<b>SNAP8300USBBK</b> <b>SNAP8300USB</b> <b>SNAP8300USBGY</b> <b>SNAP8300USBI</b> <b>SNAP8300USBLA</b> <b>SNAP8300USBR</b> <b>SNAP8300USBW</b>
SNAPConnect® USB Charger Tamper-Resistant Receptacle, two USB type 2.0 ports, 3.0 Amp, 5 Volt DC, 15 or 20 Amp, 125 Volt AC, Style Line® decorator duplex.	Black Brown Gray Ivory Light Almond White	<b>SNAP15USBBK</b> <b>SNAP15USB</b> <b>SNAP15USBGY</b> <b>SNAP15USBI</b> <b>SNAP15USBLA</b> <b>SNAP15USBW</b>	<b>SNAP20USBBK</b> <b>SNAP20USB</b> <b>SNAP20USBGY</b> <b>SNAP20USBI</b> <b>SNAP20USBLA</b> <b>SNAP20USBW</b>
Clear right angle terminal with 6 inch leads #12 AWG THHN/THWN-2; Polycarbonate housing material.	Solid Stranded	<b>SNAP1RA</b> <b>SNAP2RA</b>	<b>SNAP1RA</b> <b>SNAP2RA</b>



SNAP8300USBW



USB4W



USB102W

## 4 Port USB Charger Outlets




Description	Color	4 Type A ports	2 Type A and 2 Type-C ports	4 Type-C ports
USB Charger Outlets, 4 USB ports, 5 Amp, 5 Volt DC, Style Line® decorator.	Black Brown Gray Ivory Light Almond White	<b>USB4BK</b> <b>USB4</b> <b>USB4GY</b> <b>USB4I</b> <b>USB4LA</b> <b>USB4W</b>	<b>USB4ACBK</b> <b>USB4AC</b> <b>USB4ACGY</b> <b>USB4ACI</b> <b>USB4ACLA</b> <b>USB4ACW</b>	<b>USB4CBK</b> <b>USB4C</b> <b>USB4CGY</b> <b>USB4CI</b> <b>USB4CLA</b> <b>USB4CW</b>

## Switch Combo Outlets

Description	Color	Catalog Number
Switch Combo Outlet, two USB type 2.0 ports, 2.1 Amp, 5 Volt DC, Style Line® decorator.	Black Brown Gray Ivory Light Almond White	<b>USB102BK</b> <b>USB102</b> <b>USB102GY</b> <b>USB102I</b> <b>USB102LA</b> <b>USB102W</b>

## 2X2 USB Work Surface Pop-Up Boxes

Surface Dimensions	Cut Out Dimensions	Product Depth	Maximum Surface Thickness	Finish	Catalog Number
5" x 5"	4.62" x 4.62"	3.55"	1.125"	Brushed Aluminum	<b>WSBUSB2X2ALU</b>
5" x 5"	4.62" x 4.62"	3.55"	1.125"	Black Powder Coat	<b>WSBUSB2X2BLK</b>

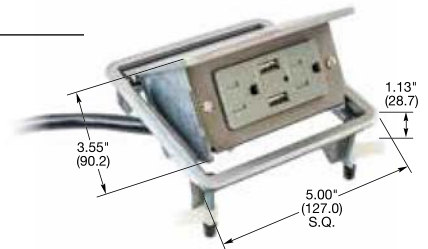

WSBUSB2X2ALU

## PlugTrak® Raceway with USB Charger Outlets

USB type 2.0 ports, 2.4 Amp, 5 Volt DC, 15 Amp, 125 Volt AC receptacles.

Material	Length	Ends	# of USB Ports	# of Single Receptacles	Color	Catalog Number
Steel	3 ft.	6 in. leads	2	2	Ivory	<b>HBL20GB312UIV</b>
Steel	6 ft.	6 in. leads	4	4	Ivory	<b>HBL20GB612UIV</b>
Aluminium	3 ft.	6 in. leads	2	2	Aluminum	<b>HBLALU20GB312U</b>
Aluminium	6 ft.	6 in. leads	4	4	Aluminum	<b>HBLALU20GB612U</b>
Non-metallic	6 ft.	6 in. leads	4	8	Office White	<b>PT156112U*</b>
Portable - Plug in						
Steel	40 in.	6 ft. cord and plug	2	4	Ivory	<b>HBL20C215UIV</b>
Non-metallic	36 in.	6 ft. cord and plug	2	4	Office White	<b>PT153112UP*</b>

Note: \*For additional colors add "BK" for Black or "W" for white.



HBL20GB312UIV

HBLALU20GB612U


PT153112UP

Dimensions in Inches (mm)



## ON-the-GO CHARGING Artwork/Logo Guidelines

### File Formats | Options



Note: \*To achieve the most accurate colors please provide Pantone PMS Color information (when possible). All files should be sent in CMYK color mode if possible.

- 1 **AI (Adobe Illustrator):** These files are built in "layers" which makes it efficient to edit or manipulate them if necessary if changes/adjustments need to be made prior to submitting for production.
- 2 **SVG (Vector File):** These files are pure vector format and are typically more than sufficient for producing production ready artwork.
- 3 **EPS (Encapsulated Postscript):** These are self contained image files that usually contain everything we will need to prepare and produce production ready artwork, if generated from layered files.
- 4 **Layered PDF (Portable Document Format):** Most PDFs are compatible with Illustrator and if layers are preserved we can prepare and produce production ready artwork.

### The file formats below may not be sufficient for production ready artwork.

- 5 **PSD (Adobe Photoshop):** If built and saved the correct way can usually be used to prepare and produce production ready artwork.
- 6 **PNG (Portable Network Graphic):** These files contain only foreground images and will have a blank or no background, making them easy to place on any color or type of background. These file types may be sufficient for production ready artwork if the file is HD resolution, i.e. 1920 x 1080 or better.
- 7 **JPG:** The least compatible file to use with design and therefore should be considered a "last resort." If supplying a logo pulled off the Internet or saved down from a larger layered file, it more than likely will not be sufficient to prepare and produce production ready artwork.

#### Process for Custom ON-the-GO Charging.

1. Email custom artwork to Hubbell Territory Manager\* with the following information:
  - \* If you don't know your local Territory Manager call Hubbell Customer Service at (800) 288-6000.
  - A. Art must conform to one of the 7 formats
  - B. Type of unit; power charging pedestal, wall mount or floor stand
  - C. Quantity of order
  - D. Name or title for artwork
2. Proof will be generated based on product type and artwork submitted and emailed to customer for approval.
3. Upon Approval, submit signed approval form and PO to Hubbell TM for order processing.