

# SECTION Z

## Table of Contents



### Decorator Products



### USB Charger Receptacles and Outlets



### Power Delivery



Decorator Products	Page
Products at a Glance	Z-2
Decorator Products	
Rocker Switches	Z-3
Combination Rocker Switches/Devices	Z-4
Standard Receptacles, Weather/TR & Single	Z-5
iDevices Products	
Wall Switches, Dimmer, Wall Outlet & Thermostat	Z-7
Wireless Wall Mount Phone Chargers	Z-9
USB Charger Receptacles and Outlets	Z-11
GFCI Receptacles with Auto Grounding	Z-12
Flat Panel TV and AV Wallboxes	Z-13
Decorator Frames and Modular Snap Fit Jacks	Z-14
Molded-In Voice/Data/Video	Z-15
Plastic and Metal Wallplates	Z-16
Combination Wallplates	Z-17

Switches and Receptacles	Page
Toggle Switches	Z-18
Combination Switches/Devices	Z-19
XClamp and Duplex Receptacles	Z-20
Singles & Range/Dryer Power Receptacles & Plugs	Z-21
Special Use Products	Z-22
Lighting Controls	
Dimmers and Fan Speed Controls	Z-23
Wall Switches and Digital Timer	Z-24
Power Delivery	
Floor Boxes for Concrete Floors	Z-25
Floor Boxes for Wood Floors	Z-26
Countertop Receptacles	Z-29
Under Cabinet/Counter Power Distribution	Z-30
JLOAD® Multimedia Outlet	Z-31
Technical Information	Z-32

## Products at a Glance



### Decorator Devices

- Smooth, quiet rocker switches
- Nightlight version is available
- Tamper and weather resistant availability
- Multiple-drive Slot/Phillips/Robertson head screws
- Ultrasonically welded cover and base
- Operating temperature: -20°C to 60°C
- UL Listed, CSA Certified



### iDevices Products

- Wall Switch, Dimmer Switch & Instant Switch
- Instinct™ Switch with Built-In Alexa
- Tamper-Resistant Wall Outlet
- Low profile Thermostat
- Easy installation
- Customizable LED
- Fits any standard decorator wallplate



### Wireless Wall Mount Phone Chargers

- Single gang outlet replacement
- Qi certified
- Two inductive coils for optimum target area and charging
- Flexible holder: 7.5mm to 12.5mm deep to hold phone firmly in place
- Phone can be inserted vertical or horizontal
- Green LED indicates power available
- Blue LED indicates wireless charging



### GFCI Receptacles

- Patented AUTOGUARD® self test technology includes disconnecting power to the receptacle if critical components are damaged and GFCI protection is lost
- Internal back wiring clamp and guide for quick and secure termination
- Night light option includes light sensor controls for automatic ON and OFF, custom dual lens for optimum light output



### Passive Infrared Wall Switches and Timers

- Passive infrared technology
- Photocell (WS2000 series)
- No neutral required
- Steel mounting strap
- Compatible with most LED and CFL
- CEC Title 24 and Ashrae 90.1 compliant
- cULus



### USB Charger Receptacles

- Weather resistant receptacles
- Type-C, Type A&C and Type A port configurations available
- Two USB ports 5 Amp, 5V DC
- Patented Hubbell Tamper-Resistant technology uses cam action shutters
- Standard and Hospital grade
- cULus listed to UL498 and UL1310

### 4 Port USB Outlets

- Switch activated port door; when open enables power; when closed, all power is switched OFF, for a “zero” no-load draw



### Power Delivery

- Hubbell Pop-Up receptacles for countertops provide a power source ideal for kitchen or bath counters and islands
- Round non-metallic floor boxes for concrete floors
- Height adjustable wood floor boxes
- Drop-In floor boxes are perfect for quick and easy installations
- Under cabinet/counter power distribution boxes can also be placed under counter islands or kitchen cabinets
- JLOAD® multimedia outlet Isolates low voltage and power in the same box

## Decorator Quiet Rocker Switches

### Decorator Products - Smart Style, Good Looks

Residential Decorator Switches and Receptacles provide solid, dependable performance and more. Indeed, they are fashion statements, masterfully complementing the look and feel of any room in any home.

#### Single Pole Decorator Quiet Rocker Switches

Description	Single Pole	Single Pole, Illuminated	Single Pole, Pilot Light	Single Pole with Nightlight	Single Pole with ON/OFF Marking
Termination	Self-Grounding, Push, Back and Side Wire	Self-Grounding, Push, Back and Side Wire	Self-Grounding, Push, Back and Side Wire	Self-Grounding, Push, Back and Side Wire	Self-Grounding, Push, Back and Side Wire
Rating	15A 120-277V AC	15A 120V AC	15A 120V AC	20A 120-277V AC	15A 120-277V AC
Black	<b>RSD115BK</b>	—	—	<b>DS120NLBK**</b>	—
Brown	<b>RSD115</b>	—	—	<b>DS120NLBR**</b>	—
Gray	<b>RSD115GY</b>	—	—	<b>DS120NLGY**</b>	—
Ivory	<b>RSD115I</b>	<b>RSD115ILI*</b>	<b>RSD115PLI**</b>	<b>DS120NLIV**</b>	<b>RSD115IM</b>
Light Almond	<b>RSD115LA</b>	<b>RSD115ILLA*</b>	<b>RSD115PLLA**</b>	<b>DS120NLLA**</b>	<b>RSD115LAM</b>
White	<b>RSD115W</b>	<b>RSD115ILW*</b>	<b>RSD115PLW**</b>	<b>DS120NLWH**</b>	<b>RSD115WM</b>

Note: \*Light glows through the top portion of the rocker when switch is in the OFF position. Does not require a neutral wire.

\*\*Light glows through the top portion of the rocker when switch is in the OFF position. Requires a neutral wire.



**RSD115W**



**RSD115PLW**



**DS120NLWH**

#### Double Pole, Three Way and Four Way Decorator Quiet Rocker Switches

Description	Double Pole	Three Way	Three Way, Illuminated	Four Way
Termination	Self-Grounding, Back and Side Wire	Self-Grounding, Push, Back and Side Wire	Self-Grounding, Push, Back and Side Wire	Self-Grounding, Back and Side Wire
Rating	15A 120-277V AC	15A 120-277V AC	15A 120V AC	15A 120-277V AC
Black	<b>RSD215BK</b>	<b>RSD315BK</b>	—	<b>RSD415BK</b>
Brown	<b>RSD215</b>	<b>RSD315</b>	—	<b>RSD415</b>
Gray	<b>RSD215GY</b>	<b>RSD315GY</b>	—	<b>RSD415GY</b>
Ivory	<b>RSD215I</b>	<b>RSD315I</b>	<b>RSD315ILI*</b>	<b>RSD415I</b>
Light Almond	<b>RSD215LA</b>	<b>RSD315LA</b>	<b>RSD315ILLA*</b>	<b>RSD415LA</b>
White	<b>RSD215W</b>	<b>RSD315W</b>	<b>RSD315ILW*</b>	<b>RSD415W</b>

Note: \*Light glows through the top portion of the rocker when switch is in the OFF position. Does not require a neutral wire.



#### Rocker Weatherproof Series

Hubbell designs and manufactures these weatherproof switches for wet and damp applications.

- 20 Amp 120/277V AC
- Single Pole / 3-Way Capable
- NEMA TYPE 3R



**RSD120WPGY**

#### Style Line® Decorator Weatherproof Series



Description	Color	Single Pole / Three Way
Rocker, weatherproof, self-grounding, 20A, 120/277V AC, back and side wired.	Gray Light Almond White	<b>RSD120WPGY</b> <b>RSD120WPLA</b> <b>RSD120WPW</b>

Dimensions in Inches (mm)

## Decorator Combination Quiet Rocker Switches/Devices

## Features

- Low profile, less than 1 inch deep
- Self-grounding feature is standard
- Operating temperature: -20°C to 60°C
- UL Listed, CSA Certified

## Combination Quiet Rocker Switches/Devices

Description	Three (3) Single Pole Switches	Two (2) Single Pole Switches	Single Pole and Three Way Switch	Single Pole Switch, 2 Pole, 3 Wire Receptacle
Termination	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire
Rating	15A 120-277V AC	15A 120-277V AC	15A 120-277V AC	15A 120V (switch) 15A 125V (recept.) NEMA 5-15R
Black	—	<b>RCD101BK</b>	<b>RCD103BK</b>	<b>RCD108BK</b>
Gray	—	<b>RCD101GY</b>	<b>RCD103GY</b>	<b>RCD108GY</b>
Ivory	<b>RCD111I</b>	<b>RCD101I</b>	<b>RCD103I</b>	<b>RCD108I</b>
Light Almond	<b>RCD111LA</b>	<b>RCD101LA</b>	<b>RCD103LA</b>	<b>RCD108LA</b>
White	<b>RCD111W</b>	<b>RCD101W</b>	<b>RCD103W</b>	<b>RCD108W</b>




Description	Single Pole Switch, Tamp-Resistant, 2 Pole, 3 Wire, Receptacle	Two (2) Three Way Switches	Three Way Switch, Tamp-Resistant, 2 Pole, 3 Wire, Receptacle
Termination	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire
Rating	15A 120V (switch) 15A 125V (recept.) NEMA 5-15R	15A 120-277V AC	15A 120V (switch) 15A 125V (recept.) NEMA 5-15R
Black	<b>RCD108BKTR</b>	<b>RCD303BK</b>	<b>RCD308BKTR</b>
Gray	<b>RCD108GYTR</b>	—	<b>RCD308GYTR</b>
Ivory	<b>RCD108ITR</b>	<b>RCD303I</b>	<b>RCD308ITR</b>
Light Almond	<b>RCD108LATR</b>	<b>RCD303LA</b>	<b>RCD308LATR</b>
White	<b>RCD108WTR</b>	<b>RCD303W</b>	<b>RCD308WTR</b>
Description	Single Pole Switch, Pilot Light, Clear Lens, Amber Neon Bulb	Three Way Switch, Pilot Light, Clear Lens, Amber Neon Bulb	Nightlight Only
Termination	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, 6" Pre-wired Stranded Wire, ½" Stripped Ends
Rating	15A 120V	15A 120V	120V
Ivory	<b>RCD109I**</b>	<b>RCD309I**</b>	<b>DD100NLIV**</b>
Light Almond	<b>RCD109LA**</b>	<b>RCD309LA**</b>	<b>DD100NLLA**</b>
White	<b>RCD109W**</b>	<b>RCD309W**</b>	<b>DD100NLWH**</b>

Note: See page Tech-10 for Tamp-Resistant description.

\*\*Requires neutral wire.

## Pilot Light Wiring Diagram

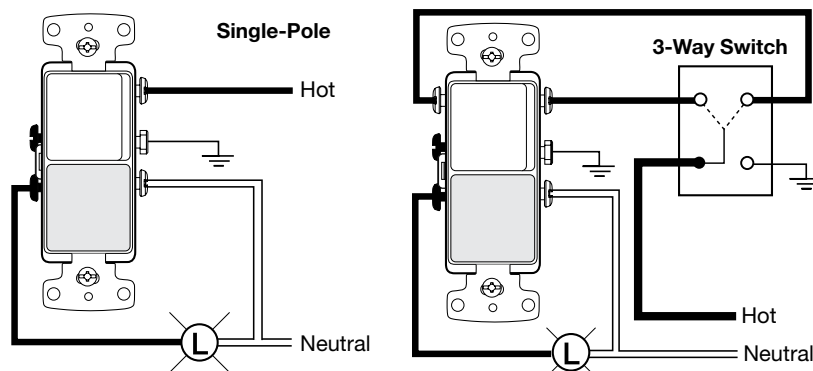

Dimensions in Inches (mm)

## Decorator Weather Resistant, Tamper-Resistant, Standard and Single Receptacles

## Decorator Duplex Receptacles, 2 Pole, 3 Wire

Description	Weather and Tamper-Resistant	Tamper-Resistant	Standard	Standard
Termination	Self-Grounding, Push and Side Wire	Self-Grounding, Push and Side Wire	Self-Grounding, Push and Side Wire	Push and Side Wire
Rating	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R
Black	<b>RRD15SBKWRTR</b>	<b>RRD15SBKTR</b>	<b>RRD15SBK</b>	<b>RRD15BK</b>
Brown	<b>RRD15SWRTR</b>	<b>RRD15STR</b>	<b>RRD15S</b>	<b>RRD15</b>
Gray	<b>RRD15SGYWRTR</b>	<b>RRD15SGYTR</b>	<b>RRD15SGY</b>	<b>RRD15GY</b>
Ivory	<b>RRD15SIWRTR</b>	<b>RRD15SITR</b>	<b>RRD15SI</b>	<b>RRD15I</b>
Light Almond	<b>RRD15SLAWRTR</b>	<b>RRD15SLATR</b>	<b>RRD15SLA</b>	<b>RRD15LA</b>
White	<b>RRD15SWWRTR</b>	<b>RRD15SWTR</b>	<b>RRD15SW</b>	<b>RRD15W</b>



RRD15SWTR



RRD15SW



DR15NLWH

Description	Tamper-Resistant, Nightlight Receptacle	Tamper-Resistant	Tamper-Resistant, Without Ears**
Termination	Self-Grounding, Two Nightlight Sources for 0.5 Lumens Total, Back and Side Wired	Self-Grounding, Eight Push Wire Holes Only #14 AWG	Self-Grounding, Push and Side Wire
Rating	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R
Black	—	<b>RRD15EBKTR</b>	<b>RRD15KBKTR</b>
Brown	—	<b>RRD15ETR</b>	<b>RRD15KTR</b>
Gray	—	<b>RRD15EGYTR</b>	<b>RRD15KGYTR</b>
Ivory	<b>DR15NLIV</b>	<b>RRD15EITR</b>	<b>RRD15KITR</b>
Light Almond	<b>DR15NLLA</b>	<b>RRD15ELATR</b>	<b>RRD15KLATR</b>
White	<b>DR15NLWH</b>	<b>RRD15EWTR</b>	<b>RRD15KWTR</b>

Note: See page Tech-10 for Weather and Tamper-Resistant descriptions.

\*\*100 per case, bulk packed. Mounting screws inserted into strap.

## Decorator Single Receptacles, 2 Pole, 3 Wire

Description	Tamper-Resistant	Tamper-Resistant	Standard
Termination	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire
Rating	15A 125V NEMA 5-15R	20A 125V NEMA 5-20R	20A 125V NEMA 5-20R
Black	<b>RRD151BKTR</b>	<b>RRD201BKTR</b>	<b>RRD201BK</b>
Brown	<b>RRD151TR</b>	<b>RRD201TR</b>	<b>RRD201</b>
Gray	<b>RRD151GYTR</b>	<b>RRD201GYTR</b>	<b>RRD201GY</b>
Ivory	<b>RRD151ITR</b>	<b>RRD201ITR</b>	<b>RRD201I</b>
Light Almond	<b>RRD151LATR</b>	<b>RRD201LATR</b>	<b>RRD201LA</b>
White	<b>RRD151WTR</b>	<b>RRD201WTR</b>	<b>RRD201W</b>



RRD151W



RRD205W

Description	Standard	Standard
Termination	Self-Grounding, Side Wire	Self-Grounding, Side Wire
Rating	15A 250V NEMA 6-15R	20A 250V NEMA 6-20R
Black	<b>RRD155BK</b>	<b>RRD205BK</b>
Brown	<b>RRD155</b>	<b>RRD205</b>
Gray	<b>RRD155GY</b>	<b>RRD205GY</b>
Ivory	<b>RRD155I</b>	<b>RRD205I</b>
Light Almond	<b>RRD155LA</b>	<b>RRD205LA</b>
White	<b>RRD155W</b>	<b>RRD205W</b>

Note: See page Tech-10 for Tamper-Resistant description.

Dimensions in Inches (mm)



# tradeSELECT® Products



## Features and Benefits

### iDevices - Make the Everyday Extraordinary

A truly smart home does more than connect homeowners — it works for them. With iDevices' advanced smart home products, homeowners experience an unparalleled level of comfort, convenience, and security every day.

#### The iDevices Advantage

iDevices products give homeowners the power to control their entire living space with the iDevices Connected app, or their voice using Siri®, Amazon Alexa, and the Google Assistant.



iDevices makes it simple to evolve any home into a smart home. Products connect to home Wi-Fi networks without the need for a separate hub. iDevices automatically update over-the-air so homeowners always have access to the latest features.



WI-FI® &  
BLUETOOTH™  
ENABLED



GUIDED  
IN-APP SETUP



2-YEAR  
WARRANTY



VOICE  
CONTROL



NO HUB  
REQUIRED



CONCIERGE  
SUPPORT



STANDARD  
INSTALLATION



REMOTE  
ACCESS



#### Wall Switch

- Customizable LED
- Compatible with most standard light bulbs
- Wall switch uses rocker for ON/OFF
- Fits any standard decorator wallplate



#### Instant Switch

- Remote locate an additional switch wirelessly
- Works with compatible iDevices products
- No wiring necessary
- Battery powered



#### Dimmer Switch

- CFL/LED: 150W - Supports forward-phase dimming only
- Customizable LED
- Compatible with most standard light bulbs
- Dimmer switch uses rocker for ON/OFF adjustable dimming



#### Instinct™ Switch with Built-In Alexa

- Integrated voice control
- Remote access
- Premium SOEN® Audio
- Dual-microphone design
- Customizable LED
- Single-pole, ON/OFF



#### Wall Outlet

- Replaces any standard receptacle
- Customizable LED
- Energy monitoring
- Tamper-Resistant
- Fits any standard decorator wallplate



#### Thermostat

- Low profile size and shape
- LED color display
- Capacitive touch faceplate
- 7-day programmable
- Displays Fahrenheit or Celsius
- Humidifier/dehumidifier control

© 2019 iDevices, LLC. All Rights Reserved. iDevices and Sweetblue are trademarks owned by iDevices, LLC. Apple, the Apple logo, iPad, iPhone, and iPod Touch are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc. The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by iDevices, LLC is under license.

# tradeSELECT® Products



The iDevices Wall Switch and Dimmer Switch replace standard light switches, allowing homeowners to control lighting with their smart phone or voice.

The iDevices Wall Outlet replaces any standard outlet and includes two Wi-Fi enabled receptacles controlled independently by voice or smart phone.

The iDevices Instant Switch pairs via Bluetooth™ to iDevices products like Wall Switch and Dimmer Switch to create 3- and 4-way control without additional wiring; or to Wall Outlet receptacles for switched control of electrical accessories.

The iDevices Thermostat allows homeowners to control the temperature from anywhere, set schedules to increase efficiency, and use voice commands for ease and comfort.

Instinct™ is both a smart light switch and Alexa device, giving homeowners the freedom of hands-free home control without countertop clutter. Homeowners have the ability to control Instinct, iDevices product, and other Alexa-enabled devices with voice commands to Alexa. In addition, homeowners can stream music, get traffic and weather alerts, set reminders and alarms, shop, and more.



## iDevices Products

Description	Color	Rating	Catalog Number
<b>Wall Switch</b> , multi-way enabled, single pole, 3- and 4-way setup operation	White	Input/output: 15A 120V AC, 6.5A 277V AC, 50/60Hz, 1HP @ 120 & 277V AC	<b>IDEV0008HW</b>
<b>Dimmer Switch</b> , multi-way enabled, CFL/LED, supports forward-phase dimming, single pole, 3- and 4-way setup operation	White	Input/output: 15A 120V AC, 60Hz, 400W Incandescent/halogen, 150W CFL/LED	<b>IDEV0009HW</b>
<b>Wall Outlet</b> , 15 amp tamper-resistant receptacle, individual control of each outlet with energy monitoring on both outlets	White	Input/output: 15A 125V AC, 60Hz, 1/2 HP	<b>IDEV0010HW</b>
<b>Instant Switch</b> , wireless transmitter, takes 1 CR2032 coin cell battery, wallplate included	White	3V DC, 5.4mA	<b>IDEV0020</b>
<b>Instinct™ Switch</b> with Built-In Alexa, features premium SOEN® Audio technology, speaker and microphone, wallplate included	White	Input/output: 120V AC, 60Hz, 150W CFL/LED, 600W Incandescent, 1000 Resistive, 1/2HP @ 120V AC	<b>IDEV0022</b>
<b>Thermostat</b> , heating/cooling: 1 and 2 stages, heat pump: 1 and 2 stage with aux or emergency heat, fan control, converts to Fahrenheit or Celsius	White	24V systems	<b>IDEV0005AND5</b>



## Everything You Love About Your Home, In One App®

Designed from the perspective of the user, the iDevices connected app provides simple navigation that feels just like moving through your home. Control and schedule your iDevices products with any iOS or Android™ device, and enjoy the flexibility of using your voice through Siri®, Amazon Alexa or the Google Assistant.

## iDevices Connected App Features

- Easy setup process for creating your home and adding new products
- Intuitive user interface makes it simple to navigate through your home
- Customizable through photos, names and dynamic scenes
- Access your home from anywhere through the iDevices IoT cloud infrastructure
- Supports other HomeKit™ products

© 2019 iDevices, LLC. All Rights Reserved. iDevices and Sweetblue are trademarks owned by iDevices, LLC. Apple, the Apple logo, iPad, iPhone, and iPod Touch are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc. The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by iDevices, LLC is under license.

## Features and Benefits

### Single and Combination Wireless Wall Mount Phone Charger and USB Outlet

More Ways to Charge Faster with Hubbell's line of Wireless Wall Mount Chargers, available in Single and Combination Type A&C with a USB high power output of 5 Amp 5 Volt DC. Hubbell provides both USB and electrical power in a standard single gang opening. Designed to provide maximum charging for portable electronics, the USB ports are capable of charging two tablets simultaneously.

- Single gang outlet replacement
- Qi certified
- Two inductive coils for optimum target area and charging
- Flexible holder: 7.5mm to 12.5mm deep to hold phone firmly in place
- Phone can be inserted vertical or horizontal
- Green LED indicates power available
- Blue LED indicates wireless charging
- Additional USB cord charging capability
- 15A or 20A 125V tamper-resistant receptacle with USB

## No Cord, No Problem!



The 'Qi' symbol is a trademark of the Wireless Power Consortium.



### Wireless Wall Mount Charger



#### Housing Design

- Qi Certified
- 7.5 Watt capacity
- 125 Volt input
- Flexible holder: 7.5mm to 12.5mm deep to hold phone firmly in place



#### Visual Identification

- Two inductive coils for optimum target area and charging
- Phone can be inserted vertical or horizontal
- Green LED indicates power available
- Blue LED indicates wireless charging



#### Easy Installation

- Single gang outlet replacement
- Sub-plate and mounting bracket
- Wallplate cover snaps into place

### Combination Wireless Wall Mount Charger



#### Housing Design

- Qi Certified
- 7.5 Watt capacity
- Type A&C port configurations, 15A or 20A 125V Tamper-Resistant decorator duplex receptacle
- Flexible holder: 7.5mm to 12.5mm deep to hold phone firmly in place



#### Visual Identification

- Two inductive coils for optimum target area and charging
- Phone can be inserted vertical or horizontal
- Green LED indicates power available
- Blue LED indicates wireless charging



#### Easy Installation

- Single gang outlet replacement
- Mounting bracket
- Wallplate cover snaps into place

The 'Qi' symbol is a trademark of the Wireless Power Consortium.



## Qi Certified Wireless Chargers

Description	Color	Rating	Catalog Number	
Wireless Wall Mount Phone Charger	White	Coil: 7.5 watt Inductive, 125 volt input	<b>USB1518</b>	
			Receptacle: 15A 125V	Receptacle: 20A 125V
Combination Wireless Wall Mount Phone Charger Inductive coil with USB Type A&C ports, and tamper-resistant receptacle	White	Coil: 7.5 watt Inductive, USB: 5A 5V DC	<b>USB1528AC</b>	<b>USB2028AC</b>



**USB1518**




**USB1528AC**




**USB2028AC**

## Dimensions

### Single Wireless Wall Mount Phone Charger

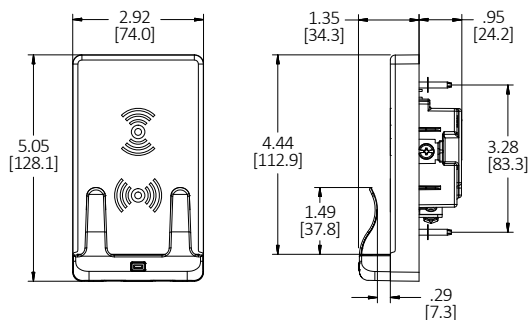


### Combination Wireless Wall Mount Phone Charger

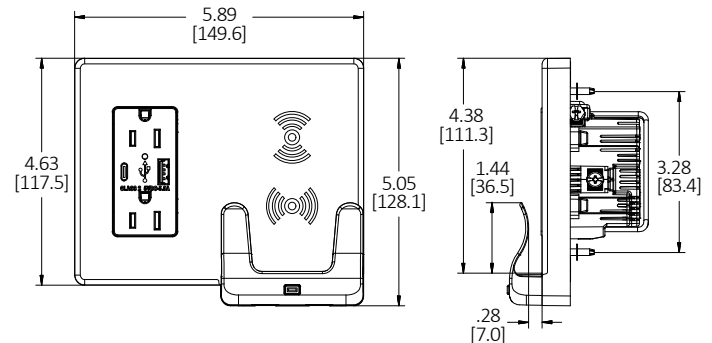


## Mounting Installation

### Single Wireless Wall Mount Phone Charger

- 1) Screw in wall box
- 2) Terminate wires

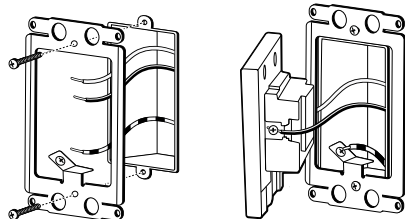


- 3) Screw on sub-plate
- 4) Snap on wallplate
- 5) No cord, No problem!

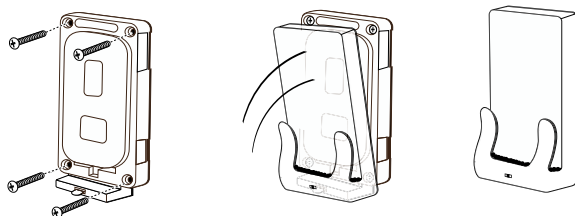


### Combination Wireless Wall Mount Phone Charger

- 1) Terminate wires
- 2) Screw on sub-plate

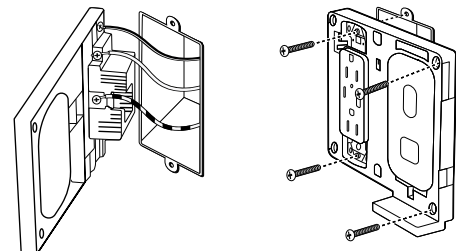

- 3) Snap on wallplate
- 4) No cord, No problem!

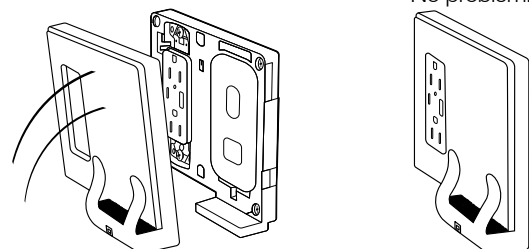

# tradeSELECT® Products

## Features and Benefits

### USB Charger Receptacles and Outlets

More Ways to Charge Faster with Hubbell's line of USB Chargers, available in Type-C, Combination Type A&C or the legacy Type A, all with a USB high power output of 5 Amp 5 Volt DC. Hubbell's USB Charger Duplex Receptacle provides both USB and electrical power in a standard single gang opening. Designed to provide maximum charging for portable electronics, the USB ports are capable of charging two tablets simultaneously.

The 4 Port and 2 Port Charger Outlet feature a USB port door, which when open enables power. When closed, all power is switched OFF. This eliminates all current flow for a "zero" no-load draw. Buildings looking to provide 100% green efficiency in power delivery will maximize LEED and energy efficient design.

#### Common Features

- LED ON to indicate USB and line voltage power available
- USB stainless steel ports rated for minimum 10,000 insertions and removals
- Complies with battery charging specification BC1.2
- Designed for commercial, industrial and home use
- Compatible with USB 1.1/2.0/3.0 devices, including Apple® products



#### Type-C USB Charger

- Two Type-C port configurations
- High power 5 Amp, 5 Volt DC USB output
- Tamper-Resistant decorator duplex receptacle



#### Weather Resistant Type A&C USB Charger

- One Type A and one Type-C port configurations
- Meets Section 406.9 of NEC®
- 5 Amp, 5 Volt USB output
- Power indicating green LED light



#### Type A&C USB Charger

- One Type A and one Type-C port configurations
- High power 5 Amp, 5 Volt DC USB output
- Tamper-Resistant decorator duplex receptacle



#### 4 Port USB Charger

- 4 Port outlet, 5 Amp, 5V DC, Type-C, Type A&C and Type A class 2.0
- Switch activated port door; when open enables power. When closed, all power is switched off, for a "zero" no-load draw



#### Type A USB Charger

- Two Type A port configurations
- High power 5 Amp, 5 Volt DC USB output
- Tamper-Resistant decorator duplex receptacle



#### Switch Combo Outlets

- Two USB ports 2.1 Amp, 5 Volt DC, Type A, class 2.0
- Isolated 15 Amp, 120V AC single pole/3-way switch

Apple® is a registered trademark of Apple Inc.

NEC® is a registered trademark of the National Fire Protection Association (NFPA).

## USB Charger Receptacles and Outlets



### Weather Resistant Receptacle Features

- Meets Section 406.9 of NEC®
- 5 Amp, 5 Volt USB output
- Type A&C USB ports
- Power indicating green LED light



### Weather Resistant USB Charger Duplex Receptacles

Description	Color	15A 125V	20A 125V
Type A&C USB Charger Receptacle, One Type A and one Type-C port configurations, high power 5 Amp, 5 Volt USB output, Tamper-Resistant USB ports rated 10,000 cycles; Commercial Grade	Black	<b>USB15AC5BKWR</b>	<b>USB20AC5BKWR</b>
	Brown	<b>USB15AC5WR</b>	<b>USB20AC5WR</b>
	Gray	<b>USB15AC5GYWR</b>	<b>USB20AC5GYWR</b>
	Ivory	<b>USB15AC5IWR</b>	<b>USB20AC5IWR</b>
	Light Almond	<b>USB15AC5LAWR</b>	<b>USB20AC5LAWR</b>
	White	<b>USB15AC5WWR</b>	<b>USB20AC5WWR</b>

Note: Outdoor circuits should be GFCI protected per national and local electric codes.



USB15AC5WWR



### Standard USB Charger Tamper-Resistant Duplex Receptacles

Description	Color	15A 125V	20A 125V
Type-C USB Charger Receptacle, two Type-C port configurations, high power 5 Amp, 5 Volt USB output.	Black	<b>USB15C5BK</b>	<b>USB20C5BK</b>
	Brown	<b>USB15C5</b>	<b>USB20C5</b>
	Gray	<b>USB15C5GY</b>	<b>USB20C5GY</b>
	Ivory	<b>USB15C5I</b>	<b>USB20C5I</b>
	Light Almond	<b>USB15C5LA</b>	<b>USB20C5LA</b>
	White	<b>USB15C5W</b>	<b>USB20C5W</b>
Type A&C USB Charger Receptacle, one Type A and one Type-C port configuration, high power 5 Amp, 5 Volt USB output.	Black	<b>USB15AC5BK</b>	<b>USB20AC5BK</b>
	Brown	<b>USB15AC5</b>	<b>USB20AC5</b>
	Gray	<b>USB15AC5GY</b>	<b>USB20AC5GY</b>
	Ivory	<b>USB15AC5I</b>	<b>USB20AC5I</b>
	Light Almond	<b>USB15AC5LA</b>	<b>USB20AC5LA</b>
	White	<b>USB15AC5W</b>	<b>USB20AC5W</b>
Type A USB Charger Receptacle, two Type A port configurations, high power 5 Amp, 5 Volt USB output.	Black	<b>USB15A5BK</b>	<b>USB20A5BK</b>
	Brown	<b>USB15A5</b>	<b>USB20A5</b>
	Gray	<b>USB15A5GY</b>	<b>USB20A5GY</b>
	Ivory	<b>USB15A5I</b>	<b>USB20A5I</b>
	Light Almond	<b>USB15A5LA</b>	<b>USB20A5LA</b>
	White	<b>USB15A5W</b>	<b>USB20A5W</b>

Note: See page Tech-10 for Tamper-Resistant description.  
See section L for Hospital grade series.



USB15C5W



USB15AC5W

### 4 Port USB Charger Outlets

Description	Color	4 Type A ports	2 Type A and 2 Type-C ports	4 Type-C ports
USB Charger Outlets, 4 USB ports, 5 Amp, 5 Volt DC, Style Line® decorator.	Black	<b>USB4BK</b>	<b>USB4ACBK</b>	<b>USB4CBK</b>
	Brown	<b>USB4</b>	<b>USB4AC</b>	<b>USB4C</b>
	Gray	<b>USB4GY</b>	<b>USB4ACGY</b>	<b>USB4CGY</b>
	Ivory	<b>USB4I</b>	<b>USB4ACI</b>	<b>USB4CI</b>
	Light Almond	<b>USB4LA</b>	<b>USB4ACLA</b>	<b>USB4CLA</b>
	White	<b>USB4W</b>	<b>USB4ACW</b>	<b>USB4CW</b>



USB20A5W

### Switch Combo Outlets

Description	Color	Catalog Number
Switch Combo Outlet, two USB type 2.0 ports, 2.1 Amp, 5 Volt DC, Style Line® decorator	Black	<b>USB102BK</b>
	Brown	<b>USB102</b>
	Gray	<b>USB102GY</b>
	Ivory	<b>USB102I</b>
	Light Almond	<b>USB102LA</b>
	White	<b>USB102W</b>



USB102W



USB4ACW

NEC® is a registered trademark of the National Fire Protection Association (NFPA).

## GFCI Receptacles with Auto Grounding

### Features

- Patented AUTOGUARD® self test technology includes disconnecting power to the receptacle if critical components are damaged and GFCI protection is lost
- Internal back wiring clamp and guide for quick and secure termination
- Night light option includes light sensor controls for automatic ON and OFF, custom dual lens for optimum light output



Meets UL Standard 943  
Class A GFCI



### Tamper-Resistant



Rating	Color	Standard	Night Light Two LED Night Lights	Alarm	Combination Switch 15A 120V Switch	Standard 3-Pack Three Devices per Pack
	Almond	GFTRST15AL	GFTRST15ALNL	GFTRST15ALB	—	—
	Black	GFTRST15BK	GFTRST15BKNL	GFTRST15BKB	—	—
	Brown	GFTRST15	GFTRST15NL	GFTRST15B	—	—
	Gray	GFTRST15GY	GFTRST15GYNL	GFTRST15GYB	—	—
	Ivory	GFTRST15I	GFTRST15INL	GFTRST15IB	GFSPST15I	GFTRST15I3
	Light Almond	GFTRST15LA	GFTRST15LANL	GFTRST15LAB	GFSPST15LA	GFTRST15LA3
	Red	GFTRST15R	GFTRST15RNL	GFTRST15RB	—	—
	White	GFTRST15W	GFTRST15WNL	GFTRST15WB	GFSPST15W	GFTRST15W3
	Almond	GFTRST20AL	GFTRST20ALNL	GFTRST20ALB	—	—
	Black	GFTRST20BK	GFTRST20BKNL	GFTRST20BKB	—	—
	Brown	GFTRST20	GFTRST20NL	GFTRST20B	—	—
	Gray	GFTRST20GY	GFTRST20GYNL	GFTRST20GYB	—	—
	Ivory	GFTRST20I	GFTRST20INL	GFTRST20IB	—	GFTRST20I3
	Light Almond	GFTRST20LA	GFTRST20LANL	GFTRST20LAB	—	GFTRST20LA3
	Red	GFTRST20R	GFTRST20RNL	GFTRST20RB	—	—
	White	GFTRST20W	GFTRST20WNL	GFTRST20WB	—	GFTRST20W3



### Tamper-Resistant Weather Resistant



Rating	Color	Standard	Isolated Ground
	Almond	GFTWRST15AL	GFTWRST15ALIG
	Black	GFTWRST15BK	GFTWRST15BKIG
	Brown	GFTWRST15	GFTWRST15IG
	Gray	GFTWRST15GY	GFTWRST15GYIG
	Ivory	GFTWRST15I	GFTWRST15IIG
	Light Almond	GFTWRST15LA	GFTWRST15LAIG
	Red	GFTWRST15R	GFTWRST15RIG
	White	GFTWRST15W	GFTWRST15WIG
	Almond	GFTWRST20AL	GFTWRST20ALIG
	Black	GFTWRST20BK	GFTWRST20BKIG
	Brown	GFTWRST20	GFTWRST20IG
	Gray	GFTWRST20GY	GFTWRST20GYIG
	Ivory	GFTWRST20I	GFTWRST20IIG
	Light Almond	GFTWRST20LA	GFTWRST20LAIG
	Red	GFTWRST20R	GFTWRST20RIG
	White	GFTWRST20W	GFTWRST20WIG

Note: See page Tech-10 for Weather and Tamper-Resistant descriptions.  
See section K for complete Hubbell GFCI offering.



## Flat Panel TV and AV Wallboxes

Hubbell has solutions for residential environments where wire management is a concern. Products sit flush against the wall and are available in multiple colors, creating an aesthetically pleasing look. Large connectors and cables are held securely and bundled together neatly. Wires are concealed behind the wall and out of view. Snap Fit options are used for customizing your connections.

### Features

#### Receptacles

- Snap Fit is configurable to accommodate multiple connectors such as: HDMI, AV and Voice/Low-speed data
- Feed-through options allows you to make direct connections

#### Boxes

- Available in plastic or metal boxes to accommodate local building requirements



Recessed Receptacle with Feed-Through

Metal Wallbox with Divider

### Recessed Receptacles



RR1510I



RR1512I



RR1514I



NSAV1I



NSAV2I

15A 125V, Tamper-Resistant Duplex Receptacle			
Color	1-Gang	2-Gang with Feed-Through	2-Gang with Snap Fit
Ivory	<b>RR1510I</b>	<b>RR1512I</b>	<b>RR1514I</b>
Light Almond	<b>RR1510LA</b>	<b>RR1512LA</b>	<b>RR1514LA</b>
White	<b>RR1510W</b>	<b>RR1512W</b>	<b>RR1514W</b>

### Feed-Through Plates

Color	1-Gang	2-Gang
Ivory	<b>NSAV1I*</b>	<b>NSAV2I*</b>
White	<b>NSAV1W*</b>	<b>NSAV2W*</b>

Note: \*Not UL Listed.

## Two and Three Gangable AV Wallboxes



HBL985



HBL986



HBL989



RR1500

Box	Dimensions			Top Knockouts	Bottom Knockouts	Back Knockouts	Catalog Number
	Height	Width	Depth				
2-Gang, 2" KO, 54 in <sup>3</sup> capacity	4.21" (107)	4.06" (103)	4.0" (102)	(2) ½" (2) ½" – ¾" TKO*	(1) 1", 1¼", 1½" and 2"	(2) ½" – ¾" TKO	<b>HBL985</b>
3-Gang, 2" KO, 79 in <sup>3</sup> capacity	4.21" (107)	5.87" (149)	4.0" (102)	(3) ½" (3) ½" – ¾" TKO*	(1) ½", (1) ½" – ¾" TKO* (1) 1", 1¼", 1½" and 2"	(3) ½" – ¾" TKO	<b>HBL986</b>

Note: \*TKO (Tangential Knockout).

### Wallbox

Description	Color	Catalog Number
2-Gang, nail-on box, thermoplastic	Blue	<b>RR1500</b>

### Low Voltage AV Wallbox Partitions


Compatible With	Description	Quantity	Catalog Number
HBL985 and HBL986	Solid divider	1	<b>HBL989</b>
	With pass-through capability	1	<b>HBL989AVD</b>

Dimensions in Inches (mm)



## Decorator Frames and Modular Snap Fit Jacks

### Decorator Frames

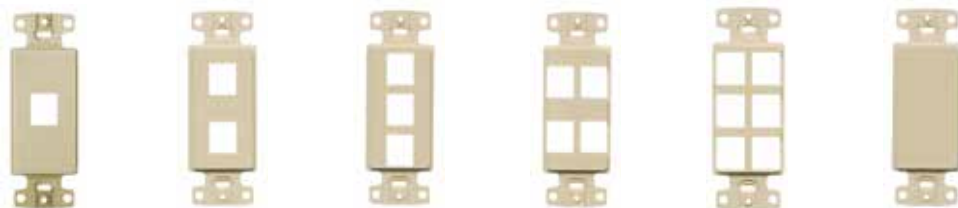

Color	1-Gang, 1-Port	1-Gang, 2-Port	1-Gang, 3-Port	1-Gang, 4-Port	1-Gang, 6-Port	1-Gang, Adapter Blank**
Black	<b>NS611BK</b>	<b>NS612BK</b>	<b>NS613BK</b>	<b>NS614BK</b>	<b>NS616BK</b>	<b>NS620BK</b>
Gray	<b>NS611GY</b>	<b>NS612GY</b>	<b>NS613GY</b>	<b>NS614GY</b>	<b>NS616GY</b>	<b>NS620GY</b>
Ivory	<b>NS611I</b>	<b>NS612I</b>	<b>NS613I</b>	<b>NS614I</b>	<b>NS616I</b>	<b>NS620I</b>
Light Almond	<b>NS611LA</b>	<b>NS612LA</b>	<b>NS613LA</b>	<b>NS614LA</b>	<b>NS616LA</b>	<b>NS620LA</b>
White	<b>NS611W</b>	<b>NS612W</b>	<b>NS613W</b>	<b>NS614W</b>	<b>NS616W</b>	<b>NS620W</b>

Note: \*\*To fill an extra decorator opening or to create customized openings.

### Molded-In Voice/Low-Speed Data - Modular Snap Fit



Category 6 Jack



Category 5e Jack



USOC Jack

Color	Category 6 Jack		Category 5e Jack		(single)
	(single)	(25 pack)	(single)	(25 pack)	
Black	<b>NSJ6BK</b>	<b>NSJ6BK25</b>	<b>NSJ5EBK</b>	<b>NSJ5EBK25</b>	<b>NSJUBK</b>
Blue	<b>NSJ6B</b>	<b>NSJ6B25</b>	<b>NSJ5EB</b>	<b>NSJ5EB25</b>	<b>NSJUB</b>
Gray	<b>NSJ6GY</b>	<b>NSJ6GY25</b>	<b>NSJ5EGY</b>	<b>NSJ5EGY25</b>	<b>NSJUGY</b>
Green	<b>NSJ6GN</b>	<b>NSJ6GN25</b>	<b>NSJ5EGN</b>	<b>NSJ5EGN25</b>	<b>NSJUGN</b>
Ivory	<b>NSJ6I</b>	<b>NSJ6I25</b>	<b>NSJ5EI</b>	<b>NSJ5EI25</b>	<b>NSJUI</b>
Light Almond	<b>NSJ6LA</b>	<b>NSJ6LA25</b>	<b>NSJ5ELA</b>	<b>NSJ5ELA25</b>	<b>NSJULA</b>
Orange	<b>NSJ6OR</b>	<b>NSJ6OR25</b>	<b>NSJ5EOR</b>	<b>NSJ5EOR25</b>	<b>NSJUOR</b>
Red	<b>NSJ6R</b>	<b>NSJ6R25</b>	<b>NSJ5ER</b>	<b>NSJ5ER25</b>	<b>NSJUR</b>
White	<b>NSJ6W</b>	<b>NSJ6W25</b>	<b>NSJ5EW</b>	<b>NSJ5EW25</b>	<b>NSJUW</b>
Yellow	<b>NSJ6Y</b>	<b>NSJ6Y25</b>	<b>NSJ5EY</b>	<b>NSJ5EY25</b>	<b>NSJUY</b>

### HDMI 1.4 Connectors



HDMI Keystone  
Feed-Through for IMB  
and ISFB Series

Color	
Black	<b>SFHC14BK</b>
White	<b>SFHC14W</b>

### Audio/Video Connectors - Standard Bulkhead



Nickel F-Type  
Coupler Bulkhead,  
Female to Female



Gold F-Type  
Coupler Bulkhead,  
Female to Female



RCA Gold  
Pass-Through,  
Female to Female,  
Red Interior



RCA Gold  
Pass-Through,  
Female to Female,  
White Interior



RCA Gold  
Pass-Through,  
Female to Female,  
Yellow Interior



RCA Gold  
Pass-Through,  
Female to Female,  
Blue Interior



RCA Gold  
Pass-Through,  
Female to Female,  
Green Interior

Color	Nickel F-Type Coupler Bulkhead, Female to Female	Gold F-Type Coupler Bulkhead, Female to Female	RCA Gold Pass-Through, Female to Female, Red Interior	RCA Gold Pass-Through, Female to Female, White Interior	RCA Gold Pass-Through, Female to Female, Yellow Interior	RCA Gold Pass-Through, Female to Female, Blue Interior	RCA Gold Pass-Through, Female to Female, Green Interior
Black	<b>NSF70BK</b>	<b>SFFGBK</b>	<b>SFRCRFFBK</b>	<b>SFRCWFFBK</b>	<b>SFRCYFFBK</b>	<b>SFRCBFFBK</b>	<b>SFRCGNFFBK</b>
Gray	<b>NSF70GY</b>	<b>SFFGGY</b>	<b>SFRCRFFGY</b>	<b>SFRCWFFGY</b>	<b>SFRCYFFGY</b>	<b>SFRCBFFGY</b>	<b>SFRCGNFFGY</b>
Ivory	<b>NSF70I</b>	<b>SFFGEI</b>	<b>SFRCRFFEI</b>	<b>SFRCWFFEI</b>	<b>SFRCYFFEI</b>	<b>SFRCBFFEI</b>	<b>SFRCGNFFEI</b>
Light Almond	<b>NSF70LA</b>	<b>SFFGLA</b>	<b>SFRCRFFLA</b>	<b>SFRCWFFLA</b>	<b>SFRCYFFLA</b>	<b>SFRCBFFLA</b>	<b>SFRCGNFFLA</b>
White	<b>NSF70W</b>	<b>SFFGW</b>	<b>SFRCRFFW</b>	<b>SFRCWFFW</b>	<b>SFRCYFFW</b>	<b>SFRCBFFW</b>	<b>SFRCGNFFW</b>

### Audio/Video Connectors - Recessed



Gold F-Type  
Coupler Bulkhead,  
Female to Female



RCA Gold  
Pass-Through,  
Female to Female,  
Red Interior



RCA Gold  
Pass-Through,  
Female to Female,  
White Interior



RCA Gold  
Pass-Through,  
Female to Female,  
Yellow Interior



RCA Gold  
Pass-Through,  
Female to Female,  
Blue Interior



RCA Gold  
Pass-Through,  
Female to Female,  
Green Interior



Blank Insert

Color	Gold F-Type Coupler Bulkhead, Female to Female	RCA Gold Pass-Through, Female to Female, Red Interior	RCA Gold Pass-Through, Female to Female, White Interior	RCA Gold Pass-Through, Female to Female, Yellow Interior	RCA Gold Pass-Through, Female to Female, Blue Interior	RCA Gold Pass-Through, Female to Female, Green Interior	Blank Insert
Black	<b>SFGRFBK</b>	<b>SFRCRRBK</b>	<b>SFRCWRBK</b>	<b>SFRCYRBK</b>	<b>SFRCBRBK</b>	<b>SFRCGNRBK</b>	<b>SFSBBK10*</b>
Gray	<b>SFGRFGY</b>	<b>SFRCRRGY</b>	<b>SFRCWRGY</b>	<b>SFRCYRGY</b>	<b>SFRCBRGY</b>	<b>SFRCGNRGY</b>	<b>SFSBGY10*</b>
Ivory	<b>SFGRFEI</b>	<b>SFRCRREI</b>	<b>SFRCWREI</b>	<b>SFRCYREI</b>	<b>SFRCBREI</b>	<b>SFRCGNREI</b>	<b>SFSBEI10*</b>
Light Almond	<b>SFGRFLA</b>	<b>SFRCRRLA</b>	<b>SFRCWRLA</b>	<b>SFRCYRLA</b>	<b>SFRCBRLA</b>	<b>SFRCGNRLA</b>	<b>SFSBLA10*</b>
White	<b>SFGRFW</b>	<b>SFRCRRW</b>	<b>SFRCWRW</b>	<b>SFRCYRW</b>	<b>SFRCBRW</b>	<b>SFRCGNRW</b>	<b>SFSBW10*</b>

Note: \*Sold in a package of 10. Order 1 to receive a bag of 10 blanks.





Dimensions in Inches (mm)

**Molded-In Voice/Data/Video****Features**

Designed to complement decorator styling, these jacks offer voice and Cat. 5e devices to fit within a decorator wallplate.

- High impact-resistant thermoplastic frame
- Meets FCC part 68
- UL Listed 1863 - Communication Circuit Accessory and CSA Certified

**Molded-In Voice/Low-Speed Data**




Description	Decorator Frame, One RJ11 Jack, 6-Position, 4-Conductor	Decorator Frame, One RJ11 Jack, 6-Position, 6-Conductor	Decorator Frame, Duplex RJ11 Jacks, 6-Position, 6-Conductor	Decorator Frame, One Cat. 5e One RJ11 Jack, 6-Position, 4-Conductor
Termination	Screw Terminations	Screw Terminations	Screw Terminations	110 Punch-Down
				
Color				
Black	<b>NS770BK</b>	—	—	<b>NS784BK</b>
Brown	<b>NS770</b>	<b>NS771</b>	—	<b>NS784</b>
Gray	<b>NS770GY</b>	—	—	<b>NS784GY</b>
Ivory	<b>NS770I</b>	<b>NS771I</b>	<b>NS772I</b>	<b>NS784I</b>
Light Almond	<b>NS770LA</b>	<b>NS771LA</b>	<b>NS772LA</b>	<b>NS784LA</b>
White	<b>NS770W</b>	<b>NS771W</b>	<b>NS772W</b>	<b>NS784W</b>

**Features**

Coaxial video and combination jacks complement multimedia needs in a 1-gang decorator opening.

- High impact-resistant thermoplastic frame
- Jacks meet FCC part 68
- UL Listed 1863 - Communication Circuit Accessory and CSA Certified

**Molded-In Voice/Low-Speed Data**

Description	Decorator Frame, Single F-Type Coupler Bulkhead, Female to Female	Decorator Frame, One RJ11 Jack, 6-Position, 4-Conductor, One F-Type Coupler Bulkhead, Female to Female	Decorator Frame, One Cat. 5e One F-Type Coupler Bulkhead, Female to Female
Termination	Screw Terminations	Screw Terminations	110 Punch-Down
			
Color			
Black	—	—	<b>NS785BK</b>
Brown	—	—	<b>NS785</b>
Gray	—	—	<b>NS785GY</b>
Ivory	—	—	—
Light Almond	<b>NS780LA</b>	<b>NS783LA</b>	<b>NS785LA</b>
White	<b>NS780W</b>	<b>NS783W</b>	<b>NS785W</b>

Dimensions in Inches (mm)

## Nylon and Metal Wallplates

### More Style In a Snap

Snap-on screwless wallplates offer a clean, elegant look that can be installed in seconds. Screw the mounting sub-plate onto the device and press the snap-on wallplate into place. Snaps securely hold the wallplate to the sub-plate.

- Clean, elegant look
- No visible screws
- Snap-on wallplate completely covers sub-plate eliminating dirt build-up around the edges
- Snap-on wallplate hides any paint or scratches on sub-plate caused during installation
- Appearance is consistent with other Hubbell wallplates
- Meets UL and CSA standards



### Snap-On Screwless Wallplates

Color	1-Gang, 1-Decorator	1-Gang, 1-Duplex	1-Gang, 1-Toggle	2-Gang, 2-Decorator	2-Gang, 2-Toggle	3-Gang, 3-Decorator	3-Gang, 3-Toggle	4-Gang, 4-Decorator
Ivory	<b>NPS26I</b>	<b>NPS8I</b>	<b>NPS1I</b>	<b>NPS262I</b>	<b>NPS2I</b>	<b>NPS263I</b>	<b>NPS3I</b>	<b>NPS264I</b>
Light Almond	<b>NPS26LA</b>	<b>NPS8LA</b>	<b>NPS1LA</b>	<b>NPS262LA</b>	<b>NPS2LA</b>	<b>NPS263LA</b>	<b>NPS3LA</b>	<b>NPS264LA</b>
White	<b>NPS26W</b>	<b>NPS8W</b>	<b>NPS1W</b>	<b>NPS262W</b>	<b>NPS2W</b>	<b>NPS263W</b>	<b>NPS3W</b>	<b>NPS264W</b>

### Decorator, Screw-On, Standard, Nylon Wallplates

Color	1-Gang, 1-Decorator	2-Gang, 2-Decorator	3-Gang, 3-Decorator	4-Gang, 4-Decorator	5-Gang, 5-Decorator	6-Gang, 6-Decorator
Black	<b>NP26BK</b>	<b>NP262BK</b>	<b>NP263BK</b>	<b>NP264BK</b>	<b>NP265BK</b>	<b>NP266BK</b>
Brown	<b>NP26</b>	<b>NP262</b>	<b>NP263</b>	<b>NP264</b>	<b>NP265</b>	<b>NP266</b>
Gray	<b>NP26GY</b>	<b>NP262GY</b>	<b>NP263GY</b>	<b>NP264GY</b>	<b>NP265GY</b>	<b>NP266GY</b>
Ivory	<b>NP26I</b>	<b>NP262I</b>	<b>NP263I</b>	<b>NP264I</b>	<b>NP265I</b>	<b>NP266I</b>
Light Almond	<b>NP26LA</b>	<b>NP262LA</b>	<b>NP263LA</b>	<b>NP264LA</b>	<b>NP265LA</b>	<b>NP266LA</b>
White	<b>NP26W</b>	<b>NP262W</b>	<b>NP263W</b>	<b>NP264W</b>	<b>NP265W</b>	<b>NP266W</b>

### Decorator, Screw-On, Mid-Size, Nylon Wallplates

Color	1-Gang, 1-Decorator	2-Gang, 2-Decorator	3-Gang, 3-Decorator	4-Gang, 4-Decorator	5-Gang, 5-Decorator	6-Gang, 6-Decorator
Black	<b>NPJ26BK</b>	<b>NPJ262BK</b>	<b>NPJ263BK</b>	<b>NPJ264BK</b>	—	—
Brown	<b>NPJ26</b>	<b>NPJ262</b>	<b>NPJ263</b>	<b>NPJ264</b>	—	—
Gray	<b>NPJ26GY</b>	<b>NPJ262GY</b>	<b>NPJ263GY</b>	<b>NPJ264GY</b>	—	—
Ivory	<b>NPJ26I</b>	<b>NPJ262I</b>	<b>NPJ263I</b>	<b>NPJ264I</b>	—	—
Light Almond	<b>NPJ26LA</b>	<b>NPJ262LA</b>	<b>NPJ263LA</b>	<b>NPJ264LA</b>	—	—
White	<b>NPJ26W</b>	<b>NPJ262W</b>	<b>NPJ263W</b>	<b>NPJ264W</b>	—	—

### Decorator, Screw-On, Mid-Size, Metal Wallplates

Material	1-Gang, 1-Decorator	2-Gang, 2-Decorator	3-Gang, 3-Decorator	4-Gang, 4-Decorator	5-Gang, 5-Decorator	6-Gang, 6-Decorator
Brass	<b>SB26</b>	<b>SB262</b>	—	—	—	—
Brass Plated	<b>SBP26</b>	<b>SBP262</b>	<b>SBP263</b>	—	—	—
Chrome	<b>SCH26</b>	<b>SCH262</b>	—	—	—	—
S/S 302/304	<b>SS26</b>	<b>SS262</b>	<b>SS263</b>	<b>SS264</b>	<b>SS265</b>	<b>SS266</b>
S/S 430	<b>SS26L</b>	<b>SS262L</b>	—	—	—	—

Note: See section O for complete selection of wallplates.

## Combination Wallplates

### Combination, Nylon, Standard Wallplates

Color	2-Gang, 1-Toggle 1-Decorator	2-Gang, 1-Duplex, 1-Decorator	2-Gang, 1-Blank Box Mount 1-Decorator	3-Gang, 2-Toggle 1-Decorator	3-Gang, 1-Toggle 2-Decorator	4-Gang, 3-Toggle 1-Decorator	4-Gang, 2-Toggle 2-Decorator
Black	<b>NP126BK</b>	<b>NP826BK</b>	<b>NP1326BK</b>	<b>NP226BK</b>	<b>NP1262BK</b>	<b>NP326BK</b>	<b>NP2262BK</b>
Brown	<b>NP126</b>	<b>NP826</b>	<b>NP1326</b>	<b>NP226</b>	<b>NP1262</b>	<b>NP326</b>	<b>NP2262</b>
Gray	<b>NP126GY</b>	<b>NP826GY</b>	<b>NP1326GY</b>	<b>NP226GY</b>	<b>NP1262GY</b>	<b>NP326GY</b>	<b>NP2262GY</b>
Ivory	<b>NP126I</b>	<b>NP826I</b>	<b>NP1326I</b>	<b>NP226I</b>	<b>NP1262I</b>	<b>NP326I</b>	<b>NP2262I</b>
Light Almond	<b>NP126LA</b>	<b>NP826LA</b>	<b>NP1326LA</b>	<b>NP226LA</b>	<b>NP1262LA</b>	<b>NP326LA</b>	<b>NP2262LA</b>
White	<b>NP126W</b>	<b>NP826W</b>	<b>NP1326W</b>	<b>NP226W</b>	<b>NP1262W</b>	<b>NP326W</b>	<b>NP2262W</b>

### Combination, Nylon, Mid-Size Wallplates


Color	2-Gang, 1-Toggle 1-Decorator	2-Gang, 1-Duplex, 1-Decorator	2-Gang, 1-Blank Box Mount 1-Decorator	3-Gang, 2-Toggle 1-Decorator	3-Gang, 1-Toggle 2-Decorator	4-Gang, 3-Toggle 1-Decorator	4-Gang, 2-Toggle 2-Decorator
Black	<b>NPJ126BK</b>	<b>NPJ826BK</b>	—	<b>NPJ226BK</b>	—	—	—
Brown	<b>NPJ126</b>	<b>NPJ826</b>	<b>NPJ1326</b>	<b>NPJ226</b>	—	—	—
Gray	<b>NPJ126GY</b>	<b>NPJ826GY</b>	—	<b>NPJ226GY</b>	—	—	—
Ivory	<b>NPJ126I</b>	<b>NPJ826I</b>	<b>NPJ1326I</b>	<b>NPJ226I</b>	—	—	—
Light Almond	<b>NPJ126LA</b>	<b>NPJ826LA</b>	<b>NPJ1326LA</b>	<b>NPJ226LA</b>	—	—	—
White	<b>NPJ126W</b>	<b>NPJ826W</b>	<b>NPJ1326W</b>	<b>NPJ226W</b>	—	—	—

### Combination, Standard, Metal Wallplates

Material	2-Gang, 1-Toggle 1-Decorator	2-Gang, 1-Duplex, 1-Decorator	2-Gang, 1-Blank Strap Mount 1-Decorator	3-Gang, 2-Toggle 1-Decorator	3-Gang, 1-Toggle 2-Decorator	4-Gang, 3-Toggle 1-Decorator	4-Gang, 2-Toggle 2-Decorator
Brass	<b>SB126</b>	<b>SB826</b>	—	—	—	—	—
Brass Plated	<b>SBP126</b>	—	—	—	—	—	—
Chrome	—	—	—	—	—	—	—
SS 302/304	<b>SS126</b>	<b>SS826</b>	<b>SS1426</b>	<b>SS226</b>	—	<b>SS326</b>	—
SS 430	<b>SS126L</b>	—	—	—	—	—	—

Note: See section O for complete selection of wallplates.

## Dimensions

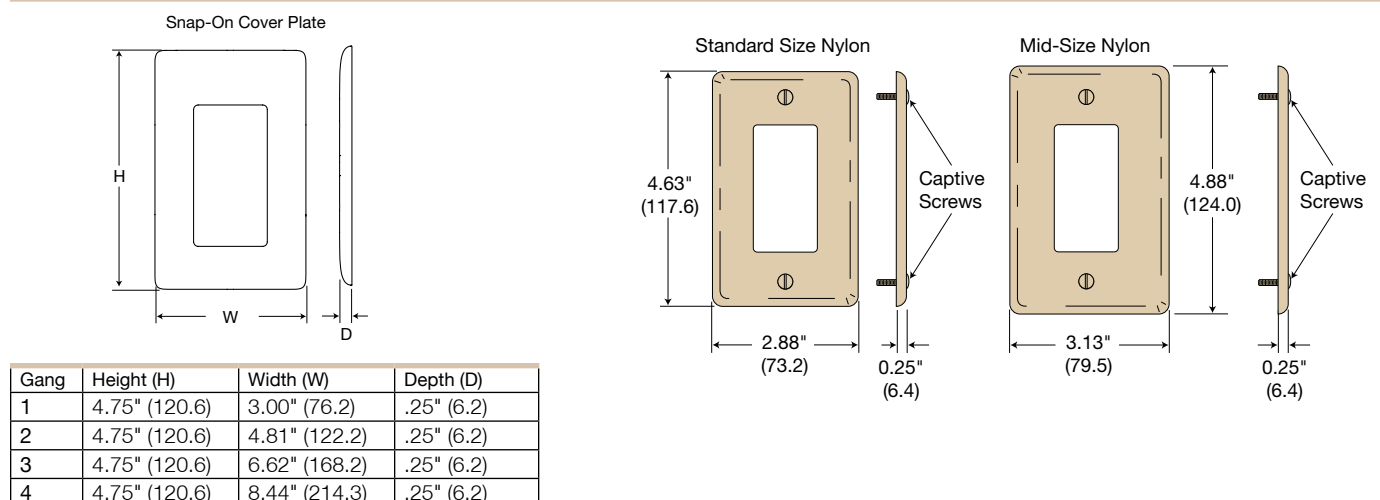

Dimensions in Inches (mm)

## Toggle Switches

### Features




Standard toggle switches provide the basic ON/OFF control for home lighting and appliances.

- Tough thermoplastic with ultrasonically welded cover and base
- Elongated strap for easier wall box mounting
- Quiet snap action mechanism
- Multiple-drive Slot/Phillips/Robertson head screws
- Hi-visibility yellow base for easy installation
- Operating temperature: -20°C to 60°C
- UL Listed, CSA Certified





RS115W

### Single Pole Toggle Switches

Description	Single Pole	Single Pole	Single Pole, Illuminated
Termination	Grounding, Push and Side Wire	Self-Grounding, Push and Side Wire	Self-Grounding, Push and Side Wire
Rating	15A 120V AC	15A 120V AC	15A 120V AC
			
Color			
Clear	—	—	RS115ILC
Black	RS115BK	—	—
Brown	RS115	RS115S	—
Ivory	RS115I	RS115SI	RS115ILI*
Light Almond	RS115LA	RS115SLA	RS115ILLA*
White	RS115W	RS115SW	RS115ILW*

Note: \*Frame is clear and illuminates, toggle is colored. Does not require a neutral wire.

### Three and Four Way Toggle Switches

Description	Three Way	Three Way	Three Way, Illuminated	Four Way
Termination	Grounding, Push and Side Wire	Self-Grounding, Push and Side Wire	Self-Grounding, Push and Side Wire	Self-Grounding, Side Wire
Rating	15A 120V AC	15A 120V AC	15A 120V AC	15A 120V AC
				
Color				
Clear	—	—	RS315ILC	—
Black	RS315BK	—	—	—
Brown	RS315	RS315S	—	RS415
Ivory	RS315I	RS315SI	RS315ILI*	RS415I
Light Almond	RS315LA	RS315SLA	RS315ILLA*	RS415LA
White	RS315W	RS315SW	RS315ILW*	RS415W

Note: \*Frame is clear and illuminates, toggle is colored. Does not require a neutral wire.

Dimensions in Inches (mm)



## Combination Switches/Devices

### Features

Mini-toggles provide for multiple switches in a compact single gang. Maximize control while maintaining function and appearance.

- Low profile, less than 1 inch
- Self-grounding feature is standard
- Combination devices provide compact switches in a single-gang opening
- Smooth toggle action
- Multiple-drive Slot/Phillips/Robertson head screws
- Hi-visibility yellow base for easy installation
- Operating temperature: -20°C to 60°C
- UL Listed, CSA Certified



RC108I

### Combination Toggle Switches/Devices

Description	Two (2) Single Pole Switches	Single Pole Switch, Tamper-Resistant, 2 Pole, 3 Wire, Receptacle	Single Pole Switch, 2 Pole, 3 Wire, Receptacle	Single Pole Switch, Pilot Light, Clear Lens, Amber Neon Bulb*
Termination	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire
Rating	15A 120V AC	15A 120V (switch) 15A 125V (recept.) NEMA 5-15R	15A 120V (switch) 15A 125V (recept.) NEMA 5-15R	15A 120V AC
Color				
Brown	RC101	RC108TR	RC108	RC109
Ivory	RC101I	RC108I	RC108I	RC109I
Light Almond	RC101LA	RC108LA	RC108LA	RC109LA
White	RC101W	RC108WTR	RC108W	RC109W

Note: See page Tech-10 for Tamper-Resistant description.

\*Neutral required for pilot light, see page Z-4 for wiring diagram.

### Combination Toggle Switches/Devices

Description	Single Pole and Three Way Switch	Two (2) Three Way Switches	Three Way Switch, Tamper-Resistant, 2 Pole, 3 Wire, Receptacle	Three Way Switch, 2 Pole, 3 Wire, Receptacle	Three Way Switch, Pilot Light, Clear Lens, Amber Neon Bulb*
Termination	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire
Rating	15A 120V AC	15A 120V AC	15A 120V (switch) 15A 125V (recept.) NEMA 5-15R	15A 120V (switch) 15A 125V (recept.) NEMA 5-15R	15A 120V AC
Color					
Brown	RC103	RC303	RC308TR	RC308	RC309
Ivory	RC103I	RC303I	RC308I	RC308I	RC309I
Light Almond	RC103LA	RC303LA	RC308LA	—	—
White	RC103W	RC303W	RC308WTR	RC308W	RC309W

Note: See page Tech-10 for Tamper-Resistant description.

\*Neutral required for pilot light, see page Z-4 for wiring diagram.

Dimensions in Inches (mm)

## XClamp and Duplex Receptacles


## Features

- Eliminates the need to loop the wire
- External back-wire clamp for fast and easy installation of 15A & 20A branch circuits in residential applications
- Compression plates maximize holding power to provide a stronger, more secure connection
- Terminate up to 8 wires
- Accommodates #12 & #14 AWG wire
- Break-off tabs for switched receptacle applications
- Tamper-resistant shutter complies with NEC®



- 1** Strip the wire
- 2** Insert the wire
- 3** Clamp the connection

## Best Solution for Residential 15A & 20A Branch Circuit Wiring

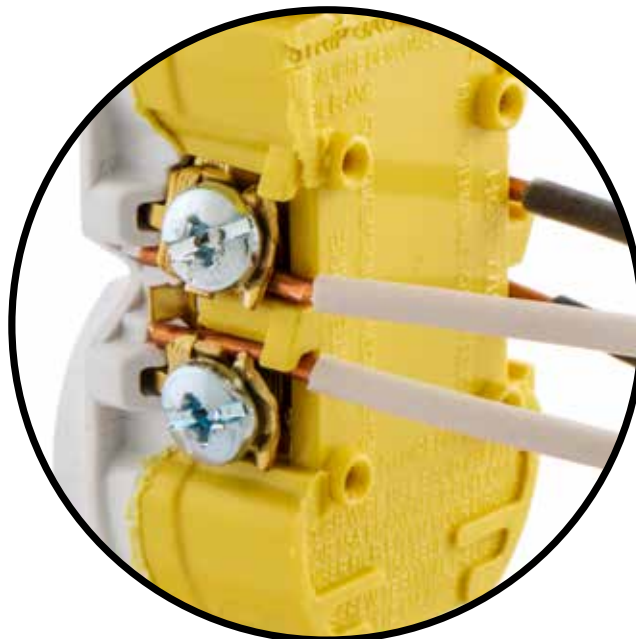

## Fast and Secure



RR15SWTRX

### XClamp Duplex Receptacles

Description	Color	Catalog Number
Tamper-Resistant, 15A 125V, 2 Pole, 3 Wire Grounding, 20A Circuit Rated	Ivory Light Almond White	<b>RR15SITRX</b> <b>RR15SLATRX</b> <b>RR15SWTRX</b>

### Listings

UL listed to UL498 File No. E2186  
Certified to CSA C22.2, No. 42  
NEMA® WD-6 Compliant



RR15W



RR15QW




### Duplex Receptacles, 2 Pole, 3 Wire

Description	Tamper-Resistant, Quick Thread	Standard	Weather and Tamper-Resistant	Tamper-Resistant	Standard
	Self-Grounding, Push and Side Wire	Grounding, Push and Side Wire	Self-Grounding, Push and Side Wire	Self-Grounding, Push and Side Wire	Self-Grounding, Push and Side Wire
Termination					
Rating	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R
Black	<b>RR15QBKTR</b>	<b>RR15BK</b>	<b>RR15SBKWRTR</b>	<b>RR15SBKTR</b>	—
Brown	<b>RR15QTR</b>	<b>RR15</b>	<b>RR15SWRTR</b>	<b>RR15STR</b>	<b>RR15S</b>
Gray	—	—	<b>RR15SGYWRTR</b>	—	—
Ivory	<b>RR15QITR</b>	<b>RR15I</b>	<b>RR15SIWRTR</b>	<b>RR15SITR</b>	<b>RR15SI</b>
Light Almond	<b>RR15QLATR</b>	<b>RR15LA</b>	<b>RR15SLWRTR</b>	<b>RR15SLATR</b>	<b>RR15SLA</b>
White	<b>RR15QWTR</b>	<b>RR15W</b>	<b>RR15SWWRTR</b>	<b>RR15SWTR</b>	<b>RR15SW</b>




NEC® is a registered trademark of the National Fire Protection Association (NFPA).

## Singles, Range and Dryer Power Receptacles and Plugs

### Single Receptacles, 2 Pole, 3 Wire





					
Description	Weather and Tamper-Resistant	Tamper-Resistant	Standard	Weather Resistant	Standard
Termination	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire
Rating	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R	15A 250V NEMA 6-15R	15A 250V NEMA 6-15R
Black	<b>RR151BKWRTR</b>	<b>RR151BKTR</b>	<b>RR151BK</b>	<b>RR155BKWR</b>	<b>RR155BK</b>
Brown	<b>RR151WRTR</b>	<b>RR151TR</b>	<b>RR151</b>	<b>RR155WR</b>	<b>RR155</b>
Gray	<b>RR151GYWRTR</b>	<b>RR151GYTR</b>	<b>RR151GY</b>	<b>RR155GYWR</b>	<b>RR155GY</b>
Ivory	<b>RR151IWRTR</b>	<b>RR151ITR</b>	<b>RR151I</b>	<b>RR155IWR</b>	<b>RR155I</b>
Light Almond	<b>RR151LAWRTR</b>	<b>RR151LATR</b>	<b>RR151LA</b>	<b>RR155LAWR</b>	<b>RR155LA</b>
White	<b>RR151WWRTR</b>	<b>RR151WTR</b>	<b>RR151W</b>	<b>RR155WWR</b>	<b>RR155W</b>



					
Description	Weather and Tamper-Resistant	Tamper-Resistant	Standard	Weather Resistant	Standard
Termination	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire
Rating	20A 125V NEMA 5-20R	20A 125V NEMA 5-20R	20A 125V NEMA 5-20R	20A 250V NEMA 6-20R	20A 250V NEMA 6-20R
Black	<b>RR201BKWRTR</b>	<b>RR201BKTR</b>	<b>RR201BK</b>	<b>RR205BKWR</b>	<b>RR205BK</b>
Brown	<b>RR201WRTR</b>	<b>RR201TR</b>	<b>RR201</b>	<b>RR205WR</b>	<b>RR205</b>
Gray	<b>RR201GYWRTR</b>	<b>RR201GYTR</b>	<b>RR201GY</b>	<b>RR205GYWR</b>	<b>RR205GY</b>
Ivory	<b>RR201IWRTR</b>	<b>RR201ITR</b>	<b>RR201I</b>	<b>RR205IWR</b>	<b>RR205I</b>
Light Almond	<b>RR201LAWRTR</b>	<b>RR201LATR</b>	<b>RR201LA</b>	<b>RR205LAWR</b>	<b>RR205LA</b>
White	<b>RR201WWRTR</b>	<b>RR201WTR</b>	<b>RR201W</b>	<b>RR205WWR</b>	<b>RR205W</b>

Note: See page Tech-10 for Weather and Tamper-Resistant descriptions.





### Range and Dryer Power Receptacles

				
Description	Flush Mount for 1- or 2-Gang Box	Flush Mount for 1- or 2-Gang Box	Flush Mount for 1- or 2-Gang Box	Flush Mount for 1- or 2-Gang Box
Rating	30A 125/250V 3 Pole, 4 Wire with Ground	50A 125/250V 3 Pole, 4 Wire with Ground	30A 125/250V 3 Pole, 3 Wire without Ground	50A 125/250V 3 Pole, 3 Wire without Ground
Black	<b>RR430F</b>	<b>RR450F</b>	<b>RR330F*</b>	<b>RR350F*</b>
White	<b>RR430FW</b>	<b>RR450FW</b>	—	—
Description	Surface Mount	Surface Mount	Surface Mount	Surface Mount
Rating	30A 125/250V 3 Pole, 4 Wire with Ground	50A 125/250V 3 Pole, 4 Wire with Ground	30A 125/250V 3 Pole, 3 Wire without Ground	50A 125/250V 3 Pole, 3 Wire without Ground
Black	<b>RR430</b>	<b>RR450</b>	<b>RR330*</b>	<b>RR350*</b>
Description	Panel Mount	Panel Mount	Panel Mount	Panel Mount
Rating	30A 125/250V 3 Pole, 4 Wire with Ground	50A 125/250V 3 Pole, 4 Wire with Ground	—	—
Black	<b>RR430PM</b>	<b>RR450PM</b>	—	—

Note: \*For replacement use only.



### Range and Dryer Power Angled Plugs

				
Description	With Interchangeable Blades for 30 or 50 Amp		With Interchangeable Blades for 30 or 50 Amp	
Rating	30/50A 125/250V 3 Pole, 4 Wire with Ground		30/50A 125/250V 3 Pole, 3 Wire without Ground	
Black	<b>RR435P</b>		<b>RR335P</b>	



## Special Use Products



RR151CHWTR



## Special Use Products

Description	Color	Tamper-Resistant	Tamper-Resistant
Clock Hanger/Recessed Single Receptacle, Tamper-Resistant, 2 pole, 3 wire, grounding, side wire terminations	Brass Stainless Steel Ivory (Nylon) White (Nylon)	<b>RR151CHBSTR</b> <b>RR151CHSSTR</b> <b>RR151CHITR</b> <b>RR151CHWTR</b>	<b>RR201CHBSTR</b> <b>RR201CHSSTR</b> <b>RR201CHITR</b> <b>RR201CHWTR</b>
Recessed Duplex Receptacle, Tamper-Resistant, 2 pole, 3 wire, grounding, side wire terminations	Ivory Light Almond White	<b>RR151OI</b> <b>RR151OLA</b> <b>RR151OW</b>	— — —
JLOAD® Multimedia Outlet, Provides power, Cat. 5e and coaxial in a single gang box. Requires RJ600 Box. Includes decorator frame, one Cat. 5e, one F-connector and one power receptacle 125V with voltage dividers*.	Black Gray Ivory Light Almond White	<b>RJ650BKTR</b> <b>RJ650GYTR</b> <b>RJ650ITR</b> <b>RJ650LATR</b> <b>RJ650WTR</b>	<b>RJ620BKTR</b> <b>RJ620GYTR</b> <b>RJ620ITR</b> <b>RJ620LATR</b> <b>RJ620WTR</b>
JLOAD® Multimedia Outlet, Includes decorator frame with two open ports for custom configuration and one power receptacle 125V with voltage dividers*.	Black Gray Ivory Light Almond White	<b>RJ65BKTR</b> <b>RJ65GYTR</b> <b>RJ65ITR</b> <b>RJ65LATR</b> <b>RJ65WTR</b>	<b>RJ62BKTR</b> <b>RJ62GYTR</b> <b>RJ62ITR</b> <b>RJ62LATR</b> <b>RJ62WTR</b>
JLOAD® Multimedia Box, 3 inches deep with seven 1/2-inch knockouts, non-metallic sheathed cable clamps on each side. Screw in mounting to stud.	Steel	<b>RJ600</b>	<b>RJ600</b>

Note: \*Dividers provided for use with the RJ600, RF515 series and RU200 series boxes. RF408 required for use with the RF400 series floor boxes.  
See page Z-10 for snap fit inserts.  
See pages Z-21 to Z-26 for floor boxes and under cabinet power distribution options.  
See page Tech-10 for Tamper-Resistant description.



RR1510W



RJ650BKTR



Dividers



RJ600



RDS50



RS100W




RS101W

## Door Switch with Cover Plate and Box

Description	"ON" when Door is Open	"OFF" when Door is Open
Rating	3A 125V AC	3A 125V AC
Zinc Plated Steel	<b>RDS50*</b>	<b>RDS30*</b>

Note: \*Not UL Listed.

## Dimensions

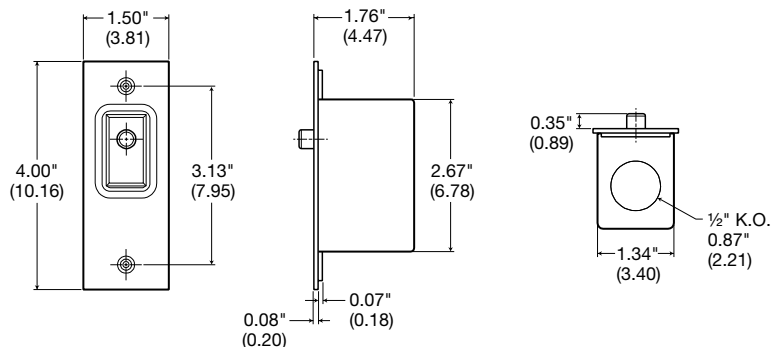

## In-Line Cord Switches

Description	Mini For Use with Flat Lamp Cord	Heavy Duty
Rating	6A 125V AC	6A 125V AC, 1/6 HP
Wire	#18 AWG SPT 1 and SPT 2	#18 to #16 AWG SPT 1 and SPT 2
Ivory White	— <b>RS100W</b>	<b>RS101I</b> <b>RS101W</b>

Dimensions in Inches (mm)

## Dimmers and Fan Speed Controls

### Features

Standard rocker, toggle, slide and rotary styles for any interior design.

- Optimum CFL and LED Control
- Low End Adjustment for Fine Tuning
- Decorator and Traditional Toggle Styling Available
- No Neutral Required

### CFL/LED Dimmers

Description	Rocker Dimmer	Toggle Dimmer
Rating	CFL/LED 150W Incandescent/ Halogen 600W 120V AC, 60Hz	CFL/LED 150W Incandescent/ Halogen 600W 120V AC, 60Hz
Termination	Single Pole/Three Way	Single Pole/Three Way
Ivory	<b>RDVCL153PI</b>	<b>RAYCL153PI</b>
Light Almond	<b>RDVCL153PLA</b>	<b>RAYCL153PLA</b>
White	<b>RDVCL153PW</b>	<b>RAYCL153PW</b>



### Rotary Incandescent Dimmers

Description	ON/OFF Dimmer	Push ON/OFF Dimmer Ivory and White Knobs Provided	Push ON/OFF Dimmer Ivory and White Knobs Provided
Termination	Single Pole	Single Pole	Three Way
Rating	600W 120V AC	600W 120V AC	600W 120V AC
Ivory	<b>RD600RI</b>	—	—
White	<b>RD600RW</b>	—	—
Ivory/White	—	<b>RD600PDK</b>	<b>RD603PDK</b>

### Replacement Knobs

2 Piece Kit  
Replacement Knobs

—
—
—
<b>RRKDK</b>



### Slide Incandescent Dimmers

Description	Slide to OFF	Preset with ON/OFF Switch	Preset with ON/OFF Switch
Termination	Single Pole	Single Pole	Three Way
Rating	600W 120V AC	600W 120V AC	600W 120V AC
Ivory	<b>RS600I</b>	<b>RS600PI</b>	<b>RS603PI</b>
Light Almond	<b>RS600LA</b>	<b>RS600PLA</b>	<b>RS603PLA</b>
White	<b>RS600W</b>	<b>RS600PW</b>	<b>RS603PW</b>



### Fan Speed Controls, 3 Speed

Description	Toggle	Rotary ON/OFF Knobs Provided
Termination	Single Pole/Three Way	Single Pole
Rating	1.5A 120V AC	1.5A 120V AC
Ivory	<b>RAYFSQFI</b>	—
Light Almond	<b>RAYFSQFLA</b>	—
White	<b>RAYFSQFW</b>	—
Ivory/White	—	<b>RFSQ2FDK</b>

### Replacement Knobs

Rotary Fan Control  
Replacement Knobs

—
—
<b>R28032406</b>
—
<b>R28032401</b>
—



### Fan Speed Controls, 3 Speed

Description	Rocker Slide Adjustment	Slide Control Slide to OFF
Termination	Single Pole/Three Way	Single Pole
Rating	1.5A 120V AC	1.5A 120V AC
Ivory	<b>RDVFSQFI</b>	<b>RSFSQFI</b>
Light Almond	<b>RDVFSQFLA</b>	<b>RSFSQFLA</b>
White	<b>RDVFSQFW</b>	<b>RSFSQFW</b>

### Replacement Knobs

Slide Control  
Replacement Knobs

—
—
<b>RSKI</b>
<b>RSKLA</b>
<b>RSKW</b>





## Wall Switches and Digital Timer



### Passive Infrared Wall Switches

- Passive infrared technology
- Photocell (WS2000 series)
- No neutral required
- 1200 sq. ft. coverage
- Steel mounting strap
- Compatible with most LED and CFL
- CEC Title 24 and ASHRAE 90.1 compliant
- cULus

Description	Color	Standard	with Nightlight	with Neutral	with Nightlight and Neutral
Manual adjusting; selectable manual/auto ON operation; dual-voltage 120/277V AC; multi-way capable.	Gray Ivory Light Almond White	<b>WS2000GY</b> <b>WS2000I</b> <b>WS2000LA</b> <b>WS2000W</b>	<b>WS2000NGY</b> <b>WS2000NI</b> <b>WS2000NLA</b> <b>WS2000NW</b>	— <b>WS2004I</b> — <b>WS2004W</b>	— <b>WS2004NI</b> — <b>WS2004NW</b>
Manual adjusting; selectable manual/auto ON operation; 120V AC only.	Ivory Light Almond White	<b>WS1000I</b> <b>WS1000LA</b> <b>WS1000W</b>	<b>WS1000NI</b> <b>WS1000NLA</b> <b>WS1000NW</b>	— — —	— — —
Manual adjusting; manual ON operation; 120V AC only.	Ivory Light Almond White	<b>WS1001I</b> <b>WS1001LA</b> <b>WS1001W</b>	<b>WS1001NI</b> <b>WS1001NLA</b> <b>WS1001NW</b>	— — —	— — —
Manual adjusting; auto ON operation; dual circuit; 120V AC only.	Gray Ivory Light Almond White	<b>WS1020GY</b> <b>WS1020I</b> <b>WS1020LA</b> <b>WS1020W</b>	<b>WS1020NGY</b> <b>WS1020NI</b> <b>WS1020NLA</b> <b>WS1020NW</b>	— <b>WS1024I</b> <b>WS1024LA</b> <b>WS1024W</b>	— <b>WS1024NI</b> <b>WS1024NLA</b> <b>WS1024NW</b>
Manual adjusting; manual ON operation; dual circuit; 120V AC only.	Gray Ivory Light Almond White	<b>WS1021GY</b> <b>WS1021I</b> <b>WS1021LA</b> <b>WS1021W</b>	<b>WS1021NGY</b> <b>WS1021NI</b> <b>WS1021NLA</b> <b>WS1021NW</b>	— <b>WS1025I</b> <b>WS1025LA</b> <b>WS1025W</b>	— <b>WS1025NI</b> <b>WS1025NLA</b> <b>WS1025NW</b>

Note: See below for coverage patterns.



### Count Down Timer Wall Switch

Description	Color	30 Minutes: OFF, 5, 10, 20, 30	60 Minutes: OFF, 15, 30, 45, 60	12 Hours: OFF, 2, 4, 8, 12
1000W @ 120V AC and 1400W @ 277V AC.	Ivory Light Almond White	<b>DT5030I</b> <b>DT5030LA</b> <b>DT5030W</b>	<b>DT5060I</b> <b>DT5060LA</b> <b>DT5060W</b>	<b>DT5012I</b> <b>DT5012LA</b> <b>DT5012W</b>

Note: Neutral required.



### Digital Timer Wall Switch


Description	Color	120V AC	277V AC	Catalog Number
Dip switch enabled preset intervals. User adjustable 1 min up to 4 hours, 3-way capable. Includes an ON/OFF momentary push button switch feature.	White	960W	1200W	<b>DT2000W</b>

Note: Neutral required.


### Wall Switches Coverage Patterns

Minor Motion: ■ PIR      Major Motion: ■ PIR

#### Horizontal Coverage



#### Vertical Coverage

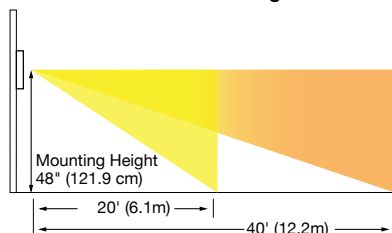

WS1000, WS2000 SERIES



## Floor Boxes for Concrete Floors

Residential Round Non-Metallic Floor Box offers an economical solution for electrical power or a combination of power and voice/data applications. Designed specifically for slab-on-grade installation. Quick and easy installation is assured using a push in place leveling system. UL Listed.

### Features

After the box has been secured in concrete, cut for height, apply PVC glue and push the cover assembly into the box. No fasteners or adjustment screws required.

- 4 inch minimum concrete pour
- Removable neoprene gaskets allow for independent use of either side of the receptacle with the cover closed
- Self height and leveling ring, no adjustments
- Pre-assembled flange, cover and leveling ring for quick installation
- Parallel PVC hubs for 1 inch and 3/4 inch conduit
- Recessed GFCI/decorator opening
- Tamper-Resistant duplex receptacle included
- UL listed floor box



**RF406BK**  
with RF400

## Floor Boxes for Concrete Floors

Description	Rating	Material/Color	Catalog Number
Flange and Hinged Door Cover Assembly. Includes tamper-resistant duplex receptacle, gasket, floor leveling PVC ring, high impact and chemically resistant nylon. Factory pre-assembled for easy drop-in installation.	15A 125V NEMA 5-15R	Brushed Aluminum Brushed Brass Plated Solid Brass Almond Black Chestnut Brown Gray	<b>RF406ALU</b> <b>RF406BP</b> <b>RF406BR</b> <b>RF406AL</b> <b>RF406BK</b> <b>RF406BN</b> <b>RF406GY</b>
Flush fit cover for hardwood and tile floors (similar to above).		Solid Brass	<b>RF409BR</b>
PVC Floor Box with Concrete Protective Cover. Accepts 3/4 in. and 1.0 in. schedule 40 and schedule 80 PVC conduit. Includes round box (47/8 in. diameter x 6.0 in. deep), four reducers, closure plugs, and concrete cover with locator flag.		Gray	<b>RF400</b>
Hinged Nylon Replacement Door Cover. Includes neoprene gasket to seal plug openings. Replacement cover for RF406 series.		Solid Brass Almond Black	<b>RF407BR</b> <b>RF407AL</b> <b>RF407BK</b>
Low Voltage Divider. For use in PVC box RF400, when JLOAD® Multimedia Outlet is used.		Gray	<b>RF408</b>



**RF406ALU**



**RF409BR**



**RF408**

## Adjustable Non-Metallic Concrete Floor Box Stand

Description	Color	Catalog Number
PVC floor box stand, adjusts up to 4 inches.	White	<b>PFBSTAND</b>



## JLOAD® Multimedia Outlet - See page Z-27 for Features

Description	Color	Tamper-Resistant	Tamper-Resistant
JLOAD® Multimedia Outlet. Specifically designed to provide power, Cat. 5e and coaxial in a single gang box. Requires Low Voltage Divider RF408 when used in PVC Box RF400. Includes decorator frame, one Cat. 5e, one F-connector and one power receptacle 125V with voltage dividers*.	Black Gray Ivory Light Almond White	<b>RJ650BKTR</b> <b>RJ650GYTR</b> <b>RJ650ITR</b> <b>RJ650LATR</b> <b>RJ650WTR</b>	<b>RJ620BKTR</b> <b>RJ620GYTR</b> <b>RJ620ITR</b> <b>RJ620LATR</b> <b>RJ620WTR</b>
JLOAD® Multimedia Outlet Includes decorator frame with two open ports for custom configuration and one power receptacle 125V with voltage dividers*.	Black Gray Ivory Light Almond White	<b>RJ65BKTR</b> <b>RJ65GYTR</b> <b>RJ65ITR</b> <b>RJ65LATR</b> <b>RJ65WTR</b>	<b>RJ62BKTR</b> <b>RJ62GYTR</b> <b>RJ62ITR</b> <b>RJ62LATR</b> <b>RJ62WTR</b>

Note: \*Dividers provided for use with the RJ600, RF515 series and RU200 series boxes. RF408 required for use with the RF400 series floor boxes.  
See page Z-10 for snap fit inserts.  
See pages Z-21 to Z-26 for floor boxes and under cabinet power distribution options.  
See page Tech-10 for Tamper-Resistant description.



**PFBSTAND**



**RJ650BKTR**

## Floor Boxes for Wood Floors

Hubbell Wood Floor Boxes allow for the placement of electrical power or a combination of power and voice/data devices. Specifically designed for use with structural wood floors. The boxes are height adjustable (up to ¾ inch) for optimal alignment and fit.

### Features

- Available surface mount or flush fit
- Pre-assembled flange and cover for fast installation
- Removable neoprene gaskets allow for independent use of either side of the receptacle with the cover closed
- Low voltage divider optional provides for power and voice/data in a compact space
- Height accessible adjustments after the box is mounted
- Back and side knockouts for proper wiring access
- Recessed receptacle minimizes plug protrusion; allowing furniture to be located over the plug
- Top screw fastening and side joist mounting provided



**RF509BR, RJ650BKTR,  
RF500 with Divider**

*Note: Template cutout provided with instructions for proper installation.*

### The Right Choice for that Perfect Finishing Touch!



*Note: Not all configurations are available in all colors. See below for details.*



### Floor Boxes for Structural Wood Floors

Description	Material	Finish	Catalog No.	Material	Finish	Catalog No.
Decorator duplex receptacle floor box kit; includes steel box, flange and hinged door cover assembly with 15A 125V tamper-resistant duplex receptacle; designed for installation in wood floors; mounts to sub-floor or joists.	Solid Brass	Clear Lacquer	<b>RF515BR</b>	Aluminum	Brass Plated	<b>RF515BP</b>
	Aluminum	Stainless Paint	<b>RF515SS</b>	Aluminum	Chrome Plated	<b>RF515CH</b>
	Aluminum	Almond Paint	<b>RF515AL</b>	Aluminum	Copper Plated	<b>RF515CU</b>
	Aluminum	Black Paint	<b>RF515BK</b>	Aluminum	Nickel Plated	<b>RF515NI</b>
	Aluminum	Chestnut Brown Paint	<b>RF515BN</b>			
Flange and hinged door cover assembly; includes tamper-resistant duplex receptacle; neoprene gaskets; for use with steel box RF500.	Solid Brass	Clear Lacquer	<b>RF506BR</b>	Aluminum	Brass Plated	<b>RF506BP</b>
	Aluminum	Stainless Paint	<b>RF506SS</b>	Aluminum	Chrome Plated	<b>RF506CH</b>
	Aluminum	Almond Paint	<b>RF506AL</b>	Aluminum	Copper Plated	<b>RF506CU</b>
	Aluminum	Black Paint	<b>RF506BK</b>	Aluminum	Nickel Plated	<b>RF506NI</b>
	Aluminum	Chestnut Brown Paint	<b>RF506BN</b>			
Flush fit cover for hardwood and tile floors (similar to above).	Solid Brass	Clear Lacquer	<b>RF509BR</b>			
Adjustable floor box; 3 inch deep; three (3) ½ inch knockouts: one on bottom; one on each side; non-metallic sheathed cable clamps on each side.				Steel	—	<b>RF500</b>
Hinged Door Cover Only Replacement door for RF515, RF509 and RF506 series.	Solid Brass	Solid Brass	<b>RF507BR</b>	Aluminum	Brass Plated	<b>RF507BP</b>
	Aluminum	Stainless Finish	<b>RF507SS</b>	Aluminum	Chrome Plated	<b>RF507CH</b>
	Aluminum	Almond	<b>RF507AL</b>	Aluminum	Copper Plated	<b>RF507CU</b>
	Aluminum	Black	<b>RF507BK</b>	Aluminum	Nickel Plated	<b>RF507NI</b>
	Aluminum	Chestnut Brown Paint	<b>RF507BN</b>			

## Floor Boxes for Wood Floors

### Features

Duplex floor receptacles provide ample connections to service lighting, entertainment equipment and computers for family rooms and offices. Single receptacle configurations available for minimum requirements.

- Low profile, solid brass flange and cover
- Cut out template provided to assure proper sub-flooring preparation
- Line and low voltage options
- 2½ inch hole, ample wiring room
- For use with single or feed through service

### Drop-In Floor Box

Drop-In Floor Boxes are perfect for quick and easy installation of power or low voltage. Simply cut a hole between the floor and joists and drop through. The flange lip holds it in place.



RF151R



### Floor Boxes for Wood Floors

Description	Material	Catalog Number	Catalog Number
Drop In Floor Box Mounts in 2½ inch hole opening. Includes solid brass cover, single tamper-resistant receptacle, optional device mounts for two (2) voice/data video ports. Suitable for feed through circuitry. Impact resistant box.	Solid Brass	<b>RF151R</b>	<b>RF201R</b>
Duplex Receptacle Floor Box Rated Includes steel box, duplex TR receptacle and cover.	Solid Brass	<b>RF6500BR</b>	—
Single Receptacle Floor Box Rated Includes steel box, single receptacle and cover.	Solid Brass	<b>RF151TR</b>	—
Single Receptacle Display Rated Receptacle and cover only, excludes box.	Solid Brass	<b>RF151DTR</b>	—

Note: See page Tech-10 for Tamper-Resistant description.





RF151R





RF6500BR

### Dimensions

#### Wood Floor Boxes



#### Drop-In Floor Box



RF151TR



RF151DTR

Dimensions in Inches (mm)



## Features and Benefits

### Countertop Receptacles

Hubbell Pop-Up Receptacles for countertops provide a power source ideal for kitchen and bath counters and islands. Hubbell is the first to market a countertop receptacle that is UL Listed. It allows compliance with NEC® 406.5(E) [countertops], 406.5(F) [work surfaces], and 406.5(H) [seating areas]. Pop-Up Receptacles are tested and water resistant to a half gallon spill. The receptacles feature Hubbell's patent pending silicone gaskets and patented cam action tamper-resistant technology. The compact design minimizes space required on the countertop as well as underneath in the cabinet area.



## Because Spills Happen



### Hubbell Countertop Receptacles are Spill Test Compliant

Hubbell Countertop Receptacles are the first pop-up receptacles UL listed for countertop applications and permanent installations.

#### UL 498 Section 146

Built and listed to be water resistant to a half gallon of liquid spilled on the device.



#### Housing Design

- Features two water and tamper-resistant receptacles
- Surface or flush mount options
- Self sealing silicone gaskets at the receptacle face
- Compact design



#### Installation

- Easy installation - simply drop it in and tighten
- Permanent installation ready (suitable for MC cable or non-metallic sheath cable)



#### Safety

- Self sealing silicone gaskets at the receptacle face
- Easy push down to pop-up function is rated for a minimum of 10,000 cycles (OPEN/CLOSE)



#### Covers

- Seven different finishes available

### Mounting Installation

Surface  
Flange with chamfer



Flush  
Flange without chamfer



NEC® is a registered trademark of the National Fire Protection Association (NFPA).



## 15 Amp Countertop Receptacles



Description	Finish	Color/Material	Surface Mount	Flush Mount
15A 125V Tamper-Resistant Pop-Up Kitchen Counter Receptacle, Rated for 20A circuits	Brushed	Aluminum	<b>RCT200ALU</b>	<b>RCT201ALU</b>
		Brass	<b>RCT200BR</b>	<b>RCT201BR</b>
		Nickel	<b>RCT200NI</b>	<b>RCT201NI</b>
	Polished	Chrome	<b>RCT200CH</b>	<b>RCT201CH</b>
	Powder Coated	Bronze Matte	<b>RCT200BZE</b>	<b>RCT201BZE</b>
		Black Matte	<b>RCT200BK</b>	<b>RCT201BK</b>
		White Matte	<b>RCT200W</b>	<b>RCT201W</b>



## 20 Amp Countertop Receptacles



Description	Finish	Color/Material	Surface Mount	Flush Mount
20A 125V Tamper-Resistant Pop-Up Kitchen Counter Receptacle.	Brushed	Aluminum	<b>RCT220ALU</b>	<b>RCT221ALU</b>
		Brass	<b>RCT220BR</b>	<b>RCT221BR</b>
		Nickel	<b>RCT220NI</b>	<b>RCT221NI</b>
	Polished	Chrome	<b>RCT220CH</b>	<b>RCT221CH</b>
	Powder Coated	Bronze Matte	<b>RCT220BZE</b>	<b>RCT221BZE</b>
		Black Matte	<b>RCT220BK</b>	<b>RCT221BK</b>
		White Matte	<b>RCT220W</b>	<b>RCT221W</b>



## Specifications


### Performance

Configuration	15/20 amp 125 volt, tamper-resistant receptacle
Circuit Rating	20 amp non-feed through
Listings	cULus Listed to UL498, Section 145 Mechanical Load Test, 146 Spill Test
Dielectric Voltage	Withstands 2,000V minimum
Terminal Accommodation	#14-#12 AWG copper stranded or solid conductor only
Terminal Identification	Terminals identified in accordance with UL 498 and CSA
Flammability	UL 94V-2
Operating Temperature	Maximum continuous 75°C, minimum -40°C (w/o impact)



### Materials

Cover and Flange	Die cast aluminum
Main Body	Engineered thermoplastic PBT
Wiring Chamber	Die cast aluminum
Water Seals	Elastomers and silicon

## Dimensions

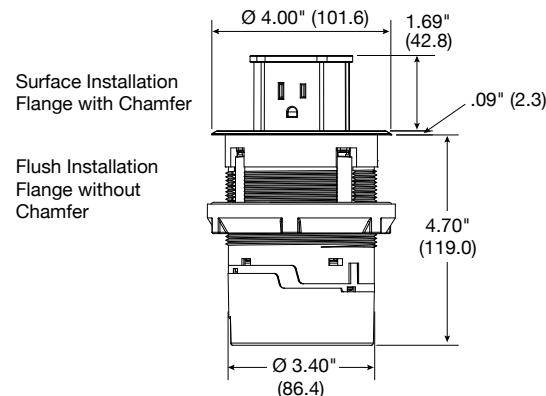

Accepts non-metallic sheathed cable and/or metal conduit (by using wire clamp or ½" KO)

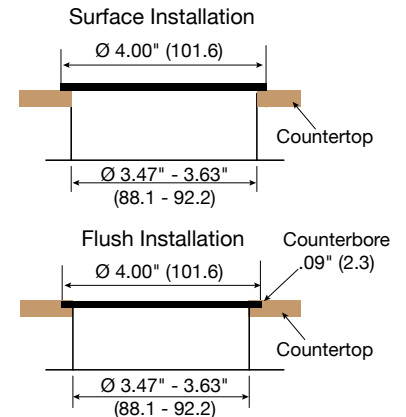

Note: Recommended to be fed by a GFCI circuit, up to 20 Amp Service.

Dimensions in Inches (mm)

## Under Cabinet/Counter Power Distribution

### Features

These boxes comply with the NEC® for kitchen receptacles, with placement not more than 20 inches above the counter surface. They can also be placed under counter islands, not lower than 15 inches from the surface.

- Available with nylon or metal cover
- Custom configurable, accepts any decorator style device
- Mounting hardware included
- UL Listed and CSA Certified under cabinet boxes



### Under Cabinet/Counter Power Distribution

Description	Material	Catalog Number
Slim Box	Stainless Steel	<b>RU100SS</b>
	White Metal	<b>RU100W</b>
	White Nylon	<b>RU170W*</b>
GFCI Fit Box	Stainless Steel	<b>RU200SS</b>
	White Metal	<b>RU200W</b>
	White Nylon	<b>RU270W*</b>

Note: \*Steel box with nylon cover.




**RU100W**




**RU200SS**

### Dimensions


#### Slim Box

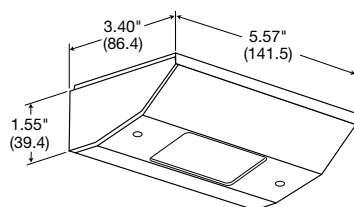


#### GFCI Fit Box



### Vertical Mount

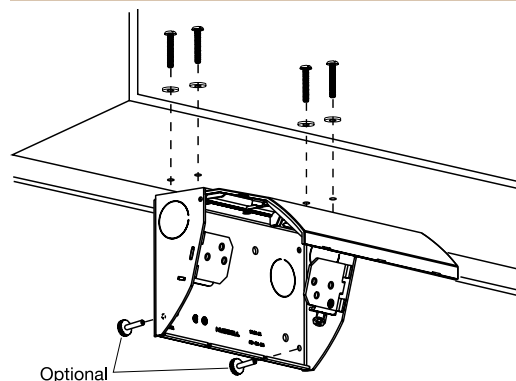

### Horizontal Mount

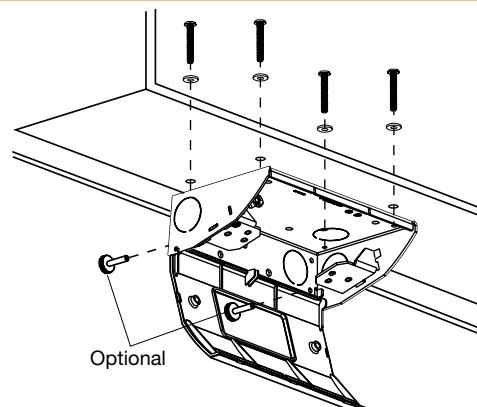

Dimensions in Inches (mm)

NEC® is a registered trademark of the National Fire Protection Association (NFPA).

## JLOAD® Multimedia Outlet

### Make the Most of a Perfect Location

Install receptacles and voice/data devices exactly where they are needed, in the smallest space possible.

### Features

- Accepts any snap fit jack configuration (see page Z-10)
- Isolates low voltage and power in the same box
- Custom box mounting
- Provides for data, telephone and coaxial
- Available in 15 or 20 Amp



Note: Requires unique box shown below.

**RJ620WTR**



### Special Use Products



Description	Color	Tamper-Resistant	Tamper-Resistant
JLOAD® Multimedia Outlet Specifically designed to provide power, Cat. 5e and coaxial in a single gang box. Requires JLOAD® Multimedia Box RJ600. Perfect for HDTV and computer use where a combination of power and data are needed. Includes decorator frame, one Cat. 5e, one F-connector and one power receptacle 125V with voltage dividers*.	Black Gray Ivory Light Almond White	<b>RJ650BKTR</b> <b>RJ650GYTR</b> <b>RJ650ITR</b> <b>RJ650LATR</b> <b>RJ650WTR</b>	<b>RJ620BKTR</b> <b>RJ620GYTR</b> <b>RJ620ITR</b> <b>RJ620LATR</b> <b>RJ620WTR</b>
JLOAD® Multimedia Outlet Includes decorator frame with two open ports for custom configuration and one power receptacle 125V with voltage dividers*.	Black Gray Ivory Light Almond White	<b>RJ65BKTR</b> <b>RJ65GYTR</b> <b>RJ65ITR</b> <b>RJ65LATR</b> <b>RJ65WTR</b>	<b>RJ62BKTR</b> <b>RJ62GYTR</b> <b>RJ62ITR</b> <b>RJ62LATR</b> <b>RJ62WTR</b>
JLOAD® Multimedia Box 3 inches deep with seven 1/2-inch knockouts, non-metallic sheathed cable clamps on each side. Screw in mounting to stud.	Steel	<b>RJ600</b>	<b>RJ600</b>


Note: \*Dividers provided for use with the RJ600, RF515 series and RU200 series boxes. RF408 required for use with the RF400 series floor boxes.

See page Z-10 for snap fit inserts.

See pages Z-21 to Z-26 for floor boxes and under cabinet power distribution options.

See page Tech-10 for Tamper-Resistant description.

### Dimensions

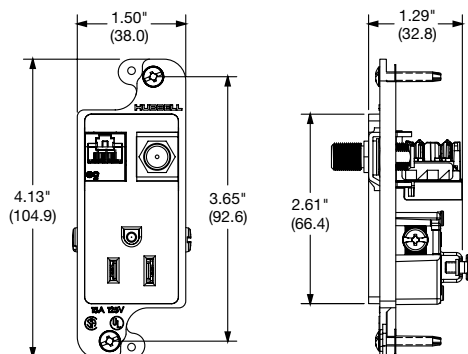

**RJ620WTR**



**RJ62WTR**



**Dividers**



**RJ600**

Dimensions in Inches (mm)



Decorator Switches - Technical Information

Features

- Smooth, quiet rocker action
- Self-grounding feature standard
- Ultrasonically welded cover and base provides maximum strength
- Push, back and side wiring
- Available colors: Black, Brown, Gray, Ivory, Light Almond and White



RSD115W

Specifications


Switches	Component	Material
Typical Specification — Catalog Number <b>RSD115xx</b>	Base and body	PVC
Description — Decorator series rocker switch	Rocker	Polycarbonate
Type — Single Pole	Terminals	Brass
Rating — 15A, 120-277V AC	Mounting strap	Galvanized steel
Certification — Listed to UL Standard 20	Contacts	Silver alloy
CSA Certified	Movable contact arm	Copper alloy
	Terminal screws	Steel

Note: **xx** = Color: **BK** (Black), **BL** (Brown), **GY** (Gray), **I** (Ivory), **LA** (Light Almond), and **W** (White).


Performance

Electrical	
Dielectric voltage	Withstands 1,500V AC minimum for 1 minute.
Max. working voltage	120V.
Overload	1.5 times rating.
Endurance	30,000 cycles minimum.
Mechanical	
Terminal accommodation	Back and side wire: #14 AWG min. - #12 AWG max. solid and stranded copper wire only; push wire: #14 AWG solid copper wire only.
Environmental	
Flammability	UL V0.
Operating temperatures	Maximum continuous 60°C; minimum -20°C (without impact).

Dimensions

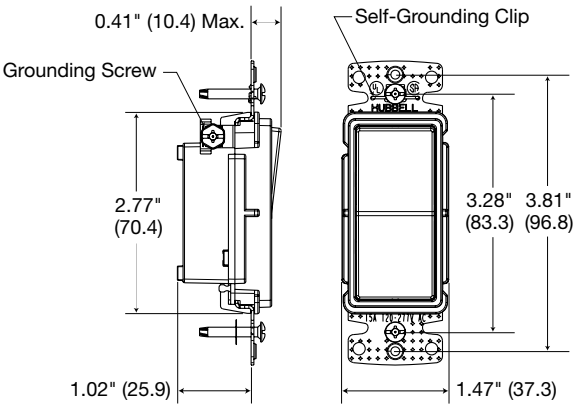

Single Pole Decorator Switch

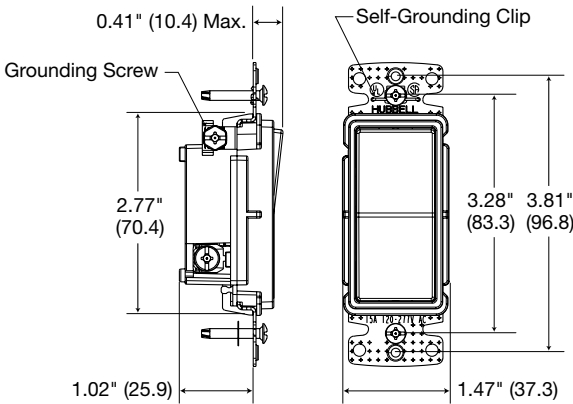

Three Way Decorator Switch

Dimensions in Inches (mm)