



APM Power Meter

For single-phase, split-phase & 3-phase mains networks

Advanced Panel Meter (APM)

Programmable dynamic backlight color



Warning flash

1% Accuracy

Combined digital and bar graph display



Ten user configurable alarms




Programmable scale
Measure **single-, split- and 3-phase**



2 Digital Outputs
1 Analog Output



USB port for custom user settings
via the **free easy-to-use software**

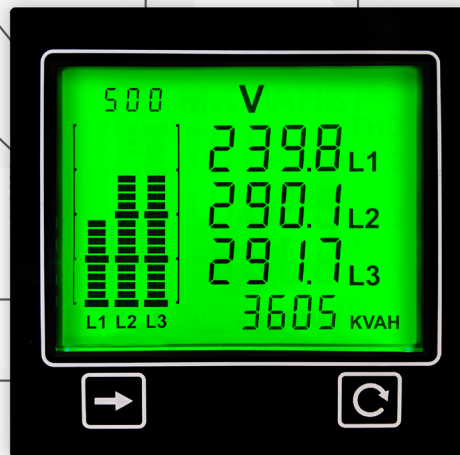

Front panel navigation buttons

Instantaneous:

- Voltage (L-L and L-N)
- Current (L-L and L-N)
- Reactive Power (VAR)
- Active Power (W)
- Apparent Power (VA)
- Frequency (Hz)
- Power Factor (PF)
- THD Voltage & Current
- % Max Load
- Alarm Status (available on Modbus communication)
- Phase Angle (available on Modbus communication)
- Total Energy (kWh or kVAh)

Networks:

- Single phase, 2-wire
- Single phase, 3-wire (split-phase)
- 3-phase, 3-wire
- 3-phase, 4-wire



Modbus®
RTU Connectivity

Less than 75mm deep



Key Features

- For single-, split- and 3-phase applications.
- Measures Active (W), Reactive (VAR) and Apparent (VA) power.
- Displays electrical parameters on large, backlit LCD display.
- Features two independent opto-isolated digital outputs plus one analog 4-20mA output.
- Includes MODBUS® RTU communication as standard.
- Provides clear indication of electrical circuit performance.
- User-programmable scale and custom alarm messages display critical parameters and immediately alerts operators when a parameter is out of range.
- Programmable Current Transformer (CT) and Potential Transformer (PT) ratios.

Go to www.trumeter.com/apm for further information

Specifications

NETWORKS

MEASUREMENT

Frequency

45 - 65 Hz

Voltage measurement range

L-L 0 - 600VAC

L-N 10 - 300VAC

Programmable PT range

1:1 to 1000:1

Current measurement range

0 - 5A

Programmable CT range

1:1 to 1000:1

Accuracy

1% (THD 5%) of full scale

ENVIRONMENTAL

Temperature - operating

-10 to +50°C

Temperature - storage

-40 to +70°C

IP rating (from the front)

IP65, NEMA type 4 and NEMA type 12

POWER SUPPLY

Input

100 - 277 VAC

Supply frequency

50-60Hz

Max power

2W

DISPLAY

Backlight colors

Red, Green, White

DIGITAL OUTPUTS

Number

2

Type

Opto-Isolated

Operating modes

Momentary

Max voltage

24VDC

Max sink current

15mA

ANALOG OUTPUTS

Number

1

Analog output

4-20mA

COMMUNICATION


CERTIFICATION

Modbus® RTU


CE, RoHS, UL

Wiring Diagrams and Isolation


Single phase 2-wire (1P2W)

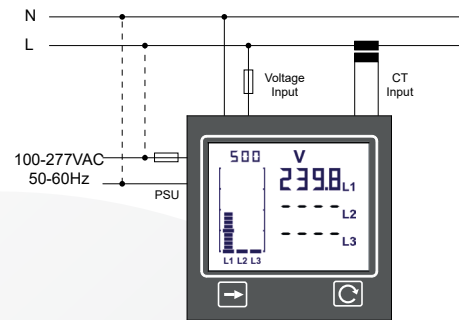


3 phase 3-wire (3P3W)

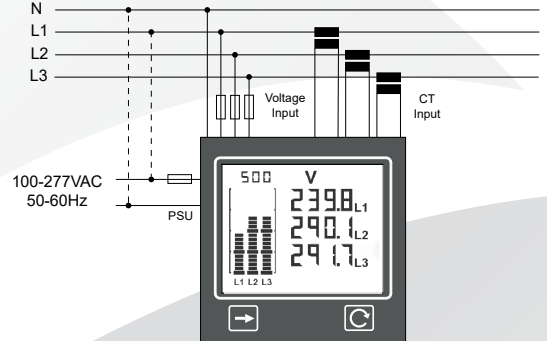

Control Outputs




Isolation

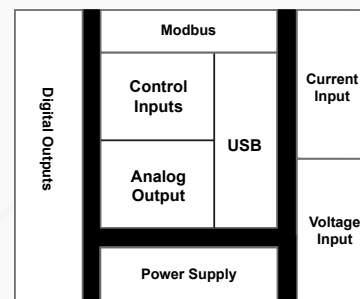

Isolation barriers:
Galvanic
Isolation Barrier

Dimensions:

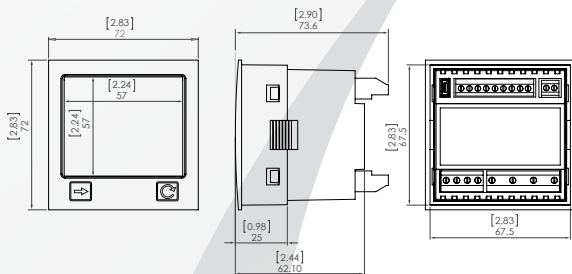

Part Numbers

APM-PWR-APO

APM Power Meter, Positive LCD

APM-PWR-ANO

APM Power Meter, Negative LCD (subject to MOQ and extended lead time)

APM-PWR-XXX

Custom Option



www.trumeter.com

Trumeter (The Americas)

6601 Lyons Rd, Suite H-7
Coconut Creek, Florida
FL 33073,
USA
Tel: +1 954 725 6699
Email: sales.usa@trumeter.com

Trumeter (Europe)

Pilot Mill
Alfred Street
Bury,
BL9 9EF
Tel: +44 161 674 0960
Email: sales.uk@trumeter.com

Innovative Design Technologies Sdn. Bhd

Lot 5881, Lorong Iks Bukit Minyak 1
Taman Perindustrian Iks, 14000 Bukit Tengah
Penang, Malaysia
Web: www.idtworld.com
Tel: + 604 5015700
Email: sales.my@idtworld.com