




NEMA Locking Devices.....	F-2
15 Amp Locking Devices.....	F-5
20 Amp Locking Devices.....	F-7
30 Amp Locking Devices.....	F-10
Non-NEMA Locking Devices	F-14
15 Amp Non-NEMA Locking Devices	F-14
20 Amp Non-NEMA Locking Devices	F-15
30 Amp Non-NEMA Locking Devices	F-16
50 Amp Non-NEMA Locking Devices	F-17
Plug & Connector Boots.....	F-20
Power Interrupting Devices.....	F-21
Wetguard® Watertight Locking Plugs, Connectors, Inlets, Outlets and Receptacles	F-22
Wetguard® FD Box System	F-27
Wetguard® Switch Cover, Plate and Replacement Covers	F-30
Dustguard®	F-31
Rhino-Hide® NEMA Wiring Devices	F-32
Midget Locking Devices	F-34
Combo Locking & Straight Blade Receptacles...	F-35
Integrated Devices.....	F-36

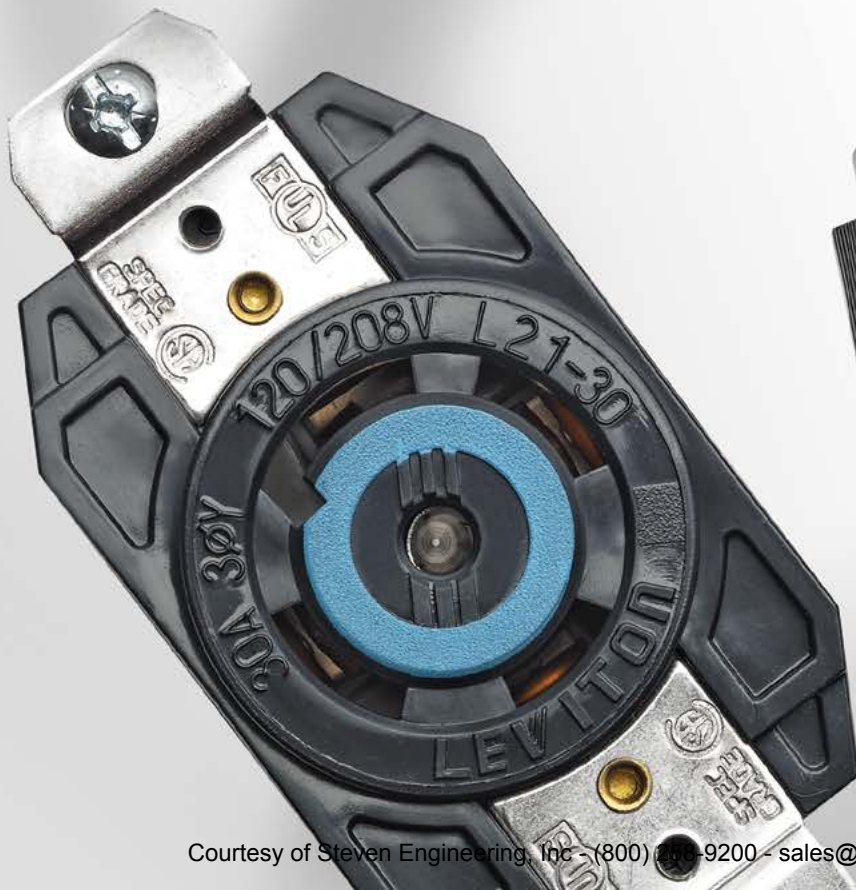


NEMA Locking Devices


Locking Devices for the Entire Spectrum of Industrial Applications

Leviton's industrial grade locking devices are built to provide unparalleled quality and superior performance in the most severe industrial settings. Leviton combines the best materials available with superior production standards to produce a broad selection of locking devices of unmatched flexibility and dependability.

Exposed Connector

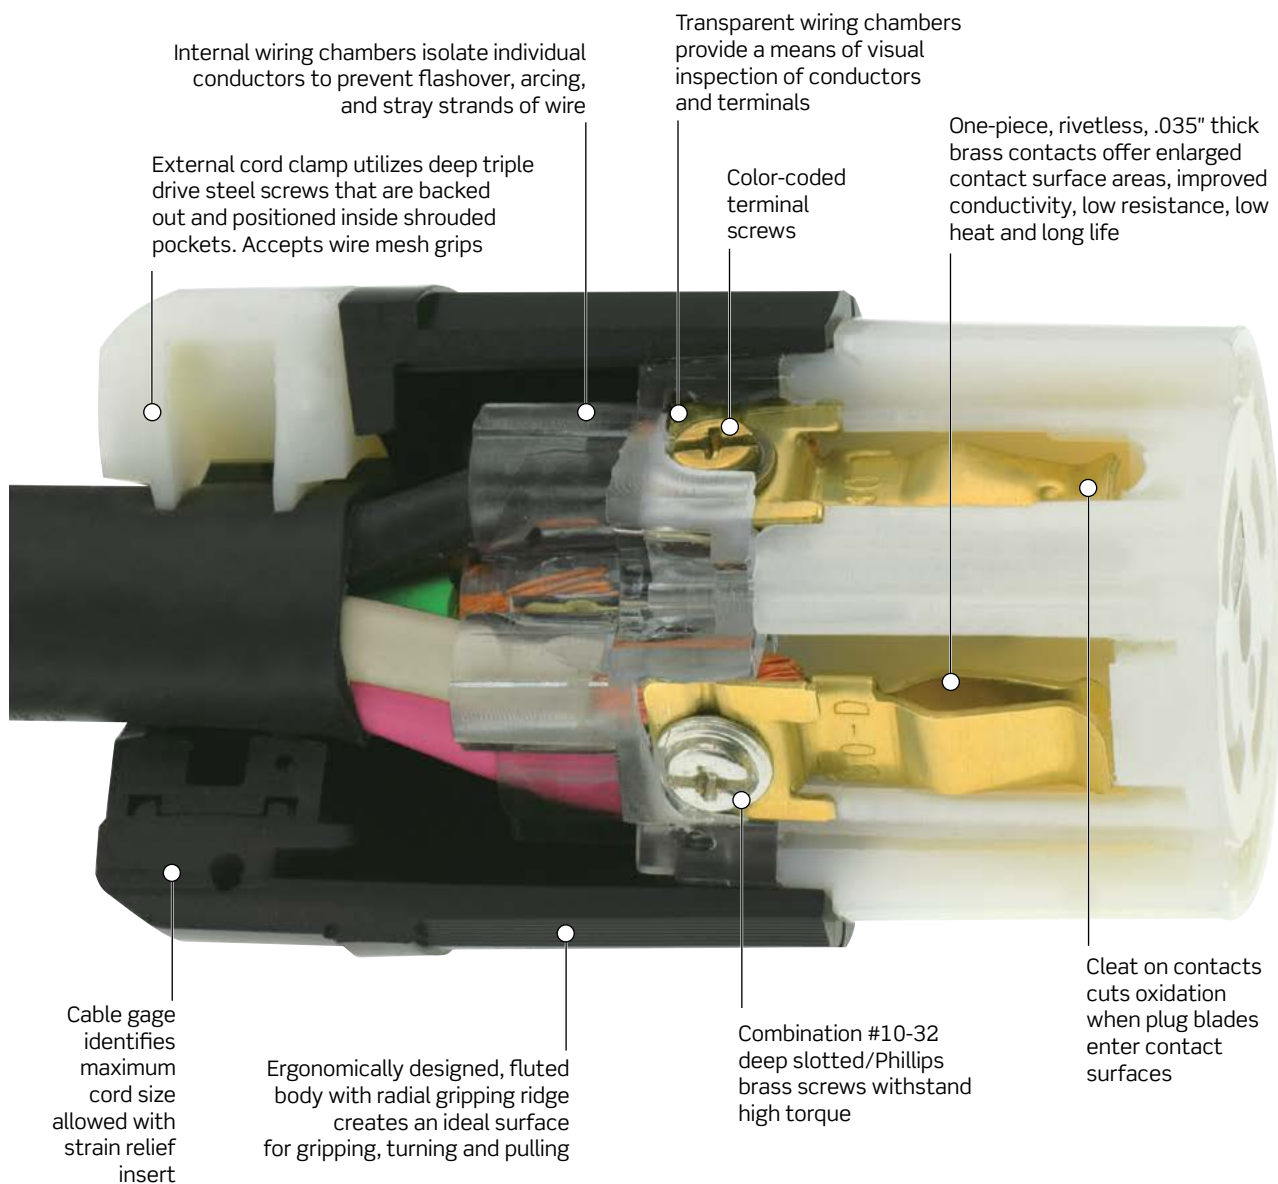

Exposed Plug

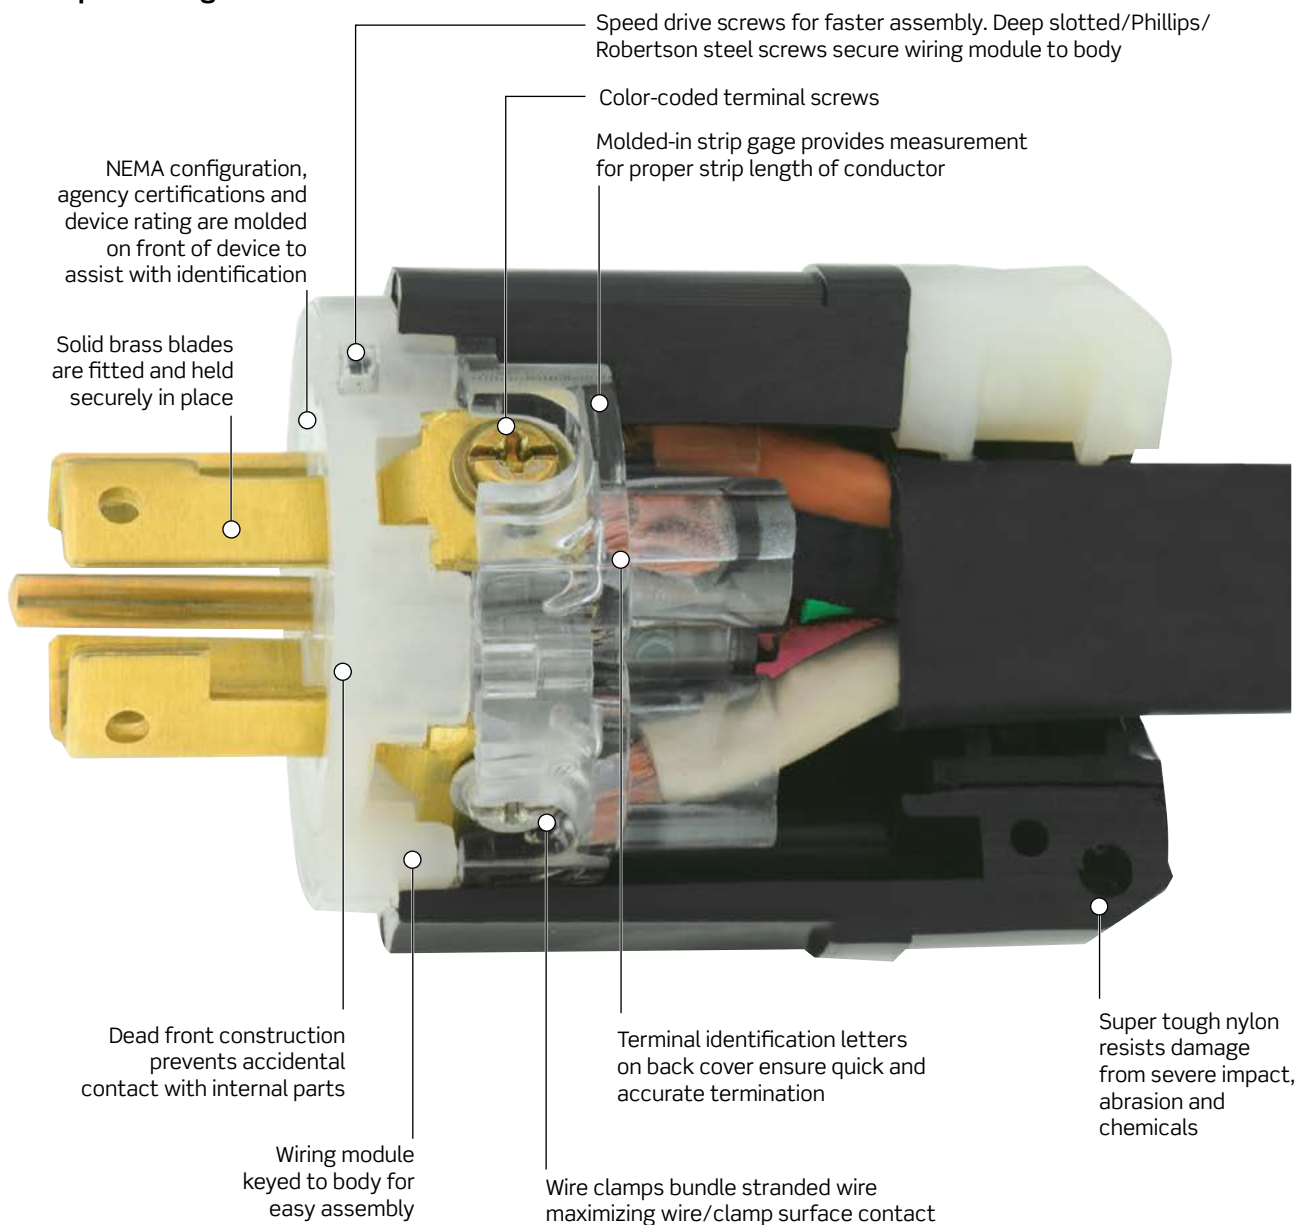

Shrouded pockets in cord clamp prevents slippage of screwdriver blade when tightening clamp screws.



Wire clamps move within individual chambers to provide positive clamp lock without cutting wire strands.



Captive terminal screws eliminate nuisance dropping and searching for missing screws.




Deep-funnelled, large wire wells guide conductors into termination position.

Locking Flush Receptacles

Engineered for maximum performance with a UL 94 V-O flammability rating.

V-O-MAX®

Sample
Receptacles

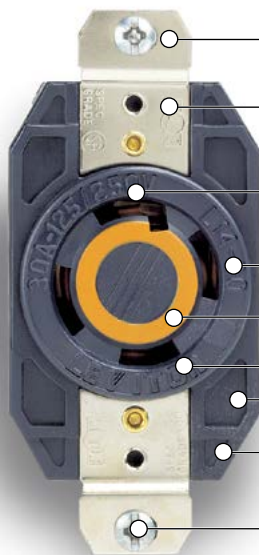

Extra thick .050" nickel-plated brass mounting strap

Stamped-in agency certifications

Molded-in amperage and voltage rating

NEMA configuration


Color-coded voltage rating

Manufacturer

Stability ribs

Uni-body face

Triple combination head mounting screws

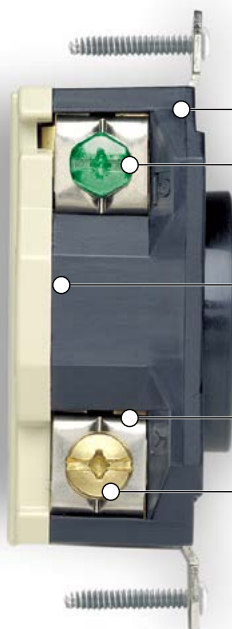

Molded-in terminal identification letters

Triple combination mounting screws, multi-terminated design, accepts #8 to #14 solid or stranded conductors








Seam between front cover and back cover is far from contact working area

External nickel plated clamps accept #8 to #14 solid or stranded conductors for back and side wiring

Oversized #10 brass Phillips/Robertson/straight slot drive terminal screw



V-O-MAX®
FLUSH RECEPTACLES-UL V-O RATING

Color-Coded Voltage Ratings

		
125V	250V	277VAC
		
125/250V	3ø250V	3ø480V
		
		600V

One-piece .040" thick brass, high-copper content contacts with nickel-plated clamp type terminals

Contacts deeply seated in thick walled faced



Mechanically-secured all-brass ground path

15A NEMA Locking Devices

Industrial Grade Black & White® Locking Devices

Features and Benefits

Locking Plugs and Connectors

- Super tough nylon body resists damage from severe impact, abrasion and chemicals
- Ergonomic, fluted body design with radial grip ridge is ideal for gripping, turning and pulling
- Cord clamp does not have to be disassembled from body for wiring — accepts wire mesh connection strain reliefs
- One-piece, rivetless .035" thick brass connector contacts and solid brass plug blades provide maximum conductivity and long service life
- Power Indication™ 15A Locking Plugs & Connectors equipped with green neon bulb rated at 30,000 hours (24/7 for 3.5 years)
- Power Indication™ 20A and 30A Locking Plugs & Connectors equipped with green LED rated at 100,000 hours (24/7 for 10 years)

Flanged Inlets and Outlets

- Rugged nylon flange fits flush and won't crack in high abuse applications
- Individual deep-funnelled chamfered wire wells guide each wire into rectangular chambers
- Wire clamps bundle stranded wire without cutting wire strands





Locking Flush Receptacles

- Rugged nylon body and cover for outstanding resistance to impacts and harsh chemicals
- Double-wipe phosphor-bronze power contacts

V-O-Max® Locking Flush Receptacles

- UL 94 V-O flammability rating, the best rating of any material used in Industrial locking flush receptacles available today
- Extra-thick .050" nickel-plated brass mounting strap for high-abuse applications
- Designed for maximum durability: One-piece .040" brass, high copper-content contacts with nickel plated clamp-type terminals
- Color-coded voltage rating on face for easy identification

15A-125V

2-Pole, 2-Wire Non-Grounding  			
Rating		15A-125V	
NEMA	 	L1-15P	L1-15R
Description	Cat. No.	Cat. No.	
Plugs and Connectors	Plug	Connector	
Black & White® Nylon Body	7545-C	7506-C	
Flanged Outlet	—	7526-C	
Receptacles			
Duplex Flush Receptacle	—	7540	
Single Flush Receptacle	—	7535	
Accessories			
Description	White	Black	
Black & White® Plugs & Connector Cord Clamp Inserts	INS23-W	INS23-B	



7545-C



INS23-W

15A NEMA Locking Devices

Black & White® | Industrial



Industrial Grade Black & White® Locking Devices

15A-125V, 250V and 277VAC

2-Pole, 3-Wire Grounding

Rating	15A-125V		15A-250V		15A-277VAC	
NEMA						
	L5-15P	L5-15R	L6-15P	L6-15R	L7-15P	L7-15R
Description	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.
Plugs and Connectors	Plug	Connector	Plug	Connector	Plug	Connector
Black & White® Nylon Body	4720-C	4729-C	4570-C	4579-C	4770-C	4779-C
All Black Nylon Body	4720-CB	4729-CB	—	4579-B	4770-B	4779-B
Yellow Nylon Body	4720-CY	4729-CY	4570-CY	4579-CY	4770-CY	4779-CY
Power Indication™	4720-PLC	4729-PLC	4570-PLC	4579-PLC	4770-PLC	4779-PLC
Black & White® Nylon Body						
Angle Locking	4720-CA	—	4570-CA	—	4770-CA	—
Black & White® Nylon Body						
Inlets and Outlets	Inlet	Outlet	Inlet	Outlet	Inlet	Outlet
Flanged Device	4716-C	4715-C	4586-C	4585-C	4786-C	4785-C
Receptacles						
Duplex Flush Receptacle, Self Grounding, Back and Side Wired	—	4700	—	4550	—	4750
Duplex Flush Receptacle, Isolated Ground, Back and Side Wired, 6" Green Ground Lead	—	4700-IG	—	4550-IG	—	4750-IG
Duplex Flush Receptacle w/2 Hot Feeds and 1 Neutral Return, Self Grounding, Back and Side Wired	—	4702-IIR	—	—	—	—
Duplex Flush Receptacle w/Split Feed — 2 Hot Feeds and 2 Neutral Returns, Self Grounding, Back and Side Wired	—	4703-IIR	—	—	—	—
Single Flush Receptacle	—	4710	—	4560	—	4760
Single Flush Receptacle, w/Short Strap	—	4710-SS	—	—	—	—
Single Flush Receptacle, Isolated Ground	—	4710-IG	—	4560-IG	—	4760-IG



4716-C



4560-IG



4700

Wallplates and Covers

302 Stainless Steel Single Receptacle

1.41" Dia. Opening



84004-40

302 Stainless Steel Duplex Receptacle



84003-40

Weatherproof Cover with Self Closing Lid for Flanged Inlets and Outlets*

1.72" Dia. Opening, IP64, NEMA 3R — Includes Screws and Pre-assembled Gasket



WP1-G



WP1-EB



WP1-YL

*For use with 15A Locking devices



Related Products

For more information on Weather-Resistant Boots for Locking Plugs and Connectors **see page F-20**. Find the right wallplate for any application. **See section R for Wallplates & Covers.**

20A NEMA Locking Devices

Industrial Grade Black & White® Locking Devices

20A-250V

2-Pole, 2-Wire Non-Grounding			
Rating	20A-250V		
NEMA	L2-20P	L2-20R	
Description	Cat. No.	Cat. No.	
Plugs and Connectors	Plug	Connector	
Black & White® Nylon Body	7102-C	7101-C	
Non-Polarized	7102-NP	—	
Receptacles			
Single Flush Receptacle	—	7210-B	



7102-C

20A-125V, 250V and 277VAC

2-Pole, 3-Wire Grounding							
Rating	20A-125V		20A-250V		20A-277VAC		
NEMA	L5-20P	L5-20R	L6-20P	L6-20R	L7-20P	L7-20R	
Description	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.	
Plugs and Connectors	Plug	Connector	Plug	Connector	Plug	Connector	
Black & White® Nylon Body	2311	2313	2321	2323	2331	2333	
All Black Nylon Body	2311-B	2313-B	—	2323-B	—	2333	
Yellow Nylon Body	2311-CY	2313-CY	2321-CY	2323-CY	—	—	
Power Indication™ Black & White® Nylon Body	2311-PLC	2313-PLC	2321-PLC	2323-PLC	2331-PLC	2333-PLC	
Power Indication™ All Black Nylon Body	2311-PLB	2313-PLB	—	—	—	—	
Inlets and Outlets	Inlet	Outlet	Inlet	Outlet	Inlet	Outlet	
Flanged Device	2315	2316	2325	2326	2335	2336	
Receptacles							
V-O-Max® Single Flush Receptacle	—	2310	—	2320	—	2330	
V-O-Max® Single Flush Receptacle, Isolated Ground	—	2310-IG	—	2320-IG	—	2330-IG	



2311



2313



2310









20A NEMA Locking Devices

Black & White® | Industrial



Industrial Grade Black & White® Locking Devices

20A-347VAC, 480VAC and 600VAC

2-Pole, 3-Wire Grounding  						
Rating	20A-347VAC		20A-480VAC		20A-600VAC	
NEMA						
	L24-20P	L24-20R	L8-20P	L8-20R	L9-20P	L9-20R
Description	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.
Plugs and Connectors	Plug	Connector	Plug	Connector	Plug	Connector
Black & White® Nylon Body	3721	3723	2341	2343	2351	2353
Inlets and Outlets	Inlet	Outlet	Inlet	Outlet	Inlet	Outlet
Flanged Device	—	3756	2345	2346	2355	2356
Receptacles						
V-O-Max® Single Flush Receptacle	—	3720	—	2340	—	2350
V-O-Max® Single Flush Receptacle, Isolated Ground	—	—	—	—	—	2350-IG











2341



2411









20A-125/250V, 3Ø 250V and 3Ø 480V

3-Pole, 3-Wire Non-Grounding  						
Rating	20A-125/250V		20A-3Ø 250V		20A-3Ø 480V	
NEMA						
	L10-20P	L10-20R	L11-20P	L11-20R	L12-20P	L12-20R
Description	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.
Plugs and Connectors	Plug	Connector	Plug	Connector	Plug	Connector
Black & White® Nylon Body	2361	2363	2371	2373	2381	2383
Inlets and Outlets	Inlet	Outlet	Inlet	Outlet	Inlet	Outlet
Flanged Device	2365	2366	2375	2376	2385	2386
Receptacles						
V-O-Max® Single Flush Receptacle	—	2360	—	2370	—	2380



2413

20A-125/250V, 3Ø 250V and 3Ø 480V

3-Pole, 4-Wire Grounding  						
Rating	20A-125/250V		20A-3Ø 250V		20A-3Ø 480V	
NEMA						
	L14-20P	L14-20R	L15-20P	L15-20R	L16-20P	L16-20R
Description	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.
Plugs and Connectors	Plug	Connector	Plug	Connector	Plug	Connector
Black & White® Nylon Body	2411	2413	2421	2423	2431	2433
Inlets and Outlets	Inlet	Outlet	Inlet	Outlet	Inlet	Outlet
Flanged Device	2415	2416	2425	2426	2435	2436
Receptacles						
V-O-Max® Single Flush Receptacle	—	2410	—	2420	—	2430
V-O-Max® Single Flush Receptacle, Isolated Ground	—	2410-IG	—	2420-IG	—	—



2433



2416

20A-3ØY 120/208V, 3ØY 277/480V and 3ØY 347/600V

4-Pole, 4-Wire Non-Grounding						
Rating	20A-3ØY 120/208V		20A-3ØY 277/480V		20A-3ØY 347/600V	
NEMA						
	L18-20P	L18-20R	L19-20P	L19-20R	L20-20P	L20-20R
Description	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.
Plugs and Connectors Black & White® Nylon Body	Plug 2441	Connector 2443	Plug 2451	Connector 2453	Plug 2461	Connector 2463
Inlets and Outlets Flanged Device	Inlet 2445	Outlet 2446	Inlet 2455	Outlet 2456	Inlet 2465	Outlet 2466
Receptacles V-O-Max® Single Flush Receptacle	—	2440	—	2450	—	2460



2451



2453



2516

20A-3Ø 120/208V, 3Ø 277/480V and 3Ø 347/600V

4-Pole, 5-Wire Grounding						
Rating	20A-3Ø 120/208V		20A-3Ø 277/480V		20A-3Ø 347/600V	
NEMA						
	L21-20P	L21-20R	L22-20P	L22-20R	L23-20P	L23-20R
Description	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.
Plugs and Connectors Black & White® Nylon Body	Plug 2511	Connector 2513	Plug 2521	Connector 2523	Plug 2531	Connector 2533
Inlets and Outlets Flanged Device	Inlet 2515	Outlet 2516	Inlet 2525	Outlet 2526	Inlet 2545	Outlet 2546
Receptacles V-O-Max® Single Flush Receptacle	—	2510	—	2520	—	2530
V-O-Max® Single Flush Receptacle, Isolated Ground	—	2510-IG	—	2520-IG	—	2530-IG

For NEMA L24-20 see page **F-8**

Wallplates and Covers

302 Stainless Steel Single Receptacle	Weatherproof Cover with Self Closing Lid*	Weatherproof Cover with Self Closing Lid*	Weather-Resistant Thermoplastic Cover***
1.60" Dia. Opening	2.25" Dia. Opening	1.60" Dia. Opening	1.60" Dia. Opening Self-Closing Lid
84020-40	**WP2-G (Gray) **WP2-EB (Black) **WP2-YL (Yellow)	***7420-G (Gray) ***7420-EB (Black) ***7420-YL (Yellow)	4980-GY (Gray)

*IP64 and NEMA 3R Rated.

Includes Pre-assembled Gasket and Screws.

**For use with 20 and 30A 3, 4 and 5 Wire Locking Flanged Inlets and Outlets.

***For use with 20A and 30A Single-Locking Receptacles



Related Products

For more information on Weather-Resistant Boots for Locking Plugs and Connectors **see page F-20**. Find the right wallplate for any application. **See section R for Wallplates & Covers.**

30A NEMA Locking Devices









Black & White® | Industrial



30A NEMA Locking Devices

Industrial Grade Black & White® Locking Devices

30A-125V, 250V and 277VAC

2-Pole, 3-Wire Grounding  						
Rating	30A-125V		30A-250V		30A-277VAC	
NEMA						
	L5-30P	L5-30R	L6-30P	L6-30R	L7-30P	L7-30R
Description	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.
Plugs and Connectors	Plug	Connector	Plug	Connector	Plug	Connector
Black & White®	2611	2613	2621	C2623	2631	2633
Nylon Body						
All Black	2611-B	2613-B	2621-B	C2623-B	—	—
Nylon Body						
Yellow Nylon Body	2611-CY	2613-CY	2621-CY	C2623-CY	—	—
Power Indication™	2611-PLC	2613-PLC	2621-PLC	C2623-PLC	2631-PLC	2633-PLC
Black & White®						
Nylon Body						
Power Indication™	2611-PLB	2613-PLB	—	—	—	—
All Black Nylon Body						
Inlets and Outlets	Inlet	Outlet	Inlet	Outlet	Inlet	Outlet
Flanged Device	2615	2616	2625F	2626F	2635	2636
Receptacles						
V-O-Max® Single Flush Receptacle	—	2610	—	2620	—	2630
V-O-Max® Single Flush Receptacle, Isolated Ground	—	2610-IG	—	2620-IG	—	2630-IG



2620



2621-B









2625F









2650

30A-480VAC and 600VAC

2-Pole, 3-Wire Grounding  				
Rating	30A-480VAC		30A-600VAC	
NEMA				
	L8-30P	L8-30R	L9-30P	L9-30R
Description	Cat. No.	Cat. No.	Cat. No.	Cat. No.
Plugs and Connectors	Plug	Connector	Plug	Connector
Black & White Nylon Body	2641	2643	C2651	C2653
Inlets and Outlets	Inlet	Outlet	Inlet	Outlet
Flanged Device	2645	2646	2655	2656
Receptacles				
V-O-MAX® Single Flush Receptacle	—	2640	—	2650

30A-125/250V and 3Ø 250V

3-Pole, 3-Wire Non-Grounding  					
Rating	30A-125/250V		30A-3Ø 250V		
NEMA					
	L10-30P	L10-30R	L11-30P	L11-30R	
Description	Cat. No.	Cat. No.	Cat. No.	Cat. No.	
Plugs and Connectors	Plug	Connector	Plug	Connector	
Black & White® Nylon Body	2661	2663	2671	2673	
Inlets and Outlets	Inlet	Outlet	Inlet	Outlet	
Flanged Device	2665	2666	2675	2676	
Receptacles					
V-O-Max® Single Flush Receptacle	—	2660	—	2670	









2671



2676

30A-3Ø 480VAC and 3Ø 600VAC

3-Pole, 3-Wire Non-Grounding  					
Rating	30A-3Ø 480VAC		30A-3Ø 600VAC		
NEMA					
	L12-30P	L12-30R	L13-30P	L13-30R	
Description	Cat. No.	Cat. No.	Cat. No.	Cat. No.	
Plugs and Connectors	Plug	Connector	Plug	Connector	
Black & White® Nylon Body	2681	2683	2691	2693	
Inlets and Outlets	Inlet	Outlet	Inlet	Outlet	
Flanged Device	2685	2686	2695	2696	
Receptacles					
V-O-Max® Single Flush Receptacle	—	2680	—	2690	

SPOTLIGHT

Industrial Devices

Our industrial wiring devices are constructed for the most extreme environments, designed to ensure safe and reliable electrical performance that will decrease downtime and provide protection from harsh conditions while keeping safety top of mind. For more information visit www.leviton.com/industrial.



30A NEMA Locking Devices

Black & White® | Industrial



Industrial Grade Black & White® Locking Blade Devices

30A-125/250V and 3Ø 250V

3-Pole, 4-Wire Grounding  					
Rating	30A-125/250V		30A-3Ø 250V		
NEMA					
	L14-30P	L14-30R	L15-30P	L15-30R	
Description	Cat. No.	Cat. No.	Cat. No.	Cat. No.	
Plugs and Connectors	Plug	Connector	Plug	Connector	
Black & White® Nylon Body	2711	2713	2721	2723	
All Black	2711-B	2713-B	2721-B	2723-B	
Yellow Nylon Body	—	2713-CY	—	—	
Inlets and Outlets	Inlet	Outlet	Inlet	Outlet	
Flanged Device	2715	2716	2725	2726	
Receptacles					
V-O-Max® Single Flush Receptacle	—	2710	—	2720	
V-O-Max® Single Flush Receptacle, Isolated Ground	—	2710-IG	—	2720-IG	
All Black Flush Mount Locking Receptacle	—	2710-B	—	—	








2711



2710

30A-3Ø 480VAC and 3Ø 600VAC

3-Pole, 4-Wire Grounding  					
Rating	30A-3Ø 480VAC		30A-3Ø 600VAC		
NEMA					
	L16-30P	L16-30R	L17-30P	L17-30R	
Description	Cat. No.	Cat. No.	Cat. No.	Cat. No.	
Plugs and Connectors	Plug	Connector	Plug	Connector	
Black & White® Nylon Body	2731	2733	2741	2743	
All Black	2731-B	2733-B	—	—	
Inlets and Outlets	Inlet	Outlet	Inlet	Outlet	
Flanged Device	2735	2736	2745	2746	
Receptacles					
V-O-Max® Single Flush Receptacle	—	2730	—	2740	
V-O-Max® Single Flush Receptacle, Isolated Ground	—	2730-IG	—	2740-IG	
All Black Flush Mount Locking Receptacle	—	2730-B	—	—	



2733



2736

30A-3ØY 120/208V, 3ØY 277/480V and 3ØY 347/600V

4-Pole, 4-Wire Non-Grounding						
Rating	30A-3ØY 120/208V		30A-3ØY 277/480V		30A-3ØY 347/600V	
NEMA						
	L18-30P	L18-30R	L19-30P	L19-30R	L20-30P	L20-30R
Description	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.
Plugs and Connectors Black & White® Nylon Body	Plug 2751	Connector 2753	Plug 2761	Connector 2763	Plug 2771	Connector 2773
Inlets and Outlets Flanged Device	Inlet 2755	Outlet 2756	Inlet 2765	Outlet 2766	Inlet 2775	Outlet 2776
Receptacles V-O-Max® Single Flush Receptacle	—	2750	—	2760	—	2770



2813



2810

30A-3ØY 120/208V, 3ØY 277/480V and 3ØY 347/600V

4-Pole, 5-Wire Grounding						
Rating	30A-3ØY 120/208V		30A-3ØY 277/480V		30A-3ØY 347/600V	
NEMA						
	L21-30P	L21-30R	L22-30P	L22-30R	L23-30P	L23-30R
Description	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.
Plugs and Connectors Black & White® Nylon Body	Plug 2811	Connector 2813	Plug 2821	Connector 2823	Plug 2831	Connector 2833
Inlets and Outlets Flanged Device	Inlet 2815	Outlet 2816	Inlet 2825	Outlet 2826	Inlet 2835	Outlet 2836
Receptacles V-O-Max® Single Flush Receptacle	—	2810	—	2820	—	2830
V-O-Max® Single Flush Receptacle, Isolated Ground	—	2810-IG	—	2820-IG	—	—

Wallplates and Covers

302 Stainless Steel Single Receptacle	Weatherproof Cover with Self Closing Lid*	Weatherproof Cover with Self Closing Lid*	Weather-Resistant Thermoplastic Cover***
1.60" Dia. Opening	2.25" Dia. Opening	1.60" Dia. Opening	1.60" Dia. Opening Self-Closing Lid
84020-40	**WP2-G (Gray) **WP2-EB (Black) **WP2-YL (Yellow)	***7420-G (Gray) ***7420-EB (Black) ***7420-YL (Yellow)	4980-GY (Gray)

*IP64 and NEMA 3R Rated.

Includes Pre-assembled Gasket and Screws.

**For use with 20 and 30A 3,4 and 5 Wire Locking Flanged Inlets and Outlets.

***For use with 20A and 30A Single-Locking Receptacles



Related Products

For more information on Weather-Resistant Boots for Locking Plugs and Connectors **see page F-20**. Find the right wallplate for any application. **See section R for Wallplates & Covers.**

Non-NEMA Locking Devices

Industrial Grade Black & White® Locking Devices

Features and Benefits

Locking Plugs and Connectors

- Super tough nylon body resists damage from severe impact, abrasion and chemicals
- Ergonomic, fluted body design with radial grip ridge is ideal for gripping, turning and pulling
- Cord clamp does not have to be disassembled from body for wiring — accepts all wire mesh connection strain reliefs
- One-piece, rivetless .035" thick brass connector contacts and solid brass plug blades provide maximum conductivity and long service life
- Power Indication™ 15A Locking Plugs & Connectors equipped with green neon bulb rated at 30,000 hours (24/7) for 3.5 years
- 50A devices, nylon housing provides excellent impact and chemical resistance

Flanged Inlets and Outlets

- Rugged nylon flange fits flush and won't crack in high abuse applications
- Individual deep-funneled chamfered wire wells guide each wire into rectangular chambers
- Wire clamps provide positive crimp lock without cutting wire strands
- 50A devices designed in a steel flanged cup for high abuse applications



Locking Flush Receptacles

- Rugged nylon body and cover for outstanding resistance to impact and harsh chemicals
- Double-wipe phosphor-bronze power contacts
- 50A devices have a metal shroud and nylon construction

15A Non-NEMA Locking Devices

Non-NEMA 15A-125V/10A-250V

3-Pole, 3-Wire Non-Grounding UL®

Rating	15A-125V/10A-250V	
Non-NEMA		
Description	Cat. No.	Cat. No.
Locking Plug	7567-C	—
Locking Connector	—	7565-C
Locking Flanged Inlet	7556*	—
Locking Flanged Outlet	—	7557
Single Flush Receptacle	—	7582*

*Add (-G) for grounding devices.

Non-NEMA grounding devices are no longer UL Listed — for replacement use only.

Note: Cord Clamp Range: .240"-.700" #18-#10 AWG



7567-C







Related Products

For more information on Weather-Resistant Boots for Locking Plugs and Connectors **see page F-20**. Find the right wallplate for any application. **See section R for Wallplates & Covers.**

20A Non-NEMA Locking Devices

Industrial Grade Black & White® Locking Devices

Non-NEMA 20A-125/250V

3-Pole, 3-Wire Non-Grounding  			
Rating		20A-125/250V	
Non-NEMA			
Description	Cat. No.	Cat. No.	
Locking Plug	9965-C*	—	
Locking Connector	—	7314-C*	
Locking Flanged Inlet	3325-C*	—	
Locking Flanged Outlet	—	3326-C	
Single Flush Receptacle, Black	—	7310-B*	

*Add (-G) for grounding devices



3525-C







9965-C







7411

Non-NEMA 20A-3ØY 120/208V

4-Pole, 4-Wire Non-Grounding  			
Rating		20A-3ØY 120/208V	
Non-NEMA			
Description	Cat. No.	Cat. No.	
Locking Plug	7411-C*	—	
Locking Connector	—	7413-C*	
Locking Flanged Inlet	7408-C*	—	
Locking Flanged Outlet	—	7409-C*	
Single Flush Receptacle, Black	—	7410-B*	

*Add (-G) for grounding devices

Non-NEMA 20A-125VAC/DC/10A-600VAC

4-Pole, 5-Wire Grounding  			
Rating		20A-125VAC/DC/10A-600VAC	
Non-NEMA			
Description	Cat. No.	Cat. No.	
Locking Plug, Black & White® Nylon Body	3521-C	—	
Locking Connector, Black & White® Nylon Body	—	3523-C	
Locking Flanged Inlet	3524-C	—	
Locking Flanged Outlet	—	3525-C	
Single Flush Receptacle	—	3520	

Wallplates and Covers

302 Stainless Steel Single Receptacle

1.60" Dia. Opening



84020-40

Weatherproof Cover with Self Closing Lid*

2.25" Dia. Opening



**WP2-G (Gray)
**WP2-EB (Black)
**WP2-YL (Yellow)

Weatherproof Cover with Self Closing Lid*


1.60" Dia. Opening



***7420-G (Gray)
***7420-EB (Black)
***7420-YL (Yellow)

Weather-Resistant Thermoplastic Cover***

1.60" Dia. Opening Self-Closing Lid



4980-GY (Gray)

*IP64 and NEMA 3R Rated.

Includes Pre-assembled Gasket and Screws.

**For use with 20 and 30A 3, 4 and 5 Wire Locking Flanged Inlets and Outlets.

***For use with 20A and 30A Single-Locking Receptacles





30A Non-NEMA Locking Devices

Black & White® | Industrial



30A Non-NEMA Locking Devices Industrial Grade Black & White® Locking Devices

Non-NEMA 30A-125/250V

3-Pole, 3-Wire Non-Grounding  			
Rating		30A-125/250V	
Non-NEMA			
Description	Cat. No.	Cat. No.	
Locking Plug	3331-C*	—	
Locking Connector	—	3333*	
Locking Flanged Inlet	3334-C	—	
Locking Flanged Outlet	—	3335-C	
Single Flush Receptacle	—	3330*	

*Add (-G) for grounding devices



3330



3333







3431-C



3431-C

Non-NEMA 30A-3ØY 120/208V

4-Pole, 4-Wire Non-Grounding  			
Rating		30A-3ØY 120/208V	
Non-NEMA			
Description	Cat. No.	Cat. No.	
Locking Plug	3431-C*	—	
Locking Connector	—	3433-C*	
Locking Flanged Inlet	3434-C	—	
Locking Flanged Outlet	—	3435-C	
Single Flush Receptacle	—	3430*	

*Add (-G) for grounding devices

SPOTLIGHT

Industrial Devices

For over 107 years, Leviton has been helping businesses power their equipment safely, reliably, and efficiently. The Leviton line of rugged industrial electrical products comprises devices rated up to 1100A at 1000V, and includes devices with watertight and dust-tight ratings. For more information on Industrial devices visit us online at www.leviton.com/industrial.



50A Non-NEMA Locking Devices


Industrial Grade Black & White® Locking Devices

Non-NEMA 50A-250VDC/600VAC

2-Pole, 3-Wire Grounding

Rating 50A-250VDC/600VAC

Non-NEMA



Description **Cat. No.** **Cat. No.**

Locking Plug	3763C	—
Locking Connector	—	3762C
Locking Flanged Inlet	3777	—
Single Locking Receptacle	—	3771




3763C

3-Pole, 4-Wire Grounding

Rating 50A-250VDC/600VAC

50A-250VDC/600VAC

Non-NEMA



Description **Cat. No.** **Cat. No.** **Cat. No.** **Cat. No.**

Locking Plug	7765C*	—	3765C	—
Locking Connector	—	7764C*	—	3764C
Locking Flanged Inlet	7958*	—	3775	—
Single Locking Receptacle	—	7379*	—	3769

*For replacement use in existing installation only



3765C

Wallplates and Covers

Weatherproof Cover with Self Closing Lid for 50A Receptacles

IP64 and NEMA 3R Rated—Includes Gasket and Screws



7788-CR Yellow Lexan®



7770 Gray Metal



WP3-G (Gray)
WP3-EB (Black)
WP3-YL (Yellow)



WP4-G (Gray)
WP4-EB (Black)
WP4-YL (Yellow)



Related Products

For more information on Weather-Resistant Boots for Locking Plugs and Connectors **see page F-20**. Find the right wallplate for any application. **See section R for Wallplates & Covers.**

50A Non-NEMA Locking Devices

Black & White® California Style | Industrial



Black & White® California Style CS Locking Devices







Features and Benefits

50A CS Locking Plugs and Connectors, Receptacles and Flanged Inlets

- Nylon housing for excellent impact resistance and secure gripping
- Color-coded wire entrance holes for simple, easy wiring
- Clamp-type wire terminals

Non-NEMA 50A-125V, 250V and 480V

2-Pole, 3-Wire Grounding

Rating	50A-125V		50A-250V		50A-480V	
Non-NEMA						
Description	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.
Locking Plug	CS6361C	—	CS8265C	—	CS8465C	—
Locking Connector	—	CS6360C	—	CS8264C	—	CS8464C
Locking Flanged Inlet	CS6377	—	CS8275	—	CS8475	—
Single Locking Receptacle	—	CS6370	—	CS8269	—	CS8469



CS6365C









CS6364C



CS8375

Non-NEMA 50A-125/250V, 3Ø 250V and 3Ø 480V

2-Pole, 3-Wire Grounding

Rating	50A-125/250V		50A-3Ø 250V		50A-3Ø 480V	
Non-NEMA						
Description	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.
Locking Plug	CS6365C	—	CS8365C	—	CS8165C	—
Locking Connector	—	CS6364C	—	CS8364C	—	CS8164C
Locking Flanged Inlet	CS6375	—	CS8375	—	CS8175	—
Single Locking Receptacle	—	CS6369	—	CS8369	—	CS8169

Wallplates and Covers

Weatherproof Cover with Self Closing Lid for 50A Receptacles

IP64 and NEMA 3R Rated—Includes Gasket and Screws



7788-CR Yellow Lexan®



7770 Gray Metal



WP3-G (Gray)
WP3-EB (Black)
WP3-YL (Yellow)







WP4-G (Gray)
WP4-EB (Black)
WP4-YL (Yellow)

50A Corrosion Resistant Devices

Features and Benefits

- Stainless steel shrouds on receptacles and plugs for corrosion resistance
- Stainless steel receptacle mounting screws





Non-NEMA 50A-125V

2-Pole, 3-Wire Grounding  		
Rating	50A-125V	
Non-NEMA	 SS1	 SS1
Description	Cat. No.	Cat. No.
Yellow Nylon Body and Cord Clamp	6361CR	6360CR
Locking Flanged Inlet	6377CR	—
Single Flush Receptacle	—	6370CR



6370CR
(Front
and Back)

Non-NEMA 50A-125/250V

3-Pole, 4-Wire Grounding  		
Rating	50A-125/250V	
Non-NEMA	 SS2	 SS2
Description	Cat. No.	Cat. No.
Yellow Nylon Body and Cord Clamp	6365CR	6364CR
Locking Flanged Inlet	6375CR	—
Single Flush Receptacle	—	6369CR

Note: Cord Clamp Range: .650"-1.125" #10-#4 AWG



6377CR



6361CR

Wallplates and Covers

Weatherproof Cover with Self Closing Lid for 50A Receptacles

IP64 and NEMA 3R Rated—Includes Gasket and Screws



7788-CR Yellow Lexan®



7770 Gray Metal



WP3-G (Gray)
WP3-EB (Black)
WP3-YL (Yellow)



WP4-G (Gray)
WP4-EB (Black)
WP4-YL (Yellow)



Related Products

For more information on Weather-Resistant Boots for Locking Plugs and Connectors **see page F-20**. Find the right wallplate for any application. **See section R for Wallplates & Covers.**

Locking Plug and Connector Boots

Thermoplastic Elastomer Construction

Features and Benefits

- Features triple seal action to protect locking plugs and connectors against dirt and moisture in harsh applications
- Plug and connector boots available in black and high-visibility yellow
- Fluted surface and grip-ring design provide a non-slip grip even in wet conditions
- Backed by a limited lifetime warranty

Boots for all 15A Industrial Locking Plugs and Connectors

Description	Cat. No.
Plug Boot, Black	6017-L
Plug Boot, High-Visibility Yellow	6017-LY
Connector Boot, Black	6018-L
Connector Boot, High-Visibility Yellow	6018-LY



6017-LY

Boots for 3-Wire 20A & 30A Industrial Locking Plugs and Connectors

Description	Cat. No.
3-Wire Plug Boot, Black	6031
3-Wire Plug Boot, High-Visibility Yellow	6031-Y
3-Wire Connector Boot, Black	6032
3-Wire Connector Boot, High-Visibility Yellow	6032-Y



6032



6033

Boots for 4 and 5-Wire 20A & 30A Industrial Locking Plugs and Connectors

Description	Cat. No.
4- & 5-Wire Plug Boot, Black	6033
4- & 5-Wire Plug Boot, High-Visibility Yellow	6033-Y
4- & 5-Wire Connector Boot, Black	6034
4- & 5-Wire Connector Boot, High-Visibility Yellow	6034-Y



6034

Boots and Covers for 50A Devices

Description	Cat. No.
Plug Boot, Black, IP55 Rated	7715-CR
Plug Boot, High-Visibility Yellow, IP55 Rated	7715-CRY
Connector Boot, Black, IP55 Rated	7717-CR
Connector Boot, High-Visibility Yellow, IP55 Rated	7717-CRY
Weather-Resistant Receptacle w/Flip Lid Cover, IP64 Rated, Yellow Lexan®	7788-CR
Cast Aluminum Gray Receptacle w/Flip Lid Cover, IP64 Rated	7770
Weatherproof Cover with Self Closing Lid, IP64 and NEMA 3R Rated, Panel Mount	WP3-G
	WP3-EB
	WP3-YL
Weatherproof Cover with Self Closing Lid, IP64 and NEMA 3R Rated, Device Mount	WP4-G
	WP4-EB
	WP4-YL



7715CR



7717CR

Locking Power Interrupting Devices

Non-NEMA 20A-125V

2-Pole, 3-Wire Grounding		
Rating	20A-125V	
Non-NEMA		
Description	Cat. No.	Cat. No.
Locking Plug HOSPITAL USE ONLY	23004-LHG*	—
Single Flush Receptacle with Thermoset Body	—	23000-LHG
Single Flush Receptacle	—	23030-L

*UL and CSA listed.
UL for "Hospital Use Only" applications in non-hazardous locations

3-Pole, 3-Wire Grounding		
Rating	20A-125V	
Non-NEMA		
Description	Cat. No.	Cat. No.
Locking Plug	23034-LA	—



23000-LHG



21415-LB

Non-NEMA 30A-600VAC/20A-250VDC

3-Pole, 4-Wire Grounding		
Rating	30A-600VAC/20A-250VDC	
Non-NEMA		
Description	Cat. No.	Cat. No.
Locking Plug	21415-LB	—
Locking Connector	—	21414-LB
Single Flush Receptacle	—	20403-L

wetguard® Watertight Devices

Leviton's Wetguard® Products are the Most Versatile and Well-Engineered Watertight Wiring Devices on the Market.

A complete collection of watertight devices for demanding industrial environments including connectors, inlets, outlets, covers and rugged FD boxes that allows mounting of single-gang devices in multi-gang configurations.

Watertight Electrical Connections

Wetguard® devices are designed for industrial applications where electrical connections are exposed to wet, dirty or dusty locations, both indoors and outside. They are UL and CSA listed and meet NEMA Type 4, 4X and 12 standards and are rated IP66, IP67 and IP69K* to IEC Standards. A patented multi-point system forms an impenetrable barrier against dirt and moisture providing the security you need in your electrical connections.

Corrosion-Resistant

Wetguard® devices feature corrosion-resistant electroless nickel-coated brass blades, contacts, terminal screws and wiring clamps, and stainless steel assembly screws — making them ideal for use in wet and corrosive environments.

Withstands Abuse in Harsh Environments

Wetguard® devices are resistant to water, acids, alkalis, and many automotive and industrial lubricants and solvents. The plug and connector husk is molded to a bondable nylon body, providing a device that withstands physical abuse as well. In addition, the patented compression nut strain relief system ensures the integrity of the electrical connection and watertight seal.

Wetguard® Group



*Plugs and connectors need caps attached in order to achieve IP69K rating





Wetguard® Watertight Locking Plugs, Connectors, Inlets, Outlets and Receptacles

Features and Benefits

- Corrosion-resistant electroless nickel-coated brass blades, contacts, terminal screws and wiring clamps, and stainless steel assembly screws make these devices ideal for use in wet and corrosive environments
- EPTR rubber part provides outstanding resistance to wet and damp environments, extreme temperature variations, water, acids, alkalis, grease, oils and many automotive and industrial lubricants and solvents
- Plug and connector husk is molded to a bondable nylon body, providing a device that withstands physical abuse
- Interlocking “tongue and groove” construction seals out water, moisture and dirt when plugs are mated with connectors
- Multi-point sealing system utilizes nut, strain relief washer and rubber bushing to form a watertight cord grip seal
- Non-magnetic stainless steel fast-threading assembly screws won't interfere with sensitive equipment
- Connector “hood” closure cap seals device when not in use
- Most devices also available in black. Check for availability
- Devices are UL and CSA listed and have enclosure ratings of NEMA 4, 4X, 12 and IEC IP66, IP67 when mated or with cover closed and plugs and connectors IP69K when caps are attached
- Backed by a lifetime warranty

Wetguard® Locking Plugs, Connectors, Inlets, Outlets and Receptacles

15A Wetguard® Locking Devices

Rating		15A-125V	15A-125V	15A-250V	15A-277V
Configuration		2P 2W	2P 3W	2P 3W	2P 3W
NEMA					
		L1-15	L5-15	L6-15	L7-15
Description	Color	Cat. No.	Cat. No.	Cat. No.	Cat. No.
Plug	Yellow	24W04	24W47*	24W49	24W34
Plug Cap		14W*	14W*	14W*	14W*
Connector		25W04	25W47*	25W49	25W34
Connector Cap		50W50*	50W50*	50W50*	50W50*
Single Outlet		95W04-S	95W47-S	95W49-S	95W34-S
Duplex Outlet		85W04-D	85W47-D	85W49-D	85W34-D
Single Inlet		64W04	64W47	64W49	64W34
Connector for Single Inlet		74W04-C	74W47-C	74W49-C	74W34-C
Single Receptacle		—	47CM-10	45CM-60	47CM-60
Receptacle Cover w/Gasket		—	60W03*	60W03*	60W03*
Replacement Interior for Locking Plug	—	—	24W47-IN	—	—
Replacement Interior for Locking Connector	—	—	25W47-IN	—	—

NEMA configuration diagrams represent plug blade configuration.

*Available in black. To order, add “-B” suffix to catalog number

Continued on next page



24W04



50W50

SPOTLIGHT

What makes Wetguard® exceptional?

Our complete collection of Wetguard® watertight wiring devices consists of plugs, connectors, inlets, outlets and FD boxes for use in demanding industrial locations. These devices are engineered to withstand abuse in indoor and outdoor wet and corrosive environments. For more information visit www.leviton.com/wetguard.





Wetguard® Watertight Devices

15/10A and 20A | Plugs, Connectors, Inlets, Outlets & Receptacles | **Industrial**



Continued from previous page

Wetguard® Locking Plugs, Connectors, Inlets, Outlets and Receptacles







15/10A and 20A Wetguard® Locking Devices				
Rating	15A-125V 10A-250V		15A-125V	
Configuration	3P 2W		2P 3W	
NEMA	 Non-NEMA		 L5-15	
Description	Color	Cat. No.		Cat. No.
Plug	Yellow	24W07		26W07
Plug Cap		14W*		14W*
Connector		25W07		27W07
Connector Cap		50W50*		50W50*
Single Outlet		95W07-S		97W07-S
Duplex Outlet		85W07-D		87W07-D
Single Inlet		64W07		66W07
Connector for Single Inlet		74W07-C		76W07-C
Single Receptacle		—		—
Receptacle Cover w/Gasket		—		—



24W07



85W07-D

20A and 20/10A Wetguard® Locking Devices							
Rating	20A-125V		20A-250V	20A-277V	20A-347V	20A-125/250V	20A-250V 10A-600V
Configuration	2P 3W		2P 3W	2P 3W	2P 3W	3P 3W	3P 3W
NEMA	 L5-20		 L6-20	 L7-20	 L24-20	 Non-NEMA	 Non-NEMA
Description	Color	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.
Plug	Yellow	26W47*	26W48*	26W49	22W07	26W08	26W08-G
Plug Cap		26W*	26W*	26W*	26W*	26W*	26W*
Connector		27W47*	27W48*	27W49	23W07	27W08	27W08-G
Connector Cap		50W52*	50W52*	50W52*	50W52*	50W52*	50W52*
Single Outlet		97W47-S	97W48-S	97W49-S	93W07-S	97W08-S	—
Duplex Outlet		—	—	—	—	—	—
Single Inlet		66W47	66W48	66W49	68W29	66W08	—
Connector for Single Inlet		76W47-C	76W48-C	76W49-C	78W29-C	76W08-C	—
Single Receptacle		23CM-10	23CM-20	23CM-30	—	7310-B	—
Receptacle Cover w/Gasket		60W04*	60W04*	60W04*	—	60W04*	—
Replacement Interior for Locking Plug	—	26W47-IN	—	—	—	—	—
Replacement Interior for Locking Connector	—	27W47-IN	—	—	—	—	—



26W47



27W47

NEMA configuration diagrams represent plug blade configuration.
*Available in black. To order, add "-B" suffix to catalog number

Continued on next page

Continued from previous page

Wetguard® Locking Plugs, Connectors, Inlets, Outlets and Receptacles

20A and 20/10A Wetguard® Locking Devices					
Rating		20A-125/250V	20A-3Ø 250V	20A-3Ø 480V	20A-3ØY 120/208V
Configuration		3P 4W	3P 4W	3P 4W	4P 4W
NEMA		 L14-20	 L15-20	 L16-20	 Non-NEMA
Description	Color	Cat. No.	Cat. No.	Cat. No.	Cat. No.
Plug	Yellow	26W74	26W75*	26W76*	26W09
Plug Cap		26W*	26W*	26W*	26W*
Connector		27W74	27W75*	27W76*	27W09
Connector Cap		50W52*	50W52*	50W52*	50W52*
Single Outlet		97W74-S	97W75-S	97W76-S	97W09-S
Duplex Outlet		—	—	—	—
Single Inlet		66W74	66W75	66W76	66W09
Connector for Single Inlet		76W74-C	76W75-C	76W76-C	76W09-C
Single Receptacle		24CM-10	24CM-20	24CM-30	7410-B
Receptacle Cover w/Gasket		60W04*	60W04*	60W04*	60W04*
Replacement Male Insert	—	26W74-IN	—	—	—
Replacement Interior for Locking Plug	—	—	—	26W76-IN	—
Replacement Female Insert	—	27W74-IN	—	—	—
Replacement Interior for Locking Connector	—	—	—	27W76-IN	—
Rating		20A-3ØY 120/208V	20A-3ØY 277/480V	20A-3ØY 347/600V	20A-250V 10A-600V
Configuration		4P 5W	4P 5W	4P 5W	4P 5W
NEMA		 L21-20	 L22-20	 L23-20	 Non-NEMA
Description	Color	Cat. No.	Cat. No.	Cat. No.	Cat. No.
Plug	Yellow	26W81*	26W82	26W83	26W10
Plug Cap		26W*	26W*	26W*	26W*
Connector		27W81*	27W82	27W83	27W10
Connector Cap		50W52*	50W52*	50W52*	50W52*
Single Outlet		97W81-S	97W82-S	97W83-S	97W10-S
Duplex Outlet		—	—	—	—
Single Inlet		66W81	66W82	66W83	66W10
Connector for Single Inlet		76W81-C	76W82-C	76W83-C	76W10-C
Single Receptacle		2510	2520	2530	—
Receptacle Cover w/Gasket		60W04*	60W04*	60W04*	60W04*

NEMA configuration diagrams represent plug blade configuration.
*Available in black. To order, add “-B” suffix to catalog number

Continued on next page



26W74



66W76



26W



27W81



Related Products

See section C, Straight Blade Devices for our line of Straight Blade watertight wiring devices.












Wetguard® Watertight Devices

30A | Plugs, Connectors, Inlets, Outlets & Receptacles | Industrial



Continued from previous page

Wetguard® Locking Plugs, Connectors, Inlets, Outlets and Receptacles

30A Wetguard® Locking Devices					
Rating	30A-125V		30A-250V		30A-125/250V
Configuration	2P 3W		2P 3W		3P 3W
NEMA					
	L5-30		L6-30		Non-NEMA
Description	Color	Cat. No.	Cat. No.	Cat. No.	Cat. No.
Plug	Yellow	28W47*	28W48*	28W49	28W08
Plug Cap		28W*	28W*	28W*	28W*
Connector		29W47*	29W48*	29W49	29W08
Connector Cap		50W54*	50W54*	50W54*	50W54*
Single Outlet		99W47-S	99W48-S	99W49-S	99W08-S
Single Inlet		68W47	68W48	68W49	68W08
Connector for Single Inlet		78W47-C	78W48-C	78W49-C	78W08-C
Single Receptacle		26CM-10	26CM-20	2630	3330
Receptacle Cover w/Gasket		60W05*	60W05*	60W05*	60W05*
Rating	30A-125/250V		30A-3Ø 250V	30A-3Ø 480V	30A-3ØY 600V
Configuration	3P 4W		3P 4W	3P 4W	3P 4W
NEMA					
	L14-30		L15-30	L16-30	L17-30
Description	Color	Cat. No.	Cat. No.	Cat. No.	Cat. No.
Plug	Yellow	28W74	28W75	29W76*	28W77
Plug Cap		28W*	28W*	28W*	28W*
Connector		29W74	29W75	29W76*	29W77
Connector Cap		50W54*	50W54*	50W54*	50W54*
Single Outlet		99W74-S	99W75-S	99W76-S	99W77-S
Single Inlet		68W74	68W75	68W76	68W77
Connector for Single Inlet		78W74-C	78W75-C	78W76-C	78W77-C
Single Receptacle		27CM-10	27CM-20	2730	2740
Receptacle Cover w/Gasket		60W05*	60W05*	60W05*	60W05*
Replacement Male Insert		—	28W74-IN	—	—
Replacement Interior for Locking Plug		—	—	28W75-IN	28W76-IN
Replacement Female Insert		—	29W74-IN	—	—
Replacement Interior for Locking Connector		—	—	29W75-IN	29W76-IN
		—	—	—	—
Rating	30A-3ØY 120/208V		30A-3ØY 120/208V	30A-3ØY 277/480V	30A-3ØY 347/600V
Configuration	4P 4W		4P 5W	4P 5W	4P 5W
NEMA					
	Non-NEMA		L21-30	L22-30	L23-30
Description	Color	Cat. No.	Cat. No.	Cat. No.	Cat. No.
Plug	Yellow	28W09	28W81	28W82	28W83
Plug Cap		28W*	28W*	28W*	28W*
Connector		29W09	29W81	29W82	29W83
Connector Cap		50W54*	50W54*	50W54*	50W54*
Single Outlet		99W09-S	99W81-S	99W82-S	99W83-S
Single Inlet		68W09	68W81	68W82	68W83
Connector for Single Inlet		78W09-C	78W81-C	78W82-C	78W83-C
Single Receptacle		3430	2810	2820	2830
Receptacle Cover w/Gasket		60W05*	60W05*	60W05*	60W05*



28W47



29W48



99W76



50W54


NEMA configuration diagrams represent plug blade configuration. *Available in black. To order, add "B" suffix to catalog number

Wetguard® FD Box System

Features and Benefits

- Compliant with UL and CSA standards
- Rated to NEMA 4, 4X, 12 and IEC IP66 when used with Leviton Wetguard® devices
- Available in one-, two- and three-gang configurations
- Constructed of PVC with unthreaded conduit with reducers and plugs for conduit openings

3-Gang FD Box FDBX3-Y (Exploded View)

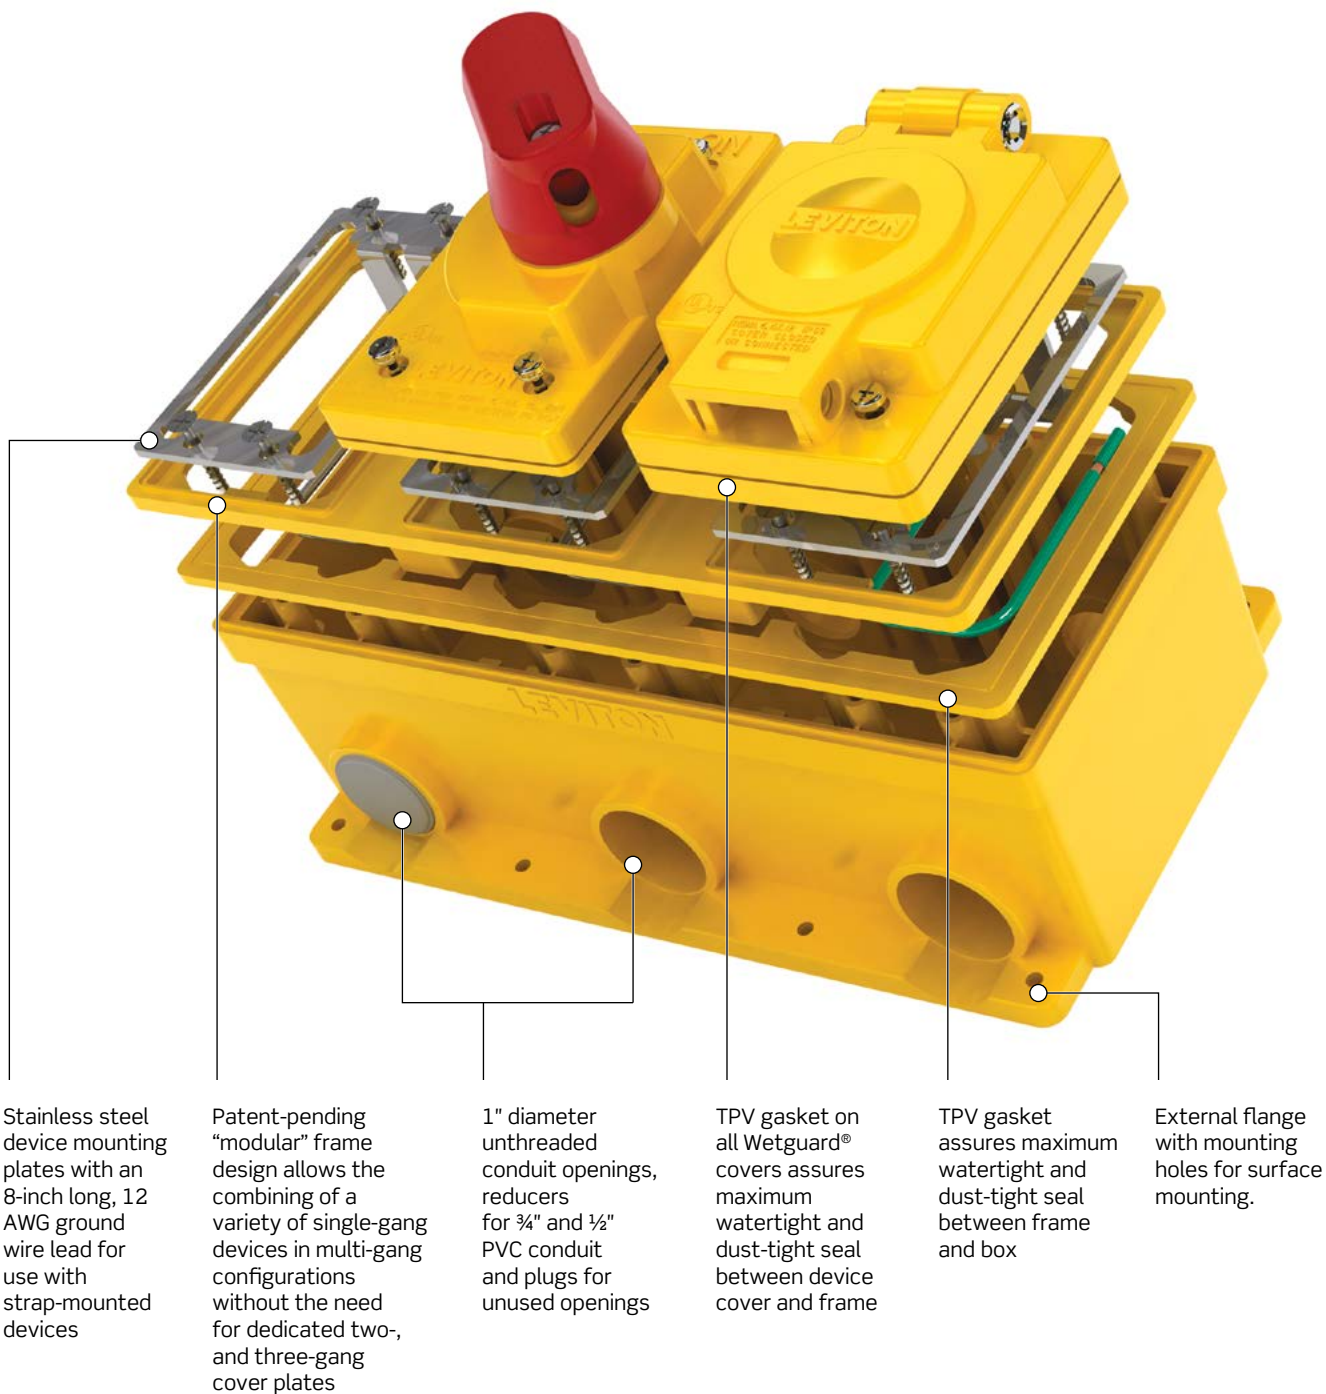

Continued on next page

Continued from previous page

FD Box System

FDBX1-GY


Boxes feature 1" diameter unthreaded conduit openings, and include reducers for 3/4" and 1/2" PVC conduit

Rigid PVC construction provides excellent resistance to impact, water and chemicals found in harsh industrial environments

Corrosion-resistant brass threaded inserts for mounting covers

Stainless steel assembly screws provide excellent corrosion resistance

Also included are plugs for unused openings

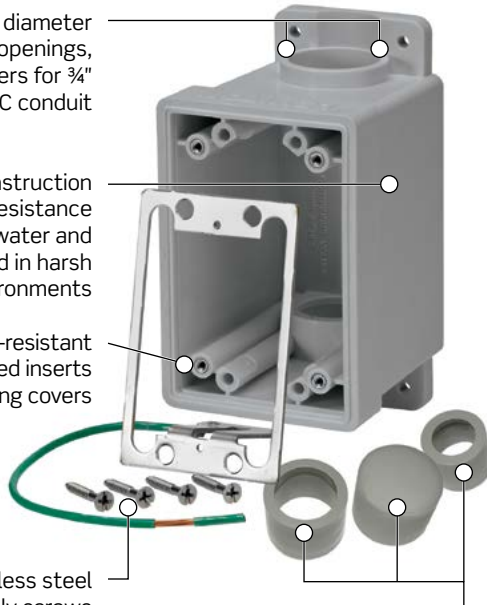

COVER-S

Impact and chemical resistant Valox® PBT cover and handle provide extended life in abusive environments

Integrated lockout handle meets OSHA safety regulations

Cover rated NEMA 4, 4X, 12 and IEC IP66

Stainless steel mounting and assembly screws provide excellent corrosion resistance; triple-drive head facilitates proper tightening

Valox® is a registered trademark of SABIC

FD Box System


Description	Box Volume	Conduit Openings	Cat. No. Yellow	Cat. No. Gray
Single-Gang FD Box with plugs and reducers	26.0 cu in/426 cu cm	2	FDBX1-Y	FDBX1-GY
Two-Gang FD Box with plugs and reducers	67.3 cu in/1103 cu cm	4	FDBX2-Y	FDBX2-GY
Three-Gang FD Box with plugs and reducers	109.1 cu in/1788 cu cm	6	FDBX3-Y	FDBX3-GY

All boxes are shipped with ground plate assembled to box.
Single-gang box image shows ground plate removed for clarity



Stainless Steel FD Box System

FDSS1 and FDSS2 with 99W83-S & COVER-S

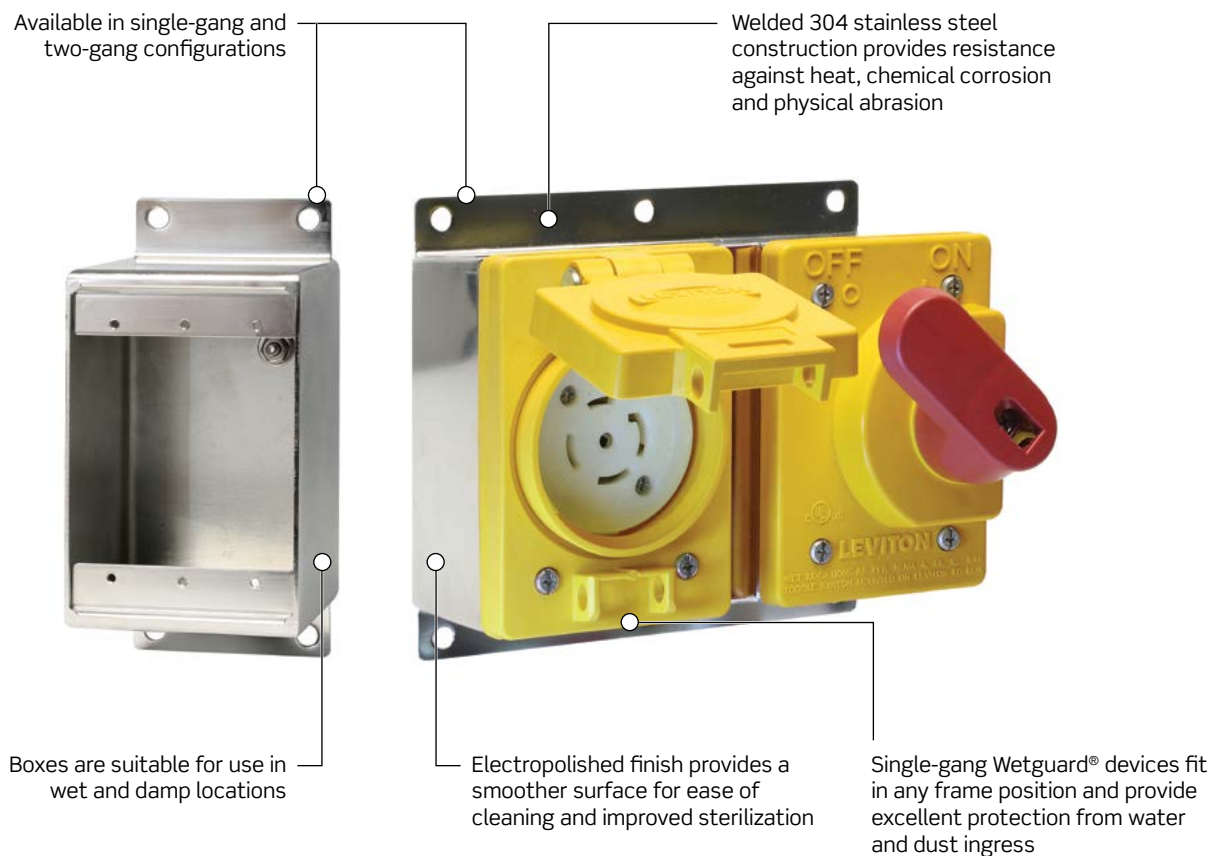

Stainless Steel FD Box System

Description	Box Volume	Cat. No.
Single-Gang Stainless Steel FD Box	37.2 cu in/610 cu cm	FDSS1
Two-Gang Stainless Steel FD Box	87.3 cu in/1431 cu cm	FDSS2
3/4" Stainless Steel Hub	—	SSHUB



FDSS1



FDSS2

Switch Cover, Plate and Replacement Covers

Switch Covers, Plate and Replacement Covers		
Cat. No.	Color	Description
COVER-S	Yellow	Single Gang Switch Cover and Gasket for any 15A-40A Toggle Switch, including Leviton
COVER-GS	Gray	Manual Motor Starters
WTCVD*	Yellow	Wetguard® Replacement Cover and Gasket for Wetguard® Duplex Outlets Only
WTCVS-15	Yellow	Wetguard® Replacement Cover and Gasket for 15A and 20A Straight and 15A Locking Single Inlets and Outlets
WTCVS-20	Yellow	Wetguard® Replacement Cover and Gasket for all 20A Locking Single Inlets and Outlets
WTCVS-30	Yellow	Wetguard® Replacement Cover and Gasket for all 30A Locking Single Inlets and Outlets
WP459	Yellow	Wetguard® Blank Plate and Gasket
60W03	Yellow	Wetguard® Cover and Gasket for 15A and 20A Straight Blade and 15A Locking Box Mount Single Flush Receptacles
60W04	Yellow	Wetguard® Cover and Gasket for 20A Locking Box Mount Single Flush Receptacles
60W05	Yellow	Wetguard® Cover and Gasket for 30A Locking Box Mount Single Flush Receptacles

*Not for use with standard duplex devices



COVER-GS



WTCVS-15



60W03



WP459



WTCVD

Severe Duty Dustguard®

Dustguard® plugs and connectors feature resistance to the damaging effects of dirt, dust, metal filings and other airborne particulate matter that can seriously degrade electrical performance. They share many of the superior design features of Wetguard® plugs and connectors, offering a reliable source of electrical power where extended mechanical and electrical life are specified but moisture-resistance is not required.

Features and Benefits

- Tongue and groove design of front module and TPV body assures tight fit in husk and offers excellent barrier against dirt and dust
- Rubber membrane seal for secure cord grip; creates a barrier and keeps contaminants from entering the device interior
- Santoprene™ TPV husk exterior offers excellent resistance to cracking and fading from sunlight exposure, repels moisture and fluids, and endures extreme temperature variations
- Fast-threading assembly screws, keyed wiring module and husk, self-centering strain relief clamps and deep-funneled wiring wells provide for simple and fast assembly

15 Amp Locking Devices

Dustguard® Locking Plugs and Connectors



2447

15A Locking 2-Pole, 3-Wire Devices

Amp	Volt	NEMA Configuration	Cat. No. Plug	Cat. No. Connector
15	125	L5-15 	2447	2547

NEMA configuration diagrams represent plug blade configuration



Related Products

See page C-75 in the Straight Blade Devices section for Straight Blade Dustguard® devices.

Rhino-Hide® NEMA Wiring Devices

Rugged Connectors for Extreme Environments

Rhino-Hide® NEMA wiring devices are the only connectors in this class to carry a true watertight/submersible rating, making them suitable for the wettest environments, including those where plugs and connectors may be subject to immersion in mud or water. The high-performance TPV material used in plugs and connectors offers superior resistance (as compared with ordinary rubber) to water, chemicals and UV exposure for long-lasting performance.

Plug, Connector & Receptacle



Features and Benefits

- Submersible, watertight, and dust-tight for outdoor and other wet environments; rated to NEMA Enclosure Type 3R, 4, 4X, 6, 6P, 12, 13 and IP66/IP67/IP68/IP69K (high-pressure steam cleaning); ABS certified — suitable for marine environments
- Threaded connections make these devices ideal in high-vibration environments such as oil-drilling and mining operations
- Coated aluminum components provide superior corrosion resistance to bare aluminum, especially in salt-air environments, which extends service life of the device and facilitates easier installation and removal of threaded components
- Nickel-plated brass electrical contacts provide superior electrical performance and corrosion resistance for extended service life
- Devices are compatible with other manufacturers' devices as well as standard NEMA configured devices
- Available in seven voltage/ampere configurations

Continued on next page

Continued from previous page

Rhino-Hide® NEMA Wiring Devices

Features and Benefits

Receptacles

- The only submersible receptacle in its class
- Industry exclusive self-closing cover automatically seals receptacle when not in use — cover cannot be lost or left off
- Industry exclusive integral hasp provides OSHA lockout/tagout capabilities for added safety
- Wire pigtails make it faster and easier to install
- Mounts to common FS/FD cast device boxes
- Black oxide coated stainless steel assembly screws prevent corrosion from exposure and galvanic activity between screws and receptacle flange

Plugs & Connectors

- Plugs and connectors are submersible when mated or with protective cap installed (connector only)
- High-performance TPV components withstand extreme temperatures, are UV stabilized and resistant to water, oils, and other chemicals
- Industry exclusive variable adjust, watertight strain relief system speeds assembly and provides more reliable performance than conventional rubber boot type systems
- Machined aluminum components are hard anodized to prevent corrosion and pitting
- Stainless steel assembly hardware resists corrosion
- Coated wire rope cover lanyard on connector is more durable than conventional beaded chain type lanyards, minimizing the chances of lost covers that result in damage from exposure to the elements
- Available with black or yellow bodies

NEMA Locking Devices — 15A and 20A

Amp	Volt	NEMA Configuration	Cat. No.				
			Blade Type	Body Color	Plug*	Connector*	Receptacle
15	125	L5-15 	Locking	Black	LNR80-5E	LNR86-5E	LNR96-5
15	250	L6-15 	Locking	Black	LNR80-6E	LNR86-6E	LNR96-6
15	277	7-15 	Locking	Black	LNR80-7E	LNR86-7E	LNR96-7

*To order yellow bodied plugs and connectors, replace "E" at end of catalog number with "Y"



Receptacle



Plug and Connector



Midget Locking Devices

Features and Benefits

- Offers a smaller form factor for limited-space applications
- Locking plugs and connectors feature heavy-duty nylon construction for top performance in the environmental extremes of grueling industrial settings
- Flanged inlets and outlets are built to endure hard use with rugged nylon flanges that assure a smooth, flush fit and outstanding resistance to cracking and breaking
- Backed by a lifetime warranty

15A-125V



2-Pole, 2-Wire Non-Grounding

Rating	15A-125V	
NEMA	 ML1	 ML1
Description	Cat. No. Plug	Cat. No. Connector
Locking	ML1-P	ML1-C
Angle	ML1-AP	ML1-AC
Inlets and Outlets	Inlet	Outlet
Nylon Flange	ML1-PB	ML1-PER



ML1-P

2-Pole, 3-Wire Grounding

Rating	15A-125V	
NEMA	 ML2	 ML2
Description	Cat. No. Plug	Cat. No. Connector
Locking	ML2-P	ML2-C
Angle	ML2-AP	ML2-AC
Inlets and Outlets	Inlet	Outlet
Nylon Flange	ML2-PB	ML2-PER





ML1-AP



ML2-AP

15A-125/250V

3-Pole, 3-Wire Non-Grounding

Rating	15A-125/250V	
NEMA	 ML3	 ML3
Description	Cat. No. Plug	Cat. No. Connector
Locking	ML3-P	ML3-C
Angle	ML3-AP	ML3-AC
Inlets and Outlets	Inlet	Outlet
Nylon Flange	ML3-PB	ML3-PER



ML3-P

Combination Locking and Straight Blade Duplex Receptacles

Features and Benefits

- Impact-resistant black thermoplastic nylon face and body
- Smooth face does not collect dirt
- Large, triple-wipe brass "T" contacts for superior contact and conductivity
- Triple-combination terminal screws
- Back and side wire options accept #10-#14 AWG stranded or solid wire
- Backed by a limited 10-year warranty

15A-125V

2-Pole, 3-Wire Back and Side Wired, Grounding

Rating

15A-125V

NEMA



L5-15R



5-15R

Description

Cat. No.

Duplex Combination Locking & Straight Blade Receptacle with Common Feed

4792

2 Hot Feeds, 1 Neutral Return

4794-1R

Split Feed — 2 Hot Feeds, 2 Neutral Returns

4795-2R



4792

Wallplates and Covers

302 Stainless Steel

Thermoplastic



84003-40

302 Stainless Steel



80703-E (Black)

Other Colors Available



Wallplates






Find the right wallplate for any application. **See section R for Wallplates & Covers.**

Integrated Power Inlets and Outlets with Weather-Resistant Covers

Features and Benefits

- Engineered to IP 64 and NEMA 3R protection ratings
- Suitable for industrial indoor and outdoor use
- Gray, glass-filled thermoplastic cover and white, nylon device
- Glass-filled thermoplastic cover and plate provide outstanding impact resistance and durability
- Dual gaskets, one under plate and one under lid, for weather-resistant fit
- Stainless steel external hardware resists corrosive effects of moisture
- Large thumb-tab makes it easy to open cover with gloved hand
- Mounts to panels or FS/FD boxes
- UL Listed and CSA Certified for wet locations with cover closed
- Backed by a limited 2-year warranty

15A-125V and 15A-250V

2-Pole, 3-Wire  				
Rating	15A-125V		15A-250V	
NEMA	 L5-15P	 L5-15R	 L6-15P	 L6-15R
Description	Cat. No. Inlet	Cat. No. Outlet	Cat. No. Inlet	Cat. No. Outlet
Standard Wire Wells	4716-CWP	4715-CWP	4586-CWP	4585-CWP



4715-CWP

SPOTLIGHT

Food Processing

We know how important it is to ensure reliable electrical performance that will decrease downtime and protect equipment from washdown and corrosion. We're committed to helping food processing facilities run safely and efficiently. For more information visit www.leviton.com/foodprocessing.

