

WLS70




Sealed High Output Strip Light

Banner's WLS70 is a very bright LED luminaire that features an even light output and is designed for a wide variety of environments and applications, including but not limited to machine lighting, automation systems, industrial, wet and harsh environments, railcars, inspection, dairy/poultry production, agriculture, parking garages, and other indoor and outdoor spaces.

- Exceptionally efficient for overall energy and cost savings
- Increase worker productivity and ergonomics with bright, high-quality, uniform light
- Sturdy aluminum housing encased in a shatterproof, UV-stabilized, polycarbonate shell
- Daisy chain long runs of AC lights quickly and easily with cascade quick disconnect models
- Dimming standard on all models



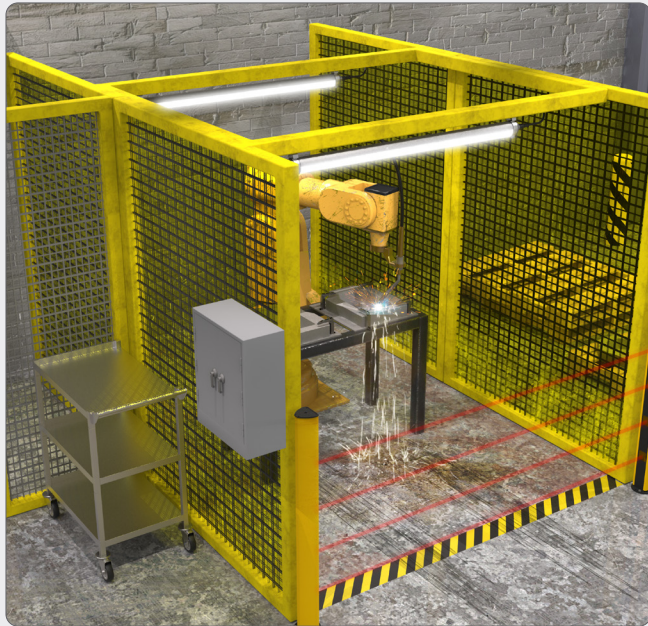


Challenge

- Welding creates very fine dust and smoke from burning and melting of metal
- Hydraulic hoses can leak or rupture
- Requires bright, even light output with varying levels of illumination

Solution

- Tubular, sealed, dust & waterproof housing is IP65 rated
- 1350 lumens per foot of evenly light target surfaces with no hot spots
- Dimmable down to 5% for energy efficiency

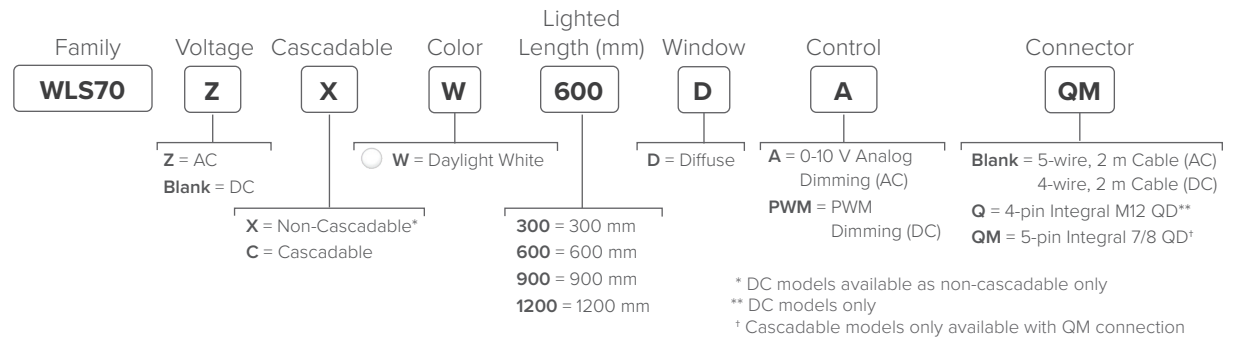

Operating Voltage

12 to 30 V DC (DC models)
100 to 277 V AC (AC models)

Power

9-37 W

LED Lifetime

L70 = 50,000 hours

Efficacy (lm/w)

Up to 146 lumens per watt

Lumens

300 = 1350 900 = 4050
600 = 2700 1200 = 5400

Operating Conditions

-40 to +50 °C


Environmental Rating

IP65

Impact Rating

IK10

Certifications

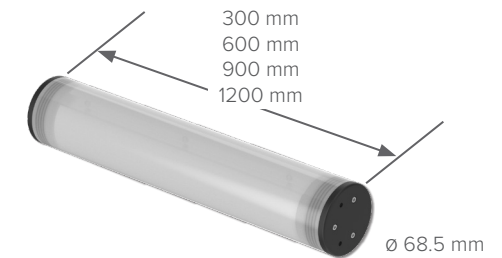

Accessories



LMBWLS70T



LMBWLS70H



LMBWLS70T

Hanging kit options also available



DC Cordsets

M12 straight connector models listed; for right-angle, add RA to the end of the model number (example, MQDC1-506RA)

MQDC-406
2 m (6.5')
MQDC-415
5 m (15')
MQDC-430
9 m (30')



AC Cordsets

Single-ended Mini-Style
5-pin



Double-ended Mini-Style
5-pin female/male

MBCCL-506
2 m (6.56 ft)
MBCCL-515
5 m (16.4 ft)
MBCCL-530
9 m (29.5 ft)

MBCCL-503SS
1 m (3.28 ft)
MBCCL-506SS
2 m (6.56 ft)
MBCCL-512SS
4 m (13.1 ft)
MBCCL-520SS
6 m (19.7 ft)