

## Panel PC - BL2 PPC 9100 - 1105783

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



IP66-rated, fanless industrial panel PC (PPC) with projected capacitive (PCAP) touch screen and powerful Intel® Core™ i7-6600U processor with 8 GB of RAM and M.2 mass storage



### Key Commercial Data

Packing unit	1 pc
Weight per Piece (excluding packing)	1.000 g
Custom tariff number	84715000
Country of origin	Taiwan

### Technical data

#### Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

#### Display

Touch technology	Projective-capacitive (PCAP)
Brightness	Dependent on configuration
Backlighting	LED
Display backlight MTBF	50000 h

#### Computer data

Processor	Intel® Core™ i7-6600U
Cooling	passive
Operating system	Windows 7
	Windows® 10 IoT Enterprise LTSC 2019 (64-bit), Multi-language
RAM	8 GB DDR3

## Panel PC - BL2 PPC 9100 - 1105783

### Technical data

#### Computer data

Mass storage	M.2 SSD
Network	2x Ethernet (10/100/1000 Mbps), RJ45
Interfaces	1x COM (RS-232/422/485)
	2x COM (RS-232)
	2x USB 2.0
	2x USB 3.0
Monitor output	2x DisplayPort
Realtime clock	Yes (battery-backed)
Service life of battery	5 years (typical)

#### General

Mounting type	Panel PC for installation in the control cabinet (mounting plate)
---------------	---

#### Ambient conditions

Degree of protection	IP66 (front), IP20 (back)
Ambient temperature (operation)	0 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 75 °C
Permissible humidity (operation)	10 % ... 90 % (non-condensing)
Permissible humidity (storage/transport)	10 % ... 90 % (non-condensing)
Vibration (operation)	2g <sub>rms</sub> @ sine, 5~500 Hz, 1 h/axis (panel mounting; SSD operating) according to EN 60068-2-6 0.5g <sub>rms</sub> @ sine, 5~500 Hz, 1 h/axis (panel mounting; HDD operating) according to EN 60068-2-6
Shock	20g, 11 ms in accordance with IEC 60068-2-27

#### Device supply

Power supply unit	24 V DC ±20 %
-------------------	---------------

#### Standards and Regulations

Shock	20g, 11 ms in accordance with IEC 60068-2-27
Vibration (operation)	2g <sub>rms</sub> @ sine, 5~500 Hz, 1 h/axis (panel mounting; SSD operating) according to EN 60068-2-6 0.5g <sub>rms</sub> @ sine, 5~500 Hz, 1 h/axis (panel mounting; HDD operating) according to EN 60068-2-6

## Panel PC - BL2 PPC 7100 - 1105782

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



IP66-rated, fanless industrial panel PC (PPC) with projected capacitive (PCAP) touch screen and powerful Intel® Core™ i5-6300U processor with 8 GB of RAM and M.2 mass storage



### Key Commercial Data

Packing unit	1 pc
Weight per Piece (excluding packing)	54,120.000 g
Custom tariff number	84715000
Country of origin	Taiwan

### Technical data

#### Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

#### Display

Touch technology	Projective-capacitive (PCAP)
Brightness	Dependent on configuration
Backlighting	LED
Display backlight MTBF	50000 h

#### Computer data

Processor	Intel® Core™ i5-6300U
Cooling	passive
Operating system	Windows® 7
	Windows® 10 IoT Enterprise LTSC 2019 (64-bit), Multi-language
RAM	8 GB DDR3

# Panel PC - BL2 PPC 7100 - 1105782

## Technical data

### Computer data

Mass storage	M.2 SSD
Network	2x Ethernet (10/100/1000 Mbps), RJ45
Interfaces	1x COM (RS-232/422/485)
	2x COM (RS-232)
	2x USB 2.0
	2x USB 3.0
Monitor output	2x DisplayPort
Realtime clock	Yes (battery-backed)
Service life of battery	5 years (typical)

### General

Mounting type	Panel PC for installation in the control cabinet (mounting plate)
---------------	---

### Ambient conditions

Degree of protection	IP66 (front), IP20 (back)
Ambient temperature (operation)	0 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 75 °C
Permissible humidity (operation)	10 % ... 90 % (non-condensing)
Permissible humidity (storage/transport)	10 % ... 90 % (non-condensing)
Vibration (operation)	2g <sub>rms</sub> @ sine, 5~500 Hz, 1 h/axis (panel mounting; SSD operating) according to EN 60068-2-6 0.5g <sub>rms</sub> @ sine, 5~500 Hz, 1 h/axis (panel mounting; HDD operating) according to EN 60068-2-6
Shock	20g, 11 ms in accordance with IEC 60068-2-27

### Device supply

Power supply unit	24 V DC ±20 %
-------------------	---------------

### Standards and Regulations

Shock	20g, 11 ms in accordance with IEC 60068-2-27
Vibration (operation)	2g <sub>rms</sub> @ sine, 5~500 Hz, 1 h/axis (panel mounting; SSD operating) according to EN 60068-2-6 0.5g <sub>rms</sub> @ sine, 5~500 Hz, 1 h/axis (panel mounting; HDD operating) according to EN 60068-2-6

## Panel PC - BL2 PPC 2100 - 1105780

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



IP66-rated, fanless industrial panel PC (PPC) with projected capacitive (PCAP) touch screen and energy-efficient Intel® Pentium® quad-core processor with 4 GB of RAM and M.2 mass storage



### Key Commercial Data

Packing unit	1 pc
Weight per Piece (excluding packing)	7,460.000 g
Custom tariff number	84715000
Country of origin	Taiwan

### Technical data

#### Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

#### Computer data

Processor	Intel® Pentium
Cooling	passive
Operating system	Windows® 10 IoT Enterprise LTSC 2019 (64-bit), Multi-language
RAM	4 GB DDR3
Mass storage	M.2 SSD
Network	2x Ethernet (10/100/1000 Mbps), RJ45
Interfaces	1x COM (RS-232/422/485)
	2x COM (RS-232)
	2x USB 2.0
	2x USB 3.0
Monitor output	2x DisplayPort

## Panel PC - BL2 PPC 2100 - 1105780

### Technical data

#### Computer data

Realtime clock	Yes (battery-backed)
Service life of battery	5 years (typical)

#### General

Mounting type	Panel PC for installation in the control cabinet (mounting plate)
---------------	---

#### Ambient conditions

Degree of protection	IP66 (front), IP20 (back)
Ambient temperature (operation)	0 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 75 °C
Permissible humidity (operation)	10 % ... 90 % (non-condensing)
Permissible humidity (storage/transport)	10 % ... 90 % (non-condensing)
Vibration (operation)	2g <sub>rms</sub> @ sine, 5~500 Hz, 1 h/axis (panel mounting; SSD operating) according to EN 60068-2-6 0.5g <sub>rms</sub> @ sine, 5~500 Hz, 1 h/axis (panel mounting; HDD operating) according to EN 60068-2-6
Shock	20g, 11 ms in accordance with IEC 60068-2-27

#### Device supply

Power supply unit	24 V DC ±20 %
-------------------	---------------

#### Standards and Regulations

Shock	20g, 11 ms in accordance with IEC 60068-2-27
Vibration (operation)	2g <sub>rms</sub> @ sine, 5~500 Hz, 1 h/axis (panel mounting; SSD operating) according to EN 60068-2-6 0.5g <sub>rms</sub> @ sine, 5~500 Hz, 1 h/axis (panel mounting; HDD operating) according to EN 60068-2-6

## Panel PC - BL2 PPC 3100 - 1105781

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



IP66-rated, fanless industrial panel PC (PPC) with projected capacitive (PCAP) touch screen and energy-efficient Intel® Core™ i3-6100U processor with 8 GB of RAM and M.2 mass storage



### Key Commercial Data

Packing unit	1 pc
Weight per Piece (excluding packing)	7,920.000 g
Custom tariff number	84715000
Country of origin	Taiwan

### Technical data

#### Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

#### Display

Touch technology	Projective-capacitive (PCAP)
Brightness	Dependent on configuration
Backlighting	LED
Display backlight MTBF	50000 h

#### Computer data

Processor	Intel® Core™ i3-6100U
Cooling	passive
Operating system	Windows 7
	Windows® 10 IoT Enterprise LTSC 2019 (64-bit), Multi-language
RAM	8 GB DDR3

# Panel PC - BL2 PPC 3100 - 1105781

## Technical data

### Computer data

Mass storage	M.2 SSD
Network	2x Ethernet (10/100/1000 Mbps), RJ45
Interfaces	1x COM (RS-232/422/485)
	2x COM (RS-232)
	2x USB 2.0
	2x USB 3.0
Monitor output	2x DisplayPort
Realtime clock	Yes (battery-backed)
Service life of battery	5 years (typical)

### General

Mounting type	Panel PC for installation in the control cabinet (mounting plate)
---------------	---

### Ambient conditions

Degree of protection	IP66 (front), IP20 (back)
Ambient temperature (operation)	0 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 75 °C
Permissible humidity (operation)	10 % ... 90 % (non-condensing)
Permissible humidity (storage/transport)	10 % ... 90 % (non-condensing)
Vibration (operation)	2g <sub>rms</sub> @ sine, 5~500 Hz, 1 h/axis (panel mounting; SSD operating) according to EN 60068-2-6 0.5g <sub>rms</sub> @ sine, 5~500 Hz, 1 h/axis (panel mounting; HDD operating) according to EN 60068-2-6
Shock	20g, 11 ms in accordance with IEC 60068-2-27

### Device supply

Power supply unit	24 V DC ±20 %
-------------------	---------------

### Standards and Regulations

Shock	20g, 11 ms in accordance with IEC 60068-2-27
Vibration (operation)	2g <sub>rms</sub> @ sine, 5~500 Hz, 1 h/axis (panel mounting; SSD operating) according to EN 60068-2-6 0.5g <sub>rms</sub> @ sine, 5~500 Hz, 1 h/axis (panel mounting; HDD operating) according to EN 60068-2-6

## Classifications

### eCl@ss

eCl@ss 10.0.1	19200103
eCl@ss 11.0	19200103
eCl@ss 5.0	27330200



## Panel PC - BL2 PPC 3100 - 1105781

### Classifications

#### eCl@ss

eCl@ss 5.1	27330200
eCl@ss 6.0	27242300
eCl@ss 7.0	27242301
eCl@ss 9.0	19200103

#### ETIM

ETIM 4.0	EC001414
ETIM 6.0	EC001414
ETIM 7.0	EC001414

### Approvals


#### Approvals


Approvals

EAC-RoHS / EAC

Ex Approvals

#### Approval details

EAC-RoHS		RU*- DE*HB.B.00386/20
----------	---	--------------------------

EAC		RU C- DE.A*08.B01708
-----	---	-------------------------

### Accessories

Accessories

Adapter cable

## Panel PC - BL2 PPC 3100 - 1105781

### Accessories

Adapter - DP TO VGA ADPTR - 2400173

DisplayPort to VGA video adapter



---

Adapter - DP TO DVI ADPTR - 2400174

DisplayPort to DVI-i video adapter



---

### Data front plate

Data interface - SI-SES-U1A/0,6 - 1404514



Service socket with USB (socket/plug), type A with 0.6 m cable

---

### Operating stylus

Touch pen - TOUCH PEN - 2701379



Touch pen for analog-resistive HMIs, silver coated. Delivery includes self-adhesive pen holder.

## Industrial PC - BL2 BPC 1100 - 1105772

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

IP20-rated fanless industrial box PC (BPC) with energy-efficient Intel® Celeron® processor N3350 with 4 GB of RAM and M.2 mass storage.



### Key Commercial Data

Packing unit	1 pc
Weight per Piece (excluding packing)	1,640.000 g
Custom tariff number	84715000
Country of origin	Taiwan

### Technical data

#### Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

#### Computer data

Processor	Intel® Celeron® N3350 1.10/2.40 GHz
Cooling	passive
Operating system	Windows® 10 IoT Enterprise LTSC 2019 (64-bit), Multi-language
RAM	4 GB DDR3
Mass storage	M.2 SSD
Network	2x Ethernet (10/100/1000 Mbps), RJ45
Interfaces	1x COM (RS-232/422/485)
	2x COM (RS-232)
	2x USB 2.0
	2x USB 3.0
Monitor output	2x DisplayPort

# Industrial PC - BL2 BPC 1100 - 1105772

## Technical data

### Computer data

Realtime clock	Yes (battery-backed)
Service life of battery	5 years (typical)

### General

Mounting type	Wall or DIN rail
---------------	------------------

### Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	0 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 75 °C
Permissible humidity (operation)	10 % ... 90 % (non-condensing)
Permissible humidity (storage/transport)	10 % ... 90 % (non-condensing)
Vibration (operation)	2g <sub>rms</sub> @ sine, 5~500 Hz, 1 h/axis (panel mounting; SSD operating) according to EN 60068-2-6 0.5g <sub>rms</sub> @ sine, 5~500 Hz, 1 h/axis (panel mounting; HDD operating) according to EN 60068-2-6
Shock	20g, 11 ms in accordance with IEC 60068-2-27

### Dimensions

Outer dimensions: width, height, depth	185 mm x 131 mm x 54 mm
Installation dimensions: width, height, depth	194 mm x 94 mm

### Device supply

Power supply unit	24 V DC ±20 %
-------------------	---------------

### Standards and Regulations

Shock	20g, 11 ms in accordance with IEC 60068-2-27
Vibration (operation)	2g <sub>rms</sub> @ sine, 5~500 Hz, 1 h/axis (panel mounting; SSD operating) according to EN 60068-2-6 0.5g <sub>rms</sub> @ sine, 5~500 Hz, 1 h/axis (panel mounting; HDD operating) according to EN 60068-2-6

## Industrial PC - BL2 BPC 2100 - 1105773

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

IP20-rated fanless industrial box PC (BPC) with energy-efficient Intel® Pentium® quad-core processor with 4 GB of RAM and M.2 mass storage.



### Key Commercial Data

Packing unit	1 pc
Weight per Piece (excluding packing)	1,740.000 g
Custom tariff number	84715000
Country of origin	Taiwan

### Technical data

#### Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

#### Computer data

Processor	Intel® Pentium® N4200 1.10/2.50 GHz
Cooling	passive
Operating system	Windows® 10 IoT Enterprise LTSC 2019 (64-bit), Multi-language
RAM	4 GB DDR3
Mass storage	M.2 SSD
Network	2x Ethernet (10/100/1000 Mbps), RJ45
Interfaces	1x COM (RS-232/422/485)
	2x COM (RS-232)
	2x USB 2.0
	2x USB 3.0
Monitor output	2x DisplayPort

# Industrial PC - BL2 BPC 2100 - 1105773

## Technical data

### Computer data

Realtime clock	Yes (battery-backed)
Service life of battery	5 years (typical)

### General

Mounting type	Wall or DIN rail
---------------	------------------

### Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	0 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 75 °C
Permissible humidity (operation)	10 % ... 90 % (non-condensing)
Permissible humidity (storage/transport)	10 % ... 90 % (non-condensing)
Vibration (operation)	2g <sub>rms</sub> @ sine, 5~500 Hz, 1 h/axis (panel mounting; SSD operating) according to EN 60068-2-6 0.5g <sub>rms</sub> @ sine, 5~500 Hz, 1 h/axis (panel mounting; HDD operating) according to EN 60068-2-6
Shock	20g, 11 ms in accordance with IEC 60068-2-27

### Dimensions

Outer dimensions: width, height, depth	185 mm x 131 mm x 54 mm
Installation dimensions: width, height, depth	194 mm x 94 mm

### Device supply

Power supply unit	24 V DC ±20 %
-------------------	---------------

### Standards and Regulations

Shock	20g, 11 ms in accordance with IEC 60068-2-27
Vibration (operation)	2g <sub>rms</sub> @ sine, 5~500 Hz, 1 h/axis (panel mounting; SSD operating) according to EN 60068-2-6 0.5g <sub>rms</sub> @ sine, 5~500 Hz, 1 h/axis (panel mounting; HDD operating) according to EN 60068-2-6

## Industrial PC - BL2 BPC 3100 - 1105776

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

IP20-rated fanless industrial box PC (BPC) with energy-efficient Intel® Core™ i3-6100U processor with 8 GB of RAM and M.2 mass storage.



### Key Commercial Data

Packing unit	1 pc
Weight per Piece (excluding packing)	2,680.000 g
Custom tariff number	84715000
Country of origin	Taiwan

### Technical data

#### Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

#### Computer data

Processor	Intel® Core™ i3-6100U
Cooling	passive
Operating system	Windows 7
	Windows® 10 IoT Enterprise LTSC 2019 (64-bit), Multi-language
RAM	8 GB DDR3
Mass storage	M.2 SSD
Network	2x Ethernet (10/100/1000 Mbps), RJ45
Interfaces	1x COM (RS-232/422/485)
	2x COM (RS-232)
	2x USB 2.0
	2x USB 3.0

# Industrial PC - BL2 BPC 3100 - 1105776

## Technical data

### Computer data

Monitor output	2x DisplayPort
Realtime clock	Yes (battery-backed)
Service life of battery	5 years (typical)

### General

Mounting type	Wall mount
---------------	------------

### Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	0 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 75 °C
Permissible humidity (operation)	10 % ... 90 % (non-condensing)
Permissible humidity (storage/transport)	10 % ... 90 % (non-condensing)
Vibration (operation)	2g <sub>rms</sub> @ sine, 5~500 Hz, 1 h/axis (panel mounting; SSD operating) according to EN 60068-2-6 0.5g <sub>rms</sub> @ sine, 5~500 Hz, 1 h/axis (panel mounting; HDD operating) according to EN 60068-2-6
Shock	20g, 11 ms in accordance with IEC 60068-2-27

### Dimensions

Outer dimensions: width, height, depth	247 mm x 145 mm x 54 mm
Installation dimensions: width, height, depth	247 mm x 94 mm

### Device supply

Power supply unit	24 V DC ±20 %
-------------------	---------------

### Standards and Regulations

Shock	20g, 11 ms in accordance with IEC 60068-2-27
Vibration (operation)	2g <sub>rms</sub> @ sine, 5~500 Hz, 1 h/axis (panel mounting; SSD operating) according to EN 60068-2-6 0.5g <sub>rms</sub> @ sine, 5~500 Hz, 1 h/axis (panel mounting; HDD operating) according to EN 60068-2-6



## Industrial PC - BL2 BPC 9100 - 1105778

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

IP20-rated fanless industrial box PC (BPC) with a powerful Intel® Core™ i7-6600U processor with 16 GB of RAM and M.2 mass storage.



### Key Commercial Data

Packing unit	1 pc
Weight per Piece (excluding packing)	2,560.000 g
Custom tariff number	84715000
Country of origin	Taiwan

### Technical data

#### Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

#### Computer data

Processor	Intel® Core™ i7-6600U
Cooling	passive
Operating system	Windows 7
	Windows® 10 IoT Enterprise LTSC 2019 (64-bit), Multi-language
RAM	16 GB DDR3 SODIMM
Mass storage	M.2 SSD
Network	2x Ethernet (10/100/1000 Mbps), RJ45
Interfaces	1x COM (RS-232/422/485)
	2x COM (RS-232)
	2x USB 2.0
	2x USB 3.0

# Industrial PC - BL2 BPC 9100 - 1105778

## Technical data

### Computer data

Monitor output	2x DisplayPort
Realtime clock	Yes (battery-backed)
Service life of battery	5 years (typical)

### General

Mounting type	Wall mount
---------------	------------

### Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	0 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 75 °C
Permissible humidity (operation)	10 % ... 90 % (non-condensing)
Permissible humidity (storage/transport)	10 % ... 90 % (non-condensing)
Vibration (operation)	2g <sub>rms</sub> @ sine, 5~500 Hz, 1 h/axis (panel mounting; SSD operating) according to EN 60068-2-6 0.5g <sub>rms</sub> @ sine, 5~500 Hz, 1 h/axis (panel mounting; HDD operating) according to EN 60068-2-6
Shock	20g, 11 ms in accordance with IEC 60068-2-27

### Dimensions

Outer dimensions: width, height, depth	247 mm x 145 mm x 54 mm
Installation dimensions: width, height, depth	247 mm x 94 mm

### Device supply

Power supply unit	24 V DC ±20 %
-------------------	---------------

### Standards and Regulations

Shock	20g, 11 ms in accordance with IEC 60068-2-27
Vibration (operation)	2g <sub>rms</sub> @ sine, 5~500 Hz, 1 h/axis (panel mounting; SSD operating) according to EN 60068-2-6 0.5g <sub>rms</sub> @ sine, 5~500 Hz, 1 h/axis (panel mounting; HDD operating) according to EN 60068-2-6

## Industrial PC - BL2 BPC 7100 - 1105777

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

IP20-rated fanless industrial box PC (BPC) with a powerful Intel® Core™ i5-6300U processor with 16 GB of RAM and M.2 mass storage.



**RoHS**

### Key Commercial Data

Packing unit	1 pc
Weight per Piece (excluding packing)	2,640.000 g
Custom tariff number	84715000
Country of origin	Taiwan

### Technical data

#### Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

#### Computer data

Processor	Intel® Core™ i5-6300U
Cooling	passive
Operating system	Windows 7
	Windows® 10 IoT Enterprise LTSC 2019 (64-bit), Multi-language
RAM	16 GB DDR3 SODIMM
Mass storage	M.2 SSD
Network	2x Ethernet (10/100/1000 Mbps), RJ45
Interfaces	1x COM (RS-232/422/485)
	2x COM (RS-232)
	2x USB 2.0
	2x USB 3.0

# Industrial PC - BL2 BPC 7100 - 1105777

## Technical data

### Computer data

Monitor output	2x DisplayPort
Realtime clock	Yes (battery-backed)
Service life of battery	5 years (typical)

### General

Mounting type	Wall mount
---------------	------------

### Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	0 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 75 °C
Permissible humidity (operation)	10 % ... 90 % (non-condensing)
Permissible humidity (storage/transport)	10 % ... 90 % (non-condensing)
Vibration (operation)	2g <sub>rms</sub> @ sine, 5~500 Hz, 1 h/axis (panel mounting; SSD operating) according to EN 60068-2-6 0.5g <sub>rms</sub> @ sine, 5~500 Hz, 1 h/axis (panel mounting; HDD operating) according to EN 60068-2-6
Shock	20g, 11 ms in accordance with IEC 60068-2-27

### Dimensions

Outer dimensions: width, height, depth	247 mm x 145 mm x 54 mm
Installation dimensions: width, height, depth	247 mm x 94 mm

### Device supply

Power supply unit	24 V DC ±20 %
-------------------	---------------


### Standards and Regulations

Shock	20g, 11 ms in accordance with IEC 60068-2-27
Vibration (operation)	2g <sub>rms</sub> @ sine, 5~500 Hz, 1 h/axis (panel mounting; SSD operating) according to EN 60068-2-6 0.5g <sub>rms</sub> @ sine, 5~500 Hz, 1 h/axis (panel mounting; HDD operating) according to EN 60068-2-6

## Drawings

## Industrial PC - BL2 BPC 7100 - 1105777

Dimensional drawing

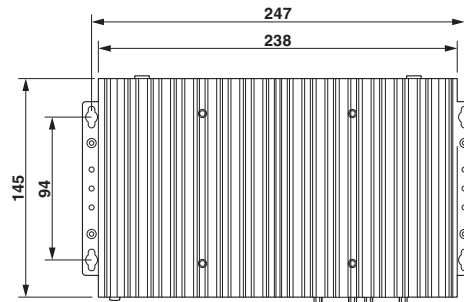

### Classifications

#### eCl@ss

eCl@ss 10.0.1	19200102
eCl@ss 11.0	19200102
eCl@ss 4.0	27250315
eCl@ss 4.1	27250315
eCl@ss 5.0	27259205
eCl@ss 5.1	27242401
eCl@ss 6.0	19200100
eCl@ss 7.0	19200102
eCl@ss 9.0	19200102

#### ETIM

ETIM 4.0	EC001413
ETIM 6.0	EC001413
ETIM 7.0	EC001413

### Approvals

#### Approvals

Approvals

EAC-RoHS / EAC

Ex Approvals

#### Approval details

## Industrial PC - BL2 BPC 7100 - 1105777

### Approvals

EAC-RoHS		RU*- DE*HB.B.00386/20
----------	---	--------------------------

EAC		RU C- DE.A*08.B01708
-----	---	-------------------------

### Accessories

#### Accessories

#### Adapter cable

Adapter - DP TO VGA ADPTR - 2400173

DisplayPort to VGA video adapter



Adapter - DP TO DVI ADPTR - 2400174

DisplayPort to DVI-i video adapter



#### Data front plate

Data interface - SI-SES-U1A/0,6 - 1404514

Service socket with USB (socket/plug), type A with 0.6 m cable

