


A GUIDE TO

CONVERTING HYDRAULIC TO ELECTRIC ACTUATORS

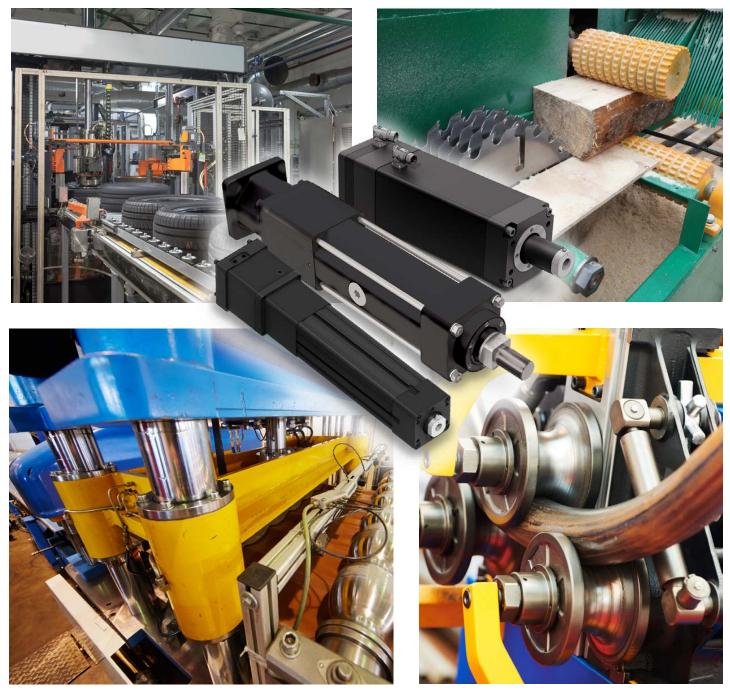

Courtesy of Steven Engineering, Inc - (800) 258-9200 - sales@steveneng.com - www.stevenengineering.com

SUCCESSFUL CONVERSION TO ELECTRIC ACTUATORS



Benefits of Replacing Hydraulic Cylinders with Electric Actuators

Improve process control, increase efficiency, eliminate leaks, & get many other advantages by adopting electric actuator systems

Download Tolomatic's paper on the pros & cons of Electric Actuator vs. Hydraulic cylinder systems.





1: EVALUATE POTENTIAL BENEFITS

Flexible Operation: would it be helpful to quickly and easily be able to adjust stroke lengths, forces, speed of movements?

Precise Movement: would it be helpful to improve your precision...so that every time you make a move you get exactly the same result?

Data Collection: would it be helpful to collect data from the motor and actuator so you could record how far the actuator moved, how much force was exerted and what speeds the actuator moved at?

Leaks and Environmental Concerns:

would it be helpful to eliminate the potential for hydraulic fluid leaks in the manufacturing environment to improve safety and better insure product quality?


Maintenance: would it be helpful if you had a system with fewer moving parts, almost no on-going maintenance requirements and doesn't contain pressurized oil?

Download "Calculating Total Cost of Ownership" Infographic.


Ambient Temperature: would it be helpful if you got the exact same performance regardless if the ambient temperature was below freezing or the hottest day of the summer?

Other factors: Utility costs, Noise, Shock loads

Download "Electric vs. Servo-hydraulic vs. Hydraulic Actuators" Infographic.

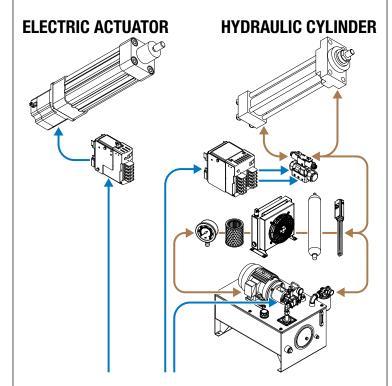

Hydraulic cylinders and required components are more complex than electric actuators

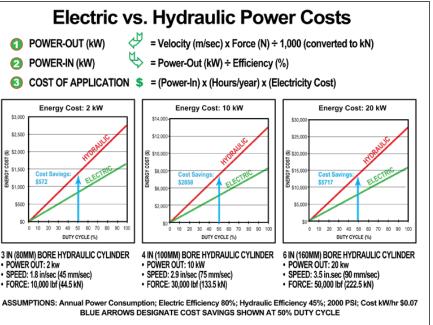


Courtesy of Steven Engineering, Inc - (800) 258-9200 - sales@steveneng.com - www.stevenengineering.com

www.tolomatic.com



2: ACCURATELY SIZE ACTUATOR

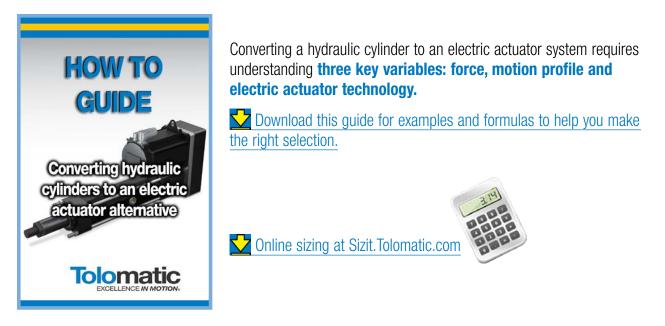


Most important sizing tip: Don't oversize the actuator.



A costly mistake when converting to an electric system is oversizing the actuator.

💆 This video summarizes how to accurately size an actuator for hydraulic replacement.

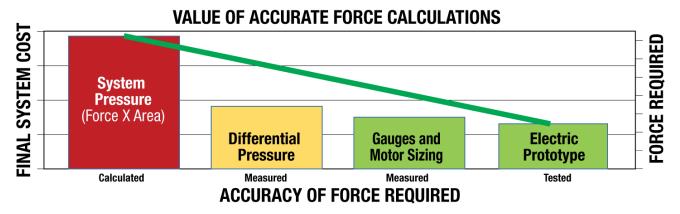






Apply High force actuators with confidence


Learn valuable tips for sizing and selecting high force actuators - from 50 lbf to 50,000 lbf (0.2 kN to 222.4 kN).

View this webinar to help you define a solution that you can deploy with confidence.

Make pressure measurements at the cylinder or valve in order to better determine accurate applications forces.

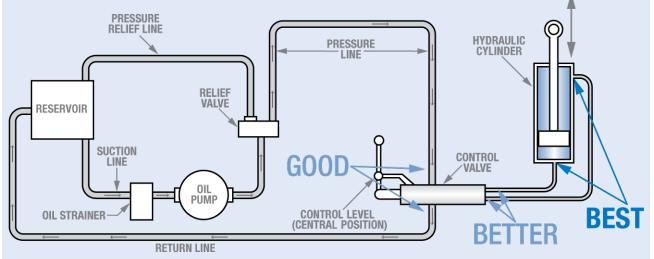

This diagram shows the preferred locations to measure pressure to accurately determine the actual force required in an existing application

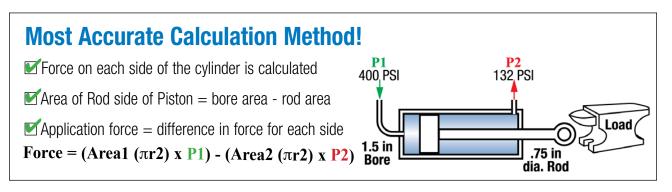




3: IMPLEMENTATION STEPS

A.) Research:

Tolomatic has gathered a wealth of informative and educational resources to help with this process:

💆 Electric / hydraulic conversion info center





B.) Collect Application Details


Use Tolomatic's application worksheet as a guide: The product selection process can be complex. It is highly recommended that you contact Tolomatic or an authorized Tolomatic Distributor for selection assistance.

Fill out an Application Data Checklist Form and submit it to our sales department for assistance in selecting the best product for your application.

NEWS & EVENTS OUR BLOG DEALER

💆 Online: Electric Rod-Style Actuator Application Checklist

💆 Online: Electric Rodless Actuator Application Checklist

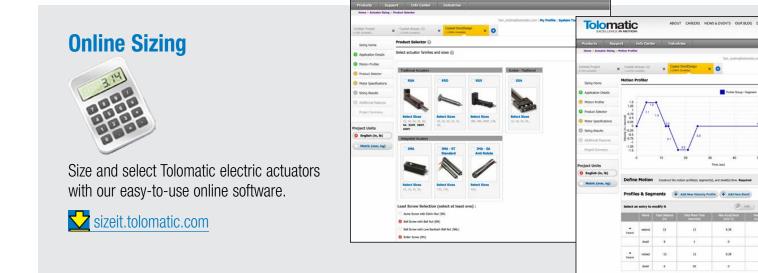

Tolomatic



C.) Contact Tolomatic for Expert Advice



Engage with Tolomatic to work through the process

Expect prompt, courteous replies to all of your application and product questions. Call us at 1-800-328-2174

click on the 🔀 Ask and Engineer link

or email us at 🔽 sales@Tolomatic.com



D.) Comprehensive Pre-sale and Post-sale Tech Support

Factory application reviews to suit your preference (virtual, in person or at Tolomatic) with full support of our technical and engineering staff. We'll precisely integrate the perfect actuator for your machine/system. Support that gets quick results and ensures your system will continue to run effectively and efficiently.



ty Profile	s System Tools F	Products Supp	Carlot and the second second	lenter	Ŀ	dustries	_	_	_	_	_		
		Hares > Actuator Staing > OptoPrecision GmbH 8 (10% Grephen)	Sizing Results							1	Ny Profile Syste	m Tools Pipel	ne La
Dwell		Sizing Home	Sizing Results ()										
		Application Details	Hatching Products Non-Hatching Products										
		Motion Profiler Product Selector	Product List	Product Listing () Your previously selected model: R58.32 BNBS SH458.000 RP2									
		Motor Specifications	Nodel	0		Screw/Belt		0 6	Reduction		Hoter	0	
		Sizing Results	Model - Screw/Ter			Reduction Ratio		Notor Price Pactor		Carify String			
	60 7	Additional Peatures	RSA12			RP2	2	17918	12749-23	RSA32 BND5 SH449.999 RP2 ST1			
1000 100		Project Summary	RSA32	R5A32 BM02		892	2	19918 42749.23		R5A32 BM22 SHH49.999 R72 ST1			
			R5A32	BNDS		891	i l	19948	\$2749.23	REA12	BNC5 59445.999 87	1 571	
Don Adv		Project Units	R5432	R5A32 8MP10		892	2	17618	\$2963.85	85A32 8NH10 SHH49.999 8P2 ST1		P2 ST1	
		O English (in, lb)	RSA32	BNM05		RP2	2	19915	12863.85	R5A32 BMM05 5MH49.999 RF2 5		P2 571	
		Metric (mm, kg)	RSA32 BAPHOS			891	1	1 19948 \$2863.85		R5A32 8NM05 5M449.999 RP1 5T1			
			R5A32	RSA32 BNP20		RP2	2	19918	\$3043.48	RSA32 8NN23 SM449.999 RP2 ST1		P2 571	
ų	(Married)		RSA32HT	BNDS		8P1	1	19918	\$3076.17	RSAIZ	BNC5 574449.999 82	um:	
	12		RSA32HT	BN02		892	2	19918	\$3076.17	85A32	BNC2 594449.999 875	2 1073	
	1		RSA32HT	SA32HT BND2		RP1	10	19948	\$3076.17	R5A32 8NC2 5NH49.999 RF1 HT1		1873	
			RSA32HT	rr BN05		8P2	2	17918	\$3076.17	R5A32 BNC5 5HH49.999 RF2 HT		2 HT3	
	12		RSA32HT	894,05		RP2	2	17918	\$3132.15	RSAIZ	BINLOS 5M449.999 RJ	12 HTL	
	50		R5A32HT	BNL05		RP1	С.	19948	\$3132.15	R5A12	BNL05 SM443.999 R	1. 111	
			RSA32HT	BAPTLO		892	2	19945	\$3190.79	R5A32	BNH12 SH149.999 R	P2 HT1	
			R5A32HT	DAPH10		821		17915	\$3190.79	05A12	GW12 5HH9.999 8		

Some Sizing Tips:

□ Identify application loads and forces including tooling, reactive forces, press forces, drag, etc....

- \Box Motion profiles and cycle rates
- \Box Be as accurate as possible
- \Box What is important: Speed, cycle time or both
- Don't forget dwells!

Courtesy of Steven Engineering, Inc - (800) 258-9200 - sales@steveneng.com - www.stevenengineering.com

www.tolomatic.com



The Tolomatic Difference Expect More From the Industry Leader:



Unique linear actuator solutions with Endurance TechnologySM to solve your challenging application requirements.



The fastest delivery of catalog products... Built-to-order with configurable stroke lengths and flexible mounting options.



Online sizing that is easy to use, accurate and always up-to-date. Find a Tolomatic electric actuator to meet your requirements.



Match your motor with compatible mounting plates that ship with any Tolomatic electric actuator.

CAD LIBRARY

Easy to access CAD files available in the most popular formats to place directly into your assembly.



Extensive motion control knowledge: Expect prompt, courteous replies to any application and product questions from Tolomatic's industry experts.

ServoWeld[®] Actuators Electric Linear Actuators

Pneumatic Actuators Power Transmission Products



USA - Headquarters Tolomatic Inc.

3800 County Road 116 Hamel, MN 55340, USA **Phone:** (763) 478-8000 Toll-Free: **1-800-328-2174** sales@tolomatic.com **www.tolomatic.com**

MEXICO Centro de Servicio

Parque Tecnológico Innovación Int. 23, Lateral Estatal 431, Santiago de Querétaro, El Marqués, México, C.P. 76246 **Phone:** +1 (763) 478-8000 help@tolomatic.com = ISO 9001 = Certified site: Hamel, MN

COMPANY WITH QUALITY SYSTEM CERTIFIED BY DNV GL

EUROPE Tolomatic Europe GmbH

Elisabethenstr. 20 65428 Rüsselsheim Germany **Phone:** +49 6142 17604-0 help@tolomatic.eu

CHINA

Tolomatic Automation Products (Suzhou) Co. Ltd. No. 60 Chuangye Street, Building 2 Huqiu District, SND Suzhou

Jiangsu 215011 - P.R. China **Phone:** +86 (512) 6750-8506 ServoWeldChina@tolomatic.com

All brand and product names are trademarks or registered trademarks of their respective owners. Information in this document is believed accurate at time of printing. However, Tolomatic assumes no responsibility for its use or for any errors

that may appear in this document. Tolomatic reserves the right to change the design or operation of the equipment described herein and any associated motion products without notice. Information in this document is subject to change without notice.

Visit www.tolomatic.com for the most up-to-date technical information