

Series

11-22-MHZ2

ø10, ø16, ø20, ø25
Air Gripper

How to Order

Clean series

11 | Vacuum suction type

11 — MHZ2 — 16 D — M9N

Copper, fluorine and silicone-free + Low particle generation

22 | Vacuum suction type

22 — MHZ2 — 16 D — M9N

Bore size

10	10 mm
16	16 mm
20	20 mm
25	25 mm

Action

D | Double acting

Number of auto switches

Nil	2 pcs.
S	1 pc.

Finger option

Standard type	Nil: Basic	1: Side tapped mounting	2: Through-holes in open/close direction	3: Flat finger
Narrow type	N: Basic	N1: Side tapped mounting	N2: Through-holes in open/close direction	

Auto switch

Nil	Without auto switch (Built-in magnet)
-----	---------------------------------------

Auto Switch Specifications (Refer to the WEB catalog for further information on auto switches.)

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model		Lead wire length (m) Note 1)			Applicable load	Applicable model					
					DC	AC	Perpendicular	In-line	0.5 Nil	3 (L)	5 Note 2) (Z)		ø10	ø16	ø20	ø25		
Solid state auto switch	—	Grommet	Yes	3-wire (NPN)	24 V	5 V	—	M9NV	M9N	●	●	○	IC circuit	Relay PLC	●	●	●	●
				12 V		F8N		—	●	●	○	—			—	●	●	
				3-wire (PNP)		M9PV		M9P	●	●	○	●			●	●	●	
				12 V	F8P	—		●	●	○	—	—			●	●		
					M9BV	M9B		●	●	○	●	●			●	●		
					F8B	—		●	●	○	—	—			●	●		

Note 1) Lead wire length symbols: 0.5 m.....Nil (Example) M9N
3 m.....L (Example) M9NL
5 m.....Z (Example) M9NZ

Note 2) Auto switches marked with "○" symbol are produced upon receipt of order.

Refer to page 946 for the applicable auto switch list.

Specifications

Fluid	Air
Operating pressure	ø10: 0.2 to 0.7 MPa ø16 to ø25: 0.1 to 0.7 MPa
Ambient and fluid temperature	-10 to 60°C
Repeatability	±0.01
Maximum operating frequency	180 c.p.m.
Lubrication	Not required
Action	Double acting
Grease	11-: Fluorine grease 22-: Lithium soap based grease
Cleanliness class (ISO class)	11-/22-: Class 4

Suction Flow Rate of Vacuum Suction Type (Reference values)

Size	Suction flow rate L/min (ANR)
10/16	1
20/25	2

Model

Model	Bore size mm	Gripping force ^{Note 1)}		Open/Close stroke (Both sides) mm	Weight ^{Note 2)} g
		External	Internal		
11-MHZ2-10D	10	9.8	17	4	60
11-MHZ2-16D	16	30	40	6	125
11-MHZ2-20D	20	42	66	10	250
11-MHZ2-25D	25	65	104	14	455

Note 1) Values based on pressure of 0.5 MPa, gripping point L = 20 mm, at center of stroke.

Note 2) Values excluding weight of auto switch.

Protrusion of Auto Switch from Edge of Body


- The amount of auto switch protrusion from the body's end surface is as shown in the table below.
- Use this as a standard when mounting, etc.
- D-F8□ has no protrusion from the body's end surface.

Model	Lead wire type Explanatory drawing Auto switch Finger position	In-line electrical entry
		D-M9□
11-MHZ2-10□	Open	8
	Closed	10
11-MHZ2-16□	Open	4
	Closed	7
11-MHZ2-20□	Open	—
	Closed	5
11-MHZ2-25□	Open	—
	Closed	2

[Mounting of Auto Switch: Precautions]


When mounting an auto switch on the piping port surface of the 11-MHZ2-10□, the auto switch may not be mountable due to interference with the fitting. Use an extension fitting included with the product for the combinations in the table below.

Auto switch model	One-touch Fittings (KQ2H/KQ2S/KQ2L/KQ2W/KJH/KJS/KJL/KJW)
D-M9□(V)	×
D-M9□W(V)	×
D-F8□	×
D-M9□A(V)	×



Interference between the auto switch and the fitting


Mounting dimensions of extension fitting

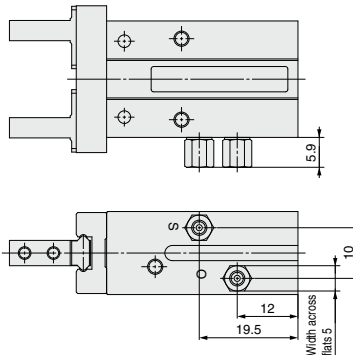

• When mounting extension fittings, first, tighten it by hand, then give it an additional 1/4 turn with a wrench.

Dimensions

11-22-MHZ2-10, 16, 20, 25

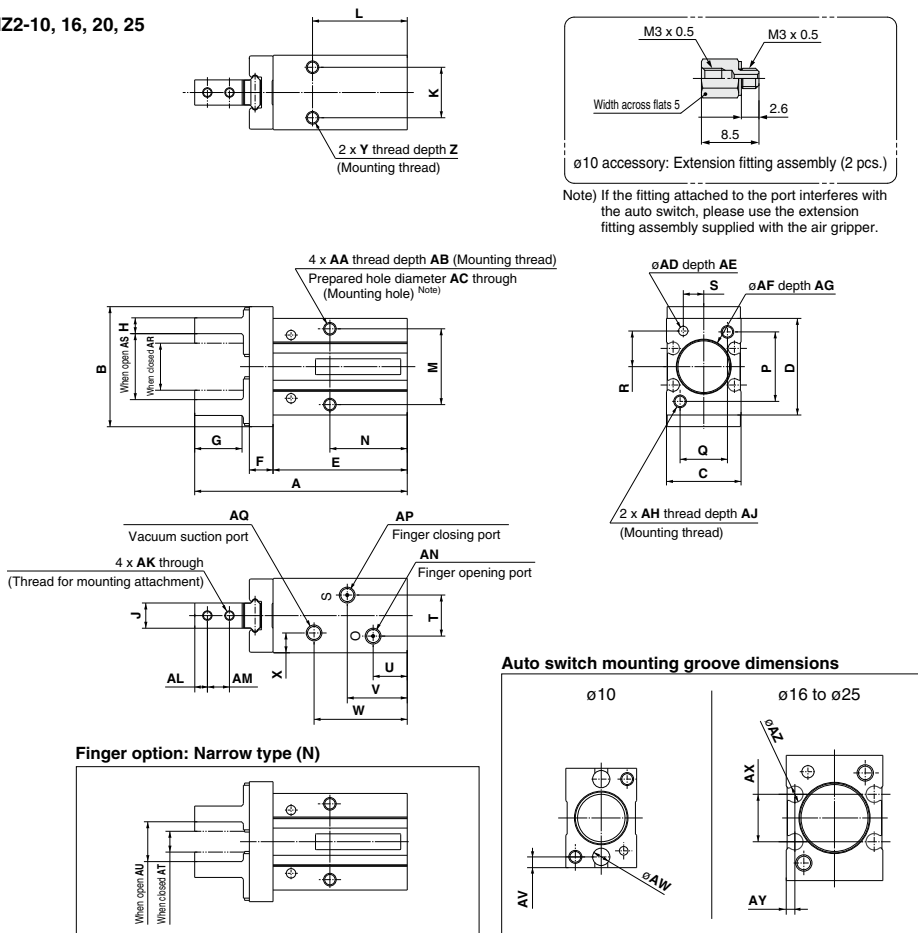


																			(mm)
Model	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	
¹¹ ₂₂ -MHZ2-10D□	57	29	16.4 ^{+0.05} ₀	23	37.8	6	12	4 ^{+0.1} _{-0.1}	5 ⁺⁰ _{-0.05}	11.4	27	16	23	18	12	7.6 ^{+0.02} ₀	5.2 ^{+0.02} ₀	10	
¹¹ ₂₂ -MHZ2-16D□	67.3	38	23.6 ^{+0.05} ₀	30.6	42.5	7.5	15	5 ^{+0.1} _{-0.1}	8 ⁺⁰ _{-0.05}	16	30	24	24.5	22	15	11 ^{+0.02} ₀	6.5 ^{+0.02} ₀	13	
¹¹ ₂₂ -MHZ2-20D□	84.8	50	27.6 ^{+0.05} ₀	42	52.8	9.5	20	6 ^{+0.1} _{-0.1}	10 ⁺⁰ _{-0.05}	18.6	35	30	29	32	18	16.8 ^{+0.02} ₀	7.5 ^{+0.02} ₀	15	
¹¹ ₂₂ -MHZ2-25D□	102.7	63	33.6 ^{+0.05} ₀	52	63.6	11	25	10 ^{+0.1} _{-0.1}	12 ⁺⁰ _{-0.05}	22	36.5	36	30	40	22	21.8 ^{+0.02} ₀	10 ^{+0.02} ₀	20	
Model	U	V	W	X	Y	Z	AA	AB	AC	AD	AE	AF	AG	AH	AJ	AK			
¹¹ ₂₂ -MHZ2-10D□	12	19.5	28.2	5.5	M3 x 0.5	6	M3 x 0.5	5.5	2.6	2H9 ^{+0.025} ₀	3	12.4H9 ^{+0.043} ₀	1.5	M3 x 0.5	6	M2.5 x 0.45			
¹¹ ₂₂ -MHZ2-16D□	10.8	19	29.5	6.5	M4 x 0.7	4.5	M4 x 0.7	8	3.4	3H9 ^{+0.025} ₀	3	17.4H9 ^{+0.043} ₀	1.5	M4 x 0.7	8	M3 x 0.5			
¹¹ ₂₂ -MHZ2-20D□	12	23	39.8	8.3	M5 x 0.8	8	M5 x 0.8	10	4.3	4H9 ^{+0.030} ₀	4	22.4H9 ^{+0.052} ₀	2	M5 x 0.8	10	M4 x 0.7			
¹¹ ₂₂ -MHZ2-25D□	13	37	49.7	10.8	M6 x 1	10	M6 x 1	12	5.1	4H9 ^{+0.030} ₀	4	27.4H9 ^{+0.052} ₀	3	M6 x 1	12	M5 x 0.8			
Model	AL	AM	AN	AP	AQ	AR	AS	AT	AU	AV	AW	AX	AY	AZ					
¹¹ ₂₂ -MHZ2-10D□	3	5.7	M3 x 0.5	M3 x 0.5	M3 x 0.5	11.2 ^{+0.5} _{-0.2}	15.2 ^{+2.2} ₀	5.7 ^{+0.5} _{-0.1}	9.7 ^{+2.2} ₀	2.5	4	—	—	—					
¹¹ ₂₂ -MHZ2-16D□	4	7	M5 x 0.8	M5 x 0.8	M5 x 0.8	14.9 ^{+0.5} _{-0.2}	20.9 ^{+2.2} ₀	6.6 ^{+0.5} _{-0.1}	12.6 ^{+2.2} ₀	—	—	11.6	2.1	4					
¹¹ ₂₂ -MHZ2-20D□	5	9	M5 x 0.8	M5 x 0.8	M5 x 0.8	16.3 ^{+0.5} _{-0.2}	26.3 ^{+2.2} ₀	7.2 ^{+0.5} _{-0.1}	17.2 ^{+2.2} ₀	—	—	14	2.1	4					
¹¹ ₂₂ -MHZ2-25D□	6	12	M5 x 0.8	M5 x 0.8	M5 x 0.8	19.3 ^{+0.5} _{-0.3}	33.3 ^{+2.5} _{-0.2}	8.8 ^{+0.5} _{-0.1}	22.8 ^{+2.5} ₀	—	—	19	3.5	4					

Note) Through-hole mounting is not possible for ø10.

Standard Type / Series ¹¹⁻²²MHZ2

Finger Option


Side tapped mounting [1/N1]



Model	A	B	C	MM
¹¹⁻²² MHZ2-10D ¹ N1	3	5.7	2	M2.5 x 0.45
¹¹⁻²² MHZ2-16D ¹ N1	4	7	2.5	M3 x 0.5
¹¹⁻²² MHZ2-20D ¹ N1	5	9	4	M4 x 0.7
¹¹⁻²² MHZ2-25D ¹ N1	6	12	5	M5 x 0.8

* Specifications and dimensions other than the above are the same as the basic type (including narrow type).


Through-holes in open/close direction [2/N2]

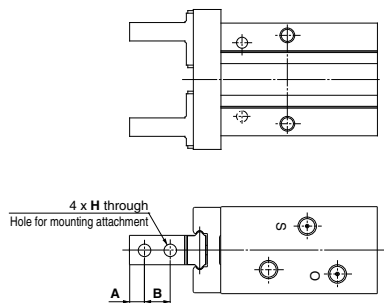

Model	A	B	H
¹¹⁻²² MHZ2-10D ² N2	3	5.7	2.9
¹¹⁻²² MHZ2-16D ² N2	4	7	3.4
¹¹⁻²² MHZ2-20D ² N2	5	9	4.5
¹¹⁻²² MHZ2-25D ² N2	6	12	5.5

* Specifications and dimensions other than the above are the same as the basic type (including narrow type).

Flat finger [3]

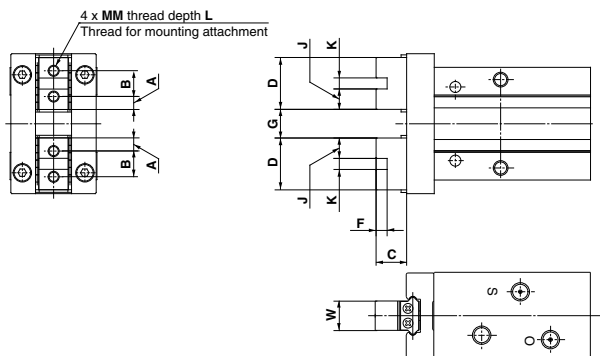

Model	A	B	C	D	F	G		J	K	MM	L	W	Weight (g)
						Open	Closed						
¹¹⁻²² MHZ2-10D3 * 1), * 2)	2.45	6	5.2	10.9	2	5.4 ^{+2.2} ₀	1.4 ^{+0.5} _{-0.3}	4.45	2H9 ^{+0.025} ₀	M2.5 x 0.45	5	5 ⁰ _{-0.05}	60
¹¹⁻²² MHZ2-16D3 * 1), * 2)	3.05	8	8.3	14.1	2.5	7.4 ^{+2.2} ₀	1.4 ^{+0.5} _{-0.3}	5.8	2.5H9 ^{+0.025} ₀	M3 x 0.5	6	8 ⁰ _{-0.05}	125
¹¹⁻²² MHZ2-20D3 * 1), * 2)	3.95	10	10.5	17.9	3	11.6 ^{+2.3} ₀	1.6 ^{+0.5} _{-0.3}	7.45	3H9 ^{+0.025} ₀	M4 x 0.7	8	10 ⁰ _{-0.05}	250
¹¹⁻²² MHZ2-25D3 * 1), * 2)	4.9	12	13.1	21.8	4	16 ^{+2.5} ₀	2 ^{+0.5} _{-0.3}	8.9	4H9 ^{+0.030} ₀	M5 x 0.8	10	12 ⁰ _{-0.05}	450

* 1) Specifications and dimensions other than the above are the same as the basic type (Narrow type is not available for D3).

* 2) The overall length is the same as the MHQ(G) flat finger type.