## **Aluminum High Vacuum Angle Valve**

## **XL**□ Series

The production of flange sizes 16, 25, 40, 50, 63, and 80 for the XLA(V)/XLC(V)/XLF(V)/XLG(V) series has been discontinued. Please select the new XL□-2 type. See here for details.



High fluorine Minimal outgassing Minimal contamination resistance from heavy metals Ø100, Ø160 XLA(V)

XLA XL

XL\Q

XM□ XY□

XSA XVD


XGT

## **Aluminum High Vacuum Angle Valve**

# L Series

## Lightweight, Compact

Large conductance, small body Excellent resistance against fluorine corrosion (body)



### XL\* Series Case

Model	<b>A</b> * (mm)	B (mm)	Weight (kg)	Conductance* (L/s)
XLA-16	40	103	0.25	5
XLA-25	50	113	0.45	14
XLA-40	65	158	1.1	45
XLA-50	70	170	1.6	80
XLA-63	88	196	2.9	160
XLA-80	90	235	5.0	200
XLA-100	108	300	10.6	300
XLA-160	138	315	18.5	800

<sup>\*</sup> Common to all series.



Low outgassing makes it possible to use a lower capacity pump and also to shorten evaluation time





## Little heavy metal contamination

The valve does not contain heavy metals such as Ni (nickel) or Cr (chrome) and a low sputtering yield also helps to minimize heavy metal contamination of semiconductor

## Uniform baking temperature

Excellent thermal conductivity results in a uniform Temperature distribution of 120°C specifications temperature for the entire valve body and a marked decrease in the condensation of gases inside the valve.





### High Vacuum Angle Valves XL□ Series Features

XLA/XLAV (Bellows seal, Single acting) Particulate-free and clean room compatible bellows

 Pressure-balance mechanism XLC/XLCV (Bellows seal, Double acting) · Particulate-free and clean room compatible bellows

type
• Pressure-balance mechanism

XLF/XLFV (O-ring seal, Single acting)

 High speed response Particulates are reduced through special surface

XLG/XLGV (O-ring seal, Double acting)

treatment of shaft seal. High speed response

type

 Particulates are reduced through special surface treatment of shaft seal

- XLD/XLDV (2-Step control, Single acting) Initial stage exhaust valve and main exhaust valve
  - are combined. (flow rate 2-step control valve)
- . Designed with a compact system and reduced piping
  • Prevents particulate turbulence inside the
- chamber during exhaustion.
- · Prevents pumps from running while overloaded. Initial exhaust valve flow is adjustable.

### XLH (Bellows seal, Manual)


- Bellows type is particulate free and cleaned.
- Pressure balance mechanism allows unrestricted exhaust direction.
- Low actuation torque (0.5 N·m or less) Spring provides standard sealing load
- Handle height is the same when valve is open or closed · Indicator to confirm opening and closing of valve
  - is standard equipment

- XLS (Bellows pressure balance, Normally closed electromagnetic)
- · Particulates are reduced because there are no sliding metal parts.
- Pressure balance mechanism allows unrestricted exhaust direction.
- . A control power supply circuit for solenoid valve drive has been made standard.
- . Can be used in portable equipment since air for drive is not necessary.

### **Series Variations**

The production of flange sizes 16, 25, 40, 50, 63, and 80 for the XLA(V)/XLC(V)/XLF(V)/XLG(V) series has been discontinued. Please select the new XLII-2 type. See here for details.

### **High Vacuum Angle Valves**

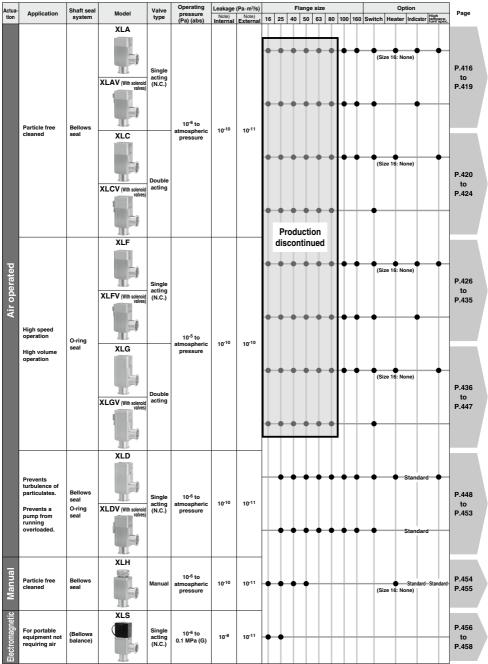

Note) In case of standard seal material (FKM)

\* Heater and high temperature specifications are not available with switches.

XLA

XL\_0

XM□ XY□

D-□

XSA

XVD

XGT

## **Aluminum High Vacuum Angle Valve** Normally Closed/Bellows Seal




## XLA/XLAV Series



**How to Order** 

The production of flange sizes 16, 25, 40, 50, 63, and 80 for the XLA(V) series has been discontinued. Please select the new XLA(V)-2 type. See here for details.



### (1) Flange size


Size	
16	
25	
40	
50	
63	
80	
100	
160	

2 Flange type

Symbol	Type	Applicable flange
Nil	KF (NW)	16, 25, 40, 50, 63, 80 100, 160
D	K (DN)	63, 80, 100, 160

### (3) Indicator/Pilot port direction

Symbol	Indicator	Pilot port direction
Nil	Without indicator	Flange side
Α		Flange side
F	With	Left flange surface
G	indicator	Rear flange surface
J		Right flange surface
K	Without	Left flange surface
L	indicator	Rear flange surface
M	mulcator	Right flange surface



### (4) Temperature specifications/Heater

Symbol		Temperature	Heater
Nil		5 to 60°C	_
High	H0		_
temperature	H4	5 to 150°C	With 100°C heater
type	H5		With 120°C heater

Note) Size 16 is not applicable for H4, H5, Size 25 not for H4.

### 6 Number of auto switches/Mounting position

Quantity	Mounting position	
Without auto switch	_	
2 pcs.	Valve open/closed	
1 pc.	Valve open	
1 pc.	Valve closed	
	Without auto switch 2 pcs. 1 pc.	

### 5 Auto switch type

Auto switch model	Remarks	
	Without auto switch (without built-in magnet)	
D-M9N(M)(L)(Z)		
D-M9P(M)(L)(Z)	Solid state auto switch	
D-M9B(M)(L)(Z)		
D-A90(L)	Reed auto switch (Not applicable	
D-A93(M)(L)(Z)	to flange size 16)	
_	Without auto switch (with built-in magnet)	
	D-M9N(M)(L)(Z) D-M9P(M)(L)(Z) D-M9B(M)(L)(Z) D-A90(L) D-A93(M)(L)(Z)	

Note 1) Auto switches shown above cannot be mounted on the high temperature type. For the high temperature type, a semi-standard product that uses the heat resistant auto switch D-F7NJ\* is available. For details, please contact SMC

Note 2) Standard lead wire length is 0.5 m. Add "L" to the end of the part number when 3 m is desired, "M" when 1 m, and "Z" when 5 m.

Example) -M9NL

### Body surface treatment/Seal material and its changed part

### • Body surface treatment

ŀ	Symbol	Surface treatment		
i	Nil	External: Hard anodized Internal: Raw material		
i	Α	External: Hard anodized Internal: Oxalic acid anodized		

### • Seal material

Symbol	Seal material Compound No	
Nil	FKM 1349-80*	
N1	EPDM	2101-80*
P1	Barrel 70W Perfluoro®	
Q1	Kalrez® 4079	
R1		SS592
R2	Chemraz <sup>®</sup>	SS630
R3		SSE38
S1	VMQ 1232-70*	
T1	FKM for Plasma	3310-75*
U1	ULTIC ARMOR®	UA4640

| \* Produced by Mitsubishi Cable Industries, Ltd.

Seal material changed part and leakage

- com material changes part and loaninge					
Symbol	Note 2) Changed	Leakage (Pa·m³/s or less) Note 1)			
Cymbol	part	Internal	External		
Nil None		1.3 x 10 <sup>-10</sup> (FKM)	1.3 x 10 <sup>-11</sup> (FKM)		
Α	2,3	1.3 x 10 <sup>-8</sup>	1.3 x 10 <sup>-9</sup>		
В	2	1.3 x 10 <sup>-8</sup>	1.3 x 10 <sup>-11</sup> (FKM)		
С	3	1.3 x 10 <sup>-10</sup> (FKM)	1.3 x 10 <sup>-9</sup>		
	Symbol NiI A B	Symbol Changed part  Nil None  A 2, 3  B 2	Changed   Changed   Part		

Note 1) Values at normal temperature, excluding gas permeation. Note 2) Refer to parts number of "Construction" on page 418 for changed part.

Number indicates parts number of "Construction" accordingly.

To order something other than "Nil" (standard), list the symbols starting with "X," followed by each symbol for "body surface treatment," "seal material" and then "changed part".

Example) XLA-16-M9NA-XAN1A

Barrel Perfluoro® is a registered trademark of Matsumura Oil Co., Ltd. Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

Chemraz® is a registered trademark of Greene, Tweed Technologies, Inc. ULTIC ARMOR® is a registered trademark of Nippon Valqua Industries, Ltd.

### **Operated/with Solenoid**


The production of flange sizes 16, 25, 40, 50, 63, and 80 for the XLA(V) series has been discontinued. Please select the new XLA(V)-2 type. See here for details.



### How to Order



Air operated/with solenoid valve



### (1) Flange size

·age c	_
Size	
16	
25	
40	
50	Ī
63	
80	
100	
160	
	Ī

### 2 Flange type

Symbol	Type	Applicable flange			
Nil	KF (NW)	16, 25, 40, 50, 63, 80 100, 160			
D	K (DN)	63, 80, 100, 160			

### (3) Indicator/Pilot port direction

Symbol	Indicator	Pilot port direction		
F	With	Left flange surface		
G		Rear flange surface		
J	indicator	Right flange surface		
K	Without	Left flange surface		
L	indicator	Rear flange surface		
M		Right flange surface		



\* M type plug connector (AC power supply) not attached for J, M of sizes 16 and 25.

### 4 Auto switch type

Symbol	Auto switch model	Remarks
Nil	_	Without auto switch (without built-in magnet)
M9N(M)(L)(Z)	D-M9N(M)(L)(Z)	
	D-M9P(M)(L)(Z)	Solid state auto switch
M9B(M)(L)(Z)	D-M9B(M)(L)(Z)	
A90(L)	D-A90(L)	Reed auto switch (Not applicable
A93(M)(L)(Z)	D-A93(M)(L)(Z)	to flange size 16)
M9//	_	Without auto switch (with built-in magnet)

Standard lead wire length is 0.5 m. Add "L" to the end of the part number when 3 m is desired, "M" when 1 m, and "Z" when 5 m. Example) -M9NL

### 5 Number of auto switches/Mounting position

Symbol	Quantity	Mounting position		
Nil	Without auto switch	_		
Α	2 pcs.	Valve open/closed		
В	1 pc.	Valve open		
С	1 pc.	Valve closed		

### (6) Rated voltage

U Ha	ica voitage	CE-compliant
1	100 VAC, 50/60 Hz	_
2	200 VAC, 50/60 Hz	_
3	110 VAC, 50/60 Hz	
4	220 VAC, 50/60 Hz	_
5	24 VDC	0
6	12 VDC	$\overline{}$

### (7) Electrical entry

G	Grommet (Lead wire length 300 mm)
Н	Grommet (Lead wire length 600 mm)
L	L type plug connector
М	M type plug connector

### 8 Light/Surge voltage suppressor 10 CE-compliant

Nil	None
S	With surge voltage suppressor
Z	With light/surge voltage suppressor
U	With light/surge voltage suppressor (Non-polar type)

CE-compliant

XLA

XL□O

XM□

XY□ D-□

XSA XVD

XGT

CYV

- \* S type: Not available for AC.
- \* U type: DC only.

### • Body surface treatment

l	Symbol	Surface treatment						
i	Nil	External: Hard anodized Internal: Raw material						
i	Α	External: Hard anodized Internal: Oxalic acid anodized						

(9) Body surface treatment/Seal material and its changed part

### Seal material

Symbol	Seal material	Compound No.		
Nil	FKM	1349-80*		
N1	EPDM	2101-80*		
P1	Barrel Perfluoro®	70W		
Q1	Kalrez®	4079		
R1		SS592		
R2	Chemraz <sup>®</sup>	SS630		
R3		SSE38		
S1	VMQ	1232-70*		
T1	FKM for Plasma	3310-75*		
U1	ULTIC ARMOR®	UA4640		
* Produced by Mit	subishi Cable Industries, Ltd.			

Barrel Perfluoro® is a registered trademark of Matsumura Oil Co., Ltd. Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

Chemraz® is a registered trademark of Greene, Tweed Technologies, Inc. ULTIC ARMOR® is a registered trademark of Nippon Valqua Industries, Ltd.

### · Seal material changed part and leakage

Symbol	Note 2) Changed	Leakage (Pa·m³/s or less) Note 1)					
Cyllibol	part	Internal	External				
Nil	None	1.3 x 10 <sup>-10</sup> (FKM)	1.3 x 10 <sup>-11</sup> (FKM)				
Α	2,3	1.3 x 10 <sup>-8</sup>	1.3 x 10 <sup>-9</sup>				
В	2	1.3 x 10 <sup>-8</sup>	1.3 x 10 <sup>-11</sup> (FKM)				
С	3	1.3 x 10 <sup>-10</sup> (FKM)	1.3 x 10 <sup>-9</sup>				

Note 1) Values at normal temperature, excluding gas permeation.

Note 2) Refer to parts number of "Construction" on page 418 for changed part. Number indicates parts number of "Construction" accordingly.

To order something other than "Nil" (standard), list the symbols starting with "X," followed by each symbol for "body surface treatment," "seal material" and then "changed part".

### Example) XLAV-16-M9NA-1G-XAN1A

Note 1) Option specifications/Combinations

This model has indicator, auto switch and K(DN) flange options, but high temperature/heater options are not available.

Note 2) Solenoid valves XLAV-16, 25, 40, 50: SYJ319, XLAV-63, 80, 100, 160: SYJ519

Example) SYJ319-1GS, etc. \* For details, consult your SMC sales representative.

\* For option "Q", the solenoid valve should be a CE-compliant product.

### XLA/XLAV Series


### **Specifications**

Model		XLA(V)-16 XLA(V)-25 XLA(V)-40 XLA(V)-50 XLA(V)-63 XLA(V)-80 XLA(V)-100 XLA					XLA(V)-160		
Valve type			Normally closed (Pressurize to open, Spring seal)					•	
Fluid					Inert gas un	der vacuum			
Operating	XLA			5 to 60	(High temper	rature type: 5	to 150)		
temperature (°C)	XLAV				5 to	50			
Operating pressure (Pa) (abs)  1 x 10 <sup>-6</sup> to atmospheric pressure									
Conductance (L/s) No	te 1)	5 14 45 80 160 200 300			800				
	Internal	In case	In case of standard material FKM: 1.3 x 10 <sup>-10</sup> at normal temperature, excluding gas permeation						
Leakage (Pa·m³/s)	External	In case	In case of standard material FKM: 1.3 x 10 <sup>-11</sup> at normal temperature, excluding gas permeation						neation
Flange type	•		KF (	NW)			KF (NW)	, K (DN)	
Principal materials		Body: Alumin	um alloy, Bell	ows: Stainless	steel 316L, M	Main part: Stair	nless steel, FK	M (Standard s	eal material)
Surface treatment				External: H	lard anodized	Internal: Ra	aw material		
Pilot pressure (MPa)	(G)				0.4 to	o 0.7			
Dilat next size	XLA	M	M5				Rc1/8 Rc1/4		
Pilot port size	XLAV		M5: Port 1(P), Port 3(R) Rc1/8: Port 1(P), M5				), M5: Port 3(	R)	
Maight (kg)	XLA	0.25	0.45	1.1	1.6	2.9	5.0	10.6	18.5
Weight (kg)	XLAV	0.29	0.49	1.14	1.64	2.96	5.06	10.7	18.6

Note 1) Conductance is the value for an elbow with the same dimensions.

Note 2) For valve heater specifications, refer to "Common Option [1] Heater" on page 459.

### Construction/Operation

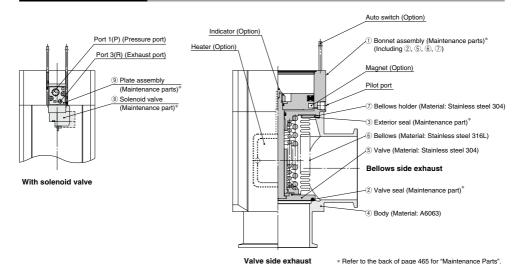

### <Working principle>

By applying the pilot pressure from the pilot port, the piston-coupled valve overcomes the spring force or operating force by pressure, and the valve opens.

For the XLAV, the pilot pressure is always applied to the port 1(P), and the valve opens when the solenoid valve is turned ON and closes when it is turned OFF.

### <Options>

Auto switch: The magnet activates the auto switch. With 2 auto switches, the open and closed positions are detected, and with 1 auto switch, either the open or closed position is detected. Auto switches are applicable at ordinary temperatures only (5 to 60°C).

Heater: Simple heating is performed using thermistors. The valve body can be heated to approximately 100 or 120°C, depending on the heater option and the valve size. The type and number of thermistors to be used will vary depending upon size and setting temperature. In the case of high temperature specifications, the bonnet assembly is a heat resistant structure. This does not apply in cases where a solenoid valve is


Indicator: When the valve is open, an orange marker appears in the center of the name plate.



## Aluminum High Vacuum Angle Valve XLA/XLAV Series

### **Dimensions**

### XLA/Air operated

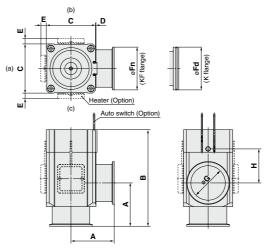

									(mm)
Model	Α	В	С	D	E Note 1)	Fn	Fd	G	Н
XLA-16	40	103	38	1	-	30	-	17	40
XLA-25	50	113	48	1	12	40	-	26	39
XLA-40	65	158	66	2	11	55	-	41	63
XLA-50	70	170	79	2	11	75	-	52	68
XLA-63	88	196	100	3	11	87	95	70	69
XLA-80	90	235	117	3	11	114	110	83	96
XLA-100	108	300	154	3	11	134	130	102	131
XLA-160	138	315	200	3	11	190	180	153	112


Note 1) Dimension E applies when heater option is included. (Lead wire length: approx. 1 m)


Note 2) (a), (b) and (c) in the above drawing indicate heater mounting positions.


Moreover, heater mounting positions will differ depending on the type of heater.

For further details, refer to mounting positions under "Replacement Heaters" on page 465.

### XLAV/With solenoid valve







					(mm)
Model	J	K	L	M	N
XLAV-16	35.5	12.3	10.2	3.6	3.6
XLAV-25	40.5	13.8	10.2	3.6	3.6
XLAV-40	50.5	21.6	10.2	3.6	3.6
XLAV-50	57	24.6	10.2	3.6	3.6

- \* Other dimensions are the same as the XLA.
- \* For details, consult your SMC sales representative.

					(mm)
Model	J	K	L	M	N
XLAV-63	78.5	28.7	12	4	2
XLAV-80	87	38.7	12	4	2
XLAV-100	105.5	50.7	12	4	2
XLAV-160	128.5	57.7	12	4	2

- \* Other dimensions are the same as the XLA.
- \* For details, consult your SMC sales representative.



419 B

XLA

 $XL\square$ XL□Q XM□ XY□

D-□


XSA XVD XGT CYV

# Aluminum High Vacuum Angle Valve Double Acting/Bellows Seal

The production of flange sizes 16, 25, 40, 50, 63, and 80 for the XLC(V) series has been discontinued. Please select the new XLC(V)-2 type. See <a href="here">here</a> for details.



## XLC/XLCV Series

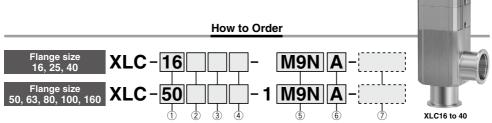

### 1 Flange size


Triange 312
Size
16
25
40
50
63
80
100
160

### 2 Flange type

· iuiigo ijpo			
	Symbol	Type	Applicable flange
	Nil	KF (NW)	16, 25, 40, 50, 63, 80 100, 160
	D	K (DN)	63, 80, 100, 160

### 3 Pilot port direction

Symbol	Pilot port direction
Nil	Flange side
K	Left flange surface
L	Rear flange surface
M	Right flange surface



### 4 Temperature specifications/Heater

Symbol	Temperature	Heater
Nil	5 to 60°C	_
High H0		_
temperature H4	5 to 150°C	With 100°C heater
type H5		With 120°C heater

Note) Size 16 is not applicable for H4, H5, Size 25 not for H4.

### 6 Number of auto switches/Mounting position

Symbol	Quantity	Mounting position
Nil	Without auto switch	_
Α	2 pcs.	Valve open/closed
В	1 pc.	Valve open
С	1 pc.	Valve closed

### 5 Auto switch type

Auto switch model	Remarks
_	Without auto switch (without built-in magnet)
D-M9N(M)(L)(Z)	
D-M9P(M)(L)(Z)	Solid state auto switch
D-M9B(M)(L)(Z)	
D-A90(L)	Reed auto switch (Not applicable
D-A93(M)(L)(Z)	to flange size 16)
_	Without auto switch (with built-in magnet)
	— D-M9N(M)(L)(Z) D-M9P(M)(L)(Z) D-M9B(M)(L)(Z) D-A90(L)

Note 1) Auto switches shown above cannot be mounted on the high temperature type. For the high temperature type, a semi-standard product that uses the heat resistant auto switch D-F7NJ\* is available. For details, please contact SMC.

Note 2) Standard lead wire length is 0.5 m. Add "L" to the end of the part number when 3 m is desired, "M" when 1 m, and "Z" when 5 m. Example) -M9NL

### Dody surface treatment/Seal material and its changed part

### Body surface treatment

Symbol	Surface treatment		
Nil External: Hard anodized Internal: Raw mater			
Α	External: Hard anodized Internal: Oxalic acid anodized		

### Seal material

Symbol	Seal material	Compound No.	
Nil	FKM	1349-80*	
N1	EPDM	2101-80*	
P1	Barrel Perfluoro®	70W	
Q1	Kalrez®	4079	
R1		SS592	
R2	Chemraz <sup>®</sup>	SS630	
R3		SSE38	
S1	VMQ	1232-70*	
T1 FKM for Plasma		3310-75*	
U1	ULTIC ARMOR®	UA4640	
* Produced by Mitsubishi Cable Industries, Ltd.			

### • Seal material changed part and leakage

	Symbol	Changed	Leakage (Pa·m³/s or less) Note 1)			
	Cymbol	part	Internal	External		
	Nil	None	1.3 x 10 <sup>-10</sup> (FKM)	1.3 x 10 <sup>-11</sup> (FKM)		
A 2 B C		2,3	1.3 x 10 <sup>-8</sup>	1.3 x 10 <sup>-9</sup>		
		2	1.3 x 10 <sup>-8</sup>	1.3 x 10 <sup>-11</sup> (FKM)		
		3	1.3 x 10 <sup>-10</sup> (FKM)	1.3 x 10 <sup>-9</sup>		
	Note 1) Values at normal temperature, excluding gas permeation.					

Note 2) Refer to parts number of "Construction" on page 422 for changed part. Number indicates parts number of "Construction" accordingly.

To order something other than "Nil" (standard), list the symbols starting with "X," followed by each symbol for "body surface treatment," "seal material" and then "changed part".

### Example) XLC-16-M9NA-XAN1A


Barrel Perfluoro® is a registered trademark of Matsumura Oil Co., Ltd. Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

Chemraz® is a registered trademark of Greene, Tweed Technologies, Inc. ULTIC ARMOR® is a registered trademark of Nippon Valqua Industries, I tri

## Aluminum High Vacuum Angle Valve XLC/XLCV Series

### Operated/with Solenoid

The production of flange sizes 16, 25, 40, 50, 63, and 80 for the XLC(V) series has been discontinued. Please select the new XLC(V)-2 type. See here for details.

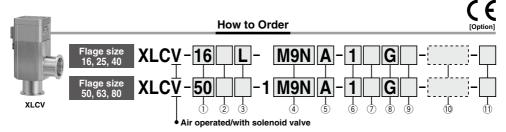

### 1 Flance size

· i iuiige oiz
Size
16
25
40
50
63
80

### (2) Flange type

⊕ . iaiige type		
Symbol	Type	Applicable flange
Nil	KF (NW)	16, 25, 40, 50, 63, 80
D	K (DN)	63, 80

### 3 Pilot port direction

Symbol	Solenoid valve direction	
K	Left flange surface	
L	Rear flange surface	
М	Right flange surface	
Nil	flange surface	

- Rear flange surface surface surface flange flange Right 1 Left
- \* M type plug connector (AC power supply) not attached for M of sizes 16 and 25.
- M: Size 16, 25, 40 only. \* Nil: Size 50, 63, 80 only

### 4 Auto switch type

Symbol	Auto switch model	Remarks		
Nil	_	Without auto switch (without built-in magnet)		
	D-M9N(M)(L)(Z)			
M9P(M)(L)(Z)	D-M9P(M)(L)(Z)	Solid state auto switch		
M9B(M)(L)(Z)	D-M9B(M)(L)(Z)			
A90(L)	D-A90(L)	Reed auto switch (Not applicable		
A93(M)(L)(Z)	D-A93(M)(L)(Z)	to flange size 16)		
M9//	_	Without auto switch (with built-in magnet)		

Standard lead wire length is 0.5 m. Add "L" to the end of the part number when 3 m is desired, "M" when 1 m, and "Z" when 5 m. Example) -M9NL

### 5 Number of auto switches/Mounting position

		J
Symbol	Quantity	Mounting position
Nil	Without auto switch	_
Α	2 pcs.	Valve open/closed
В	1 pc.	Valve open
С	1 pc.	Valve closed

### (6) Rated voltage

o nateu voitage		CE-compliant
1	100 VAC, 50/60 Hz	_
2	200 VAC, 50/60 Hz	_
3	110 VAC, 50/60 Hz	_
4	220 VAC, 50/60 Hz	_
5	24 VDC	0
6	12 VDC	0

<ul><li>I ype of actuation</li></ul>			
Nil	2 position single		
W 2 position double			

### 8 Electrical entry

G	Grommet (Lead wire length 300 mm)
Н	Grommet (Lead wire length 600 mm)
L	L type plug connector
M	M type plug connector

### 9 Light/Surge voltage suppressor

Nil	None		
S	With surge voltage suppressor		
Z	With light/surge voltage suppressor		
U With light/surge voltage suppressor (Non-polar type)			

\* S type: Not available for AC.

### 10 Body surface treatment/Seal material and its changed part

### Body surface treatment

Symbol	Surface treatment		
Nil	External: Hard anodized Internal: Raw material		
Α	External: Hard anodized Internal: Oxalic acid anodized		

### Seal material

our material		
Symbol	Seal material	Compound No.
Nil	FKM	1349-80*
N1	EPDM	2101-80*
P1	Barrel Perfluoro®	70W
Q1	Kalrez <sup>®</sup>	4079
R1		SS592
R2	Chemraz <sup>®</sup>	SS630
R3		SSE38
S1	VMQ	1232-70*
T1	FKM for Plasma	3310-75*
U1	ULTIC ARMOR®	UA4640

\* Produced by Mitsubishi Cable Industries, Ltd.

⊕ CL-compnant		- Du.
Nil		Kal
1411		Cor
Q	CE-compliant	001

(1) CE-compliant Barrel Perfluoro® is a registered trademark of Matsumura Oil Co., Ltd. lrez® is a registered trademark of E. I. du Pont de Nemours and mpany or its affiliates

> emraz® is a registered trademark of Greene, Tweed Technologies, Inc. ULTIC ARMOR® is a registered trademark of Nippon Valqua Industries

N	ш	None		
S		With surge voltage suppressor		
Z		With light/surge voltage suppressor		
U	U With light/surge voltage suppressor (Non-polar type)			
0: 11: 11:11:4:40				

\* U type: DC only.

### Seal material changed part and leakage

Symbol	Note 2) Changed	Leakage (Pa·m³/s or less) Note 1)	
Cymbol	part	Internal	External
Nil	None	1.3 x 10 <sup>-10</sup> (FKM)	1.3 x 10 <sup>-11</sup> (FKM)
Α	2,3	1.3 x 10 <sup>-8</sup>	1.3 x 10 <sup>-9</sup>
В	2	1.3 x 10 <sup>-8</sup>	1.3 x 10 <sup>-11</sup> (FKM)
С	3	1.3 x 10 <sup>-10</sup> (FKM)	1.3 x 10 <sup>-9</sup>

Note 1) Values at normal temperature, excluding gas permeation. Note 2) Refer to parts number of "Construction" on page 422 for changed part.

Number indicates parts number of "Construction" accordingly.

To order something other than "Nil" (standard), list the symbols starting with "X," followed by each symbol for "body surface treatment," "seal material" and then "changed part".

### Example) XLCV-16-M9NA-1G-XAN1A

Note 1) Option specifications/Combinations

This model has auto switch and K(DN) flange options, but high temperature/heater options are not available.

### Note 2) Solenoid valves

2 position single; XLCV-16, 25, 40; SYJ3190 XLCV-50, 63, 80, 100, 160; SY3120 2 position double: XLCV-16, 25, 40: SYJ3290 XLCV-50, 63, 80, 100, 160: SY3220 Example) SYJ3190-1GS, SYJ3290-1GS, SY3120-1GS-C4, SY3220-1GS-C4 \* For details, consult your SMC sales representative

\* For option "Q", the solenoid valve should be a CE-compliant product.



XLA

XL□Q

XM□

XY□ D-□

XSA XVD

XGT

### XLC/XLCV Series

### **Specifications**

Model		XLC(V)-16	XLC(V)-25	XLC(V)-40	XLC(V)-50	XLC(V)-63	XLC(V)-80	XLC-100	XLC-160
Valve type				Double acting	(Dual operation	n), Pressurize	to open/close		
Fluid					Inert gas un	der vacuum			
Operating	XLC			5 to 60	) (High tempe	rature type: 5	to 150)		
temperature (°C)	XLCV			5 to	50			-	_
Operating pressure (	Pa) (abs)			1:	x 10 <sup>-6</sup> to atmo	spheric pressu	ıre		
Conductance (L/s) Note 1)		5	14	45	80	160	200	300	800
Leakage (Pa·m³/s)	Internal	In case of standard material FKM: 1.3 x 10 <sup>-10</sup> at normal temperature, excluding gas permeation							
Leakage (Pa·III /S)	External	In case of standard material FKM: 1.3 x 10 <sup>-11</sup> at normal temperature, excluding gas permeation							
Flange type			KF(NW) KF (NW), K (DN)						
Principal materials		Body: Aluminum alloy, Bellows: Stainless steel 316L, Main part: Stainless steel, FKM (Standard seal material)							
Surface treatment			External: Hard anodized Internal: Raw material						
Pilot pressure (MPa)	(G)		0.3 to 0.6 0.4 to 0.6						
XLC XLC		M5 Rc1/8					Rc1/4		
Pilot port size	XLCV		M5: Port 1(P), Port 3(R), Port 5(R)				-	_	
Woight (kg)	XLC	0.28	0.46	1.1	1.4	2.3	4.0	8.7	14.5
Weight (kg)	XLCV	0.32	0.5	1.15	1.5	2.4	4.1	-	_


Magnet (Option)

Heater (Option)


Note 1) Conductance is the value for an elbow with the same dimensions.

Note 2) For valve heater specifications, refer to "Common Option [1] Heater" on page 459.

### Construction/Operation




### With solenoid valve (XLCV16 to 40)





### <Working principle>

By applying the pilot pressure from the pilot port P-1, the piston-coupled valve overcomes the operating force by pressure, and the valve opens. (Pilot port P-2 is open.) Conversely, by applying the pilot pressure to the pilot port P-2, the valve closes. (Pilot port P-1 is open.) For the XLCV, the pilot pressure is always applied to the port 1(P), and the valve opens when the solenoid valve is turned ON and closes when it is turned OFF. For the double solenoid, the valve moves to the opposite side from that in which the solenoid valve is turned ON.

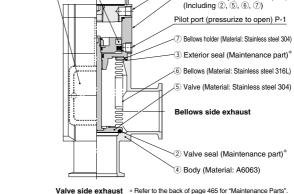

Auto switch (Option)

Pilot port (pressurize to close) P-2

Bonnet assembly (Maintenance parts)\*

### <Options>

Auto switch: The magnet activates the auto switch. With 2 auto switches, the open and closed positions are detected, and with 1 auto switch, either the open or closed position is detected. Auto switches are applicable at


ordinary temperatures only (5 to 60°C).

Heater: Simple heating is performed using thermistors. The valve body can be heated to approximately 100 or 120°C, depending on the heater option and the valve size. The type and number of thermistors to be used will vary depending upon size and setting temperature. In the case of high temperature specifications, the bonnet assembly is a heat resistant structure. This does not apply in cases where a solenoid valve is attached.



### **Dimensions**


### XLC16, 25, 40/ Air operated

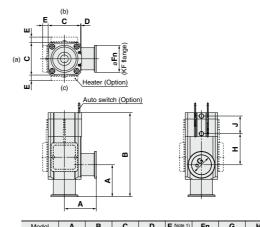

Note 1) Dimension E applies when heater option is included. (Lead wire length: approx. 1 m)									
XLC-40	65	171	66	2	11	55	41	63	36
XLC-25	50	121	48	1	12	40	26	39	28
XLC-16	40	110	38	1		30	17	40	26

Note 1) Dimension E applies when heater option is included. (Lead wire length: approx. 1 m Note 2) (a), (b) and (c) in the above drawing indicate heater mounting positions. Moreover, heater mounting positions will differ depending on the type of heater. For further details, refer to mounting positions under "Replacement Heaters" on page 465.

### XLC50, 63, 80, 100, 160/ Air operated

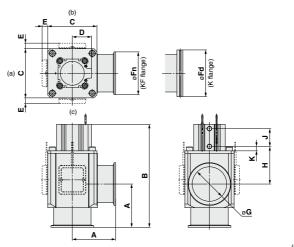

											(111111)
Model	Α	В	С	D	E Note 1)	Fn	Fd	G	Н	J	K
XLC-50	70	183	80	31	10.5	75	_	52	77	29	10.5
XLC-63	88	209	100	39	11	87	95	70	76.5	36	9
XLC-80	90	250	117	45.5	11	114	110	83	105	44	9
XLC-100	108	317.5	154	55	11	134	130	102	139	58	9
XLC-160	138	339	200	65	11	190	180	153	124	62	12.5

Note 1) Dimension E applies when heater option is included. (Lead wire length: approx. 1 m)
Note 2) (a), (b) and (c) in the above drawing indicate heater mounting positions. Moreover, heater mounting
positions will differ depending on the type of heater. For further details, refer to mounting positions under
"Replacement Heaters" on page 465.



(mm)


XLA

XLQ XMQ XYQ D-Q XSA XVD XGT

## XLC/XLCV Series


### **Dimensions**

### XLCV/With solenoid valve

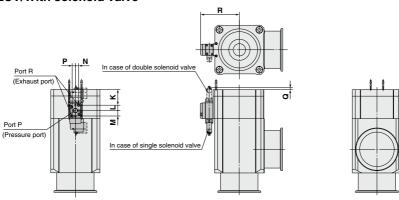

							(111111)
Model	K	L	M	N	P	Q	R
XLCV-16	14.3	9.2	6.4	3.5	2.7	17.3	36
XLCV-25	15.8	9.2	6.4	3.5	2.7	15.8	41
XLCV-40	29	9.2	6.4	3.5	2.7	2.6	51

<sup>\*</sup> Other dimensions are the same as the XLC. Note) For details, consult your SMC sales representative.

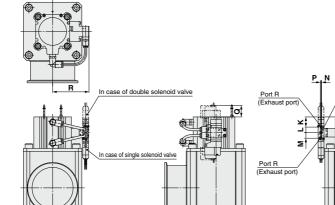

Port P

(Pressure port)

							(mm)
Model	K	L	M	N	P	Q	R
XLCV-50	12.5	9.5	9.5	1	1	23.5	52.6
XLCV-63	17.4	9.5	9.5	1	1	18.6	62.3
XLCV-80	23.5	9.5	9.5	1	1	12.4	70.8

<sup>\*</sup> Other dimensions are the same as the XLC. Note) For details, consult your SMC sales representative.

XLA

XL□

XL\(\tag{X}\)

XM□ XY□

XSA

XVD

XGT

## **Aluminum High Vacuum Angle Valve** Normally Closed/O-ring Seal

The production of flange sizes 16, 25, 40, 50, 63, and 80 for the XLF(V) series has been discontinued. Please select the new XLF(V)-2 type. See here for details.




## XLF/XLFV Series



How to Order



Made to Order specifications (For details, refer to pages 430 to 435)



### 1 Flance size


⊙uge o	
Size	
16	
25	
40	]
50	
63	
80	]
100	]
160	]

### (2) Flange type

	· ,.	
Symbol	Type	Applicable flange
Nil	KF (NW)	16, 25, 40, 50, 63 80, 100, 160
D	K (DN)	63, 80, 100, 160

### (3) Indicator/Pilot port direction

© 1110	ioutoi/i iiot	port un cotion
Symbol	Indicator	Pilot port direction
Nil	Without indicator	Flange side
Α		Flange side
F	With	Left flange surface
G	indicator	Rear flange surface
J		Right flange surface
K	Without	Left flange surface
L	indicator	Rear flange surface
M	indicator	Right flange surface



4 Temperature specifications/Heater

Symbol		Temperature	Heater		
Nil		5 to 60°C	_		
High temperature	H0		_		
temperature	H4	5 to 150°C	With 100°C heater		
type	H5		With 120°C heater		

Note) Size 16 is not applicable for H4. H5. Size 25 not for H4.

### 6 Number of auto switches/Mounting position

Symbol	Quantity	Mounting position
Nil	Without auto switch	_
Α	2 pcs.	Valve open/closed
В	1 pc.	Valve open
С	1 pc.	Valve closed

### 5 Auto switch type

Symbol	Auto switch model	Remarks
Nil	_	Without auto switch (without built-in magnet)
M9N(M)(L)(Z)	D-M9N(M)(L)(Z)	
M9P(M)(L)(Z)	D-M9P(M)(L)(Z)	Solid state auto switch
M9B(M)(L)(Z)	D-M9B(M)(L)(Z)	
A90(L)	D-A90(L)	Reed auto switch (Not applicable
A93(M)(L)(Z)	D-A93(M)(L)(Z)	to flange size 16)
M9//	_	Without auto switch (with built-in magnet)

Note 1) Auto switches shown above cannot be mounted on the high temperature type. For the high temperature type, a semi-standard product that uses the heat resistant auto switch D-F7NJ\* is available. For details, please contact SMC

Note 2) Standard lead wire length is 0.5 m. Add "I" to the end of the part number when 3 m is desired, "M" when 1 m, and "Z" when 5 m. Example) -M9NL

### O Body surface treatment/Seal material and its changed part

Surface treatment

External: Hard anodized Internal: Raw material

### . Body surface treatment

Symbol

Nil

U1

A	External: Hard anodized Internal: Oxalic acid anodized							
• Seal materia	Seal material							
Symbol	Seal material	Compound No.						
Nil	FKM	1349-80*						
N1	EPDM	2101-80*						
P1	Barrel Perfluoro®	70W						
Q1	Kalrez®	4079						
R1		SS592						
R2	Chemraz®	SS630						
R3		SSE38						
S1	VMQ	1232-70*						
T1	FKM for Plasma	3310-75*						
114	ULTIC	1104640						

<sup>\*</sup> Produced by Mitsubishi Cable Industries, Ltd.

ARMOR®

### · Seal material changed part and leakage

Symbol	Note 2) Changed	Leakage (Pa·m³/s or less) Note 1)			
Cymbol	part	Internal	External		
Nil	None	1.3 x 10 <sup>-10</sup> (FKM)	1.3 x 10 <sup>-10</sup> (FKM)		
Α	2,3	1.3 x 10 <sup>-8</sup>	1.3 x 10 <sup>-8</sup>		
В	2	1.3 x 10 <sup>-8</sup>	1.3 x 10 <sup>-10</sup> (FKM)		
С	3	1.3 x 10 <sup>-10</sup> (FKM)	1.3 x 10 <sup>-8</sup>		

Note 1) Values at normal temperature, excluding gas permeation.

Note 2) Refer to parts number of "Construction" on page 428 for changed part. Number indicates parts number of "Construction" accordingly

Note 3) Part 3 (exterior seal) is not changeable for sizes 16 and 25.

To order something other than "Nil" (standard), list the symbols starting with "X," followed by each symbol for "body surface treatment," "seal material" and then "changed part".

### Example) XLF-40-M9NA-XAN1A

Barrel Perfluoro® is a registered trademark of Matsumura Oil Co., Ltd. Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

Chemraz® is a registered trademark of Greene, Tweed Technologies, Inc. ULTIC ARMOR® is a registered trademark of Nippon Valqua Industries,

UA4640


## High Vacuum Angle Valve XLF/XLFV Series

### **Operated/with Solenoid**

The production of flange sizes 16, 25, 40, 50, 63, and 80 for the XLF(V) series has been discontinued. Please select the new XLF(V)-2 type. See here for details.



### How to Order



Air operated/with solenoid valve

### 1 Flance size

Size
16
25
40
50
63
80
100
160

### 2 Flange type

Symbol	Type	Applicable flange
Nil	KF (NW)	16, 25, 40, 50, 63 80, 100, 160
D	K (DN)	63, 80, 100, 160

### (3) Indicator/Pilot port direction

Symbol	Indicator	Pilot port direction
F	With	Left flange surface
G	indicator	Rear flange surface
J		Right flange surface
K	Without	Left flange surface
L		Rear flange surface
М	iridicator	Right flange surface



\* M type plug connector (AC power supply) not attached for J, M of sizes 16 and 25.

### 4 Auto switch type

Symbol	Auto switch model	Remarks		
Nil	_	Without auto switch (without built-in magnet)		
M9N(M)(L)(Z)	D-M9N(M)(L)(Z)			
M9P(M)(L)(Z)	D-M9P(M)(L)(Z)	Solid state auto switch		
M9B(M)(L)(Z)	D-M9B(M)(L)(Z)			
A90(L)	D-A90(L)	Reed auto switch (Not applicable		
A93(M)(L)(Z)	D-A93(M)(L)(Z)	to flange size 16)		
M9//	_	Without auto switch (with built-in magnet)		

3 m is desired, "M" when 1 m, and "Z" when 5 m.

Symbol	Auto Switch model	nemarks	
Nil	_	Without auto switch (without built-in magnet)	
M9N(M)(L)(Z)	D-M9N(M)(L)(Z)		
M9P(M)(L)(Z)	D-M9P(M)(L)(Z)	Solid state auto switch	
M9B(M)(L)(Z)	D-M9B(M)(L)(Z)		
A90(L)	D-A90(L)	Reed auto switch (Not applicable	
A93(M)(L)(Z)	D-A93(M)(L)(Z)	to flange size 16)	
M9//	_	Without auto switch (with built-in magnet)	
Standard load wire length is 0.5 m. Add "I " to the end of the part number when			

Example) -M9NL

Symbol		Qua	antity	Mounting position	
Nil		Vithout a	uto switch	_	
Α		2	ocs.	Valve open/closed	
В		1	pc.	Valve open	
С		1	pc.	Valve closed	

### (A) Rated voltage

· iia	CE-compliant	
1	100 VAC, 50/60 Hz	_
2	200 VAC, 50/60 Hz	_
3	110 VAC, 50/60 Hz	_
4	220 VAC, 50/60 Hz	_
5	24 VDC	0
6	12 VDC	0

### (7) Electrical entry

G	Grommet (Lead wire length 300 mm)
Н	Grommet (Lead wire length 600 mm)
L	L type plug connector
M	M type plug connector

### 8 Light/Surge voltage suppressor 10 CE-compliant

Solumber of auto switches/Mounting position

= = igiid cai go roitago cappioso				
Nil	None			
s	With surge voltage suppressor			
Z	With light/surge voltage suppressor			
U	With light/surge voltage suppressor (Non-polar type)			

CE-compliant

XLA

XL\( \Bar{Q}\)

XM□

XY□ D-□

XSA XVD

XGT

CYV

- \* S type: Not available for AC.
- \* U type: DC only.

### • Body surface treatment

Symbol	Surface treatment	
Nil	External: Hard anodized Internal: Raw material	
Α	External: Hard anodized Internal: Oxalic acid anodized	
	_	

(9) Body surface treatment/Seal material and its changed part

### Seal material

	==	
Symbol	Seal material	Compound No
Nil	FKM	1349-80*
N1	EPDM	2101-80*
P1	Barrel Perfluoro®	70W
Q1	Kalrez <sup>®</sup>	4079
R1		SS592
R2	Chemraz®	SS630
R3		SSE38
S1	VMQ	1232-70*
T1	FKM for Plasma	3310-75*
U1	ULTIC ARMOR®	UA4640

\* Produced by Mitsubishi Cable Industries, Ltd.

Barrel Perfluoro® is a registered trademark of Matsumura Oil Co., Ltd. Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

Chemraz® is a registered trademark of Greene, Tweed Technologies, Inc. ULTIC ARMOR® is a registered trademark of Nippon Valqua Industries, Ltd.

• Sear	Sear material changed part and leakage				
Symbol Changed		Leakage (Pa·m³/s or less) Note 1)			
Cymbol	part	Internal	External		
Nil	None	1.3 x 10 <sup>-10</sup> (FKM)	1.3 x 10 <sup>-10</sup> (FKM)		
Α	2,3	1.3 x 10 <sup>-8</sup>	1.3 x 10 <sup>-8</sup>		
В	2	1.3 x 10 <sup>-8</sup>	1.3 x 10 <sup>-10</sup> (FKM)		
С	3	1.3 x 10 <sup>-10</sup> (FKM)	1.3 x 10 <sup>-8</sup>		

Note 1) Values at normal temperature, excluding gas permeation.

Note 2) Refer to parts number of "Construction" on page 428 for changed part. Number indicates parts number of "Construction" accordingly

Note 3) Part 3 (exterior seal) is not changeable for sizes 16 and 25.

To order something other than "Nil" (standard), list the symbols starting with "X," followed by each symbol for "body surface treatment," "seal material" and then "changed part".

### Example) XLFV-40-M9NA-1G-XAN1A

Note 1) Option specifications/Combinations

This model has indicator, auto switch and K(DN) flange options, but high temperature/heater options are not available.

Note 2) Solenoid valves

XLFV-16, 25, 40: SYJ319, XLFV-50, 63, 80, 100, 160: SYJ519 Example) SYJ319-1GS.

\* For details, consult your SMC sales representative

\* For option "Q", the solenoid valve should be a CE-compliant product.

### XLF/XLFV Series

### **Specifications**


Model		XLF(V)-16	XLF(V)-25	XLF(V)-40	XLF(V)-50	XLF(V)-63	XLF(V)-80	XLF(V)-100	XLF(V)-160
Valve type				Normally cl	osed (Pressu	rize to open, §	Spring seal)		
Fluid					Inert gas un	der vacuum			
Operating	XLF			5 to 60	(High temper	ature type: 5	to 150)		
temperature (°C)	XLFV				5 to	50			
Operating pressure (F	Pa) (abs)			1 >	10 <sup>-5</sup> to atmos	spheric pressi	ıre		
Conductance (L/s) Not	e 1)	5	14	45	80	160	200	300	800
Leakage (Pa·m³/s)	Internal	In case of standard material FKM: 1.3 x 10 <sup>-10</sup> at normal temperature, excluding gas permeation							
Leakage (Pa+III /S)	External	In case	In case of standard material FKM: 1.3 x 10 <sup>-10</sup> at normal temperature, excluding gas permeation						
Flange type		KF (NW) KF (NW), K (DN)							
Principal materials No	te 3)	Body: Aluminum alloy, Main part: Stainless steel, FKM (Standard seal material)							
Surface treatment				External: Hard anodized Internal: Raw material					
Pilot pressure (MPa) (	(G)	0.4 to 0.7							
Pilot port size	XLF	N	M5			Rc1/8 Rc1/4			
Pilot port size	XLFV	M5: F	Port 1(P), Port	t 3(R)		Rc1/8: Port 1(P), M5: Port 3(R)			
Waight (kg)	XLF	0.25	0.45	1.1	1.6	3.0	4.8	10	18
Weight (kg)	XLFV	0.29	0.49	1.14	1.66	3.06	4.86	10.1	18.1

Note 1) Conductance is the value for an elbow with the same dimensions.

Note 2) For valve heater specifications, refer to "Common Option [1] Heater" on page 459.

Note 3) A coating of vacuum grease [Y-VAC2] is applied to the seal-material sliding portion of the vacuum part.

### Construction/Operation

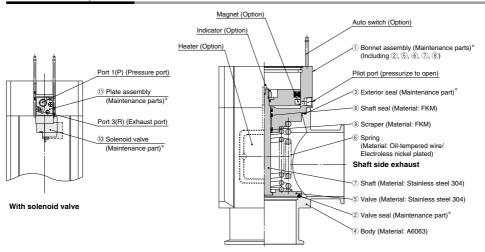

### Valve side exhaust \* Refer to the back of page 465 for "Maintenance Parts".

### <Working principle>

By applying the pilot pressure from the pilot port, the piston-coupled valve overcomes the spring force or operating force by pressure, and the valve opens. For the XLFV, the pilot pressure is always applied to the port 1(P), and the valve opens when the solenoid valve is turned OFF.

### <Options>

Auto switch: The magnet activates the auto switch. With 2 auto switches, the open and closed positions are detected, and with 1 auto switch, either the open or closed position is detected. Auto switches are applicable at ordinary temperatures only (5 to 60°C).

Heater: Simple heating is performed using thermistors. The valve body can be heated to approximately 100 or 120°C, depending on the heater option and the valve size. The type and number of thermistors to be used will vary depending upon size and setting temperature. In the case of high temperature specifications, the bonnet assembly is a heat resistant structure. This does not apply in cases where a solenoid valve is


Indicator: When the valve is open, an orange marker appears in the center of the name plate.



## Aluminum High Vacuum Angle Valve XLF/XLFV Series

### **Dimensions**

### XLF/Air operated

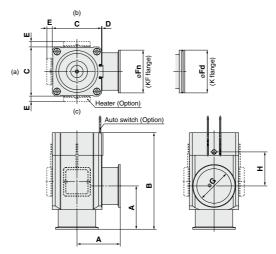


									()
Model	Α	В	С	D	E Note 1)	Fn	Fd	G	Н
XLF-16	40	103	38	1	_	30	_	17	40
XLF-25	50	113	48	1	12	40	_	26	39
XLF-40	65	158	66	2	11	55	_	41	63
XLF-50	70	170	79	2	11	75	_	52	68
XLF-63	88	196	100	3	11	87	95	70	69
XLF-80	90	235	117	3	11	114	110	83	96
XLF-100	108	299	154	3	11	134	130	102	131
XLF-160	138	315	200	3	11	190	180	153	112

Note 1) Dimension E applies when heater option is included. (Lead wire length: approx. 1 m) Note 2) (a), (b) and (c) in the above drawing indicate heater mounting positions.


Moreover, heater mounting positions will differ depending on the type of heater.

For further details, refer to mounting positions under "Replacement Heaters" on page 465.

### XLFV/With solenoid valve



· · ·	1



(mm)

Model	J	K	L	M	N
XLFV-16	35.5	12.3	10.2	3.6	3.6
XLFV-25	40.5	13.8	10.2	3.6	3.6
XLFV-40	50.5	21.6	10.2	3.6	3.6
XLFV-50	67	21.7	12	4	2
	•				•

<sup>\*</sup> Other dimensions are the same as the XLF Note) For details, consult your SMC sales representative.

					(mm)
Model	J	K	L	M	N
XLFV-63	78.5	28.7	12	4	2
XLFV-80	87	38.7	12	4	2
XLFV-100	105.5	49.7	12	4	2
XLFV-160	128.5	58	12	4	2

<sup>\*</sup> Other dimensions are the same as the XLF. Note) For details, consult your SMC sales representative.

429 B










## Aluminum High Vacuum Angle Valve/Normally Closed/O-ring Seal


## XLF Series

## Made to Order Specifications 1



### With Bypass Valve (Flange size: 80)

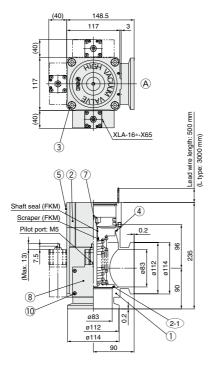



### Symbol



### Component Parts

COIII	ponent raits		
No.	Description	Material	Remarks
1	Body	A6063	
2	Bonnet assembly		Refer to part no.
2-1	O-ring		Refer to part no.
3	Hexagon socket head cap screw	Stainless steel	M10, L = 60
4	O-ring		Refer to part no.
5	Computer name plate		
6	Auto switch		Option
7	Indicator		Option
8	Bypass valve		Refer to part no.
8-1	O-ring		Refer to part no.
8-2	O-ring		Refer to part no.
9	O-ring		Refer to part no.
10	Hexagon socket head cap screw	Stainless steel	M4, L = 40

### O-ring Part No.


Internal seal 2-1	External seal 4
B2401-V85V	AS568-045V
B2401-V85-XN1	AS568-045-XN1
B2401-V85-XP1	AS568-045-XP1
B2401-V85-XQ1	AS568-045-XQ1
B2401-V85-XR1	AS568-045-XR1
B2401-V85-XR2	AS568-045-XR2
B2401-V85-XR3	AS568-045-XR3
B2401-V85-XS1	AS568-045-XS1
B2401-V85-XT1	AS568-045-XT1
B2401-V85-XU1	AS568-045-XU1
	B2401-V85V B2401-V85-XN1 B2401-V85-XP1 B2401-V85-XC1 B2401-V85-XR1 B2401-V85-XR2 B2401-V85-XR2 B2401-V85-XR3 B2401-V85-XR3

### O-ring Part No.

Seal material symbol	Internal seal 8-1	External seal 8-2	External seal 9
Nil	B2401-V15V	AS568-025V	AS568-017V
N1	B2401-V15-XN1	AS568-025-XN1	AS568-017-XN1
P1	B2401-V15-XP1	AS568-025-XP1	AS568-017-XP1
Q1	B2401-V15-XQ1	AS568-025-XQ1	AS568-017-XQ1
R1	B2401-V15-XR1	AS568-025-XR1	AS568-017-XR1
R2	B2401-V15-XR2	AS568-025-XR2	AS568-017-XR2
R3	B2401-V15-XR3	AS568-025-XR3	AS568-017-XR3
S1	B2401-V15-XS1	AS568-025-XS1	AS568-017-XS1
T1	B2401-V15-XT1	AS568-025-XT1	AS568-017-XT1
U1	B2401-V15-XU1	AS568-025-XU1	AS568-017-XU1

Note) A coating of vacuum grease (fluorinated grease: Y-VAC2) is applied to the shaft seal, scraper and O-ring 9.

### **How to Order Valve**

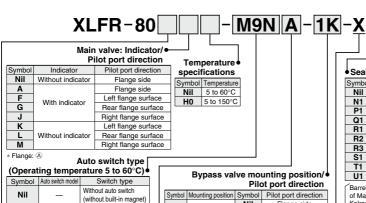

Solid state

auto switch

Reed auto switch

Bypass valve mounting position/ Pilot port direction

		Nil	Flange side
1	1 Left flange surface	K	Left flange surface
		L	Rear flange surface
	District floor	Nil	Flange side
2	2 Right flange surface	L	Rear flange surface
		Surface	M
	D	K	Left flange surface
3	Rear flange surface	L	Rear flange surface
Surface	М	Right flange surface	
Flange	e: (A)		

ocai i	material	
Symbol	Seal material	Compound No.
Nil	FKM	1349-80
N1	EPDM	2101-80
P1	Barrel Perfluoro®	70W
Q1	Kalrez®	4079
R1		SS592
R2	Chemraz <sup>®</sup>	SS630
R3		SSE38
S1	VMQ	1232-70
T1	FKM FOR PLASMA	3310-75
U1	ULTIC ARMOR®	UA4640

Barrel Perfluoro® is a registered trademark of Matsumura Oil Co., Ltd. Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.
Chemraz® is a registered trademark of

Greene, Tweed Technologies, Inc. ULTIC ARMOR® is a registered trademark of Nippon Valqua Industries, Ltd.

When the seal material is not being changed, there is no need to select a symbol.

Flange type

M9N(M)(L)(Z) D-M9N(M)(L)(Z)

M9P(M)(L)(Z) D-M9P(M)(L)(Z)

M9B(M)(L)(Z) D-M9B(M)(L)(Z)

**A90(L)** D-A90(L)

A93(M)(L)(Z) D-A93(M)(L)(Z) Heed auto switch

M9// Without auto switch (with built-in magnet)

Note) Types with auto switches are not available

in case of high temperature types L type: Lead wire length 3000 mm

Indicator

Without indicator

With indicator

With indicator

Without indicator

	·ago ., po			
Symbol	Type			
Nil	KF(NW)			
D	K(DN)			

Number of auto switches/Mounting position

Quantity	Mounting position	
Without auto switch	_	
2 pcs.	Valve open/closed	
1 pc.	Valve open	
1 pc.	Valve closed	
	Without auto switch 2 pcs. 1 pc.	

Seal material changed part

Symbol	Changed part	Leakage (Pa·m <sup>3</sup> /s or less) Note)		
Symbol	Changed part	Internal	External	
Nil	None	1.3 x 10 <sup>-9</sup> (FKM)	1.3 x 10 <sup>-9</sup> (FKM)	
Α	2-1 8-1 4 8-2 9	1.3 x 10 <sup>-7</sup>	1.3 x 10 <sup>-7</sup>	
В	2-1 8-1	1.3 x 10 <sup>-7</sup>	1.3 x 10 <sup>-9</sup> (FKM)	
С	4 8-2 9	1.3 x 10 <sup>-9</sup> (FKM)	1.3 x 10 <sup>-7</sup>	
N. I. S. M.				

Note) Values at normal temperature, excluding gas permeation.

### **Maintenance Parts**

2 Bonnet Assembly Part No.

XLF80A-30-1H M9NA-XN1

Part no.

XI F80-30-1

XLF80A-30-1

XLF80-30-1H

XLF80A-30-1H

Same as How to Order

Symbol

	Pilot port direction
Symbol	Pilot port direction
Nil	Rear (as seen from body connection point)
K	Left (as seen from body connection point)
M	Right (as seen from body connection point)

Temperat

**8** Bypass Valve Part No.

**XLA-16** 

ature specifications			
	Symbol	Temperature	
	Nil	5 to 60°C	
	H0	5 to 150°C	

### Seal material changed part

X65

onangea part		
Symbol	Changed part	
Nil	None	
Α	8-1 8-2	
В	8-1	
С	8-2	

Seal material: Same as the seal materials of How to **Order Valve** 

Bonnet assembly

Temperature

5 to 60°C

5 to 150°C

Specifications			
Valve type	Main valve: Normally closed	Bypass valve: Normally closed	
Shaft seal type	O-ring seal Bellows seal		
Operating pressure range	Atmospheric pressure to 1 x 10 <sup>-5</sup> Pa		
Fluid	Inert gas under vacuum		
Operating temperature	5 to 60°C (Option: 5 to 150°C)		
Conductance	200 L/s Max. 25 L/s (Calculated value		
Operating pressure	0.4 to 0.7 MPa		
Flange	KF80		

**SMC** 

XLA  $XL \square$ XL\( \Bar{Q}\)

XM□

XY□

D-□

XSA

XVD

XGT


## Aluminum High Vacuum Angle Valve/Normally Closed/O-ring Seal


## XLF Series

## Made to Order Specifications 2



### With Bypass Valve (Flange size: 100)

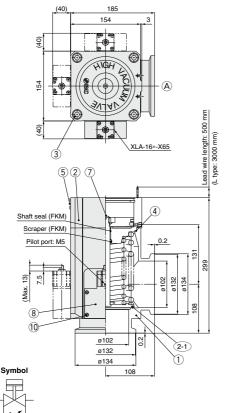



### O-ring Part No

O-mily Fait No.		
Seal material symbol	Internal seal 2-1	External seal 4
Nil	AS568-349V	AS568-050V
N1	AS568-349-XN1	AS568-050-XN1
P1	AS568-349-XP1	AS568-050-XP1
Q1	AS568-349-XQ1	AS568-050-XQ1
R1	AS568-349-XR1	AS568-050-XR1
R2	AS568-349-XR2	AS568-050-XR2
R3	AS568-349-XR3	AS568-050-XR3
S1	AS568-349-XS1	AS568-050-XS1
T1	AS568-349-XT1	AS568-050-XT1
U1	AS568-349-XU1	AS568-050-XU1


Component Parts				
No.	Description	Material	Remarks	
1	Body	A6063		
2	Bonnet assembly		Refer to part no.	
2-1	O-ring		Refer to part no.	
3	Hexagon socket head cap screw	Stainless steel	M12, L = 70	
4	O-ring		Refer to part no.	
5	Computer name plate			
6	Auto switch		Option	
7	Indicator		Option	
8	Bypass valve		Refer to part no.	
8-1	O-ring		Refer to part no.	
8-2	O-ring		Refer to part no.	
9	O-ring		Refer to part no.	
10	Hexagon socket head cap screw	Stainless steel	M4, L = 40	

O-ring Part No

O-ming i art ivo.			
Seal material symbol	Internal seal 8-1	External seal 8-2	External seal 9
Nil	B2401-V15V	AS568-025V	AS568-017V
N1	B2401-V15-XN1	AS568-025-XN1	AS568-017-XN1
P1	B2401-V15-XP1	AS568-025-XP1	AS568-017-XP1
Q1	B2401-V15-XQ1	AS568-025-XQ1	AS568-017-XQ1
R1	B2401-V15-XR1	AS568-025-XR1	AS568-017-XR1
R2	B2401-V15-XR2	AS568-025-XR2	AS568-017-XR2
R3	B2401-V15-XR3	AS568-025-XR3	AS568-017-XR3
S1	B2401-V15-XS1	AS568-025-XS1	AS568-017-XS1
T1	B2401-V15-XT1	AS568-025-XT1	AS568-017-XT1
U1	B2401-V15-XU1	AS568-025-XU1	AS568-017-XU1

Note) A coating of vacuum grease (fluorinated grease: Y-VAC2) is applied to the shaft seal, scraper and O-ring 9.



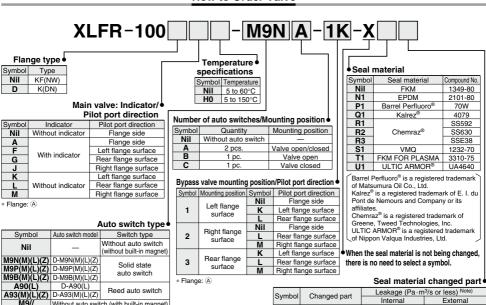

Without auto switch (with built-in magnet) Note 1) Standard lead wire length is 0.5 m. Add "L" to the end of the part number when 3 m is desired, "M" when 1 m. and "Z" when 5 m.


Note 2) Types with auto switches are not available in case of high temperature types.

With indicator

Symbol	Changed part	Leakage (Pa·m <sup>3</sup> /s or less) Note)		
Syllibol	Changeu part	Internal	External	
Nil	None	1.3 x 10 <sup>-9</sup> (FKM)	1.3 x 10 <sup>-9</sup> (FKM)	
Α	2-1 8-1 4 8-2 9	1.3 x 10 <sup>-7</sup>	1.3 x 10 <sup>-7</sup>	
В	2-1 8-1	1.3 x 10 <sup>-7</sup>	1.3 x 10 <sup>-9</sup> (FKM)	
С	4 8-2 9	1.3 x 10 <sup>-9</sup> (FKM)	1.3 x 10 <sup>-7</sup>	
N. I. A. M. I. A. A. M. I. M.				

Note) Values at normal temperature, excluding gas permeation.

### **Maintenance Parts**



XLF100A-30-1H Same as How to Order

Temperatu	re	spec	cification
	C.	امطمس	Tamparati

 a.o opeeea.ee			
Symbol	Temperature		
Nil	5 to 60°C		
H0	5 to 150°C		

## changed part

Symbol	Changed par	
Nil	None	
Α	8-1 8-2	
В	8-1	
С	8-2	

Seal material: Same as the seal materials of How to Order Valve

### Specifications

Valve type	Main valve: Normally closed Bypass valve: Normally	
Shaft seal type	O-ring seal	Bellows seal
Operating pressure range	ating pressure range Atmospheric pressure to 1 x 10-5 Pa	
Fluid	Inert gas under vacuum	
Operating temperature	5 to 60°C (Option: 5 to 150°C)	
Conductance	300 L/s Max. 31.5 L/s (Calculated valu	
Operating pressure	0.4 to 0.7 MPa	
Flange	KF100	

XLA

XL

XL\( \pi \)

XM□

XY□

D-

XSA

XVD

XGT


## Aluminum High Vacuum Angle Valve/Normally Closed/O-ring Seal


## XLF Series

## Made to Order Specifications 3



### With Bypass Valve (Flange size: 160)

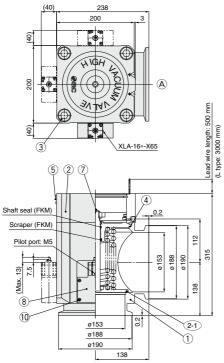



### Symbol



Component Parts					
No.	Description	Material	Remarks		
1	Body	A6063			
2	Bonnet assembly		Refer to part no.		
2-1	O-ring		Refer to part no.		
3	Hexagon socket head cap screw	Stainless steel	M20, L = 70		
4	O-ring		Refer to part no.		
5	Computer name plate				
6	Auto switch		Option		
7	Indicator		Option		
8	Bypass valve		Refer to part no.		
8-1	O-ring		Refer to part no.		
8-2	O-ring		Refer to part no.		
9	O-ring		Refer to part no.		
10	Hexagon socket head cap screw	Stainless steel	M4, L = 40		

### O-ring Part No.


	- ····g · ····			
Seal material symbol	Internal seal (2-1)	External seal 4		
Nil	B2401-G155V	AS568-167V		
N1	B2401-G155-XN1	AS568-167-XN1		
P1	B2401-G155-XP1	AS568-167-XP1		
Q1	B2401-G155-XQ1	AS568-167-XQ1		
R1	B2401-G155-XR1	AS568-167-XR1		
R2	B2401-G155-XR2	AS568-167-XR2		
R3	B2401-G155-XR3	AS568-167-XR3		
S1	B2401-G155-XS1	AS568-167-XS1		
T1	B2401-G155-XT1	AS568-167-XT1		
U1	B2401-G155-XU1	AS568-167-XU1		

### O-ring Part No.

			_
Seal material symbol	Internal seal 8-1	External seal 8-2	External seal 9
Nil	B2401-V15V	AS568-025V	AS568-017V
N1	B2401-V15-XN1	AS568-025-XN1	AS568-017-XN1
P1	B2401-V15-XP1	AS568-025-XP1	AS568-017-XP1
Q1	B2401-V15-XQ1	AS568-025-XQ1	AS568-017-XQ1
R1	B2401-V15-XR1	AS568-025-XR1	AS568-017-XR1
R2	B2401-V15-XR2	AS568-025-XR2	AS568-017-XR2
R3	B2401-V15-XR3	AS568-025-XR3	AS568-017-XR3
S1	B2401-V15-XS1	AS568-025-XS1	AS568-017-XS1
T1	B2401-V15-XT1	AS568-025-XT1	AS568-017-XT1
U1	B2401-V15-XU1	AS568-025-XU1	AS568-017-XU1

Note) A coating of vacuum grease (fluorinated grease: Y-VAC2) is applied to the shaft seal, scraper and O-ring 9.



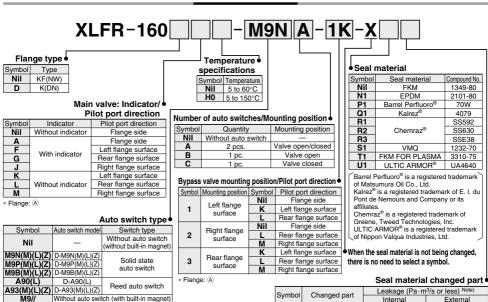


Note 1) Standard lead wire length is 0.5 m. Add "L" to the end of the part number when 3 m is desired, "M" when 1 m, and "Z" when 5 m.

Note 2) Types with auto switches are not available in case of high temperature types

Symbol	Changed part	Leakage (Pa·m <sup>3</sup> /s or less) Note)		
Syllibol		Internal	External	
Nil	None	1.3 x 10 <sup>-9</sup> (FKM)	1.3 x 10 <sup>-9</sup> (FKM)	
Α	2-1 8-1 4 8-2 9	1.3 x 10 <sup>-7</sup>	1.3 x 10 <sup>-7</sup>	
В	2-1 8-1	1.3 x 10 <sup>-7</sup>	1.3 x 10 <sup>-9</sup> (FKM)	
С	4 8-2 9	1.3 x 10 <sup>-9</sup> (FKM)	1.3 x 10 <sup>-7</sup>	
LINK I I I I I I I I I I I I I I I I I I				

Note) Values at normal temperature, excluding gas permeation.

### **Maintenance Parts**

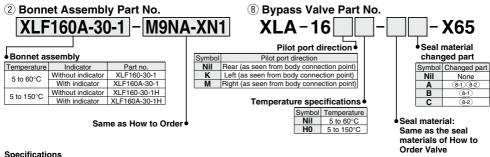

	- p			
Valve type	Main valve: Normally closed	Bypass valve: Normally closed		
Shaft seal type	O-ring seal	Bellows seal		
Operating pressure range	Atmospheric pressure to 1 x 10-5 Pa			
Fluid	Inert gas under vacuum			
Operating temperature	5 to 60°C (Option: 5 to 150°C)			
Conductance	800 L/s Max. 31.5 L/s (Calculated value			
Operating pressure	0.4 to 0.7 MPa			
Flange	KF160			

**ØSMC** 

XLA

 $XL \square$ 

XL\( \pi \)

XM□

XY□

D-□

XSA

XVD

XGT

## **Aluminum High Vacuum Angle Valve Double Acting/O-ring Seal**

The production of flange sizes 16, 25, 40, 50, 63, and 80 for the XLG(V) series has been discontinued. Please select the new XLG(V)-2 type. See here for details.



## XLG/XLGV Series




How to Order



Made to Order specifications (For details, refer to pages 442 to 447)

Flange size 16, 25, 40

Flange size 50, 63, <u>80, 100, 160</u>



### 1) Flance size


U Flange Siz
Size
16
25
40
50
63
80
100
160

### (2) Flange type

Symbol	Type	Applicable flange
Nil	KF (NW)	16, 25, 40, 50 63, 80, 100, 160
D	K (DN)	63, 80, 100, 160

### 3 Pilot port direction

Symbol	Pilot port direction
Nil	Flange side
K	Left flange surface
L	Rear flange surface
М	Right flange surface



### (4) Temperature specifications/Heater

9			
Symbol		Temperature	Heater
Nil		5 to 60°C	_
High	H0		_
temperature	H4	5 to 150°C	With 100°C heater
type	H5		With 120°C heater

Note) Size 16 is not applicable for H4. H5. Size 25 not for H4.

### 6 Number of auto switches/Mounting position

Symbol	Quantity	Mounting position
Nil	Without auto switch	_
Α	2 pcs.	Valve open/closed
В	1 pc.	Valve open
С	1 pc.	Valve closed

### (5) Auto switch type

<u></u>		
Symbol	Auto switch model	Remarks
Nil	_	Without auto switch (without built-in magnet)
M9N(M)(L)(Z)	D-M9N(M)(L)(Z)	
M9P(M)(L)(Z)	D-M9P(M)(L)(Z)	Solid state auto switch
M9B(M)(L)(Z)	D-M9B(M)(L)(Z)	
A90(L)	D-A90(L)	Reed auto switch (Not applicable
A93(M)(L)(Z)	D-A93(M)(L)(Z)	to flange size 16)
M9//	_	Without auto switch (with built-in magnet)

Note 1) Auto switches shown above cannot be mounted on the high temperature type. For the high temperature type, a semi-standard product that uses the heat resistant auto switch D-F7NJ\* is available. For details, please contact SMC

Note 2) Standard lead wire length is 0.5 m. Add "L" to the end of the part number when 3 m is desired, "M" when 1 m, and "Z" when 5 m. Example) -M9NL

### (7) Body surface treatment/Seal material and its changed part

### Body surface treatment

ŀ	Symbol	Surface treatment	
i	Nil	External: Hard anodized Internal: Raw material	
i	Α	External: Hard anodized Internal: Oxalic acid anodized	
ı.			

### Seal material

Symbol	Seal material	Compound No.
Nil	FKM	1349-80*
N1	EPDM	2101-80*
P1	Barrel Perfluoro®	70W
Q1	Kalrez <sup>®</sup>	4079
R1	Chemraz®	SS592
R2		SS630
R3		SSE38
S1	VMQ	1232-70*
T1	FKM for Plasma	3310-75*
U1 ULTIC ARMOR®		UA4640
Pandy and by Mitaribiahi Cable Indication 14d		

| \* Produced by Mitsubishi Cable Industries, Ltd.

### Seal material changed part and leakage

Symbol	Note 2) Changed	Leakage (Pa·m³/s or less) Note 1)	
Cyrribor	part	Internal	External
Nil	None	1.3 x 10 <sup>-10</sup> (FKM)	1.3 x 10 <sup>-10</sup> (FKM)
Α	2,3	1.3 x 10 <sup>-8</sup>	1.3 x 10 <sup>-8</sup>
В	2	1.3 x 10 <sup>-8</sup>	1.3 x 10 <sup>-10</sup> (FKM)
С	3	1.3 x 10 <sup>-10</sup> (FKM)	1.3 x 10 <sup>-8</sup>

Note 1) Values at normal temperature, excluding gas permeation.

Note 2) Refer to parts number of "Construction" on page 438 for changed part. Number indicates parts number of "Construction" accordingly. Note 3) Part 3 (exterior seal) is not changeable for sizes 16 and 25.

To order something other than "Nil" (standard), list the symbols starting with "X," followed by each symbol for "body surface treatment," "seal material" and then "changed part".

### Example) XLG-40-M9NA-XAN1A


Barrel Perfluoro® is a registered trademark of Matsumura Oil Co., Ltd. Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

Chemraz® is a registered trademark of Greene, Tweed Technologies, Inc. ULTIC ARMOR® is a registered trademark of Nippon Valqua Industries,

### Aluminum High Vacuum Angle Valve XLG/XLGV Series

### Air Operated/with Solenoid Valve

The production of flange sizes 16, 25, 40, 50, 63, and 80 for the XLG(V) series has been discontinued. Please select the new XLG(V)-2 type. See here for details.

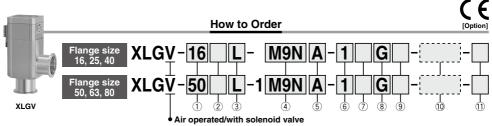

### 1) Flange size

<u> </u>
Size
16
25
40
50
63
80

### 2 Flange type

Nil KF (	NW) 16, 25,	40, 50, 63, 80
<b>D</b> K (I	ON)	63, 80

### 3 Pilot port direction

Solenoid valve direction
Left flange surface
Rear flange surface
Right flange surface
Flange surface

\* M type plug connector (AC power supply) not attached for M of sizes 16 and 25.

(5) Number of auto switches/Mounting position

Quantity

Without auto switch

2 pcs.

1 pc

1 pc.

- \* M: Size 16, 25, 40 only.
- \* Nil: Size 50, 63, 80 only

Symbol

Nil

A

R

C



Mounting position

Valve open/closed Valve open

Valve closed

### 4 Auto switch type

6 Rated voltage 100 VAC, 50/60 Hz

Symbol

2

3

4

5

Symbol	Auto switch model	Remarks
Nil	_	Without auto switch (without built-in magnet)
M9N(M)(L)(Z)	D-M9N(M)(L)(Z)	
M9P(M)(L)(Z)	D-M9P(M)(L)(Z)	Solid state auto switch
M9B(M)(L)(Z)	D-M9B(M)(L)(Z)	
A90(L)	D-A90(L)	Reed auto switch (Not applicable
A93(M)(L)(Z)	D-A93(M)(L)(Z)	to flange size 16)
M9//	_	Without auto switch (with built-in magnet)
Standard load wire length is 0.5 m. Add "I " to the end of the part number when		

3 m is desired, "M" when 1 m, and "Z" when 5 m. Example) -M9NL

∵/ Iy∣	pe of actuation
Nil	2 position single
W	2 position double

Surface treatment

### on (8) Electrical entry

Grommet (Lead wire length 300 mm)
Grommet (Lead wire length 600 mm)
L type plug connector
M type plug connector

## (9) Light/Surge voltage suppressor

S Lightrounge voltage suppliessor		
Nil	None	
S	With surge voltage suppressor	
Z	With light/surge voltage suppressor	
U	With light/surge voltage suppressor (Non-polar type)	

- \* S type: Not available for AC.
- \* U type: DC only.

### 10 Body surface treatment/Seal material and its changed part

### Body surface treatment

200 VAC, 50/60 Hz

110 VAC, 50/60 Hz

220 VAC, 50/60 Hz

24 VDC

12 VDC

i	Nil	External: Hard anodized	Internal: Raw material				
i	A External: Hard anodized Internal: Oxalic acid anodized						
l	• Seal materia	al					
i	Symbol Seal material Compound No.						
Nil FKM 1349-80*							

Symbol	Seal material	Compound No.
Nil	FKM	1349-80*
N1	EPDM	2101-80*
P1	Barrel Perfluoro®	70W
Q1	Kalrez <sup>®</sup>	4079
R1		SS592
R2	Chemraz <sup>®</sup>	SS630
R3		SSE38
S1	VMQ	1232-70*
T1	FKM for Plasma	3310-75*
U1	ULTIC ARMOR®	UA4640

<sup>| \*</sup> Produced by Mitsubishi Cable Industries, Ltd.

### 11 CE-compliant Nil Q CE-compliant

Barrel Perfluoro® is a registered trademark of Matsumura Oil Co., Ltd. Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates

Chemraz® is a registered trademark of Greene, Tweed Technologies, Inc. ULTIC ARMOR® is a registered trademark of Nippon Valqua Industries,

### Seal material changed part and leakage

Symbol	Changed	Leakage (Pa·m	3/s or less) Note 1)
Symbol	part	Internal	External
Nil	None	1.3 x 10 <sup>-10</sup> (FKM)	1.3 x 10 <sup>-10</sup> (FKM)
Α	2,3	1.3 x 10 <sup>-8</sup>	1.3 x 10 <sup>-8</sup>
В	2	1.3 x 10 <sup>-8</sup>	1.3 x 10 <sup>-10</sup> (FKM)
С	3	1.3 x 10 <sup>-10</sup> (FKM)	1.3 x 10 <sup>-8</sup>
Α	None 2, 3 2	1.3 x 10 <sup>-10</sup> (FKM) 1.3 x 10 <sup>-8</sup> 1.3 x 10 <sup>-8</sup>	1.3 x 10 <sup>-10</sup> (FKI 1.3 x 10 <sup>-8</sup> 1.3 x 10 <sup>-10</sup> (FKI

Note 1) Values at normal temperature, excluding gas permeation.

Note 2) Refer to parts number of "Construction" on page 438 for changed part. Number indicates parts number of "Construction" accordingly. Note 3) Part 3 (exterior seal) is not changeable for sizes 16 and 25.

To order something other than "Nil" (standard), list the symbols starting with "X," followed by each symbol for "body surface treatment," "seal material" and then "changed part".

### Example) XLGV-40-M9NA-1G-XAN1A

Note 1) Option specifications/Combinations

This model has auto switch and K(DN) flange options, but high temperature/heater options are not available.

Note 2) Solenoid valves

- 2 position single: XLGV-16, 25, 40: SYJ3190 XLGV-50, 63, 80: SY3120 2 position double: XLGV-16, 25, 40: SYJ3290 XLGV-50, 63, 80: SY3220 Example) SYJ3190-1GS, SYJ3290-1GS, SY3120-1GS-C4, SY3220-1GS-C4
- \* For details, consult your SMC sales representative.
- \* For option "Q", the solenoid valve should be a CE-compliant product.



XLA

XL\( \Bar{Q}\)

XM□ XY□ D-□ XSA

XVD

XGT

### XLG/XLGV Series

### **Specifications**


Model		XLG(V)-16	XLG(V)-25	XLG(V)-40	XLG-50	XLG-63	XLG-80	XLG-100	XLG-160
Valve type				Double acting	(Dual operation	n), Pressurize	to open/close	9	
Fluid					Inert gas un	der vacuum			
Operating	XLG			5 to 60	) (High temper	rature type: 5 t	to 150)		
temperature (°C)	XLGV		5 to 50				_		
Operating pressure	Pa) (abs)			At	mospheric pre	ssure to 1 x 1	0-5		
Conductance (L/s) N	ote 1)	5	14	45	80	160	200	300	800
Leakage (Pa·m³/s)	Internal	In ca	In case of standard material FKM: 1.3 x 10 <sup>-10</sup> at normal temperature, excluding gas permeation						
Leakage (Pa•III78)	External	In case of standard material FKM: 1.3 x 10 <sup>-10</sup> at normal temperature, excluding gas permeation							
Flange type			KF (NW) KF (NW), K (DN)						
Principal materials			Body: Aluminum alloy, Main part: Stainless steel, FKM (Standard seal material)						
Surface treatment			External: Hard anodized Internal: Raw material						
Pilot pressure (MPa)	(G)		0.3 to 0.6		0.4 to 0.6				
Dilat a aut ains	XLG	l N	15		Rc1/8				
Pilot port size	Pilot port size XLGV		M5	: Port 1(P), Po	ort 3(R), Port 5	(R)		-	_
Wainbt (lon)	XLG	0.28	0.46	1.1	1.4	2.3	4.1	7.6	14.9
Weight (kg)	XLGV	0.32	0.5	1.14	1.5	2.4	4.2	_	

Note 1) Conductance is the value for an elbow with the same dimensions.

Note 2) For valve heater specifications, refer to "Common Option [1] Heater" on page 459.

Note 3) A coating of vacuum grease [Y-VAC2] is applied to the seal-material sliding portion of the vacuum part.

### Construction/Operation

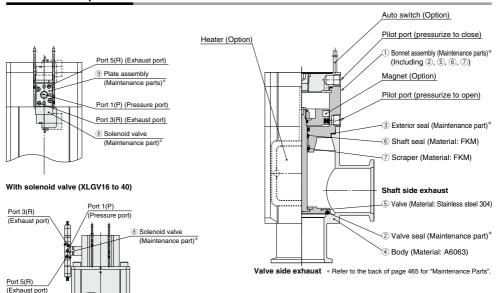

### With solenoid valve (XLGV50 to 80)

### <Working principle>

By applying the pilot pressure from the pilot port P-1, the piston-coupled valve overcomes the operating force by pressure, and the valve opens. (Pilot port P-2 is open.) Conversely, by applying the pilot pressure to the pilot port P-2, the valve closes. (Pilot port P-1 is open.) For the XLGV, the pilot pressure is always applied to the port 1(P), and the valve opens when the solenoid valve is turned ON and closes when it is turned OFF. For the double solenoid, the valve moves to the opposite side from that in which the solenoid valve is turned ON.

### <Options>

Auto switch: The magnet activates the auto switch. With 2 auto switches, the open and closed positions are detected, and with 1 auto switch, either the open or closed position is detected. Auto switches are applicable at

ordinary temperatures only (5 to 60°C).


Heater: Simple heating is performed using thermistors. The valve body can be heated to approximately 100 or 120°C, depending on the heater option and the valve size. The type and number of thermistors to be used will vary depending upon size and setting temperature. In the case of high temperature specifications, the bonnet assembly is a heat resistant structure. This does not apply in cases where a solenoid valve is attached

**B** 438

## Aluminum High Vacuum Angle Valve XLG/XLGV Series

### **Dimensions**

### XLG16, 25, 40/ Air operated

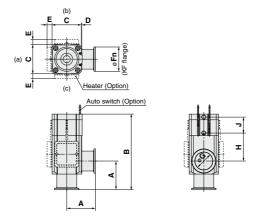


									(mm)
Model	Α	В	С	D	E Note 1)	Fn	G	Н	J
XLG-16	40	110	38	1	_	30	17	40	26
XLG-25	50	121	48	1	12	40	26	39	28
XLG-40	65	171	66	2	11	55	41	63	36

Note 1) Dimension E applies when heater option is included. (Lead wire length: approx. 1 m) Note 2) (a), (b) and (c) in the above drawing indicate heater mounting positions. Moreover, heater mounting positions will differ depending on the type of heater.

For further details, refer to mounting positions under "Replacement Heaters" on page 465.

### XLG50, 63, 80, 100, 160/ Air operated

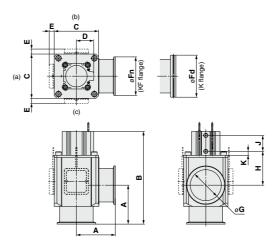

											(111111)
Model	Α	В	С	D	E Note 1)	Fn	Fd	G	Н	J	K
XLG-50	70	183	80	31	10.5	75	_	52	77	29	10.5
XLG-63	88	209	100	39	11	87	95	70	76.5	36	9
XLG-80	90	250	117	45.5	11	114	110	83	105	44	9
XLG-100	108	270.5	154	55	11	134	130	102	92	58	9
XLG-160	138	339	200	65	11	190	180	153	124	62	12.5

Note 1) Dimension E applies when heater option is included. (Lead wire length: approx. 1 m) Note 2) (a), (b) and (c) in the above drawing indicate heater mounting positions.

Moreover, heater mounting positions will differ depending on the type of heater.

For further details, refer to mounting positions under "Replacement Heaters" on page 465.




XLA


XLQ XMQ D-Q XSA XVD XGT

## XLG/XLGV Series

### **Dimensions**


### XLGV/With solenoid valve

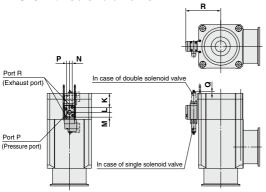




							(mm)
Model	K	L	M	N	Р	Q	R
XLGV-16	14.3	9.2	6.4	3.5	2.7	17.3	36
XLGV-25	15.8	9.2	6.4	3.5	2.7	15.8	41
XLGV-40	29	9.2	6.4	3.5	2.7	2.6	51

\* Other dimensions are the same as the XLG. Note) For details, consult your SMC sales representative.





							(mm)
Model	K	L	M	N	Р	Q	R
XLGV-50	12.5	9.5	9.5	1	1	23.5	52.6
XLGV-63	17.4	9.5	9.5	1	1	18.6	62.3
XLGV-80	23.5	9.5	9.5	1	1	12.4	70.8

<sup>\*</sup> Other dimensions are the same as the XLG. Note) For details, consult your SMC sales representative.



XLA

XL□

XL\_Q XM\_ XY\_

D-

XSA

XVD XGT


## Aluminum High Vacuum Angle Valve/Double Acting/O-ring Seal

## XLG Series

## Made to Order Specifications 1 🕎



### With Bypass Valve (Flange size: 80)

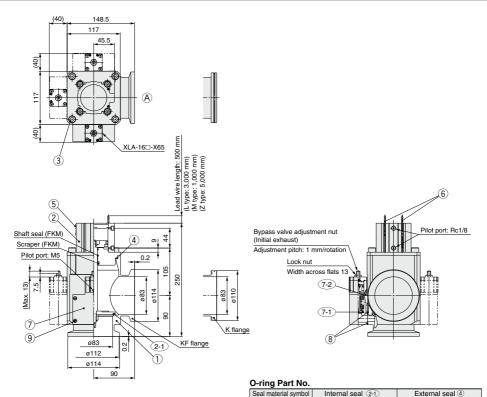





Component Borto

COIII	poneni rans		
No.	Description	Material	Remarks
1	Body	A6063	
2	Bonnet assembly		Refer to maintenance parts
2-1	O-ring		Refer to part no.
3	Hexagon socket head cap screw	SS	M10, L = 20
4	O-ring		Refer to part no.
5	Computer name plate		
6	Auto switch		Option
7	High vacuum angle valve (Bypass valve)		Refer to maintenance parts
7-1	O-ring		Refer to part no.
7-2	O-ring		Refer to part no.
8	O-ring		Refer to part no.
9	Hexagon socket head cap screw	Stainless steel	M4, L = 40

<u>S1</u> T1 U1

Nil

N1

**P1** 

Q1

R1

R<sub>2</sub>

R3

O-ring Part No.			
Seal material symbol	Internal seal (7-1)	External seal (7-2)	External seal ®
Nil	B2401-V15V	AS568-025V	AS568-017V
N1	B2401-V15-XN1	AS568-025-XN1	AS568-017-XN1
P1	B2401-V15-XP1	AS568-025-XP1	AS568-017-XP1
Q1	B2401-V15-XQ1	AS568-025-XQ1	AS568-017-XQ1
R1	B2401-V15-XR1	AS568-025-XR1	AS568-017-XR1
R2	B2401-V15-XR2	AS568-025-XR2	AS568-017-XR2
R3	B2401-V15-XR3	AS568-025-XR3	AS568-017-XR3
S1	B2401-V15-XS1	AS568-025-XS1	AS568-017-XS1
T1	B2401-V15-XT1	AS568-025-XT1	AS568-017-XT1
U1	B2401-V15-XU1	AS568-025-XU1	AS568-017-XU1

B2401-V85V

B2401-V85-XN1

B2401-V85-XP1

B2401-V85-XQ1

B2401-V85-XR1

B2401-V85-XR2

B2401-V85-XR3

B2401-V85-XS1

B2401-V85-XT1

B2401-V85-XU1

AS568-045V

AS568-045-XN1

AS568-045-XP1

AS568-045-XQ1

AS568-045-XR1

AS568-045-XR2

AS568-045-XR3


AS568-045-XS1

AS568-045-XT1

AS568-045-XU1

Note) A coating of vacuum grease (fluorinated grease: Y-VAC2) is applied to the shaft seal, scraper and O-ring ®.

### **How to Order Valve**

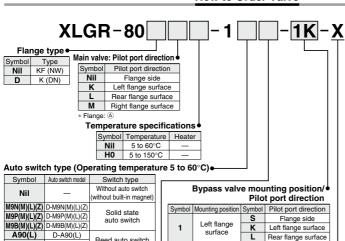

				i lariye side
	1	Left flange surface	K	Left flange surface
		Surface	L	Rear flange surface
		D: 1. #	S	Flange side
	2	Right flange surface	L	Rear flange surface
			M	Right flange surface
		Rear flange	K	Left flange surface
	3	surface	L	Rear flange surface
		55600	M	Right flange surface
	. Elongo			

Seal material

Symbol	Seal material	Compound No.
Nil	FKM	1349-80
N1	EPDM	2101-80
P1	Barrel Perfluoro®	70W
Q1	Kalrez <sup>®</sup>	4079
R1		SS592
R2	Chemraz <sup>®</sup>	SS630
R3		SSE38
S1	VMQ	1232-70
T1	FKM FOR PLASMA	3310-75
U1	ULTIC ARMOR®	UA4640
,		

Barrel Perfluoro® is a registered trademark of Matsumura Oil Co., Ltd. Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates

Chemraz® is a registered trademark of Greene, Tweed Technologies, Inc.
ULTIC ARMOR® is a registered trademark of Nippon Valqua Industries, Ltd.

When the seal material is not being changed, there is no need to select a symbol.

\* Flange: A Number of auto switches/Mounting position

- Humber of auto switches/Mounting		
Quantity	Mounting position	
_	Without auto switch	
2 pcs.	Valve open/closed	
1 pc.	Valve open	
1 pc.	Valve closed	
	Quantity — 2 pcs. 1 pc.	

Seal material changed part

	Symbol	Changed part	Leakage (Pa·IIIº/S of less) Note/		
	Syllibol	Changeu part	Internal	External	
	Nil	None	1.3 x 10 <sup>-9</sup> (FKM)	1.3 x 10 <sup>-9</sup> (FKM)	
	Α	2-1 7-1 4 7-2 8	1.3 x 10 <sup>-7</sup>	1.3 x 10 <sup>-7</sup>	
	В	2-1 (7-1)	1.3 x 10 <sup>-7</sup>	1.3 x 10-9 (FKM)	
	С	4 7-2 8	1.3 x 10 <sup>-9</sup> (FKM)	1.3 x 10 <sup>-7</sup>	
N. I. V. M. I					

Note) Values at normal temperature, excluding gas permeation.

### **Maintenance Parts**

aaifiaatiana

Temperature


A93(M)(L)(Z) D-A93(M)(L)(Z)

M9// Without auto switch (with built-in magnet)

Standard lead wire length is 0.5 m. Add "L" to the end of the part number when 3 m is desired, "M" when 1 m, and "Z" when 5 m.

Note) Types with auto switches are not available in

case of high temperature types



Reed auto switch

Bonnet assembly Part no.

5 to 150°C XLG80-30-1H-1	5 to 60°C	XLG80-30-1-1
	5 to 150°C	XLG80-30-1H-1
	0 10 100 0	AEG00 00 111 1

**8** Bypass Valve Part No.

XLA-16 Pilot port direction

	nint)			
K Left (as seen from body connection po	Left (as seen from body connection point)			
M Right (as seen from body connection point)				

Same	as	How	to	Ord	er	4

specifications			
Valve type	Main valve: Double acting Bypass valve: Normally closed		
Shaft seal type	O-ring seal Bellows seal		
Operating pressure range	Atmospheric pressure to 1 x 10 <sup>-5</sup> Pa		
Fluid	Inert gas under vacuum		
Operating temperature	5 to 60°C (Option: 5 to 150°C)		
Conductance	200 L/s* Max. 25 L/s (Calculate		
Operating pressure	0.4 to 0.6 MPa		
Flange	KF80, K80		

### Temperature specifications

Symbol	Temperature	l
Nil	5 to 60°C	l
H0	5 to 150°C	l

### Seal material changed part

XLA XL XL\( \Bar{Q}\)

XM□ XY□

D-□

XSA

XVD

XGT CYV

Symbol	Changed par
Nil	None
Α	7-1 (7-2)
В	7-1
С	7-2

Seal material: Same as the seal materials of How to **Order Valve** 

Weight 4.9 kg \* Conductance is the value for the "molecular flow" of an elbow with the same dimensions




## Aluminum High Vacuum Angle Valve/Double Acting/O-ring Seal

## XLG Series

## Made to Order Specifications 2



### With Bypass Valve (Flange size: 100)

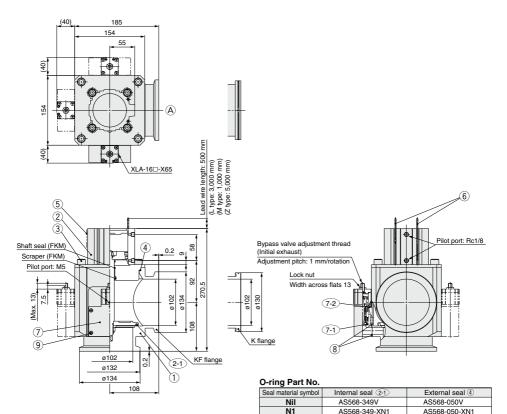

### Symbol



### Component Parts

ponent i di to		
Description	Material	Remarks
Body	A6063	
Bonnet assembly		Refer to maintenance parts
O-ring		Refer to part no.
Hexagon socket head cap screw	SS	M12, L = 20
O-ring		Refer to part no.
Computer name plate		
Auto switch		Option
High vacuum angle valve (Bypass valve)		Refer to maintenance parts
O-ring		Refer to part no.
O-ring		Refer to part no.
O-ring		Refer to part no.
Hexagon socket head cap screw	Stainless steel	M4, L = 40
	Description Body Bonnet assembly O-ring Hexagon socket head cap screw O-ring Computer name plate Auto switch High vacuum angle valve (Bypass valve) O-ring O-ring O-ring	Description Material Body A6063 Bonnet assembly O-ring Hexagon socket head cap screw O-ring Computer name plate Auto switch High vacuum angle valve (Bypass valve) O-ring O-ring O-ring O-ring O-ring

### U1 O-ring Part No.

**P1** 

Q1

R1

R2

R3

S1

T1

Internal seal (7-1)	External seal 7-2	External seal ®
B2401-V15V	AS568-025V	AS568-017V
B2401-V15-XN1	AS568-025-XN1	AS568-017-XN1
B2401-V15-XP1	AS568-025-XP1	AS568-017-XP1
B2401-V15-XQ1	AS568-025-XQ1	AS568-017-XQ1
B2401-V15-XR1	AS568-025-XR1	AS568-017-XR1
B2401-V15-XR2	AS568-025-XR2	AS568-017-XR2
B2401-V15-XR3	AS568-025-XR3	AS568-017-XR3
B2401-V15-XS1	AS568-025-XS1	AS568-017-XS1
B2401-V15-XT1	AS568-025-XT1	AS568-017-XT1
B2401-V15-XU1	AS568-025-XU1	AS568-017-XU1
	B2401-V15V B2401-V15-XN1 B2401-V15-XP1 B2401-V15-XQ1 B2401-V15-XR2 B2401-V15-XR2 B2401-V15-XR3 B2401-V15-XS1 B2401-V15-XS1	B2401-V15V AS568-025V B2401-V15-XN1 AS568-025-XN1 B2401-V15-XP1 AS568-025-XP1 B2401-V15-XQ1 AS568-025-XQ1 B2401-V15-XR1 AS568-025-XR1 B2401-V15-XR2 AS568-025-XR2 B2401-V15-XR3 AS568-025-XR3 B2401-V15-XS1 AS568-025-XS1 B2401-V15-XS1 AS568-025-XS1 B2401-V15-XS1 AS568-025-XS1

AS568-349-XP1

AS568-349-XQ1

AS568-349-XR1

AS568-349-XR2

AS568-349-XR3

AS568-349-XS1

AS568-349-XT1

AS568-349-XU1

AS568-050-XP1

AS568-050-XQ1

AS568-050-XR1

AS568-050-XR2


AS568-050-XR3

AS568-050-XS1

AS568-050-XT1

AS568-050-XU1

Note) A coating of vacuum grease (fluorinated grease: Y-VAC2) is applied to the shaft seal, scraper and O-ring ®.

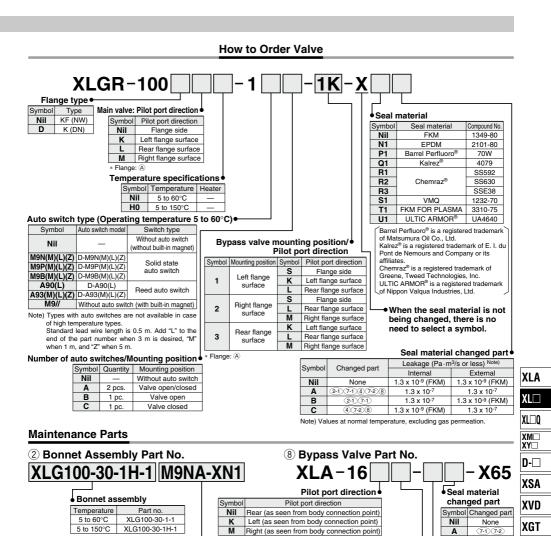

.. . . :4: . . 4: . . .

Specifications			
Valve type	Main valve: Double acting Bypass valve: Normally clos		
Shaft seal type	O-ring seal Bellows seal		
Operating pressure range	Atmospheric pressure to 1 x 10 <sup>-5</sup> Pa		
Fluid	Inert gas under vacuum		
Operating temperature	5 to 60°C (Option: 5 to 150°C)		
Conductance	300 L/s* Max. 31.5 L/s (Calculated val		
Operating pressure	0.4 to 0.6 MPa		
Flange	KF100, K100		
Weight	8.3 kg		

Same as How to Order

<sup>\*</sup> Conductance is the value for the "molecular flow" of an elbow with the same dimensions.



В

c

Seal material:

Same as the seal materials of How to Order Valve

Temperature specifications

Nil

Symbol Temperature

H0 5 to 150°C

5 to 60°C

(7-1)

## Aluminum High Vacuum Angle Valve/Double Acting/O-ring Seal

## XLG Series

## Made to Order Specifications 3



Pilot port: Rc1/8

External seal 4

AS568-167-XN1

AS568-167-XP1

AS568-167-XQ1

AS568-167-XR1

AS568-167-XR2

AS568-167-XR3


AS568-167-XS1

AS568-167-XT1

AS568-167-XU1

AS568-167V

### With Bypass Valve (Flange size: 160)

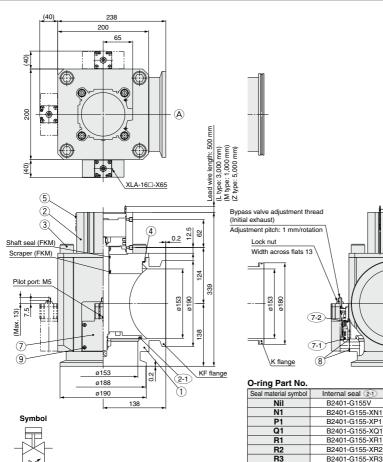

### Component Borto

COIII	component raits					
No.	Description	Material	Remarks			
1	Body	A6063				
2	Bonnet assembly		Refer to maintenance parts			
2-1	O-ring		Refer to part no.			
3	Hexagon socket head cap screw	SS	M20, L = 30			
4	O-ring		Refer to part no.			
5	Computer name plate					
6	Auto switch		Option			
7	High vacuum angle valve (Bypass valve)		Refer to maintenance parts			
7-1	O-ring		Refer to part no.			
7-2	O-ring		Refer to part no.			
8	O-ring		Refer to part no.			
9	Hexagon socket head cap screw	Stainless steel	M4, L = 40			

O-ring Part No.

S1

T1

Seal material symbol	Internal seal (7-1)	External seal 7-2	External seal ®
Nil	B2401-V15V	AS568-025V	AS568-017V
N1	B2401-V15-XN1	AS568-025-XN1	AS568-017-XN1
P1	B2401-V15-XP1	AS568-025-XP1	AS568-017-XP1
Q1	B2401-V15-XQ1	AS568-025-XQ1	AS568-017-XQ1
R1	B2401-V15-XR1	AS568-025-XR1	AS568-017-XR1
R2	B2401-V15-XR2	AS568-025-XR2	AS568-017-XR2
R3	B2401-V15-XR3	AS568-025-XR3	AS568-017-XR3
S1	B2401-V15-XS1	AS568-025-XS1	AS568-017-XS1
T1	B2401-V15-XT1	AS568-025-XT1	AS568-017-XT1
U1	B2401-V15-XU1	AS568-025-XU1	AS568-017-XU1


B2401-G155-XS1

B2401-G155-XT1

B2401-G155-XU1

Note) A coating of vacuum grease (fluorinated grease: Y-VAC2) is applied to the shaft seal, scraper and O-ring ®.



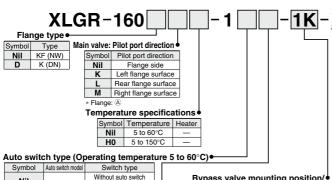

(without built-in magnet) Solid state auto switch

**A90(L)** D-A90(L) Reed auto switch A93(M)(L)(Z) D-A93(M)(L)(Z) Without auto switch (with built-in magnet) M9// Note) Types with auto switches are not available in case of high temperature types.

Standard lead wire length is 0.5 m. Add "L" to the end of the part number when 3 m is desired, "M" when 1 m, and "Z" when 5 m.

Number of auto switches/Mounting position				
	Symbol Quantity   Mounting position		Mounting position	
	Nil	_	Without auto switch	
	Α	2 pcs.	Valve open/closed	
	В	1 pc.	Valve open	
	С	1 pc.	Valve closed	

Bypass valve mounting position/ Pilot port direction

J Oyl	IIDUI	I Mounting position	Oyllibul	Filot port direction [
			S	Flange side
	1	Left flange surface	K	Left flange surface
		Surface	L	Rear flange surface
			S	Flange side
	2	Right flange surface	L	Rear flange surface
			M	Right flange surface
		Rear flange	K	Left flange surface
	3	surface	L	Rear flange surface
		ounass	M	Right flange surface
* Flange: (A)				

Seal material

Symbol	Seal material	Compound No.
Nil	FKM	1349-80
N1	EPDM	2101-80
P1	Barrel Perfluoro®	70W
Q1	Kalrez <sup>®</sup>	4079
R1		SS592
R2	Chemraz®	SS630
R3		SSE38
S1	VMQ	1232-70
T1	FKM FOR PLASMA	3310-75
U1 ULTIC ARMOR® U		UA4640
,		

Barrel Perfluoro® is a registered trademark of Matsumura Oil Co., Ltd. Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates

Chemraz<sup>®</sup> is a registered trademark of Greene, Tweed Technologies, Inc. ULTIC ARMOR® is a registered trademark of Nippon Valqua Industries, Ltd.

When the seal material is not being changed, there is no need to select a symbol.

Seal material changed part

XLA

XL□Q

XM□ XY□

D-□

XSA

XVD

XGT

Changed part	Leakage (Pa·m³/s or less) Note)	
Onangeu part	Internal	External
None	1.3 x 10 <sup>-9</sup> (FKM)	1.3 x 10 <sup>-9</sup> (FKM)
2-1 7-1 4 7-2 8	1.3 x 10 <sup>-7</sup>	1.3 x 10 <sup>-7</sup>
2-1 (7-1)	1.3 x 10 <sup>-7</sup>	1.3 x 10-9 (FKM)
4 7-2 8	1.3 x 10 <sup>-9</sup> (FKM)	1.3 x 10 <sup>-7</sup>
	2-1 7-1 4 7-2 8 2-1 7-1	None   1.3 x 10 <sup>-9</sup> (FKM)   2-1 7-1 4 7-2 8   1.3 x 10 <sup>-7</sup>   2-1 7-1   1.3 x 10 <sup>-7</sup>

Note) Values at normal temperature, excluding gas permeation.

### **Maintenance Parts**

M9N(M)(L)(Z) D-M9N(M)(L)(Z)

M9P(M)(L)(Z) D-M9P(M)(L)(Z)

M9B(M)(L)(Z) D-M9B(M)(L)(Z)

2 Bonnet Assembly Part No.

XLG160-30-1H-1 M9NA-XN1

Symbol

Nil

Bonnet assembly		
Temperature	Part no.	
5 to 60°C	XLG160-30-1-1	
5 to 150°C	XLG160-30-1H-1	

### Same as How to Order

Specifications				
Valve type	Main valve: Double acting	Bypass valve: Normally closed		
Shaft seal type	O-ring seal	Bellows seal		
Operating pressure range	Atmospheric pressure to 1 x 10 <sup>-5</sup> Pa			
Fluid	Inert gas under vacuum			
Operating temperature	5 to 60°C (Option: 5 to 150°C)			
Conductance	800 L/s*	Max. 31.5 L/s (Calculated value)		
Operating pressure	0.4 to 0.6 MPa			
Flange	KF160, K160			

Weight 15.7 kg \* Conductance is the value for the "molecular flow" of an elbow with the same dimensions

(8) Bypass Valve Part No.

**XLA-16** X65 Pilot port direction Seal material

Pilot port direction Rear (as seen from body connection point) Left (as seen from body connection point) Right (as seen from body connection point)

Tempera

ature specifications●				
	Symbol	Temperature		
	Nil	5 to 60°C		
	H0	5 to 150°C		

changed part	
Symbol	Changed pa
Nil	None
Α	7-1 (7-2)
В	7-1
С	7-2

Seal material:

Same as the seal materials of How to Order Valve




## **Aluminum High Vacuum Angle Valve** 2-Step Control, Single Acting/Bellows Seal, O-ring Seal

## XLD/XLDV Series RoHS





### How to Order



### 1) Flange size


Size	
25	
40	
50	
63	
80	
100	
160	

### 2 Flange type

Symbol	Type	Applicable flange
Nil	KF (NW)	25, 40, 50, 63, 80 100, 160
D	K (DN)	63, 80, 100, 160

### 3 Pilot port direction

-	
Symbol	Pilot port direction
Nil	Flange side
K	Left flange surface
L	Rear flange surface
M	Right flange surface



### 4 Temperature specifications/Heater

Symbol		Temperature	Heater
Nil		5 to 60°C	_
High	H0	5 to 150°C	_
temperature	H4		With 100°C heater
type	H5		With 120°C heater

Note) Size 25 is not applicable for H4.

### (6) Number of auto switches/Mounting position

Symbol	Quantity	Mounting position
Nil	Without auto switch	_
Α	2 pcs.	Valve open/closed
В	1 pc.	Valve open
С	1 pc.	Valve closed

### 5 Auto switch type

Symbol	Auto switch model	Remarks	
Nil	_	Without auto switch (without built-in magnet)	
M9N(M)(L)(Z)	D-M9N(M)(L)(Z)		
M9P(M)(L)(Z)	D-M9P(M)(L)(Z)		
M9B(M)(L)(Z)	D-M9B(M)(L)(Z)		
A90(L)	D-A90(L)	Reed auto switch	
A93(M)(L)(Z)	D-A93(M)(L)(Z)		
M9//	_	Without auto switch (with built-in magnet)	

Note 1) Auto switches shown above cannot be mounted on the high temperature type. For the high temperature type, a semi-standard product that uses the heat resistant auto switch D-F7NJ\* is available. For details, please contact SMC. Note 2) Standard lead wire length is 0.5 m. Add "L" to the end of the part number

when 3 m is desired, "M" when 1 m, and "Z" when 5 m. Example) -M9NL

### (7) Body surface treatment/Seal material and its changed part

### Body surface treatment

\* Produced by Mitsubishi Cable Industries, Ltd.

ŀ	Symbol	Surface treatment		
ï	Nil	External: Hard anodized Internal: Raw material		
i	Α	External: Hard anodized Internal: Oxalic acid anodized		

### Seal material

Symbol	Seal material	Compound No.
Nil	FKM	1349-80*
N1	EPDM	2101-80*
P1	Barrel Perfluoro®	70W
Q1	Kalrez®	4079
R1	Chemraz®	SS592
R2		SS630
R3		SSE38
S1	VMQ	1232-70*
T1	FKM for Plasma	3310-75*
U1	ULTIC ARMOR®	UA4640

### · Seal material changed part and leakage

ſ	Symbol	Changed Note 2)	Leakage (Pa·m³/s or less) Note 1)		
ľ	Cymbol	part	Internal	External	
	Nil	None	1.3 x 10 <sup>-10</sup> (FKM)	1.3 x 10 <sup>-11</sup> (FKM)	
	Α	2, 3, 4, 5	1.3 x 10 <sup>-8</sup>	1.3 x 10 <sup>-9</sup>	
	В	2, 4, 5	1.3 x 10 <sup>-8</sup>	1.3 x 10 <sup>-11</sup> (FKM)	
	С	3	1.3 x 10 <sup>-10</sup> (FKM)	1.3 x 10 <sup>-9</sup>	

Note 1) Values at normal temperature, excluding gas permeation. Note 2) Refer to parts number of "Construction" on page 451 for changed part. Number indicates parts number of "Construction" accordingly.

To order something other than "Nil" (standard), list the symbols starting with "X," followed by each symbol for "body surface treatment," "seal material" and then "changed part".

### Example) XLD-25-M9NA-XAN1A

Barrel Perfluoro® is a registered trademark of Matsumura Oil Co., Ltd. Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.


Chemraz® is a registered trademark of Greene, Tweed Technologies, Inc. ULTIC ARMOR® is a registered trademark of Nippon Valqua Industries,

# Operated/with Solenoid



#### How to Order





# 1) Flange size

· i idinge oiz	•
Size	1
25	
40	1
50	1
63	1
80	1
100	1
160	]

#### 2 Flange type

= r lange type			
Symbol	Type	Applicable flange	
Nil	KF (NW)	25, 40, 50, 63, 80 100, 160	
D	K (DN)	63, 80, 100, 160	

#### 3 Solenoid valve direction

Symbol	Solenoid valve direction	
K Left flange surfac		
L Rear flange surfa		
M Right flange surface		

<sup>\*</sup> M type is not available for size 25



#### 4 Auto switch type

Symbol	Auto switch model	Remarks	
Nil —		Without auto switch (without built-in magnet	
M9N(M)(L)(Z)	D-M9N(M)(L)(Z)		
M9P(M)(L)(Z)	D-M9P(M)(L)(Z)	Solid state auto switch	
M9B(M)(L)(Z)	D-M9B(M)(L)(Z)		
A90(L)	D-A90(L)	Reed auto switch	
A93(M)(L)(Z)	D-A93(M)(L)(Z)	Reed auto switch	
M9//	-	Without auto switch (with built-in magne	

Standard lead wire length is 0.5 m. Add "L" to the end of the part number when 3 m is desired, "M" when 1 m, and "Z" when 5 m. Example) -M9NL

#### (5) Number of auto switches/Mounting position

Symbol	Quantity	Mounting position
Nil	Without auto switch	1
A 2 pcs.		Valve open/closed
B 1 pc.		Valve open
C 1 pc.		Valve closed

# 6 Rated voltage

1	100 VAC, 50/60 Hz	_
2	200 VAC, 50/60 Hz	_
3	110 VAC, 50/60 Hz	
4	220 VAC, 50/60 Hz	_
5	24 VDC	0
6	12 VDC	C

# 7 Electrical entry

G	Grommet (Lead wire length 300 mm)			
Н	Grommet (Lead wire length 600 mm)			
L	L type plug connector			
M M type plug connector				

#### 8 Light/Surge voltage suppressor 10 CE-compliant

Nil	None
s	With surge voltage suppressor
Z	With light/surge voltage suppressor
U	With light/surge voltage suppressor (Non-polar type)

\* S type: Not available for AC

\* U type: DC only.

1411		
Q	CE-compliant	

XLA

XL□O

XM□ XY□ D-□

XSA

XVD

XGT

CYV

# (9) Body surface treatment/Seal material and its changed part

#### Body surface treatment

Symbol	Surface treatment		
Nil	External: Hard anodized Internal: Raw material		
Α	External: Hard anodized Internal: Oxalic acid anodized		

#### Seal material

Symbol	Seal material	Compound No.
Nil	FKM	1349-80*
N1	EPDM	2101-80*
P1	Barrel Perfluoro®	70W
Q1	Kalrez®	4079
R1		SS592
R2	Chemraz®	SS630
R3		SSE38
S1	VMQ	1232-70*
T1	FKM for Plasma	3310-75*
U1	ULTIC ABMOR®	UA4640

\* Produced by Mitsubishi Cable Industries, Ltd.

# · Seal material changed part and leakage

Symbol	Changed Note 2)	Leakage (Pa·m³/s or less) Note 1)		
Syllibol	part	Internal	External	
Nil	None	1.3 x 10 <sup>-10</sup> (FKM)	1.3 x 10 <sup>-11</sup> (FKM)	
Α	2, 3, 4, 5	1.3 x 10 <sup>-8</sup>	1.3 x 10 <sup>-9</sup>	
В	2, 4, 5	1.3 x 10 <sup>-8</sup>	1.3 x 10 <sup>-11</sup> (FKM)	
С	3	1.3 x 10 <sup>-10</sup> (FKM)	1.3 x 10 <sup>-9</sup>	

Note 1) Values at normal temperature, excluding gas permeation. Note 2) Refer to parts number of "Construction" on page 451 for changed part. Number indicates parts number of "Construction" accordingly.

To order something other than "Nil" (standard), list the symbols starting with "X," followed by each symbol for "body surface treatment," "seal material" and then "changed part".

#### Example) XLDV-25-M9NA-1G-XAN1A

Note 1) Option specifications/Combinations

This model has auto switch and K(DN) flange options, but high temperature/heater options are not available Note 2) Solenoid valves

Main exhau Model Initial exhaust valve Example XI DV-25 V114-1GS V114 SYJ314 SYJ314-1GS

Barrel Perfluoro® is a registered trademark of Matsumura Oil Co., Ltd. Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

Chemraz® is a registered trademark of Greene, Tweed Technologies, Inc. ULTIC ARMOR® is a registered trademark of Nippon Valqua Industries, Ltd.

XLDV-40/50/63/80/100/160 \* For details, consult your SMC sales representative.

<sup>\*</sup> For option "Q", the solenoid valve should be a CE-compliant product.

# XLD/XLDV Series

# **Specifications**

Model			XLD(V)-25	XLD(V)-40	XLD(V)-50	XLD(V)-63	XLD(V)-80	XLD(V)-100	XLD(V)-160
Valve type			Normally closed (Spring Return and seal) [Both main & initial exhaust valves]						
Fluid					Inert	gas under va	cuum		
Operating temperature (%	٠,	XLD			5 to 60 (High	temperature t	ype: 5 to 150)		
Operating temperature (°C) XLDV					5 to 50				
Operating pressure (Pa) (abs)				1 x 10 <sup>-6</sup> to	atmospheric	pressure			
Conductance (L/s) Note 1)	Mair	n exhaust valve	14	45	80	160	200	300	800
Conductance (L/S)	Initia	al exhaust valve	0.5 to 3	2 to 8	2.5 to 11	4 to 18	4 to 18	6.5 to 31.5	6.5 to 31.5
Leakage (Pa·m³/s)	Internal		In case of standard material FKM: 1.3 x 10 <sup>-10</sup> at normal temperature, excluding gas permeation						
Leakage (Favili /S)		External	In case of standard material FKM: 1.3 x 10 <sup>-11</sup> at normal temperature, excluding gas permeation						
Flange type				KF (NW)			KF (NW	), K (DN)	
Principal materials Note 3)			Body: Aluminu	m alloy, Bellows	: Stainless steel	316L, Main par	: Stainless stee	l, FKM (Standard	d seal material)
Surface treatment				Exte	ernal: Hard an	odized Inter	nal: Raw mate	erial	
Pilot pressure (MPa) (G)				0.	4 to 0.7 [Both	main & initial	exhaust valve	s]	
XLD XLD			M5 Rc1/8 Rc					Rc1/4	
Pilot port size XLDV			M5: Port 1(P), Port 3(R)						
XLD		0.5	1.2	1.8	3.4	5.6	11.5	20	
Weight (kg)		XLDV	0.57	1.3	1.9	3.5	5.7	11.6	20.1


Note 1) The main exhaust valve conductance is the valve for the "molecular flow" of an elbow with the same dimensions. The initial exhaust valve conductance is the value for the "viscous flow".

Note 2) For valve heater specifications, refer to "Common Option [1] Heater" on page 459.

Note 3) A coating of vacuum grease [Y-VAC2] is applied to the seal-material sliding portion (initial exhaust valves sliding parts) of the vacuum part.

# Aluminum High Vacuum Angle Valve XLD/XLDV Series

#### Construction/Operation

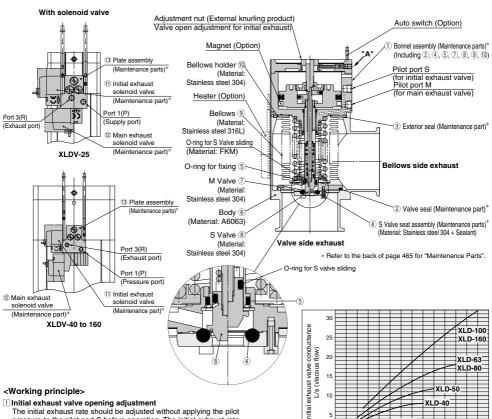

The initial exhaust rate should be adjusted without applying the pilot pressure to the pilot port S before operation. The initial exhaust rate is set to zero by gently turning the adjustment nut clockwise until it stops. (Do not use any tools.) The initial exhaust rate is adjusted by turning the adjustment nut counterclockwise.

#### 2 Opening of the initial exhaust valve (valve S)

When the pilot pressure is applied to the pilot port S, the valve S is removed from the valve S seal assembly, and the valve opens the adjusted amount. For the XLDV, when the pilot pressure is always applied to the port 1(P) and the initial exhaust solenoid valve is turned ON, the valve opens the adjusted amount.

#### 3 Opening of the main exhaust valve (valve M)

When the pilot pressure is applied to the pilot port M, the valve M is removed from the body seat portion, and the valve fully opens. For the XLDV, when the pilot pressure is applied to the port 1(P) and the initial exhaust solenoid valve is turned ON, the valve fully opens.

#### 4 Closing of the initial exhaust / main exhaust valves

By removing the pilot pressure from the pilot port S and pilot port M, both S and M valves return to their previous positions and they are sealed. For the XLDV, by turning OFF the initial exhaust valve and main exhaust valve, both S and M valves return to their previous positions and they are sealed.

#### <Options>

(for main exhaust valve

Auto switch: The magnet actuates the auto switch. With two auto switches, the open and closed positions are detected, and with one auto switch, either the open or closed position is detected. Auto switches are applicable at ordinary temperatures only (5 to 60°C).

XI D-25

3 3.5 4

Adjustment nut rotations n

Initial exhaust valve conductance

Heater: Simple heating is performed using thermistors. The valve body can be heated to approximately 100 or 120°C, depending on the heater option and valve size. The type and number of thermistors to be used will vary depending upon size and setting temperature. In the case of high temperature specifications, the bonnet assembly is a heat resistant structure. This is not

0.5

available with solenoid valve.

Note) The adjustment nut does not rotate during valve operation. However, rotation of the adjustment nut can be fixed to prevent incorrect operation. When fixing the adjustment nut after setting, tighten it with the tightening torque shown in the table below. (Tightening with excessive torque can result in damaged components or the generation of abnormal noise.)

#### "A" Section Thread Tightening Torque

Model	XLD(V)-25	XLD(V)-40	XLD(V)-50	XLD(V)-63	XLD(V)-80	XLD(V)-100	XLD(V)-160
Tightening torque	1 80.0	N·m (0.8 kgf·cm) c	or less		0.3 N⋅m (3 kg	gf·cm) or less	

XLA

XL\(\pi\)

XM□

XY□

D-□

XSA

XVD

XGT


CYV

4.5 5 5.5 6 6.5 7

# XLD/XLDV Series

#### **Dimensions**

# XLD/Air operated

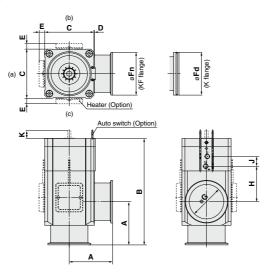

											(111111)
Model	Α	В	С	D	E	Fn	Fd	G	Н	J	K
XLD-25	50	123	48	1	12	40	_	26	41	16	7.5
XLD-40	65	170	66	2	11	55	_	41	63	20	15
XLD-50	70	183	79	2	11	75	_	52	68	20	17.5
XLD-63	88	217	100	3	11	87	95	70	72	20	20
XLD-80	90	256	117	3	11	114	110	83	98	20	26.5
XLD-100	108	321	154	3	11	134	130	102	133	20	38
XLD-160	138	335	200	3	11	190	180	153	114	30	40

Note 1) Dimension E applies when heater option is included. (Lead wire length: approx. 1 m)


Note 2) (a), (b) and (c) in the above drawing indicate heater mounting positions.


Moreover, heater mounting positions will differ depending on the type of heater.

For further details, refer to mounting positions under "Replacement Heaters" on page 465.

# Aluminum High Vacuum Angle Valve XLD/XLDV Series

#### **Dimensions**

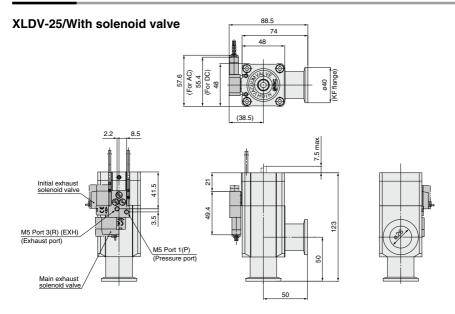

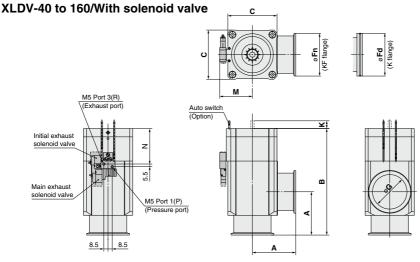

									(mm)
Model	Α	В	С	Fn	Fd	G	М	N	K
XLDV-40	65	170	66	55	_	41	48.5	53.5	15
XLDV-50	70	183	79	75	_	52	55	57.5	17.5
XLDV-63	88	217	100	87	95	70	66.5	72.2	20
XLDV-80	90	256	117	114	110	83	75	82.6	26.5
XLDV-100	108	321	154	134	130	102	93.5	95.2	38
XLDV-160	138	335	200	190	180	153	116.5	101.2	40

Note) For details, consult your SMC sales representative.

XLA XI

XL□Q

XM□ XY□

D-□ XSA

XVD


XGT CYV

# Aluminum High Vacuum Angle Valve Manual/Bellows Seal XLH Series





#### How to Order



LH

#### 1 Flange size

Trialige Siz
Size
16
25
40
50

#### 2 Heater

Ol I	Heater	Applicable flange size				
Symbol	Heater	16	25	40	50	
Nil	_	•	•	•	•	
H4	With 100°C heater	I	I	•	•	
H5	With 120°C heater	_	•	•		

Note) Size 16 is not applicable for H4. H5. Size 25 not for H4.

#### 3 Body surface treatment/Seal material and its changed part

#### Body surface treatment

Symbol	Surface treatment						
Nil	External: Hard anodized Internal: Raw material						
Α	External: Hard anodized Internal: Oxalic acid anodized						

#### Seal material

FKM EPDM Barrel Perfluoro <sup>©</sup> Kalrez <sup>©</sup>	1349-80* 2101-80* 70W 4079
Barrel Perfluoro®	70W
Perfluoro®	
Kalrez <sup>®</sup>	4079
	SS592
Chemraz®	SS630
	SSE38
VMQ	1232-70*
FKM for Plasma	3310-75*
ULTIC ARMOR®	UA4640
	VMQ FKM for Plasma ULTIC

I \* Produced by Mitsubishi Cable Industries, Ltd.

#### Seal material changed part and leakage

C	Changed part	Leakage (Pa·m³/s or less) Note 1)					
Symbol	part	Internal	External				
Nil	None	1.3 x 10 <sup>-10</sup> (FKM)	1.3 x 10 <sup>-11</sup> (FKM)				
Α	2,3	1.3 x 10 <sup>-8</sup>	1.3 x 10 <sup>-9</sup>				
В	2	1.3 x 10 <sup>-8</sup>	1.3 x 10 <sup>-11</sup> (FKM)				
С	(3)	1.3 x 10 <sup>-10</sup> (FKM)	1.3 x 10 <sup>-9</sup>				

Note 1) Values at normal temperature, excluding gas permeation.

Note 2) Refer to parts number of "Construction" on page 455 for changed part.

Number indicates parts number of "Construction" accordingly.

To order something other than "Nil" (standard), list the symbols starting with "X", followed by each symbol for "body surface treatment", "seal material" and then "changed part".

#### Example) XLH-16-XAN1A

Barrel Perfluoro® is a registered trademark of Matsumura Oil Co., Ltd. Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

Chemraz<sup>®</sup> is a registered trademark of Greene, Tweed Technologies, Inc. ULTIC ARMOR® is a registered trademark of Nippon Valqua Industries, Ltd.


# **Specifications**

Model		XLH-16	XLH-25	XLH-40	XLH-50		
Valve type		Inert gas under vacuum					
Fluid (°C) 5 to 150							
Operating pressure (Pa) (abs) 10 <sup>-6</sup> to atmospheric pressure							
Conductance (L/s) Note 1)		5	14	45	80		
11(5	Internal	In case of standard material FKM: 1.3 x 10 <sup>-10</sup> at normal temperature, excluding gas permeation					
Leakage (Pa·m³/s)	External	In case of standard material FKM: $1.3\mathrm{x}\ 10^{-11}$ at normal temperature, excluding gas permeation					
Flange type		KF (NW)					
Principal materials		Body: Aluminum alloy, Bel	ows: Stainless steel 316L, M	lain part: Stainless steel, FK	M (Standard seal material)		
Surface treatment			External: Hard anodized	Internal: Raw material			
Actuation torque (N⋅m)		0.1 ≤	0.15 ≤	0.35 ≤	0.5 ≤		
Handle revolutions	_	5	7	10	13		
Weight (kg)		0.23	0.41	1.05	1.62		
N-1- 1) The conductors is the con-							

Note 1) The conductance is the same as that of an elbow of the same dimensions.

Note 2) For valve heater specifications, refer to "Common Option [1] Heater" on page 459.

#### Construction/Operation

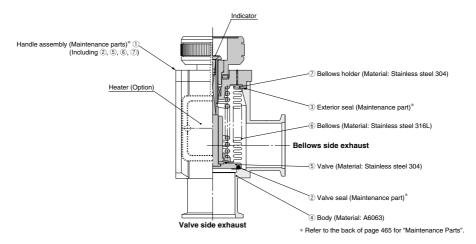

#### <Working principle>

By turning the handle to the left, the valve opens. The handle does not move up and down, but the indicator shows the open or closed position of the valve. As the handle is turned to the right, the valve closes, and when the turning force of the handle suddenly ceases to be felt, the valve is sealed. The sealing force for the valve comes from the spring, and is constant.

#### <Options>


Heater: Simple heating is performed using thermistors. The valve body can be heated to approximately 100 or

120°C, depending on the valve size. The type and number of thermistors to be used will vary

depending upon size and setting temperature. Indicator: When the valve is open, an orange marker appears in

the center of the name plate.

#### **Dimensions**

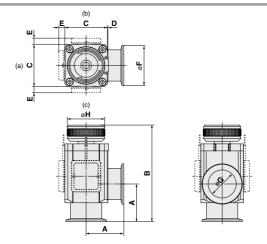

								(111111)
Model	Α	В	С	D	E Note 1)	F	G	Н
XLH-16	40	100.5	38	1	_	30	17	35
XLH-25	50	114	48	1	12	40	26	41
XLH-40	65	162.5	66	2	11	55	41	57
XLH-50	70	179.5	79	2	11	75	52	70
ALII 00	70	170.0	7.5			7.5	32	70

Note 1) Dimension E applies when heater option is included. (Lead wire length: approx. 1 m) Note 2) (a), (b) and (c) in the above drawing indicate heater mounting positions.

Moreover, heater mounting positions will differ depending on the type of heater.

For further details, refer to mounting positions under "Replacement Heaters" on page 465.



XLA

XL□O XM□ XY□ D-□ XSA XVD XGT CYV


# Aluminum High Vacuum Angle Valve Electromagnetic/Bellows Pressure Balance

# XLS Series






#### **How to Order**

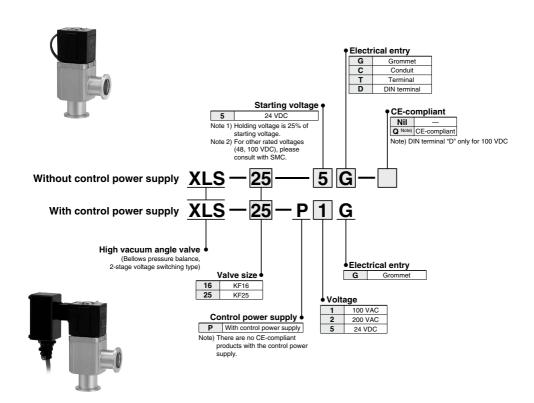

# **⚠** Warning

(1) In case there is no control power supply (XLS-25-□□: 24/48/100 VDC), starting voltage should be applied for only 0.15 to 0.2 s, in accordance with the prescribed method (indicated on the back of the coil). Continuously applying starting voltage can cause overheating of the coil and fire. Holding voltage is 25% of the starting voltage (the application method is shown on the back of the solenoid coil).



### **Specifications**

Model		XLS-16	XLS-25	XLS-16-P□G	XLS-25-P□G		
Valve type		Normally closed (N.C.)					
Fluid			Inert gas ur	nder vacuum			
Operating temperature (°C)			5 to	40			
Operating pressure (Pa)			0.1 MPa (G) to	o 1 x 10 <sup>-6</sup> (abs)			
Conductance (L/s) Note 1)		5	8	5	8		
Leakage (Pa·m³/s)	Internal	1.3 x	10 <sup>-8</sup> at normal temperati	ure, excluding gas perme	eation		
Leakage (Pa•III-78)	External	1.3 x 10 <sup>-11</sup> at normal temperature, excluding gas permeation					
Flange type/size		KF16	KF25	KF16	KF25		
Principal materials Note 2)		Body: Aluminum alloy, Main part: Stainless steel, PFA, FKM (Standard seal material)					
Surface treatment			External: Hard anodized Internal: Raw material				
Control power supply		N	lo	Y	es		
Operating power supply volta	age	24/6, 48/12,	100/24 VDC	24 VDC, 10	00/200 VAC		
Allowable voltage fluctuation	(%)	±10					
Electrical entry		G, C, D	), T type	G type only			
Lead wire		AWG20, O.	D.: 2.63 mm	VCTF2 x 0.75, O.D.: 2.3 r	mm, Sheath O.D.: 6.6 mm		
Coil insulation Class B							
Maximum operating frequence		0.17					
Weight (kg)		0.4	0.7	0.7	1.0		

Note 1) Conductance is the value for an elbow with the same dimensions.


Note 2) A coating of vacuum grease [Y-VAC3] is applied to the valve seat of the vacuum part.

#### Power/Voltage

#### At the Rated Voltage

Model			Star	rting	Holding		
	Wiodei			Current (A)	Power (W)	Current (A)	
	□G/C/D/T,	P5G	36	1.5	4.8	0.38	
	P1G	50 Hz	30.5	0.47	14.8	0.35	
XLS-16-	PIG	60 Hz	30.5	0.47	10	0.27	
	P2G	50 Hz	30	0.24	4.9	0.11	
	FZG	60 Hz	30	0.24	2.3	0.10	
	□G/C/D/T,	P5G	47	2.0	5.3	0.5	
	P1G	50 Hz	42	0.62	20	0.46	
XLS-25-	FIG	60 Hz	42	0.62	13.5	0.36	
	Bac	50 Hz		0.35	6.7	0.15	
	P2G	60 Hz	45	0.35	3.0	0.12	

#### Construction/Operation

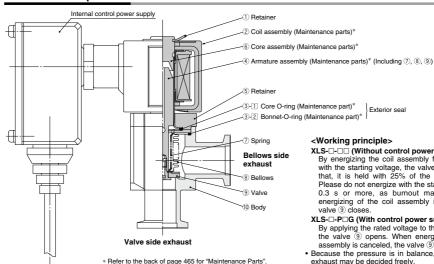

#### <Working principle>

XLS-□-□□ (Without control power supply)

Exterior seal

By energizing the coil assembly for 0.15 to 0.2 s with the starting voltage, the valve 9 opens. After that, it is held with 25% of the starting voltage. Please do not energize with the starting voltage for 0.3 s or more, as burnout may result. When energizing of the coil assembly is canceled, the valve 9 closes.

#### XLS-□-P□G (With control power supply)

By applying the rated voltage to the coil assembly, the valve 9 opens. When energizing of the coil assembly is canceled, the valve 9 closes.

· Because the pressure is in balance, the direction of exhaust may be decided freely.

457 A

XLA

 $XL\square$ 

XL□Q

XM□

XY□

D-□ XSA

XVD


XGT

CYV




#### **Dimensions**

# XLS/Without control power supply

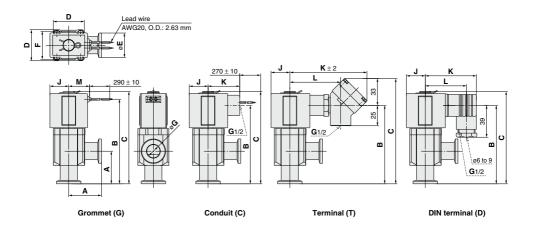

# XLS/With control power supply

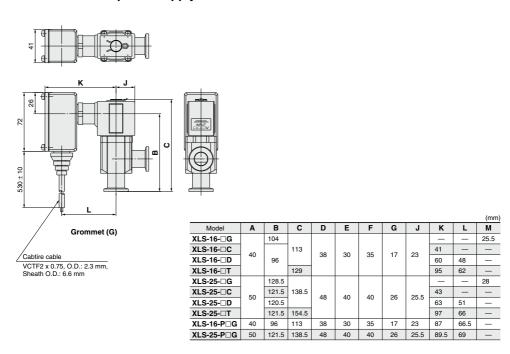

# XL□ Series Common Option


# 1 Heater

Valve heaters are common for models **XLA**, **XLC**, **XLD**, **XLF**, **XLG** and **XLH**. Power consumption specifications are shown in the below table.

Item			XL□-25	XL□-40	XL□-50	XL□-63	XL□-80	XL□-100	XL□-160		
Rated heater voltage				90 to 240 VAC							
	Heater asser	mbly quantity	_	1 pc.	1 pc.	1 pc.	1 pc.	2 pcs.	3 pcs.		
Heater assembly quantity used	H4	100V	_	200/40	200/50	400/100	600/150	800/220	1200/350		
Heater power W (Nominal value)	100°C	200V	_	800/40	800/50	1600/100	2400/150	3200/220	4800/350		
In-rush/Power consumption	Heater assembly quantity		1 pc.	1 pc.	1 pc.	1 pc.	2 pcs.	3 pcs.	4 pcs.		
(Option symbol-Operating voltage)	H5	100V	200/40	400/70	400/80	600/130	800/180	1200/300	1600/400		
	120°C	200V	800/40	1600/80	1600/80	2400/130	3200/180	4800/300	6400/400		

<sup>\*</sup> The inrush current of the heater flows for several ten seconds when using 100V while it flows for several seconds when using 200V. However, this inrush current decreases momentarily.

#### Inrush current flow time (Reference)

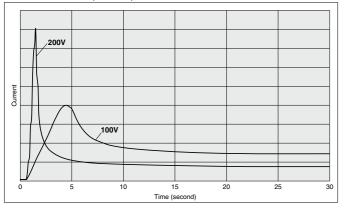

XLA
XLQ
XLQ
XMQ
XYQ

XVD XGT CYV

<sup>\*</sup> When the valve uses multiple heater assemblies, do not turn ON the power to each heater assembly at the same time. Turn ON the power to each heater assembly one-by-one in order at intervals of 30 sec. since the inrush current is large.

<sup>\*</sup> The heater temperature will decrease several % from the start of heating and then becomes stable. (The heater temperature may decrease approximately 5 to 10% due to individual differences.)

<sup>\*</sup> Refer to "Maintenance Parts" on page 465 for further details regarding quantity and type.

# XL□ Series Glossary

# 1 Seal Materials

Please note that the following are general features and subject to change depending on processing conditions. For details, please contact sealing component manufacturerers.

#### FKM (Fluororubber)

With low outgassing, low permanent-setting and low gas permeation rates, this is the most popular seal material for high vacuums. Standard material used by SMC's high vacuum angle valve is Mitsubishi Cable Industries, Ltd. (Compound No. 1349-80).

It is advisable to choose a model depending on its application, because an improved material compound (3310-75) which reduces the weight reduction ratio with  $O_2$  plasma is also available.

Kalrez® \* Kalrez® is a registered trademark of E.I. du Pont de Nemours and Company or its affiliates. This material, perfluoroelastomer (FFKM), has excellent heat and chemical resistance, but its permanent-setting is large, and special caution is required. Variations are available with improved plasma (O<sub>2</sub>, CF<sub>4</sub>) and particulate resistance; therefore it is advisable to select types based upon the application.

Compound No. 4079: Standard Kalrez®, excellent in gas and heat resistance.

Chemraz® + Chemraz® is a registered trademark of Greene, Tweed Technologies, Inc.
This material, perfluoroelastomer (FFKM), has excellent chemical and plasma resistance and has slightly higher heat resistance than FKM. Several variations of Chemraz® are available and it is advisable to choose based upon the particular plasma being used and other conditions, etc.

Compound No. SS592: Excellent physical properties and especially effective for moving parts.

Compound No. SS630: Applicable to both fixed and moving parts and compatible with a wide variety of applications.

Compound No. SSE38: The cleanest material among Chemraz®, developed for high-density plasma instruments.

Barrel Perfluoro® • Barrel Perfluoro® is a registered trademark of Matsumura Oil Co.,Ltd.
Compound No. 70W: Perfluoroelastomer (FFKM) which does not contain a metal filler. Resistant against NF3, NH3. Low particle generation under dry process conditions.

ULTIC ARMOR® • ULTIC ARMOR® is a registered trademark of Nippon Valqua Industries, Ltd. Fluoro-based rubber which does not contain a metal filler. Seal material which is plasma-resistant and has low gas emittance and heat resistance.

#### Silicone (Silicone rubber, VMQ)

This material is relatively inexpensive, has good plasma resistance, but its gas permeation rate is high.

Optional seal material used by SMC's high vacuum angle valve is Mitsubishi Cable Industries, Ltd. (Compound No. 1232-70, White)

It has a low weight-reduction ratio and low particle generation within  $O_2$  plasma and  $NH_3$  gas environments.

#### EPDM (Ethylenepropylene rubber)

Relatively lower priced and excellent in weatherability, chemical and heat resistance, but with no resistance at all to general mineral oil. Optional seal material used by SMC's high vacuum angle valve is Mitsubishi Cable Industries, Ltd. (Compound No. 2101-80)

Resistant to NH3 gas, etc.

#### ® 460

# 2 Shaft Sealing Method

#### **Bellows**

Bellows offer cleaner sealing with reduced particle generation and less outgassing. The two major bellow types are: Formed-bellows and Welded-bellows. Formed-bellows produce less dusts and offer higher dust resistance. Welded-bellows allow longer strokes, but generate more dust particles and offer less dust resistance. Please note, the endurance depends on length and speed of the strokes.

#### O-ring, etc.

Due to entrainment of gases and generation of particulates, vacuum performance is somewhat inferior to the bellows type. However, high speed operation is possible and durability is comparatively high. In general, fluorinated grease is affixed to the shaft seal portion.

# **3 Response Time/Operation Time**

#### Valve opening

The time from the application of voltage to the actuation solenoid valve (XL $\square$ ) until 90% of the valve stroke has been completed is the valve opening response time. Valve opening operation time indicates the time from the start of the stroke until 90% of movement has been completed. Both of these become faster as the operating pressure is increased.

#### Valve closing

The time from the cut off of power to the actuation solenoid valve (XL□) until 90% of the valve return stroke has been completed is the valve closing response time. Valve closing operation time indicates the time from valve opening until 90% of return movement has been completed. Both of these become slower as the operating pressure is increased.

### 4 Molecular Flow Conductance

#### Orifice conductance

In the case of a  $\emptyset A$  (cm²) hole in an ultra-thin plate, conductance "C" results from "V", the average velocity of the gas; "F", the gas constant; "M", the molecular weight; and "T", the absolute temperature. From the formula C=11.6A (L/sec) at an air tempearture of  $20^{\circ}C$ .




#### Cylinder conductance

With length "L" (cm) and diameter "D" (cm) where L>>D, from the formula C= $(2\pi RT/M)^{0.5}D^3/6L$ , the conductance C=12.1 D³/L (L/sec) at an air temperature of 20°C.

#### Short pipe conductance

From the Clausing's factor "K" and hole conductance "C" in Graph 1. (Clausing's factor drawing), the short pipe conductance  $C_K$  is easily found as  $C_K$ =KC.



#### Conductances combined

When each of the separate conductances are given as  $C_1$ ,  $C_2$  and  $C_1$ , the composite conductance  $\Sigma C$  is expressed as:  $\Sigma C=1/(1/C_1+1/C_2+\cdots+1/C_1)$  when in series, and  $\Sigma C=C_1+(C_2+\cdots+C_1)$ , when in parallel.

# 5 He Leakage

#### Surface leakage

This leakage occurs between surfaces of the sealing and the seal material. In the case of elastic body seal (elastomer), leakage values are confirmed within minutes of operation. Leakage rate is measured at room temperature (20 to 30°C).

#### Gas permeation

This is leakage caused by diffusion through the elastic body seal material. As temperature increases, the diffusion rate increases, and in many cases, becomes greater than surface leakage. The diffusion rate is proportional to the cross-sectional area (cm²) of the seal, and inversely proportional to the seal width (distance between the atmosphere and the vacuum side). In the case of metal gaskets, only hydrogen diffusion should be considered.

### 6 Outgassing


This is a phenomenon where gases adhered or adsorbed to the metallic surface or its inside parts are released from the surface and drawn into the vacuum according to the pressure decrease. The smoothness of the surface and closeness of the oxidized layer can effect (increase/decrease) this.

#### 7 Ultimate Pressure

Ultimate pressure P (Pa) is P=Q/S, where the sum of Weight flow rates for outgassing (Qg) and leakage Q(L) is Q(Pa-m³/s), and the exhaust speed is S(m³/s). The ultimate pressure is measured with Qg, Q(L)S shown as above, and the ultimate pressure of the pump itself. In the case of very low pressure, the exhaust characteristics of the actual pump can be the limiting factor. In particular, a deterioration of exhaust characteristics due to an unclean pump and invasion of the atmospheric moisture can be the major factor.

# 8 Exhaust Time (Low/Medium Vacuum)

The time ( $\triangle$ t) required to exhaust a chamber at low vacuum with volume V (L), from pressure P1 to P2, using a pump with pumping speed S (L/sec) is  $\triangle$ t=2.3(V/S)log(P1/P2). In high vacuum, this is subject to the ultimate pressure limit imposed by outgasing and leakage as characterized above.



# 9 Baking

Gases such as oxygen and nitrogen, which have a small adsorption activation energy (E) and a short adsorption residence time (r), are evacuated quickly. However, in the case of water, which has a high activation energy, evacuation does not progress quickly unless the temperature (T: absolute temperature) is raised to shorten residence time. This time is characterized as  $\tau=0$  exp(E/RT) where R is the ideal gas constant and  $\tau0=(approx.)$   $10^{-13}$  sec.

Residence time of water at  $20^{\circ}$ C is 5.5 x  $10^{\circ}$ 6 sec, whereas at  $150^{\circ}$ C, it is 2.8 x  $10^{\circ}$ 6 sec, or about 200 times shorter. The objective of baking is to exhaust water with long adsorption residence time more quickly.

XLA

XL\( \

XMU XYU

XSA

XVD

XGT

CYV



Be sure to read this before handling the products.

#### Air Operated Angle Valves/XLA(V), XLC(V), XLD(V), XLF(V), XLG(V) Series

#### Design

# **⚠** Warning

#### All models

- 1. The body material is A6063, the bellows are stainless steel 316L, and other metal seal material is stainless steel 304. Standard seal material in the vacuum section is FKM that can be changed to the other materials (please refer to "How to Order"). Use fluids which are compatible with materials after confirming.
- 2. Select materials for the actuation pressure piping, and heat resistance for fittings that are suitable for the applicable operating temperatures.
- Model with auto switch/XLA(V), XLC(V), XLD(V), XLF(V), XLG(V)
- 1. The switch section should be kept at a temperature no greater than 60°C
- Model with heater/XLA, XLC, XLD, XLF, XLG
- 1. When using a model with a heater (thermistor), a device should be installed to prevent overheating.
- Model with solenoid valve/XLAV, XLCV, XLDV, XLFV. XLGV
- 1. For models with a solenoid valve, the temperature of the solenoid valve section should be no greater than 50°C.

#### Selection

# **∕** Caution

#### All models

- 1. For high vacuum valves used in the main exhaust lines of flat panel display manufacturing equipment and other large manufacturing equipment, the XLF(V) or XLG(V) series, employing O-ring seal type for improved durability, is recommended.
- 2. When controlling valve responsiveness, take note of the size and length of piping, as well as the flow rate characteristics of the actuating solenoid valve.
- 3. Actuating pressure should be kept within the specified range. 0.4 to 0.5 MPa is recommended.
- 4. Use within the limits of the operating pressure range.
- 5. The actuating piston chamber and the bellows chamber [except for XLF(V)/XLG(V)] are directly connected to atmosphere. Please use in an environment in which dust emissions will not cause

problems. (Please consult SMC if the release of dust must be avoided.)

#### High temperature type/XLA, XLC, XLD, XLF, XLG

1. In the case of gases which cause a large amount of deposits, heat the valve body to prevent deposits in the valve.

#### Mounting

# 

#### All models

A 462

- 1. In high humidity environments, keep valves packaged until the time of installation.
- 2. In case with switches and solenoid valves, secure the lead wires so that they have sufficient slack, without any unreasonable force applied to them.
- 3. Perform piping so that excessive force is not applied to the flange sections. In case there is vibration of heavy objects or attachments, etc., secure them so that torque is not applied directly to the flanges.

#### Mounting

# **∕**∖∖ Caution

- 4. Vibration resistance allows for normal operation up to 30 m/s<sup>2</sup> (45 to 250 Hz), but continuous vibration may cause a decline in durability. Arrange piping to avoid excessive vibrations or
- High temperature type (Model/XLA, XLC, XLD, XLF, XLG; Temperature specifications/H0, H2, H3)
- 1. In models with heater (thermistor), take care not to damage the insulation components of the lead wires and connector section.
- 2. The setting temperature for models with heater should be established without a draft or heat insulation. It will change depending on conditions such as heat retaining measures and the heating of other piping. Fine adjustment is not possible.
- 3. When installing heater accessories or mounting a heater, check insulation resistance at the actual operating temperature. A short circuit breaker or fuse should be installed.
- 4. When a valve is to be heated, only the body section should be heated, excluding the bonnet section.
- 5. When a heater is in operation, the entire valve becomes hot. Be careful not to touch it with bare hands, as burns will result.

#### **Piping**


# **∕** Caution

- 1. Before mounting, clean the surface of the flange seal and the O-ring with ethanol, etc.
- 2. There is an indentation of 0.1 to 0.2 mm in order to protect the flange seal surface, and it should be handled so that the seal surface is not damaged in any way. When using an outer ring, be sure that the O-ring is compressed sufficiently. (There is basically no problem with the outer ring.)
- 3. Exhaust direction
  - During operation, the direction of the exhaust may be determined freely, but in cases where a flow is generated by the exhaust, a decline in durability may result.

The exhaust direction shown in the figure below (bellows side exhaust) is recommended.

Please take all available precautions, as the life of the equipment is affected by conditions of usage.

#### Recommended exhaust direction [Vacuum pump connected on bellows side]



4. The valve may not be mounted depending on the piping material type (clamp, etc.). Be sure to check the piping material before use.





Be sure to read this before handling the products.

#### Air Operated Angle Valves/XLA(V), XLC(V), XLD(V), XLF(V), XLG(V) Series

#### Maintenance

### **∕** Caution

- When removing deposits from a valve, take care not to damage any of its parts.
- Replace the bonnet assembly when the end of its service life is approached.
- If damage is suspected prior to the end of the service life, perform early maintenance.

#### Maintenance

# 

- **4.** SMC specified parts should be used for service. Refer to "Construction", "Replacement Parts," or "Maintenance Parts."
- When removing valve or exterior seals, take care not to damage the sealing surfaces. When installing the valve seal, be sure that the O-ring is not twisted.

#### Manual Angle Valve/XLH Series

#### Design

# ⚠ Warning

interfere with the material

- 1. The body material is A6063, the bellows are stainless steel 316L, other vacuum parts are stainless steel 304. FKM is the standard seal material for the vacuum part, but other materials may be selected (please refer to How to Order). Please check the material used, and use only fluids that will not
- 2. When using a model with a heater (thermistor), a device should be installed to prevent over heating.

#### Selection

# **⚠** Caution

- 1. Use within the limits of the operating pressure range.
- In the case of gases which cause a large amount of deposits, heat the valve body or use a model with heater to prevent deposits in the valve.

#### Mounting

# 

- In models with heater (thermistor), take care not to damage the insulation components of the lead wires and connector section.
- The setting temperature for models with heater should be established without a draft or heat insulation. It will change depending on conditions such as heat retaining measures and the heating of other piping. Fine adjustment is not possible.
- When installing heater accessories or mounting a heater, check insulation resistance at the actual operating temperature. A short circuit breaker or fuse should be installed.
- When a valve is to be heated, only the body section (excluding handle part) should be heated.
- 5. In high humidity environments, keep valves packaged until the time of installation.6. When a heater is in operation, the entire valve becomes hot. Be
- careful not to touch it with bare hands, as burns will result.

  7. Perform piping so that excessive force is not applied to the flange sections. In case there is vibration of heavy objects or attachments, etc., secure them so that torque is not applied directly to the flanges.

#### **Piping**

# 

- Before mounting, clean the surface of the flange seal and the O-ring with ethanol, etc.
- 2. There is an indentation of 0.1 to 0.2 mm in order to protect the flange seal surface, and it should be handled so that the seal surface is not damaged in any way. When using an outer ring, be sure that the O-ring is compressed sufficiently. (There is basically no problem with the outer ring.)
- The valve may not be mounted depending on the piping material type (clamp, etc.). Be sure to check the piping material before use.

#### Maintenance

# **⚠** Caution

- When removing deposits from a valve, take care not to damage any of its parts.
- Replace the handle assembly when the end of its service life is approached.
- If damage is suspected prior to the end of the service life, perform early maintenance.
- 4. SMC specified parts should be used for service. Refer to "Construction", "Replacement Parts," or "Maintenance Parts."
- When removing valve or exterior seals, take care not to damage the sealing surfaces. When installing the valve seal, be sure that the O-ring is not twisted.

XLA

XL\_Q XM\_

XY□ D-□

XSA

XVD XGT

CYV





Be sure to read this before handling the products.

#### Angle Solenoid Valve/XLS Series

Design

# **⚠** Warning

- 1. The body material is A6063, the bellows are stainless steel 316L, the other metal materials used in the vacuum part are 13Cr stainless steel, stainless steel 304, and A2017, and the seal material is FKM. In addition, a fluorinated resin (PFA) is used in the armature assembly of the vacuum part. The valve of the vacuum part has a fluorinated grease coating. Please check the material used, and in the course of maintenance, use only liquids that will not interfere with the material.
- 2. In cases without an operating power supply, the starting voltage is applied for only 0.15 to 0.2 s, and after this, a holding voltage (25% of the starting voltage) must be applied. If not performed properly, this can cause burning of the coil and fire, etc.
- Be certain to install a fuse or short circuit breaker in the power supply circuit.

Selection

# **⚠** Caution

1. Use within the limits of the operating pressure range.

#### Mounting

# **⚠** Caution

- In high humidity environments, keep valves packaged until the time of installation.
- 2. Please secure in such a way that the lead wire has sufficient curvature, and that no excessive force is applied to it.

#### Changing the entry of DIN terminal connector

After separating the terminal block and housing, the cord entry can be changed by attaching the housing in the desired direction (4 directions at 90° intervals).

Piping

# 

- Before mounting, clean the surface of the flange seal and the O-ring with ethanol, etc.
- 2. There is an indentation of 0.1 to 0.2 mm in order to protect the flange seal surface, and it should be handled so that the seal surface is not damaged in any way. When using an outer ring, be sure that the O-ring is compressed sufficiently. (There is basically no problem with the outer ring.)
- The valve may not be mounted depending on the piping material type (clamp, etc.). Be sure to check the piping material before use.

#### Maintenance

# 

- Replace the core and armature assemblies when the end of their service life is approached.
- If damage is suspected prior to the end of the service life, perform early maintenance.
- **3.** SMC specified parts should be used for service parts. Refer to "Replacement Parts" on back of page 465 for further details.



Be sure to read this before handling the products.

#### **Maintenance Parts**

#### Air operated angle valve/Manual valve



1. When replacing seal materials, please replace bonnet assembly or handle assembly. This may not be applicable in cases where the seal material differs from that used in





Bonnet Assembly, Handle Assembly Component Parts No.: (1)

	Temperature					Valve	e size			
Model	specifications	Indicator	16	25	40	50	63	80	100	160
	General use	None	XLA16-30-1	XLA25-30-1	XLA40-30-1	XLA50-30-1	XLA63-30-1	XLA80-30-1	XLA100-30-1	XLA160-30-1
XLA	General use	Yes	XLA16A-30-1	XLA25A-30-1	XLA40A-30-1	XLA50A-30-1	XLA63A-30-1	XLA80A-30-1	XLA100A-30-1	XLA160A-30-1
ALA	High temperature	None	XLA16-30-1H	XLA25-30-1H	XLA40-30-1H	XLA50-30-1H	XLA63-30-1H	XLA80-30-1H	XLA100-30-1H	XLA160-30-1H
	temperature	Yes	XLA16A-30-1H	XLA25A-30-1H	XLA40A-30-1H	XLA50A-30-1H	XLA63A-30-1H	XLA80A-30-1H	XLA100A-30-1H	XLA160A-30-1H
XLAV	General use	None	XLAV16-30-1	XLAV25-30-1	XLAV40-30-1	XLAV50-30-1	XLAV63-30-1	XLAV80-30-1	XLAV100-30-1	XLAV160-30-1
ALAV	General use	Yes	XLAV16A-30-1	XLAV25A-30-1	XLAV40A-30-1	XLAV50A-30-1	XLAV63A-30-1	XLAV80A-30-1	XLAV100A-30-1	XLAV160A-30-1
XLC	General use	None	XLC16-30-1	XLC25-30-1	XLC40-30-1	XLC50-30-1-1	XLC63-30-1-1	XLC80-30-1-1	XLC100-30-1-1	XLC160-30-1-1
ALC	High temperature	None	XLC16-30-1H	XLC25-30-1H	XLC40-30-1H	XLC50-30-1H-1	XLC63-30-1H-1	XLC80-30-1H-1	XLC100-30-1H-1	XLC160-30-1H-1
XLCV	General use	None	XLCV16-30-1	XLCV25-30-1	XLCV40-30-1	XLCV50-30-1-1	XLCV63-30-1-1	XLCV80-30-1-1	_	_
	General use	None	XLF16-30-1	XLF25-30-1	XLF40-30-1	XLF50-30-1	XLF63-30-1	XLF80-30-1	XLF100-30-1	XLF160-30-1
XLF		Yes	XLF16A-30-1	XLF25A-30-1	XLF40A-30-1	XLF50A-30-1	XLF63A-30-1	XLF80A-30-1	XLF100A-30-1	XLF160A-30-1
ALF	High temperature	None	XLF16-30-1H	XLF25-30-1H	XLF40-30-1H	XLF50-30-1H	XLF63-30-1H	XLF80-30-1H	XLF100-30-1H	XLF160-30-1H
	temperature	Yes	XLF16A-30-1H	XLF25A-30-1H	XLF40A-30-1H	XLF50A-30-1H	XLF63A-30-1H	XLF80A-30-1H	XLF100A-30-1H	XLF160A-30-1H
XLFV	General use	None	XLFV16-30-1	XLFV25-30-1	XLFV40-30-1	XLFV50-30-1	XLFV63-30-1	XLFV80-30-1	XLFV100-30-1	XLFV160-30-1
ALFV	General use	Yes	XLFV16A-30-1	XLFV25A-30-1	XLFV40A-30-1	XLFV50A-30-1	XLFV63A-30-1	XLFV80A-30-1	XLFV100A-30-1	XLFV160A-30-1
XLD	General use			XLD25-30-1	XLD40-30-1	XLD50-30-1	XLD63-30-1	XLD80-30-1	XLD100-30-1	XLD160-30-1
ALD	High temperature	Standard	_	XLD25-30-1H	XLD40-30-1H	XLD50-30-1H	XLD63-30-1H	XLD80-30-1H	XLD100-30-1H	XLD160-30-1H
XLDV	General use			XLDV25-30-1	XLDV40-30-1	XLDV50-30-1	XLDV63-30-1	XLDV80-30-1	XLDV100-30-1	XLDV160-30-1
XLG	General use	None	XLG16-30-1	XLG25-30-1	XLG40-30-1	XLG50-30-1-1	XLG63-30-1-1	XLG80-30-1-1	XLG100-30-1-1	XLG160-30-1-1
	High temperature	None	XLG16-30-1H	XLG25-30-1H	XLG40-30-1H	XLG50-30-1H-1	XLG63-30-1H-1	XLG80-30-1H-1	XLG100-30-1H-1	XLG160-30-1H-1
XLGV	General use	None	XLGV16-30-1	XLGV25-30-1	XLGV40-30-1	XLGV50-30-1	XLGV63-30-1	XLGV80-30-1	_	_
XLH	Standard	Standard	XLH16-30-1	XLH25-30-1	XLH40-30-1	XLH50-30-1		-	_	_

Note 1) In cases where the valve seal material is other than the standard (FKM: includes Compound no. 1349-80; made by Mitsubishi Cable Industries. Inc.), please add suffix symbol for seal material (Refer to the Note 2) An auto switch magnet is not attached. In cases where an auto was where an auto was with magnet is not attached. In cases where an auto was with magnet is not attached. In cases where an auto was with magnet is not attached. In cases where an auto was with magnet is attached, please and "Allof" (Mg/ Mg/ CLC/LG with a size of 50 or more) at the end of the part number. (Not available Not 9) Auto with magnet is not attached. When a set including auto switch and solenoid valve is required, please add the symbols after the auto switch in "How to Order" at the end of the part number.

#### Exterior Seal. (M) Valve Seal. S Valve Seal Assembly

	Existion Seat, (iii) Taive Seat, S Taive Seat Assembly											
Model	Description					Valve	e size					
Model	Construction No.	Material	16	25	40	50	63	80	100	160		
XLA(V) XLC(V)	Exterior seal	Standard	AS568-025V	AS568-030V	AS568-035V	AS568-039V	AS568-043V	AS568-045V	AS568-050V	AS568-167V		
XLD(V) XLH	3	Special	AS568-025□	AS568-030□	AS568-035□	AS568-039□	AS568-043□	AS568-045□	AS568-050□	AS568-167□		
XLF(V)	Exterior seal	Standard	XLF16-6	XLF25-6	AS568-035V	AS568-039V	AS568-043V	AS568-045V	AS568-050V	AS568-167V		
XLG(V)	3	Special	_	-	AS568-035□	AS568-039□	AS568-043□	AS568-045□	AS568-050□	AS568-167□		
Common	Valve seal	Standard	B2401-V15V	B2401-V24V	B2401-P42V	AS568-227V	AS568-233V	B2401-V85V	AS568-349V	B2401-G155V		
Common		Special	B2401-V15□	B2401-V24□	B2401-P42□	AS568-227□	AS568-233□	B2401-V85□	AS568-349□	B2401-G155□		
XLD(V)	S valve seal assembly	Standard	_	AS568-009V	XLD40-2-9-1A AS568-016V	XLD50-2-9-1A AS568-016V	XLD63-2-9-1A	XLD80-2-9-1A	XLD100-2-9-1A	XLD160-2-9-1A AS568-020V		
ALD(V)		Special	-	AS568-009□	XLD40-2-9-1A□ AS568-016□	XLD50-2-9-1A□ AS568-016□	XLD63-2-9-1A□	XLD80-2-9-1A□	XLD100-2-9-1A□	XLD160-2-9-1A□ AS568-020□		

Note 1) In cases where the seal material is other than the standard (FKM; includes Compound no. 1349-80; made by Mitsubishi Cable Industries, Inc.), please add suffix symbol for seal material (Refer to the table 1 on page 465-1) at the end of the part number (the place of □).

Note 2) Refer to "Construction" of each series for component parts numbers.

#### Solenoid Valve/Plate Assembly

Julei Iulu v	aive/Flate Asset	IIDIY										
Model	Description	Valve size										
Wiodei	Construction No.	16	25	40	50	63	80	100	160			
XLAV	Solenoid valve ®		SYJ31	19-□□		SYJ519-□□						
ALAV	Plate assembly 9		XLAV1	6-90-2		XLAV63-90-1						
XLFV	Solenoid valve 10		SYJ319-□□		SYJ519-□□							
ALFV	Plate assembly 11		XLAV16-90-2		XLAV63-90-1							
XLCV	Solenoid valve ®	SY	/J3190-□□ (sing	jle)	SY3120-□□-C4 (single)							
XLGV	Soleriold valve (i)	SY	J3290-□□ (doub	ble)	SY3220-□□-C4 (double)							
ALG.	Plate assembly 9		XLCV16-90-1									
XLDV	Initial exhaust solenoid valve 11	_			V114-□□							
	Main exhaust solenoid valve 12	_	V114-□□		SYJ314-□□							
	Plate assembly (13)	_	XLDV25-90-2		XLDV40-90-2							

Note 1) The -t at the end of the solenoid valve part number is the selection symbol for voltage, electrical entry, and other specifications. For details about selection symbols, refer to the Web Catalog. Note 2) The plate assembly includes the plate, gasket, and mounting screws. Note 3) The plate assembly includes the plate, gasket, and mounting screws. Note 3) Feler to 'Construction' of each series for component parts numbers.

XL□O XM□ XY□ D-□

XSA

XVD

XGT CYV



Be sure to read this before handling the products.

#### **Maintenance Parts**

#### **Table 1: Seal Material Symbol**

1	Symbol	-XN1	-XP1	-XQ1	-XR1	-XR2	-XR3	-XS1	-XT1	-XU1
	Seal material	EPDM	Barrel Perfluoro®	Kalrez®		Chemraz <sup>®</sup>			FKM for Plasma	ULTIC ARMOR®
	Compound no.	2101-80*	70W	4079	SS592	SS630	SSF38	1232-70*	3310-75*	UA4640

Note 1) This may not be applicable in cases where the seal material differs from that used in the products, although the seal material is changed.

\* Produced by Mitsubishi Cable Industries, Ltd.

Barrel Perfluoro® is a registered trademark of Matsumura Oil Co., Ltd.

Kalrez® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

Chemraze is a registered trademark of Greene, Tweed Technologies, Inc.

ULTIC ARMOR® is a registered trademark of Nippon Valqua Industries, Ltd.

#### Replacement Heaters

Temperature Valve size								
specification	25	40	50	63	80	100	160	
H4 (100°C heater)	_	XLA25-60S-1	XLA25-60S-1	XLA25-60S-2	XLA25-60S-3	XLA25-60S-2 (2 sets)	XLA25-60S-2 (3 sets)	
H5 (120°C heater)	XLA25-60S-1	XLA25-60S-2	XLA25-60S-2	XLA25-60S-3	XLA25-60S-2 (2 sets)	XLA25-60S-2 (3 sets)	XLA25-60S-2 (4 sets)	

Example) In the case of a replacement heater for XL□-80-H5, two sets of XLA25-80M-2 are required.

#### **Angle Solenoid Valve**

Construction No.	Description	XLS-16-□□	XLS-16-P□□	XLS-25-□□	XLS-25-P□□	
2	Coil assembly	XLS16-20-®G, C, T, D	XLS16-20-P⊞G	XLS25-20-⊞G, C, T, D	XLS25-20-P⊞G	
6	Core assembly	XLS16	5-30-1	XLS25-30-1		
4	Armature assembly	XLS16	6-30-2	XLS25-30-2		
3-1	O-ring	AS568	3-018V	AS568-018V		
3-2	O-ring	AS568	3-025V	AS568-030V		

Note 1) In case of coil assembly, please enter voltage symbol in 🗉 .
"G" after 🖹 is grommet, "C" for conduit, "T" for terminal, and "D" for DIN.
Note 2) Refer to "Construction" for component parts numbers.