

# FLEXEDGE® Strain Gage Module



## FLEXEDGE® Intelligent Edge Automation Platform

The strain gage module is designed for use with the FlexEdge DA70 controller, and features a single loop PID controller with two strain gage inputs designed to accept low level signals from a wide variety of bridge-type transducers. The strain gage module is easily configured in Crimson® software and available with user-selectable analog output and solid state or relay outputs.

- Strain Gage module for the DA70
- PID control with reduced overshoot
- Load Cell, Pressure and Torque bridge inputs
- Software selectable low level inputs (20 mV, 33 mV or 200 mV full scale)
- Software selectable 5 VDC or 10 VDC bridge excitation
- Digital Tare (re-zero), Batch Totalizer, and Peak/Valley (max/min) recording
- On demand auto-tuning of PID settings
- DC analog output
- Auto addressing minimizes configuration time
- Fully isolated design provides reliable operation
- Configured using Crimson software (version 3.2 or later)



## Ordering Guide

### MAIN UNIT

PART NUMBER	DESCRIPTION	TYPE
DAM00PDSG2RA0000	DA70 Series Module, Single Loop, Two Strain Gage Inputs, Relay and Analog Outputs <sup>1</sup>	Input Modules
DAM00PDSG2SA0000	DA70 Series Module, Single Loop, Two Strain Gage Inputs, SSR and Analog Outputs	

A listing of the entire DA70 family of products and accessories can be found at [www.redlion.net](http://www.redlion.net).

<sup>1</sup> Module is not suitable for use in ATEX locations.

# DA Strain Gage Module Specifications

## Specifications

### Power Requirements

Power is supplied by the DA host device.

**DA Strain Gage Max Power:** 5.6 W with four 350 ohm bridges

### LEDs\*

STS – RGB Status LED shows module condition.

OP1, OP2, OP3 - Indicate status of outputs 1, 2, and 3

ALM - Alarm LED are lit during an internal alarm condition

\* Default configuration.

### Memory

Non-volatile memory retains all programmable parameters.

### INPUTS

Software Selectable Input Range:  $\pm 20.000$  mVDC,  $\pm 33.000$  mVDC,  $\pm 200.00$  mVDC

Connection Type:

4-wire bridge (differential)

2-wire (single-ended)

Sample Time: 50 msec (20 Hz)

Common Mode Range (with respect to input common): 0 to +5 VDC

Common Mode Rejection: > 100 dB, DC to 120 Hz

Temperature Coefficient (ratio metric): 20 ppm/°C max.

Step Response Time: 100 msec typ., 200 msec max.

Input Impedance: 100 M ohm

Max Continuous Overload: 30 V

PV Range: -30,000 to 30,000

Effective Resolution: 16-bit

### Bridge Excitations

Software selectable:

5 VDC,  $\pm 2\%$ , 65 mA max.

10 VDC,  $\pm 2\%$ , 125 mA max. combined (excitation 1 plus excitation 2).

Temperature coefficient (ratio metric): 30 ppm/°C max.

Max. four 350 ohm bridges per module.

### Isolation Level

500 Vrms @ 50/60 Hz for 1 minute between the following:

OP1 \*

OP2 \*

OP3 \*

Linear Output

Signal Input (the 2 input channels are not isolated from each other)

Power Supply Input

\* Outputs OP1, OP2 and OP3 of SSR model are not isolated from each other

### Communications

Provided by the DA host device

### Discrete Outputs

Available as (3) Solid State NFET, or (3) Form A relay.

### Solid State Output:

Type: Switched DC, N Channel open drain MOSFET

Current Rating: 1 A max

VDS ON: 0.3 V @ 1 A

VDS MAX: 30 VDC

Offstate Leakage Current: 0.5 mA max

### Form A Relay Output:

Type: N.O.

Contact rating per relay:

1.5 Amps @ 125 VAC or 30 VDC (resistive load) at 55 °C

$T_{AMB}$   
0.4 Amps @ 125 VAC or 30 VDC (resistive load) at 70 °C

$T_{AMB}$   
Unloaded at 75 °C  $T_{AMB}$

Note: When relay contacts are connected to Mains, the Mains should be Overvoltage category II, Pollution degree 2

Life Expectancy: 200,000 cycles at maximum load rating.

(Decreasing load, increasing cycle time, and use of surge suppression such as RC snubbers increases life expectancy.)

### Control Modes

Control: On/Off, P, PI, or PID

Output: Time proportioning or linear

Cycle Time: Programmable from 0.0 to 60.0 sec

Auto-Tune: When selected, sets proportional band, integral time, derivative time values, and output dampening time

Input Fault Response: Upscale

### Alarms

Modes:

Manual

Absolute High Acting

Absolute Low Acting

Deviation High Acting

Deviation Low Acting

Inside Band Acting

Outside Band Acting

Reset Action: Programmable; automatic or latched

Standby Mode: Programmable; enable or disable

Hysteresis: Programmable

Sensor Fail Response: Upscale

### Analog DC Output

Selectable/programmable for 0-10 VDC, 0-20 mA, or 4-20 mA

Resolution:

Voltage: 500  $\mu$ V

Current: 1  $\mu$ A

Accuracy:

0.1% of full scale (18 to 28 °C)

0.2% of full scale (-40 to 75 °C)

Update Time: 0.0 to 60.0 sec

Compliance (for current output only): 500 ohm max.

Minimum load (voltage output only): 10 K ohm min.

Outputs are software selectable for either 10 V or 20 mA. The output range may be field calibrated to yield approximate 10% overrange and a small underrange (negative) signal.

# DA Strain Gage Module Specifications Cont. and Dimensions

## Environmental

Operating Temperature Range:

Modules with Relays: -40 to 70 °C  $T_{AMB}$

Modules with Solid-State Outputs: -40 to 75 °C  $T_{AMB}$

Storage Temperature Range: -40 to +85 °C  $T_{AMB}$

Shock to IEC 68-2-27: Operational 15 g (10 g, modules w/relays)

Vibration to IEC 68-2-6: Operational 5-500 Hz, 2 g

Operating and Storage Humidity: 0 to 85% max. relative humidity, non-condensing.

Altitude: Up to 2000 meters

## Certification & Compliance

### CE Approved

EN 61326-1 Immunity to Industrial Locations

Emission CISPR 11 Class A

IEC/EN 61010-1

RoHS Compliant

### ATEX Approved

II 3 G Ex ec IIC T4 Gc

DEMKO 20 ATEX 2268X

### IECEx Approved

IECEx UL 20.0007X

### UKEX Approved

UL22UKEX2576X

UL Hazardous: File #E317425

Rugged IP30 enclosure

## CONSTRUCTION

Metal and plastic enclosure with IP30 rating.

Weight: 11.1 oz (315 g)

## Connections

Wire Strip Length: 0.3" (7.5 mm)

Wire Gauge Capacity: 14 to 24 AWG (2.08 to 0.20 mm<sup>2</sup>) copper wire only

## Mounting

DIN Rail: Attaches to standard "T" profile DIN rail according to EN50022 - 35 x 7.5 and 35 x 15


## Warranty

3 years on design and manufacturing defects.

Specifications are subject to change.

Visit [www.redlion.net](http://www.redlion.net) for more information.

## Dimensions In inches [mm]

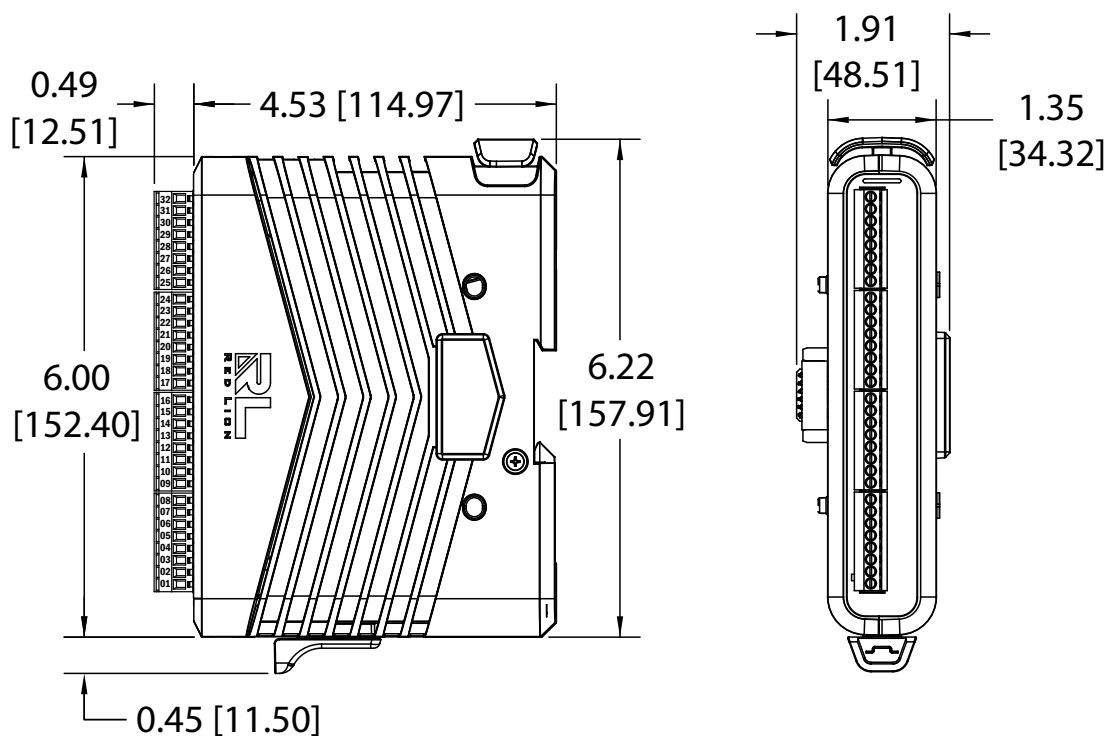



[www.redlion.net](http://www.redlion.net)  
[contact us](#)

Red Lion is focused on being THE Industrial Data Company™. We empower industrial organizations around the world to unlock the value of data by developing and manufacturing innovative products and solutions to access, connect and visualize their information. Red Lion's global manufacturing and support facilities serve customers in major industry segments with solutions for cloud connectivity, edge intelligence, industrial Ethernet switches, panel meters and operator panels. Red Lion makes it easy to gain real-time data visibility that drives productivity. Red Lion is part of Spectris plc, the experts in providing insight through precision measurement.

© 2023 Red Lion Controls, Inc. All Rights Reserved. The terms Red Lion, the Red Lion logo, Crimson, THE Industrial Data Company and FlexEdge are trademarks or registered trademarks of Red Lion Controls. All other marks are the property of their respective owners.

LD1113A 09 2023