



—
STOCKING GUIDE

ABB ELECTRIFICATION

Mt. Juliet Distribution Center

Quarter 1 | 2026

ENGINEERED
TO OUTFIT

**To better serve our customers,
products featured in this Stocking
Guide are stocked and shipped from
our state-of-the-art distribution
centers.**

Table of contents

- 01. Load centers, meter combos, and residential circuit breakers**
- 02. Metering**
- 03. RV power pedestals**
- 04. Safety switches and AC disconnects**
- 05. Transformer - low voltage dry type**
- 06. Molded case and miniature circuit breakers, residual current devices, fuse holders**
- 07. Panelboards**
- 08. Surge protective devices**
- 09. Automatic transfer switches**
- 10. NEMA and definite purpose controls**
- 11. Softstarters**
- 12. IEC style contactors, overload relays and manual motor starters**
- 13. Control and protective relays**
- 14. Disconnect switches**
- 15. Operator interface and signaling devices**
- 16. Machine safety**

—
1

LOAD CENTERS, METER COMBOS, AND RESIDENTIAL CIRCUIT BREAKERS

Section 1

Load centers, meter combos, and residential circuit breakers

Table of contents

ReliaHome™ load centers	
ReliaHome P-Series, P-Series+	1-1
ReliaHome T-Series	1-6
ReliaHome three phase	1-14
ReliaHome pool and spa panels	1-15
ReliaHome field installed accessories	1-26
ReliaHome Meter Combos	
ReliaHome circuit breakers	1-16
ReliaHome circuit breaker accessories	1-23
ReliaHome enclosed circuit breakers	1-25
ReliaHome surge protectors	
ReliaHome surge protectors	1-24

ReliaHome load centers

Standard P-Series and Premium P-Series+ product overview



Ordering code construction

	PA	M	08	20	R	FL
ABB identification						
PA = ReliaHome P-Series						
PC = ReliaHome P-Series+						
PFA = ReliaHome P-Series replacement front						
PFC = ReliaHome P-Series+ replacement front						
Type of main						
M = Main circuit breaker						
L = Main lug						
C = Main lug convertible						
Maximum spaces/circuits						
08 = 8-1" spaces, 16 circuits						
12 = 12-1" spaces, 24 circuits						
16 = 16-1" spaces, 32 circuits						
20 = 20-1" spaces, 40 circuits						
24 = 24-1" spaces, 48 circuits						
30 = 30-1" spaces, 60 circuits						
40 = 40-1" spaces, 80 circuits						
60 = 60-1" spaces, 120 circuits						
						Specials
						Blank = No special suffix
						FL = Feed-through lugs
						M = Riser panel
						Trim type/color, enclosure type
						Blank = Combination surface/flush trim, gray, NEMA 1
						W = Combination surface/flush trim, white, NEMA 1
						R = Surface trim, gray, NEMA 3R
						Main ampere rating
						10 = 100 amperes
						12 = 125 amperes
						15 = 150 amperes
						20 = 200 amperes
						22 = 225 amperes

ReliaHome P-Series load centers

P-Series main circuit breaker, NEMA 1 indoor

Main ampere rating	1 pole, 1" spaces	Max single pole circuits	Main wire size (AWG/kcmil) Cu-Al	Equipment ground kit	Ordering code
100	16	32	#4 – 1/0	TGK12/TGK24 (order separately)	PAM1610
	20	40	#4 – 1/0	TGK12/TGK24 (order separately)	PAM2010
	30	60	#4 – 1/0	TGK12/TGK24 (order separately)	PAM3010
125	24	48	#2 – 2/0	TGK12/TGK24 (order separately)	PAM2412
	30	60	#2 – 2/0	TGK12/TGK24 (order separately)	PAM3012
150	20	40	#1 – 3/0 Cu; 2/0 - 3/0 Al	TGK12/TGK24 (order separately)	PAM2015
	30	60	#1 – 3/0 Cu; 2/0 - 3/0 Al	TGK12/TGK24 (order separately)	PAM3015
200	20	40	#1 – 250 Cu; 2/0 - 250 Al	TGK12/TGK24 (order separately)	PAM2020
	30	60	#1 – 250 Cu; 2/0 - 250 Al	TGK12/TGK24 (order separately)	PAM3020
	40	80	#1 – 250 Cu; 2/0 - 250 Al	TGK12/TGK42 (order separately)	PAM4020
	60	120	#1 – 250 Cu; 2/0 - 250 Al	TGK12/TGK32 (order separately)	PAM6020
225	40	80	#1 – 300 Cu; 2/0 - 300 Al	TGK12/TGK42 (order separately)	PAM4022

P-Series main circuit breaker, NEMA 1 indoor white

Main ampere rating	1 pole, 1" spaces	Max single pole circuits	Main wire size (AWG/kcmil) Cu-Al	Equipment ground kit	Ordering code
125	30	60	#2 - 2/0	TGK12/TGK24 (order separately)	PAM3012W
200	30	60	#1-250 Cu; 2/0 - 250 Al	TGK12/TGK24 (order separately)	PAM3020W
	40	80	#1-250 Cu; 2/0 - 250 Al	TGK12/TGK42 (order separately)	PAM4020W

P-Series main circuit breaker, NEMA 3R outdoor

Main ampere rating	1 pole, 1" spaces	Max single pole circuits	Main wire size (AWG/kcmil) Cu-Al	Equipment ground kit	Ordering code
100	16	32	#4 – 1/0	TGK12 (order separately)	PAM1610R
	20	40	#4 – 1/0	TGK12/TGK24 (order separately)	PAM2010R
125	20	40	#2 – 2/0 Cu-Al	TGK12/TGK24 (order separately)	PAM2012R
	24	48	#2 – 2/0 Cu-Al	TGK12/TGK24 (order separately)	PAM2412R
	30	60	#2 – 2/0 Cu-Al	TGK12/TGK24 (order separately)	PAM3012R
150	08	16	#1 – 3/0 Cu; 2/0 - 3/0 Al	TGK12 (order separately)	PAM0815RFL
200	08	16	#1 – 250 Cu; 2/0 - 250 Al	TGK12 (order separately)	PAM0820RFL
	20	40	#1 – 250 Cu; 2/0 - 250 Al	TGK12/TGK24 (order separately)	PAM2020R
	30	60	#1 – 250 Cu; 2/0 - 250 Al	TGK12/TGK24 (order separately)	PAM3020R
	40	80	#1 – 250 Cu; 2/0 - 250 Al	TGK12/TGK42 (order separately)	PAM4020R

ReliaHome P-Series load centers

P-Series main lug, NEMA 1 indoor

Main ampere rating	1 pole, 1" spaces	Max single pole circuits	Main wire size (AWG/kcmil) Cu-Al	Equipment ground kit	Ordering code
125	16	32	#6 – 2/0	Factory installed TKG12 & TNLK20. Order additional TKG12 or TKG24 separately if needed.	PAL1612
	20	40	#6 – 2/0	Factory installed TKG24 & TNLK20. Order additional TKG12 or TKG24 separately if needed.	PAL2012
	24	48	#6 – 2/0	Factory installed TKG24 & TNLK20. Order additional TKG12 or TKG24 separately if needed.	PAL2412
	30	60	#6 – 2/0	Factory installed TKG24 & TNLK20. Order additional TKG12 or TKG24 separately if needed.	PAL3012
200	20	40	#6 – 250	Factory installed TKG24 & TNLK20. Order additional TKG12 or TKG24 separately if needed.	PAL2020
	30	60	#6 – 250	Factory installed TKG24 & TNLK20. Order additional TKG12 or TKG24 separately if needed.	PAL3020
	40	80	#6 – 250	Factory installed TKG42 & TNLK20. Order additional TKG12 or TKG42 separately if needed.	PAL4020
225	40	80	#1 – 300	Factory installed TKG42 & TNLK20. Order additional TKG12 or TKG42 separately if needed.	PAL4022

P-Series main lug, NEMA 1 indoor white

Main ampere rating	1 pole, 1" spaces	Max single pole circuits	Main wire size (AWG/kcmil) Cu-Al	Equipment ground kit	Ordering code
125	24	48	#6 – 2/0	Factory installed TKG24 & TNLK20. Order additional TKG12 or TKG24 separately if needed.	PAL2412W
	30	60	#6 – 2/0	Factory installed TKG24 & TNLK20. Order additional TKG12 or TKG24 separately if needed.	PAL3012W
200	30	60	#6 – 250	Factory installed TKG24 & TNLK20. Order additional TKG12 or TKG24 separately if needed.	PAL3020W
	40	80	#6 – 250	Factory installed TKG42 & TNLK20. Order additional TKG12 or TKG42 separately if needed.	PAL4020W

P-Series main lug / main lug convertible to main circuit breaker, Outdoor NEMA 3R main lug convertible

Main ampere rating	1 pole, 1" spaces	Max single pole circuits	Main wire size (AWG/kcmil) Cu-Al	Equipment ground kit	Ordering code
125	16	32	#6 – 2/0	Factory installed TKG12 & TNLK20. Order additional TKG12 separately if needed.	PAC1612R
	20	40	#6 – 2/0	Factory installed TKG24 & TNLK20. Order additional TKG12 or TKG24 separately if needed.	PAC2012R
	24	48	#6 – 2/0	Factory installed TKG24 & TNLK20. Order additional TKG12 or TKG24 separately if needed.	PAC2412R
200	20	40	#6 – 250	Factory installed TKG24 & TNLK20. Order additional TKG12 or TKG24 separately if needed.	PAC2020R
	30	60	#6 – 250	Factory installed TKG24 & TNLK20. Order additional TKG12 or TKG24 separately if needed.	PAC3020R
	40	80	#6 – 250	Factory installed TKG42 & TNLK20. Order additional TKG12 or TKG42 separately if needed.	PAC4020R

ReliaHome P-Series+ load centers

P-Series+ main circuit breaker, NEMA 1 indoor

Main ampere rating	1 pole, 1" spaces	Max single pole circuits	Main wire size (AWG/kcmil) Cu-Al	Equipment ground kit	Ordering code
100	20	40	#4 – 1/0	TGK12/TGK24 (order separately)	PCM2010
	30	60	#4 – 1/0	TGK12/TGK24 (order separately)	PCM3010
125	24	48	#2 – 2/0	TGK12/TGK24 (order separately)	PCM2412
	30	60	#2 – 2/0	TGK12/TGK24 (order separately)	PCM3012
150	30	60	#1 – 3/0 Cu; 2/0 - 3/0 Al	TGK12/TGK24 (order separately)	PCM3015
	40	80	#1 – 3/0 Cu; 2/0 - 3/0 Al	TGK12/TGK42 (order separately)	PCM4015
200	20	40	#1 – 250 Cu; 2/0 - 250 Al	TGK12/TGK24 (order separately)	PCM2020
	30	60	#1 – 250 Cu; 2/0 - 250 Al	TGK12/TGK24 (order separately)	PCM3020
	40	80	#1 – 250 Cu; 2/0 - 250 Al	TGK12/TGK42 (order separately)	PCM4020
225	60	120	#1 – 300 Cu; 2/0 - 300 Al	TGK12/TGK32 (order separately)	PCM6022

P-Series+ main circuit breaker, NEMA 3R outdoor

Main ampere rating	1 pole, 1" spaces	Max single pole circuits	Main wire size (AWG/kcmil) Cu-Al	Equipment ground kit	Ordering code
100	20	40	#4 – 1/0	TGK12/TGK24 (order separately)	PCM2010R
200	40	80	#1 – 250 Cu; 2/0 - 250 Al	TGK12/TGK24 (order separately)	PCM4020R

ReliaHome P-Series+ load centers

P-Series+ main lug convertible to main circuit breaker, NEMA 1 indoor

Main ampere rating	1 pole, 1" spaces	Max single pole circuits	Main wire size (AWG/kcmil) Cu-Al	Equipment ground kit	Ordering code
125	16	32	#6 – 2/0	Factory installed TKG12 & TNLK20. Order additional TKG12 or TKG24 separately if needed.	PCC1612
	20	40	#6 – 2/0	Factory installed TKG24 & TNLK20. Order additional TKG12 or TKG24 separately if needed.	PCC2012
	24	48	#6 – 2/0	Factory installed TKG24 & TNLK20. Order additional TKG12 or TKG24 separately if needed.	PCC2412
	30	60	#6 – 2/0	Factory installed TKG24 & TNLK20. Order additional TKG12 or TKG24 separately if needed.	PCC3012
200	20	40	#6 – 250	Factory installed TKG24 & TNLK20. Order additional TKG12 or TKG24 separately if needed.	PCC2020
	30	60	#6 – 250	Factory installed TKG24 & TNLK20. Order additional TKG12 or TKG24 separately if needed.	PCC3020
	40	80	#6 – 250	Factory installed TKG42 & TNLK20. Order additional TKG12 or TKG42 separately if needed.	PCC4020
225	40	80	#1 – 300	Factory installed TKG42 & TNLK20. Order additional TKG12 or TKG42 separately if needed.	PCC4022

P-Series+ main lug convertible to main circuit breaker, NEMA 1 indoor white


Main ampere rating	1 pole, 1" spaces	Max single pole circuits	Main wire size (AWG/kcmil) Cu-Al	Equipment ground kit	Ordering code
125	24	48	#6 – 2/0	Factory installed TKG24 & TNLK20. Order additional TKG12 or TKG24 separately if needed.	PCC2412W

P-Series+ main lug convertible to main circuit breaker, NEMA 3R outdoor

Main ampere rating	1 pole, 1" spaces	Max single pole circuits	Main wire size (AWG/kcmil) Cu-Al	Equipment ground kit	Ordering code
125	16	32	#6 – 2/0	Factory installed TKG12 & TNLK20. Order additional TKG12 separately if needed.	PCC1612R
	24	48	#6 – 2/0	Factory installed TKG24 & TNLK20. Order additional TKG12 or TKG24 separately if needed.	PCC2412R
200	20	40	#6 – 250	Factory installed TKG24 & TNLK20. Order additional TKG12 or TKG24 separately if needed.	PCC2020R
	30	60	#6 – 250	Factory installed TKG24 & TNLK20. Order additional TKG12 or TKG24 separately if needed.	PCC3020R
	40	80	#6 – 250	Factory installed TKG42 & TNLK20. Order additional TKG12 or TKG42 separately if needed.	PCC4020R

ReliaHome load centers

T-Series product overview



Ordering code construction

T		LM		Q		8		12		S		CU		D	
ABB identification														Specials	
T = ReliaHome T-Series														G = Factory installed ground bar	
														D = Optional door for 6-8 space panel	
														W = White trim	
Type of main														Bus bar material	
M = Main circuit breaker														CU = Copper bus	
L = Main lug															
LM = Convertible															
PL = Main lug (Thermoplastic)															
For use with THQL/THHQL circuit breakers only														Trim type/color, enclosure type	
														C = Combination surface/flush	
														F = Flush	
														S = Surface	
														R = NEMA 3R	
Maximum spaces/circuits														Main ampere rating	
2 = 2-1" spaces, 4 circuits														40 = 40 amperes	
4 = 4-1" spaces, 8 circuits														70 = 70 amperes	
5 = 5-1" spaces, 10 circuits														10 = 100 amperes	
6 = 6-1" spaces, 12 circuits														12 = 125 amperes	
8 = 8-1" spaces, 16 circuits															
12 = 12-1" spaces, 24 circuits															
14 = 14-1" spaces, 28 circuits															

ReliaHome T-Series load centers

T-Series main circuit breaker, NEMA 1 indoor

Main ampere rating	1 pole, 1" spaces	Max single pole circuits	Front type	Main wire size (AWG/kcmil) Cu-Al	Equipment ground kit	Ordering code
100	12	24	Combination	4-1/0	TGL2 & TGL20 installed	TMQ1210CCU
125	12	24	Combination	1-2/0	TGL2 & TGL20 installed	TMQ1212CCU

T-Series main circuit breaker, NEMA 3R outdoor

Main ampere rating	1 pole, 1" spaces	Max single pole circuits	Front type	Main wire size (AWG/kcmil) Cu-Al	Equipment ground kit	Ordering code
100	12	24	–	4-1/0	TGK12/TGK24 (order separately)	TMQ1210RCU
125	12	24	–	1-2/0	TGK12/TGK24 (order separately)	TMQ1212RCU

T-Series main lug, NEMA 1 indoor

Main ampere rating	1 pole, 1" spaces	Max single pole circuits	Front type	Main wire size (AWG/kcmil) Cu-Al	Equipment ground kit	Ordering code
40	2	4	Surface	14-4	TGK4 (order separately)	TL240SCU
70	2	4	Surface	6-3	TGK4 (order separately)	TL270SCU
125	4	8	Combination	1-2/0	TGL1 (order separately)	TLQ412C
			Combination	1-2/0	TGL1 installed	TLQ412CT
			Thermoplastic	1-2/0	TGL1 (order separately)	TPLQ412C
			Thermoplastic	1-2/0	TGL1 installed	TPLQ412CT

T-Series main lug, NEMA 3R outdoor

Main ampere rating	1 pole, 1" spaces	Max single pole circuits	Front type	Main wire size (AWG/kcmil) Cu-Al	Equipment ground kit	Ordering code
40	2	4	–	14-4	TGK4 (order separately)	TL240RCU
70	2	4	–	6-3	TGK4 (order separately)	TL270RCU
125	4	8	–	1-2/0	TGL1 (order separately)	TLQ412R1
			–	1-2/0	TGL1 installed	TLQ412RT1
			–	1-2/0	TGL1 (order separately)	TLQ412R2
			Thermoplastic	1-2/0	TGL1 (order separately)	TPLQ412R
			Thermoplastic	1-2/0	TGL1 installed	TPLQ412RT

ReliaHome T-Series load centers

T-Series main lug convertible to main circuit breaker, NEMA 1 indoor

Main ampere rating	1 pole, 1" spaces	Max single pole circuits	Front type	Main wire size (AWG/kcmil) Cu-Al	Equipment ground kit	Ordering code
125	6	12	Flush	6-2/0	TGL2 (order separately)	TLMQ612FCU
			Flush	6-2/0	TGL2 (order separately)	TLMQ612FCUD
			Surface	6-2/0	TGL2 (order separately)	TLMQ612SCU
			Surface	6-2/0	TGL2 (order separately)	TLMQ612SCUD
	8	16	Flush	6-2/0	TGL2 (order separately)	TLMQ812FCU
			Flush	6-2/0	TGL2 (order separately)	TLMQ812FCUD
			Flush	6-2/0	TGL2 factory installed	TLMQ812FCUDG
			Surface	6-2/0	TGL2 (order separately)	TLMQ812SCU
			Surface	6-2/0	TGL2 (order separately)	TLMQ812SCUD
			Surface	6-2/0	TGL2 factory installed	TLMQ812SCUDG
			Surface	6-2/0	TGL2 factory installed	TLMQ812SCUDG
	14	28	Combination	6-2/0	TGL2 factory installed	TLMQ1412CCU

T-Series main lug convertible to main circuit breaker, NEMA 3R outdoor

Main ampere rating	1 pole, 1" spaces	Max single pole circuits	Front type	Main wire size (AWG/kcmil) Cu-Al	Equipment ground kit	Ordering code
125	6	12	–	6-2/0	TGL2 (order separately)	TLMQ612RCU
	8	16	–	6-2/0	TGL2 (order separately)	TLMQ812RCU
	8	16	–	6-2/0	TGK12/TGK24 (order separately)	TLMQ812RCU2
	14	28	–	6-2/0	TGL2 factory installed	TLMQ1412RCU

ReliaHome meter combos

Product overview

Ordering code construction - Meter main

T

M

10

RMC

Load center

T = ABB non-PON designation

Socket type

M = Ring or Ringless

SMR = Ringless

Suffix

RMC = Various utility approvals

CSGP = GP ** approved

RMCFMG = MEG/FMG* approved

Amperage rating

10 = 100A

12 = 125A

15 = 150A

20 = 200A

*FMG = Florida Meeting Group now part of Meter Equipment Group (MEG) utility
** GP = Gorgia Power utility

Meter main				
Main ampere rating	Ring / Ringless	Bypass type	UL incoming	Ordering code
200	Ringless	None	OH/UG	TM20RMCFMG
	40	None	OH/UG	TSMR020CSGP

ReliaHome meter combos

Ordering code construction - PON single main


	PA	MS	20	20	T	RL	N	O	S	S	R	
Load center												R = Solar and battery ready
PA = ReliaHome Aluminum (PON) main bus												
PC = ReliaHome Copper (PON) main bus												S = Factory packaged surge protection
Main type												Front type
MS = Main breaker, meter combo loadcenter												S = Surface convertible
												F = Semi-flush
Maximum 1" spaces/circuits												Feed type
8 = 8/16												C = Combination overhead/underground
12 = 12/24												U = Underground
20 = 20/40												
30 = 30/60												
40 = 40/80												
Main amperage rating												Bypass type (meter)
15 = 150A												H = Horn
20 = 200A												L = Lever
22 = 225A												M = Manual
												N = None
Configuration												Meter socket cover type
S = Side by side												R = Ring
T = Top/bottom												RL = Ringless

Ordering code construction - Single main

	T	SM	RQ	20	20	C	S	CU	
Load center									
T = ABB non-PON designation									
Main type									Bussing type, feed-thru type
SM = Meter socket - main breaker (with circuits)									AL = Aluminum non-feed thru
									CU = Copper non-feed thru
Socket type									FL = Copper feed-thru
Q = Ring									
RQ = Ringless									Front type
BQ = Ringless lever bypass									F = Semi-Flush
Max number of 1" spaces									S = Surface
"2 - 40" = Maximum # of 1" spaces for breakers									W = Surface - EUSERC wide body
Amperage rating									Feed type
10 = 100A									U = Underground
12 = 125A									C = Overhead/underground
15 = 150A									
20 = 200A									
22 = 225A									

Courtesy of Steven Engineering, Inc - (800) 258-9200 - sales@steveneng.com - www.stevenengineering.com


ReliaHome meter combos



PAMS2020TRLNCS

Single main, ringless

Main ampere rating	Max branch breaker spaces	Max branch breaker circuits	Interrupting rating	Front type	Bypass type	UL incoming	Ordering code
150	4	8	22	Surface	None	OH/UG	TSMRQ415CSCUGP
	4	8	22	Surface	None	OH/UG	TSMRQ415CSFLFMG
	8	16	22	Surface	None	OH/UG	PAMS815TRLNCS
200	4	8	22	Surface	None	OH/UG	TSMRQ420CSFLFMG
	4	8	22	Surface	None	OH/UG	TSMRQ420CSCUGP
	4	8	22	Surface	Horn Bypass	OH/UG	TSMRQ420CSCU
	8	16	22	Surface	None	OH/UG	PAMS820TRLNCS
	20	40	22	Surface	None	OH/UG	PAMS2020TRLNCS



TSMQ420CSCU

Single main, ring type, top/bottom, main breaker

Main ampere rating	Max branch breaker spaces	Max branch breaker circuits	Interrupting rating	Front type	Bypass type	UL incoming	Ordering code
200	4	8	22	Surface	None	OH/UG	TSMQ420CSCU

Single main, ring type, side-by-side, main breaker

Main ampere rating	Max branch breaker spaces	Max branch breaker circuits	Interrupting rating	Front type	Bypass type	UL incoming	Ordering code
200	8	16	22	Surface	None	OH/UG	TSMQ820CSCU

ReliaHome meter combos

Ordering code construction - Dual main type (TSD)

T

SD

R

8

40

U

F

CU

Load center

T = ABB non-PON designation

Main type

SD = Meter Socket Dual Main

Socket type

A = Ring - Link Bypass (TSD style)

R = Ringless Bypass or No Bypass (TSD style)

Max number of 1" spaces

"0 - 24" = Maximum # of 1" spaces/ckts for breakers

Amperage rating

30 = 300A

32 = 320A

40 = 400A

Bussing type, feed-thru type

42 = Copper 42ckt 1/2" spaces

CU = Copper Non-Feed Thru

FL = Copper Feed-Thru

Front type

C = Surface (for TSDA type only)

F = Semi-Flush

S = Surface

Feed type

U = Underground

C = Overhead/underground

Dual Main Breaker, ringless, Class 320

Main ampere rating	Max branch breaker spaces	Max branch breaker circuits	Interrupting rating	Front type	Bypass type	UL incoming	Socket layout type	Ordering code
300	8	16	22	Semiflush	Lever	OH/UG	Side by Side	TSDR830CFCUGP
400	8	16	22	Semiflush	Lever	OH/UG	Side by Side	TSDR840CFCUGP

ReliaHome meter combos

Ordering code construction

T	M	42		20	C	CU	B
ABB Identification							Insert for Specials
							G or T = Factory installed ground bar
							B = Bottom feed main breaker
							FL = Factory installed feed-through lugs
							D = Optional door for 6-8 circuit panel. (Doors standard on all units 12 circuits or greater)
							W = White Front
Type							Insert for PowerMark Gold
M = Main breaker							CU = Copper Bus
L = Main lug							42 = Copper Bus Full 42 circuit panel
LM = Convertible							
PL = Main lug (Thermoplastic)							
Maximum Number 1" Spaces							
2, 4, 6...42							
Single phase = Omit this field							
4 = 3-phase, 4-wire							
Load Centers							
							Enclosure Type
							C = Combination surface/flush
							F = Flush
							S = Surface
							R = Outdoor
							Bus Ampere Rating
							40 = 40 Amps 20 = 200 Amps
							70 = 70 Amps 22 = 225 Amps
							10 = 100 Amps
							12 = 125 Amps
							15 = 150 Amps

ReliaHome three phase load centers

Main lug, factory installed, indoor (NEMA 1) enclosure, top/bottom feed


Main ampere rating	1 pole, 1" spaces	2 pole, 1" spaces	3 pole, 1" spaces	Total 1-pole spaces	Front type	Box number	Main wire size (AWG/kcmil) Cu-Al	Equipment ground kit	Ordering code
125	12	6	4	12	Combination	4	6-2/0	TGK12 (order separately) TGK24 (order separately)	TL12412C
150	18	8	6	18	Combination	7	1-3/0 (Cu), 2/0-3/0 (Al)	TGK24 (order separately) TGK32 (order separately)	TL18415C
	24	12	8	24	Combination	7	1-3/0 (Cu), 2/0-3/0 (Al)	TGK24 (order separately) TGK32 (order separately)	TL24415C



TL12412R

Main lug, factory installed, outdoor (NEMA 3R) enclosure, top feed

Main ampere rating	1 pole, 1" spaces	2 pole, 1" spaces	3 pole, 1" spaces	Total 1-pole spaces	Box number	Main wire size (AWG/kcmil) Cu-Al	Equipment ground kit	Ordering code
125	12	6	4	12	R3	6-2/0	TGK12 or TGK24 (order separately)	TL12412R
150	18	8	6	18	R4	1-3/0 (Cu), 2/0-3/0 (Al)	TGK24 or TGK32 (order separately)	TL18415R
	24	12	8	24	R4	1-3/0 (Cu), 2/0-3/0 (Al)	TGK24 or TGK32 (order separately)	TL24415R



TM42420C

Main circuit breaker, factory installed, indoor (NEMA 1) enclosure

Main ampere rating	1 pole, 1" spaces	2 pole, 1" spaces	3 pole, 1" spaces	Total 1-pole spaces	Front type	Box number	Main wire size (AWG/kcmil) Cu-Al	Equipment ground kit	Ordering code
100	12	6	4	12	Combination	6	6-1/0 (Cu), 4-1/0 (Al)	TGK12 or TGK24 (order separately)	TM12410C
	18	8	6	18	Combination	6	6-1/0 (Cu), 4-1/0 (Al)	TGK24 or TGK32 (order separately)	TM18410C
125	30	14	10	30	Combination	12	1-3/0 (Cu), 2/0-3/0 (Al)	TGK32 (order separately)	TM30412C
150	24	12	8	24	Combination	11	1-3/0 (Cu), 2/0-3/0 (Al)	TGK32 (order separately)	TM24415C
	30	14	10	30	Combination	12	1-3/0 (Cu), 2/0-3/0 (Al)	TGK32 (order separately)	TM30415C
	42	20	14	42	Combination	15	1-3/0 (Cu), 2/0-3/0 (Al)	TGK42 (order separately)	TM42415C
200	24	12	8	24	Combination	12	1-300 (Cu), 2/0-300 (Al)	TGK32 (order separately)	TM24420C
	30	14	10	30	Combination	13	1-250 (Cu), 2/0-250 (Al)	TGK32 (order separately)	TM30420C
	42	20	14	42	Combination	14	1-250 (Cu), 2/0-250 (Al)	TGK42 (order separately)	TM42420C
225	42	20	14	42	Combination	15A	1-300 (Cu), 2/0-300 (Al)	(2) TGL2 (order separately)	TM42422C



TM30420R

Main circuit breaker, factory installed, outdoor (NEMA 3R) enclosure, top feed

Main ampere rating	1 pole, 1" spaces	2 pole, 1" spaces	3 pole, 1" spaces	Total 1-pole spaces	Box number	Main wire size (AWG/kcmil) Cu-Al	Equipment ground kit	Ordering code
100	18	8	6	18	R4	6-1/0 (Cu), 4-1/0 (Al)	TGK24 or TGK32 (order separately)	TM18410R

ReliaHome pool and spa panels




Outdoor (NEMA 3R) enclosure, top/bottom feed

Main ampere rating	1 pole, 1" spaces	2 pole, 1" spaces	1 pole, 1/2" spaces	2 pole, 1/2" spaces	Total 1-pole spaces	Max single pole circuits	Load center type	Box number	Main wire size (AWG/kcmil) Cu-Al	Equipment ground kit	Ordering code
125	4	2	8	4	8	8	Factory Included 50A GFCI	-	1-2/0	TGL1 installed	TL412R250GF
	4	2	8	4	8	8	Factory Included 60A GFCI	-	1-2/0	TGL1 installed	TL412R260GF

Product overview



	T	H	QL	1	1*	15	P	AF2
ABB identification								
Interrupting rating								Ground fault/arc fault circuit interrupter AF2 = 1-pole combination arc fault circuit interrupter
H = 10kAIC								GFEP = 1- & 2-pole ground fault with equipment protection interrupter–30 mA
HH = 22kAIC								GFT = 1- & 2-pole ground fault with self-test feature interrupter - 5 mA
X = 65kAIC								DF = 1-pole dual function GFCI/AFCI ground fault & combination arc fault circuit interrupter
Type								GFT2 = 35-60A, 2-pole ground fault with self-test feature interrupter - 5mA
QL = 1" plug-in								
Poles (1, 2, 3)								
Voltage								
1 = 120/240V								
2 = 240V								
Ampere rating							P = Insert for plug-on neutral connection	

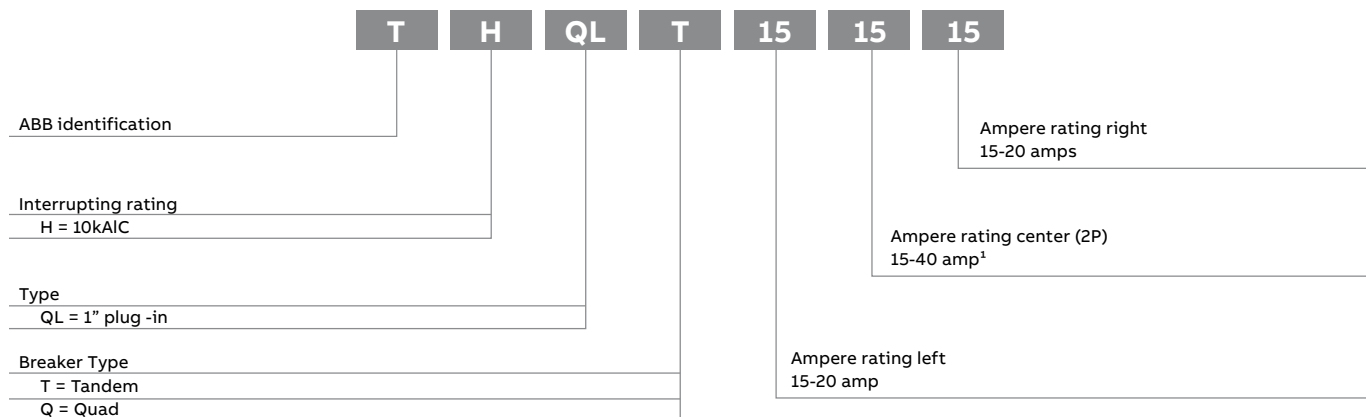

Courtesy of Steven Engineering, Inc - (800) 258-9200 - sales@steveneng.com - www.stevenengineering.com

ReliaHome circuit breakers

Q-Line plug-in residential circuit breakers



THQL1120



THQL2140



THQL32015

Q-line plug-in circuit breakers

Voltage Ampere rating	10,000 AIC		22,000 AIC			65,000 AIC	
	Type THQL 1-inch module		Type THHQL 1-inch module			Type TXQL 1-inch module	
	120/240 Vac	240 Vac	120/240 Vac	120/240 Vac	240 Vac	120/240 Vac	240 Vac
	Ordering code	Ordering code	Ordering code	Ordering code	Ordering code	Ordering code	Ordering code
Single pole							
15	THQL1115	—	THHQL1115	—	—	—	—
20	THQL1120	—	THHQL1120	—	—	—	—
25	THQL1125	—	—	—	—	—	—
30	THQL1130	—	THHQL1130	—	—	—	—
Two-pole: incorporated internal common trip bar							
15	THQL2115	THQL22015	THHQL2115	—	—	—	—
20	THQL2120	THQL22020	THHQL2120	—	—	—	—
25	THQL2125	THQL22025	THHQL2125	—	—	—	—
30	THQL2130	THQL22030	THHQL2130	—	—	—	—
35	THQL2135	—	THHQL2135	—	—	—	—
40	THQL2140	THQL22040	THHQL2140	THHQL2140RM ¹	—	—	—
45	THQL2145	—	THHQL2145	—	—	—	—
50	THQL2150	THQL22050	THHQL2150	THHQL2150RM ¹	—	—	—
60	THQL2160	THQL22060	THHQL2160	THHQL2160RM ¹	—	—	—
70	THQL2170	—	THHQL2170	THHQL2170RM ¹	—	—	—
80	THQL2180	—	THHQL2180	THHQL2180RM ¹	—	—	—
90	THQL2190	—	—	—	—	—	—
100	THQL21100	THQL22100	THHQL21100	THHQL21100RM ¹	—	—	—
110	THQL21110	—	—	—	—	—	—
125	THQL21125	—	THHQL21125	THHQL21125RM ¹	—	—	—
Three-pole: incorporated internal common trip bar							
15	—	THQL32015	—	—	—	—	—
20	—	THQL32020	—	—	THHQL32020	—	—
25	—	THQL32025	—	—	—	—	—
30	—	THQL32030	—	—	THHQL32030	—	—
35	—	THQL32035	—	—	—	—	—
40	—	THQL32040	—	—	THHQL32040	—	—
45	—	THQL32045	—	—	—	—	—
50	—	THQL32050	—	—	THHQL32050	—	—
60	—	THQL32060	—	—	THHQL32060	—	—
70	—	THQL32070	—	—	—	—	—
80	—	THQL32080	—	—	—	—	—
90	—	THQL32090	—	—	THHQL32090	—	—
100	—	THQL32100	—	—	THHQL32100	—	—

ReliaHome circuit breakers

Q-line plug-in residential circuit breakers



THQLT1515



THQLQ154015

Tandem and Quad circuit breaker, UL489				
Ampere rating			1" space used	2" space used
			(2) 1 poles, 120/240 Vac	(2) 1 poles and (1) 2 pole, 120/240 Vac
Right	Center	Left	Ordering code	Ordering code
10,000 AIC				
15	–	15	THQLT1515	–
20	–	20	THQLT2020	–
15	–	20	THQLT1520	–
15	15	15	–	THQLQ151515
15	20	15	–	THQLQ152015
15	30	15	–	THQLQ153015
15	40	15	–	THQLQ154015
20	15	20	–	THQLQ201520
20	20	20	–	THQLQ202020
20	30	20	–	THQLQ203020
20	40	20	–	THQLQ204020
20	30	15	–	THQLQ203015

ReliaHome circuit breakers

Arc fault and dual function



THQL1115DF

Arc fault circuit interrupter (AFCI)

		1-pole 120/240 Vac	1-pole 120/240 Vac
		Ordering code	Ordering code
	Ampere rating	Long pigtail	Plug-on neutral
10,000 AIC			
	15	THQL1115AF2	THQL1115PAF2
	20	THQL1120AF2	THQL1120PAF2
22,000 AIC			
	15	THHQL1115AF2	—
	20	THHQL1120AF2	—



THQL1115PDF

Dual function circuit interrupter (DFCI) ground fault & combination arc fault circuit breaker

		1-pole, 120 Vac	1-pole, 120 Vac
		Ordering code	Ordering code
	Ampere rating	Long pigtail	Plug-on neutral
10,000 AIC			
	15	THQL1115DF	THQL1115PDF
	20	THQL1120DF	THQL1120PDF
22,000 AIC			
	20	THHQL1120DF	THHQL1120PDF

ReliaHome circuit breakers

Ground fault



THQL1115GFT



THQL1115GFTS



THQL2115GFEP

Ground fault circuit interrupter (GFCI) with self-test feature (6mA)

	Ampere rating	1-pole, 120 Vac	1-pole, 120 Vac	2-pole, 120/240 Vac	2-pole, 120/240 Vac
		Ordering code	Ordering code	Ordering code	Ordering code
		Long pigtail	Plug-on neutral	Long pigtail	Plug-on neutral
10,000 AIC					
	15	THQL1115GFT	THQL1115PGFT	THQL2115GFT	THQL2115PGFT
	20	THQL1120GFT	THQL1120PGFT	THQL2120GFT	THQL2120PGFT
	25	THQL1125GFT	–	THQL2125GFT	THQL2125PGFT
	30	THQL1130GFT	THQL1130PGFT	THQL2130GFT	THQL2130PGFT
22,000 AIC					
	20	THHQL1120GFT	–	–	–

Ground fault circuit interrupter (GFCI) with equipment protection (30mA)

	Ampere rating	1-pole, 120 Vac	2-pole, 120/240 Vac
		Ordering code	Ordering code
		Long pigtail	Long pigtail
10,000 AIC			
	15	THQL1115GFEP	THQL2115GFEP
	20	THQL1120GFEP	THQL2120GFEP
	30	THQL1130GFEP	THQL2130GFEP

ReliaHome circuit breakers

Special purpose circuit breakers



THQL21WY30

Q-Line switching neutral circuit breakers

Thermal magnetic pole plus nonautomatic pole for switching neutral			
	Ampere rating	2 pole spaces required (1P+1N), 120 Vac	3 pole spaces required (2P+1N), 120/240 Vac
		Ordering code	Ordering code
10,000 AIC	20	THQL21WY20	THQL31WY20



THQL2120HID

Q-line high intensity discharge circuit breakers

	Ampere rating	1-pole, 120/240 Vac	2-pole, 120/240 Vac
		Ordering code	Ordering code
10,000 AIC	15	–	THQL2115HID
	20	–	THQL2120HID
	30	–	THQL2130HID
22,000 AIC	20	THHQL1120HID	–
	25	THHQL1125HID	–
	30	THHQL1130HID	–



THQL1140HM

Q-line high magnetic circuit breakers

	Ampere rating	1-pole, 120 Vac
		Ordering code
10,000 AIC	15	THQL1115HM
	20	THQL1120HM

ReliaHome circuit breakers

Special purpose circuit breakers



TQL21Y100

Q-line molded case switches



THQL1130ST1



THQL2120ST1



THQL32020ST1


Wire Specifications

Breaker type	Ampere rating	Wire size AWG/kcmil
TQL	60	8-3 Cu/8-3 Al
	100	6-1/0 Cu/4-1/0 Al

Q-line shunt trip circuit breakers with factory installed 120 Vac shunt trip

	Ampere rating	2 pole spaces required (1P+1ST), 120/240 Vac	3 pole spaces required (2P+1ST), 120/240 Vac
		Ordering code	Ordering code
10,000 AIC			
	20	THQL1120ST1	THQL2120ST1
	40	-	THQL2140ST1
	50	-	THQL2150ST1
	60	-	THQL2160ST1
	100	-	THQL21100ST1


ReliaHome circuit breaker accessories




—
THQMV100F with
filler plates



—
THQMV200E



—
TQMH000



—
THL103



—
TQHT1



—
THT104



—
TQ1120

—
TQ2120

ReliaHome P-Series/P-Series+ main breaker kit for use in 150A, 200A, & 225A convertible load centers

Description	Ampere rating	Ordering code	Lug size
Main circuit breaker kits 22,000 AIC	100	THQMV100F	1-300 (cu), 2/0-300
	125	THQMV125F	
	150	THQMV150F	
	175	THQMV175F	
	200	THQMV200F	
	225	THQMV225F	

ReliaHome P-Series/P-Series+ main breaker kit

Description	Ordering code
Main Circuit Breaker Kit - Order appropriate THQL 10kAIC or THHQL 22kAIC breakers separately. Includes service barriers for use with THQL or THHQL main.	TQMH000F

ReliaHome main circuit breaker kit

Description	Ordering code
Main Circuit Breaker Kit - Order appropriate THQL 10kAIC or THHQL 22kAIC breakers separately. Includes service barriers for use with THQL or THHQL main.	TQMH000

ReliaHome T-Series and legacy PowerMark Gold and PRO main circuit breaker kit for use in 150A, 200A, & 225A convertible load centers

Description	Ampere rating	Ordering code	Lug size
Main circuit breaker kits 22,000 AIC	100	THQMV100E	1-300 (cu), 2/0-300
	125	THQMV125E	
	150	THQMV150E	
	175	THQMV175E	
	200	THQMV200E	
	225	THQMV225E	

Handle locks - Non padlocking

Description	Breaker type	Ordering code
THQL non padlocking handle lock	THQL	THL103

Handle ties

Description	Breaker type	Ordering code
Snap-on handle tie - trip indicating	TQB	TQHT1
	TQC	
	TQL	
Snap-on handle tie - solid	TQB	THT104
	TQC	
	TQL	
Multiwire branch breaker handle tie kits	TQB	TQ3HTK TQ4HTK
	TQC	
	TQL	

Surge protective devices



THQLSURGE2



THOMESURGE

Surge protectors, NEMA Type 1					
Description	System voltage	Per phase surge rating	Short circuit rating	Nominal discharge rating	Ordering code
SurgePro panel mounted	120/240 VAC	25KA	200 kA	10 kA	THQLSURGE2
SurgePro externally mounted	120/240 VAC	36 kA	200 kA	10 kA	THOMESURGE

ReliaHome enclosed circuit breakers



Outdoor (NEMA 3R) enclosure, 2 pole, neutral included

Main ampere rating	Short circuit rating (kAIC)	Main wire size (AWG/ kcmil) Cu-Al	Equipment ground kit	Ordering code	Dimension A (in.)	Dimension B (in.)	Dimension C (in.)	Dimension D (in.)	Dimension E (in.)
100	10	(1) #4-1/0	TGL1 (order separately)	TQL100RE	17	7.25	6.875	6	5
125	10	(1) #2-2/0	TGL1 (order separately)	TQL125RE	18.313	7.688	7.5	6.313	5.188
150	22	(1) #6-350	-	THQMV150NRE	18.813	9.5	9.313	5.5	4.875
200	22	(1) #6-350	-	THQMV200NRE	18.813	9.5	9.313	5.5	4.875

ReliaHome field installed accessories

ReliaHome P-Series and P-Series+ load center hardware kits and accessories

Description	Ordering code
Large neutral extension (12 additional neutral spaces)	PNEUEXTLG
Small neutral extension (8 additional neutral spaces)	PNEUEXTSM
PSCOVERWH contains (10) white front screw covers per bag	PSCOVERWH



TNLK250

ReliaHome P-Series, P-Series+, and T-Series neutral/ground lug kits (top mount)

Description	Wire range	Standard package quantity	Ordering code
ReliaHome neutral/ground lug kit (top mount on neutral bar or ground bar)	6-2/0	1	TNLK20
ReliaHome neutral/ground lug kit (top mount on neutral bar or ground bar)	1-300	1	TNLK250



TGK12 with TGKIS

ReliaHome P-Series, P-Series+, and T-Series isolated ground bus bars equipment ground kit

Description	Standard package quantity	Ordering code
Isolated ground bar kit (order with TGK equipment ground kits)	1	TGKIS

ReliaHome field installed accessories



TMLK125

ReliaHome main lug kits

Description	Wire range (Cu/Al)	Ordering code
125 Amp ReliaHome replacement main lug kit	6-2/0	TMLK125



TLABELSDBP

ReliaHome service disconnect label

Description	Standard package quantity	Ordering code
Emergency service disconnect label kit	10	TLABELSDBP



TFH

ReliaHome P-Series, P-Series+, and T-Series front filler plates

Description	Standard package quantity	Ordering code
1/2" front filler plate	100	TFH
1" front filler plate	1	TQLFP1



THQLRK2

ReliaHome load center main breaker retainers

Description	Breaker type	Ordering code
For use on ReliaHome 3-phase load centers with THQL breakers 100A 3P Max	THQL	—
For use with T-Series TLMQ812RCU2	THQL	—
For use with 6 - 8 circuit ReliaHome T-Series load centers with THQL breakers	THQL	THQLRK2
For use with ReliaHome TLMQ1412XXX convertible load centers	THQL	THQLRK3
For use with 16 - 60 circuit ReliaHome load centers with THQL Breakers. Similar to THQLRK1 but it does not take up a breaker space.	THQL	THQLRK4




THQLRK3






THQLRK4

ReliaHome smart panel

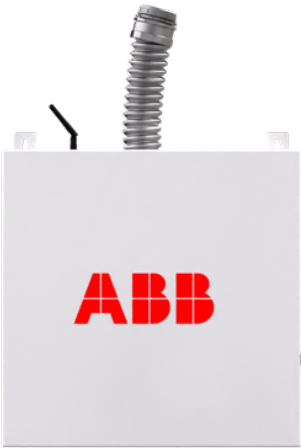

Description	Material #	ABB Product ID
ReliaHome(TM) Smart Panel - Outdoor	ABBHEM2	1TQJ102110A1004
ReliaHome(TM) Smart Panel - Indoor	ABBHEM2N3R	1TQJ102110A1005
ReliaHome™ Smart Panel Spare 200A CTs	ABBHEM1CT	1TQJ103000E1001

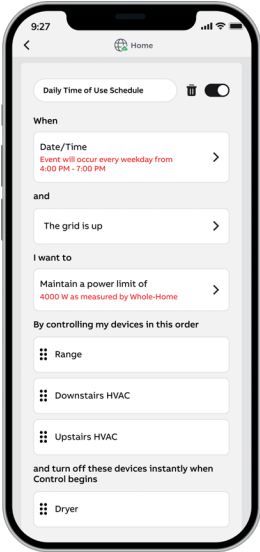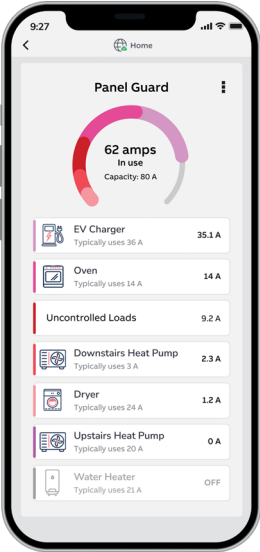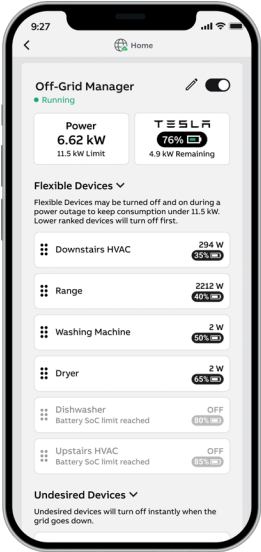

—

2

Metering




ReliaMod™

Table of contents

ReliaMod™ modular metering	
Accessories	2-1

ReliaMod™

Accessories



XT3 Terminal Cover:
KXT3HTC-3



XT3 Terminal Screw Kit:
1SDA066857R1



XT7 Trip Unit Battery
Pack: 1SDA066988R1



Ekip T&P Testing Kit:
1SDA066989R1

ReliaMod™ accessories

Accessory category	Description	Ordering code
Replacement Formula Tenant Breaker Load Lug Kits ³	Replacement 2-Pole A2 Formula Breaker Load Lug Kit: (1) 1 AWG-300 kcmil	KA2225-2
Replacement Tmax XT Tenant Breaker Load Lug Kits	Replacement 3-Pole XT3 Breaker Load Lug Kit: (1) 14-1/0 AWG	KXT3CUAL1-3PC
	Replacement 3-Pole XT3 Breaker Load Lug Kit: (1) 4 AWG-300 kcmil	KXT3CUAL2-3PC
	Replacement 3-Pole XT4 Breaker Load Lug Kit: (1) 14-1/0 AWG	KXT4CUAL1-3PC
	Replacement 3-Pole XT4 Breaker Load Lug Kit: (1) 4 AWG-300 kcmil	KXT4CUAL2-3PC
	Replacement 3-Pole XT4 Breaker Load Lug Kit: (1) 3/0 AWG-350 kcmil	KXT4CUAL3-3PC
	Replacement 3-Pole XT5 Breaker Load Lug Kit: (2) 2/0-500 kcmil	KXT5CUAL2X500K-3PC
Replacement Tenant Breaker Mounting Hardware/Screw Kits	Replacement XT3 Tenant Breaker Replacement Terminal Screw Kit (One kit required per breaker)	1SDA066857R1
	Replacement XT4 Tenant Breaker Replacement Terminal Screw Kit (One kit required per breaker)	1SDA066861R1
	Replacement XT5 Tenant Breaker Replacement Terminal Screw Kits (One kit required per breaker)	1SDA104730R1
	Replacement TEY Frame Tenant Breaker Replacement Bolt on mounting screws (Kit of 24 screws)	TQBS1
Replacement Tenant Breaker Phase Separators	Replacement Phase Separators for XT3 Tenant Breaker (Kit of 4)	KXTBPB25-3
	Replacement Phase Separators for XT4 Tenant Breaker (Kit of 4)	KXTCPB25-3
	Replacement Phase Separators for XT5 Tenant Breaker (Kit of 4)	KXT5PB25UL-3
Replacement TMAX High Terminal Covers	Replacement XT3 Tenant Breaker High Terminal Cover	KXT3HTC-3
	Replacement XT4 Tenant Breaker High Terminal Cover	KXT4HTC-3
	Replacement XT5 Tenant Breaker High Terminal Cover	KXT5HTC-3
Trip Unit Battery Packs (Temporarily powers trip unit to adjust breaker settings if power is not yet applied to the breaker)	Trip Unit Battery Pack for XT7 Ekip Touch Trip Unit (1200A main breaker modules)	1SDA066988R1
Ekip T&P Testing Kit	This testing kit can test the RELT function on applicable circuit breaker trip units via secondary injection to satisfy NEC 240.87(C) performance testing requirements (if secondary injection is allowable by the AHJ). A complete test report can be generated and saved on a local PC and/or printed. This kit is compatible with XT7, T8, and Emax 2 circuit breaker trip units that come with the RELT function.	1SDA066989R1
RELT System Replacement Kits	RELT System Replacement Kit for XT7 frame MCB ReliaMod™ main modules: Includes Ekip power supply, Ekip signaling, RELT switch, pig tail, fuse holder, fuses, hardware, etc.	RMXT7RELTKit
	RELT System Replacement Kit for T8 frame MCB ReliaMod™ main modules: Includes RELT switch, pig tail, fuse holder, fuses, hardware, etc.	RMT8RELTKit

³A1 and A2 Formula breaker lug kits are not interchangeable between frames. For example: You cannot use the A2 kit KA2225-2 to install 300 kcmil lugs on an A1 frame breaker.

—
3

RV power pedestals




Section 3
RV power pedestals
Table of contents

RV power pedestals	
Ordering code construction	3-1
RV power pedestals	3-2

RV power pedestals

Ordering code construction

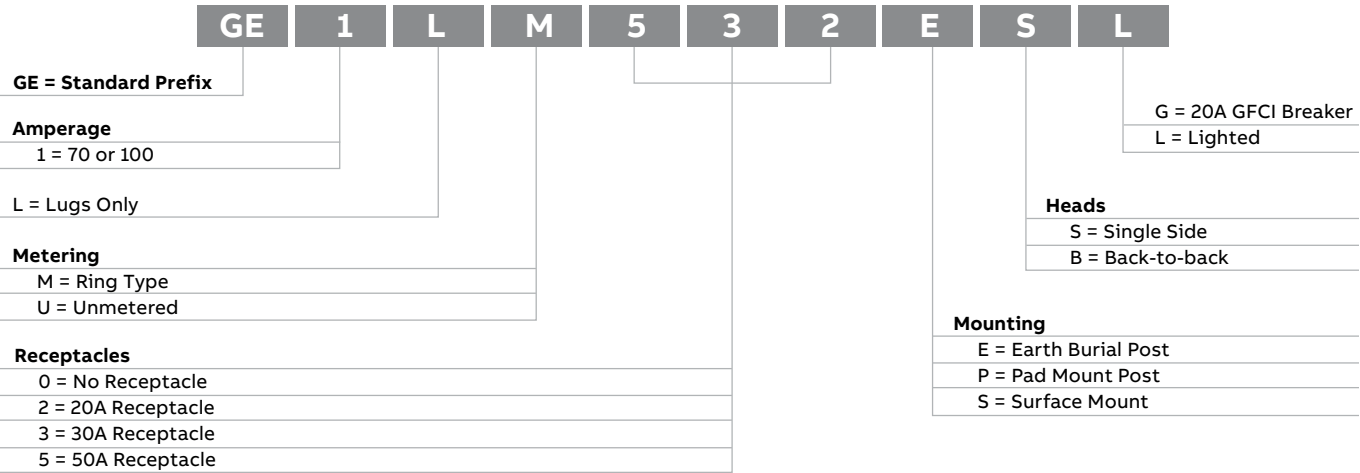

Unmetered
Earth Burial
Pedestal



Ring Type Metered
Pad Mount Post



Unmetered
Surface Mount

Reference only. For stocked items, see following pages.

RV power pedestals

Inventory

Unmetered Surface Mount

Amps	Volts	Receptacles	Circuit Protection	Ground Fault Circuit Breaker	Head Type	Lighted	Wire Range Table	Ordering code
100	120/240	30A/20A GFCI	THQL1130, THQL1120	N/A	Single Side	No	1	GE1LU032SS
70	120/240	50A/20A GFCI	THQL2150, THQL1120	N/A	Single Side	No	2	GE1LU502SS
100	120/240	50A/30A/20A GFCI	THQL2150, THQL1130, THQL1120	N/A	Single Side	No	3	GE1LU532SS

Ring Type Metered Surface Mount

Amps	Volts	Receptacles	Circuit Protection	Ground Fault Circuit Breaker	Head Type	Lighted	Wire Range Table	Ordering code
100	120/240	30A/20A GFCI	THQL1130, THQL1120	N/A	Single Side	No	2	GE1LM032SS
70	120/240	50A/20A GFCI	THQL2150, THQL1120	N/A	Single Side	No	2	GE1LM502SS
100	120/240	50A/30A/20A GFCI	THQL2150, THQL1130, THQL1120	N/A	Single Side	No	4	GE1LM532SS

Unmetered Pad Mount Post

Amps	Volts	Receptacles	Circuit Protection	Ground Fault Circuit Breaker	Head Type	Lighted	Wire Range Table	Ordering code
100	120/240	50A/30A/20A GFCI	THQL2150, THQL1130, THQL1120	N/A	Back-to-Back	No	5	GE1LU532PB
100	120/240	50A/30A/20A GFCI	THQL2150, THQL1130, THQL1120	N/A	Single Side	No	6	GE1LU532PS
100	120/240	50A/30A/20A GFCI	THQL2150, THQL1130, THQL1120	N/A	Single Side	Yes	6	GE1LU532PSL

Ring Type Metered Pad Mount Post

Amps	Volts	Receptacles	Circuit Protection	Ground Fault Circuit Breaker	Head Type	Lighted	Wire Range Table	Ordering code
100	120/240	50A/30A/20A GFCI	THQL2150, THQL1130, THQL1120	N/A	Single Side	No	7	GE1LM532PS

Unmetered Earth Burial Post

Amps	Volts	Receptacles	Circuit Protection	Ground Fault Circuit Breaker	Head Type	Lighted	Wire Range Table	Ordering code
70	120/240	30A/20A GFCI	THQL1130, THQL1120	N/A	Single Side	No	6	GE1LU032ES
70	120/240	30A/20A GFCI	THQL1130, THQL1120	N/A	Single Side	Yes	6	GE1LU032ESL
100	120/240	50A/30A/20A GFCI	THQL2150, THQL1130, THQL1120	N/A	Back-to-Back	No	5	GE1LU532EB
100	120/240	50A/30A/20A GFCI	THQL2150, THQL1130, THQL1120	N/A	Single Side	No	6	GE1LU532ES

Ring Type Metered Earth Burial Post

Amps	Volts	Receptacles	Circuit Protection	Ground Fault Circuit Breaker	Head Type	Lighted	Wire Range Table	Ordering code
100	120/240	30A/20A GFCI	THQL1130, THQL1120	N/A	Single Side	No	7	GE1LM032ES
100	120/240	50A/30A/20A GFCI	THQL2150, THQL1130, THQL1120	N/A	Back-to-Back	No	8	GE1LM532EB
100	120/240	50A/30A/20A GFCI	THQL2150, THQL1130, THQL1120	N/A	Single Side	No	7	GE1LM532ES
100	120/240	50A/30A/20A GFCI	THQL2150, THQL1130, THQL1120	N/A	Single Side	Yes	7	GE1LM532ESL

Safety switches and AC disconnects



Section 4
Safety switches and AC disconnects

Table of contents

AC Disconnects	4-1
Spec Setter* Safety switches	
Ordering code construction	4-2
General duty	4-3
Heavy duty	4-4
Double throw	4-7
Accessories	4-8

AC disconnects

NEMA 3R enclosure



U035F2



U065F1



U065P010



P065P

Ordering code construction

U 065 3 F 2

Material

P= Plastic

U= Metallic

Amp rating

035= 30 Amps

065= 60 Amps

045= 90 Amps heat pump

220= 20 Amps evap cooler

261= 40 Amps evap cooler

610= 100 Amps heat pump

Other features

1= Midwest assigned

2= Midwest assigned

1010= Single-phase, GFCI receptacle

010= Single-phase, GFCI receptacle

Fusing

F= Fusible

P= Non-fusible

PC= Non-fusible, 20 GFI, receptacle

H= DPST, SPST switch, evap cooler

NA= Non-fusible, non-automatic

Phase

Blank= Single phase

3= 3 phase

AC steel disconnect, NEMA 3R enclosure

	Amperage rating	Phase	HP rating	Standard fuse class	Factory installed GFCI outlet	Height	Width	Depth	Standard package	Replacement puller	Ordering code
Fusible											
	30	1	3	H, K1, K5, K9, RK1, RK5	-	7-1/2	5-3/16	2-1/2	6	FR352R	U035F2
	60	1	10	H, K1, K5, K9, RK1, RK5	-	9-1/4	5-3/16	2-1/2	6	FH682	U065F1
	30	3	3-7.5	H	-	14-3/8	7-1/4	5-3/16	1	265A6035G27	U0353F
	60	3	7.5-15	H	-	14-3/8	7-1/4	5-3/16	1	265A6036G69	U0653F
Non-fusible											
	60	1	10	-	-	7-1/2	5-3/16	2-1/2	6	NF652	U065P ¹
	60	1	10	-	15A	7-1/8	5-1/2	5-3/16	6	NF652	U065P010
	60	3	7.5-15	-	-	14-3/8	7-1/4	5-3/16	1	265A6036G73	U0653P
	60	3	7.5-15	-	-	14	7	5-3/16	1	-	U0653P010
Non-automatic											
	60		10	-	-	7-1/2	5-3/16	2-1/2	6	-	U065NA1
	60		10	-	15A	7-1/8	5-1/2	5-3/16	6	-	U065NA1010


¹Product is available in a palletized SKU, U065PPLT1. Pallet includes 360 units.

AC plastic disconnect, NEMA 3R enclosure

	Amperage rating	Phase	HP rating	Standard fuse class	Removable Closing cap	Height	Width	Depth	Standard package	Replacement puller	Ordering code
Fusible											
	60	1	10	H	Yes	7	5-3/4	3	6	U065F1	P065F
Non-fusible											
	60	1	10	-	Yes	8	5	2-1/2	6	NF652	P065P
	60	1	10	-	No	7-1/2	5-3/16	5-3/16	6	NF652	P065P1

Spec-Setter™ 30-200 A, 800-1200 A safety switches

Ordering code construction

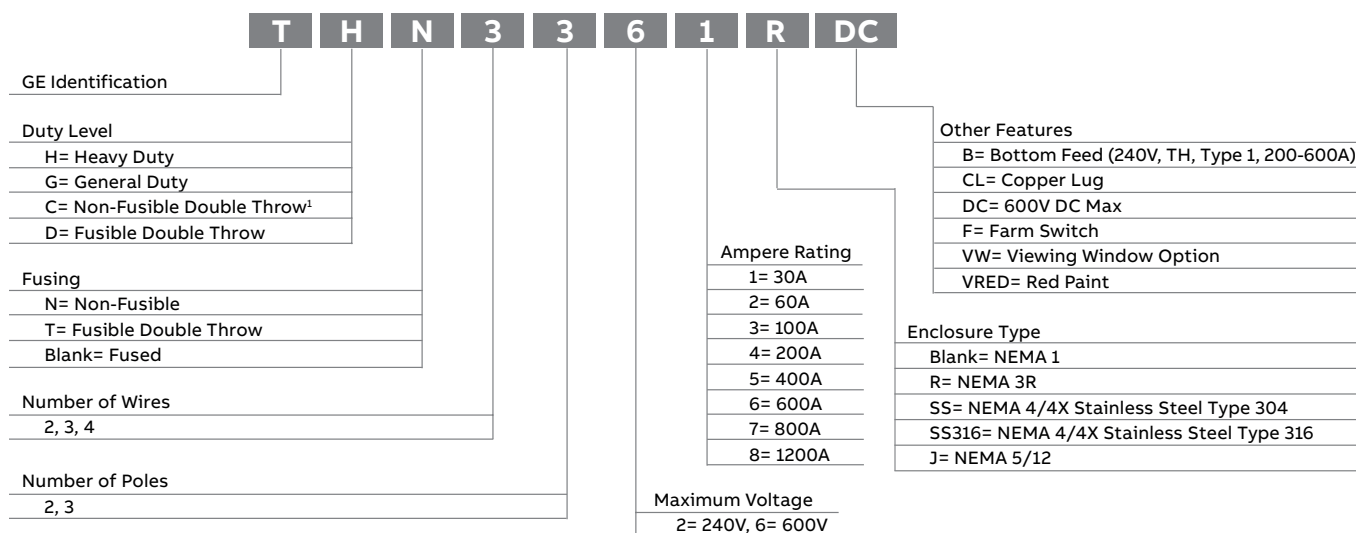

¹ 800A and 1200A non-double throw safety switches also use the C Duty Level nomenclature

Note: This information is provided for interpreting numbers. It should not be used to build product numbers.

All ABB Spec-Setter safety switches carry the following certifications:

- UL Listed and cUL Listed (UL98 Enclosed Switches/CSA-C22.2 No. 4-04)
- Federal Specification WS-865C
- NEMA Enclosed Safety Switch Standard KS1-2013
- Seismic Certified
- Service Entrance Rated (unless otherwise noted)

Horsepower rated

All Spec-Setter safety switches are horsepower rated with the following exceptions:

- 800A single throw type TC switches
- 1200A single and double throw type TC and TDT switches

Spec-Setter™ 400-600 A safety switches

Ordering code construction

T	H	F	3	3	6	5	A	1	V	W
Duty Level									Other Features	
TH = Heavy Duty									VW = Viewing window	
TG = General Duty									BL = Bottom feed, left handle	
TD = Double Throw									CR = Red	
TE = Emergency									CN = Canadian neutral	
Fusing									Enclosure type:	
F = Fused									1 = NEMA 1 indoor	
N = Non-Fusible									R = NEMA 3R outdoor	
									J = NEMA 12 dust tight	
									SS/S = NEMA 4X stainless steel type 304	
									X/SS316 = NEMA 4X stainless steel type 316	
									D = NEMA 3R/12-dust tight with drip holes	
Number of Wires			2, 3, 4						Series	
Number of Poles			2, 3							
Maximum Voltage			2 = 240V, 6 = 600V			Ampere Rating				
						5 = 400A				
						6 = 600A				

Spec-Setter™ safety switches

General duty



Ordering code for general duty switches

			240V		
			Amps	2-pole/3-wire	3-pole/3-wire 3-pole/4-wire
Fused	NEMA 1	30	TG3221	---	TG4321
		60	TG3222	---	TG4322
		100	TG3223	---	TG4323
		200	TG3224	---	TG4324
		400	TGF3225A1	---	TGF4325A1
		600	TGF3226A1	---	TGF4326A1
	NEMA 3R	30	TG3221R	---	TG4321R
		60	TG3222R	---	TG4322R
		100	TG3223R	---	TG4323R
		200	TG3224R	---	TG4324R
		400	TGF3225AR	---	TGF4325AR
		600	TGF3226AR	---	---
Non-fusible	NEMA 1	30	---	TGN3321	---
		60	---	TGN3322	---
		100	---	TGN3323	---
		200	---	TGN3324	---
		400	---	TGN3325A1	---
	NEMA 3R	30	---	TGN3321R	---
		60	---	TGN3322R	---
		100	---	TGN3323R	---
		200	---	TGN3324R	---
		---	---	---	---



Ordering code for red switches

			240V	
			Amps	2-pole/3-wire 3-pole/4-wire
Fused	NEMA 1	30	TG3221VRED	TG4321VRED
		60	---	TG4322VRED

Spec-Setter™ safety switches

Heavy duty



Ordering code for fused heavy duty switches

		240V				600V		
	Amps	2-pole/2-wire	2-pole/3-wire	3-pole/3-wire	3-pole/4-wire	2-pole/2-wire	3-pole/3-wire	3-pole/4-wire
NEMA 1	30	---	TH3221	---	TH4321	---	TH3361	TH4361
	60	---	TH3222	---	TH4322	---	TH3362	TH4362
	100	---	TH3223	---	TH4323	---	TH3363	TH4363
	200	---	TH3224	---	TH4324	---	TH3364	TH4364
	400	---	THF3225A1	THF3325A1	THF4325A1	---	THF3365A1	---
	600	---	---	THF3326A1	THF4326A1	---	THF3366A1	---
	800	---	---	---	---	---	TC72367	---
NEMA 5/12	30	---	---	---	---	---	TH3361J	---
	60	---	---	---	---	---	TH3362J	---
	100	---	---	---	---	---	TH3363J	---
	200	---	---	---	---	---	TH3364J	---
	400	---	---	---	---	---	THF3365AJ	---
NEMA 3R	30	---	TH3221R	---	TH4321R	---	TH3361R	TH4361R
	60	---	TH3222R	---	TH4322R	---	TH3362R	TH4362R
	100	---	TH3223R	---	TH4323R	---	TH3363R	TH4363R
	200	---	TH3224R	---	TH4324R	---	TH3364R	TH4364R
	400	---	THF3225AR	THF3325AR	---	---	THF3365AR	---
	600	---	THF3226AR	THF3326AR	---	---	THF3366AR	---
	800	---	---	---	---	TC72267R	TC72367R	---
NEMA 4/4X, 304	30	TH2221SS	TH3221SS	TH3321SS	TH4321SS	---	TH3361SS	---
	60	TH2222SS	TH3222SS	TH3322SS	TH4322SS	---	TH3362SS	---
	100	---	TH3223SS	---	TH4323SS	---	TH3363SS	---
	200	---	TH3224SS	---	TH4324SS	---	TH3364SS	---
	400	---	---	---	---	---	THF3365AS	---
	600	---	---	---	---	---	THF3366AS	---
NEMA 4/4X, 316	30	---	---	---	---	---	TH3361SS316	---
	60	---	---	---	---	---	TH3362SS316	---
	100	---	---	---	---	---	TH3363SS316	---
	200	---	---	---	---	---	TH3364SS316	---

Spec-Setter™ safety switches

Heavy duty

Ordering code for non-fusible heavy duty switches

		240V	600V
	Amps	3-pole/3-wire	3-pole/3-wire
NEMA 1	30	THN3321	THN3361
	60	---	THN3362
	100	---	THN3363
	200	---	THN3364
	400	---	THN3365A1
	600	---	THN3366A1
	800	---	TC36367
NEMA 5/12	30	---	THN3361J
	60	---	THN3362J
	100	---	THN3363J
	200	---	THN3364J
	400	---	THN3365AJ
NEMA 3R	30	---	THN3361R
	60	---	THN3362R
	100	---	THN3363R
	200	---	THN3364R
	400	---	THN3365AR
	600	---	THN3366AR
NEMA 4/4X, 304	30	---	THN3361SS
	60	---	THN3362SS
	100	---	THN3363SS
	200	---	THN3364SS
	400	---	THN3365AS
	600	---	THN3366AS
NEMA 4/4X, 316	30	---	THN3361SS316
	60	---	THN3362SS316
	100	---	THN3363SS316
	200	---	THN3364SS316

Spec-Setter™ safety switches

Double throw



Ordering code for non-fusible double throw safety switches

		240V	600V
	Amps	3-pole/3-wire	3-pole/3-wire
NEMA 1	30	TC35321	---
	60	TC35322	TC35362
	100	TC35323	TC35363
	200	TC35324	TC35364
	400	TDN3325A1	TDN3365A1
	600	TC35326	---
NEMA 3R	60	TC35322R	TC35362R
	100	TC35323R	TC35363R
	200	TC35324R	TC35364R
	400	TDN3325AR	TDN3365AR



Ordering code for emergency power transfer switches (non-fusible)

		120/240V	240V
	Amps	2-pole/3-wire	3-pole/4-wire
NEMA 3R	100	TC10323R	---
	200	TC10324R	TC10424R



Ordering code for interlocked receptacle switches

		Fusible	Non-fusible
	Amps	3-pole/3-wire	3-pole/3-wire
NEMA 1	60	TH3362JCH	THN3362JCH

Accessories

Ground neutral and line shield kits



TNIA64



THSHLD1

NEMA type 1 and 3R enclosures
30–600 amperes: TG and TH
800–1200 amperes: TC (single throw fusible only)

Ampere rating	Ground Kits	System Voltage (Vac)	Fusible/Non-Fusible	Ordering code Neutral kit
30	TGL1	240	Either	TNI21
60		600	Either Non-Fusible	TNI62 ¹
		600	Fusible	TNIJA62
100	TNG3	600	Non-Fusible	TNI63 ¹
200		600	Fusible	TNIA63
		600	Either	TNIJ64
400	TGL6	240 or 600	Either	TNI65
600			Either	TNI65A
			Either	TNI66
800	–		Fusible	TNI67
1200	–		Fusible	TNI68A

NEMA type 4/4X, 12 enclosures
Heavy duty switches
30–600 amperes: TH

Amperage Rating	Ground Kits	System Voltage (Vac)	Fusible/Non-Fusible	Ordering code Neutral kit
30	TGL1	240	Fusible	TNIJ61
30		600	Either	TNIJ61
60		600	Fusible	TNIJ62
60		600	Non-fusible	TNIA62
100	TNG3	240 or 600	Either	TNIJ63
200			Either	TNIJ64
400-600	TGL6		Either	TNIJ66

¹ Not suitable for type TG switches.

Line shield replacement and upgrade kits

Line shield kits for 2020 NEC 230.62 service entrance barriers. Clear plastic unless otherwise noted.

Amperage	HD 600 V replacement kit		HD 240 V upgrade kit		GD 240 V upgrade kit	
	Product number	Series A ⁴	Product number	Series A ⁴	Product number	Series A ⁴
30	THSHLD1	–	THSHLD0 ^{2,3}	–	THSHLD0 ³	–
60	THSHLD3	–	THSHLD1	–	THSHLD1	–
100	THSHLD3 ¹	–	THSHLD3 ¹	–	THSHLD3	–
200	THSHLD4	–	THSHLD4	–	THSHLD4	–
400	THSHLD6	THSHLD5A	THSHLD6	THSHLD5A	–	THSHLD5A
600	THSHLD6	THSHLD6A	THSHLD6	THSHLD6A	–	THSHLD6A
800	THSHLD8	–	THSHLD8	–	–	–
1200	THSHLD8	–	THSHLD8	–	–	–

¹ Use THSHLD4 for 100 A NEMA 5/12 or NEMA 4X

² Replacement kit only

³ Fiberboard shield

⁴ Series A products (i.e., TH3365A1)

01 THSHLD1



01

Accessories

Fusing kits

- General duty: TG
- Heavy duty: TH



TGRK22 Class
R rejection kit

Class R fusing kit, field installable, general duty, type TG, UL listed

When specifications permit only Class R fuses to be used, these kits may be installed in the safety switch to deter fuses other than Class R from being installed.

- 30–60 A = Fuse clips
- 100–200 A = Rejection pins
- One kit required per two-pole or three-pole switch

Series prefix	Ampere rating	NEMA enclosure type	Ordering code
TG	30	1, 3R	TGRK12
	60	1, 3R	TGRK22
	100	1, 3R	TGRK42
	200	1, 3R	TGRK42

Class J fuse field conversion kit, heavy duty, type TH, UL listed

TH switches, 30–400 amperes, 600 volt and 100–400 amperes, 240 volt, may be adapted to accept Class J fuses without a kit by moving the load-block toward the switch base and remounting.

- One kit required per two-pole or three-pole switch

Series prefix	Ampere rating	System voltage (V AC)	Ordering code
TH	600	240 or 600	THJ6
TH	30–400	600	Move load-block
TH	100–400	240	Move load-block



TRK46A Class
R rejection kit

Class R fusing kit, field-installable, heavy duty, type TH, UL listed

When specifications permit only Class R fuses to be used, these kits may be installed in the safety switch to deter fuses other than Class R from being installed.

- 30–60 A = Fuse clips
- 100–600 A = Rejection pins
- One kit required per two-pole or three-pole switch

Series prefix	Ampere rating	System voltage (V AC)	NEMA enclosure type	Ordering code
TH	30	240	1, 3R, 4/4X, 12	TRK12B
	30	600	1, 3R	TRK16B
	30	600	4/4X, 12	TRK16SA
	60	240	1, 3R, 4/4X, 12	TRK22A
	60	600	1, 3R, 4/4X, 12	TRK26A
	100	240 600	1, 3R	TRK46A
	100	240 600	4/4X, 12	TPBRK36A
	200	240 600	1, 3R, 4/4X, 12	TRK46A
	400	240 600	1, 3R, 4/4X, 12	TRK56A ¹
	600	240 600	1, 3R, 4/4X, 12	TRK66A ¹

¹ Also suitable for general duty

Safety switches accessories

Auxiliary contact kits, replaceable handles and hubs



THAUX64D

Auxiliary contacts

Switch type	Ampere rating	# of poles	Contacts	Contact ratings	Ordering code
Heavy duty	30	2 3	DPDT	10 A, 125/250 V AC	THAUX21D
				0.30 A, 125V DC	
				0.15 A, 250 V DC	
	30	2 3	SPDT	15 Z, 600 V AC	THAUX61S
				0.50 A, 125 VDC	
				0.25 A, 250V DC	
	60	2 3	DPDT	15 A, 600 V AC	THAUX64D
	100			0.50 A, 125 V DC	
	200			0.25 A, 250V DC	
	400	2 3	DPDT	15 A, 600 V AC	THAUX66DA
	600			0.50 A, 125 V DC	
				0.25 A, 250 V DC	
	30	6	DPDT	15 A, 600 V AC	THAUX66D
	60			0.50 A, 125 V DC	
	100			0.25 A, 250 V DC	
	200	6	DPDT	15 A, 600 V AC	THAUX66D2
				0.50 A, 125 V DC	
				0.25 A, 250 V DC	



THRPLHDL3

Replacement Handles for HD Switches

Amps. Min	Amps Max.	Max Volts	Steel Type	Description	Ordering Code
30	30	240	Steel	Handle and Pouch	THRPLHDL1
30	30	600	Steel		THRPLHFL2
60	200	600	Steel		THRPLHDL3
30	200	600	Stainless		THRPLHDL4
400	600	600	Steel		THRPLHDL6
600	600	600	Stainless	Note: full block for Handle and Pouch	THRPLHDL7A

The handles above are what's stocked in Mount Juliet, for other handles, refer to [BuyLog](#)

Universal raintight aluminum hubs
For outdoor enclosures that have removable closing caps.



TC100

Nominal conduit diameter (in.)	Ordering code
¾	TC75
1	TC100
1¼	TC125
1½	TC150
2	TC200
2½	TC250

Closing cap for universal raintight aluminum hub

Ordering code
TCCP

Transformers | Low voltage dry type

Section 5

Transformers | Low voltage dry type

Table of contents

ReliaGear® XFMR dry type, vented

Type QL single phase, NEMA 2 enclosure	5-1
Type QL three phase, NEMA 2 enclosure	5-1

Dry type, encapsulated, enclosed

Type QMS single phase, NEMA 3R enclosure	5-2
Type QB single phase, NEMA 3R enclosure	5-3

Control power, encapsulated core & coil

Type IP single phase	5-4
----------------------	-----

Servicenter™ integrated transformer and distribution panels

Single phase, Indoor/ Outdoor 60 Hz, 115°C	5-6
--	-----

ReliaGear® XFMR Transformers

Dry type, vented



**QL, single phase, DOE2016 and NRCan, UL and CUL
NEMA 2 enclosure, Frequency 60 Hz**

Winding	kVA	Primary Voltage	Secondary Voltage	Temp Rise °C	Ordering Code
Aluminum	25	240x480	120/240	150	9T33A2671
Aluminum	37.5	240x480	120/240	150	9T33A2672
Aluminum	50	240x480	120/240	150	9T33A2673
Aluminum	75	240x480	120/240	150	9T33A2674

**QL, three phase, DOE2016, UL,
NEMA 2 enclosure, Frequency 60 Hz**

Winding	kVA	Primary Voltage	Secondary Voltage	Temp Rise °C	Noise Reduction	Electrostatic Shield	Ordering Code
Aluminum	15	480	208Y/120	150			9T10A1001
Aluminum	15	480	208Y/120	115			9T10A1001G31
Aluminum	30	480	208Y/120	150			9T10A1002
Aluminum	30	480	208Y/120	150	-3dB		9T10A1002G02
Aluminum	30	480	208Y/120	115			9T10A1002G31
Aluminum	45	480	208Y/120	150			9T10A1003
Aluminum	45	480	208Y/120	150	-3dB		9T10A1003G02
Aluminum	45	480	208Y/120	150		Yes	9T10A1003G03
Aluminum	45	480	208Y/120	115			9T10A1003G31
Aluminum	75	480	208Y/120	150			9T10A1004
Aluminum	75	480	208Y/120	150	-3dB		9T10A1004G02
Aluminum	75	480	208Y/120	150		Yes	9T10A1004G03
Aluminum	75	480	208Y/120	115			9T10A1004G31
Aluminum	112.5	480	208Y/120	150			9T10A1005
Aluminum	112.5	480	208Y/120	150		Yes	9T10A1005G03
Aluminum	112.5	480	208Y/120	115			9T10A1005G31
Aluminum	150	480	208Y/120	150			9T10A1006
Aluminum	150	480	208Y/120	150		Yes	9T10A1006G03
Aluminum	150	480	208Y/120	115			9T10A1006G31
Aluminum	225	480	208Y/120	150			9T10A1007
Aluminum	300	480	208Y/120	150			9T10A1008
Aluminum	300	480	208Y/120	150		Yes	9T10A1008G03
Aluminum	500	480	208Y/120	150			9T10A1009
Aluminum	30	480	240/120	150			9T10A1182
Aluminum	45	480	240/120	150			9T10A1183
Aluminum	75	480	240/120	150			9T10A1184
Aluminum	30	480	240	150			9T10A1192
Aluminum	75	480	240	150			9T10A1194
Aluminum	75	208	480Y/277	150			9T10A1344
Copper	15	480	208Y/120	150			9T10C1001
Copper	30	480	208Y/120	150			9T10C1002
Copper	30	480	208Y/120	150		Yes	9T10C1002G03
Copper	30	480	208Y/120	115			9T10C1002G31
Copper	45	480	208Y/120	150			9T10C1003
Copper	45	480	208Y/120	150		Yes	9T10C1003G03
Copper	45	480	208Y/120	115			9T10C1003G31

This table continued on next page

ReliaGear® XFMR Transformers

Dry type, vented

Winding	kVA	Primary Voltage	Secondary Voltage	Temp Rise °C	Noise Reduction	Electrostatic Shield	Ordering Code
Copper	75	480	208Y/120	150			9T10C1004
Copper	75	480	208Y/120	115			9T10C1004G31
Copper	112.5	480	208Y/120	150			9T10C1005
Copper	112.5	480	208Y/120	150		Yes	9T10C1005G03
Copper	112.5	480	208Y/120	115			9T10C1005G31
Copper	150	480	208Y/120	150			9T10C1006
Copper	225	480	208Y/120	150			9T10C1007
Copper	300	480	208Y/120	150			9T10C1008

Many accessories such as rain shields, lug kits and ground kits are also available.



General purpose encapsulated, Type QMS
Single phase, NEMA 3R enclosure

Winding	Primary Voltage	Secondary Voltage	kVA	Temp Rise °C	Frequency Hz	UL	CSA	CE	CUL	Ordering Code
Aluminum	240x480	120/240	5	115	60	Y	N	N	Y	9T21B1004G02
Aluminum	240x480	120/240	7.5	115	60	Y	N	N	Y	9T21B1005G02
Aluminum	240x480	120/240	10	115	60	Y	N	N	Y	9T21B1006G02
Aluminum	480	120/240	5	115	60	Y	N	N	Y	9T21B1013G02
Aluminum	240x480	120/240	15	115	60	Y	N	N	Y	9T21B9103
Aluminum	240x480	120/240	25	115	60	Y	N	N	Y	9T21B9104
Aluminum	480	120/240	15	115	60	Y	N	N	Y	9T21B9105

Transformers

Dry type, encapsulated, enclosed




General purpose encapsulated, Type QB
Single phase, NEMA 3R enclosure

Winding	Primary Voltage	Secondary Voltage	kVA	Temp Rise °C	Frequency Hz	UL	CSA	CE	CUL	Ordering Code
Copper	240x480	120/240	0.25	80	60	Y	N	N	Y	9T51B0007
Copper	240x480	120/240	0.5	100	60	Y	N	N	Y	9T51B0008
Copper	240x480	120/240	1	100	60	Y	N	N	Y	9T51B0010
Copper	240x480	120/240	1.5	100	60	Y	N	N	Y	9T51B0011
Copper	240x480	120/240	2	100	60	Y	N	N	Y	9T51B0012
Copper	240x480	120/240	3	100	60	Y	N	N	Y	9T51B0013
Copper	120x240	12/24	0.05	55	60	Y	N	N	Y	9T51B0102
Copper	120x240	12/24	0.25	80	60	Y	N	N	Y	9T51B0107
Copper	120x240	12/24	0.5	100	60	Y	N	N	Y	9T51B0108
Copper	120x240	12/24	0.75	100	60	Y	N	N	Y	9T51B0109
Copper	120x240	12/24	1.5	115	60	Y	N	N	Y	9T51B0111
Copper	120x240	16/32	0.25	80	60	Y	N	N	Y	9T51B0127
Copper	120x240	16/32	0.5	100	60	Y	N	N	Y	9T51B0128
Copper	120x240	16/32	0.75	100	60	Y	N	N	Y	9T51B0129
Copper	120x240	16/32	1	100	60	Y	N	N	Y	9T51B0130
Copper	120x240	16/32	1.5	115	60	Y	N	N	Y	9T51B0131
Copper	120x240	16/32	2	115	60	Y	N	N	Y	9T51B0132
Copper	208	120/240	2	100	60	Y	N	N	Y	9T51B0156
Copper	208	120/240	3	100	60	Y	N	N	Y	9T51B0157
Copper	208	120/240	1	100	60	Y	N	N	Y	9T51B0160
Copper	277	120/240	0.25	80	60	Y	N	N	Y	9T51B0187
Copper	277	120/240	3	115	60	Y	N	N	Y	9T51B0193
Copper	240x480	24/48	0.75	100	60	Y	N	N	Y	9T51B0209
Copper	240x480	24/48	1	100	60	Y	N	N	Y	9T51B0210
Copper	208/240	120	3	115	60	Y	N	N	Y	9T51B1815

Transformers

Encapsulated core & coil



Control power, Type IP

Single phase, fully encapsulated

Winding	Primary Voltage	Secondary Voltage	kVA	Temp Rise °C	Frequency Hz	UL	CSA	CE	CUL	with fusing option	Ordering Code
Copper	230x460	115	0.05	55	60	Y	N	N	Y		9T58K0042
Copper	230x460	115	0.05	55	60	Y	N	N	Y	1/4" FCTB	9T58K0042G09
Copper	240x480	120	0.075	55	60	Y	N	N	Y		9T58K0043
Copper	230x460	115	0.1	55	60	Y	N	N	Y		9T58K0044
Copper	230x460	115	0.15	55	60	Y	N	N	Y		9T58K0045
Copper	230x460	115	0.2	80	60	Y	N	N	Y		9T58K0046
Copper	230x460	115	0.25	80	60	Y	N	N	Y		9T58K0047
Copper	230x460	115	0.25	80	60	Y	N	N	Y	1/4" FCTB	9T58K0047G09
Copper	230/460	115	0.25	80	60	Y	N	N	Y	1/4" FH	9T58K0047G24
Copper	230x460	115	0.3	80	60	Y	N	N	Y		9T58K0048
Copper	230x460	115	0.3	80	60	Y	N	N	Y	1/4" FH	9T58K0048G24
Copper	230x460	115	0.375	100	60	Y	N	N	Y		9T58K0049
Copper	230x460	115	0.5	80	60	Y	N	N	Y		9T58K0050
Copper	230x460	115	0.75	80	60	Y	N	N	Y		9T58K0051
Copper	230x460	115	1.5	100	60	Y	N	N	Y		9T58K0053
Copper	230x460	115	3	115	60	Y	N	N	Y		9T58K0055
Copper	230/460/575	115/95	0.05	55	50/60	Y	N	N	Y		9T58K0062
Copper	230/460/575	115/95	0.1	55	50/60	Y	N	N	Y		9T58K0064
Copper	230/460/575	115/95	0.15	80	50/60	Y	N	N	Y		9T58K0065
Copper	230/460/575	115/95	0.2	100	50/60	Y	N	N	Y		9T58K0066
Copper	230/460/575	115/95	0.5	115	50/60	Y	N	N	Y		9T58K0070
Copper	230/460/575	115/95	0.75	100	50/60	Y	N	N	Y		9T58K0071
Copper	230/460/575	115/95	1	100	50/60	Y	N	N	Y		9T58K0072
Copper	208/277/380	115/95	0.1	55	50/60	Y	N	N	Y		9T58K0084
Copper	208/277/380	115/95	0.2	100	50/60	Y	N	N	Y		9T58K0086
Copper	208/277/380	115/95	0.25	100	50/60	Y	N	N	Y		9T58K0087
Copper	480	120	0.06	55	60	Y	N	N	Y	2 CC, 1HK	9T58K0501G30
Copper	240x480	120/240	0.05	55	60	Y	N	N	Y		9T58K2802
Copper	240x480	120/240	0.075	55	60	Y	N	N	Y		9T58K2803
Copper	240x480	120/240	0.1	55	60	Y	N	N	Y		9T58K2804
Copper	240x480	120/240	0.25	80	60	Y	N	N	Y		9T58K2807
Copper	240x480	120/240	0.3	100	60	Y	N	N	Y		9T58K2808
Copper	240x480	120/240	0.5	100	60	Y	N	N	Y		9T58K2810
Copper	240x480	120/240	0.75	100	60	Y	N	N	Y		9T58K2811
Copper	240x480	120/240	1	100	60	Y	N	N	Y		9T58K2812
Copper	240x480	120/240	1.5	100	60	Y	N	N	Y		9T58K2813
Copper	240x480	120/240	2	100	60	Y	N	N	Y		9T58K2814
Copper	240x480	120/240	3	100	60	Y	N	N	Y		9T58K2815
Copper	600	120/240	0.1	55	60	Y	N	N	Y		9T58K2824
Copper	600	120/240	0.2	80	60	Y	N	N	Y		9T58K2826
Copper	600	120/240	0.5	80	60	Y	N	N	Y		9T58K2830
Copper	600	120/240	2	100	60	Y	N	N	Y		9T58K2834
Copper	120x240	12/24	0.05	55	60	Y	N	N	Y		9T58K2873
Copper	120x240	12/24	0.15	55	60	Y	N	N	Y		9T58K2876

This table continued on next page

Transformers

Encapsulated core & coil

Winding	Primary Voltage	Secondary Voltage	kVA	Temp Rise °C	Frequency Hz	UL	CSA	CE	CUL	with fusing option	Ordering Code
Copper	120x240	12/24	0.3	100	60	Y	N	N	Y		9T58K2879
Copper	120x240	120/240	0.5	80	60	Y	N	N	Y		9T58K2913
Copper	240x480	120/240	3	115	50/60	Y	N	N	Y		9T58K2935
Copper	380/400/416	115/230	0.5	115	50/60	Y	N	N	Y		9T58K2978
Copper	380/400/416	115/230	0.75	100	50/60	Y	N	N	Y		9T58K2979
Copper	380/400/416	115/230	3	115	50/60	Y	N	N	Y		9T58K2983
Copper	240x480	12/24	0.25	80	60	Y	N	N	Y		9T58K3024
Copper	240x480	12/24	0.15	55	60	Y	N	N	Y		9T58K4133
Copper	208/240/480	24	0.2	100	60	Y	N	N	Y		9T58K4183
Copper	600	120	0.05	55	60	Y	N	N	Y	1/4" FCTB	9T58K4501G09
Copper	208	120	0.25	80	60	Y	N	N	Y	1/4" FCTB	9T58K4511G09

Transformers

Servicenter™ mini-unit substations



Integrated transformer and distribution center
Single phase, Indoor/Outdoor 60 Hz, 115 °C Winding Temperature

Input voltage	Output voltage	kVA	Max Branch spaces 1" THQL, 1-pole	Max Branch spaces 1" THQL, 2-pole	Total 1 Pole spaces	Breaker Rating Primary	Breaker Rating Secondary	Ordering Code
480 Volts Delta	120/240 Volts	5	6	3	12	25A	30A	9T21S1050
		7.5	6	3	12	35A	40A	9T21S1070
		10	8	4	16	50A	50A	9T21S1100
		15	12	6	24	60A	70A	9T21S1150
		25	20	10	24	100A	150A	9T21S1250

Molded case and miniature circuit breakers

Section 6

Molded case and miniature circuit breakers

Table of contents

UL1077 miniature circuit breakers

Ordering code construction	6-1
ST200M	6-4
S200MUC	6-8
Accessories	6-14

UL489

Ordering code construction	6-1
SU200M	6-9
SU200ML	6-12
S800U	6-13
Accessories	6-14

Q-Line bolt-on miniature circuit breakers

Ordering code construction	6-16
240V class	6-17
Cable-in Cable-out (lug lug), 240V class	6-20
DIN-Rail mount, 240V class	6-21

SACE® Tmax® XT molded case circuit breakers

Main characteristics	6-22
Ordering code construction - XT1 through XT7 2-1	6-23
Lugs PN Scheme	6-24
XT1 base breakers	6-25
XT2 base breakers	6-27
XT3 base breakers	6-28
XT4 base breakers	6-29
XT5 and XT6 base breakers	6-30
XT7 base breakers	6-31
Accessories - Terminal kits, insulating kits and phase barriers	6-32
Accessories - Electrical	6-35
Accessories - Manual operators	6-38
Accessories - Handles	6-39
Accessories - Retrofit kits for Spectra bolt-on panelboard and switchboard	6-40

TEY molded case circuit breakers

Ordering code construction	6-42
Breakers	6-43
Accessories	6-45

Enclosed circuit breakers

Enclosures	6-41
Breakers	6-41
Ground kits	6-41

Ground fault protective devices

Residual current circuit breaker	6-46
----------------------------------	------


Fuse holders

6-47

Miniature circuit breakers

Ordering code construction – UL489


Ordering code construction

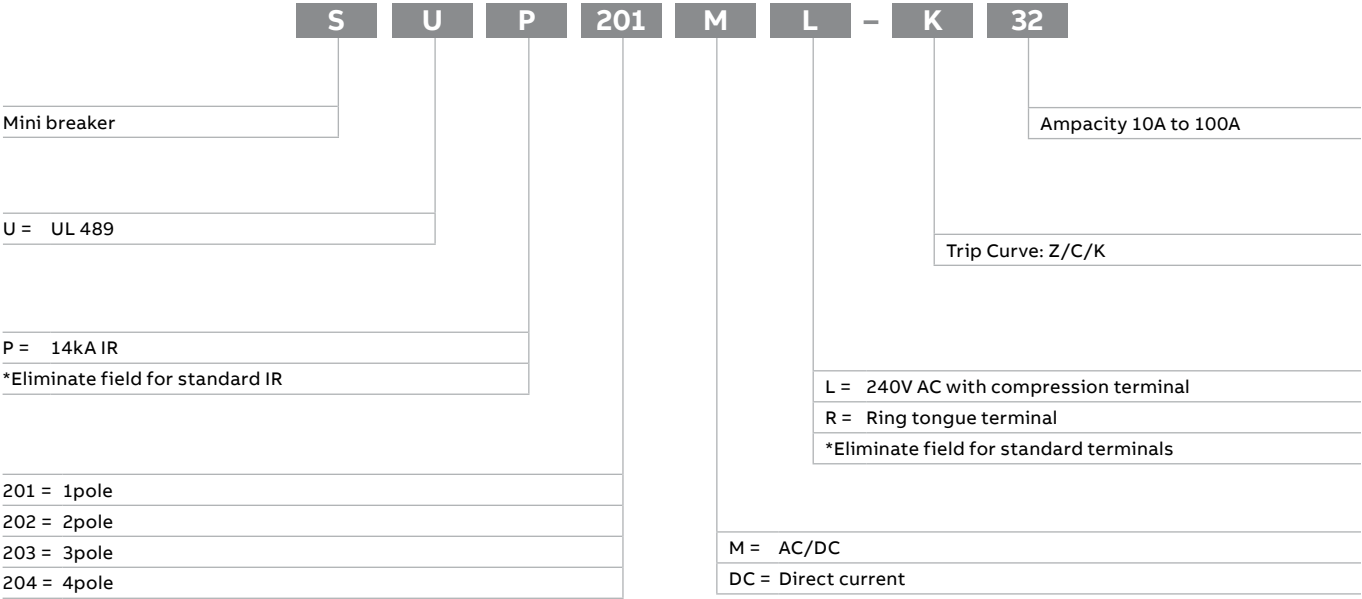

Miniature circuit breakers

Ordering code construction – UL 489 HPMCB

Ordering code construction

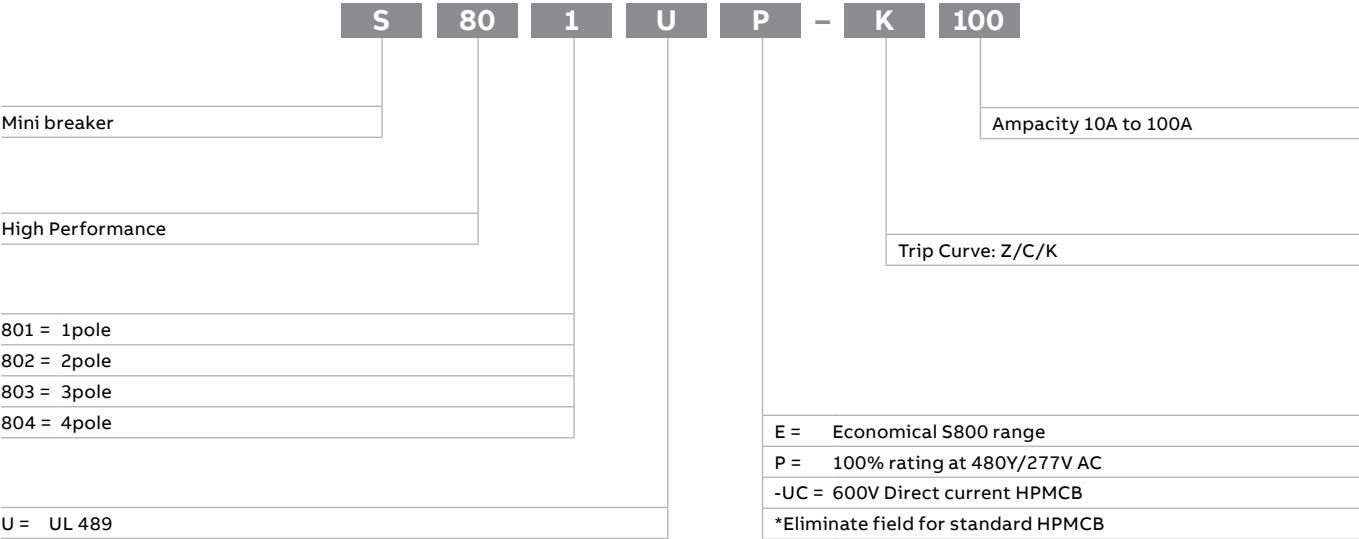


Reference only. For stocked items, see following pages.

Miniature circuit breakers

Ordering code construction – UL1077

Ordering code construction

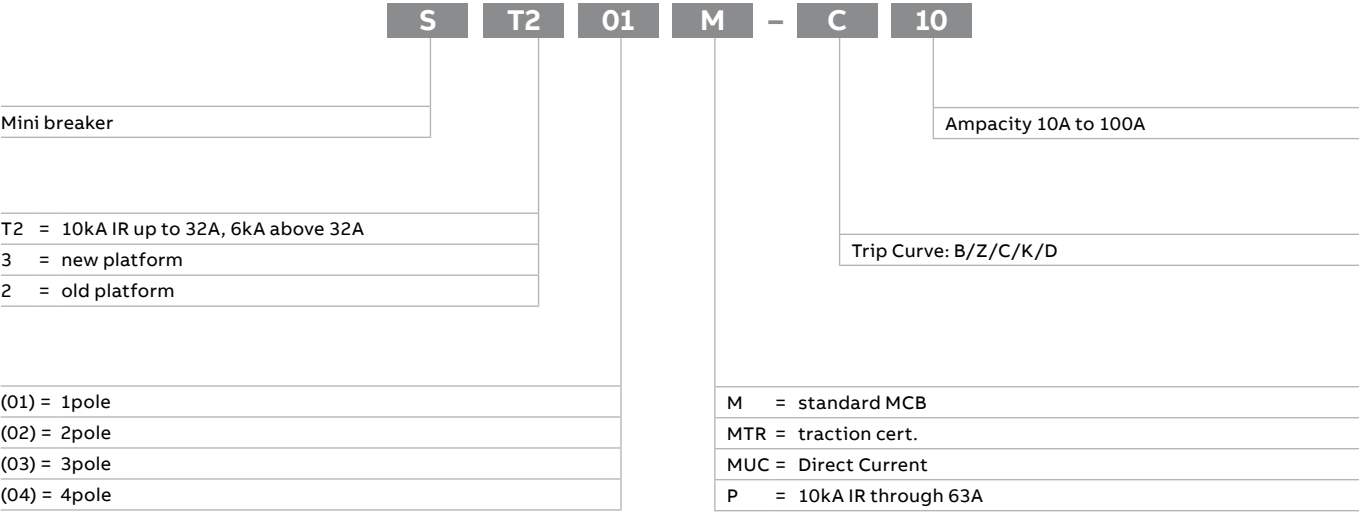

Miniature circuit breakers

ST200M UL 1077 MCB



Trip Curve	Poles	Ampacity	Ordering Code
B	1	2	ST201M-B2
		5	ST201M-B5
		6	ST201M-B6
		10	ST201M-B10
		13	ST201M-13
		15	ST201M-B15
		16	ST201M-B16
		20	ST201M-B20
		25	ST201M-B25
		32	ST201M-B32
	2	40	ST201M-B40
		50	ST201M-B50
		6	ST202M-B6
		10	ST202M-B10
		16	ST202M-B16
		20	ST202M-B20
		25	ST202M-B25
		32	ST202M-B32
		63	ST202M-B63
	3	16	ST203M-B16
		20	ST203M-B20
		25	ST203M-B25
		32	ST203M-B32
		40	ST203M-B40
		50	ST203M-B50
C	1	63	ST203M-B63
		0.5	ST201M-C0.5
		1	ST201M-C1
		2	ST201M-C2
		3	ST201M-C3
		4	ST201M-C4
		5	ST201M-C5
		6	ST201M-C6
		8	ST201M-C8
		10	ST201M-C10
		13	ST201M-C13
		15	ST201M-C15
		16	ST201M-C16
		20	ST201M-C20
		25	ST201M-C25
		30	ST201M-C30
		32	ST201M-C32
		40	ST201M-C40
		63	ST201M-C63

Table continues on next page.

Miniature circuit breakers

ST200M circuit breakers



Trip Curve	Poles	Ampacity	Ordering Code
	2	1	ST202M-C1
		2	ST202M-C2
		3	ST202M-C3
		4	ST202M-C4
		5	ST202M-C5
		6	ST202M-C6
		8	ST202M-C8
		10	ST202M-C10
		13	ST202M-C13
		15	ST202M-C15
		16	ST202M-C16
		20	ST202M-C20
		25	ST202M-C25
		30	ST202M-C32
		32	ST202M-C32
		40	ST202M-C40
	3	50	ST202M-C50
		63	ST202M-C63
		1	ST203M-C1
		2	ST203M-C2
		3	ST203M-C3
		4	ST203M-C4
		6	ST203M-C6
		10	ST203M-C10
		16	ST203M-C16
		20	ST203M-C20
	D	25	ST203M-C25
		30	ST203M-C30
		32	ST203M-C32
		40	ST203M-C40
		50	ST203M-C50
		63	ST203M-C63
		0.5	ST201M-D0.5
		1	ST201M-D1
		1.6	ST201M-D1.6
		2	ST201M-D2
		3	ST201M-D3
		4	ST201M-D4
		5	ST201M-D5
		6	ST201M-D6
		8	ST201M-D8
		10	ST201M-D10
		13	ST201M-D13
		16	ST201M-D16
		20	ST201M-D20
		50	ST201M-D50
		63	ST201M-D63

Table continues on next page.

Miniature circuit breakers

ST200M circuit breakers



Trip Curve	Poles	Ampacity	Ordering Code
	2	1	ST202M-D1
		2	ST202M-D2
		3	ST202M-D3
		4	ST202M-D4
		6	ST202M-D6
		8	ST202M-D8
		10	ST202M-D10
		16	ST202M-D16
		20	ST202M-D20
		32	ST202M-D32
		50	ST202M-D50
	3	1	ST203M-D1
		3	ST203M-D3
		8	ST203M-D8
		10	ST203M-D10
		13	ST203M-D13
		15	ST203M-D15
		16	ST203M-D16
		20	ST203M-D20
		25	ST203M-D25
		32	ST203M-D32
		40	ST203M-D40
		50	ST203M-D50
		63	ST203M-D63
K	1	0.5	ST201M-K0.5
		1	ST201M-K1
		1.6	ST201M-K1.6
		2	ST201M-K2
		3	ST201M-K3
		4	ST201M-K4
		5	ST201M-K5
		6	ST201M-K6
		8	ST201M-K8
		10	ST201M-K10
		13	ST201M-K13
		15	ST201M-K15
		16	ST201M-K16
		20	ST201M-K20
		25	ST201M-K25
		30	ST201M-K30
		32	ST201M-K32
		40	ST201M-K40
		50	ST201M-K50
		63	ST201M-K63

Table continues on next page.

Miniature circuit breakers

ST200M circuit breakers



Trip Curve	Poles	Ampacity	Ordering Code
	2	0.5	ST202M-K0.5
		1	ST202M-K1
		1.6	ST202M-K1.6
		2	ST202M-K2
		3	ST202M-K3
		4	ST202M-K4
		5	ST202M-K5
		6	ST202M-K6
		8	ST202M-K8
		10	ST202M-K10
		13	ST202M-K13
		15	ST202M-K15
		16	ST202M-K16
		20	ST202M-K20
		25	ST202M-K25
		30	ST202M-K30
		32	ST202M-K32
		40	ST202M-K40
		50	ST202M-K50
		63	ST202M-K63
	3	1	ST203M-K1
		1.6	ST203M-K1.6
		2	ST203M-K2
		3	ST203M-K3
		4	ST203M-K4
		5	ST203M-K5
		6	ST203M-K6
		8	ST203M-K8
		10	ST203M-K10
		13	ST203M-K13
		15	ST203M-K15
		16	ST203M-K16
		20	ST203M-K20
		25	ST203M-K25
		30	ST203M-K30
		32	ST203M-K32
		40	ST203M-K40
		50	ST203M-K50
		60	ST203M-K60
		63	ST203M-K63

Miniature circuit breakers

S200MUC DC circuit breakers



Trip Curve	Poles	Ampacity	Ordering Code
C	2	6	S202MUC-C6
		32	S202MUC-C32
K	1	4	S201MUC-K4
		6	S201MUC-K6
		10	S201MUC-K10
		16	S201MUC-K16
		40	S201MUC-K40
	2	1	S202MUC-K1
		6	S202MUC-K6
		10	S202MUC-K10
		20	S202MUC-K20
		50	S202MUC-K50
		16	S202MUC-K16

Miniature circuit breakers

SU200M circuit breakers



Trip Curve	Poles	Ampacity	Ordering Code
C	1	0.5	SU201M-C0.5
		1	SU201M-C1
		2	SU201M-C2
		3	SU201M-C3
		4	SU201M-C4
		5	SU201M-C5
		6	SU201M-C6
		8	SU201M-C8
		10	SU201M-C10
		13	SU201M-C13
		15	SU201M-C15
		16	SU201M-C16
		20	SU201M-C20
		30	SU201M-C30
		32	SU201M-C32
	2	1	SU202M-C1
		2	SU202M-C2
		3	SU202M-C3
		4	SU202M-C4
		5	SU202M-C5
		6	SU202M-C6
		8	SU202M-C8
		10	SU202M-C10
		13	SU202M-C13
		15	SU202M-C15
		16	SU202M-C16
		20	SU202M-C20
		25	SU202M-C25
		30	SU202M-C30
	3	5	SU203M-C5
		6	SU203M-C6
		10	SU203M-C10
		15	SU203M-C15
		16	SU203M-C16
		20	SU203M-C20
		25	SU203M-C25
		35	SU203M-C35
		40	SU203M-C40
		50	SU203M-C50

Table continues on next page.

Miniature circuit breakers

SU200M circuit breakers



Trip Curve	Poles	Ampacity	Ordering Code
K	1	0.5	SU201M-K0.5
		1	SU201M-K1
		1.6	SU201M-K1.6
		2	SU201M-K2
		3	SU201M-K3
		4	SU201M-K4
		5	SU201M-K5
		6	SU201M-K6
		8	SU201M-K8
		10	SU201M-K10
		13	SU201M-K13
		15	SU201M-K15
		16	SU201M-K16
		20	SU201M-K20
		25	SU201M-K25
		30	SU201M-30
		32	SU201M-K32
		40	SU201M-K40
		60	SU201M-K60
	2	0.5	SU202M-K0.5
		1	SU202M-K1
		1.6	SU202M-K1.6
		2	SU202M-K2
		3	SU202M-K3
		4	SU202M-K4
		5	SU202M-K5
		6	SU202M-K6
		8	SU202M-K8
		10	SU202M-K10
		13	SU202M-K13
		15	SU202M-K15
		16	SU202M-K16
		20	SU202M-K20
		25	SU202M-K25
		30	SU202M-K30
		32	SU202M-C32
		35	SU202M-K35
		40	SU202M-K40
		50	SU202M-K50
		60	SU202M-K60
		63	SU202M-K63

Table continues on next page.

Miniature circuit breakers

SU200M circuit breakers



Trip Curve	Poles	Ampacity	Ordering Code
	3	0.5	SU203M-K0.5
		1	SU203M-K1
		1.6	SU203M-K1.6
		2	SU203M-K2
		3	SU203M-K3
		4	SU203M-K4
		5	SU203M-K5
		6	SU203M-K6
		8	SU203M-K8
		10	SU203M-K10
		13	SU203M-K13
		15	SU203M-K15
		16	SU203M-K16
		20	SU203M-K20
		25	SU203M-K25
		30	SU203M-K30
		32	SU203M-K32
		35	SU203M-K35
		40	SU203M-K40
		50	SU203M-K50
		60	SU203M-K60
		63	SU203M-K63
Z	1	1	SU201M-Z1
		2	SU201M-Z2
		3	SU201M-Z3
		5	SU201M-Z5
		6	SU201M-Z6
		8	SU201M-Z8
		10	SU201M-Z10
		15	SU201M-Z15
		20	SU201M-Z20
	2	20	SU202M-Z20
		30	SU202M-Z30
		50	SU202M-Z50
	3	25	ST203M-Z25

Miniature circuit breakers

SU200ML circuit breakers



Trip Curve	Poles	Ampacity	Ordering Code
C	1	20	SU201ML-C20
K	1	10	SU201ML-K10
		30	SU201ML-K30
		15	SU201ML-K15
		20	SU201ML-K20
		40	SU201ML-K40
		50	SU201ML-K50
C	2	20	SU202ML-C20
K	2	30	SU202ML-K30
		15	SU202ML-K15
		5	SU202ML-K5
		10	SU202ML-K10
		20	SU202ML-K20
		8	SU202ML-K8
		50	SU202ML-K50
		25	SU202ML-K25
	3	40	SU202ML-K40
		10	SU203ML-K10
		15	SU203ML-K15
		20	SU203ML-K20
		30	SU203ML-K30
		40	SU203ML-K40
		50	SU203ML-K50
		60	SU203ML-K60

Miniature circuit breakers

S800U circuit breakers



Trip Curve	Poles	Ampacity	Ordering Code
K	1	20	S801U-K20
		30	S801U-K30
	2	30	S802U-K30
		100	S802U-K100
	3	40	S803U-K40
		50	S803U-K50
		60	S803U-K60
		100	S803U-K100

S800UE

Trip Curve	Poles	Ampacity	Ordering Code
K	1	20	S801UE-K20
		30	S801UE-K30
	2	15	S802UE-K15
		20	S802UE-K20
		30	S802UE-K30
	3	20	S803UE-K20

Miniature circuit breakers

Accessories

UL 1077 Accessories for ST200M, S200MUC

Type	Ordering Code
Shunt trip, UL 1077, Type 1	S3C-A1
Shunt trip, UL 1077, Type 2	S3C-A2
Aux. contact, UL 1077, bottom-mount	S2C-H10
Aux. contact, UL 1077, side-mount left	S2C-H11L
Aux. contact, UL 1077, side-mount right	S2C-H6R
Auxiliary contact with contact configuration 1NO/1NC	S2C-H6-11R
Signal contact, UL 1077	S2C-S/H6R
MCB BUS TOOTH COVERS	SZ-BSK
Busbar End Cap	3CB PS-END 3 CB

UL Accessories for DIN rail MCB

Type	Ordering Code
Feeder terminal for cuttable UL 489 busbars	AST 35/58 BP-C
Feeder terminal for non-cuttable UL 489 busbars	AST35/15BP
Tooth cover for cuttable UL 489 busbars	BSK BP-C
Tooth cover for non-cuttable UL 489 busbars	BSK-BP
Busbar feeder terminal tooth, UL489	SZ-ESKBP
Cuttable busbar, UL 489, 1-phase, 57 pins	PS 1/57/25BP-C
Cuttable busbar, UL 489, 2-phase, 56 pins	PS 2/56/25BP-C
Cuttable busbar, UL 489, 3-phase, 57 pins	PS 3/57/25BP-C
Non-cuttable UL 489 busbar, 1-phase, 12 pins	PS1/12/16BP
Non-cuttable UL 489 busbar, 1-phase, 18 pins	PS1/18/16BP
Non-cuttable UL 489 busbar, 1-phase, 6 pins	PS1/6/16BP
Non-cuttable UL 489 busbar, 2-phase, 12 pins	PS2/12/16BP
Non-cuttable UL 489 busbar, 2-phase, 18 pins	PS2/18/16BP
Non-cuttable UL 489 busbar, 2-phase, 6 pins	PS2/6/16BP
Non-cuttable UL 489 busbar, 3-phase, 12 pins	PS3/12/16BP
Non-cuttable UL 489 busbar, 3-phase, 18 pins	PS3/18/16BP
Non-cuttable UL 489 busbar, 3-phase, 6 pins	PS3/6/16BP
End cap bus cut RTT BCPD	PS-END 3 BP-C
End Cap	PS-END
MCB BUS 1PH END CAP	PS-END0
Bus UL508 Suppl Prot 1ph 25sqmm	PS1/57/25CB
Bus UL508 Suppl Prot 3ph 25sqmm	PS3/57/25CB
MCB BUS CUT RTT 3-PHASE BCPD	PS3/57/25BP-CR
FALSE POLE	FP1
Shunt trip, UL 489, Type 1	S2C-A1U
Shunt trip, UL 489, Type 2	S2C-A2U
Aux. contact, UL 489	S2C-H6RU
Signal contact, UL 489	S2C-S6RU
Ring tongue terminal connection kit for S800	S800-RT2125
Shunt trip for S800	S800-SOR24
Auxiliary contact for S800	S800-AUX

Miniature circuit breakers



Accessories

Common accessories for UL 489 and UL 1077 MCBs

Type	Ordering Code
Rotary handle mechanism for MCBs	S2C-DH
Side mount locking device	S2C-LOTO-L
Locking device	SA1
Locking device	SA2

Q-Line miniature circuit breakers


Ordering code construction

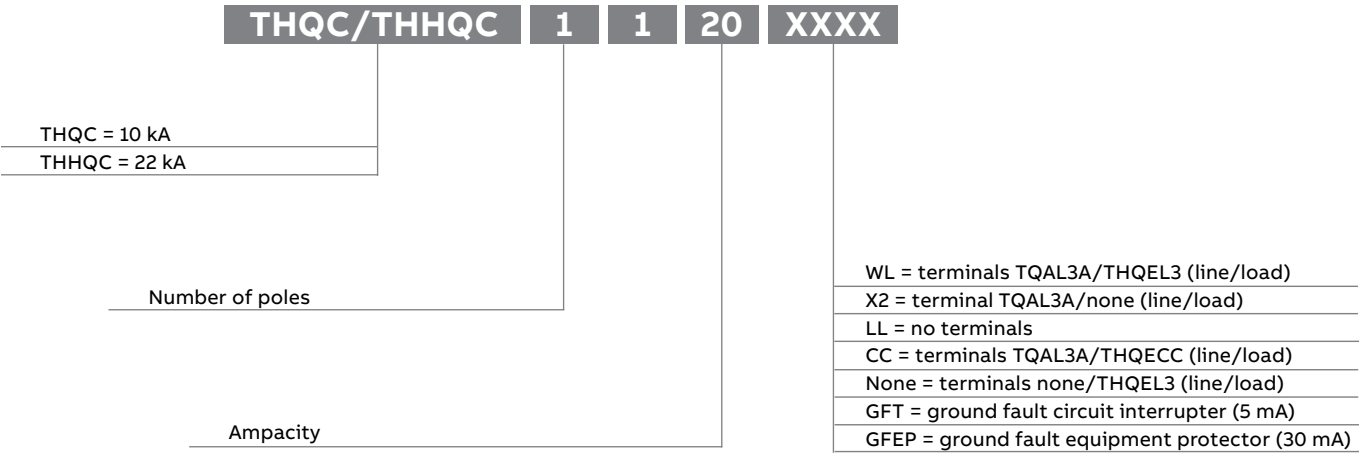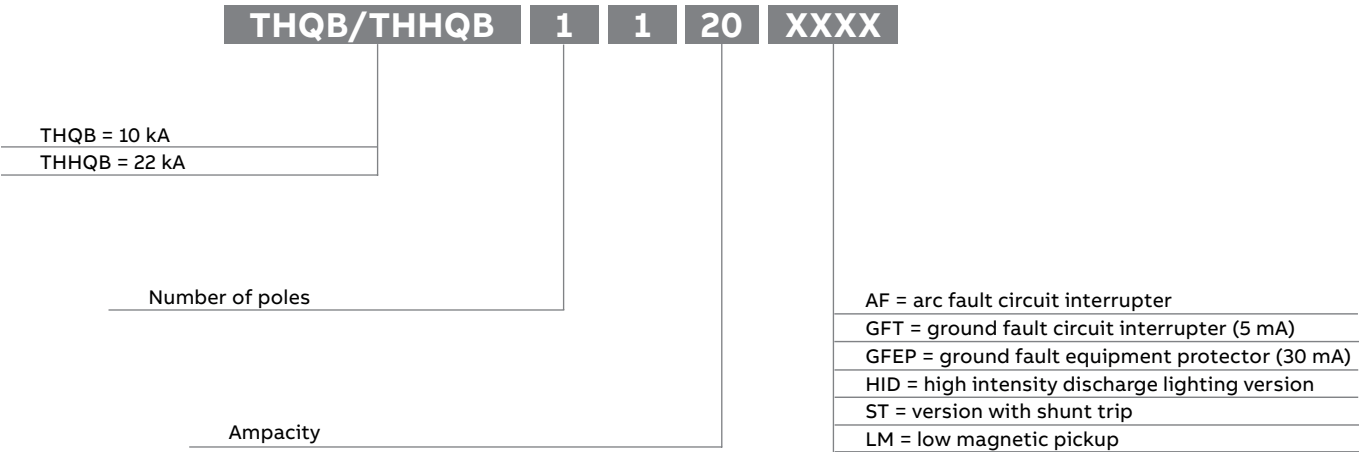

Reference only. For stocked items, see following pages.

Q-Line miniature circuit breakers

240V class



THQB2115

THQB 120/240 Vac

# of Poles	Ampere Rating	Wire Range ¹	120/240 Vac Interrupting Rating	Ordering Code
1	15	14-8 Cu/12-8 Al	10kA	THQB1115 ²
1	20	14-8 Cu/12-8 Al	10kA	THQB1120 ²
1	25	14-8 Cu/12-8 Al	10kA	THQB1125
1	30	14-8 Cu/12-8 Al	10kA	THQB1130
1	35	8-3 Cu/8-3 Al	10kA	THQB1135
1	40	8-3 Cu/8-3 Al	10kA	THQB1140
1	50	8-3 Cu/8-3 Al	10kA	THQB1150
1	60	8-3 Cu/8-3 Al	10kA	THQB1160

THQB 120/240 Vac, Internal Common Trip

# of Poles	Ampere Rating	Wire Range ¹	120/240 Vac Interrupting Rating	Ordering Code
2	15	14-8 Cu/12-8 Al	10kA	THQB2115
2	20	14-8 Cu/12-8 Al	10kA	THQB2120
2	25	14-8 Cu/12-8 Al	10kA	THQB2125
2	30	14-8 Cu/12-8 Al	10kA	THQB2130
2	35	8-3 Cu/8-3 Al	10kA	THQB2135
2	40	8-3 Cu/8-3 Al	10kA	THQB2140
2	45	8-3 Cu/8-3 Al	10kA	THQB2145
2	50	8-3 Cu/8-3 Al	10kA	THQB2150
2	60	8-3 Cu/8-3 Al	10kA	THQB2160
2	70	6-1/0 Cu/4-1/0 Al	10kA	THQB2170
2	80	6-1/0 Cu/4-1/0 Al	10kA	THQB2180
2	90	6-1/0 Cu/4-1/0 Al	10kA	THQB2190
2	100	6-1/0 Cu/4-1/0 Al	10kA	THQB21100

THQB 240 Vac, Internal Common Trip

# of Poles	Ampere Rating	Wire Range ¹	240 Vac Interrupting Rating	Ordering Code
2	15	14-8 Cu/12-8 Al	10kA	THQB22015
2	20	14-8 Cu/12-8 Al	10kA	THQB22020
2	30	14-8 Cu/12-8 Al	10kA	THQB22030
3	15	14-8 Cu/12-8 Al	10kA	THQB32015
3	20	14-8 Cu/12-8 Al	10kA	THQB32020
3	25	14-8 Cu/12-8 Al	10kA	THQB32025
3	30	14-8 Cu/12-8 Al	10kA	THQB32030
3	35	8-3 Cu/8-3 Al	10kA	THQB32035
3	40	8-3 Cu/8-3 Al	10kA	THQB32040
3	45	8-3 Cu/8-3 Al	10kA	THQB32045
3	50	8-3 Cu/8-3 Al	10kA	THQB32050
3	60	8-3 Cu/8-3 Al	10kA	THQB32060
3	70	6-1/0 Cu/4-1/0 Al	10kA	THQB32070
3	80	6-1/0 Cu/4-1/0 Al	10kA	THQB32080
3	90	6-1/0 Cu/4-1/0 Al	10kA	THQB32090
3	100	6-1/0 Cu/4-1/0 Al	10kA	THQB32100



THQB1120AF2

THQB and THQB 120/240 Vac Arc Fault (Single pole)

# of Poles	Ampere Rating	Wire Range ¹	120/240 Vac Interrupting Rating	Ordering Code
1	20	14-10 Cu/14-10 Al	10kA	THQB1120AF2 ⁴

¹Solid or stranded for 14-10 AWG.

²UL listed as SWD (Switching Duty) rated. Suitable for switching 120 Vac fluorescent lighting loads.

³Not UL listed.

⁴Combination AFCI compliant with NEC 2008 and later.

UL listed HACR (heating, air conditioning and refrigeration).

Q-Line miniature circuit breakers

240V class



THQB2120GFT

THQB, THHQB 120/240 Vac, Ground Fault Circuit Interrupters, Self Testing, cULus

# of Poles	Ampere Rating	Wire Range ¹	120/240 Vac Interrupting Rating	Ordering Code
1	15	14-8Cu/12-8 Al	10kA	THQB1115GFT
1	20	14-8Cu/12-8 Al	10kA	THQB1120GFT
1	30	14-8Cu/12-8 Al	10kA	THQB1130GFT
2	15	14-8Cu/12-8 Al	10kA	THQB2115GFT
2	20	14-8Cu/12-8 Al	10kA	THQB2120GFT



THQB1115GFEP

THQB 120 Vac, Ground Fault Circuit Interrupters (30 ma); cULus

# of Poles	Ampere Rating	Wire Range ¹	120 Vac Interrupting Rating	Ordering Code
1	20	14-8 Cu/12-8 Al	10kA	THQB1120GFEP
1	30	14-8 Cu/12-8 Al	10kA	THQB1130GFEP



THQB2140GFEP

THQB 120/240 or 208Y/120 Vac, Ground Fault Circuit Interrupters (30 ma); cULus Internal Common Trip

# of Poles	Ampere Rating	Wire Range ¹	120 Vac Interrupting Rating	Ordering Code
2	20	14-8 Cu/12-8 Al	10kA	THQB2120GFEP
2	40	14-8 Cu/12-8 Al	10kA	THQB2140GFEP



THQB32020ST1

THQB, THHQB 120/240 Vac, High Intensity Discharge Lighting Loads²

# of Poles	Ampere Rating	Wire Range ¹	120/240 Vac Interrupting Rating	Ordering Code
1	20	14-8 Cu/12-8 Al	10kA	THQB1120HID ³
1	25	14-8 Cu/12-8 Al	10kA	THQB1125HID

THQB 120 Vac with Factory Installed 120 Vac Shunt Trip⁴

# of Poles	Ampere Rating	Wire Range ¹	120 Vac Interrupting Rating	Ordering Code
1	20	14-8 Cu/12-8 Al	10kA	THQB1120ST1

THQB 120 Vac, Internal Common Trip with Factory Installed 120 Vac Shunt Trip⁴

# of Poles	Ampere Rating	Wire Range ¹	120 Vac Interrupting Rating	Ordering Code
2	20	14-8 Cu/12-8 Al	10kA	THQB2120ST1
2	30	14-8 Cu/12-8 Al	10kA	THQB2130ST1
3	20	14-8 Cu/12-8 Al	10kA	THQB32020ST1
3	30	14-8 Cu/12-8 Al	10kA	THQB32030ST1
3	40	8-3 Cu/8-3 Al	10kA	THQB32040ST1
3	50	8-3 Cu/8-3 Al	10kA	THQB32050ST1
3	60	8-3 Cu/8-3 Al	10kA	THQB32060ST1
3	70	6-1/0 Cu/4-1/0 Al	10kA	THQB32070ST1
3	90	6-1/0 Cu/4-1/0 Al	10kA	THQB32090ST1
3	100	6-1/0 Cu/4-1/0 Al	10kA	THQB32100ST1

¹Solid or stranded for 14-10 AWG.


²UL listed as HID (high intensity discharge).

³UL listed as SWD (switching duty). Suitable for switching 120 Vac fluorescent lighting loads.

⁴20-60 ampere are UL listed as HACR (heating, air conditioning and refrigeration).

Q-Line miniature circuit breakers

240V class



THHQB2115

THQB 120 Vac with Switching Neutral Single Thermal Magnetic Pole; Single Nonautomatic Pole

# of Poles	Ampere Rating	Wire Range ¹	120 Vac Interrupting Rating	Ordering Code
2	20	14-8 Cu/12-8 Al	10kA	THQB21WY20

THHQB 120/240 Vac

# of Poles	Ampere Rating	Wire Range ¹	120/240 Vac Interrupting Rating	Ordering Code
1	15	14-8 Cu/12-8 Al	22kA	THHQB1115 ²
1	20	14-8 Cu/12-8 Al	22kA	THHQB1120 ²
1	25	14-8 Cu/12-8 Al	22kA	THHQB1125
1	30	14-8 Cu/12-8 Al	22kA	THHQB1130
1	40	8-3 Cu/8-3 Al	22kA	THHQB1140
1	50	8-3 Cu/8-3 Al	22kA	THHQB1150

THQB/THHQB 120/240 Vac, Low Magnetic Pickup

# of Poles	Ampere Rating	Wire Range ¹	120/240 Vac Interrupting Rating	Ordering Code
2	20	14-8 Cu/12-8 Al	10 kA	THQB2120LM

THHQB 120/240 Vac, Internal Common Trip

# of Poles	Ampere Rating	Wire Range ¹	120/240 Vac Interrupting Rating	Ordering Code
2	15	14-8 Cu/12-8 Al	22kA	THHQB2115
2	20	14-8 Cu/12-8 Al	22kA	THHQB2120
2	25	14-8 Cu/12-8 Al	22kA	THHQB2125
2	30	14-8 Cu/12-8 Al	22kA	THHQB2130
2	35	8-3 Cu/8-3 Al	22kA	THHQB2135
2	40	8-3 Cu/8-3 Al	22kA	THHQB2140
2	50	8-3 Cu/8-3 Al	22kA	THHQB2150
2	60	8-3 Cu/8-3 Al	22kA	THHQB2160
2	80	6-1/0 Cu/4-1/0 Al	22kA	THHQB2180
2	100	6-1/0 Cu/4-1/0 Al	22kA	THHQB21100

THHQB 120/240 Vac, Internal Common Trip

# of Poles	Ampere Rating	Wire Range ¹	240 Vac Interrupting Rating	Ordering Code
2	20	14-8 Cu/12-8 Al	22kA	THHQB22020
2	30	14-8 Cu/12-8 Al	22kA	THHQB22030
3	15	14-8 Cu/12-8 Al	22kA	THHQB32015
3	20	14-8 Cu/12-8 Al	22kA	THHQB32020
3	25	14-8 Cu/12-8 Al	22kA	THHQB32025
3	30	14-8 Cu/12-8 Al	22kA	THHQB32030
3	35	8-3 Cu/8-3 Al	22kA	THHQB32035
3	40	8-3 Cu/8-3 Al	22kA	THHQB32040
3	45	8-3 Cu/8-3 Al	22kA	THHQB32045
3	50	8-3 Cu/8-3 Al	22kA	THHQB32050
3	60	8-3 Cu/8-3 Al	22kA	THHQB32060
3	70	6-1/0 Cu/4-1/0 Al	22kA	THHQB32070
3	80	6-1/0 Cu/4-1/0 Al	22kA	THHQB32080
3	90	6-1/0 Cu/4-1/0 Al	22kA	THHQB32090
3	100	6-1/0 Cu/4-1/0 Al	22kA	THHQB32100

¹Solid or stranded for 14-10 AWG.

²UL listed as SWD (switching duty) rated. Suitable for switching 120 Vac fluorescent lighting loads.

UL listed HACR (heating, air conditioning and refrigeration).

Q-Line miniature circuit breakers

Cable-in Cable-out (lug lug), 240V class

THQC, THHQC 120/240 Vac

# of Poles	Ampere Rating	Wire Range ¹	120/240 Vac Interrupting Rating	Product Number ²	120/240 Vac Interrupting Rating	Ordering Code
1	15	14-8 Cu/12-8 Al	10kA	THQC1115WL ^{3,4}	22kA	THHQC1115WL ³
1	20	14-8 Cu/12-8 Al	10kA	THQC1120WL ^{3,4}	22kA	THHQC1120WL ³
1	30	14-8 Cu/12-8 Al	10kA	THQC1130WL ³	22kA	THHQC1130WL ³
1	40	8-3 Cu/8-3 Al	10kA	THQC1140WL ³	22kA	THHQC1140WL ³
1	50	8-3 Cu/8-3 Al	10kA	THQC1150WL ³	—	—
1	60	8-3 Cu/8-3 Al	10kA	THQC1160WL ³	—	—
1	70	6-1/0 Cu/4-1/0 Al	10kA	THQC1170WL	—	—

THQC, THHQC 120/240 Vac, Internal Common Trip

# of Poles	Ampere Rating	Wire Range ¹	120/240 Vac Interrupting Rating	Product Number ²	120/240 Vac Interrupting Rating	Ordering Code
2	15	14-8 Cu/12-8 Al	10kA	THQC2115WL ³	22kA	THHQC2115WL ³
2	20	14-8 Cu/12-8 Al	10kA	THQC2120WL ³	22kA	THHQC2120WL ³
2	25	14-8 Cu/12-8 Al	10kA	THQC2125WL ³	—	—
2	30	14-8 Cu/12-8 Al	10kA	THQC2130WL ³	—	—
2	35	8-3 Cu/8-3 Al	10kA	THQC2135WL ³	—	—
2	40	8-3 Cu/8-3 Al	10kA	THQC2140WL ³	—	—
2	50	8-3 Cu/8-3 Al	10kA	THQC2150WL ³	22kA	THHQC2150WL ³
2	60	8-3 Cu/8-3 Al	10kA	THQC2160WL ³	22kA	THHQC2160WL ³
2	70	6-1/0 Cu/4-1/0 Al	10kA	THQC2170WL	—	—
2	80	6-1/0 Cu/4-1/0 Al	10kA	THQC2180WL	—	—
2	90	6-1/0 Cu/4-1/0 Al	10kA	THQC2190WL	22kA	THHQC2190WL
2	100	6-1/0 Cu/4-1/0 Al	10kA	THQC21100WL	22kA	THHQC21100WL

THQC, THHQC 240 Vac, Internal Common Trip

# of Poles	Ampere Rating	Wire Range ¹	240 Vac Interrupting Rating	Product Number ²	240 Vac Interrupting Rating	Ordering Code
2	20	14-8 Cu/12-8 Al	10kA	THQC22020WL	22kA	THHQC22020WL
2	25	14-8 Cu/12-8 Al	10kA	THQC22025WL	—	—
2	30	14-8 Cu/12-8 Al	10kA	THQC22030WL	22kA	THHQC22030WL
2	40	8-3 Cu/8-3 Al	10kA	THQC22040WL	—	—
2	50	8-3 Cu/8-3 Al	—	—	22kA	THHQC22050WL
2	60	8-3 Cu/8-3 Al	—	—	22kA	THHQC22060WL
2	100	6-1/0 Cu/4-1/0 Al	10kA	THQC22100WL	22kA	THHQC22100WL
3	15	14-8 Cu/12-8 Al	10kA	THQC32015WL	22kA	THHQC32015WL
3	20	14-8 Cu/12-8 Al	10kA	THQC32020WL	22kA	THHQC32020WL
3	25	14-8 Cu/12-8 Al	10kA	THQC32025WL	22kA	THHQC32025WL
3	30	14-8 Cu/12-8 Al	10kA	THQC32030WL	22kA	THHQC32030WL
3	40	8-3 Cu/8-3 Al	10kA	THQC32040WL	22kA	THHQC32040WL
3	50	8-3 Cu/8-3 Al	10kA	THQC32050WL	22kA	THHQC32050WL
3	60	8-3 Cu/8-3 Al	10kA	THQC32060WL	22kA	THHQC32060WL
3	70	6-1/0 Cu/4-1/0 Al	10kA	THQC32070WL	22kA	THHQC32070WL
3	80	6-1/0 Cu/4-1/0 Al	10kA	THQC32080WL	—	—
3	90	6-1/0 Cu/4-1/0 Al	10kA	THQC32090WL	—	—
3	100	6-1/0 Cu/4-1/0 Al	10kA	THQC32100WL	22kA	THHQC32100WL

¹Solid or stranded for 14-10 AWG.

²Use additional suffix "BP" (THQC32020WLBP) for bulk pack of 48 poles. Carton weight 20 lbs. 15-60 ampere breakers only.

³Suitable for mounting on standard 35mm DIN Rail. Refer to table on page 6-38 for termination options.

⁴UL listed as SWD (switching duty) rated. Suitable for switching 120 Vac fluorescent lighting loads.

UL listed HACR (heating, air conditioning and refrigeration). Refer to Q-Line accessories listed on pages 6-40 and 6-41.

Q-Line miniature circuit breakers

Stocked DIN-Rail Mount, 240V class

Product Features

Multi-terminal Configuration Breakers

- 35 mm DIN rail mounting
- Optional front/rear panel mounting kits–THQCFMK, page 6-40.
- Optional load end terminal for up to (4) 0.25-inch quick connects.

Contact local ABB sales office for ring terminal configurations–not DIN rail compatible.

THQC, THHQC 120/240 Vac

# of Poles	Ampere Rating	120/240 Vac Interrupting Rating	Ordering code No Lugs	Ordering code Line TQAL3A and Load THQECC
1	15	10kA	THQC1115LL ¹	–
1	20	10kA	THQC1120LL ¹	–
1	60	10kA	THQC1160LL	–
1	20	22kA	THHQC1120LL	THHQC1120CC

15-60A UL Listed HACR (heating, air conditioning and refrigeration)

THQC, THHQC 120/240 Vac, Internal Common Trip

# of Poles	Ampere Rating	120/240 Vac Interrupting Rating	Ordering code No Lugs	Ordering code Line TQAL3A and Load THQECC
2	20	10kA	THQC2120LL ¹	–
2	25	10kA	THQC2125LL	–
2	30	10kA	THQC2130LL	–
2	35	10kA	–	THQC2135CC
2	40	10kA	THQC2140LL	–
2	45	10kA	–	THQC2145CC
2	50	10kA	–	THQC2150CC
2	15	22kA	THHQC2115LL	–
2	60	22kA	THHQC2160LL	–

15-60A UL Listed HACR (heating, air conditioning and refrigeration)

SACE® Tmax® XT MCCBs main characteristics

SACE Tmax XT range performance

		XT1	XT2	XT3	XT4	XT5	XT6	XT7
Frame size (A)		125	125	225	250	600	800	1200
Poles		3, 4	3, 4	3, 4	3, 4	3, 4	3, 4	3, 4
Interrupt rating (kA)	240 V AC	50, 65, 100	65, 100, 150, 200	50, 65	65, 100, 150, 200	65, 100, 150, 200	65, 100, 200	65, 100, 200
	480 V AC	25, 35, 65	25, 35, 65, 100, 150, 200	25, 35	25, 35, 65, 100, 150, 200	35, 50, 65, 100, 150, 200	35, 50, 65	50, 65, 100
	600 V AC	–	18, 22, 25, 35, 42	–	18, 22, 25, 50, 65, 100	18, 25, 35, 65, 100	20, 25, 35	25, 50, 65
Dimensions (in.)	3-poles breaker	3 x 2.75 x 5.12	3.54 x 3.25 x 5.12	4.13 x 2.75 x 5.90	4.13 x 3.25 x 6.3	5.51 x 4.07 x 8.07	8.27 x 4.07 x 10.55	8.27 x 6.57 x 10.55
(W x D x H)	Packaging	5.04 x 5.63 x 5.31	5.12 x 5.71 x 8.19	6.10 x 7.48 x 7.48	5.71 x 6.61 x 8.27	9.76 x 11.22 x 9.45	12.01 x 14.57 x 11.22	11.02 x 14.17 x 13.78
Trip units	TMF	✓	✓	✓	✓	–	–	–
	TMA	–	✓	–	✓	✓	✓	–
	Ekip DIP	–	✓	–	✓	✓	✓	✓
	Ekip	–	✓	–	✓	✓	–	✓
	Touch	–	–	–	–	–	–	–

SACE Tmax XT range trip units capabilities

	Thermomagnetic trip units		Electronic trip units	
				
Features	TMF	TMA	Ekip DIP (LS/I, LIG, LSI and LSIG)	Ekip Touch, Touch measuring and Hi-Touch (LSI and LSIG)
Overload (L) and Instantaneous (I) protection	✓	✓	✓	✓
Ground fault protection (G)	–	–	✓ (with LSIG)	✓ (with LSIG)
Selective short circuit protection (S)	–	–	✓ (with LS/I ¹ , LSI or LSIG)	✓
L protection adjustability (I1)	Fixed	0.7–1 x In*	0.4...1.0 x In Steps of 0.04 (LS/I) or 0.02 (LSI/LSIG)	0.4...1.0 x In Steps of 0.001 x In
S protection adjustability (I2) ²	–	–	Off, 1...10 x In Steps of 0.5 x In ³	Off, 0.6...10 x In Steps of 0.1 x In
I protection adjustability (I3) ²	Fixed	5–10 x In	1...10 x In Steps of 0.5 x In ³	1.5...10 x In (15 x In for XT7) Steps of 0.1 x In
G protection adjustability (I4) ²	–	–	Off, 0.2, 0.25, 0.45, 0.55, 0.75, 0.80 and 1 x In)	Off, 0.1...1 x In 0.001 x In
Communication	–	–	–	–
Cloud connectivity	–	–	–	–
Bluetooth ⁴ connectivity	–	–	–	✓
Current measurements	–	–	–	✓
Voltage, power and energy measurements	–	–	–	✓ (with Ekip Touch measuring)
Voltage, power and energy measurements and protections	–	–	–	✓ (with Ekip Hi-Touch)
Embedded functions	–	–	–	–
RELT (reduced energy let-through feature)	–	–	–	–
Event recorder, contact wear information and self-diagnosis	–	–	–	✓

Legend

– Not a possible feature

✓ Included

○ Optional

* In = Trip unit sensor

¹ Either S or I must be selected during commissioning


² Valid for Tmax XT1-6. For Tmax XT7, please refer to Tech Catalog

³ 4, 5, 6 and 9.5 x In not available

⁴ Bluetooth is a trademark of Bluetooth SIG, Inc.

SACE® Tmax® XT molded case circuit breakers

Ordering code construction

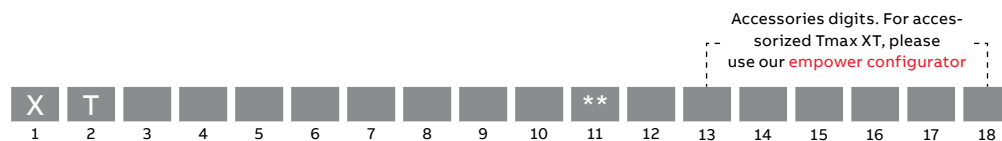

1 & 2 Version

Digit
X T

3 Frame

Digit
1 2 3 4 5 6 7

4 Interrupting ratings – 480 V AC

Digits	XT1	XT2	XT3	XT4	XT5	XT6	XT7
N	25	25	25	25	35	35	–
S	35	35	35	35	50	50	50
H	65	65	–	65	65	65	65
L	–	100	–	100	100	–	100
V	–	150	–	150	150	–	–
X	–	200	–	200	200	–	–

5 Standard UL and IEC

Digit
U UL 489 80% / IEC 60947-2
Q UL 489 100% / IEC 60947-2
B UL 80% with BABA (XT2/XT4/XT5/XT7 only)
T UL 100% with BABA (XT2/XT4/XT5/XT7 only)
C UL 80% + CCC
D UL 100% + CCC
E IEC only
S IEC 50 °C

6 Number of poles

Digit
3 3 Poles
4 4 Poles 100%
N 4 Poles 50% (IEC only)

7, 8, 9 Frame amps

XT1–4		XT5–7	
Digits	Amps	Digits	Amps
0 1 0	10	2 5 A	250 (XT5)
0 1 5	15	3 0 A	300 (XT5)
0 2 0	20	3 2 A	320 (XT5 IEC ¹)
0 2 5	25	4 0 A	400 (XT5)
0 3 0	30	5 0 B	500 (XT5)
0 3 5	35	6 0 B	600 (XT5)
0 4 0	40	6 0 0	600 (XT6)
0 4 5	45	6 0 C	600 (XT7)
0 5 0	50	6 3 B	630 (XT5 IEC ¹)
0 6 0	60	6 3 0	630 (XT6 IEC ¹)
0 7 0	70	8 0 0	800 (XT6)
0 8 0	80	8 0 C	800 (XT7)
0 9 0	90	1 K 0	1000 (XT6 IEC ¹)
1 0 0	100	1 0 D	1000 (XT7)
1 1 0	110	1 2 E	1200/1250 (XT7)
1 2 5	125	1 6 F	1600 (XT7 IEC ¹)
1 5 0	150		
1 7 5	175		
2 0 0	200		
2 2 5	225		
2 5 0	250		

10 Trip unit

Power distribution		
Digit	Protection	Trip Unit
A	TMF	Thermal-magnetic
B	TMA	Thermal-magnetic adjustable
E	LS/I*	Ekip DIP
C	LIG	Ekip DIP
1	LSI	Ekip DIP (XT2 & XT4)
F	LSI	Ekip DIP (XT5, XT6 & XT7)
P	LSI	Ekip Touch
R	LSI	Ekip Touch Measuring
T	LSI	Ekip Hi-Touch
2	LSIG	Ekip DIP (XT2 & XT4)
G	LSIG	Ekip DIP (XT5, XT6 & XT7)
Q	LSIG	Ekip Touch
S	LSIG	Ekip Touch Measuring
U	LSIG	Ekip Hi-Touch

Generator protection

Digit	Protection	Trip Unit
X	LS/I*	Ekip G DIP
Y	LSIG	Ekip G Touch
Z	LSIG	Ekip G Hi-Touch

Motor protection

Digit	Protection	Trip Unit
M	MA (MCP)	Magnetic Adjustable
J	I (MCP) XT2/4	Ekip M DIP
K	I (MCP)	Ekip M DIP
K	I (MCP) XT5/6/7	Ekip M DIP
W	LRIU (MPCB)	Ekip M Touch

Molded Case Switch

Digit	Protection	Trip Unit
D	MCS	–



** Must be "Y" for ReliaGear neXT breakers, used in ReliaGear neXT power panelboards and ReliaGear SB switchboards.

⁽¹⁾ IEC only.

This ordering code structure is meant for field identification of a SACE Tmax XT.

Reference only. For stocked items, see following pages.

* Selectable either S or I only (use for LI)

Lugs PN Scheme (positions 11-12)

Installed Lug	Digits 11 (Top of the breaker) and 12 (Bottom of the breaker)						
	XT1	XT2	XT3	XT4	XT5	XT6	XT7
F Front terminals, no lugs installed	F	F	F	F	F	F	F
FC Cu 1x 14-1/0 AWG	A	A	G	G			
FC CuAl 1x 14-1/0 AWG (MCP)	B						
FC CuAl 1x 14-1/0 AWG AuxV		C	H	H			
FC CuAl 1x 10-2/0 AWG	D	D					
FC CuAl 1x 10-2/0 AWG AuxV	E	E					
FC CuAl 1x 4 AWG-300 kcmil			J	J			
FC CuAl 1x 4 AWG-300 kcmil AuxV			K	K			
FC CuAl 1x 3/0 AWG-350 (External)				L			
FC CuAl 1x 3/0 AWG-350 AuxV (External)				M			
FC CuAl 1x 3/0 AWG-350 Kcmil (Internal)				8			
FC CuAl 1x 3/0 AWG-350 Kcmil AuxV (Internal)				9			
FC CuAl 1x 4/0AWG-500kcmil					8		
FC CuAl 1x 6AWG-350kcmil					9		
FC CuAl 2x 2/0-500kcmil					N		
FC CuAl 1x 500kcmil AuxV					P		
FC CuAl 1x 350kcmil AuxV					Q		
FC CuAl 2x 500kcmil AuxV					R	R	
FC CuAl 1x 750 kcmil					B		
FC CuAl 1x 750 kcmil AuxV					C		
FC CuAl 2x 500-750 kcmil					S	S	
FC CuAl 2x 500-750 kcmil AuxV					O	O	
FC CuAl 2x 250-500kcmil						T	
FC CuAl 3x 2/0AWG-400kcmil						U	
FC CuAl 3x 400kcmil AuxV						V	
FC CuAl 4x 4/0 AWG - 500kcmil							W
FC CuAl 4x 4/0 AWG - 500kcmil AuxV							5
FC CuAl 3x 500-750kcmil							X
VR - Rear vertical terminals							I
MC Cu 6x 14-2 AWG (multi cable lug)	Z	Z	Z	Z	Z		
EF Extended front terminals	1	1	1	1	1	1	1
ES Extended spread terminals	2	2	2	2	2	2	2
FB Terminals for flexible busbar	3	3	3	3			
R Rear terminals	4	4	4	4	4	4	4
Plug-in kit	6	6	6	6	6		
Withdrawable kit		7		7	7	7	7
ReliaGear® Tmax® XT Breaker**	Y*	Y*		Y*	Y*	Y*	Y*

*Note: Y represents the plug-in connector on the line side (top) of the MCCB. A ReliaGear® Tmax® XT Breaker will always include a load side (bottom) Lug (Digit 12).

** ReliaGear® Tmax® XT Breaker is an MCCB used as a Feeder or Horizontal Main in ABB ReliaGear® neXT Power Panelboard and SB Switchboard, and also compatible with ABB's OEM bus stack offering.

SACE® Tmax® XT molded case circuit breakers

XT1 base breakers



XT1 125A Fixed (F) - 3 poles - with Cu 1x14-1/0 AWG saddle terminals (A) - UL/CSA

		N	S	H
Interrupting rating @ 480v		25kA	35kA	65kA
In	I ₃	Ordering Code	Ordering Code	Ordering Code
Fixed thermal magnetic trip unit (TMF)				
15	500	XT1NU3015AAA000XXX	---	---
20	500	XT1NU3020AAA000XXX	---	---
25	500	XT1NU3025AAA000XXX	---	---
30	500	XT1NU3030AAA000XXX	---	---
30A (100% rated)	500	XT1NQ3030AAA000XXX	---	---
35	500	XT1NU3035AAA000XXX	---	---
40	500	XT1NU3040AAA000XXX	---	---
45	500	XT1NU3045AAA000XXX	---	---
50	500	XT1NU3050AAA000XXX	---	---
60	600	XT1NU3060AAA000XXX	XT1SU3060AAA000XXX	---
70	700	XT1NU3070AAA000XXX	---	---
80	800	XT1NU3080AAA000XXX	---	---
90	900	XT1NU3090AAA000XXX	---	---
100	1000	XT1NU3100AAA000XXX	---	---
100A (100% rated)	1000	XT1NQ3100AAA000XXX	---	---
110	1100	XT1NU3110AAA000XXX	---	---
125	1250	XT1NU3125AAA000XXX	---	---

Ordering code linked to product datasheet.

SACE® Tmax® XT molded case circuit breakers

XT1 base breakers



XT1 125A Fixed (F) - 3 poles - without lugs (see lugs on page 6-28) - UL/CSA

		N	S	H
Interrupting rating @ 480v		25kA	35kA	65kA
In	I ₃	Ordering Code	Ordering Code	Ordering Code
Fixed thermal magnetic trip unit (TMF)				
15	500	XT1NU3015AFF000XXX	XT1SU3015AFF000XXX	XT1HU3015AFF000XXX
20	500	XT1NU3020AFF000XXX	XT1SU3020AFF000XXX	XT1HU3020AFF000XXX
25	500	XT1NU3025AFF000XXX	XT1SU3025AFF000XXX	XT1HU3025AFF000XXX
30	500	XT1NU3030AFF000XXX	XT1SU3030AFF000XXX	XT1HU3030AFF000XXX
35	500	XT1NU3035AFF000XXX	XT1SU3035AFF000XXX	XT1HU3035AFF000XXX
40	500	XT1NU3040AFF000XXX	XT1SU3040AFF000XXX	XT1HU3040AFF000XXX
45	500	XT1NU3045AFF000XXX	---	XT1HU3045AFF000XXX
50	500	XT1NU3050AFF000XXX	XT1SU3050AFF000XXX	XT1HU3050AFF000XXX
60	600	XT1NU3060AFF000XXX	XT1SU3060AFF000XXX	XT1HU3060AFF000XXX
70	700	XT1NU3070AFF000XXX	XT1SU3070AFF000XXX	XT1HU3070AFF000XXX
70A (100% rated)	700	XT1NQ3070AFF000XXX	---	---
80	800	XT1NU3080AFF000XXX	XT1SU3080AFF000XXX	XT1HU3080AFF000XXX
90	900	XT1NU3090AFF000XXX	XT1SU3090AFF000XXX	XT1HU3090AFF000XXX
100	1000	XT1NU3100AFF000XXX	XT1SU3100AFF000XXX	XT1HU3100AFF000XXX
100A (100% rated)	1000	XT1NQ3100AFF000XXX	XT1SQ3100AFF000XXX	---
110	1100	XT1NU3110AFF000XXX	XT1SU3110AFF000XXX	XT1HU3110AFF000XXX
125	1250	XT1NU3125AFF000XXX	XT1SU3125AFF000XXX	XT1HU3125AFF000XXX
Magnetic trip unit (MCP)				
3	9-33	---	---	XT1HU3003MFF000XXX
7	21-77	---	---	XT1HU3007MFF000XXX
15	45-165	---	---	XT1HU3015MFF000XXX
30	90-330	---	---	XT1HU3030MFF000XXX
50	150-550	---	---	XT1HU3050MFF000XXX
70	210-770	---	---	XT1HU3070MFF000XXX
80	240-880	---	---	XT1HU3080MFF000XXX
100	300-1100	---	---	XT1HU3100MFF000XXX
125	375-1375	---	---	XT1HU3125MFF000XXX
Molded case switch (MCS)				
In	Mag. override			
125	1000	XT1NU3125DFF000XXX	XT1SU3125DFF000XXX	XT1HU3125DFF000XXX

SACE® Tmax® XT molded case circuit breakers

XT2 base breakers



XT2 125A - Fixed (F) - 3 poles - without lugs (see lugs on page 6-28) - UL/CSA

	N	S	H	L
Interrupting rating @ 480v	25kA	35kA	65kA	100kA
In	Ordering Code	Ordering Code	Ordering Code	Ordering Code
Thermal magnetic fixed (TMF)				
15	XT2NU3015AFF000XXX	XT2SU3015AFF000XXX	XT2HU3015AFF000XXX	XT2LU3015AFF000XXX
20	XT2NU3020AFF000XXX	XT2SU3020AFF000XXX	XT2HU3020AFF000XXX	XT2LU3020AFF000XXX
25	XT2NU3025AFF000XXX	XT2SU3025AFF000XXX	XT2HU3025AFF000XXX	---
30	XT2NU3030AFF000XXX	XT2SU3030AFF000XXX	XT2HU3030AFF000XXX	XT2LU3030AFF000XXX
35	XT2NU3035AFF000XXX	XT2SU3035AFF000XXX	XT2HU3035AFF000XXX	XT2LU3035AFF000XXX
40	XT2NU3040AFF000XXX	XT2SU3040AFF000XXX	XT2HU3040AFF000XXX	XT2LU3040AFF000XXX
50	XT2NU3050AFF000XXX	XT2SU3050AFF000XXX	XT2HU3050AFF000XXX	XT2LU3050AFF000XXX
60	XT2NU3060AFF000XXX	XT2SU3060AFF000XXX	XT2HU3060AFF000XXX	XT2LU3060AFF000XXX
70	XT2NU3070AFF000XXX	XT2SU3070AFF000XXX	XT2HU3070AFF000XXX	XT2LU3070AFF000XXX
Thermal magnetic adjustable (TMA)				
80	XT2NU3080BFF000XXX	XT2SU3080BFF000XXX	XT2HU3080BFF000XXX	XT2LU3080BFF000XXX
90	XT2NU3090BFF000XXX	XT2SU3090BFF000XXX	XT2HU3090BFF000XXX	XT2LU3090BFF000XXX
100	XT2NU3100BFF000XXX	XT2SU3100BFF000XXX	XT2HU3100BFF000XXX	XT2LU3100BFF000XXX
110	---	---	XT2HU3110BFF000XXX	XT2LU3110BFF000XXX
125	XT2NU3125BFF000XXX	XT2SU3125BFF000XXX	XT2HU3125BFF000XXX	XT2LU3125BFF000XXX
Magnetic trip unit (MCP)				
7	---	---	XT2HU3007MFF000XXX	---
15	---	---	XT2HU3015MFF000XXX	---
30	---	---	XT2HU3030MFF000XXX	---
50	---	---	XT2HU3050MFF000XXX	---
70	---	---	XT2HU3070MFF000XXX	---
80	---	---	XT2HU3080MFF000XXX	---
100	---	---	XT2HU3100MFF000XXX	---
125	---	---	XT2HU3125MFF000XXX	---
Ekip Dip LS/I trip unit				
60	XT2NU3060EFF000XXX	XT2SU3060EFF000XXX	XT2HU3060EFF000XXX	---
100	XT2NU3100EFF000XXX	XT2SU3100EFF000XXX	XT2HU3100EFF000XXX	XT2LU3100EFF000XXX
125	XT2NU3125EFF000XXX	XT2SU3125EFF000XXX	XT2HU3125EFF000XXX	---
125 (100% rated)	XT2NQ3125EFF000XXX	XT2SQ3125EFF000XXX	XT2HQ3125EFF000XXX	---
Ekip Dip LSIG trip unit				
25	XT2NU30252FF000XXX	XT2SU30252FF000XXX	---	---
60	---	---	XT2HU30602FF000XXX	---
100	XT2NU31002FF000XXX	XT2SU31002FF000XXX	XT2HU31002FF000XXX	---
125	XT2NU31252FF000XXX	XT2SU31252FF000XXX	XT2HU31252FF000XXX	---
Molded case switch (MCS)				
In				
125	---	---	XT2HU3125DFF000XXX	---

SACE® Tmax® XT molded case circuit breakers

XT3 base breakers



XT3 225A - Fixed (F) - 3 poles - without lugs (see lugs on page 6-28) - UL/CSA

		N	S
Interrupting rating @ 480v		25kA	35kA
In	I ₃	Ordering Code	Ordering Code
Fixed thermal magnetic trip unit (TMF)			
60	600	XT3NU3060AFF000XXX	---
80	800	XT3NU3080AFF000XXX	---
90	900	XT3NU3090AFF000XXX	---
100	1000	XT3NU3100AFF000XXX	XT3SU3100AFF000XXX
110	1100	XT3NU3110AFF000XXX	XT3SU3110AFF000XXX
125	1250	XT3NU3125AFF000XXX	XT3SU3125AFF000XXX
150	1500	XT3NU3150AFF000XXX	XT3SU3150AFF000XXX
175	1750	XT3NU3175AFF000XXX	XT3SU3175AFF000XXX
200	2000	XT3NU3200AFF000XXX	XT3SU3200AFF000XXX
200A (100% rated)	2000	XT3NQ3200AFF000XXX	---
225	2250	XT3NU3225AFF000XXX	XT3SU3225AFF000XXX
Magnetic trip unit (MCP)			
110	660-1320	---	XT3SU3110MFF000XXX
125	750-1500	---	XT3SU3125MFF000XXX
150	900-1800	---	XT3SU3150MFF000XXX
200	1200-2400	---	XT3SU3200MFF000XXX
Molded case switch (MCS)			
In			
225	2250	XT3NU3225DFF000XXX	XT3SU3225DFF000XXX

SACE® Tmax® XT molded case circuit breakers

XT4 base breakers



XT4 250A - Fixed (F) - 3 poles - without lugs (see lugs on page 6-28) - UL/CSA

		N	S	H	L
Interrupting rating @480v		25kA	35kA	65kA	100kA
In	I _n	Ordering Code	Ordering Code	Ordering Code	Ordering Code
Thermal magnetic fixed (TMF)					
150	1500	XT4NU3150AFF000XXX	XT4SU3150AFF000XXX	XT4HU3150AFF000XXX	XT4LU3150AFF000XXX
175	1750	XT4NU3175AFF000XXX	XT4SU3175AFF000XXX	XT4HU3175AFF000XXX	XT4LU3175AFF000XXX
200	2000	XT4NU3200AFF000XXX	XT4SU3200AFF000XXX	XT4HU3200AFF000XXX	XT4LU3200AFF000XXX
225	2250	XT4NU3225AFF000XXX	XT4SU3225AFF000XXX	XT4HU3225AFF000XXX	XT4LU3225AFF000XXX
250	2500	XT4NU3250AFF000XXX	XT4SU3250AFF000XXX	XT4HU3250AFF000XXX	XT4LU3250AFF000XXX
250A (100% rated)	2500	XT4NQ3250AFF000XXX	---	XT4HQ3250AFF000XXX	---
Thermal magnetic adjustable (TMA)					
150	750-1500	XT4NU3150BFF000XXX	XT4SU3150BFF000XXX	XT4HU3150BFF000XXX	---
175	875-1750	XT4NU3175BFF000XXX	XT4SU3175BFF000XXX	XT4HU3175BFF000XXX	XT4LU3175BFF000XXX
200	1000-2000	XT4NU3200BFF000XXX	XT4SU3200BFF000XXX	XT4HU3200BFF000XXX	XT4LU3200BFF000XXX
225	1125-2250	XT4NU3225BFF000XXX	XT4SU3225BFF000XXX	XT4HU3225BFF000XXX	XT4LU3225BFF000XXX
250	1250-2500	XT4NU3250BFF000XXX	XT4SU3250BFF000XXX	XT4HU3250BFF000XXX	XT4LU3250BFF000XXX
250	1250-2500	XT4NQ3250BFF000XXX	XT4SQ3250BFF000XXX	XT4HQ3250BFF000XXX	---
Magnetic trip unit (MCP)					
25	75-275	---	---	XT4HU3025MFF000XXX	---
50	150-550	---	---	XT4HU3050MFF000XXX	---
100	500-7000	---	---	XT4HU3100MFF000XXX	---
150	750-1500	---	---	XT4HU3150MFF000XXX	---
175	875-1750	---	---	XT4HU3175MFF000XXX	---
200	1000-2000	---	---	XT4HU3200MFF000XXX	---
250	1250-2500	---	---	XT4HU3250MFF000XXX	---
Ekip Dip LS/I trip unit					
150	---	XT4NU3150EFF000XXX	XT4SU3150EFF000XXX	XT4HU3150EFF000XXX	---
225	---	XT4NU3225EFF000XXX	XT4SU3225EFF000XXX	XT4HU3225EFF000XXX	---
250	---	XT4NU3250EFF000XXX	XT4SU3250EFF000XXX	XT4HU3250EFF000XXX	XT4LU3250EFF000XXX
250A (100% rated)	---	XT4NQ3250EFF000XXX	XT4SQ3250EFF000XXX	XT4HQ3250EFF000XXX	---
Ekip Dip LSIG trip unit					
150	---	XT4NU31502FF000XXX	---	XT4HU31502FF000XXX	---
225	---	XT4NU32252FF000XXX	---	XT4HU32252FF000XXX	---
250	---	XT4NU32502FF000XXX	XT4SU32502FF000XXX	XT4HU32502FF000XXX	---
Molded case switch (MCS)					
In	Mag. Override				
250	2500	XT4NU3250DFF000XXX	XT4SU3250DFF000XXX	XT4HU3250DFF000XXX	---

SACE® Tmax® XT molded case circuit breakers

XT5 and XT6 base breakers



XT5 400/600A - Fixed (F) - 3 poles without lugs (see lugs on page 6-29) - UL

	N	S	H	L
Interrupting rating @ 480Vac	35kA	50kA	65kA	100kA
In	Ordering Code	Ordering Code	Ordering Code	Ordering Code
Thermal magnetic adjustable (TMA)				
300	XT5NU330ABFF000XXX	XT5SU330ABFF000XXX	XT5HU330ABFF000XXX	---
400	XT5NU340ABFF000XXX	XT5SU340ABFF000XXX	XT5HU340ABFF000XXX	---
600	XT5NU360BBFF000XXX	XT5SU360BBFF000XXX	XT5HU360BBFF000XXX	---
400A (100% rated)	XT5NQ340ABFF000XXX	---	---	---
Ekip Dip LS/I trip unit				
300	XT5NU330AEFF000XXX	---	---	---
400	XT5NU340AEFF000XXX	---	XT5HU340AEFF000XXX	---
400A (100% rated)	XT5NQ340AEFF000XXX	XT5SQ340AEFF000XXX	XT5HQ340AEFF000XXX	---
600	XT5NU360BEFF000XXX	---	XT5HU360BEFF000XXX	---
Ekip Dip LSI trip unit				
400	---	XT5SU340AFF000XXX	XT5HU340AFF000XXX	---
600	---	---	XT5HU360BFFF000XXX	---
Molded case switch (MCS)				
400	---	---	XT5HU340ADFF000XXX	---
600	XT5NU360BFFF000XXX	XT5SU360BFFF000XXX	XT5HU360BDFF000XXX	---
Ekip I trip unit				
400	XT5NU340AKFF000XXX	---	---	XT5LU340AKFF000XXX
500	---	---	---	XT5LU350BKFF000XXX



XT6 800A - Fixed (F) - 3 poles without lugs (see lugs on page 6-29) - UL

	N	S	H
Interrupting rating @ 480Vac	35kA	50kA	65kA
In	Ordering Code	Ordering Code	Ordering Code
Thermal magnetic adjustable (TMA)			
600	XT6NU3600BFF000XXX	XT6SU3600BFF000XXX	XT6HU3600BFF000XXX
800A	XT6NU3800BFF000XXX	XT6SU3800BFF000XXX	XT6HU3800BFF000XXX
Ekip Dip LS/I trip unit			
600A (100% rated)	XT6NQ3600EFF000XXX	XT6SQ3600EFF000XXX	---
800	XT6NU3800EFF000XXX	XT6SU3800EFF000XXX	XT6HU3800EFF000XXX
800A (100% rated)	XT6NQ3800EFF000XXX	XT6SQ3800EFF000XXX	XT6HQ3800EFF000XXX
Ekip Dip LSI trip unit			
800	---	---	XT6HU3800GFF000XXX
800A (100% rated)	---	---	XT6HQ3800GFF000XXX
Molded case switch (MCS)			
800	---	---	XT6HU3800DFF000XXX

SACE® Tmax® XT molded case circuit breakers

XT7 base breakers



XT7 1200A - Fixed (F) - 3poles without lugs (see lugs on page 6-29) - UL


	S	H	L
Interrupting rating @ 480Vac	35kA	65kA	100KA
In	Ordering Code	Ordering Code	Ordering Code
Ekip Dip LS/I trip unit			
1000A (100% rated)	XT7SQ310DEFF000XXX	---	---
1200	XT7SU312EEFF000XXX	---	---
Ekip Dip LSI trip unit			
800	XT7SU380CFFF000XXX	XT7HU380CFFF000XXX	---
1000	XT7SU310DFFF000XXX	XT7HU310DFFF000XXX	---
1200	XT7SU312EFFF000XXX	XT7HU312EFFF000XXX	---
Ekip Dip LSIG trip unit			
1000	XT7SU310DGFF000XXX	XT7HU310DGFF000XXX	XT7LU310DGFF000XXX
Ekip M Dip I trip unit			
800	---	---	XT7LU380CKFF000XXX
Molded case switch (MCS)			
1200	---	XT7HU312EDFF000XXX	XT7LU312EDFF000XXX

SACE® Tmax® XT accessories

Terminal kits, insulating kits and phase barriers



extended front terminals



mechanical lug with
control tap



multi-cable lug

Terminal kits	Control Tap	Cable type	# cables and wire size	Wire size													Ordering Code
XT1				14	12	10	8	6	4	3	2	1	1/0	2/0	3/0	4/0	250 300 350
Front terminals (terminal nut insert only)																	KXT1F-3PC
Front terminals for MCP																	KXT1F3PCMCP
Extended front terminals																	KXT1EF-3PC
Mechanical lug		Cu/Al	1x 10 - 2/0 AWG														KXT1CUAL1-3PC
Mechanical lug	x	Cu/Al	1x 10 - 2/0 AWG														KXT1CUAL1C-3PC
Mechanical lug		Cu	1x 14 - 1/0 AWG														KXT1CU-3PC
Mechanical lug for MCP		Cu	1x 14 - 1/0 AWG														KXT1CUMCP-3PC
Multi-cable		Cu	6x 14 - 2 AWG														KXT1MC-3PC
XT2				14	12	10	8	6	4	3	2	1	1/0	2/0	3/0	4/0	250 300 350
Front terminals (terminal nut insert only)																	KXT2F-3PC
Mechanical lug		Cu	1x 14 - 1/0 AWG														KXT2CU-3PC
Mechanical lug		Cu/Al	1x 14 - 1/0 AWG														KXT2CUAL1-3PC
Mechanical lug		Cu/Al	1x 10 - 2/0 AWG														KXT2CUAL2-3PC
Mechanical lug	x	Cu/Al	1x 10 - 2/0 AWG														KXT2CUAL2C-3PC
Multi-cable		Cu	6x 14 - 2 AWG														KXT2MC-3PC
XT3				14	12	10	8	6	4	3	2	1	1/0	2/0	3/0	4/0	250 300 350
Front terminals (terminal nut insert only)																	KXT3F-3PC
Mechanical lug		Cu/Al	1x 14 - 1/0 AWG														KXT3CUAL1-3PC
Mechanical lug	x	Cu/Al	1x 14 - 1/0 AWG														KXT3CUAL1C-3PC
Mechanical lug	x	Cu/Al	1x 4 AWG - 300 kcmil														KXT3CUAL2C-3PC
Multi-cable		Cu	6x 12 - 2 AWG														KXT3MC-3PC
Rear adjustable																	KXT3ER-3PC
XT4				14	12	10	8	6	4	3	2	1	1/0	2/0	3/0	4/0	250 300 350
Front terminals (terminal nut insert only)																	KXT4F-3PC
Extended front terminals																	KXT4EF-3PC
Extended spread front terminals																	KXT4ES-3PC
Mechanical lug		Cu	1x 10 AWG - 250 kcmil														KXT4CU-3PC
Mechanical lug		Cu/Al	1x 14 - 1/0 AWG														KXT4CUAL1-3PC
Mechanical lug		Cu/Al	1x 4 AWG - 300 kcmil														KXT4CUAL2-3PC
Mechanical lug (extended)		Cu/Al	1x 3/0 AWG - 350 kcmil														KXT4CUAL3-3PC
Mechanical lug		Cu/Al	1x 3/0 AWG - 350 kcmil														KXT4CUAL4-3PC
Mechanical lug	x	Cu/Al	1x 14 - 1/0 AWG														KXT4CUAL1C-3PC
Mechanical lug	x	Cu/Al	1x 4 AWG - 300 kcmil														KXT4CUAL2C-3PC
Mechanical lug extended front	x	Cu/Al	1x 3/0 AWG - 350 kcmil														KXT4CUAL3C-3PC
Multi-cable		Cu	6x 12 - 2 AWG														KXT4MC-3PC


SACE® Tmax® XT accessories

Terminal kits, insulating kits and phase barriers


Terminal kits	Control Tap	Cable type	# cables and wire size	Wire size													Ordering Code			
XT5				4	3	2	1	1/0	2/0	3/0	4/0	250	300	350	400	500	600	700	750	
Front terminals (terminal nut insert only)																				KXT5F-3PC
Extended front terminals																				KXT5EF-3PC
Mechanical lug		Cu/Al	1x 4/0 AWG - 500 kcmil																	KXT5CUAL500K-3PC
Mechanical lug		Cu/Al	1x 350 - 750 kcmil																	KXT5CUAL1X750KC-3
Mechanical lug		Cu/Al	2x 2/0 AWG - 500 kcmil																	KXT5CUAL2X500K-3PC
Mechanical lug		Cu/Al	2x 500 - 750 kcmil																	KXT5CUAL2X750KC-3
Mechanical lug		x	Cu/Al	1x 4 AWG - 350 kcmil																KXT5CUAL350KC-3PC
Mechanical lug		x	Cu/Al	1x 350 - 750 kcmil																KXT5CUAL1X750KCC-3
Mechanical lug		x	Cu/Al	2x 2/0 AWG - 500 kcmil																KXT5CUAL2X500KC-3
Mechanical lug		x	Cu/Al	2x 500 - 750 kcmil																KXT5CUAL2X750KCC-3
XT6				4	3	2	1	1/0	2/0	3/0	4/0	250	300	350	400	500	600	700	750	
Front terminals (terminal nut insert only)																				KXT6F-3PC
Extended front terminals																				KXT6EF-3PC
Mechanical lug		Cu/Al	2x 250 - 500 kcmil																	KXT6CUAL2X500K-3PC
Mechanical lug		Cu/Al	3x 2/0 AWG - 400 kcmil																	KXT6CUAL3X400K-3PC
Mechanical lug		x	Cu/Al	2x 250 - 500 kcmil																KXT6CUAL2X500KC-3
Mechanical lug		x	Cu/Al	3x 2/0 AWG - 400 kcmil																KXT6CUAL3X400KC-3
Mechanical lug		x	Cu/Al	2x 500 - 750 kcmil																KXT6CUAL2X750KCC-3
XT7				4	3	2	1	1/0	2/0	3/0	4/0	250	300	350	400	500	600	700	750	
Mechanical lug		Cu/Al	3x 500 - 750 kcmil																	KXT7CUAL3X750KC-3
Mechanical lug		Cu/Al	4x 4/0 AWG - 500 kcmil																	KXT7CUAL4X500K-3PC
Mechanical lug		Cu/Al	4x 4/0 AWG - 500 kcmil																	KXT7CUAL4X500KC3PC

SACE® Tmax® XT accessories

Terminal kits, insulating kits and phase barriers

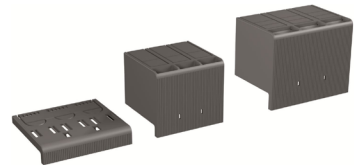

Optional insulating terminal covers	XT1	XT2	XT3	XT4	XT5	XT6	XT7
	KXT1LTC-3	KXT2LTC-3	KXT3LTC-3	KXT4LTC-3	KXT5LTC-3	---	---
HTC high terminal covers for front terminals	KXT1HTC-3	KXT2HTC-3	KXT3HTC-3	KXT4HTC-3	KXT5HTC-3	KXT6HTC-3	KXT7HTC2pcs-3
HTC_BS High terminal covers with back shield for extended front terminals	---	---	---	---	KXT5HTCBS-3	---	---
Phase barriers	XT1	XT2	XT3	XT4	XT5	XT6	
PB height 25mm/0.98in	KXTBPB25-3	KXTCPB25-3	KXTBPB25-3	KXTCPB25-3	KXT5PB25UL-3	---	
PB height 100mm/3.94in	KXTBPB100-3	KXTCPB100-3	KXTBPB100-3	KXTCPB100-3	KXT5PB100UL-3	KXT6PB100UL-3	
PB height 200mm/7.87in	KXTBPB200-3	KXTCPB200-3	KXTBPB200-3	KXTCPB200-3	KXT5PB200UL-3	KXT6PB200UL-3	
PS – Rear phase separators for FP	---	---	---	---	KXT5PBFP-3	---	
	XT1	XT2	XT3	XT4			
Din rail adapter	KXT1EDIN-3	KXT2DIN-3	---	KXT4DIN-3			
					XT5	XT6	
Cable Rack					KXTFACCRCK	KXTFACCRCK	



Cable rack instruction sheet

SACE® Tmax® XT accessories

Electrical

Shunt trip (YO, SOR), pre-wired for fixed breakers

Voltage DC	Voltage AC	Ordering Code
XT1, XT2, XT3, XT4		
12V	-	KXTASORCFPA
24-30V	24-30V	KXTASORCFPB
110-125V	110-127V	KXTASORCFPD
220-250V	220-240V	KXTASORCFPE
-	480-525V	KXTASORCFPG
XT5, XT6		
12V	-	KXTFYOCFPA
24-60V	24-60V	KXTFYOCFPB
110-250V	110-250V	KXTFYOCFPD



Undervoltage release (UVR), pre-wired for fixed breakers

Voltage DC	Voltage AC	Ordering Code
XT1, XT2, XT3, XT4		
24-30V	24-30V	KXTAUVRCFP1
110-125V	110-127V	KXTAUVRCFP4
220-250V	220-240V	KXTAUVRCFP5
-	480-525V	KXTAUVRCFP7
XT5, XT6		
24-30V	24-30V	KXTFYUC1
110-125V	110-127V	KXTFYUC4
220-250V	220-240V	KXTFYUC5
-	480-525V	KXTFYUC7

SACE® Tmax® XT accessories

Electrical



Q	SY	S51	S52	XT1	XT2	XT3	XT4	XT5	XT6	XT7
# of contacts, 24V DC rated										
1	1							KXT5AUXCDQYFP ¹		
1	1			KXTAAXCDQSYFP	KXTAAXCDQSYFP	KXTAAXCDQSYFP	KXTAAXCDQSYFP	KXTAAXCDQSYFP	KXTAAXCDQSYFP	
3	1				KXTDAXCD3QSYFP	KXTDAXCD3QSYFP	KXTDAXCD3QSYFP	KXTDAXCD3QSYFP	KXTDAXCD3QSYFP	
	1									KXT7AUXDY
	1				KXTCAXDS51FP		KXTCAXDS51FP	KXTCAXDS51FP	KXTCAXDS51FP	
# of contacts, 250V AC rated										
1	1							KXT5AUXC2QYFP ¹		
1	1			KXTAAXCQSYFP	KXTAAXCQSYFP	KXTAAXCQSYFP	KXTAAXCQSYFP	KXTAAXCQSYFP	KXTAAXCQSYFP	
2	1			KXTAAXC2QSYFP	KXTAAXC2QSYFP	KXTAAXC2QSYFP	KXTAAXC2QSYFP	KXTAAXC2QSYFP	KXTAAXC2QSYFP	
2	2	1			KXTCAXC2Q2SYS51FP		KXTCAXC2Q2SYS51FP			
3	1				KXTDAXC3QSYFP	KXTDAXC3QSYFP	KXTDAXC3QSYFP	KXTDAXC3QSYFP	KXTDAXC3QSYFP	
3	2				KXTCAXC3Q2SYFP		KXTCAXC3Q2SYFP			
3				KXT1AXC3QL ¹	KXTCAXC3QL ¹	KXT3AXC3QL ¹	KXTCAXC3QL ¹			
	1				KXTCAXCS51FP		KXTCAXCS51FP	KXTCAXCS51FP	KXTCAXCS51FP	
# of contacts, 400V AC rated										
1	1				KXTCAXC4QSYFP		KXTCAXC4QSYFP	KXT5AUXC4QYFP		
2					KXTCAXC42QFP		KXTCAXC42QFP	KXT5AUXC4Q2FP		
	1									KXT7AUX4Y

¹ to be installed on left side of the breaker, consult compatible accessories in technical catalog

- open/closed (Q): indication of the status of the circuit-breaker power contacts;
- trip (SY): signals that the circuit-breaker is opening due to the intervention of the trip unit, or to the intervention residual current device, or to the opening of undervoltage/shunt opening releases, or to the use of the emergency opening pushbutton of the motor operator, or to the use of the test button;
- trip unit tripping (S51): indicates that one of the protection functions of the electronic or thermal-magnetic trip unit has tripped. In case of the Tmax XT5 equipped with thermal-magnetic trip unit and residual current device, S51 is activated also by the intervention of the residual current device.
- YO/YU tripping (S52): indicates that the under voltage or shunt opening release has been activated.
The signaling depends on the service release used. For Tmax XT6 S52 can be used only with YU and is not available for YO. For Tmax XT5, in case of YO, shunt opening release must be permanently supplied to maintain the S52 signal.

SACE® Tmax® XT accessories

Electrical



Stored energy motor operator

Rated voltage	XT1-XT3	XT2-XT4	XT5	XT6
MOE Motor operator				
24V DC	KXTBMOD24	KXTCMOE24	KXT5MOE24	KXT6MOE24
110...125V AC/DC	KXTBMOD110-125	KXTCMOE110-125	KXT5MOE110-125	KXT6MOE110-125
220...250V AC/DC	KXTBMOD220-250	KXTCMOE220-250	---	---
480...525V AC	---	KXTCMOE480-525	---	---
MOE-E Motor operator to be used with Ekip Com communication modules				
24V DC	---	KXTCMOEE24	KXT5MOEE24	---
110...125V AC/DC	---	KXTCMOEE110-125	KXT5MOEE110-125	---

External neutral current sensor	XT1	XT2	XT3	XT4	XT5	XT6
CT External neutral 100A Ekip Dip	---	KXT2ECT100	---	---	---	---
CT External neutral 250A Ekip Dip	---	---	---	KXT4ECT250	---	---
CS External neutral 300A Ekip Dip	---	---	---	---	KXT5CTUDIPA300	---
CS External neutral 400A Ekip Dip	---	---	---	---	KXT5CTUDIPA400	---
CS External neutral 600A Ekip Dip	---	---	---	---	KXT5CTUDIPA600	KXT6CTUDIPA600
CS Internal neutral 800A Ekip Dip	---	---	---	---	---	KXT6CTUDIPA800

Rating Plugs	XT1	XT2	XT3	XT4	XT5	XT6	XT7
Rating plug in = 800 A XT7-XT7 M (Type A)	---	---	---	---	---	---	KXT7RP800ULA
Rating plug in = 800 A XT7-XT7 M (Type B)	---	---	---	---	---	---	KXT7RP800ULB
Rating plug in = 1000 A XT7-XT7 M (Type A)	---	---	---	---	---	---	KXT7RP1000ULA
Rating plug in = 1000 A XT7-XT7 M (Type B)	---	---	---	---	---	---	KXT7RP1000ULB
Rating plug in = 1200 A XT7-XT7 M (Type B)	---	---	---	---	---	---	KXT7RP1200ULB

SACE® Tmax® XT accessories

Manual operators



Direct Rotary handles	XT1	XT2	XT3	XT4	XT5	XT6	XT7
RHD Standard Direct Handle	KXTBRHDSTFP	KXTCRHDSTFP	KXTBRHDSTFP	KXTCRHSTFP	KXT5RHDSTFP	KXT6RHDSTFP	---
RHD Emergency Direct Handle	---	KXTCRHDEMFP	---	KXTCRHDEMFP	---	---	---
RHS-R Standard Right Side Handle	KXTBRHSRSTFP	KXTCRHSRSTFP	KXTBRHSRSTFP	KXTCRHSRSTFP	---	---	---

Rotary operators - through-door	XT1 - XT2 - XT3 - XT4	XT5	XT6	XT7
RHE_MB Metallic base for transmitted handle	KXTMRHESTFP	KXT5MRHESTFP	KXT6MRHESTFP	KXT7MRHEST
Standard Pistol Hdl w/reset, 65mm, NEMA 3R,12	OHB65J10B	OHB65J10B	OHB65J10B	OHB65J10B
Emerg. Pistol Hdl w/reset, 65mm, NEMA 3R,12	OHY65J10B	OHY65J10B	OHY65J10B	OHY65J10B
Standard Pistol Hdl w/reset, 65mm, NEMA 4,4X	OHB65L10B	OHB65L10B	OHB65L10B	OHB65L10B
Emerg. Pistol Hdl w/reset, 65mm, NEMA 4, 4X	OHY65L10B	OHY65L10B	OHY65L10B	OHY65L10B
Standard Pistol Hdl w/reset, 125mm, NEMA 3R,12	OHB125J10B	OHB125J10B	OHB125J10B	OHB125J10B
Emerg. Pistol Hdl w/reset, 125mm, NEMA 3R,12	OHY125J10B	OHY125J10B	OHY125J10B	OHY125J10B
Standard Pistol Hdl w/reset, 125mm, NEMA 4,4X	OHB125L10B	OHB125L10B	OHB125L10B	OHB125L10B
Emerg. Pistol Hdl w/reset, 125mm, NEMA 4,4X	OHY125L10B	OHY125L10B	OHY125L10B	OHY125L10B
148mm Pistol Hdl Shaft	EXP10X148	EXP10X148	EXP10X148	EXP10X148
225mm Pistol Hdl Shaft	EXP10X225	EXP10X225	EXP10X225	EXP10X225
500mm Pistol Hdl Shaft	EXP10X500	EXP10X500	EXP10X500	EXP10X500
Shaft Support for RHE_MB	KXTMRHESS	---	---	---

Flange handles(1)		XT-XT2-XT3-XT4	XT5	XT6	XT7
Mechanism	-	KXTAFLHDLMECH	KXT5FLHDLMECH	KXT6FLHDLMECH	KXT7FLHDLMECH
Handle	Type 12/3R	KXTAFLHDL6IN	KXTAFLHDL6IN	KXTAFLHDL6IN	KXTBFLHDL10IN
	Type 4/4X	KXTAFLHDL6IN4X	KXTAFLHDL6IN4X	KXTAFLHDL6IN4X	KXTBFLHDL10IN4X
Cable	3ft	SC3L	SC3L	SC3L	SC3H
	4ft	SC4L	SC4L	SC4L	SC4H
	6ft	SC6L	SC6L	SC6L	SC6H
	8ft	SC8L	SC8L	SC8L	SC8H
	10ft	SC10L	SC10L	SC10L	SC10H

(1) requires mechanism, handle and cable for complete solution


SACE® Tmax® XT accessories

Handles and accessories

Toggle extensions	XT5	XT6	XT7
Toggle extension	KXTJTGLEXT	KXTJTGLEXT	---
Toggle extension - foldable	---	---	KXT7TGLEXT




Padlock provisions	XT1	XT2	XT3	XT4	XT5	XT6	XT7
Removable in open position	KXTBPLLREM	---	KXTBPLLREM	---	---	---	---
Fixed	KXTBPLLOP	KXTCPLLOP	KXTBPLLOP	KXTCPLLOP	KXT5PLLOP	KXT6PLLOP	KXT7PLLOP
Fixed in open/closed position	KXTBPLLOPCL	KXTCPLLOPCL	KXTBPLLOPCL	KXTCPLLOPCL	KXT5PLLOPLC	KXT6PLLOPLC	---



Operating lever mechanisms and locks	XT1	XT2	XT3	XT4	XT5	XT6	XT7
FLD Front for operating lever mechanism	---	KXTCFLDFP	---	KXTCFLDFP	KXT5FLDFP	KXT6FLDFP	---
FLD Front for operating lever mechanism (withdrawal)	---	---	---	---	KXT5FLDW	KXT6FLDW	---
KLC-A Kirk key lock provision	---	---	---	---	KXTFKLCAKIRK	KXTFKLCAKIRK	---

SACE® Tmax® XT accessories

Retrofit kits



Retrofit kit for Spectra bolt-on panelboards and switchboards		Box width range/ X height		Box width range/ X height		Box width range/ X height		Box width range/ X height	
	XT1		XT4		XT5		XT7		
Single mount kit	---	---	SRFB3XT4FPX	27"-44" / 3X	SRFB3XT5MFPX ¹	27"-44" / 4X	SRFB3XT7MFPX	40"-44" / 6X	
Dual mount kit	SRFB6XT1FPX	27"-44" / 3X	SRFB6XT4FPX	31"-44" / 3X	SRFB6XT5BFPX ²	40"-44" / 4X	---	---	

¹ 600A
² 400A

Maximum of two SACE Tmax XT4, XT5 or XT7 retrofit kits can be installed side by side in an existing Spectra power panelboard installation
Tmax XT5 can only be dual mounted up to 400A
If Kirk provisions are required, replace the „X“ (last digit) with „K“ (example: SRFB6XT1FPX becomes SRFB6XT1FPK)
Kits are only for use with 80% rated breakers
XT7 breaker handle extension included with SRFB3XT7MFPX
XT7 retrofit kit can be used for main or feeder breakers

Enclosed circuit breakers

Breakers and accessories

NEMA Enclosures (breaker not included)

NEMA rating	Mounting	Formula A2	XT1	XT2	XT3	XT4	XT5	XT6	XT7
1	Flush	A2ENCL250F	XT1ENCL125F	XT2ENCL125F	---	XT4ENCL250F	---	---	---
1	Surface	A2ENCL250S	XT1ENCL125S	XT2ENCL125S	XT3ENCL225S	XT4ENCL250S	XT5ENCL600S	XT6ENCL800S	XT7ENCL1200S
12	Surface	---	XT1ENCL125J	XT2ENCL125J	---	---	---	---	---
3R	Surface	A2ENCL250R	XT1ENCL125R	---	XT3ENCL225R	XT4ENCL250R	XT5ENCL600R	XT6ENCL800R	XT7ENCL1200R
4/4X	Surface	---	XT1ENCL125CS	---	XT3ENCL225CS	XT4ENCL250CS	XT5ENCL600CS	XT6ENCL800CS	---

Formula A2 NEMA Enclosed Breakers

Description	Ordering Code
NEMA 3R, surface mount, 2 pole 150A Circuit Breaker Factory Installed	A2A250W150ECB
NEMA 3R, surface mount, 2 pole 200A Circuit Breaker Factory Installed	A2A250W200ECB

Formula breaker rated 10kA at 240v

Accessories - Ground kits

Description	Ordering Code
70-125A	TGL1
150-400A	TGL1 + TGL20
600-1200A	TGL6

TEY molded case circuit breakers

Ordering code construction



Part identifier

TEY = 14kA@227V
TEYF = 18kA@277V
TEYD = 25kA@277V
TEYL = 65kA@277V

Mounting suffix

 = Bot-on (14-18kA)
B = Bolt-on (25-65kA)

Poles

1 = 1 Pole
2 = 2 Pole
3 = 3 Pole

Amps

15 = 15 Amps
20 = 20 Amps
25 = 25 Amps
30 = 30 Amps
35 = 35 Amps
40 = 40 Amps
45 = 45 Amps
50 = 50 Amps
60 = 60 Amps
70 = 70 Amps
80 = 80 Amps
90 = 90 Amps
100 = 100 Amps
110 = 110 Amps
125 = 125 Amps

Note: For available configurations, see the ordering information pages

Reference only. For stocked items, see following pages.

TEY molded case circuit breakers

Breakers



TEY/TEYF (UL/cUL File E-11592)			
Ampere	Wire range	Ordering Code	Ordering Code
Single Pole - Includes Integral Cu/Al Load Lugs		Type TEY 14kA @ 277 Vac	Type TEYF 18kA @ 277 Vac
15	#14-#10	TEY115	---
20	#14-#10	TEY120	TEYF120
25	#14-#10	TEY125	---
30	#14-#10	TEY130	---
35	#10-#4	TEY135	---
40	#10-#4	TEY140	---
45	#10-#4	TEY145	---
50	#10-#4	TEY150	---
60	#10-#4	TEY160	---
100	#4-1/0	TEY1100	---

TEY/TEYF (UL/cUL File E-11592)			
Ampere	Wire range	Ordering Code	Ordering Code
Two-Pole - Includes Integral Cu/Al Load Lugs		Type TEY 14kA @ 480/ 277 Vac	Type TEYF 18kA @ 480/ 277 Vac
15	#14-#10	TEY215	TEYF215
20	#14-#10	TEY220	TEYF220
25	#14-#10	TEY225	TEYF225
30	#14-#10	TEY230	---
35	#10-#4	TEY235	TEYF235
40	#10-#4	TEY240	TEYF240
45	#10-#4	TEY245	TEYF245
50	#10-#4	TEY250	TEYF250
60	#10-#4	TEY260	TEYF260
70	#4-1/0	TEY270	TEYF270
80	#4-1/0	TEY280	TEYF280
90	#4-1/0	TEY290	TEYF290
100	#4-1/0	TEY2100	TEYF2100

TEY/TEYF (UL/cUL File E-11592)			
Ampere	Wire range	Ordering Code	Ordering Code
Three-Pole - Includes Integral Cu/Al Load Lugs		Type TEY 14kA @ 480/ 277 Vac	Type TEYF 18kA @ 480/ 277 Vac
15	---	TEY315	TEYF315
20	---	TEY320	TEYF320
25	---	TEY325	TEYF325
30	---	TEY330	TEYF330
35	---	TEY335	TEYF335
40	---	TEY340	TEYF340
45	---	TEY345	---
50	---	TEY350	TEYF350
60	---	TEY360	TEYF360
70	---	TEY370	TEYF370
80	---	TEY380	TEYF380
90	---	TEY390	TEYF390

Table continues on next page.

TEY molded case circuit breakers

Breakers



TEY/TEYF (UL/cUL File E-11592)			
Ampere	Wire range	Ordering Code	Ordering Code
Three-Pole - Includes Integral Cu/Al Load Lugs		Type TEY 14kA @ 480 / 277 Vac	Type TEYF 18kA @ 480 / 277 Vac
100	---	TEY3100	TEYF3100
110	---	---	---
125	---	---	TEYF3125B

TEY/TEYF (UL/cUL File E-11592)				
Ampere	Wire range	Ordering Code	Ordering Code	Ordering Code
Single pole w/lugs Includes integral Cu/Al load lugs		Type TEYD 25kA @ 480 / 277 Vac	Type TEYD 35kA @ 480 / 277 Vac	Type TEYD 65kA @ 480 / 277 Vac
15	#14-#10	TEYD1015B	TEYH1015B	TEYL1015B
20	#14-#10	TEYD1020B	TEYH1020B	TEYL1020B
25	#10-#4	---	---	TEYL1025B
30	#10-#4	TEYD1030B	---	TEYL1030B
40	#10-#4	---	---	TEYL1040B
50	#10-#4	---	---	TEYL1050B

TEY/TEYF (UL/cUL File E-11592)				
Ampere	Wire range	Ordering Code	Ordering Code	Ordering Code
Two pole w/lugs Includes integral Cu/Al load lugs		Type TEYD 25kA @ 480 / 277 Vac	Type TEYD 35kA @ 480 / 277 Vac	Type TEYD 65kA @ 480 / 277 Vac
15	#14-#10	TEYD2015B	---	TEYL2015B
20	#14-#10	TEYD2020B	---	TEYL2020B
30	#10-#4	---	---	TEYL2030B
40	#10-#4	TEYD2040B	---	---
125	#4-2/0	---	---	TEYL2125B

TEY/TEYF (UL/cUL File E-11592)				
Ampere	Wire range	Ordering Code	Ordering Code	Ordering Code
Three w/lugs Includes integral Cu/Al load lugs		Type TEYD 25kA @ 480 / 277 Vac	Type TEYD 35kA @ 480 / 277 Vac	Type TEYD 65kA @ 480 / 277 Vac
15	#14-#10	TEYD3015B	TEYH3015B	TEYL3015B
20	#14-#10	TEYD3020B	TEYH3020B	TEYL3020B
25	#10-#4	TEYD3025B	---	TEYL3025B
30	#10-#4	TEYD3030B	TEYH3030B	TEYL3030B
35	#10-#4	TEYD3035B	---	TEYL3035B
40	#10-#4	TEYD3040B	TEYH3040B	TEYL3040B
45	#10-#4	TEYD3045B	---	TEYL3045B
50	#10-#4	TEYD3050B	---	TEYL3050B
60	#10-#4	TEYD3060B	TEYH3060B	TEYL3060B
70	#4-2/0	TEYD3070B	TEYH3070B	TEYL3070B
80	#4-2/0	---	---	TEYL3080B
90	#4-2/0	TEYD3090B	---	TEYL3090B
100	#4-2/0	TEYD3100B	TEYH3100B	TEYL3100B
110	#4-2/0	---	---	TEYL3110B
125	#4-2/0	TEYD3125B	---	TEYL3125B

TEY Accessories

Accessories

Description	Ordering Code
Variable depth operating mechanism/handles	
TEYD/H/L 2-POLE HANDLE TIE	TEYXHT2
TEYD/H/L 3-POLE HANDLE TIE	TEYXHT3
TEYDHL PADLOCKING DEVICE	TEYXPLD1
TEY HANDLE LOCK	TEYLD1
E150 PADLOCK KIT	TEYPLD1
TEYD/H/L 2-POLE HANDLE TIE	TEYXHT2
TEYD/H/L 3-POLE HANDLE TIE	TEYXHT3
TEYDHL PADLOCKING DEVICE	TEYXPLD1

Residual current circuit breakers

F200 series



F202				
Type A	Poles	Ampacity	IΔn	Ordering Code
	2	16	10	F202A-16.0.01
	2	25	30	F202A-25/0.03 110V
	2	40	30	F202A-40/0.03 110V
	2	63	30	F202A-63/0.03 110V

F204				
Type A	Poles	Ampacity	IΔn	Ordering Code
	4	25	30	F204A-25/0.03 110V
	4	40	30	F204A-40/0.03 110V
	4	63	30	F204A-63/0.03 110V



RESIDUAL CURRENT CIRCUIT BREAKER DS201 RCBO				
Type A	Poles	Ampacity	IΔn	Ordering Code
	2	16	30	DS201-C16A30UL

Fuse Holders

E90 fuse holders

Ordering code construction - Fuse holders

E9		1	/	30	S	CC	
ABB Brand							
E90 Fuse Holders							
Poles		Rated Current		PV Range Suffix		Fuse Class	
1 = 1 Pole		30 = 30A		PV = 1000 V DC		CC = Class CC	
1N = 1 Pole + N		32 = 32A		PV1500e = 1500 V DC		J = Class J	
2 = 2 Pole		50 = 50A				Blank = None	
3 = 3 Pole		60 = 60A					
3N = 3 Pole + N		125 = 100A					
4 = 4 Pole							
				Blown Fuse Indicator			
				S = Blown Fuse Indicator			
				Blank = None			

Please Note: ABB ReliaMod™ horizontal bus does not match up to GE Meter Mod III horizontal bus, so any ReliaMod™ section cannot be connected to any GE Meter Mod III section and vice versa without a bus transition adapter section. Please refer to the ReliaMod™ bus transition adapter page of the BuyLog for more information.



Class	Poles	Ampacity	Description	Ordering Code
CC	1	30		E91/30CC
CC	1	30	with blown-fuse indicator	E91/30SCC
CC	1+N	30		E91N/30CC
	1	32	Midget	E91/32
	1	32	Midget with blown-fuse indicator	E91/32S
	1	50	Midget	E91/50
PV	1	32	Photo voltaic	E91/32PV
CC	2	30		E92/30CC
CC	2	30	with blown-fuse indicator	E92/30SCC
	2	32	Midget	E92/32
CC	3	30		E93/30CC
CC	3	30	with blown-fuse indicator	E93/30SCC
J	3	30		E93/30J
J	3	30	with blown-fuse indicator	E93/30SJ
	3	32	Midget	E93/32
J	3	60		E93/60J
J	3	60	with blown-fuse indicator	E93/60SJ

Panelboards

Section 7

Panelboards

Table of contents

ReliaGear® Merchandised Lighting Panelboards

Ordering code construction	7-1
Interiors & grounds	7-2
Boxes & fronts	7-3
Main/sub-feed breaker kits, main lug kits and accessories	7-4
Branch breakers for RQ panels	7-8
Branch breakers for RE panels	7-9

ReliaGear® Merchandised neXT SuperBox Power Panelboards


SuperBox panels	7-10
ReliaGear neXT breakers XT1-XT2	7-11
ReliaGear neXT XT4 circuit breakers	7-12
ReliaGear neXT breakers XT5-XT7	7-13
ReliaGear neXT breakers TEY & Record Plus FB	7-14
ReliaGear neXT breakers Formula A2	7-15
ReliaGear neXT breaker X-spacing	7-16
ReliaGear neXT breaker accessories	7-17

ReliaGear® neXT circuit breaker testing fixture

ReliaGear® neXT circuit breaker testing fixture	7-18
---	------

ReliaGear® Merchandised Lighting Panelboards


Ordering code construction

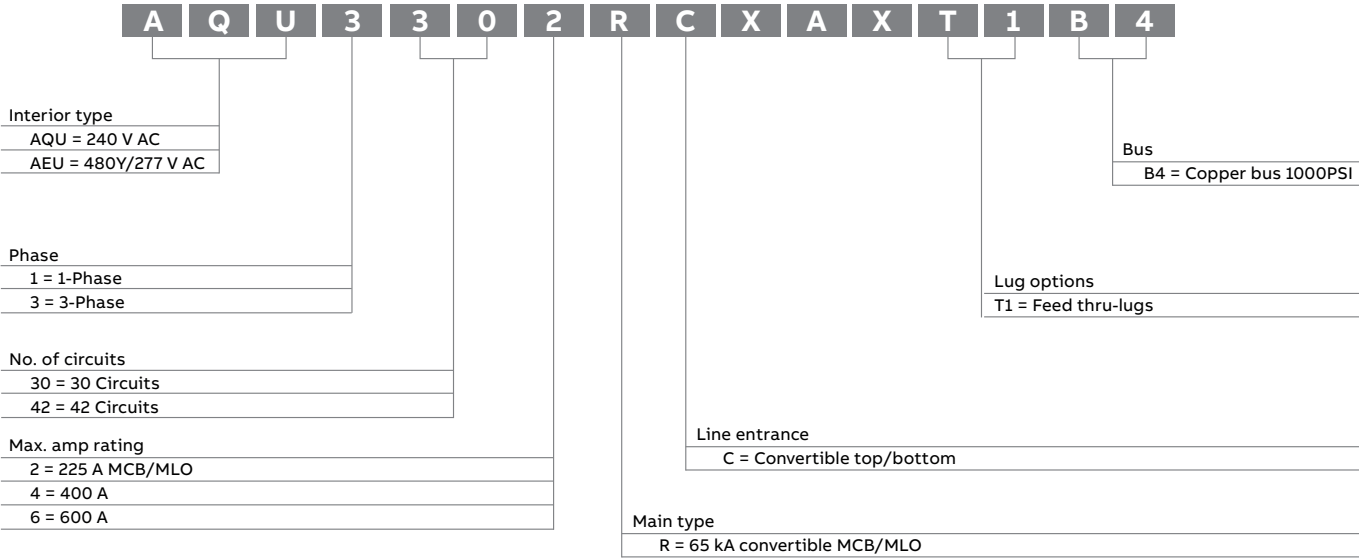

Reference only. For stocked items, see following pages.

ReliaGear® Merchandised Lighting Panelboards

Step 1: Select Interior

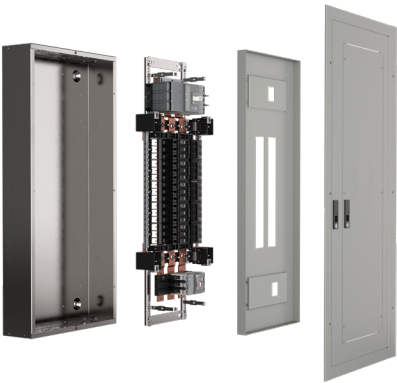

Select the interior by panel rating, number of circuits and ampacity. Identify the box/front height for interior selected.

Feed-thru copper bus

Voltage	Rating (amps)	No. of circuits	Ordering code ¹	Box/front height (in.)	No. of TGL2 ground bars required ²
240 V AC, 1-Phase	100–225	30	AQU1302RCXAXT1B4	43.5	3
		42	AQU1422RCXAXT1B4	49.5	4
	400	42	AQU1424RCXAXT1B4	76.5	4
		42	AQU1426RCXAXT1B4	76.5	4
208Y/120 V AC, 3-Phase	100–225	30	AQU3302RCXAXT1B4	43.5	3
		42	AQU3422RCXAXT1B4	49.5	4
	400	42	AQU3424RCXAXT1B4	76.5	4
		42	AQU3426RCXAXT1B4	76.5	4
480Y/277 V AC, 3-Phase	100–225	30	AEU3302RCXAXT1B4	43.5	3
		42	AEU3422RCXAXT1B4	49.5	4
	400	42	AEU3424RCXAXT1B4	76.5	4
		42	AEU3426RCXAXT1B4	76.5	4

¹ See table below for TGL20 ground lug quantities.
² For isolated ground, use EGS12. When using the EGS12, 5 and 7 ground lugs (TGL20s) are required for 30 and 42 circuit panels respectively.
³ 600 A available as main lug only.

TGL20 ground lugs required by panel type

Interior type	100-225 A	400 A	600 A
Main lug only	1	1	2
Main lug and sub-feed	2	2	4
Main lug and feed-thru	2	2	4
Main breaker only	1	1	
Main breaker and sub-feed	2	2	
Main breaker and feed-thru	2	2	

ReliaGear® Merchandised Lighting Panelboards

Step 2-3: Select Box and Front



NEMA 1



NEMA 3R

Select a 20" wide box of correct height based on interior selected on Page 7-2.

Note: Boxes come with blank endwalls.

Box height (in.)	NEMA 1 ordering code	NEMA 3R ordering code
43.5	AB43B	AB433
49.5	AB49B	AB493
76.5	AB76B	AB763



Standard



Door within door



Standard with quarter-turn lock

For NEMA 1 enclosures only, select a front of correct height based on interior selected on Page 7-2 and box selected above.


- Standard fronts are equipped with concealed hinges and trim adjusting screws hinges, trim adjusting screws and quarter-turn locks
- Door within door fronts are convenient for easy access to equipment from the front of the panel as it allows access to the gutters without removing the front
- Front hinged to box fronts are similar to door within door fronts for convenient access to gutters, but four screws must be removed to access the outer door

Front height (in.)	Standard	Standard	Door within door	Front hinged to box
	Flush ordering code	Surface ordering code	Surface ordering code	Surface ordering code
43.5	AF43F	AF43S	AF43SP	AF43SD
49.5	AF49F	AF49S	AF49SP	AF49SD
76.5 ¹⁾	AF76FT	AF76ST	AF76SPT	AF76SDT

1) 76.5" fronts include quarter-turn lock, enabling applications with XT5 circuit breakers

ReliaGear® Merchandised Lighting Panelboards

Step 4: Select main and/or sub-feed breaker kit(s)

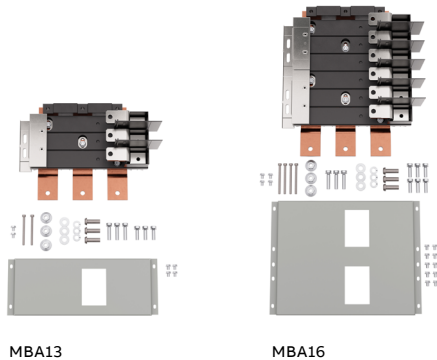

Select the main breaker kit appropriate for your interior type, amp rating and kAIC rating. If a sub-feed breaker is required, repeat the selection process.

Interior type	Ordering code ¹	Rating (amps)	No. of poles	Breaker short circuit rating (kAIC)						
				10	14	22	25	35	50	65
AQU1: 240 V AC, 1-Phase	MB612	100	2	THQB	–	THHQB	–	–	–	–
	MB614	100	4	(x2) THQB	–	(x2) THHQB	–	–	–	–
	MBA12	225	2	A2A	–	A2N2	–	–	–	–
	MBM324	400	2	–	–	–	–	–	–	XT5N
AQU3: 208Y/120 V AC, 3-Phase	MB613	100	3	THQB	–	THHQB	–	–	–	–
	MB616 ⁴	100	6	(x2) THQB	–	(x2) THHQB	–	–	–	–
	MBA13	225	3	A2A	–	A2N ²	–	–	–	–
	MBA16	400	6	(x2) A2A	–	(x2) A2N ²	–	–	–	–
	MBB33	150	3	–	–	–	–	–	–	XT4N
	MBB33	225	3	–	–	–	–	–	–	XT4N
	MBB36 ³	400	6 ³	–	–	–	–	–	–	(x2) XT4N
	MBM334	400	3	–	–	–	–	–	–	XT5N
AEU3: 480Y/277 V AC, 3-Phase	MB423	100	3	–	TEY	–	–	–	–	–
	MB426	100	6	–	(x2) TEY	–	–	–	–	–
	MBC33	125	3	–	–	–	XT1N	XT1S	–	XT1H
	MBB33	150	3	–	–	–	XT4N	XT4S	–	XT4H
	MBB33	225	3	–	–	–	XT4N	XT4S	–	XT4H
	MBB36 ³	400	6 ³	–	–	–	(x2) XT4N	(x2) XT4S	–	(x2) XT4H
		MBM334	400	3	–	–	–	–	XT5N	XT5S

¹ Breaker not included

² Actual breaker short circuit rating is 25 kAIC

³ 6 poles of sub-feed applies only to 400 A and 600 A interiors

⁴ Can use (2) 3-pole devices only, no 2-pole allowed

ReliaGear® Merchandised Lighting Panelboards

Step 5: Select main and/or sub-feed circuit breaker(s)

To correlate breaker types with the kAIC rating in specific panelboards, see the table for Step 4. For THQB and TEY main breakers, see branch breakers tables in Step 7.

Tmax® XT breakers (3-pole) for use with appropriate main breaker or sub-feed breaker kit.


240 V kAIC	480 V kAIC	Breaker description	Wire range (Cu/Al)	Cables per lug	Ordering code
65	65	XT1H 125 TMF 30 amps 3P	Cu Al 1x14-2/0 AWG	1	XT1HU3030AFD000XXX
65	65	XT1H 125 TMF 60 amps 3P	Cu Al 1x14-2/0 AWG	1	XT1HU3060AFD000XXX
65	65	XT1H 125 TMF 100 amps 3P	Cu Al 1x14-2/0 AWG	1	XT1HU3100AFD000XXX
65	65	XT1H 125 TMF 125 amps 3P	Cu Al 1x14-2/0 AWG	1	XT1HU3125AFD000XXX
65	35	XT1S 125 TMF 100 amps 3P	Cu Al 1x14-2/0 AWG	1	XT1SU3100AFD000XXX
65	65	XT4H 250 TMF 150 amps 3P	Cu Al 1x4 AWG-300 kcmil	1	XT4HU3150AFJ000XXX
65	65	XT4H 250 TMF 200 amps 3P	Cu Al 1x4 AWG-300 kcmil	1	XT4HU3200AFJ000XXX
65	65	XT4H 250 TMF 225 amps 3P	Cu Al 1x4 AWG-300 kcmil	1	XT4HU3225AFJ000XXX
65	35	XT4S 250 TMF 175 amps 3P	Cu Al 1x4 AWG-300 kcmil	1	XT4SU3175AFJ000XXX
65	35	XT4S 250 TMF 200 amps 3P	Cu Al 1x4 AWG-300 kcmil	1	XT4SU3200AFJ000XXX
65	35	XT4S 250 TMF 225 amps 3P	Cu Al 1x4 AWG-300 kcmil	1	XT4SU3225AFJ000XXX
65	25	XT4N 250 Ekip DIP 60-150 amps 3P	Cu Al 1x4 AWG-300 kcmil	1	XT4NU31501FJ000XXX
65	35	XT4S 250 Ekip DIP 100-250 amps 3P	Cu Al 1x4 AWG-300 kcmil	1	XT4SU32501FL000XXX
65	65	XT4H 250 Ekip DIP 100-250 amps 3P	Cu Al 1x4 AWG-300 kcmil	1	XT4HU32501FL000XXX
65	65	XT5H 400 TMA 400 amps 3P	Cu Al 2x2/0 AWG-500 kcmi	2	XT5HU340ABFN000XXX
65	50	XT5S 400 TMA 300 amps 3P	Cu Al 2x2/0 AWG-500 kcmi	2	XT5SU330ABFN000XXX
65	50	XT5S 400 TMA 400 amps 3P	Cu Al 2x2/0 AWG-500 kcmi	2	XT5SU340ABFN000XXX
65	35	XT5N 400 Ekip DIP 16-400 amps 3P	Cu Al 2x2/0 AWG-500 kcmi	2	XT5NU340AFFN000XXX
65	65	XT5H 400 Ekip DIP 16-400 amps 3P	Cu Al 2x2/0 AWG-500 kcmi	2	XT5HU340AFFN000XXX

Main or sub-feed breakers for use with RQ panels (208Y/120 V AC 3-phase or 240 V AC 1-phase).

Amp rating	2-pole		3-pole	
	10 kAIC	22 kAIC	10 kAIC	22 kAIC
Ordering code	Ordering code	Ordering code	Ordering code	Ordering code
125	A2A125TL-2	A2N125TL-2	A2A125TT	A2N125TT
150	A2A150TL-2	A2N150TL-2	A2A150TT	A2N150TT
175	A2A175TL-2	A2N175TL-2	A2A175TT	A2N175TT
200	A2A200TL-2	A2N200TL-2	A2A200TT	A2N200TT
225	A2A225TL-2	A2N225TL-2	A2A225TT	A2N225TT

ReliaGear® Merchandised Lighting Panelboards

Step 6: Select main and/or feed-thru lug kit(s)



Select lug kit(s) for main lug and/or feed-thru applications, if required.

Main lug kits

Lug type	Amp rating	Wire range	Ordering code	200% Neutral ordering code
Mechanical	225	Standard: 6–350 kcmil	MLA1	NKA
	225	Oversized: 1–600 kcmil or (2) 1/0–250 kcmil	MLA2	
	400	Standard: 2–600 kcmil or (2) 1/0–250 kcmil	MLA41	NK4A ¹
	400	Oversized: 3/0–800 kcmil	MLA62	
	600	Standard: (2) 2/0–500 kcmil	MLA61	–
	600	Oversized: 3/0–800 kcmil	MLA62	

¹ For 200% neutral feed-thru, order NKA4FT, (GO-101P). Wire range (2) 2/0–600 kcmil or (4) 4–250 kcmil.

ReliaGear® Merchandised Lighting Panelboards

Step 7: Select bolt-on branch circuit breakers

Select branch circuit breakers from the tables below.

- THQB and THHQB breakers are only compatible with RQ panels.
- TEY and TEYF breakers are only compatible with RE panels.

Branch circuit breakers for use with RQ panels (208Y/120 V AC 3-phase or 240 V AC 1-phase)

Amp rating	10 kAIC			22 kAIC		
	1-pole	2-pole	3-pole	1-pole	2-pole	3-pole
Ordering code	Ordering code	Ordering code	Ordering code	Ordering code	Ordering code	Ordering code
15	THQB1115 ^{1,2,3,4}	THQB2115 ^{1,4}	THQB32015	THHQB1115 ^{1,2,3,4}	THHQB2115 ^{1,4}	THHQB32015
20	THQB1120 ^{1,2,3,4}	THQB2120 ^{1,4}	THQB32020	THHQB1120 ^{1,2,3,4}	THHQB2120 ^{1,4}	THHQB32020
25	THQB1125 ¹	THQB2125 ¹	THQB32025	THHQB1125 ¹	THHQB2125 ⁴	THHQB32025
30	THQB1130 ^{1,4}	THQB2130 ^{1,4}	THQB32030	THHQB1130 ^{1,4}	THHQB2130 ^{1,4}	THHQB32030
35	THQB1135	THQB2135	THQB32035	THHQB1135	THHQB2135	THHQB32035
40	THQB1140	THQB2140 ⁴	THQB32040	THHQB1140	THHQB2140	THHQB32040
45	THQB1145	THQB2145	THQB32045	THHQB1145	THHQB2145	THHQB32045
50	THQB1150	THQB2150	THQB32050	THHQB1150	THHQB2150	THHQB32050
60	THQB1160	THQB2160	THQB32060	THHQB1160	THHQB2160	THHQB32060
70	THQB1170	THQB2170	THQB32070	THHQB1170	THHQB2170	THHQB32070
80	–	THQB2180	THQB32080	–	THHQB2180	THHQB32080
90	–	THQB2190	THQB32090	–	THHQB2190	THHQB32090
100	–	THQB21100	THQB32100	–	THHQB21100	THHQB32100

¹ For ground fault, add 'GFT' suffix to breaker SKU

² For AFCI, add 'AF2' suffix to breaker SKU

³ For AFCI/GFCI, add 'DF' suffix to breaker SKU

⁴ For equipment ground fault, add 'GFEP' suffix to breaker SKU

Branch circuit breakers for use with RE panels (480Y/277 V AC 3-phase)

Amp rating	14 kAIC			18 kAIC		
	1-pole	2-pole	3-pole	1-pole	2-pole	3-pole
Ordering code	Ordering code	Ordering code	Ordering code	Ordering code	Ordering code	Ordering code
15	TEY115	TEY215	TEY315	TEYF115	TEYF215	TEYF315
20	TEY120	TEY220	TEY320	TEYF120	TEYF220	TEYF320
25	TEY125	TEY225	TEY325	TEYF125	TEYF225	TEYF325
30	TEY130	TEY230	TEY330	TEYF130	TEYF230	TEYF330
35	TEY135	TEY235	TEY335	TEYF135	TEYF235	TEYF335
40	TEY140	TEY240	TEY340	TEYF140	TEYF240	TEYF340
45	TEY145	TEY245	TEY345	TEYF145	TEYF245	TEYF345
50	TEY150	TEY250	TEY350	TEYF150	TEYF250	TEYF350
60	TEY160	TEY260	TEY360	TEYF160	TEYF260	TEYF360
70	TEY170	TEY270	TEY370	–	TEYF270	TEYF370
80	TEY180	TEY280	TEY380	–	TEYF280	TEYF380
90	TEY190	TEY290	TEY390	–	TEYF290	TEYF390
100	TEY1100	TEY2100	TEY3100	–	TEYF2100	TEYF3100

ReliaGear® Lighting Panelboards

Branch breakers for RQ panels

THQB and THHQB branch circuit breakers for use with RQ panels (208/120 V AC 3-phase)

Amp rating	10 kAIC			22 kAIC		
	1-pole	2-pole	3-pole	1-pole	2-pole	3-pole
	Ordering code	Ordering code	Ordering code	Ordering code	Ordering code	Ordering code
15	THQB1115 ⁽¹⁾	THQB2115 ⁽¹⁾	THQB32015	THHQB1115	THHQB2115	THHQB32015
20	THQB1120 ^(1,2,3)	THQB2120 ^(1,3)	THQB32020	THHQB1120 ⁽¹⁾	THHQB2120 ⁽¹⁾	THHQB32020
25	THQB1125	THQB2125	THQB32025	THHQB1125	THHQB2125	THHQB32025
30	THQB1130 ^(1,3)	THQB2130 ^(1,3)	THQB32030	THHQB1130	THHQB2130 ⁽¹⁾	THHQB32030
35	THQB1135	THQB2135	THQB32035	–	THHQB2135	THHQB32035
40	THQB1140	THQB2140 ⁽³⁾	THQB32040	THHQB1140	THHQB2140	THHQB32040
45	–	THQB2145	THQB32045	–	–	THHQB32045
50	THQB1150	THQB2150	THQB32050	THHQB1150	THHQB2150	THHQB32050
60	THQB1160	THQB2160	THQB32060	–	THHQB2160	THHQB32060
70	–	THQB2170	THQB32070	–	–	THHQB32070
80	–	THQB2180	THQB32080	–	THHQB2180	THHQB32080
90	–	THQB2190	THQB32090	–	–	THHQB32090
100	–	THQB21100	THQB32100	–	THHQB21100	THHQB32100

⁽¹⁾ For ground fault, add 'GFT' suffix to breaker SKU

⁽²⁾ For AFCI, add 'AF2' suffix to breaker SKU

⁽³⁾ For equipment ground fault, add 'GFEP' suffix to breaker SKU

ReliaGear® Lighting Panelboards

Branch breakers for RE panels

TEY and TEYF branch circuit breakers for use with RE panels (480Y/277 V AC 3-phase)

Amp rating	14 kAIC			18 KAIC		
	1-pole	2-pole	3-pole	1-pole	2-pole	3-pole
	Ordering code	Ordering code	Ordering code	Ordering code	Ordering code	Ordering code
15	TEY115	TEY215	TEY315	–	TEYF215	TEYF315
20	TEY120	TEY220	TEY320	TEYF120	TEYF220	TEYF320
25	TEY125	TEY225	TEY325	–	TEYF225	TEYF325
30	TEY130	TEY230	TEY330	–	TEYF230	TEYF330
35	TEY135	TEY235	TEY335	–	TEYF235	TEYF335
40	TEY140	TEY240	TEY340	–	TEYF240	TEYF340
45	TEY145	TEY245	TEY345	–	TEYF245	TEYF345
50	TEY150	TEY250	TEY350	–	TEYF250	TEYF350
60	TEY160	TEY260	TEY360	–	TEYF260	TEYF360
70	–	TEY270	TEY370	–	TEYF270	TEYF370
80	–	TEY280	TEY380	–	TEYF280	TEYF380
90	–	TEY290	TEY390	–	TEYF290	TEYF390
100	–	TEY2100	TEY3100	–	TEYF2100	TEYF3100

ReliaGear® Merchandised neXT SuperBox Power Panelboards

SuperBox panels




ReliaGear® neXT SuperBox Power Panelboards

Ordering code	Description	Amps	Enclosure type	Main	Dimensions (H x W x D inches)	X-space left	X-space right
RNSB06L6040A	600A MLO NEMA 1 60 x 40 16X no breakers	600 A	NEMA 1	Main lugs (2x #2-600 kcmil)	60 x 40 x 11	12	12
RNSB06B6040A	600A MCB NEMA 1 60 x 40 16X no breakers	600 A	NEMA 1	Main breaker ¹	61 x 40 x 11	16	16
RNSB06L6040R	600A MLO NEMA 3R 60 x 40 16X no breakers	600 A	NEMA 3R	Main lugs (2x #2-600 kcmil)	59 x 40 x 14.5 ²	12	12
RNSB06B6040R	600A MCB NEMA 3R 60 x 40 16X no breakers	600 A	NEMA 3R	Main breaker ¹	60 x 40 x 14.5 ²	16	16
RNSB08L7245A	800A MLO NEMA 1 72 x 45 24X no breakers	800 A	NEMA 1	Main lugs (4x #2-600 kcmil)	72 x 45 x 11	20	20
RNSB08B7245A	800A MCB NEMA 1 72 x 45 24X no breakers	800 A	NEMA 1	Main breaker ¹	73 x 45 x 11	24	24
RNSB08L7245R	800A MLO NEMA 3R 72 x 45 24X no breakers	800 A	NEMA 3R	Main lugs (4x #2-600 kcmil)	71 x 45 x 14.5 ²	20	20
RNSB08B7245R	800A MCB NEMA 3R 72 x 45 24X no breakers	800 A	NEMA 3R	Main breaker ¹	72 x 45 x 14.5 ²	24	24
RNSB12L8445A	1200A MLO NEMA 1 84 x 45 32X no breakers	1200 A	NEMA 1	Main lugs (4x #2-600 kcmil)	84 x 45 x 11	28	28
RNSB12B8445A	1200A MCB NEMA 1 84 x 45 32X no breakers	1200 A	NEMA 1	Main breaker ¹	85 x 45 x 11	32	32
RNSB12L8445R	1200A MLO NEMA 3R 84 x 45 32X no breakers	1200 A	NEMA 3R	Main lugs (4x #2-600 kcmil)	83 x 45 x 14.5 ²	28	28
RNSB12B8445R	1200A MCB NEMA 3R 84 x 45 32X no breakers	1200 A	NEMA 3R	Main breaker ¹	84 x 45 x 14.5 ²	32	32

¹ X-space required for main breaker must be accounted for based on specific breaker selected.

² Depth does not include 0.9" of hanger bracket.

Available configurations and wire bend space

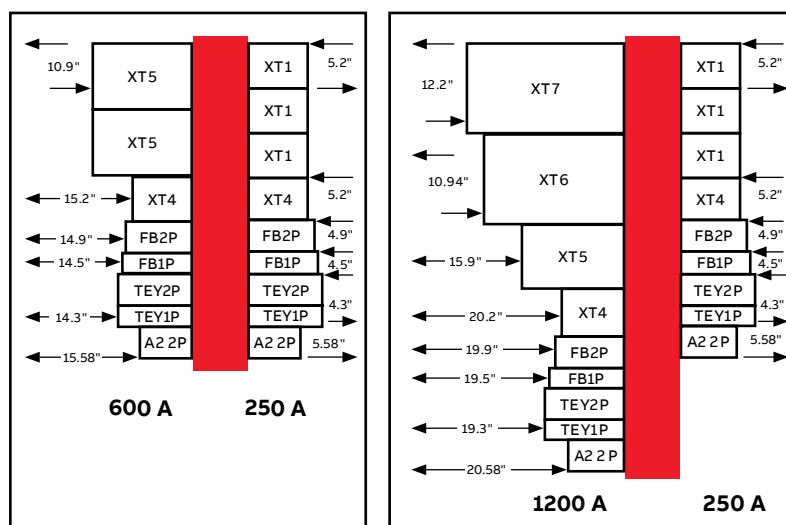

40" offset box

45" offset box

All ReliaGear® neXT panelboards are double sided. Wire bending space requirements restrict XT5-XT7 mounting to the left side of the interior.

Wire bend space

Breaker	Left mount space (in)	Right mount space (in)
40" offset enclosure		
XT5	10.9	-
XT4	15.2	5.2
XT1	15.2	5.2
FB 1-pole	14.5	4.5
FB 2-pole	14.9	4.9
TEY 1-pole	14.3	4.3
TEY 2-pole	14.3	4.3
A2 2-pole	15.58	5.58
45" offset enclosure		
XT7	12.2	-
XT6	10.94	-
XT5	15.9	-
XT4	20.2	5.2
XT1	20.2	5.2
FB 1-pole	19.5	4.5
FB 2-pole	19.9	4.9
TEY 1-pole	19.3	4.3
TEY 2-pole	19.3	4.3
A2 2-pole	20.58	5.58

Power panelboards

ReliaGear® neXT XT1-XT2 circuit breakers



Frame	Int. rating at 480 V AC	Trip unit	Poles	Amps	Load side lugs (AWG or kcmil)	Ordering code
XT1 ³	N (25 kA)	TMF	3	15	1x #10-2/0	XT1NU3015AYD000XXX
XT1 ³	N (25 kA)	TMF	3	20	1x #10-2/0	XT1NU3020AYD000XXX
XT1 ³	N (25 kA)	TMF	3	30	1x #10-2/0	XT1NU3030AYD000XXX
XT1 ³	N (25 kA)	TMF	3	40	1x #10-2/0	XT1NU3040AYD000XXX
XT1 ³	N (25 kA)	TMF	3	50	1x #10-2/0	XT1NU3050AYD000XXX
XT1 ³	N (25 kA)	TMF	3	60	1x #10-2/0	XT1NU3060AYD000XXX
XT1 ³	N (25 kA)	TMF	3	70	1x #10-2/0	XT1NU3070AYD000XXX
XT1 ³	N (25 kA)	TMF	3	100	1x #10-2/0	XT1NU3100AYD000XXX
XT1 ³	N (25 kA)	TMF	3	125	1x #10-2/0	XT1NU3125AYD000XXX
XT1 ³	S (35 kA)	TMF	3	15	1x #10-2/0	XT1SU3015AYD000XXX
XT1 ³	S (35 kA)	TMF	3	20	1x #10-2/0	XT1SU3020AYD000XXX
XT1 ³	S (35 kA)	TMF	3	30	1x #10-2/0	XT1SU3030AYD000XXX
XT1 ³	S (35 kA)	TMF	3	40	1x #10-2/0	XT1SU3040AYD000XXX
XT1 ³	S (35 kA)	TMF	3	50	1x #10-2/0	XT1SU3050AYD000XXX
XT1 ³	S (35 kA)	TMF	3	60	1x #10-2/0	XT1SU3060AYD000XXX
XT1 ³	S (35 kA)	TMF	3	70	1x #10-2/0	XT1SU3070AYD000XXX
XT1 ³	S (35 kA)	TMF	3	100	1x #10-2/0	XT1SU3100AYD000XXX
XT1 ³	S (35 kA)	TMF	3	125	1x #10-2/0	XT1SU3125AYD000XXX
XT1 ³	H (65 kA)	TMF	3	15	1x #10-2/0	XT1HU3015AYD000XXX
XT1 ³	H (65 kA)	TMF	3	20	1x #10-2/0	XT1HU3020AYD000XXX
XT1 ³	H (65 kA)	TMF	3	30	1x #10-2/0	XT1HU3030AYD000XXX
XT1 ³	H (65 kA)	TMF	3	35	1x #10-2/0	XT1HU3035AYD000XXX
XT1 ³	H (65 kA)	TMF	3	40	1x #10-2/0	XT1HU3040AYD000XXX
XT1 ³	H (65 kA)	TMF	3	50	1x #10-2/0	XT1HU3050AYD000XXX
XT1 ³	H (65 kA)	TMF	3	60	1x #10-2/0	XT1HU3060AYD000XXX
XT1 ³	H (65 kA)	TMF	3	70	1x #10-2/0	XT1HU3070AYD000XXX
XT1 ³	H (65 kA)	TMF	3	80	1x #10-2/0	XT1HU3080AYD000XXX
XT1 ³	H (65 kA)	TMF	3	90	1x #10-2/0	XT1HU3090AYD000XXX
XT1 ³	H (65 kA)	TMF	3	100	1x #10-2/0	XT1HU3100AYD000XXX
XT1 ³	H (65 kA)	TMF	3	110	1x #10-2/0	XT1HU3110AYD000XXX
XT1 ³	H (65 kA)	TMF	3	125	1x #10-2/0	XT1HU3125AYD000XXX
XT2	H (65 kA)	TMA	3	80	1x #10-2/0	XT2HU3080BYD000XXX
XT2	H (65 kA)	TMA	3	100	1x #10-2/0	XT2HU3100BYD000XXX
XT2	H (65 kA)	TMA	3	125	1x #10-2/0	XT2HU3125BYD000XXX
XT2	L (100 kA)	TMA	3	100	1x #10-2/0	XT2LU3100BYD000XXX
XT2	N (25 kA)	Ekip DIP LSI	3	125	1x #10-2/0	XT2NU31251YD000XXX
XT2	H (65 kA)	Ekip DIP LSI	3	60	1x #10-2/0	XT2HU30601YD000XXX
XT2	H (65 kA)	Ekip DIP LSI	3	100	1x #10-2/0	XT2HU31001YD000XXX
XT2	H (65 kA)	Ekip DIP LSI	3	125	1x #10-2/0	XT2HU31251YD000XXX
XT2	L (100 kA)	Ekip DIP LSI	3	60	1x #10-2/0	XT2LU30601YD000XXX
XT2	L (100 kA)	Ekip DIP LSI	3	100	1x #10-2/0	XT2LU31001YD000XXX
XT2	L (100 kA)	Ekip DIP LSI	3	125	1x #10-2/0	XT2LU31251YD000XXX

¹Additional Tmax® XT plug-in circuit breakers and accessories are available. Contact your local ABB sales team for more information.

²All breakers are standard rated (standard circuit breakers design considers 80% of the rated load). In case a 100% rated breaker is needed, a factory assembled ReliaGear neXT configuration will be required.

³Separate mounting rail required. See details in accessories table.

Power panelboards

ReliaGear® neXT XT4 circuit breakers



Frame	Int. rating at 480 V	Trip unit	Poles	Amps	Load side lugs (AWG or kcmil)	Ordering code
XT4	N (25 kA)	TMF	3	150	1x 3/0-350	XT4NU3150AY8000XXX
XT4	N (25 kA)	TMF	3	175	1x 3/0-350	XT4NU3175AY8000XXX
XT4	N (25 kA)	TMF	3	200	1x 3/0-350	XT4NU3200AY8000XXX
XT4	N (25 kA)	TMF	3	225	1x 3/0-350	XT4NU3225AY8000XXX
XT4	N (25 kA)	TMF	3	250	1x 3/0-350	XT4NU3250AY8000XXX
XT4	S (35 kA)	TMF	3	150	1x 3/0-350	XT4SU3150AY8000XXX
XT4	S (35 kA)	TMF	3	175	1x 3/0-350	XT4SU3175AY8000XXX
XT4	S (35 kA)	TMF	3	200	1x 3/0-350	XT4SU3200AY8000XXX
XT4	S (35 kA)	TMF	3	225	1x 3/0-350	XT4SU3225AY8000XXX
XT4	S (35 kA)	TMF	3	250	1x 3/0-350	XT4SU3250AY8000XXX
XT4	H (65 kA)	TMF	3	150	1x 3/0-350	XT4HU3150AY8000XXX
XT4	H (65 kA)	TMF	3	150	1x 4-300	XT4HU3150AYJ000XXX
XT4	H (65 kA)	TMF	3	175	1x 3/0-350	XT4HU3175AY8000XXX
XT4	H (65 kA)	TMF	3	200	1x 3/0-350	XT4HU3200AY8000XXX
XT4	H (65 kA)	TMF	3	225	1x 3/0-350	XT4HU3225AY8000XXX
XT4	H (65 kA)	TMF	3	250	1x 3/0-350	XT4HU3250AY8000XXX
XT4	N (25 kA)	TMA	3	150	1x 4-300	XT4NU3150BYJ000XXX
XT4	N (25 kA)	TMA	3	175	1x 4-300	XT4NU3175BYJ000XXX
XT4	N (25 kA)	TMA	3	200	1x 4-300	XT4NU3200BYJ000XXX
XT4	N (25 kA)	TMA	3	225	1x 4-300	XT4NU3225BYJ000XXX
XT4	N (25 kA)	TMA	3	250	1x 3/0-350	XT4NU3250BY8000XXX
XT4	H (65 kA)	TMA	3	125	1x 4-300	XT4HU3125BYJ000XXX
XT4	H (65 kA)	TMA	3	150	1x 4-300	XT4HU3150BYJ000XXX
XT4	H (65 kA)	TMA	3	175	1x 4-300	XT4HU3175BYJ000XXX
XT4	H (65 kA)	TMA	3	200	1x 4-300	XT4HU3200BYJ000XXX
XT4	H (65 kA)	TMA	3	225	1x 4-300	XT4HU3225BYJ000XXX
XT4	H (65 kA)	TMA	3	250	1x 3/0-350	XT4HU3250BY8000XXX
XT4	L (100 kA)	TMA	3	100	1x 4-300	XT4LU3100BYJ000XXX
XT4	L (100 kA)	TMA	3	150	1x 4-300	XT4LU3150BYJ000XXX
XT4	L (100 kA)	TMA	3	175	1x 4-300	XT4LU3175BYJ000XXX
XT4	L (100 kA)	TMA	3	200	1x 4-300	XT4LU3200BYJ000XXX
XT4	L (100 kA)	TMA	3	225	1x 4-300	XT4LU3225BYJ000XXX
XT4	L (100 kA)	TMA	3	250	1x 3/0-350	XT4LU3250BY8000XXX
XT4	H (65 kA)	Ekip DIP LS/I	3	150	1x 4-300	XT4HU3150EYJ000XXX
XT4	H (65 kA)	Ekip DIP LS/I	3	225	1x 4-300	XT4HU3225EYJ000XXX
XT4	N (25 kA)	Ekip DIP LSI	3	100	1x 4-300	XT4NU3100IYJ000XXX
XT4	N (25 kA)	Ekip DIP LSI	3	225	1x 4-300	XT4NU3225IYJ000XXX
XT4	N (25 kA)	Ekip DIP LSI	3	250	1x 3/0-350	XT4NU3250IY8000XXX
XT4	S (35 kA)	Ekip DIP LSI	3	100	1x 4-300	XT4SU3100IYJ000XXX
XT4	S (35 kA)	Ekip DIP LSI	3	250	1x 3/0-350	XT4SU3250IY8000XXX
XT4	H (65 kA)	Ekip DIP LSI	3	100	1x 4-300	XT4HU3100IYJ000XXX
XT4	H (65 kA)	Ekip DIP LSI	3	150	1x 4-300	XT4HU3150IYJ000XXX
XT4	H (65 kA)	Ekip DIP LSI	3	225	1x 4-300	XT4HU3225IYJ000XXX
XT4	H (65 kA)	Ekip DIP LSI	3	250	1x 3/0-350	XT4HU3250IY8000XXX
XT4	L (100 kA)	Ekip DIP LSI	3	40	1x 14-1/0	XT4LU3040IYG000XXX
XT4	L (100 kA)	Ekip DIP LSI	3	60	1x 14-1/0	XT4LU3060IYG000XXX
XT4	L (100 kA)	Ekip DIP LSI	3	100	1x 4-300	XT4LU3100IYJ000XXX
XT4	L (100 kA)	Ekip DIP LSI	3	150	1x 4-300	XT4LU3150IYJ000XXX
XT4	L (100 kA)	Ekip DIP LSI	3	250	1x 3/0-350	XT4LU3250IY8000XXX

¹Additional Tmax® XT plug-in circuit breakers and accessories are available. Contact your local ABB sales team for more information.

²All breakers are standard rated (standard circuit breakers design considers 80% of the rated load). In case a 100% rated breaker is needed, a factory assembled ReliaGear neXT configuration will be required.

Courtesy of Steven Engineering, Inc - (800) 258-9200 - sales@steveneng.com - www.stevenengineering.com

Power panelboards

ReliaGear® neXT XT5-XT7 circuit breakers



Frame	Int. rating at 480 V	Trip unit	Poles	Amps	Load side lugs (AWG or kcmil)	Ordering code
XT5	N (25 kA)	TMA	3	300	2x 2/0-500	XT5NU330ABYN000XXX
XT5	N (25 kA)	TMA	3	400	2x 2/0-500	XT5NU340ABYN000XXX
XT5	N (25 kA)	TMA	3	500	2x 2/0-500	XT5NU350BBYN000XXX
XT5	N (25 kA)	TMA	3	600	2x 2/0-500	XT5NU360BBYN000XXX
XT5	S (35 kA)	TMA	3	300	2x 2/0-500	XT5SU330ABYN000XXX
XT5	S (35 kA)	TMA	3	400	2x 2/0-500	XT5SU340ABYN000XXX
XT5	S (35 kA)	TMA	3	600	2x 2/0-500	XT5SU360BBYN000XXX
XT5	H (65 kA)	TMA	3	300	2x 2/0-500	XT5HU330ABYN000XXX
XT5	H (65 kA)	TMA	3	400	2x 2/0-500	XT5HU340ABYN000XXX
XT5	H (65 kA)	TMA	3	500	2x 2/0-500	XT5HU350BBYN000XXX
XT5	H (65 kA)	TMA	3	600	2x 2/0-500	XT5HU360BBYN000XXX
XT5	L (100 kA)	TMA	3	300	2x 2/0-500	XT5LU330ABYN000XXX
XT5	L (100 kA)	TMA	3	400	2x 2/0-500	XT5LU340ABYN000XXX
XT5	L (100 kA)	TMA	3	600	2x 2/0-500	XT5LU360BBYN000XXX
XT5	N (25 kA)	Ekip DIP LSI	3	400	2x 2/0-500	XT5NU340AFYN000XXX
XT5	N (25 kA)	Ekip DIP LSI	3	600	2x 2/0-500	XT5NU360BFYN000XXX
XT5	S (35 kA)	Ekip DIP LSI	3	400	2x 2/0-500	XT5SU340AFYN000XXX
XT5	S (35 kA)	Ekip DIP LSI	3	600	2x 2/0-500	XT5SU360BFYN000XXX
XT5	H (65 kA)	Ekip DIP LSI	3	400	2x 2/0-500	XT5HU340AFYN000XXX
XT5	H (65 kA)	Ekip DIP LSI	3	600	2x 2/0-500	XT5HU360BFYN000XXX
XT5	L (100 kA)	Ekip DIP LSI	3	400	2x 2/0-500	XT5LU340AFYN000XXX
XT5	L (100 kA)	Ekip DIP LSI	3	600	2x 2/0-500	XT5LU360BFYN000XXX
XT6	N (25 kA)	TMA	3	800	3x 2/0-400	XT6NU3800BYU000XXX
XT6	S (35 kA)	TMA	3	800	3x 2/0-400	XT6SU3800BYU000XXX
XT6	H (65 kA)	TMA	3	800	3x 2/0-400	XT6HU3800BYU000XXX
XT6	N (25 kA)	Ekip DIP LSI	3	800	3x 2/0-400	XT6NU3800FYU000XXX
XT6	H (65 kA)	Ekip DIP LSI	3	800	3x 2/0-400	XT6HU3800FYU000XXX
XT7	S (35 kA)	Ekip DIP LSI	3	1000	4x 4/0-500	XT7SU310DFYW000XXX
XT7	S (35 kA)	Ekip DIP LSI	3	1200	4x 4/0-500	XT7SU312EFYW000XXX
XT7	H (65 kA)	Ekip DIP LSI	3	800	4x 4/0-500	XT7HU380CFYW000XXX
XT7	H (65 kA)	Ekip DIP LSI	3	1000	4x 4/0-500	XT7HU310DFYW000XXX
XT7	H (65 kA)	Ekip DIP LSI	3	1200	4x 4/0-500	XT7HU312EFYW000XXX
XT7	S (35 kA)	Ekip Touch LSI	3	1000	4x 4/0-500	XT7SU310DPYW000XXR
XT7	S (35 kA)	Ekip Touch LSI	3	1200	4x 4/0-500	XT7SU312EPYW000XXR
XT7	H (65 kA)	Ekip Touch LSI	3	1000	4x 4/0-500	XT7HU310DPYW000XXR
XT7	H (65 kA)	Ekip Touch LSI	3	1200	4x 4/0-500	XT7HU312EPYW000XXR
XT7	L (100 kA)	Ekip Touch LSI	3	1200	4x 4/0-500	XT7LU312EPYW000XXR
XT7	S (35 kA)	Ekip Touch LSIG	3	1200	4x 4/0-500	XT7SU312EQYW000XXR
XT7	H (65 kA)	Ekip Touch LSIG	3	1200	4x 4/0-500	XT7HU312EQYW000XXR
XT7	L (100 kA)	Ekip Touch LSIG	3	1200	4x 4/0-500	XT7LU312EQYW000XXR

¹Additional Tmax® XT plug-in circuit breakers and accessories are available. Contact your local ABB sales team for more information.

²All breakers are standard rated (standard circuit breakers design considers 80% of the rated load). In case a 100% rated breaker is needed, a factory assembled ReliaGear neXT configuration will be required.

³If 750 kcmil lugs are needed, a factory assembled ReliaGear neXT configuration will be required.

Power panelboards

ReliaGear® neXT TEY and Record Plus FB circuit breakers



1-pole FB



2-pole FB



1-pole TEY



2-pole TEY

Frame	Int. rating at 480 V	Trip unit	Poles	Amps	Phase	Load side lugs (AWG or kcmil)	Ordering code
TEY	D (25 kA)	TMF	1	20	A	#14-#10 (Cu), #12-#10 (Al)	TEYADED0AAXXXXXX
TEY	D (25 kA)	TMF	1	20	B	#14-#10 (Cu), #12-#10 (Al)	TEYADED0BAXXXXXX
TEY	D (25 kA)	TMF	1	20	C	#14-#10 (Cu), #12-#10 (Al)	TEYADED0CAXXXXXX
TEY	H (35 kA)	TMF	1	20	A	#14-#10 (Cu), #12-#10 (Al)	TEYAHED0AAXXXXXX
TEY	H (35 kA)	TMF	1	20	B	#14-#10 (Cu), #12-#10 (Al)	TEYAHED0BAXXXXXX
TEY	H (35 kA)	TMF	1	20	C	#14-#10 (Cu), #12-#10 (Al)	TEYAHED0CAXXXXXX
TEY	L (65 kA)	TMF	1	20	A	#14-#10 (Cu), #12-#10 (Al)	TEYALEDOAAXXXXXX
TEY	L (65 kA)	TMF	1	20	B	#14-#10 (Cu), #12-#10 (Al)	TEYALEDOBAXXXXXX
TEY	L (65 kA)	TMF	1	20	C	#14-#10 (Cu), #12-#10 (Al)	TEYALEDOCAXXXXXX
TEY	D (25 kA)	TMF	2	40	AB	#10-#6 (Cu), #8-#4 (Al)	TEYADFHABXXXXXX
TEY	D (25 kA)	TMF	2	100	AB	#4-#1 (Cu), #2-1/0 (Al)	TEYADFQABDXXXXXX
TEY	D (25 kA)	TMF	2	40	BC	#10-#6 (Cu), #8-#4 (Al)	TEYADFHBCEXXXXXX
TEY	D (25 kA)	TMF	2	100	BC	#4-#1 (Cu), #2-1/0 (Al)	TEYADFQBCDXXXXXX
TEY	D (25 kA)	TMF	2	40	AC	#10-#6 (Cu), #8-#4 (Al)	TEYADFHACBXXXXXX
TEY	D (25 kA)	TMF	2	100	AC	#4-#1 (Cu), #2-1/0 (Al)	TEYADFQACDXXXXXX
FB	V (35 kA) ³	TMF	1	20	A	#14-#10	NEFBV16TE020R2A
FB	V (35 kA) ³	TMF	1	20	B	#14-#10	NEFBV16TE020R2B
FB	V (35 kA) ³	TMF	1	20	C	#14-#10	NEFBV16TE020R2C
FB	N (65 kA) ³	TMF	1	20	A	#14-#10	NEFBN16TE020R2A
FB	N (65 kA) ³	TMF	1	30	A	#10-4	NEFBN16TE030R2A
FB	N (65 kA) ³	TMF	1	20	B	#14-#10	NEFBN16TE020R2B
FB	N (65 kA) ³	TMF	1	30	B	#10-4	NEFBN16TE030R2B
FB	N (65 kA) ³	TMF	1	20	C	#14-#10	NEFBN16TE020R2C
FB	N (65 kA) ³	TMF	1	30	C	#10-4	NEFBN16TE030R2C
FB	V (35 kA)	TMF	2	100	AB	#4-1/0	NEFBV26TE100R2AB
FB	V (35 kA)	TMF	2	100	BC	#4-1/0	NEFBV26TE100R2BC
FB	V (35 kA)	TMF	2	100	AC	#4-1/0	NEFBV26TE100R2AC
FB	N (65 kA)	TMF	2	20	AB	#14-#10	NEFBN26TE020R2AB
FB	N (65 kA)	TMF	2	30	AB	#10-4	NEFBN26TE030R2AB
FB	N (65 kA)	TMF	2	40	AB	#10-4	NEFBN26TE040R2AB
FB	N (65 kA)	TMF	2	50	AB	#10-4	NEFBN26TE050R2AB
FB	N (65 kA)	TMF	2	60	AB	#10-4	NEFBN26TE060R2AB
FB	N (65 kA)	TMF	2	100	AB	#4-1/0	NEFBN26TE100R2AB
FB	N (65 kA)	TMF	2	20	BC	#14-#10	NEFBN26TE020R2BC
FB	N (65 kA)	TMF	2	30	BC	#10-4	NEFBN26TE030R2BC
FB	N (65 kA)	TMF	2	40	BC	#10-4	NEFBN26TE040R2BC
FB	N (65 kA)	TMF	2	50	BC	#10-4	NEFBN26TE050R2BC
FB	N (65 kA)	TMF	2	60	BC	#10-4	NEFBN26TE060R2BC
FB	N (65 kA)	TMF	2	100	BC	#4-1/0	NEFBN26TE100R2BC
FB	N (65 kA)	TMF	2	20	AC	#14-#10	NEFBN26TE020R2AC
FB	N (65 kA)	TMF	2	30	AC	#10-4	NEFBN26TE030R2AC
FB	N (65 kA)	TMF	2	40	AC	#10-4	NEFBN26TE040R2AC
FB	N (65 kA)	TMF	2	50	AC	#10-4	NEFBN26TE050R2AC
FB	N (65 kA)	TMF	2	60	AC	#10-4	NEFBN26TE060R2AC
FB	N (65 kA)	TMF	2	100	AC	#4-1/0	NEFBN26TE100R2AC

¹Additional TEY and FB plug-in circuit breakers and accessories are available. Contact your local ABB sales team for more information.

²All breakers are standard rated (standard circuit breakers design considers 80% of the rated load). In case a 100% rated breaker is needed, a factory assembled ReliaGear neXT configuration will be required.

³Interrupt rating at 240 V AC.

Power panelboards

ReliaGear® neXT Formula A2 circuit breakers



2-pole Formula A2

ReliaGear® neXT Formula A2 circuit breakers for branch feeder circuits^{1,2,3}

Ordering code	Frame	Int. rating at 240 V	Trip unit	Poles	Amps	Phase	Cu load side lugs (AWG or kcmil)	Al load side lugs (AWG or kcmil)
A2A2125ABDXXXX	A2	A (10 kA)	TMF	2	125	AB	1x 1-250	1x 2/0-300
A2A2125ACDXXXX	A2	A (10 kA)	TMF	2	125	AC	1x 1-250	1x 2/0-300
A2A2150ABDXXXX	A2	A (10 kA)	TMF	2	150	AB	1x 1-250	1x 2/0-300
A2A2150ACDXXXX	A2	A (10 kA)	TMF	2	150	AC	1x 1-250	1x 2/0-300
A2A2200ABDXXXX	A2	A (10 kA)	TMF	2	200	AB	1x 1-250	1x 2/0-300
A2A2200ACDXXXX	A2	A (10 kA)	TMF	2	200	AC	1x 1-250	1x 2/0-300
A2N2125ABDXXXX	A2	A (10 kA)	TMF	2	125	AB	1x 1-250	1x 2/0-300
A2N2125ACDXXXX	A2	N (25 kA)	TMF	2	125	AC	1x 1-250	1x 2/0-300
A2N2150ABDXXXX	A2	N (25 kA)	TMF	2	150	AB	1x 1-250	1x 2/0-300
A2N2150ACDXXXX	A2	N (25 kA)	TMF	2	150	AC	1x 1-250	1x 2/0-300
A2N2200ABDXXXX	A2	N (25 kA)	TMF	2	200	AB	1x 1-250	1x 2/0-300
A2N2200ACDXXXX	A2	N (25 kA)	TMF	2	200	AC	1x 1-250	1x 2/0-300
A2N2250ABDXXXX	A2	N (25 kA)	TMF	2	250	AB	1x 1-250	—

¹ Additional Formula A2 plug-on circuit breakers are available. Contact your local ABB sales team for more information.

² All breakers are standard rated (standard circuit breakers design considers 80% of the rated load). In case a 100% rated breaker is needed, a factory-assembled ReliaGear neXT configuration will be required.

³ 250 A Formula A2 plug-in breakers with 350 kcmil Al load side lugs available. Contact your local ABB sales team for more information.

Power panelboards

ReliaGear® neXT circuit breaker X-spacing

Each circuit breaker frame has specific requirements for the number of mounting positions (**X-spaces**). Thanks to the optimized dimensions of the XT1, the mounting positions required are lower when two or five breakers are mounted

close to one another. RELTs also require **X-space**, since they are plug-in modules. Refer to the table below and add up the number of **X-spaces** required for each breaker frame.

Frame	Max. ampacity (A)	Poles	X-spaces
Single XT1	125	3	3
Two XT1	125	3	5
Five XT1	125	3	11
XT4	250	3	3
XT5 ¹	600	3	4
XT6	800	3	6
XT7	1200	3	6
FB	100	1	1
FB	100	2	2
TEY	70	1	1
TEY	125	2	2
A2	250	2	2
RELT	—	—	3

¹Tmax® XT5 with electrical accessories requires 1 (one) additional X-space.




Single XT1




Two XT1 = 16% space saving




Five XT1 = 26% space saving



Single XT1 mounting rail



Two XT1 mounting rail



Five XT1 mounting rail

The small footprint of the XT1 allows this panel to offer multiple options to improve circuit breaker density. As you configure and order ReliaGear® neXT panelboards, you'll notice that XT1 are grouped in quantities of one, two or five. As part of this feature, unique mounting brackets are required when adding XT1 breaker assemblies. See above for X-space and mounting brackets required. These additional rails are not included with SuperBox configurations and must be ordered as accessories.

Order codes for XT1 mounting rails

- SR1XBF for 1 single XT1 breaker
- SR2XBF for 2 adjacent XT1 breakers
- SR5XBF for 5 adjacent XT1 breakers

Power panelboards

ReliaGear® neXT breaker accessories



Auxiliary contacts



Shunt trip



Fixed padlock



RELT



Mounting rail

Group	Type	Volts AC	XT1	XT2	XT4	XT5 ²	XT6	XT7	TEY	FB	A2
Auxiliary contacts Q = Indication of the status of the circuit breaker SY = Bell alarm	AUX-C 1 Q + 1 SY	250					KXTAAXCQSYFP				
	AUX-C 2 Q + 1 SY	250					KXTAAXC2QSYFP				
	AUX-C 1 Q + 1 SY	24					KXTAAXCDQSYFP				
	AUX-C 3 Q + 1 SY	24					KXTDAXCD3QSYFP				
	AUX 4Q	24						ZE1AUX4D			
	AUX 4Q	400						ZE1AUX4			
	AUX 1 SY	24						ZE1BAD			
Shunt trip	AUX 1 SY	250						ZE1BA			
	Pre-cabled (except for XT7)	24		KXTASORCFPB			KXTFYOCFPD	ZEASA			
	Pre-cabled (except for XT7)	110		KXTASORCFPD			KXTFYOCFPD	ZEASE			
	Pre-cabled (except for XT7)	220		KXTASORCFPE				ZEASG			
Undervoltage release	Pre-cabled (except for XT7)	24		KXTAUVRCPF1			KXTFYUC1	ZEUAU			
	Pre-cabled (except for XT7)	110		KXTAUVRCPF4			KXTFYUC4	ZEUAU			
	Pre-cabled (except for XT7)	220		KXTAUVRCPF5			KXTFYUC5	ZEUAU			
	Pre-cabled (except for XT7)	220		KXTAUVRCPF5			KXTFYUC5	ZEUAU			
Fixed padlock ¹	Open position	–	KXTBPLLOP	KXTCPLLOP	KXT5PLLOP	KXT6PLLOP	KXT7PLLOP				
	Open/closed position	–	KXTBPLLOPCL	KXTCPLLOPCL	KXT5PLLOPLC	KXT6PLLOPLC		TEYXPLD1	FB1PF		
Removable padlock	Open position: KA2LD	–									KA2LDOR
RELT	RELT kit ⁴	120/240						RT04A			
	RELT kit ⁴	480						RT04B			
	RELT kit ⁴	600						RT04C			
	RELT wire connector	–						CN003			
Mounting rail	1 single Tmax® XT1	–	SR1XBF								
	2 adjacent Tmax® XT1	–	SR2XBF								
	5 adjacent Tmax® XT1	–	SR5XBF								
Blank and fillers	1X blank + filler	–									SR01BF
	1X blank only	–									SR01BB
	2X blank + filler	–									SR02BF
	2X blank only	–									SR02BB
	3X blank + filler	–									SR03BF
	3X blank only	–									SR03BB
	XT1 blank only	–	SRT1BB								

¹ Padlocks are not included in the kit.


² Tmax® XT5 electrical accessories require 1 (one) extra X-space for installation.

³ Additional Tmax XT accessories are available. Contact your local ABB sales team for more information.

⁴ Requires XT7 equipped with Ekip Touch or above trip unit, 3 X-space factor required.

Power panelboards

ReliaGear® neXT circuit breaker test fixture

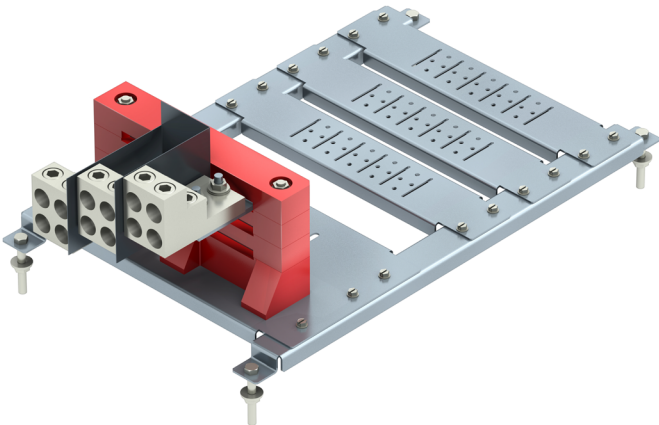

The ReliaGear® neXT circuit breaker test fixture simplifies ReliaGear neXT plug-in circuit breaker testing. With a specifically designed bus stack, quickly install and easily test ReliaGear neXT circuit breakers to confirm they are operational and within applicable standards and tolerances.

A single test fixture covers the complete ReliaGear neXT circuit breakers offering from XT1 to XT7.

Circuit Breaker Frame	Rating (A)	Ordering Code
XT1	125	RGXTBTF
XT2	125	
XT4	250	
XT5	600	
XT6	800	
XT7	1200	

Surge protective devices

Section 8

Surge protective devices

Table of contents

DIN rail surge protective devices

Power series	8-1
Photovoltaic (PV) series	8-2
Data and Signal Protection series	8-2

Hardwired surge protective devices

OVRHR series	8-3
OVRHT3D series	8-3

Surge protective devices

Power - DIN rail series



UL 1449 5th edition

Poles	Voltage	Description	Ordering Code	Alt. ordering code
1	120	1-Phase, 2 wire	2CTB802341R0000	OVR T2 15-150 P U
3	277	3-Phase Delta, 4 wire	2CTB802345R2400	OVR T2 3L 40-320PU
3	480	3-Phase Delta, 4 wire	2CTB802345R3400	OVR T2 3L 40-550PU
3	480/277	3-Phase Wye, 5 wire	2CTB802346R2400	OVR T2 3N 40-320PU
3	480/277	3-Phase Wye, 5 wire	2CTB802346R3400	OVR T2 3N 40-550PU



UL 1449 5th edition

Poles	Voltage	Description	Ordering Code	Alt. ordering code
1	120	1-Phase, 2 wire	2CTB802341R2100	OVR T2 40-150 P TS U
1	120	1-Phase, 2 wire	2CTB802341R2000	OVR T2 40-150 P U
1	277	1-Phase, 2 wire	2CTB802341R2500	OVR T2 40-320 P TS U
1	347	1-Phase, 2 wire	2CTB802341R2900	OVR T2 40-440 P TS U
1	480	1-Phase, 2 wire	2CTB802341R3300	OVR T2 40-550 P TS U
1	600	1-Phase, 2 wire	2CTB802341R3700	OVR T2 40-660 P TS U
1	400/690	1-Phase	2CTB815101R9300	OVR T1 25 440-50
1	277	1-Phase, 2 wire	2CTB802341R0400	OVR T2 15-320 P U
1	120	1-Phase, 3 wire	2CTB802342R0000	OVR T2 1N 15-150 P U
1	277	1-Phase, 3 wire	2CTB802342R0400	OVR T2 1N 15-320 P U
1	120	1-Phase, 3 wire	2CTB802342R2100	OVR T2 1N 40-150 P TS U
1	277	1-Phase, 3 wire	2CTB802342R2500	OVR T2 1N 40-320 P TS U
1	347	1-Phase, 3 wire	2CTB802342R2900	OVR T2 1N 40-440 P TS U
1	480	1-Phase, 3 wire	2CTB802342R3300	OVR T2 1N4 0-550 P TS U
1	600	1-Phase, 3 wire	2CTB802342R3700	OVR T2 1N 40-660 P TS U
2	240/120	2-Phase, 3 wire	2CTB802343R0000	OVR T2 2L 15-150 P U
2	480/277	2-Phase, 3 wire	2CTB802343R0400	OVR T2 2L 15-320 P U
2	240/120	2-Phase, 3 wire	2CTB802343R2100	OVR T2 2L 40-150 P TS U
2	480/277	2-Phase, 3 wire	2CTB802343R2500	OVR T2 2L 40-320 P TS U
2	480/277	2-Phase, 3 wire	2CTB802343R2400	OVR T2 2L 40-320 P U
2	240/120	2-Phase, 4 wire	2CTB802344R0000	OVR T2 2N 15-150 P U
2	480/277	2-Phase, 4 wire	2CTB802344R0400	OVR T2 2N 15-320 P U
2	240/120	2-Phase, 4 wire	2CTB802344R2100	OVR T2 2N 40-150 P TS U
2	480/277	2-Phase, 4 wire	2CTB802344R2500	OVR T2 2N 40-320 P TS U
2	600/347	2-Phase, 4 wire	2CTB802344R2900	OVR T2 2N 40-440 P TS U
2	480/277	2-Phase, 4 wire	2CTB802344R3300	OVR T2 2N 40-550 P TS U
2	600/347	2-Phase, 4 wire	2CTB802344R3700	OVR T2 2N 40-660 P TS U

Table continues on next page.

Surge protective devices

Power - DIN rail series

UL 1449 5th edition

Poles	Voltage	Description	Ordering Code	Alt. ordering code
3	120	3-Phase Delta, 4 wire	2CTB802345R0000	OVR T2 3L 15150 P U
3	120	3-Phase Delta, 4 wire	2CTB802345R2100	OVR T2 3L 40-150 P TS U
3	277	3-Phase Delta, 4 wire	2CTB802345R2500	OVR T2 3L 40-320 P TS U
3	347	3-Phase Delta, 4 wire	2CTB802345R2900	OVR T2 3L 40-440 P TS U
3	480	3-Phase Delta, 4 wire	2CTB802345R3300	OVR T2 3L 40-550 P TS U
3	208/120	3-Phase Wye, 5 wire	2CTB802346R0000	OVR T2 3N 15-150 P U
3	480/277	3-Phase Wye, 5 wire	2CTB802346R0400	OVR T2 3N 15-320 P U
3	208/120	3-Phase Wye, 5 wire	2CTB802346R2100	OVR T2 3N 40-150 P TS U
3	480/277	3-Phase Wye, 5 wire	2CTB802346R2500	OVR T2 3N 40-320 P TS U
3	600/347	3-Phase Wye, 5 wire	2CTB802346R2900	OVR T2 3N 40-440 P TS U
3	480/277	3-Phase Wye, 5 wire	2CTB802346R3300	OVR T2 3N 40-550 P TS U
3	600/347	3-Phase Wye, 5 wire	2CTB802346R3700	OVR T2 3N 40-660 P TS U

Surge protective devices

Photovoltaic (PV) - DIN rail series

UL 1449 5th Edition



Poles	Voltage	Description	Ordering Code	Alt. ordering code
3	1500	1500V Photovoltaic SPD	2CTB802400R1500	OVR PV T2 40-1500 P
3	1500	1500V Photovoltaic SPD with Dry contacts	2CTB802401R1500	OVR PV T2 40-1500 P TS
3	1000	1000V Photovoltaic SPD	2CTB802400R1000	OVR PV T2 40-1000 P
3	1000	1000V Photovoltaic SPD with Dry contacts	2CTB802401R1000	OVR PV T2 40-1000 P TS
3	1000	1000V Photovoltaic Cartridge	2CTB802402R1000	OVR PV T2 40-1000 C
3	1500	1500V Photovoltaic Cartridge	2CTB802402R1500	OVR PV T2 40-1500 C

Surge protective devices

Data and signal protection - DIN rail series

UL 497B 4th Edition

Poles	Max. Voltage	Description	Ordering Code	Alt. ordering code
3	15 V	DATA SPD FOR RS485 SLIM 7mm WIDE	7TCA085400R0551	OVRSLRS485UL
3	15 V	DATA SPD FOR RS485 SLIM 7mm WIDE w/ LED	7TCA085400R0552	OVRSLRS485LUL
12	15 V	DATA SPD, 4-RS485 w/ SHIELDS SCREW TERM	7TCA085400R0572	OVRRS485QUL
12	15 V	DATA SPD, 4-RS485 w/ SHIELDS PUSH TERMS	7TCA085400R0579	OVRRS485QPTUL
12	30 V	DATA SPD FOR 4 PAIR SIGNAL 30V	7TCA085400R0568	OVR30QUL
12	30 V	DATA SPD FOR 4pr SIGNAL PUSH TERM 30V	7TCA085400R0575	OVR30QPTUL
3	6 V	DATA SPD FOR 2-WIRE SIGNAL 7mm SLIM 6V	7TCA085400R0527	OVRSL06UL
4	6 V	DATA SPD, 2-WIRE ISOSHIELD 7mm SLIM 6V	7TCA085400R0528	OVRSL06IUL
3	30V	DATA SPD, 2-WIRE SIGNAL 7mm SLIM 30V	7TCA085400R0535	OVRSL30UL
4	30 V	DATA SPD, 2-WIRE ISOSHIELD 7mm SLIM 30V	7TCA085400R0536	OVRSL30IUL
3	180 V	DATA SPD, 2-WIRE SIGNAL 7mm SLIM 180V	7TCA085400R0547	OVRSL180UL

Surge protective devices series

OVRHR series

UL 1449 5th Edition

NEMA Type	Voltage	Max surge current rating	Description	Ordering Code	Alt. ordering code
UL 1449 Type 1	240/120 V	36 kA	2-phase, 3-wire + ground	2CJC903120S0004	OVRHR361202S

Surge protective devices series

OVRHT3D series

UL 1449 5th Edition

NEMA Type	Voltage	Max surge current rating	Description	Ordering Code	Alt. ordering code
UL 1449 Type 1	240V	50 kA	1-phase, 2-wire + ground	2CJC705240P0000	OVRHT3D502401P
UL 1449 Type 1	277V	50 kA	1-phase, 2-wire + ground	2CJC705277P0000	OVRHT3D502771P
UL 1449 Type 1	240/120V	50 kA	2-phase, 3-wire + ground	2CJC705120S0000	OVRHT3D501202S
UL 1449 Type 1	208/120V	50 kA	3-phase Wye, 4-wire + ground	2CJC705120Y0000	OVRHT3D501203Y
UL 1449 Type 1	380/220V	50 kA	3-phase Wye, 4-wire + ground	2CJC705220Y0000	OVRHT3D502203Y
UL 1449 Type 1	480/277V	50 kA	3-phase Wye, 4-wire + ground	2CJC705277Y0000	OVRHT3D502773Y
UL 1449 Type 1	240V	50 kA	3-phase Delta, 3-wire + ground	2CJC705240D0000	OVRHT3D502403D
UL 1449 Type 1	380V	50 kA	3-phase Delta, 3-wire + ground	2CJC705380D0000	OVRHT3D503803D
UL 1449 Type 1	480V	50 kA	3-phase Delta, 3-wire + ground	2CJC705480D0000	OVRHT3D504803D

Automatic transfer switches



Section 9
Automatic transfer switches

Table of contents

TruONE™ ATS	
Ordering code construction	9-1
Switches	9-2
Accessories	9-2

TruONE™ automatic transfer switch

Ordering code construction

ABB TruONE automatic transfer switch, open transition, 1000 amperes, UL, 3 phase + Neutral (3ph, 4 wire), Level 4 controls, 200–480 VAC voltage area, bottom entry (sources on bottom, load on top).

OX	A	1000	U	3	S	4	Q		B
ABB Brand OX = ABB TruONE ATS									
ATS type A = Open transition I - II (without stable OFF position for load disconnection) B = Delayed transition I - O - II (with stable OFF position for load disconnection)								Cabling direction Open style, no enclosure B = Bottom entry (sources on bottom, load on top) T = Top entry (sources on the top, load on the bottom)	
ATS size UL = 30, 60, 100, 125, 160, 200, 260, 400, 600, 800, 1000, 1200 IEC = 200, 250, 315, 400, 500, 630, 800, 1000, 1250, 1600								Enclosure rating Blank = _ (blank) Open style, no enclosure	
Standard E = IEC U = UL								Voltage code Q = 200–480 VAC	
Phase poles 1 = 1-pole 2 = 2-pole 3 = 3-pole								Controller 2 = Level 2 controls (DIP) 3 = Level 3 controls (LCD) 4 = Level 4 controls (Touch)	
								Neutral S = Switched Neutral O = Overlapping Neutral X = None	

Controller	Mode of control	Features
Level 2	DIP switch	Standard control with limited options
Level 3	LCD screen	Advanced control with optional module for communication and programmable I/O module
Level 4	Touch screen	Superior control with level 3 features and power measurement & predictive maintenance

Reference only. For stocked items, see following pages.

TruONE™ automatic transfer switch

Switches and accessories



TruONE switches

Amp	Poles	Controller	Voltage code	Transition Type	Cabiling direction	Ordering code
60	3	Level 2 controls (DIP)	200-480 VAC	Delayed	Top	AXB60U3X2QT
100	3	Level 3 controls (LCD)	200-480 VAC	Open	Bottom	OXA100U3X3QB
100	3	Level 3 controls (LCD)	200-480 VAC	Open	Top	OXA100U3X3QT
160	4	Level 3 controls (LCD)	200-480 VAC	Open	Bottom	OXA160U3S3QB
200	3	Level 2 controls (DIP)	200-480 VAC	Open	Bottom	OXA200U3X2QB
200	3	Level 3 controls (LCD)	200-480 VAC	Open	Bottom	OXA200U3X3QB
200	4	Level 3 controls (LCD)	200-480 VAC	Open	Bottom	OXA200U3S3QB
200	3	Level 3 controls (LCD)	200-480 VAC	Delayed	Bottom	AXB200U3X3QB
260	3	Level 3 controls (LCD)	200-480 VAC	Open	Bottom	OXA260U3X3QB
400	3	Level 3 controls (LCD)	200-480 VAC	Open	Bottom	OXA400U3X3QB
400	3	Level 3 controls (LCD)	200-480 VAC	Delayed	Bottom	AXB400U3X3QB
600	3	Level 3 controls (LCD)	200-480 VAC	Open	Bottom	OXA600U3X3QB
600	4	Level 3 controls (LCD)	200-480 VAC	Open	Bottom	OXA600U3S3QB
600	4	Level 4 controls (Touch)	200-480 VAC	Delayed	Bottom	AXB600U3S4QB
800	3	Level 3 controls (LCD)	200-480 VAC	Open	Bottom	OXA800U3X3QB
800	3	Level 3 controls (LCD)	200-480 VAC	Open	Top	OXA800U3X3QT
800	4	Level 4 controls (Touch)	200-480 VAC	Delayed	Top	AXB800U3S4QT
800	3	Level 4 controls (Touch)	200-480 VAC	Delayed	Top	AXB800U3X4QT
1000	3	Level 3 controls (LCD)	200-480 VAC	Open	Bottom	OXA1000U3X3QB
1200	3	Level 2 controls (DIP)	200-480 VAC	Open	Bottom	OXA1200U3X2QB
1200	3	Level 3 controls (LCD)	200-480 VAC	Open	Bottom	OXA1200U3X3QB
1200	4	Level 3 controls (LCD)	200-480 VAC	Open	Bottom	OXA1200U3S3QB
1200	4	Level 4 controls (Touch)	200-480 VAC	Open	Bottom	OXA1200U3S4QB
1200	3	Level 3 controls (LCD)	200-480 VAC	Delayed	Bottom	AXB1200U3X3QB




OXEA1

Accessories

Auxiliary power supply module

Suitable for switches	Aux Voltage	Ordering Code
OX30...1600	12-24 Vdc	OXEA1



EKIP COM

Communication modules

Suitable for switches	Protocol	Ordering Code
OX30...1600	EKIP COM MODBUS TCP	ZEAMODTCP
OX30...1600	EKIP COM MODBUS RS-485	ZEAMOD485




Ekip 2K SIGNALLING

Signalling Modules for Level 3 and Level 4 controllers

Suitable for switches	Type	Ordering Code
OX30....1200	TRUONE IO MOD 2I/2O MKG:11,12/11,12	2K-1-OX
OX30....1200	TRUONE IO MOD 2I/2O MKG:21,22/21,22	2K-2-OX

TruONE™ automatic transfer switch

Accessories



EKIP PROGRAMMING

Ekip Programming module

Suitable for switches	Type	Ordering Code
OX30...1600	EKIP Programming	ZEAEKPPGM



OXES_S

Terminal shrouds

Suitable for switches	Type	Ordering Code
OX30....1200	TERM SHROUD TRUONE UL30-200A L 3PC	OXES250G1L/3
OX30....1200	TERM SHROUD TRUONE UL30-200A L 4PC	OXES250G1L/4
OX30....1200	TERM SHROUD TRUONE UL30-200A S 3PC	OXES250G1S/3
OX30....1200	TERM SHROUD TRUONE UL30-200A S 4PC	OXES250G1S/4
OX30....1200	TERM SHROUD TRUONE UL260-600A L 3PC	OXES800G1L/3
OX30....1200	TERM SHROUD TRUONE UL260-600A L 4PC	OXES800G1L/4
OX30....1200	TERM SHROUD TRUONE UL260-600A S 3PC	OXES800G1S/3
OX30....1200	TERM SHROUD TRUONE UL260-600A S 4PC	OXES800G1S/4
OX30....1200	TERM SHROUD TRUONE UL800-1200 L 3PC	OXES1600G1L/3
OX30....1200	TERM SHROUD TRUONE UL800-1200 L 4PC	OXES1600G1L/4



OXES_L



OXEB_

Phase barriers

Suitable for switches	Type	Ordering Code
OX30...1600	30 -1200 Amps, 3 Pole	OXEB1600/4
	30 - 1200 Amps, 4 Pole	OXEB1600/6



OXEC21

HMI Protective cover, IP54, NEMA 3R rated

Suitable for switches	Type	Ordering Code
OX30...1600	TRUONE HMI PROTECT COVER UL30-1200	OXEC21

TruONE™ automatic transfer switch

Accessories



OA1G10



OA3G01

Auxiliary contacts


Suitable for switches	Type	Ordering Code
OX30....1200	1-NO AUX SW OT/OS	OA1G10
OX30....1200	AUX SWITCH 1NC OS/OT	OA3G01



OZXA-26



OZXA-25



OZXA-200




OZXA-100




OZXA-400



OZXA-24



OZXA-800E



OZXA-800S



OZXA-1200

Terminal Lug kits

Type	Wire Range	Wires per lug	2 lugs kit	3 lugs kit	4 lugs kit	6 lugs kit
OZXA-100	14-2/0 AWG	1			OZXA-100/4P	OZXA-100
OZXA-24	14-2/0 AWG	1	OZXA-24/2P	OZXA-24/3P	OZXA-24/4P	
OZXA-200	4 AWG - 300kcmil	1			OZXA-200/4	OZXA-200
OZXA-25	6 AWG - 300kcmil	1	OZXA-25/2P	OZXA-25/3P	OZXA-25/4P	
OZXA-400	2 AWG - 600kcmil	1			OZXA-400/4	OZXA-400
OZXA-26	2 AWG - 600kcmil	1	OZXA-26/2P	OZXA-26/3P	OZXA-26/4P	
OZXA-412	2 AWG - 600kcmil	1 or 2			OZXA-412/4P	OZXA-412
OZXA-412L	2 AWG - 600kcmil	1 or 2	OZXA-412L/2P	OZXA-412L/3P	OZXA-412L/4P	
OZXA-800E	2 AWG - 600kcmil	2			OZXA-800E/4P	OZXA-800E
OZXA-800S	2 AWG - 600kcmil	2			OZXA-800S/4P	OZXA-800S
OZXA-800LT	2 AWG - 600kcmil	2	OZXA-800LT/2	OZXA-800LT/3	OZXA-800LT/4	
OZXA-1200	2 AWG - 600kcmil	4			OZXA-1200/4	OZXA-1200

(1) One complete kit contains enough pieces for both Source S2 and Load terminals.

(2) Apply 2 pieces to Source S2 terminal of each pole.

(3) One complete kit contains enough pieces for both Load and Source S1 terminals.

NEMA and definite purpose controls

Section 10

NEMA and definite purpose controls

Table of contents

Definite purpose contactors	
Contactors and accessories	10-1
NEMA Pump Panels	
Ordering code construction	10-2
CR341 (FVNR) full voltage non-reversing pump panels	10-3
NEMA Starters	
Enclosed combination starters ordering code construction	10-4
CR300/400 (FVNR) full voltage non-reversing combination starters	10-5
Enclosed non-combination starters ordering code construction	10-6
CR300/400 (FVNR) full voltage non-reversing non-combination starters	10-7
Manual Motor Starters and accessories	
CR101H, CR101Y (FVNR) full voltage non-reversing starters	10-8
Spec-setter (FVNR) full voltage non-reversing manual motor starters	10-10
Overload relays, open components and accessories	
Overload relays	10-11
Open components and accessories	10-12
Lighting contactors	
460 series contactors and accessories	10-13

Definite purpose contactors

Contactors and accessories



		2 NO (2P)	3 NO (3P)
Coil Voltage	Frame Size	Ordering Code	Ordering Code
24V AC	30A	DP30C2P-F	---
	40A	---	DP40C3P-F
120V AC	20A	DP20C2P-1	---
	30A	DP30C2P-1	DP30C3P-1
	40A	---	DP40C3P-1
	50A	---	DP50C3P-1
	60A	---	DP60C3P-1

Auxiliary contact block for 3- and 4-pole configurations

Description	Ordering Code
Double "Form C" (1NO + 1NC aux) SPDT	CADP40-20

NEMA Pump Panels

Ordering code construction

CR	3	4	1				4				1	A	A	
Pump panel Type														
3, 4, 1 = Pump panel w/ disconnect switch														
NEMA size														
C = Size 1														
D = Size 2														
E = Size 3														
F = Size 4														
Disconnect type														
0 = Standard IC Class H/J fuse clips														
1 = Higher IC rating, Class R fuse clips														
Overload relay														
1 = Thermal OL														
4 = No overload														
X = Class 10-20-30 electronic														
Line voltage														
4 = 460/480														
Disconnect type														
B = 30A														
C = 60A														
D = 100A														
E = 200A														
Control options														
A = HOA switch, Start PB														
Electronic Overload Range														
E = 1.6 - 3.4														
F = 3.2 - 6.8														
G = 6.5 - 13.5														
H = 13 - 27														
J = 25 - 50														
L = 35 - 70														
M = 65 - 135														
Undervoltage/phase failure														
A = None														
Auxiliary contacts														
A = None														
Control circuit protection														
1 = None														
Control power														
A = None														
C = Fused control circuit														

Field modification - Refer to control catalog for order codes

Auxiliary contacts

Coil conversion

Control power transformer

Pushbuttons, selector switches, pilot lights

NEMA Pump Panels

CR341 (FVNR) full voltage non-reversing pump panels



NEMA Size	Disconnect Type	Line Voltage	Disconnect Size	Horse Power	Overload	Ordering Code
Size 1	Fusible	460-480 Vac	30A	10	None	341C044BAA1AA
Size 2	Fusible	460-480 Vac	60A	25	None	341D044CAA1AA
Size 3	Fusible	460-480 Vac	100A	50	Thermal*	341E014DAA1AA
	Fusible	460-480 Vac	100A	50	None	341E044DAA1AA
	Fusible	460-480 Vac	100A	50	Class 10-20-30 electronic	341E0X4DAA1AAL
Size 4	Fusible	460-480 Vac	200A	100	Thermal*	341F014EAC1AA
	Fusible	460-480 Vac	200A	100	None	341F044EAC1AA
	Fusible	460-480 Vac	200A	100	Class 10-20-30 electronic	341F0X4EAC1AAM

*Thermal overload relays require 1 heater element per phase

NEMA Starters

Enclosed combination starters ordering code construction

CR

A

A

Starter type

3, 0, 8 = Starter w/ disconnect switch, hard-tooled enclosure

4, 0, 8 = Starter w/ disconnect switch, welded enclosure

3, 0, 7 = Starter w/ circuit breaker

NEMA size

B = Size 0

C = Size 1

D = Size 2

E = Size 3

F = Size 4

Enclosure type

T or 1 = Nema 1

Control voltage

0, 2 = 120V, no fuses

F, 2 = 120V, with fuses

1, 4 = 120V, with CPT

Disconnect type

	Non Fused	1, A
	200-208vac	R, A
30A	460-480vac	R, 3
	200-208vac	R, B
60A	460-480vac	R, 6
	200-208vac	R, C
100A	460-480vac	R, 1
	200-208vac	R, D
200A	460-480vac	R, 2
	15A	T, C
TM	50A	T, H
	100A	T, N
	175A	T, S

Control options

A = None

Pilot lights

1 = Red run

2 = Green run

5 = Red run, green off

Pushbuttons/ selector switches

A = None

J = Start/Stop PBs

L = HOA switch

M = On/Off switch

S = HOA switch, start PB

Monitoring

A = None

AUX Contacts

A = None

B = 1NO

C = 1NC

D = 1NO/1NC

Overload relay

4 = Thermal OL (NO/NC)

C = Electronic 0.4 - 0.85A

D = Electronic 0.8 - 1.7A

E = Electronic 1.6 - 3.4A

F = Electronic 3.2 - 6.8A

G = Electronic 6.5 - 13.5A

H = Electronic 13 - 27A

J = Electronic 25 - 50A

L = Electronic 35 - 70A

M = Electronic 65 - 135A

Field modification kits - Refer to control catalog for order codes

Auxiliary contactsControl power transformer

Coil conversionPushbuttons, selector Switches, pilot lights

Reference only. For stocked items, see following pages.

NEMA Starters

CR300/400 (FVNR) full voltage non-reversing combination starters



NEMA Size	Disconnect Type	Line Voltage	Disconnect Size	Horse Power	Overload	Ordering Code
Size 0	Non-fused	575-600 Vac	30A	5	Electronic 6.5-13amp	308BT021AGAAAAA
Size 0	Non-fused	575-600 Vac	30A	5	Thermal*	308BT021A4AAAAA
Size 1	Non-fused	575-600 Vac	30A	10	Electronic 13-27amp	308CT021AHAAAAA
Size 1	Non-fused	575-600 Vac	30A	10	Thermal*	308CT021A4AAAAA
Size 2	Non-fused	575-600 Vac	60A	25	Thermal*	408D1021A4AAAAA
Size 2	Non-fused	575-600 Vac	60A	25	Electronic 25-50amp	408D1021AJAAAAA
Size 3	Non-fused	575-600 Vac	100A	50	Thermal*	408E1021A4AAAAA
Size 3	Non-fused	575-600 Vac	100A	50	Electronic 35-70amp	408E1021ALAAAAA
Size 4	Non-fused	575-600 Vac	200A	100	Thermal*	408F1021A4AAAAA
Size 4	Non-fused	575-600 Vac	200A	100	Electronic 65-135amp	408F1021AMAAAAA
Size 0	Fusible	200-208 Vac	30A	3	Thermal*	308BT02RA4AAAAA
Size 0	Fusible	200-208 Vac	30A	3	Electronic 6.5-13amp	308BT02RAGAAAAA
Size 0	Fusible	460-480 Vac	30A	5	Thermal*	308BT02R34AAAAA
Size 0	Fusible	460-480 Vac	30A	5	Electronic 6.5-13amp	308BT02R3GAAAAA
Size 1	Fusible	200-208 Vac	30A	5	Thermal*	308CT02RA4AAAAA
Size 1	Fusible	200-208 Vac	30A	5	Electronic 13-27amp	308CT02RAHAAAAA
Size 1	Fusible	200-208 Vac	60A	7.5	Thermal*	408C102RB4AAAAA
Size 1	Fusible	460-480 Vac	30A	10	Thermal*	308CT02R34AAAAA
Size 1	Fusible	460-480 Vac	30A	10	Electronic 13-27amp	308CT02R3HAAAAA
Size 2	Fusible	200-208 Vac	60A	10	Thermal*	408D102RB4AAAAA
Size 2	Fusible	200-208 Vac	60A	10	Electronic 25-50amp	408D102RBJAAAAA
Size 2	Fusible	460-480 Vac	30A	15	Thermal*	308DT02R34AAAAA
Size 2	Fusible	460-480 Vac	30A	15	Electronic 25-50amp	308DT02R3JAAAAA
Size 2	Fusible	460-480 Vac	60A	25	Thermal*	408D102R64AAAAA
Size 2	Fusible	460-480 Vac	60A	25	Electronic 25-50amp	408D102R6JAAAAA
Size 3	Fusible	200-208 Vac	200A	25	Thermal*	408E1F2RD4AAAAA
Size 3	Fusible	200-208 Vac	200A	25	Electronic 35-70amp	408E1F2RDLAAAAA
Size 3	Fusible	460-480 Vac	60A	30	Thermal*	408E102R64AAAAA
Size 3	Fusible	460-480 Vac	60A	30	Electronic 35-70amp	408E102R6LAAAAA
Size 3	Fusible	460-480 Vac	100A	50	Thermal*	408E102R14AAAAA
Size 4	Fusible	460-480 Vac	200A	100	Electronic 65-135amp	408F1F2R2MAAAAAA
Size 4	Fusible	460-480 Vac	100A	60	Electronic 65-135amp	408F102R1MAAAAAA
Size 4	Fusible	460-480 Vac	100A	60	Thermal*	408F102R14AAAAA
Size 4	Fusible	460-480 Vac	200A	100	Thermal*	408F1F2R24AAAAA
Size 4	Fusible	460-480 Vac	100A	50	Electronic 35-70amp	408E102R1LAAAAA
Size 0	Circuit Breaker	200-208 Vac	15A	3	Electronic 6.5-13amp	307BT02TCGAAAAA
Size 0	Circuit Breaker	200-208 Vac	15A	3	Thermal*	307BT02TC4AAAAA
Size 1	Circuit Breaker	200-208 Vac	25A	5	Thermal*	307CT02TE4AAAAA
Size 1	Circuit Breaker	200-208 Vac	40A	10	Thermal*	307CT02TG4AAAAA
Size 1	Circuit Breaker	200-208 Vac	60A	10	Thermal*	307DT02TJ4AAAAA
Size 1	Circuit Breaker	200-208 Vac	25A	5	Electronic 13-27amp	307CT02TEHAAAAA
Size 1	Circuit Breaker	200-208 Vac	40A	7.5	Electronic 13-27amp	307CT02TGHAAAAA
Size 2	Circuit Breaker	200-208 Vac	60A	10	Electronic 25-50amp	307DT02TJJAAAAA

*Thermal overloads relays require 1 heater element per phase

NEMA Starters

Enclosed non-combination starters ordering code construction

CR	3	0	6		1			0	0						
Starter type 3, 0, 6 = Starter only															
NEMA size B = Size 0 C = Size 1 D = Size 2 E = Size 3 F = Size 4															
Enclosure type 1 = NEMA 1															
Control voltage 0, 2 = 120V 0, 3 = 240V 0, 4 = 480V 0, 5 = 600V 2, 3 = 208V 2, 4 = 24V(AC)															
				Disconnect type 0, 0 = None											
				Overload relay A = Thermal OL (1NO) X = Solid State OL											
								Electronic Overload Range (If applicable) C = Electronic 0.4 - 0.85A D = Electronic 0.8 - 1.7A E = Electronic 1.6 - 3.4A F = Electronic 3.2 - 6.8A G = Electronic 6.5 - 13.5A H = Electronic 13 - 27A J = Electronic 25 - 50A L = Electronic 35 - 70A M = Electronic 65 - 135A							
								Pilot lights A = None B = Red across coil							
								Pushbuttons and switches A = None B = Start/Stop PBs D = HOA switch							
								Control Circuit Options A = No CPT, No Fuses D = No CPT, Fused T = CPT with 2 Primary, 1 Secondary Fuse							

NEMA Starters

CR306 (FVNR) full voltage non-reversing non-combination starters



NEMA Size	Line Voltage	Horse Power	Switch Type	Ordering Code
Size 0	460-480 Vac	5	None	306B10200AAAAA
	460-480 Vac	5	HOA	306B10200AADAA
Size 1	460-480 Vac	10	None	306C10200AAAAA
	460-480 Vac	10	HOA	306C10200AADAA
Size 2	460-480 Vac	25	None	306D10200AAAAA
	460-480 Vac	25	HOA	306D10200AADAA
Size 3	460-480 Vac	50	None	306E10200AAAAA
	460-480 Vac	50	HOA	306E10200AADAA
Size 4	460-480 Vac	100	None	306F10200AAAAA
	460-480 Vac	100	HOA	306F10200AADAA

Non-combination Field Installable Accessories

NEMA Size	Start/Stop PB ordering code	HOA Switch ordering code	On/Off switch ordering code	Red pilot light ordering code
Size 0,1	CR305X120N	CR305X130N	CR305X130P	CR305X150N
Size 2	CR305X220N	CR305X230N	CR305X230D	CR305X250N
Size 3,4	CR305X320B	CR305X330B	CR305X330D	CR305X350B

Manual Motor Starters

CR101H, CR101Y (FVNR) full voltage non-reversing manual starters



Toggle Operated Non-reversing Open*

Poles	Line Voltage	Horse Power	Ordering Code
1	115/230/277	1/1/0.75	CR101Y
2	115/230/277	1/1/0.75	CR101H

*For flush or outlet box mounting



Toggle Operated Non-reversing Enclosed NEMA Type 1

Poles	Line Voltage	Horse Power	Indicating Light	Ordering Code
1	115/230/277	1/1/0.75	No	CR101Y1
2	115/230/277	1/1/0.75	No	CR101H1
1	115/230/277	1/1/0.75	Yes*	CR101Y11
2	115/230/277	1/1/0.75	Yes*	CR101H11

*Light available at 115/230-volt lamps only



Lever Operated Non-reversing Enclosed NEMA Type 3/4/12

Poles	Line Voltage	Horse Power	Hubs	Ordering Code
1	115/230/277	1/1/0.75	3/4" hub on one end	CR101H400H
2	115/230/277	1/1/0.75	3/4" hub on one end	CR101Y400H



CR101H, CR101Y Enclosure Components

Description	Ordering Code
Plate Kit, with lock attachment (lock not included)	CR101X3
Standard Cover (front w/ screws)	CR101X5
Combo plate kit, w/Hand-auto switch & 115/230volt neon light	CR101X11
Combo flush plate and box (back)	CR101X14

Manual Motor Starters

CR101H, CR101Y (FVNR) full voltage non-reversing manual starters

CR101 Heaters

Max motor full load amps	Ordering Code
0.48	CR123H055A
0.53	CR123H061A
0.58	CR123H067A
0.65	CR123H074A
0.71	CR123H082A
0.78	CR123H090A
0.86	CR123H099A
0.95	CR123H108A
1.04	CR123H120A
1.14	CR123H132A
1.25	CR123H144A
1.37	CR123H158A
1.49	CR123H172A
1.63	CR123H188A
1.78	CR123H205A
1.95	CR123H224A
2.13	CR123H245A
2.32	CR123H267A
2.53	CR123H291A
2.76	CR123H317A
3.01	CR123H346A
3.27	CR123H377A
3.56	CR123H410A
3.88	CR123H446A
4.22	CR123H486A
4.6	CR123H529A
5	CR123H575A
5.43	CR123H625A
5.9	CR123H680A
6.41	CR123H739A
6.98	CR123H802A
7.6	CR123H873A
8.25	CR123H950A
8.95	CR123H103B
9.75	CR123H112B
10.6	CR123H122B
11.4	CR123H132B
12.5	CR123H144B
13.6	CR123H157B
14.8	CR123H171B
16	CR123H186B

Overload relays, open components and accessories

Overload relays



Replace * in product number with appropriate digit from Full Load Current Selection Table below.

Solid state overload relays, 3 pole, 600 VAC

NEMA Size	Continuous Ampere Rating	Mounting Position	Product Number
1	27	Panel Mount	CR324CX*P
2	45	Panel Mount	CR324DX*P
3, 4	90,135	Panel Mount	CR324FX*P
1	27	for MRO & Replacement	CR324CX*S
2	45	for MRO & Replacement	CR324DX*S
3, 4	90,135	for MRO & Replacement	CR324FX*S ^{1,2}
5	270	for MRO & Replacement	CR324GX*S ³

¹If Product No. digit "K" is selected from Full Load Current Selection Table.

²Reset on CR324FX*S overloads is approximately 1" longer than on equivalent bimetal overloads. For ABB 300-Line enclosures, perform the actions noted below:

³CR324GX*S may be used as replacement for bimetal overload on size 5 starters. Use existing CTs.

⁴CR324HX*K kit must be used as solid-state replacement for bimetal overloads on size 6, since CT ratio changes, CTs included.

⁵CR324HX*S may be used as a replacement for existing solid-state overload on size 6. Use existing CTs.

Enclosure Reset Extension Type	Adjustment Required
Threaded Rod (standard)	Cut threaded shaft 1" and adjust for 1/8" gap.
"U" Style, 2 1/8" long	Replace extension with product number 55-512811G005.
"U" Style, 1 1/2" long	Replace extension with product number 55-512811G002.

Solid state overload relay options

Item	NEMA Size	Voltage	Product Number
Remote Reset	1-6	120 VAC	CR324XRRM02
Panel Mount Adapter	1	N/A	CR324CXPPMA
	2	N/A	CR324DXPPMA


Full load current selection table

For continuous rated motors, with a service factor of 1.15 to 1.25, select the heater with maximum motor Amperes equal to or immediately greater than the motor full-load current (provides a maximum of 125 percent protection). For continuous rated motors with no service factor, multiply the full-load current of the motor by 0.90 and use this value to select the heater.

Overload Range for Solid State Starters	NEMA Size	Fuse Max.	Breaker Max.	Insert Digit in Product Number
0.4-0.85	00-1	3	15	C
0.8-1.7	00-1	6	15	D
1.6-3.4	00-1	12	15	E
3.2-6.8	00-1	25	25	F
6.5-13.5	00-1	50	50	G
13-27	00-1	100	100	H
6.5-13.5	2	50	50	G
13-27	2	100	100	H
25-50	2	200	200	J
17-35	3 & 4	125	125	K
35-70	3 & 4	250	250	L
65-135	3 & 4	500	400	M
35-70	5	—	—	N
65-135	5	500	400	P
130-270	5	600	800	Q
130-270	6	1200	800	S
260-540	6	1200	800	T


Overload relays, open components, and accessories

Open components and accessories



Open contactors


Nema Size	Description	Line Voltage	Amp Rating	Ordering Code
Size 0	Contactors	115-120 Vac	20A	305B002
Size 1	Contactors	115-120 Vac	30A	305C002
Size 2	Contactors	115-120 Vac	50A	305D002
Size 3	Contactors	115-120 Vac	100A	305E002
Size 4	Contactors	115-120 Vac	150A	305F002

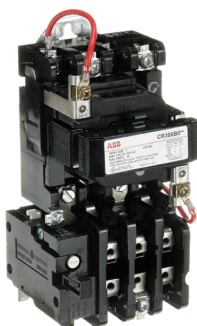

Open starters

Nema Size	Description	Line Voltage	Amp Rating	Overload	Ordering Code
Size 0	Starter	115-120 Vac	18A	Thermal*	306B002
Size 1	Starter	115-120 Vac	27A	Thermal*	306C002
Size 2	Starter	115-120 Vac	45A	Thermal*	306D002
Size 3	Starter	115-120 Vac	90A	Thermal*	306E002
Size 4	Starter	115-120 Vac	135A	Thermal*	306F002

*Thermal overloads relays require 1 heater element per phase



**Pump panel, combination starter, non-combination starter, and contactor
Field Installable Accessories**

NEMA Size	1NO AUX ordering code	1NC AUX ordering code	1NO/1NC AUX ordering code
Size 0,1	CR305X100A	CR305X100B	CR305X100C
Size 2	CR305X200A	CR305X200B	CR305X200C
Size 3,4	CR305X300A	CR305X300B	CR305X300C

Lighting Contactors

460 series contactors and accessories



Assembled NEMA 1 enclosed Contactors*

Coil voltage	Poles (NO)	General use	All voltages & loads	Ordering Code
115-120V 60 Hz/110V 50 Hz	4	600 Vac/30A	See Chart**	CR463L40AJA10AO
115-120V 60 Hz/110V 50 Hz	6	600 Vac/30A	See Chart**	CR463L60AJA10AO
115-120V 60 Hz/110V 50 Hz	8	600 Vac/30A	See Chart**	CR463L80AJA10AO



Assembled open contactors*

Coil voltage	Poles (NO)	General use	All voltages & loads	Ordering Code
115-120V 60 Hz/110V 50 Hz	4	600 Vac/30A	See Chart**	CR463L40AJA
115-120V 60 Hz/110V 50 Hz	6	600 Vac/30A	See Chart**	CR463L60AJA
115-120V 60 Hz/110V 50 Hz	8	600 Vac/30A	See Chart**	CR463L80AJA



Stock the below components to quickly build up any configuration
Lighting Contactor Components

Lighting Contactor Components	Ordering Code
12 POLE ELECTRICALLY HELD BASE, 120V COIL	460BJ
12 POLE ELECTRICALLY HELD BASE, 277V COIL	460BN
1 POLE POWER BLOCK**	460XP31
2 POLE POWER BLOCK**	460XP32
1 POLE AUXILIARY CONTACT (Reversible)	460XB1
2 POLE AUXILIARY CONTACT (Reversible)	460XB2
24V60 HZ/20V50HZ COIL	460XCC
115-120V60 HZ/110V50HZ COIL	460XCJ
208V60 HZ COIL	460XCL
277V60 HZ/240V50HZ COIL	460XCN
ENCLOSURE KIT NEMA 1	460XE1B
ENCLOSURE KIT TYPE 12/3R	460XE2B
OVERSIZED ENCLOSURE KIT TYPE 12/3R	460XE2D
RED/GREEN IND LIGHT KIT 120 V	460XLBj
2WIRE CONTROL MODULE KIT 120V	460XMC
3WIRE CONTROL MODULE KIT 120V	460XMN
HOA-ON/OFF/AUTO SS KIT	460XP4



**** Lighting contactor Power Block Ratings chart**

MAXIMUM VOLTS POLES TO LOAD		LOAD TYPE	MAXIMUM AMPS	ABB				 UL US LISTED A153 IND.CONT.EQ	A600
1 For 1Ø	2 For 1Ø 3 For 3Ø			AC MOTOR STARTING (Break All Lines)	HP	FLA			
120 VAC		LED DRIVER / ELECTRONIC BALLAST	10A MAX	110-120V	1Ø 1 15 3Ø 1.5 12		Wire Range: #14-8 AWG 75°C Copper Wire Only Torque: 35 lbs-in	Position Block on Base for desired NO versus NC operation Power Contact Block for use with CR460 Series Contactor	
277 VAC		LED DRIVER / ELECTRONIC BALLAST	3A MAX		220-240V	1Ø 2 12 3Ø 5 15.2			
277 VAC	480 VAC	TUNGSTEN	20A MAX	440-480V	1Ø 5 14 3Ø 10 14		IEC/EN 60947-4-1 Ith=30A UI=600V TORQUE : 3.9 N-m AC-15 A600		
347 VAC	600 VAC	BALLAST	30A MAX	550-600V	1Ø 5 11.2 3Ø 15 17				
600 VAC	600 VAC	GENERAL USE / AC RESISTANCE	30A MAX						
POLES TO LOAD		3 Ø AMP MAX. LOAD	AC3	CE					
1 For 1Ø	2 For 1Ø 3 For 3Ø			V	230	400	500	600	
230 VAC	400 VAC	AC-5b (20A ONLY)		kW	1.5	5.5	5.5	5.5	
230 VAC	400 VAC	AC-5a							
600 VAC	600 VAC	AC-1							

Softstarters

Section 11

Softstarters

Table of contents

Softstarters	
Open PSR - normal duty	11-1
PSR Accessories	11-2
Open PSE - normal duty	11-3
PSE Accessories	11-4
Open PSTX - normal duty	11-5
PSTX Accessories	11-6
Enclosed PSTX - normal duty	11-7
Enclosed PSTX - extreme duty	11-8
Hydraulic Elevator Softstarter ELV-X	11-9

Softstarters

Open PSR softstarter - Normal duty




Max Motor Current	Motor Voltage	Control Voltage	In-Line Rating	In-Line Rating	Frame	Dimensions (inches)	Weight (lb)	Ordering Code
3.4A	208-600V	24V AC/DC	0.75 HP /240 VAC	2 HP / 480 VAC	A	5.51H x 1.77W x 4.49D	0.99	PSR3-600-11
3.4A	208-600V	120 -240 VAC	0.75 HP /240 VAC	2 HP / 480 VAC	A	5.51H x 1.77W x 4.49D	0.99	PSR3-600-70
6.1A	208-600V	24V AC/DC	1.5 HP /240 VAC	3 HP / 480 VAC	A	5.51H x 1.77W x 4.49D	0.99	PSR6-600-11
6.1A	208-600V	120 -240 VAC	1.5 HP /240 VAC	3 HP / 480 VAC	A	5.51H x 1.77W x 4.49D	0.99	PSR6-600-70
9.0A	208-600V	24V AC/DC	2 HP /240 VAC	5 HP / 480 VAC	A	5.51H x 1.77W x 4.49D	0.99	PSR9-600-11
9.0A	208-600V	120 -240 VAC	2 HP /240 VAC	5 HP / 480 VAC	A	5.51H x 1.77W x 4.49D	0.99	PSR9-600-70
11.0A	208-600V	24V AC/DC	3 HP /240 VAC	7.5 HP / 480 VAC	A	5.51H x 1.77W x 4.49D	0.99	PSR12-600-11
11.0A	208-600V	120 -240 VAC	3 HP /240 VAC	7.5 HP / 480 VAC	A	5.51H x 1.77W x 4.49D	0.99	PSR12-600-70
15.2A	208-600V	24V AC/DC	5 HP /240 VAC	10 HP / 480 VAC	A	5.51H x 1.77W x 4.49D	0.99	PSR16-600-11
15.2A	208-600V	120 -240 VAC	5 HP /240 VAC	10 HP / 480 VAC	A	5.51H x 1.77W x 4.49D	0.99	PSR16-600-70
24.2A	208-600V	24V AC/DC	7.5 HP /240 VAC	15 HP / 480 VAC	B	6.3H x 1.77W x 5.04D	1.43	PSR25-600-11
24.2A	208-600V	120 -240 VAC	7.5 HP /240 VAC	15 HP / 480 VAC	B	6.3H x 1.77W x 5.04D	1.43	PSR25-600-70
28.0A	208-600V	24V AC/DC	10 HP /240 VAC	20 HP / 480 VAC	B	6.3H x 1.77W x 5.04D	1.43	PSR30-600-11
28.0A	208-600V	120 -240 VAC	10 HP /240 VAC	20 HP / 480 VAC	B	6.3H x 1.77W x 5.04D	1.43	PSR30-600-70
34.0A	208-600V	24V AC/DC	10 HP / 240 VAC	25 HP / 480 VAC	C	7.36H x 2.13W x 6.02D	2.2	PSR37-600-11
34.0A	208-600V	120 -240 VAC	10 HP /240 VAC	25 HP / 480 VAC	C	7.36H x 2.13W x 6.02D	2.2	PSR37-600-70
46.2A	208-600V	24V AC/DC	15 HP /240 VAC	30 HP / 480 VAC	C	7.36H x 2.13W x 6.02D	2.2	PSR45-600-11
46.2A	208-600V	120 -240 VAC	15 HP /240 VAC	30 HP / 480 VAC	C	7.36H x 2.13W x 6.02D	2.2	PSR45-600-70
59.4A	208-600V	24V AC/DC	20 HP /240 VAC	40 HP / 480 VAC	D	8.66H x 2.76W x 7.09D	4.85	PSR60-600-11
59.4A	208-600V	120 -240 VAC	20 HP /240 VAC	40 HP / 480 VAC	D	8.66H x 2.76W x 7.09D	4.85	PSR60-600-70
68.0A	208-600V	24V AC/DC	25 HP /240 VAC	50 HP / 480 VAC	D	8.66H x 2.76W x 7.09D	4.85	PSR72-600-11
68.0A	208-600V	120 -240 VAC	25 HP /240 VAC	50 HP / 480 VAC	D	8.66H x 2.76W x 7.09D	4.85	PSR72-600-70
80.0A	208-600V	24V AC/DC	30 HP /240 VAC	60 HP / 480 VAC	D	8.66H x 2.76W x 7.09D	4.85	PSR85-600-11
80.0A	208-600V	120 -240 VAC	30 HP /240 VAC	60 HP / 480 VAC	D	8.66H x 2.76W x 7.09D	4.85	PSR85-600-70
104.0A	208-600V	24V AC/DC	40 HP /240 VAC	75 HP / 480 VAC	D	8.66H x 2.76W x 7.09D	4.85	PSR105-600-11
104.0A	208-600V	120 -240 VAC	40 HP /240 VAC	75 HP / 480 VAC	D	8.66H x 2.76W x 7.09D	4.85	PSR105-600-70

See page 19 in [catalog](#) for full description

Softstarters


PSR accessories




Connection kit
for PSR3...16



Connection kit
for PSR25...30



Connection kit
for PSR37...45



Connection kit
for PSR60...72



Fan

Connection kit					
Article	Breaker type	Pkg qty	Net kg	lb	Ordering Code
PSR3...16	MS116/132	1	0.03	0.08	PSR16-MS116
PSR25...30	MS132	1	0.03	0.08	PSR30-MS132
PSR37...45	MS165	1	0.05	0.11	PSR45-MS165
PSR60...72	MS165	1	0.05	0.11	PSR60-MS165

Fan				
Article	Pkg qty	Net kg	lb	Ordering Code
PSR3...16	1	0.01	0.02	PSR-FAN3-45A
PSR25...30	1	0.01	0.03	PSR-FAN60-105A

See [catalog](#) for additional accessories

Softstarters

Open PSE softstarter - Normal duty



Max Motor Current	Motor Voltage	Control Voltage	In-Line Rating	In-Line Rating	Frame	Dimensions (inches)	Weight (lb)	Ordering Code
18.0A	208-600V	120 -250 VAC	5 HP /240 VAC	10 HP / 480 VAC	A	9.64H x 3.54W x 7.20D	5.29	PSE18-600-70
25.0A	208-600V	120 -250 VAC	7.5 HP /240 VAC	15 HP / 480 VAC	A	9.64H x 3.54W x 7.20D	5.29	PSE25-600-70
28.0A	208-600V	120 -250 VAC	10 HP /240 VAC	20 HP / 480 VAC	A	9.64H x 3.54W x 7.20D	5.29	PSE30-600-70
34.0A	208-600V	120 -250 VAC	10 HP /240 VAC	25 HP / 480 VAC	A	9.64H x 3.54W x 7.20D	5.29	PSE37-600-70
42.0A	208-600V	120 -250 VAC	15 HP /240 VAC	30 HP / 480 VAC	A	9.64H x 3.54W x 7.20D	5.29	PSE45-600-70
60.0A	208-600V	120 -250 VAC	20 HP /240 VAC	40 HP / 480 VAC	A	9.64H x 3.54W x 7.20D	5.29	PSE60-600-70
68.0A	208-600V	120 -250 VAC	25 HP /240 VAC	50 HP / 480 VAC	A	9.64H x 3.54W x 7.20D	5.51	PSE72-600-70
80.0A	208-600V	120 -250 VAC	30 HP /240 VAC	60 HP / 480 VAC	A	9.64H x 3.54W x 7.20D	5.51	PSE85-600-70
104.0A	208-600V	120 -250 VAC	40 HP /240 VAC	75 HP / 480 VAC	A	9.64H x 3.54W x 7.20D	5.51	PSE105-600-70
130.0A	208-600V	120 -250 VAC	50 HP /240 VAC	100 HP / 480 VAC	B	11.61H x 5.12W x 8.62D	9.26	PSE142-600-70
169.0A	208-600V	120 -250 VAC	60 HP /240 VAC	125 HP / 480 VAC	B	11.61H x 5.12W x 8.62D	9.26	PSE170-600-70
192.0A	208-600V	120 -250 VAC	75 HP /240 VAC	150 HP / 480 VAC	C	17.13H x 7.48W x 9.31D	27.34	PSE210-600-70-1
248.0A	208-600V	120 -250 VAC	100 HP /240 VAC	200 HP / 480 VAC	C	17.13H x 7.48W x 9.31D	30.64	PSE250-600-70-1
302.0A	208-600V	120 -250 VAC	100 HP /240 VAC	200 HP / 480 VAC	C	17.13H x 7.48W x 9.31D	30.64	PSE300-600-70-1
361.0A	208-600V	120 -250 VAC	150 HP /240 VAC	300 HP / 480 VAC	C	17.13H x 7.48W x 9.31D	30.64	PSE370-600-70-1

See page 47 in [catalog](#) for full description

Softstarters

PSE accessories



Cable connectors
for Cu & Al cables

Cable connectors for Al or Cu building wire

Article	Wire range	No. of cables	Tightening torque in inch-pounds	Pkg qty	Net kg	oz	Previous ordering code	Ordering Code
PSE142 ... PSE170	6 ... 300 kcmil	1	300	3	0.163	5.76	ATK185	1SFN074817R1001
PSE210 ... PSE370	4 ... 400 kcmil	1	375	3	0.059	2.08	ATK300	1SFN075417R1001
PSE210 ... PSE370	4 ... 500 kcmil	2	375	3	0.157	5.52	ATK300/2	1SFN075417R1002



Terminal extension

Terminal extension

Article	Pkg qty	Net kg	lb	Ordering Code
PSE142 ... PSE170 8.5 17.5 x 5	1	0.25	0.55	LX205
PSE210 ... PSE370 10.5 20 x 5	1	0.35	0.77	LX370



Terminal shrouds

Terminal shrouds

Article	Pkg qty	Net kg	lb	Ordering Code
PSE18... PSE105, Screw terminals	2	0.07	0.15	LT140-30L
PSE142... PSE170, short for use with cable clamps	2	0.05	0.11	LT185-AC
PSE142... PSE170, long for use with compression lugs	2	0.22	0.49	LT185-AL



External keypad

External keypad including a 3m cable


Article	Pkg qty	Net kg	lb	Ordering Code
PSE18 ... PSE370	1	0.13	0.29	PSEEK



USB cable

USB cable for Service Engineer Tool

Article	Pkg qty	Net kg	lb	Ordering Code
PSE18 ... PSE370	1	0.10	0.22	PSECA



Modbus adapter

Modbus adapter

Article	Pkg qty	Net kg	lb	Ordering Code
Modbus adapter	1	0.01	0.02	PS-MBIA

See [catalog](#) for additional accessories

Softstarters

Open PSTX softstarter - Normal duty



Max Motor Current	Motor Voltage	Control Voltage	In-Line Rating	In-Line Rating	Frame	Dimensions (inches)	Weight (lb)	Ordering Code
28.0A	208-600V	120 -250 VAC	10 HP /240 VAC	20 HP / 480 VAC	A	12.4H x 5.9W x 7.7D	13.45	PSTX30-600-70
34.0A	208-600V	120 -250 VAC	10 HP /240 VAC	25 HP / 480 VAC	A	12.4H x 5.9W x 7.7D	13.45	PSTX37-600-70
42.0A	208-600V	120 -250 VAC	15 HP /240 VAC	30 HP / 480 VAC	A	12.4H x 5.9W x 7.7D	13.45	PSTX45-600-70
60.0A	208-600V	120 -250 VAC	20 HP /240 VAC	40 HP / 480 VAC	A	12.4H x 5.9W x 7.7D	13.45	PSTX60-600-70
68.0A	208-600V	120 -250 VAC	25 HP /240 VAC	50 HP / 480 VAC	A	12.4H x 5.9W x 7.7D	13.45	PSTX72-600-70
80.0A	208-600V	120 -250 VAC	30 HP /240 VAC	60 HP / 480 VAC	A	12.4H x 5.9W x 7.7D	13.45	PSTX85-600-70
104.0A	208-600V	120 -250 VAC	40 HP /240 VAC	75 HP / 480 VAC	A	12.4H x 5.9W x 7.7D	13.45	PSTX105-600-70
140.0A	208-600V	120 -250 VAC	50 HP /240 VAC	100 HP / 480 VAC	B	14.8H x 7.8W x 9.3D	21.16	PSTX142-600-70
169.0A	208-600V	120 -250 VAC	60 HP /240 VAC	125 HP / 480 VAC	B	14.8H x 7.8W x 9.3D	21.16	PSTX170-600-70
192.0A	208-600V	120 -250 VAC	75 HP /240 VAC	150 HP / 480 VAC	C	18.5H x 10.2W x 10.9D	27.99	PSTX210-600-70
248.0A	208-600V	120 -250 VAC	100 HP /240 VAC	200 HP / 480 VAC	C	18.5H x 10.2W x 10.9D	27.99	PSTX250-600-70
302.0A	208-600V	120 -250 VAC	100 HP /240 VAC	250 HP / 480 VAC	C	18.5H x 10.2W x 10.9D	27.99	PSTX300-600-70
361.0A	208-600V	120 -250 VAC	150 HP /240 VAC	300 HP / 480 VAC	C	18.5H x 10.2W x 10.9D	27.99	PSTX370-600-70
480.0A	208-600V	120 -250 VAC	200 HP /240 VAC	400 HP / 480 VAC	D	18.1H x 14.2W x 11.1D	55.12	PSTX470-600-70
590.0A	208-600V	120 -250 VAC	200 HP /240 VAC	500 HP / 480 VAC	D	18.1H x 14.2W x 11.1D	55.12	PSTX570-600-70
720.0A	208-600V	120 -250 VAC	300 HP /240 VAC	600 HP / 480 VAC	E	19.29H x 17.126W x 14.5D	101.85	PSTX720-600-70
840.0A	208-600V	120 -250 VAC	350 HP /240 VAC	700 HP / 480 VAC	E	19.29H x 17.126W x 14.5D	101.85	PSTX840-600-70
1062.0A	208-600V	120 -250 VAC	450 HP /240 VAC	900 HP / 480 VAC	F	20.2H x17.1W x 14.5D	141.54	PSTX1050-600-70
1250.0A	208-600V	120 -250 VAC	500 HP /240 VAC	1000 HP / 480 VAC	F	20.2H x17.1W x 14.5D	141.54	PSTX1250-600-70

See page 53 in [catalog](#) for full description

Softstarters


PSTX accessories



Cable connectors for
Cu and Al cables

Cable connectors for Al or Cu building wire

Article	Wire range	No. of cables	Tightening torque in inch-pounds	Pkg qty	Net kg	oz	Previous ordering code	Ordering Code
PSTX142 ... PSTX170	6 ... 300 kcmil	1	300	3	0.163	5.76	ATK185	1SFN074817R1001
PSTX210 ... PSTX370	4 ... 400 kcmil	1	375	3	0.059	2.08	ATK300	1SFN075417R1001
PSTX210 ... PSTX370	4 ... 500 kcmil	2	375	3	0.157	5.52	ATK300/2	1SFN075417R1002
PSTX470 ... PSTX570	2/0 ... 500 kcmil	2	375	3	0.345	12.16	ATK580/2	1SFN075717R1002
PSTX470 ... PSTX570	2/0 ... 500 kcmil	3	375	3	1.077	38	ATK750/3	1SFN076117R1003
PSTX720 ... PSTX1050	2/0 ... 500 kcmil	2	375	3	0.345	12.16	ATK580/2	1SFN075717R1002
PSTX720 ... PSTX1050	2/0 ... 500 kcmil	3	375	3	1.077	38	ATK750/3	1SFN076117R1003



Terminal extensions

Terminal extensions

Article	Dimensions hole ø mm ²	bar mm ²	Pkg qty	Net kg	lb	Ordering Code
PSTX142 ... PSTX170	8.5	17.5 x 5	1	0.25	5.55	LX205
PSTX210 ... PSTX370	10.5	20 x 5	1	0.35	0.77	LX370
PSTX470 ... PSTX570	10.5	25 x 5	1	0.50	1.10	LX460



Terminal shrouds

Terminal shrouds

Article	Description	Pkg qty	Net kg	lb	Ordering Code
PSTX142 ... PSTX170	short for use with cable clamps	2	0.05	0.11	LT205-30C
PSTX142 ... PSTX170	long for use with compression lugs	2	0.22	0.49	LT205-30L
PSTX210 ... PSTX370	short for use with cable clamps	2	0.04	0.08	LT370-30C
PSTX210 ... PSTX370	long for use with compression lugs	2	0.28	0.62	LT370-30L
PSTX210 ... PSTX370	long and deep for use with extending cable clamps, ATK300/2 and OZXB4	2	0.15	0.33	LT370-30D
PSTX470 ... PSTX570	long for use with compression lugs	2	0.80	1.76	LT460-AL
PSTX720 ... PSTX1250	long for use with compression lugs	2	0.83	1.82	LT750-AL

Anybus connection accessory for communication protocol suitable for PSTX30 ...PSTX1250



Article	Pkg qty	Net kg	lb	Ordering Code
EtherNet/IP (2-port)	1	0.03	0.07	AB-ETHERNET-IP-2

See [catalog](#) for additional accessories

Softstarters

Enclosed PSTX-ND softstarter - Normal duty



Type code	Order code	Heavy-duty HP / amps Class 30 starts	Normal-duty HP / amps Class 10 starts	Volts	SCCR rating (kA)	Enclosure size H" x W" x D"	Weight in lbs
X20-B4-48-ND	3AUA0000224500	15 HP / 25 amps	20 HP / 28 amps	480	65	24 x 20 x 12	77
X50-B4-48-ND	3AUA0000224501	40 HP / 60 amps	50 HP / 68 amps	480	65	24 x 20 x 12	78
X75-B4-48-ND	3AUA0000224502	50 HP / 68 amps	75 HP / 104 amps	480	65	24 x 20 x 12	78
X100-B4-48-ND	3AUA0000224503	75 HP / 104 amps	100 HP / 130 amps	480	65	30 x 30 x 12	131
X125-B4-48-ND	3AUA0000224504	100 HP / 130 amps	125 HP / 169 amps	480	65	30 x 30 x 12	131
X150-B4-48-ND	3AUA0000224505	125 HP / 169 amps	150 HP / 192 amps	480	65	48 x 36 x 16	280
X200-B4-48-ND	3AUA0000224506	150 HP / 192 amps	200 HP / 248 amps	480	65	48 x 36 x 16	280
X250-B4-48-ND	3AUA0000224507	200 HP / 248 amps	250 HP / 302 amps	480	65	48 x 36 x 16	291
X300-B4-48-ND	3AUA0000224508	250 HP / 302 amps	300 HP / 361 amps	480	65	48 x 36 x 16	300
X400-B4-48-ND	3AUA0000224509	300 HP / 361 amps	400 HP / 480 amps	480	65	48 x 36 x 16	327
X500-B4-48-ND	3AUA0000224510	400 HP / 480 amps	500 HP / 590 amps	480	65	48 x 36 x 16	353

*Includes pedestal base for floor mounting

NEMA Type 4 enclosure meets NEMA 1, 12, 3R and 4 protection requirements.




Typical heavy-duty applications include:


- Centrifugal fan
- Conveyor belt (long)
- Crusher
- Mill
- Mixer
- Stirrer

Typical normal-duty applications include:

- Belt thruster
- Centrifugal pump
- Compressor
- Conveyor belt (short)
- Elevator

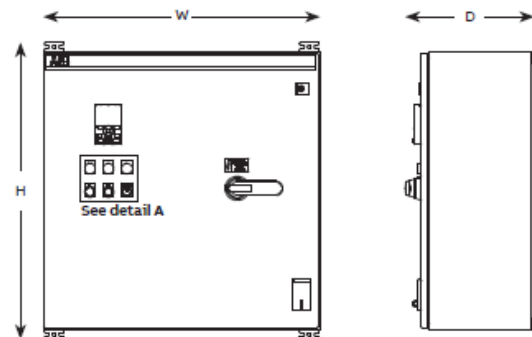

Detail A



Door-mounted pilot devices include:

- PSTX keypad
- Hand-off-Auto Selector switch
- Start and stop pushbuttons
- Power on pilot light
- Run pilot light
- Fault pilot light


Softstarters

Enclosed PSTX-XD softstarter - Extreme duty




Type code	Order code	Heavy-duty HP / amps Class 30 starts	Normal-duty HP / amps Class 10 starts	Volts	SCCR rating (kA)	Enclosure size H" x W" x D"	Weight in lbs
X50-B4-48-XD	3AUA0000226360	50 HP / 68 amps	60 HP / 80 amps	480	65	24 x 20 x 12	88
X75-B4-48-XD	3AUA0000226361	75 HP / 104 amps	100 HP / 130 amps	480	65	30 x 30 x 12	141
X100-B4-48-XD	3AUA0000226362	100 HP / 130 amps	125 HP / 169 amps	480	65	30 x 30 x 12	143
X125-B4-48-XD	3AUA0000226363	125 HP / 169 amps	150 HP / 192 amps	480	65	48 x 36 x 16	284
X150-B4-48-XD	3AUA0000226364	150 HP / 192 amps	200 HP / 248 amps	480	65	48 x 36 x 16	284
X200-B4-48-XD	3AUA0000226365	200 HP / 248 amps	250 HP / 302 amps	480	65	48 x 36 x 16	304
X250-B4-48-XD	3AUA0000226366	250 HP / 302 amps	300 HP / 361 amps	480	65	48 x 36 x 16	314
X300-B4-48-XD	3AUA0000226367	300 HP / 361 amps	400 HP / 480 amps	480	65	72 x 36 x 24	601
X400-B4-48-XD	3AUA0000226368	400 HP / 480 amps	500 HP / 590 amps	480	65	72 x 36 x 24	618
X500-B4-48-XD	3AUA0000226369	500 HP / 590 amps	600 HP / 720 amps	480	65	72 x 36 x 24	681

*Includes pedestal base for floor mounting
NEMA Type 4 enclosure meets NEMA 1, 12, 3R and 4 protection requirements.

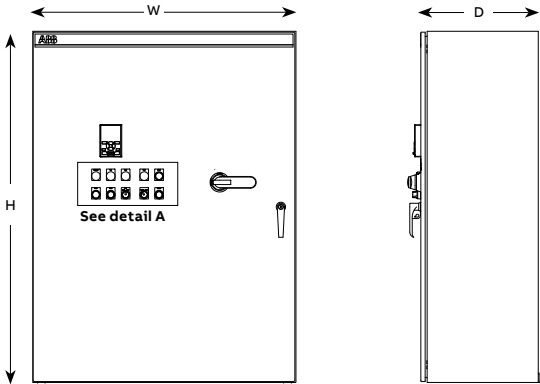

Detail A

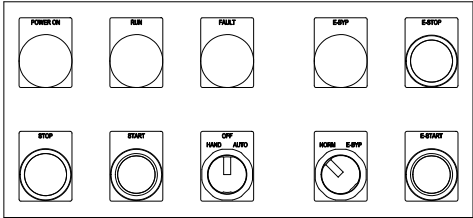

- Door-mounted pilot devices include:**
- PSTX keypad
 - Hand-off-Auto Selector Switch
 - Start and Stop Pushbuttons
 - Power On Pilot Light
 - Run Pilot Light
 - Fault Pilot Light
 - Normal-E-Bypass Selector Switch
 - E-Bypass Start and Stop Pushbuttons
 - E-Bypass Pilot Light

- Typical heavy-duty applications include:**
- Centrifugal fan
 - Conveyor belt (long)
 - Crusher
 - Mill
 - Mixer
 - Stirrer

- Typical normal-duty applications include:**
- Belt thruster
 - Centrifugal pump
 - Compressor
 - Conveyor belt (short)
 - Elevator

Softstarters

Hydraulic Elevator Softstarter ELV-X



ELV-X series selection (PSTX softstarter control inside)


In-line connection - 3 wire Max HP rating @ rated voltage				Inside delta connection - 6 wire Max HP rating @ rated voltage				le setting range (A)	Max FLA (A)	Frame Size	Type code	Order code
200/208	220/240	440/480	550/600	200/208	220/240	440/480	550/600					
7.5	10	20	25	10	15	30	40	9...30	28	A	ELV30-X-600-70	1SFA971208R7000
10	10	25	30	15	20	40	50	11.1...37	34	A	ELV37-X-600-70	1SFA971209R7000
10	15	30	40	20	25	50	60	13.5...45	42	A	ELV45-X-600-70	1SFA971210R7000
20	20	40	50	30	40	75	100	18...60	60	A	ELV60-X-600-70	1SFA971211R7000
20	25	50	60	30	40	75	100	21.6...72	68	A	ELV72-X-600-70	1SFA971212R7000
25	30	60	75	40	50	100	125	25.5...85	80	A	ELV85-X-600-70	1SFA971213R7000
30	40	75	100	60	60	150	150	31.5...106	104	A	EL105-X-600-70	1SFA971214R7000
40	50	100	125	75	75	150	200	42.9...143	130	B	ELV142-X-600-70	1SFA971215R7000
50	60	125	150	75	100	200	250	51.3...171	169	B	ELV170-X-600-70	1SFA971216R7000

Main voltage 208-600 V AC 50/60 Hz, Control supply voltage 100-250 VAC 50/60 Hz, please see main catalog for Softstarters for more information 1SFC132012C0201.

ELV-X series assembly Frame A





ELV-X series assembly Frame B



AF Contactor
(Fault Contactor)

Dimension drawings

ELV-X frame A/B

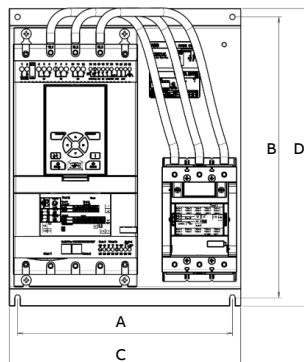

		Frame A	Frame B
Drill Holes	A	260 (10.24)	305 (12.01)
	B	340 (13.39)	405 (15.94)
Panel Dimension	C	280 (11.02)	345 (13.58)
	D	360 (14.17)	425 (16.73)
Depth	E	203.5 (8.01)	244.3 (9.62)

All dimensions in mm (inch)

IEC style contactors, overload relays and manual motor starters

Section 12


IEC style contactors, overload relays and manual motor starters

Table of contents

Contactors	
AF contactors ordering code construction	12-1
AF contactors	12-2
AF contactor accessories	12-12
B-Series mini ordering code construction	12-17
B-Series mini	12-18
M-Series mini ordering code construction	12-19
M-Series mini	12-20
Digital Solutions	
Novolink	12-21
Contactor relays	
K-Series mini	12-22
M-Series mini	12-22
NF Series	12-23
Overload relays	
EF electronic overloads and accessories	12-24
TF thermal overloads	12-25
Starters	
Manual motor starters	12-27
Manual motor starter accessories	12-29
Enclosed direct-on-line starters (DRA)	12-33

AF Contactors

Ordering code construction

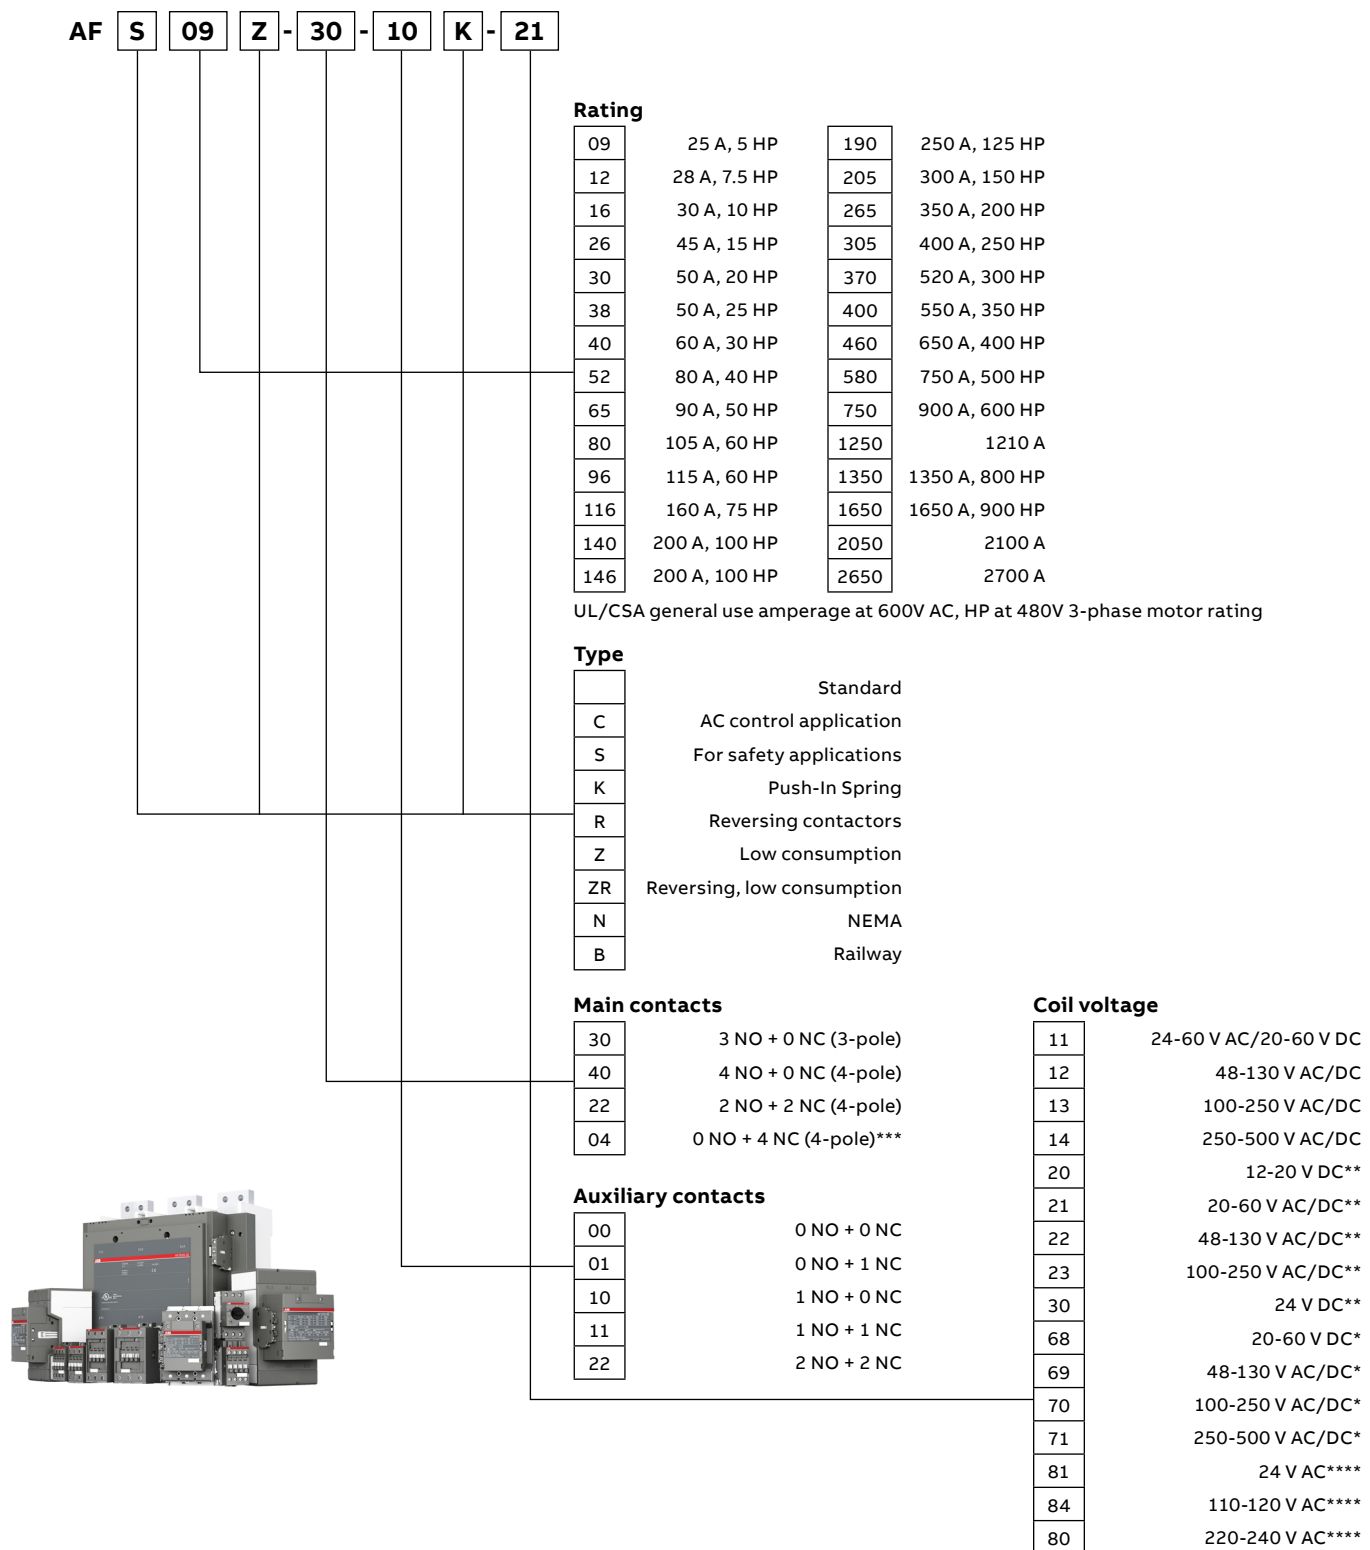

For reference only. For stocked items, see following pages.

**low consumption coils

*coils for AF400-AF750 only

***Configuration valid only for AFC16

****coils for AFC09-AFC65 only

AF Contactors

Full voltage non-reversing electronic contactors



		Main contacts					
		3 NO + 0 NC (30)				4 NO (40)	2 NO + 2 NC (22)
		Auxiliary contacts					
		none	1 NO	1 NC	1 NO + 1 NC	none	none
Coil Voltage	Rating	(00)	(10)	(01)	(11)	(00)	(00)
24–60 V AC/ 20–60 V DC (11)	25 A, 5 HP (09)	---	AF09-30-10-11	AF09-30-01-11	---	AF09-40-00-11	AF09-22-00-11
	28 A, 7.5 HP (12)	---	AF12-30-10-11	AF12-30-01-11	---	---	---
	30 A, 10 HP (16)	---	AF16-30-10-11	AF16-30-01-11	---	AF16-40-00-11	AF16-22-00-11
	45 A, 15 HP (26)	AF26-30-00-11	---	---	AF26-30-11-11	AF26-40-00-11	AF26-22-00-11
	50 A, 20 HP (30)	AF30-30-00-11	---	---	---	---	---
	50 A, 25 HP (38)	AF38-30-00-11	---	---	---	---	---
	60 A, 30 HP (40)	AF40-30-00-11	---	---	AF40-30-11-11	---	---
	80 A, 40 HP (52)	AF52-30-00-11	---	---	AF52-30-11-11	---	---
	90 A, 50 HP (65)	AF65-30-00-11	---	---	AF65-30-11-11	---	---
	105 A, 60 HP (80)	AF80-30-00-11	---	---	AF80-30-11-11	---	---
	115 A, 60 HP (96)	AF96-30-00-11	---	---	AF96-30-11-11	---	---
	160 A, 75 HP (116)	AF116-30-00-11	---	---	AF116-30-11-11	---	---
	200 A, 100 HP (140)	---	---	---	AF140-30-11-11	---	---
	200 A, 100 HP (146)	---	---	---	AF146-30-11-11	---	---
	250 A, 125 HP (190)	---	---	---	AF190-30-11-11	---	---
	300 A, 150 HP (205)	---	---	---	AF205-30-11-11	---	---
	350 A, 200 HP (265)	---	---	---	AF265-30-11-11	---	---
	400 A, 250 HP (305)	---	---	---	AF305-30-11-11	---	---
	520 A, 300 HP (370)	---	---	---	AF370-30-11-11	---	---
48–130 V AC/ DC (12)	25 A, 5 HP (09)	---	AF09-30-10-12	AF09-30-01-12	---	---	AF09-22-00-12
	28 A, 7.5 HP (12)	---	AF12-30-10-12	---	---	---	---
	30 A, 10 HP (16)	---	AF16-30-10-12	---	---	---	---
	45 A, 15 HP (26)	AF26-30-00-12	---	---	---	---	---
	50 A, 20 HP (30)	AF30-30-00-12	---	---	---	---	---
	50 A, 25 HP (38)	AF38-30-00-12	---	---	---	---	---
	60 A, 30 HP (40)	AF40-30-00-12	---	---	---	---	---
	80 A, 40 HP (52)	AF52-30-00-12	---	---	---	---	---
	90 A, 50 HP (65)	AF65-30-00-12	---	---	---	---	---
	105 A, 60 HP (80)	AF80-30-00-12	---	---	AF80-30-11-12	---	---
	115 A, 60 HP (96)	AF96-30-00-12	---	---	---	---	---
	160 A, 75 HP (116)	---	---	---	AF116-30-11-12	---	---
	200 A, 100 HP (140)	---	---	---	AF140-30-11-12	---	---
	200 A, 100 HP (146)	---	---	---	AF146-30-11-12	---	---
	250 A, 125 HP (190)	---	---	---	AF190-30-11-12	---	---
	300 A, 150 HP (205)	---	---	---	AF205-30-11-12	---	---

Table continues on next page.

AF Contactors

Full voltage non-reversing electronic contactors




		Main contacts					
		3 NO + 0 NC (30)				4 NO (40)	2 NO + 2 NC (22)
		Auxiliary contacts					
		none	1 NO	1 NC	1 NO + 1 NC	none	none
Coil Voltage	Rating	(00)	(10)	(01)	(11)	(00)	(00)
48–130 V AC/ DC (12)	350 A, 200 HP (265)	---	---	---	AF265-30-11-12	---	---
	400 A, 250 HP (305)	---	---	---	AF305-30-11-12	---	---
	520 A, 300 HP (370)	---	---	---	AF370-30-11-12	---	---
100–250 V AC/ DC (13)	25 A, 5 HP (09)	---	AF09-30-10-13	AF09-30-01-13	---	AF09-40-00-13	AF09-22-00-13
	28 A, 7.5 HP (12)	---	AF12-30-10-13	AF12-30-01-13	---	---	---
	30 A, 10 HP (16)	---	AF16-30-10-13	AF16-30-01-13	---	AF16-40-00-13	AF16-22-00-13
	45 A, 15 HP (26)	AF26-30-00-13	---	---	AF26-30-11-13	AF26-40-00-13	AF26-22-00-13
	50 A, 20 HP (30)	AF30-30-00-13	---	---	AF30-30-11-13	---	---
	50 A, 25 HP (38)	AF38-30-00-13	---	---	AF38-30-11-13	AF38-40-00-13	AF38-22-00-13
	60 A, 30 HP (40)	AF40-30-00-13	---	---	AF40-30-11-13	AF40-40-00-13	AF40-22-00-13
	80 A, 40 HP (52)	AF52-30-00-13	---	---	AF52-30-11-13	---	---
	90 A, 50 HP (65)	AF65-30-00-13	---	---	AF65-30-11-13	---	---
	105 A, 60 HP (80)	AF80-30-00-13	---	---	AF80-30-11-13	---	---
	115 A, 60 HP (96)	AF96-30-00-13	---	---	AF96-30-11-13	---	---
	160 A, 75 HP (116)	AF116-30-00-13	---	---	AF116-30-11-13	---	---
	200 A, 100 HP (140)	---	---	---	AF140-30-11-13	---	---
	200 A, 100 HP (146)	---	---	---	AF146-30-11-13	---	---
	250 A, 125 HP (190)	AF190-30-00-13	---	---	AF190-30-11-13	---	---
	300 A, 150 HP (205)	AF205-30-00-13	---	---	AF205-30-11-13	---	---
	350 A, 200 HP (265)	---	---	---	AF265-30-11-13	---	---
	400 A, 250 HP (305)	---	---	---	AF305-30-11-13	---	---
	520 A, 300 HP (370)	---	---	---	AF370-30-11-13	---	---
250–500 V AC/ DC (14)	25 A, 5 HP (09)	---	AF09-30-10-14	---	---	AF09-40-00-14	---
	28 A, 7.5 HP (12)	---	AF12-30-10-14	---	---	---	---
	30 A, 10 HP (16)	---	AF16-30-10-14	---	---	AF16-40-00-14	---
	45 A, 15 HP (26)	AF26-30-00-14	---	---	---	AF26-40-00-14	---
	50 A, 20 HP (30)	AF30-30-00-14	---	---	---	---	---
	50 A, 25 HP (38)	AF38-30-00-14	---	---	---	---	---
	60 A, 30 HP (40)	AF40-30-00-14	---	---	AF40-30-11-14	---	---
	80 A, 40 HP (52)	AF52-30-00-14	---	---	AF52-30-11-14	---	---
	90 A, 50 HP (65)	AF65-30-00-14	---	---	AF65-30-11-14	---	---
	105 A, 60 HP (80)	AF80-30-00-14	---	---	AF80-30-11-14	---	---
	115 A, 60 HP (96)	AF96-30-00-14	---	---	AF96-30-11-14	---	---
	160 A, 75 HP (116)	---	---	---	AF116-30-11-14	---	---

Table continues on next page.

AF Contactors

Full voltage non-reversing electronic contactors

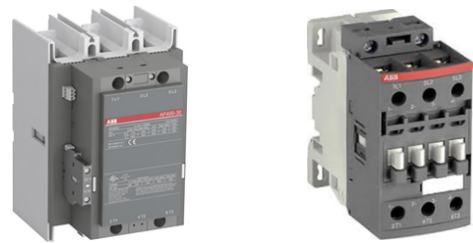

		Main contacts					
		3 NO + 0 NC (30)				4 NO (40)	2 NO + 2 NC (22)
		Auxiliary contacts					
		none	1 NO	1 NC	1 NO + 1 NC	none	none
Coil Voltage	Rating	(00)	(10)	(01)	(11)	(00)	(00)
250–500 V AC/ DC (14)	200 A, 100 HP (140)	---	---	---	AF140-30-11-14	---	---
	200 A, 100 HP (146)	---	---	---	AF146-30-11-14	---	---
	250 A, 125 HP (190)	---	---	---	AF190-30-11-14	---	---
	300 A, 150 HP (205)	---	---	---	AF205-30-11-14	---	---
	350 A, 200 HP (265)	---	---	---	AF265-30-11-14	---	---
	400 A, 250 HP (305)	---	---	---	AF305-30-11-14	---	---
	520 A, 300 HP (370)	---	---	---	AF370-30-11-14	---	---
20-60 V DC (68)	550 A, 350 HP (400)	---	---	---	AF400-30-11-68	---	---
	650 A, 400 HP (460)	---	---	---	AF460-30-11-68	---	---
	750 A, 500 HP (580)	---	---	---	AF580-30-11-68	---	---
	900 A, 600 HP (750)	---	---	---	AF750-30-11-68	---	---
48–130 V AC/ DC (69)	550 A, 350 HP (400)	---	---	---	AF400-30-11-69	---	---
	650 A, 400 HP (460)	---	---	---	AF460-30-11-69	---	---
100–250 V AC/ DC (70)	550 A, 350 HP (400)	---	---	---	AF400-30-11-70	---	---
	650 A, 400 HP (460)	---	---	---	AF460-30-11-70	---	---
	750 A, 500 HP (580)	---	---	---	AF580-30-11-70	---	---
	900 A, 600 HP (750)	---	---	---	AF750-30-11-70	---	---
	1210 A (1250)	---	---	---	AF1250-30-11-70	---	---
	1350 A, 800 HP (1350)	---	---	---	AF1350-30-11-70	---	---
	1650 A, 900 HP (1650)	---	---	---	AF1650-30-11-70	---	---
	2100 A (2050)	---	---	---	AF2050-30-11-70	---	---
	2700 A (2650)	---	---	---	AF2650-30-11-70	---	---
250 – 500 V AC/DC (71)	550 A, 350 HP (400)	---	---	---	AF400-30-11-71	---	---
	650 A, 400 HP (460)	---	---	---	AF460-30-11-71	---	---

AF Contactors

Electromagnetic contactors for AC control applications



		Main contacts						
		3 NO + 0 NC (30)			4 NO (40)		2 NO + 2 NC (22) 4 NC (04)	
		Auxiliary contacts						
		none	1 NO	1 NC	1 NO + 1 NC	none	none	
Coil Voltage	Rating	(00)	(10)	(01)	(11)	(00)	(00)	
24 V AC (81)	25 A, 5 HP (09)	---	AFC09-30-10-81	---	---	---	---	---
	28 A, 7.5 HP (12)	---	AFC12-30-10-81	---	---	---	---	---
	30 A, 10 HP (16)	---	AFC16-30-10-81	---	---	---	---	AFC16-04-00-81
	45 A, 15 HP (26)	---	---	---	---	---	---	---
	50 A, 20 HP (30)	---	---	---	---	---	---	---
	50 A, 25 HP (38)	---	---	---	---	---	---	---
	60 A, 30 HP (40)	AFC40-30-00-81	---	---	---	---	---	---
	80 A, 40 HP (52)	---	---	---	---	---	---	---
	90 A, 50 HP (65)	---	---	---	---	---	---	---
110-120 V AC (84)	25 A, 5 HP (09)	---	AFC09-30-10-84	AFC09-30-01-84	---	AFC09-40-00-84	AFC09-22-00-84	---
	28 A, 7.5 HP (12)	---	AFC12-30-10-84	AFC12-30-01-84	---	---	---	---
	30 A, 10 HP (16)	---	AFC16-30-10-84	AFC16-30-01-84	---	AFC16-40-00-84	AFC16-22-00-84	AFC16-04-00-84
	45 A, 15 HP (26)	AFC26-30-00-84	---	---	---	AFC26-40-00-84	AFC26-22-00-84	---
	50 A, 20 HP (30)	AFC30-30-00-84	---	---	---	---	---	---
	50 A, 25 HP (38)	AFC38-30-00-84	---	---	---	---	---	---
	60 A, 30 HP (40)	AFC40-30-00-84	---	---	AFC40-30-11-84	---	---	---
	80 A, 40 HP (52)	AFC52-30-00-84	---	---	---	---	---	---
	90 A, 50 HP (65)	AFC65-30-00-84	---	---	AFC65-30-11-84	---	---	---
220-240 V AC (80)	25 A, 5 HP (09)	---	AFC09-30-10-80	---	---	---	---	---
	28 A, 7.5 HP (12)	---	AFC12-30-10-80	---	---	---	---	---
	30 A, 10 HP (16)	---	AFC16-30-10-80	---	---	AFC16-40-00-80	---	---
	45 A, 15 HP (26)	---	---	---	---	---	---	---
	50 A, 20 HP (30)	---	---	---	---	---	---	---
	50 A, 25 HP (38)	---	---	---	---	---	---	---
	60 A, 30 HP (40)	---	---	---	---	---	---	---
	80 A, 40 HP (52)	---	---	---	---	---	---	---
	90 A, 50 HP (65)	---	---	---	---	---	---	---

AF Contactors

Push-in (PI) spring and safety application contactors



		Main contacts				
		3 NO + 0 NC (30)				
		Auxiliary contacts				
		none	1 NO	1 NC	1 NO + 1 NC	2 NO + 2 NC
Coil Voltage	Rating	(00)	(10)	(01)	(11)	(22)
Push-In (PI) Spring contactors						
24–60 V AC/	25 A, 5 HP (09)	---	AF09-30-10K-11	AF09-30-01K-11	---	---
20–60 V DC (11)	28 A, 7.5 HP (12)	---	AF12-30-10K-11	AF12-30-01K-11	---	---
	30 A, 10 HP (16)	---	AF16-30-10K-11	AF16-30-01K-11	---	---
	45 A, 15 HP (26)	AF26-30-00K-11	---	---	---	---
	50 A, 20 HP (30)	AF30-30-00K-11	---	---	---	---
	50 A, 25 HP (38)	AF38-30-00K-13	---	---	---	---
100–250 V AC/	25 A, 5 HP (09)	---	AF09-30-10K-13	AF09-30-01K-13	---	---
DC (13)	28 A, 7.5 HP (12)	---	AF12-30-10K-13	AF12-30-01K-13	---	---
	30 A, 10 HP (16)	---	AF16-30-10K-13	AF16-30-01K-13	---	---
	45 A, 15 HP (26)	AF26-30-00K-13	---	---	---	---
	50 A, 20 HP (30)	AF30-30-00K-11	---	---	---	---
	50 A, 25 HP (38)	AF38-30-00K-13	---	---	---	---
Contactors for safety applications						
24–60 V AC/	25 A, 5 HP (09)	---	---	---	---	AFS09-30-22-11
20–60 V DC (11)	28 A, 7.5 HP (12)	---	---	---	---	AFS12-30-22-11
	30 A, 10 HP (16)	---	---	---	---	AFS16-30-22-11
	45 A, 15 HP (26)	---	---	---	---	AFS26-30-22-11
	50 A, 20 HP (30)	---	---	---	---	AFS30-30-22-11
	50 A, 25 HP (38)	---	---	---	---	AFS38-30-22-11
	80 A, 40 HP (52)	---	---	---	---	AFS52-30-22-11
	90 A, 50 HP (65)	---	---	---	---	AFS65-30-22-11
	105 A, 60 HP (80)	---	---	---	---	AFS80-30-22-11
	115 A, 60 HP (96)	---	---	---	---	AFS96-30-22-11
100–250 V AC/	25 A, 5 HP (09)	---	---	---	---	AFS09-30-22-13
DC (13)	30 A, 10 HP (16)	---	---	---	---	AFS16-30-22-13
	45 A, 15 HP (26)	---	---	---	---	AFS26-30-22-13
	50 A, 20 HP (30)	---	---	---	---	AFS30-30-22-13
	80 A, 40 HP (52)	---	---	---	---	AFS40-30-22-13
	80 A, 40 HP (52)	---	---	---	---	AFS52-30-22-13
	90 A, 50 HP (65)	---	---	---	---	AFS65-30-22-13
	105 A, 60 HP (80)	---	---	---	---	AFS80-30-22-13
	115 A, 60 HP (96)	---	---	---	---	AFS96-30-22-13
Low consumption for safety applications						
24 V DC (30)	25 A, 5 HP (09)	---	---	---	AFS09Z-30-22-30	---
	28 A, 7.5 HP (12)	---	---	---	AFS12Z-30-22-30	---
	30 A, 10 HP (16)	---	---	---	AFS16Z-30-22-30	---
	45 A, 15 HP (26)	---	---	---	AFS26Z-30-22-30	---
	50 A, 20 HP (30)	---	---	---	AFS30Z-30-22-30	---
	50 A, 25 HP (38)	---	---	---	AFS38Z-30-22-30	---

AF Contactors


Pre-assembled Reversing contactors



		Main contacts				
		3 NO + 0 NC (30)				
		Auxiliary contacts				
		none	1 NO	1 NC	1 NO + 1 NC	2 NO + 2 NC
Coil Voltage	Rating	(00)	(10)	(01)	(11)	(22)
Reversing contactors						
24–60 V AC/20–60 V DC (11)	25 A, 5 HP (09)	---	---	---	---	AF09R-30-22-11
	28 A, 7.5 HP (12)	---	---	---	---	AF12R-30-22-11
	30 A, 10 HP (16)	---	---	---	---	AF16R-30-22-11
	45 A, 15 HP (26)	---	---	---	---	AF26R-30-22-11
100–250 V AC/DC (13)	25 A, 5 HP (09)	---	---	---	---	AF09R-30-22-13
	28 A, 7.5 HP (12)	---	---	---	---	AF12R-30-22-13
	30 A, 10 HP (16)	---	---	---	---	AF16R-30-22-13
	45 A, 15 HP (26)	---	---	---	---	AF26R-30-22-13

AF Contactors

NEMA contactors and bar connections



		Main contacts				
		3 NO + 0 NC (30)				
		Auxiliary contacts				
		none	1 NO	1 NC	1 NO + 1 NC	2 NO + 2 NC
Coil Voltage	Rating	(00)	(10)	(01)	(11)	(22)
NEMA contactors						
100–250 V AC/ DC (13)	NEMA 00 (25 A, 5 HP)	---	AF09N00-30-10-13	---	---	---
	NEMA 0 (28 A, 7.5 HP)	---	AF12N0-30-10-13	---	---	---
	NEMA 1 (45 A, 15 HP)	AF26N1-30-00-13	---	---	AF26N1-30-11-13	---
	NEMA 2 (60 A, 30 HP)	---	---	---	AF40N2-30-11-13	---
	NEMA 3 (105 A, 60 HP)	---	---	---	AF80N3-30-11-13	---
	NEMA 4 (200 A, 100 HP)	---	---	---	AF140N4-30-11-13	---
	NEMA 5 (350 A, 200 HP)	---	---	---	AF265N5-30-11-13	---
100-250 V AC/ DC (70)	NEMA 6 (50 A, 400 HP)	---	---	---	AF460N6-3011-70	---
	NEMA 7 (900 A, 600 HP)	---	---	---	AF750N7-3011-70	---
Bar Connections						
100-250 V AC/ DC (13)	200 A, 100 HP (146)	---	---	---	AF146-30-11B-13	---

AF Contactors

Low consumption (Z) coil




		Main contacts				
		3 NO + 0 NC (30)			4 NO (40)	
		Auxiliary contacts				
Coil voltage	Rating	n/a (00)	1 NO (10)	1 NC (01)	2 NO + 2 NC (22)	n/a (00)
Low consumption - standard						
12-20 V DC (20)	25 A, 5 HP (09)	---	AF09Z-30-10-20	---	---	---
	28 A, 7,5 HP (12)	---	AF12Z-30-10-20	---	---	---
	30 A, 10 HP (16)	---	AF16Z-30-10-20	---	---	---
	45 A, 15 HP (26)	AF26Z-30-00-20	---	---	---	---
	50 A 20 HP (30)	---	---	---	---	---
	50 A, 25 HP (38)	---	---	---	---	---
20-60 V AC/ DC (21)	25 A, 5 HP (09)	---	AF09Z-30-10-21	AF09Z-30-01-21	AF09Z-22-00-21	AF09Z-40-00-21
	28 A, 7,5 HP (12)	---	AF12Z-30-10-21	AF12Z-30-01-21	---	---
	30 A, 10 HP (16)	---	AF16Z-30-10-21	AF16Z-30-01-21	---	AF16Z-40-00-21
	45 A, 15 HP (26)	AF26Z-30-00-21	---	---	---	AF26Z-40-00-21
	50 A, 20 HP (30)	AF30Z-30-00-21	---	---	---	---
	50 A, 25 HP (38)	AF38Z-30-00-21	---	---	---	AF38Z-40-00-21
48-130 V AC/ DC (22)	25 A, 5 HP (09)	---	AF09Z-30-10-22	---	---	---
100-250 V AC/ DC (23)	25 A, 5 HP (09)	---	AF09Z-30-10-23	---	---	---
	28 A, 7,5 HP (12)	---	AF12Z-30-10-23	---	---	---
	30 A, 10 HP (16)	---	AF16Z-30-10-23	---	---	---
24 V DC (30)	25 A, 5 HP (09)	---	AF09Z-30-10-30	---	---	---
	28 A, 7,5 HP (12)	---	AF12Z-30-10-30	---	---	---
	30 A, 10 HP (16)	---	AF16Z-30-10-30	---	---	---
	45 A, 15 HP (26)	AF26Z-30-00-30	---	---	---	---
	50 A, 20 HP (30)	AF30Z-30-00-30	---	---	---	---
	50 A, 25 HP (38)	AF38Z-30-00-30	---	---	---	---
Low consumption - reversing						
20-60 V AC/DC (21)	25 A, 5 HP (09)	---	---	---	AF09ZR-30-22-21	---
	28 A, 7,5 HP (12)	---	---	---	AF12ZR-30-22-21	---
	30 A, 10 HP (16)	---	---	---	AF16ZR-30-22-21	---

Contact **Technical Support** for additional low consumption information.


AF09 ... AF96 3-pole contactors

Contactors and main accessories

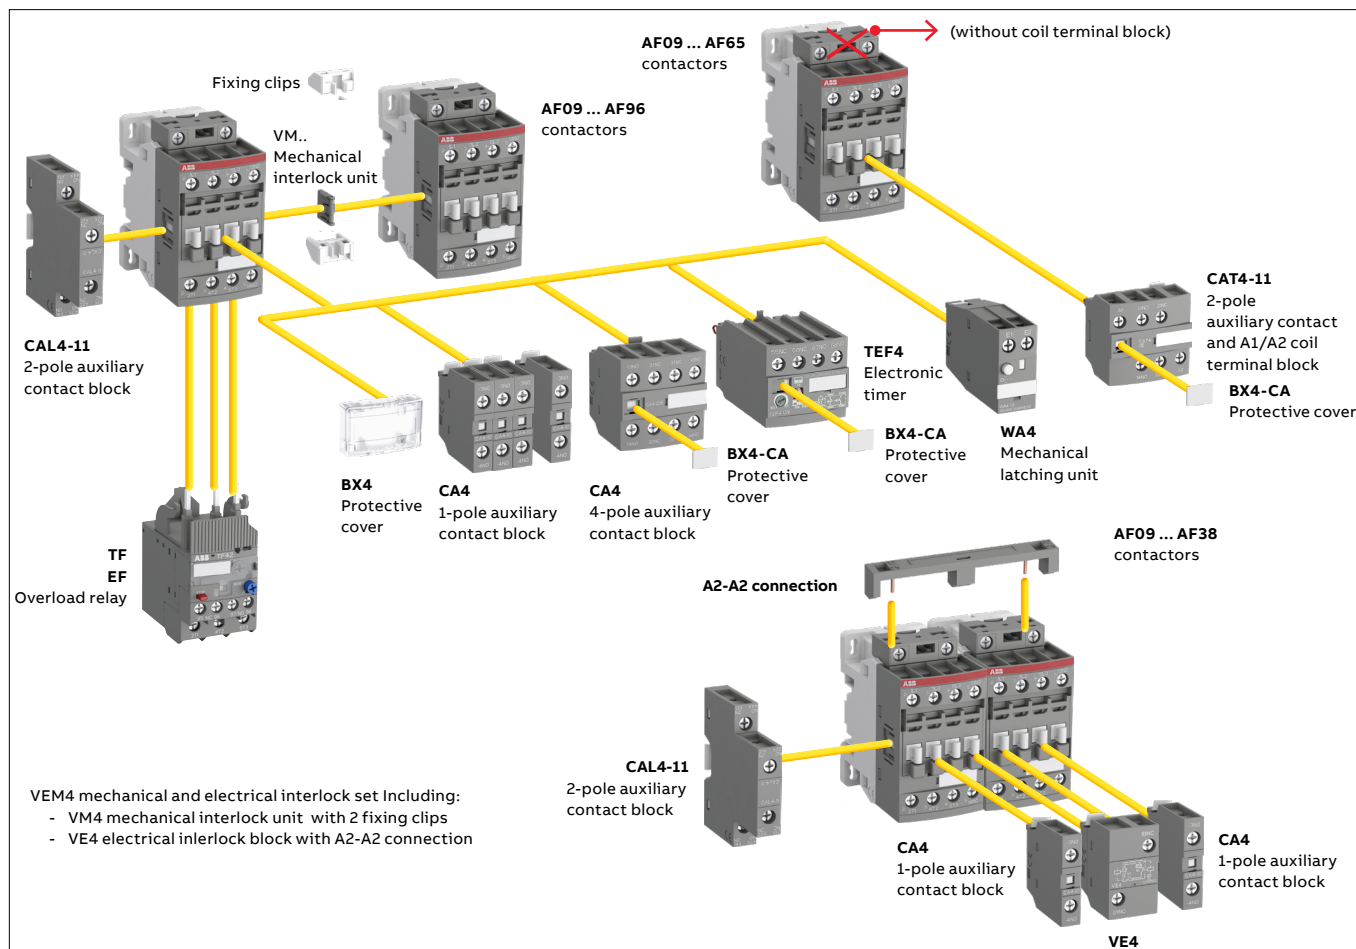

AF116 ... AF370 3-pole contactors

Contactors and main accessories

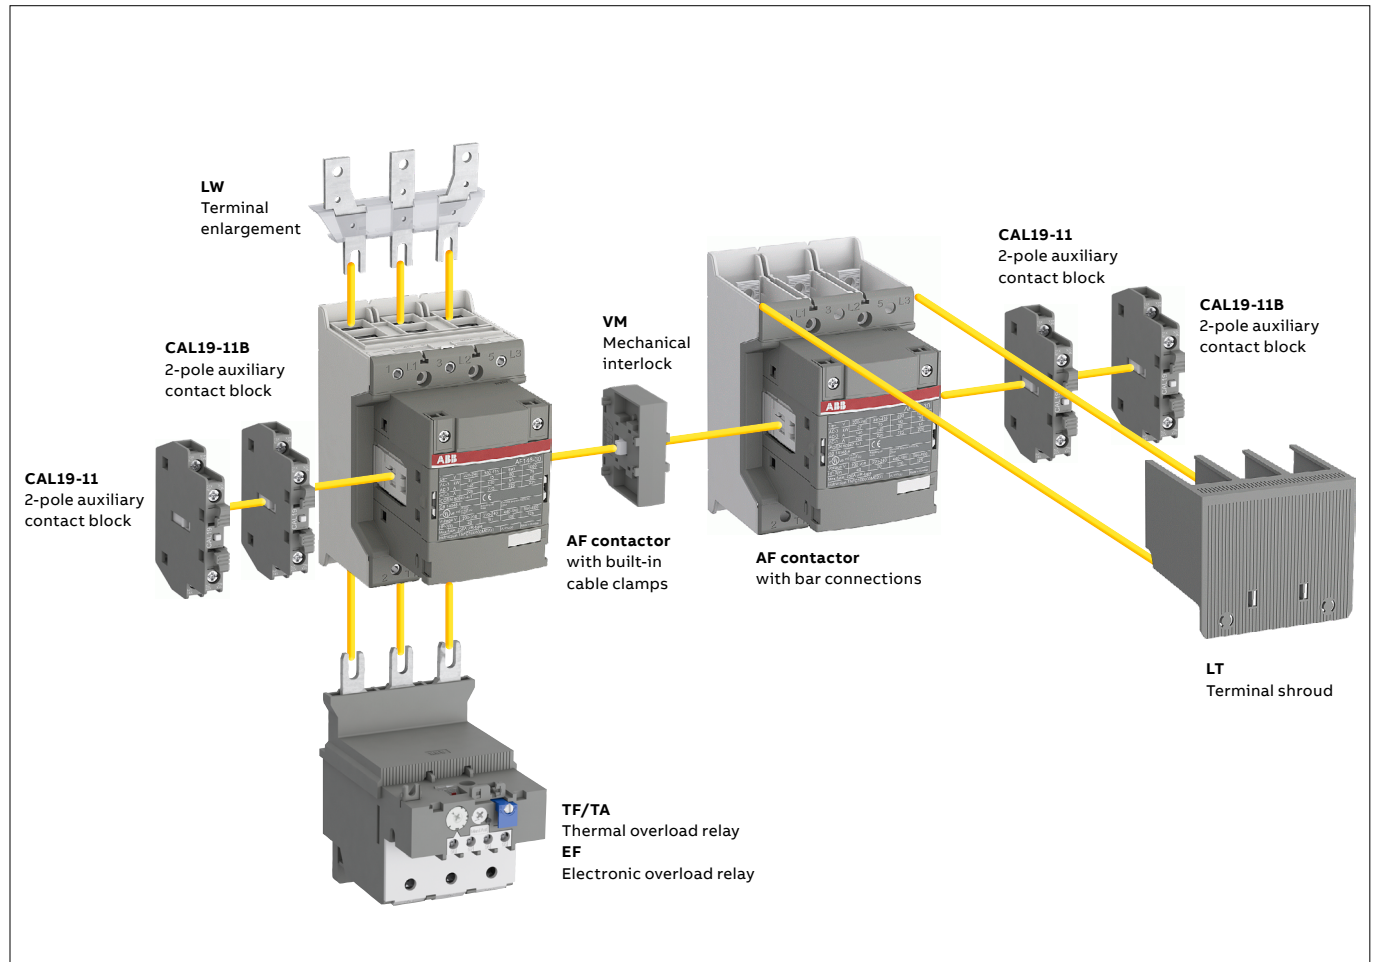

AF Contactors

Accessories



Auxiliary contacts


Contacts	For contactors	Ordering Code
Instantaneous auxiliary contact block - front mount		
1 NO	AF09-AF96	CA4-10
1 NC	AF09-AF96	CA4-01
2 NO + 2 NC	AF09-AF16	CA4-22M
3 NO + 1 NC	AF09-AF16	CA4-31M
1 NO + 3 NC	AF09-AF16	CA4-13M
4 NC	AF09-AF16	CA4-04M
2 NO + 2 NC	AF09-AF16	CA4-22U
3 NO + 1 NC	AF09-AF16	CA4-31U
4 NO	AF09-AF16	CA4-40U
2 NO + 2 NC	AF26-AF96	CA4-22E
3 NO + 1 NC	AF26-AF96	CA4-31E
4 NO	AF26-AF96	CA4-40E
4 NC	AF26-AF96	CA4-04E
4 NC	NF	CA4-04N
1 NO + 3 NC	NF	CA4-13N
2 NO + 2 NC	NF	CA4-22N
3 NO + 1 NC	NF	CA4-31N
4 NO	NF	CA4-40N
Auxiliary contact with NO leading and NC lagging contacts - front mount		
1 NO	AF09-AF96	CC4-10
1 NC	AF09-AF96	CC4-01
Instantaneous auxiliary contact block - side mount		
1 NO + 1 NC	AF09-AF96, NF	CAL4-11
1 NO + 1 NC	AF116-AF370	CAL19-11
1 NO + 1 NC	AF116-AF370	CAL19-11B
1 NO + 1 NC	AF400-AF2650	CAL18-11
1 NO + 1 NC	AF400-AF2650	CAL18-11B
Instantaneous auxiliary contact and A1/A2 terminal blocks - front mount		
1 NO + 1 NC	AF09-16	CAT4-11M
1 NO + 1 NC	AF26-AF65	CAT4-11E
Auxiliary contacts for harsh environments		
1 NO	AF116-AF370	CEL19-10
1 NC	AF116-AF370	CEL19-01
1 NO with built-in micro switch IP67	AF400-AF2650	CEL18-10
1 NC with built-in micro switch IP67	AF400-AF2650	CEL18-01
Accessories for Push-In (PI) Spring AF-K contactors		
1 NO Auxiliary contact – Push In Spring	AF09K-AF96K	CA4-10K
1 NC Auxiliary contact – Push In Spring	AF09K-AF96K	CA4-01K
1 NO + 1 NC Auxiliary contact – Push In Spring	AF09K-AF96K	CAL4-11K
Additional coil terminal block	AF09K-AF96K, NF	LDC4K

Additional coil terminal block

Description	For contactors	Ordering Code
Additional coil terminal block	AF09-AF96, NF	LDC4


AF Contactors

Accessories



Terminal shrouds

For contactors	For use with	Ordering Code
AF190, AF205	with cable clamps	LT205-30C
AF190, AF205	with compression lugs	LT205-30L
AF190, AF205	shorting bar between contactor and OL	LT205-30Y
AF265-AF370	with cable clamps	LT370-30C
AF265-AF370	for use with terminal lugs ATK300/2	LT370-30D
AF265-AF370	with compression lugs	LT370-30L
AF400, AF460	with cable clamps	LT460-AC
AF400, AF460	with compression lugs	LT460-AL
AF580, AF750	with cable clamps	LT750-AC
AF580, AF750	with compression lugs	LT750-AL



Terminal enlargements

For contactors	Hole dia. mm	Bar mm	Ordering Code
AF116-AF146	6.5	13 X 3	LW140
AF190, AF205	10.5	17.5 X 5	LW205
AF265-AF370	10.5	20 X 5	LW370
AF400, AF460	10.5	25 X 5	LW460
AF580, AF750	13	40 X 6	LW750
AF1250	13	50 X 10	LW1250



Terminal extension

For contactors	Hole dia. mm	Bar mm	Ordering Code
AF116-AF146	6.5	13 X 3	LX140
AF190, AF205	8.5	17.5 X 5	LX205
AF265-AF370	10.5	20 X 5	LX370
AF400, AF460	10.5	25 X 5	LX460
AF580, AF750	13	40 X 6	LX750



Terminal connecting strips

For contactors	Max. nominal continuous current with 3 parallel poles (A)	Ordering Code
AF116-AF146	240	LY140
AF190, AF205	400	LY185
AF265-AF370	670	LY300

Connection sockets

For contactors	Type	Ordering Code
AF116-AF146	3-pole	LL146-30

Table continues on next page.


AF Contactors

Accessories

Terminal lug kits


For contactors	Wire size	# lugs per kit	Ordering Code
AF190-AF205	4 AWG-300 MCM	3	ATK185
AF265-AF370	4 AWG-400 MCM	3	ATK300
AF265-AF370	4 AWG-500 MCM	3	ATK300/2
AF400-AF580	2/0 AWG-500 MCM	3	ATK580/2
AF580-AF750	2/0 AWG-500 MCM	3	ATK750/3
AF1350	4/0 AWG-500 MCM	3	ATK1350/4
AF1350-AF1650	1/0 AWG-750 MCM	3	ATK1650/4
AF1350-AF1650	1/0 AWG-750 MCM	3	ATK1650/6

Spare terminal hardware




For contactors	Ordering Code
AF190, AF205	LE185
AF265-AF370	LE300
AF400-AF580	LE460
AF580, AF750	LE750

Connecting links — AF contactor to manual motor starter



Contactors	Manual motor starter	Ordering Code
AF09 - AF16	MS116-0.16-MS116-25	BEA16-4
	MS132-0.016-MS132-25	
AF26 - AF38	MS116-0.16-MS116-16	BEA26-4
	MS132-0.16-MS132-10	
	MS116-20-MS116-32	BEA38-4
	MS132-12-MS132-32	
AF40 - AF65	MS165-16-MS165-65	BEA65-4

Connection bars — AF contactor to MCCB Vertical assembly









Contactors	MCCB	Ordering Code
AF116 - AF146	XT2	BEA140/XT2
AF116 - AF146	XT3	BEA140/XT3
AF116 - AF146	XT4	BEA140/XT4
AF190, AF205	XT4	BEA205/XT4
AF265, AF305, AF370	XT5	BEA370/XT5
AF400, AF460	XT5	BEA460/XT5
AF580, AF750	XT5	BEA750/XT5

Table continues on next page.

AF Contactors

Accessories



Connection set for reversing contactors

For contactors	Ordering Code
AF09-AF16	BER16-4
AF26-AF38	BER38-4
AF40-AF65	BER65-4
AF80-AF96	BER96-4
AF116-AF146	BER140-4
AF190-AF205	BER205-4
AF265-AF370	BER370-4
AF400-AF460	BEM460-30
AF580-AF750	BEM750-30

Mechanical interlock units

For contactors	Ordering Code
AF09-AF38	VM4
AF40-AF96	VM96-4
AF116-AF370	VM19
AF116-AF146, AF190, AF205	VM140/190
AF190, AF205, AF265-AF370	VM205/265
AF145-AF300	VM300H
AF400-AF1250	VM750H
AF1350-AF2650	VM1650H

Mechanical and electrical interlock set

For contactors	Ordering Code
AF09-AF38	VEM4

Phase-to-phase connection sets

For contactors	Ordering Code
AF116-AF146	BEP140-30
AF190-AF205	BEP205-30
AF265-AF370	BEP370-30
AF400-AF460	BES460-30
AF580-AF750	BES750-30

Star-delta starting connection sets

For contactors	Ordering Code
AF09-AF16	BEY16-4
AF26-AF38	BEY38-4
AF40-AF65	BEY65-4
AF80-AF96	BEY96-4
AF116-AF146	BEY140-4
AF190-AF205	BEY190-4

Table continues on next page.

AF Contactors

Accessories



Electronic timers

Time delay range	Delay type	Auxiliary contacts	Model	Ordering Code
0.1-1 s	ON-delay	1 NO + 1 NC	AF09-AF96	TEF4-ON
10-100 s	OFF-delay	1 NO + 1 NC	AF09-AF96	TEF4-OFF



Interface Relay

For contactors	Ordering Code
AF(Z)09-AF96	AF-RA4


Surge suppressors for AFC only

For contactors	Rated Coil Voltage	Ordering Code
AFC09...AFC38	24...50	RC4-1/50
	50...130	RC4-1/130
	110...260	RC4-1/260
	50...130	RV4-1/130
	110...260	RV4-1/260
AFC40...AFC65	24...50	RC4-2/50
	50...130	RC4-2/130
	110...260	RC4-2/260
	250...440	RC4-2/440

RV4: Surge suppressor fitted with varistor circuit
RC4: Surge suppressor fitted with RC circuit
The use of a surge suppressor will modify the operating time of the contactor or contactor relay

B-Series mini contactors

Ordering code construction

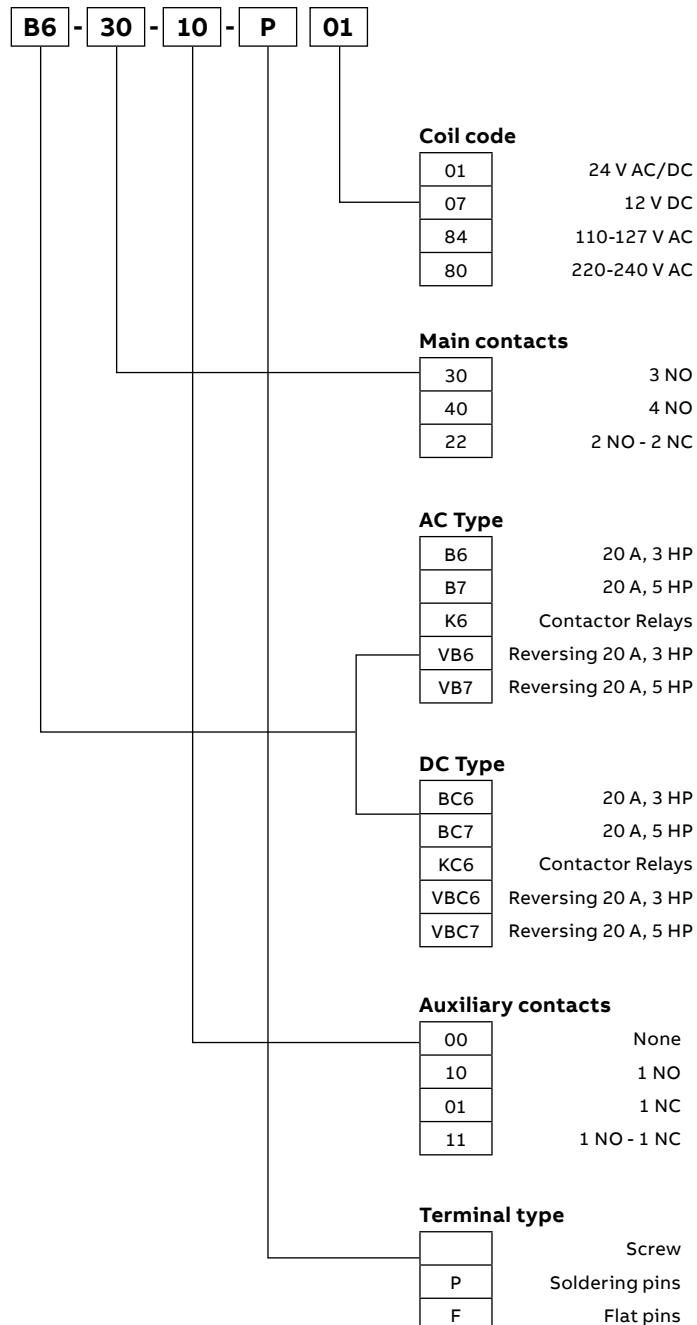

For reference only. For stocked items, see following pages.

Mini contactors

B-Series





		Main contacts					
		3 NO + 0 NC (30)				4 NO (40)	2 NO + 2 NC (22)
		Auxiliary contacts					
		none	1 NO	1 NC	1 NO + 1 NC	none	none
AC Control Supply	Rating	(00)	(10)	(01)	(11)	(00)	(00)
Screw Terminals							
24 V AC (01)	20 A, 3 HP	---	B6-30-10-01	---	---	---	---
	20 A, 5 HP	---	B7-30-10-01	B7-30-01-01	---	---	B7-22-00-01
110-127 V AC (84)	20 A, 3 HP	---	B6-30-10-84	---	---	B6-40-00-84	---
	20 A, 5 HP	---	B7-30-10-84	B7-30-01-84	---	---	---
220-240 V AC (80)	20 A, 3 HP	---	B6-30-10-80	---	---	---	B6-22-00-80
	20 A, 5 HP	---	B7-30-10-80	---	---	---	---
Flat Pins							
24 V AC (01)	20 A, 5 HP	---	B7-30-10-F01	---	---	---	---
220-240 V AC (80)	20 A, 5 HP	---	---	---	---	B7-40-00-F-80	---
DC Control Supply							
Screw Terminals							
12 V DC (07)	20 A, 3 HP	---	BC6-30-10-07	---	---	---	---
	20 A, 5 HP	---	---	---	---	BC7-40-00-07	---
24 V DC (01)	20 A, 3 HP	---	BC6-30-10-01	BC6-30-01-01	---	BC6-40-00-01	---
	20 A, 5 HP	---	BC7-30-10-01	BC7-30-01-01	---	---	---
Flat Pins							
24 V AC (01)	20 A, 5 HP	---	---	---	---	BC7-40-00-F-01	---
Soldering Pins							
24 V DC (01)	20 A, 3 HP	---	BC6-30-10-P01	---	---	---	---
Reversing DC							
Screw Terminals							
24 V DC (01)	20 A, 3 HP	---	---	VBC6-30-01-01	---	---	---
	20 A, 5 HP	---	VBC7-30-10-01	VBC7-30-01-01	---	---	---
Soldering Pins							
24 V DC (01)	20 A, 3 HP	---	---	VBC6-30-01-P01	---	---	---
Reversing AC							
Screw Terminals							
110-127 V AC (84)	20 A, 3 HP	---	---	VB6-30-01-84	---	---	---
	20 A, 5 HP	---	VB7-30-10-84	VB7-30-01-84	---	---	---



M-Series mini contactors

Ordering code construction

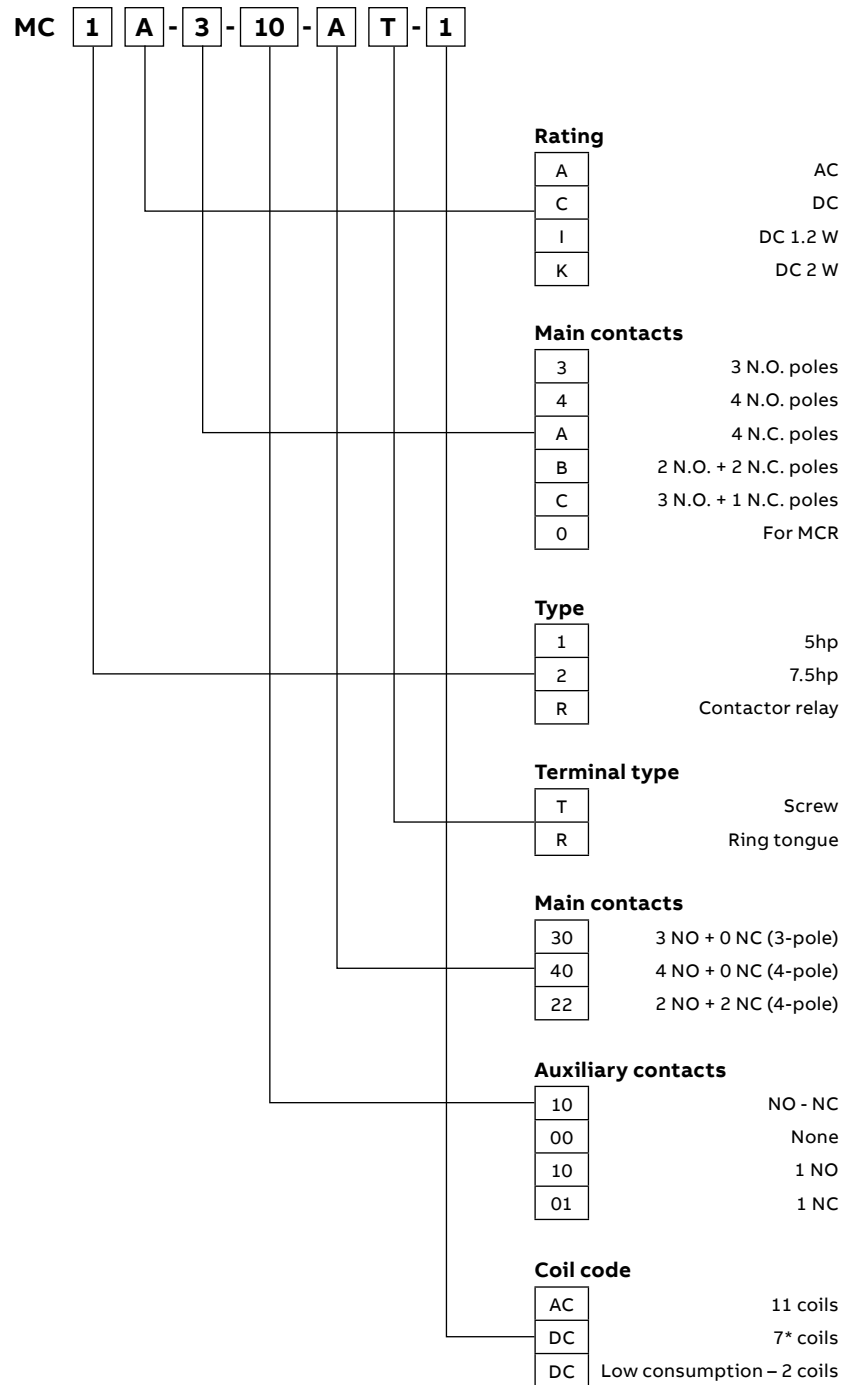

For reference only. For stocked items, see following pages.

Mini contactors

M-Series



		Main contacts					
		3 NO + 0 NC (30)				4 NO (40)	2 NO + 2 NC (22)
		Auxiliary contacts					
		none	1 NO	1 NC	1 NO + 1 NC	none	none
AC Control Supply	Rating	(00)	(10)	(01)	(11)	(00)	(00)
Screw Terminals							
24 V AC	20 A, 5 HP	---	MC1A-3-10-AT-1	MC1A-3-01-AT-1	---	---	---
	20 A, 7.5 HP	---	MC2A-3-10-AT-1	---	---	---	---
110-115 V AC	20 A, 5 HP	---	MC1A-3-10-AT-J	MC1A-3-01-AT-J	---	MC1A-4-00-AT-J	---
	20 A, 7.5 HP	---	MC2A-3-10-AT-J	---	---	---	---
220-240 V AC	20 A, 5 HP	---	---	MC1A-3-01-AT-N	---	---	---
DC Control Supply							
Screw Terminals							
12 V DC	20 A, 5 HP	---	MC1C-3-10-AT-B	---	---	---	---
24 V DC	20 A, 5 HP	---	MC1C-3-10-AT-D	MC1C-3-01-AT-D	---	---	---
Accessories							
Description		Variants			Ordering Code		
Side mounted instant AUX contact block		MC1-MC2			MACL1-10-AT		
Front mounted instant AUX contact block		MC1-MC2 (EN 50012)			MACN2-02-AT		
Front mounted instant AUX contact block		MC1-MC2 (EN 50005)			MARN4-22-AT		
Surge Suppressor		MC1-MC2 (AC)			MP0A-AE2		
Electronic Timers		MC1-MC2			MREB-C10-AC2		

Digital solutions

Novolink



SCV10-40.1



SC10-40.1



SFM1-A11.1



SFM-CAB-RJTB.1-500



SFM-CAB-S.1-50



SFM-CAB-S.1-25

Description

ABB's Novolink devices consist of the smart function module SFM1 and the sensor module SCV10-40. They allow the remote control and monitoring of AF contactors via X20 bus from within a B&R PLC. The sensor module SCV10-40 is optional and can be connected to the SFM1 module and provides functions for motor and application protection. It provides data for measuring voltage, current, frequency and further derived physical quantities such as cos phi, real power etc.

The SFM1 can be snapped onto AF09...AF96 contactors with 24 V DC coil voltage. The module is equipped with two X2X interfaces for incoming and outgoing connections (daisy chain). The module and contactor are supplied via 24 V DC that are also used for the SCV10-40 module.

Ordering codes

Description	Type	Ordering code	Weight (1 pc) kg (lb)
Connection cable from PLC to first SFM1 module	SFM-CAB-RJTB.1-500	1SVM823000R0500	0.192 kg (0.423 lb)
Connection cable from SFM1 to SCV10, length 50 cm	SFM-CAB-S.1-50	1SVM811000R0050	0.015 kg (0.0331 lb)
Connection cable from SFM1 to SCV10, length 25 cm	SFM-CAB-S.1-25	1SVM811000R0025	0.008 kg (0.0176 lb)
Smart current and voltage sensor module	SCV10-40.1	1SVM320010R0000	0.23 kg (0.507 lb)
Smart current sensor module	SC10-40.1	1SVM310010R0000	0.195 kg (0.429 lb)
Smart function module	SFM1-A11.1	1SVM120012R0000	0.11 kg (0.243 lb)

Mini contactor relays

K-Series, M-Series



K-Mini contactor stocked control relays

Control voltage type	2 NO + 2 NC (22)	3 NO + 1 NC (31)	4 NO + 0 NC (40)
AC Operated			
24 V AC (01)	K6-22Z-01	K6-31Z-01	---
110-127 V AC (84)	K6-22Z-84	K6-31Z-84	K6-40E-84
DC Operated			
12 V DC (07)	---	---	KC6-40E-07
24 V DC (01)	KC6-22Z-01	---	KC6-40E-01

K6/KC6 4-pole mini-contactor relays are space optimized control products mainly used for control functions or for small loads up to AC-15 4 A / 240 V


M-Mini contactor stocked control relays

Control voltage type	2 NO + 2 NC (22)	3 NO + 1 NC (31)	4 NO + 0 NC (40)
AC Operated			
110-115 V AC (J)	MCRA-0-22-AT-J	MCRA-0-31-AT-J	MCRA-0-40-AT-J
DC Operated			
12 V DC (B)	MCRC-0-22-AT-B	---	---
24 V DC (D)	MCRC-0-22-AT-D	MCRC-0-31-AT-D	MCRC-0-40-AT-D
24 V DC (D) - Low Consumption	---	---	MCRK-0-40-AT-D
87-162 V DC (WL)	MCRC-0-22-AT-WL	MCRC-0-31-AT-WL	---

MC mini-contactor relays are space optimized control products mainly used for control functions or for small loads up to AC-15 4 A / 240 V

Contactor relays

NF Series

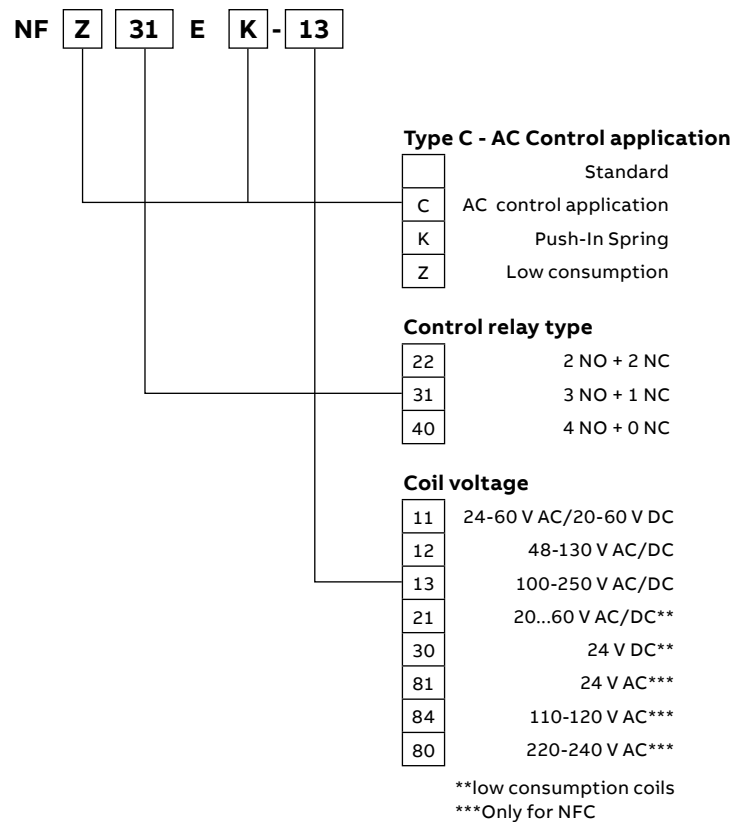

Stocked control relays

Control voltage type			Ordering Code
	2 NO + 2 NC	3 NO + 1 NC	4 NO + 0 NC
	-22	-31	-40
Standard			Ordering Code
24-60 V AC/20-60 V DC	NF22E-11	NF31E-11	NF40E-11
48-130 V AC/DC	NF22E-12	NF31E-12	NF40E-12
100-250 V AC/DC	NF22E-13	NF31E-13	NF40E-13
Standard - AFC for AC control			Ordering Code
24 V AC	NFC22E-81	---	---
110-120 V AC	NFC22E-84	NFC31E-84	NFC40E-84
220-240 V AC	NFC22E-80	---	---
Standard - Push In (PI) Spring			Ordering Code
24-60 V AC/20-60 V DC	NF22EK-11	NF31EK-11	NF40EK-11
100-250 V AC/DC	NF22EK-13	NF31EK-13	NF40EK-13
Low consumption			Ordering Code
20-60 V AC/DC	NFZ22E-21	NFZ31E-21	NFZ40E-21
24 V DC	NFZ22E-30	NFZ31E-30	NFZ40E-30
Low consumption - Push In (PI) Spring			Ordering Code
20-60 V AC/DC	NFZ22EK-21	NFZ31EK-21	NFZ40EK-21

NF contactor relays are optimized control products mainly used for control functions up to AC-15 6A / 24-127 V 50/60 Hz

Overload relays

EF electronic overloads and accessories



Electronic overload ordering codes


Setting range	Ordering Code
0.10–0.32 A	EF19-0.32
0.30–1.00 A	EF19-1.0
0.80–2.70 A	EF19-2.7
1.90–6.30 A	EF19-6.3
5.70–18.9 A	EF19-18.9
9.0–30.0 A	EF45-30
15.0–45.0 A	EF45-45
20.0–56.0 A	EF65-56
25.0–70.0 A	EF65-70
36.0–100 A	EF96-100
54–150 A	EF146-150
63–210 A	EF205-210
115–380 A	EF370-380
150–500 A	EF460
250–800 A	EF750

Overload accessories for separate/stand-alone mounting

For contactors	Description	Ordering Code
EF19	Single mounting kit	DB19EF
EF45	Single mounting kit	DB45EF

Overload relays

TF thermal overloads

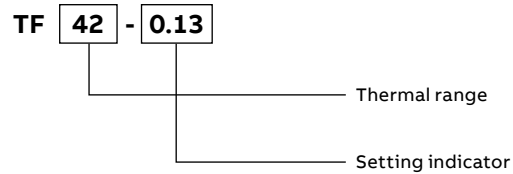

Thermal overload ordering codes

3 phase hp rating at 480V	0.5-10hp	0.5-25hp	15.50hp	30-75hp	50-100hp	50-150hp
Setting range (A)						
0.10-0.13	---	TF42-0.13	---	---	---	---
0.13-0.17	---	TF42-0.17	---	---	---	---
0.17-0.23	---	TF42-0.23	---	---	---	---
0.23-0.31	---	TF42-0.31	---	---	---	---
0.31-0.41	---	TF42-0.41	---	---	---	---
0.41-0.55	---	TF42-0.55	---	---	---	---
0.55-0.74	---	TF42-0.74	---	---	---	---
0.74-1.00	T16-1.0	TF42-1.0	---	---	---	---
1.00-1.30	T16-1.3	TF42-1.3	---	---	---	---
1.30-1.70	T16-1.7	TF42-1.7	---	---	---	---
1.70-2.30	T16-2.3	TF42-2.3	---	---	---	---
2.30-3.10	T16-3.1	TF42-3.1	---	---	---	---
3.10-4.20	T16-4.2	TF42-4.2	---	---	---	---
4.20-5.70	T16-5.7	TF42-5.7	---	---	---	---
5.70-7.60	T16-7.6	TF42-7.6	---	---	---	---
7.60-10.0	T16-10	TF42-10	---	---	---	---
10.0-13.0	T16-13	TF42-13	---	---	---	---
13.0-16.0	T16-16	TF42-16	---	---	---	---
16.0-20.0	---	TF42-20	---	---	---	---
20.0-24.0	---	TF42-24	---	---	---	---
22.0-28.0	---	---	TF65-28	---	---	---
24.0-29.0	---	TF42-29	---	---	---	---
25.0-33.0	---	---	TF65-33	---	---	---
29.0-35.0	---	TF42-35	---	---	---	---
35.0-40.0	---	TF42-38	---	---	---	---
30-40	---	---	TF65-40	---	---	---
36-47	---	---	TF65-47	---	---	---
40-51	---	---	---	TF96-51	---	---
44-53	---	---	TF65-53	---	---	---
50-60	---	---	TF65-60	TF96-60	---	---
57-67	---	---	TF65-67	---	---	---
57-68	---	---	---	TF96-68	---	---
65-78	---	---	---	TF96-78	---	---
75-87	---	---	---	TF96-87	---	---

Table continues on next page.

Overload relays

TF thermal overloads

Thermal overload ordering codes continued


3 phase hp rating at 480V	0.5-10hp	0.5-25hp	15.50hp	30-75hp	50-100hp	50-150hp
Setting range (A)						
66-90	---	---	---	---	TF140DU-90	TA200DU90
84-96	---	---	---	TF96-96	---	---
80-110	---	---	---	---	TF140DU-110	TA200DU110
100-135	---	---	---	---	TF140DU-135	TA200DU135
110-142	---	---	---	---	TF140DU-142	---
110-150	---	---	---	---	---	TA200DU150
130-175	---	---	---	---	---	TA200DU175
150-200	---	---	---	---	---	TA200DU200

Overload accessories for separate/stand-alone mounting

For contactors	Description	Ordering Code
T16	Single mounting kit	DB16-ABB
TF42	Single mounting kit	DB42
TF65	Single mounting kit	DB65
TF96, EF96	Single mounting kit	DB96
TA200DU	Single mounting kit	DB200

Starters

Manual motor starters

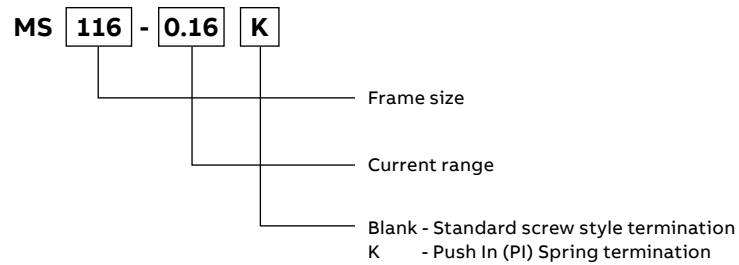


Electronic overload ordering codes

Setting range in Amps	HP @ 480 V	Screw termination				Push-In Spring
		MS116	MS132	MS165		MS132K
0.10–0.16	---	MS116-0.16	MS132-0.16	---		MS132-0.16K
0.16–0.25	---	MS116-0.25	MS132-0.25	---		MS132-0.25K
0.25–0.40	---	MS116-0.4	MS132-0.4	---		MS132-0.4K
0.40–0.63	---	MS116-0.63	MS132-0.63	---		MS132-0.63K
0.63–1.0	---	MS116-1.0	MS132-1.0	---		MS132-1.0K
1.0–1.6	3/4	MS116-1.6	MS132-1.6	---		MS132-1.6K
1.6–2.5	1	MS116-2.5	MS132-2.5	---		MS132-2.5K
2.5–4	2	MS116-4.0	MS132-4.0	---		MS132-4.0K
4–6.3	3	MS116-6.3	MS132-6.3	---		MS132-6.3K
6.3–10	5	MS116-10	MS132-10	---		MS132-10K
8–12	7.5	MS116-12	MS132-12	---		---
10–16	10	MS116-16	MS132-16	MS165-16		MS132-16K
16–20	10	MS116-20	MS132-20	MS165-20		MS132-20K
20–25	15	MS116-25	MS132-25	MS165-25		MS132-25K
25–32	20	MS116-32	MS132-32	MS165-32		MS132-32K
30–42	30	---	---	MS165-42		---
40–54	40	---	---	MS165-54		---
52–65	50	---	---	MS165-65		---
62–73	60	---	---	MS165-73		---
70–80	75	---	---	MS165-80		---


Accessories

MS116, MS132, MS165, MO132, MO165, MS132-T

Manual motor starters with accessories (MS116, MO132, MO165)

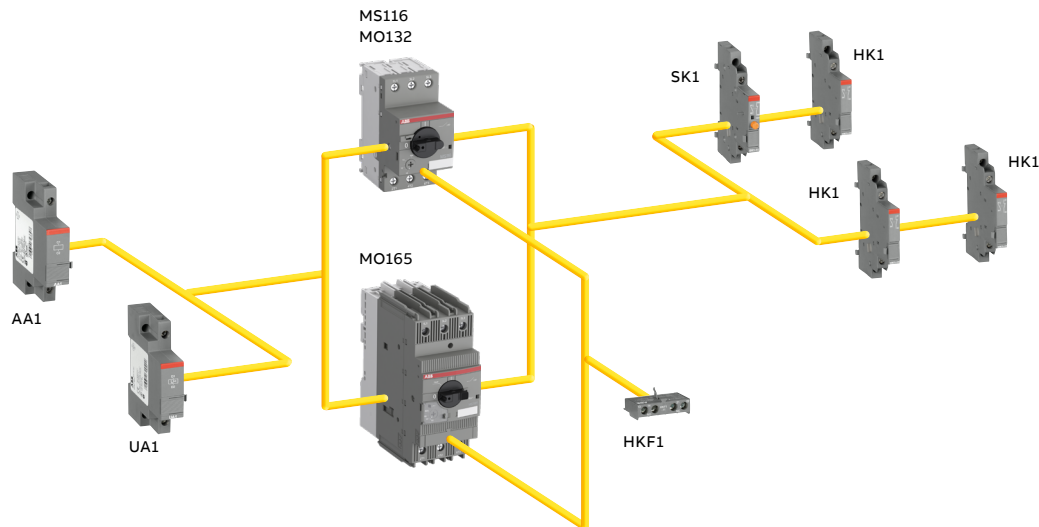


Manual motor starters (MS132, MS165) and circuit breakers for transformer protection (MS132-T) with accessories

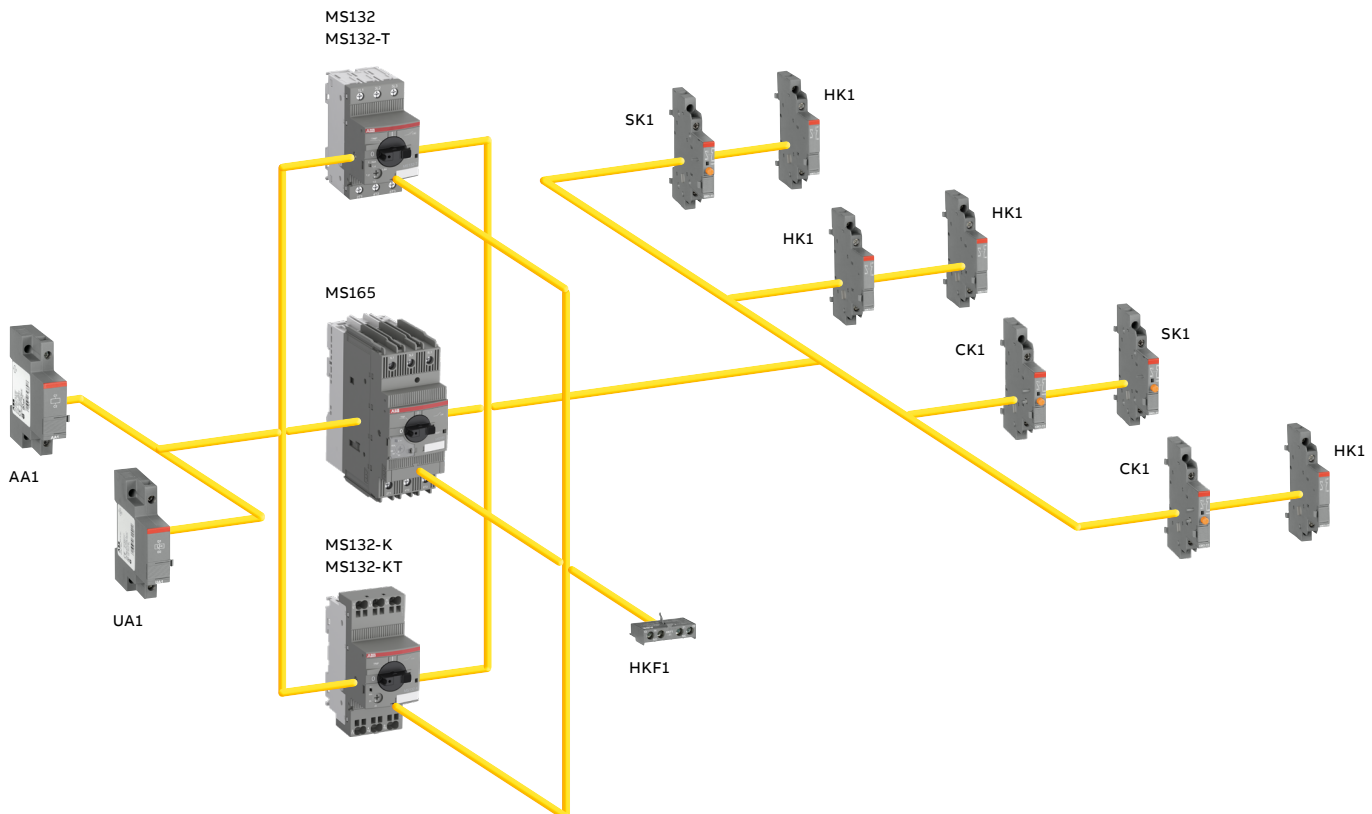

Note: The combination of MS132-K + UA1 + CK1 is not possible

Starters

Manual motor starter accessories



Auxiliary contacts

Contacts	Type	Models	Ordering Code
Auxiliary contacts - front mount			
1 NO + 1 NC	---	MS116, MS132, MS165	HKF1-11
1 NO + 0 NC	---	MS116, MS132, MS165	HKF1-10
2 NO + 0 NC	---	MS116, MS132, MS165	HKF1-20
Auxiliary contacts, Push-in Spring - front mount			
2 NO + 0 NC	---	MS116K, MS132K, MS165K	HKF1-20K
Auxiliary contacts - right mount			
1 NO + 1 NC	---	MS116, MS132, MS165	HK1-11
2 NO + 0 NC	---	MS116, MS132, MS165	HK1-20
0 NO + 2 NC	---	MS116, MS132, MS165	HK1-02
Auxiliary contacts, Push-In Spring - right mount			
1 NO + 1 NC	---	MS116K, MS132K, MS165K	HK1-11K
2 NO + 0 NC	---	MS116K, MS132K, MS165K	HK1-20K
0 NO + 2 NC	---	MS116K, MS132K, MS165K	HK1-02K
Signaling contacts			
1 NO + 1 NC	for tripped alarm	MS116, MS132, MS165	SK1-11
1 NO + 1 NC	for short circuit alarm	MS132, MS165	CK1-11
Signaling contacts, Push-in Spring			
1 NO + 1 NC	for tripped alarm	MS116K, MS132K, MS165K	SK1-11K
2 NO + 0 NC	for tripped alarm	MS116K, MS132K, MS165K	SK1-20K
0 NO + 2 NC	for tripped alarm	MS116K, MS132K, MS165K	SK1-02K

Shunt trips - left mount


Control voltage 60 Hz	Models	Ordering Code
Shunt trips - left mount		
24 V AC	MS116, MS132, MS165	AA1-24
110 V AC	MS116, MS132, MS165	AA1-110
200-240 V AC	MS116, MS132, MS165	AA1-230
Undervoltage releases - left mount		
120 V AC	MS116, MS132, MS165	UA1-120
240 V AC	MS116, MS132, MS165	UA1-230
480 V AC	MS116, MS132, MS165	UA1-415

Table continues on next page.

Accessories

MS116, MS132, MS165, MO132, MO165

Manual motor starters with three-phase busbar systems (MS116, MS132, MO132)

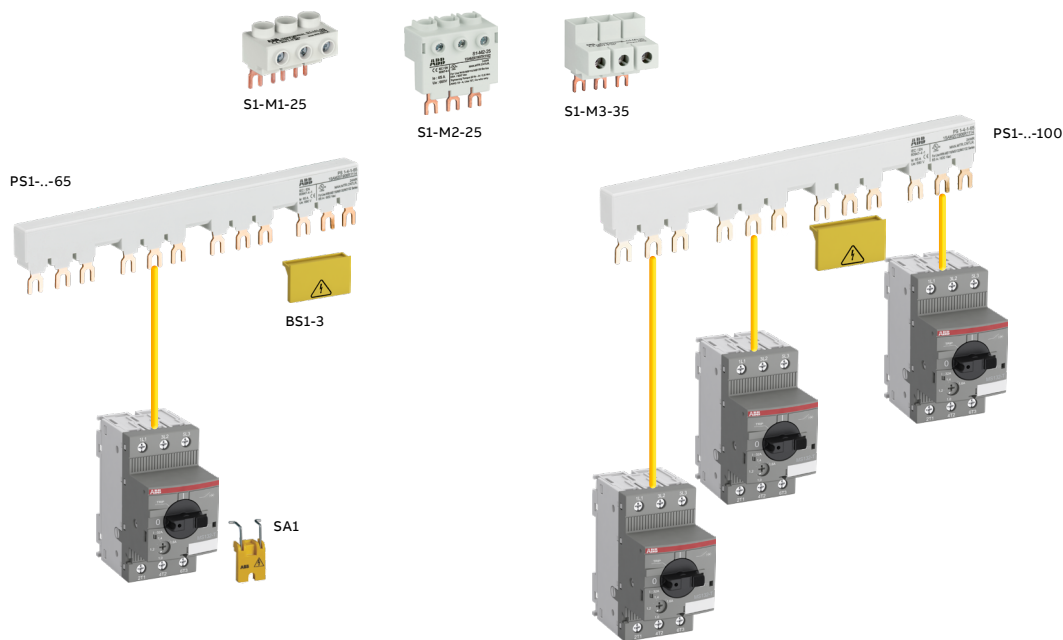


Three-phase busbar up to 65 A

Three-phase busbar up to 100 A

Note: busbars and feeder blocks are only suitable for screw versions.

Manual motor starters with three-phase busbar systems (MS165, MO165)

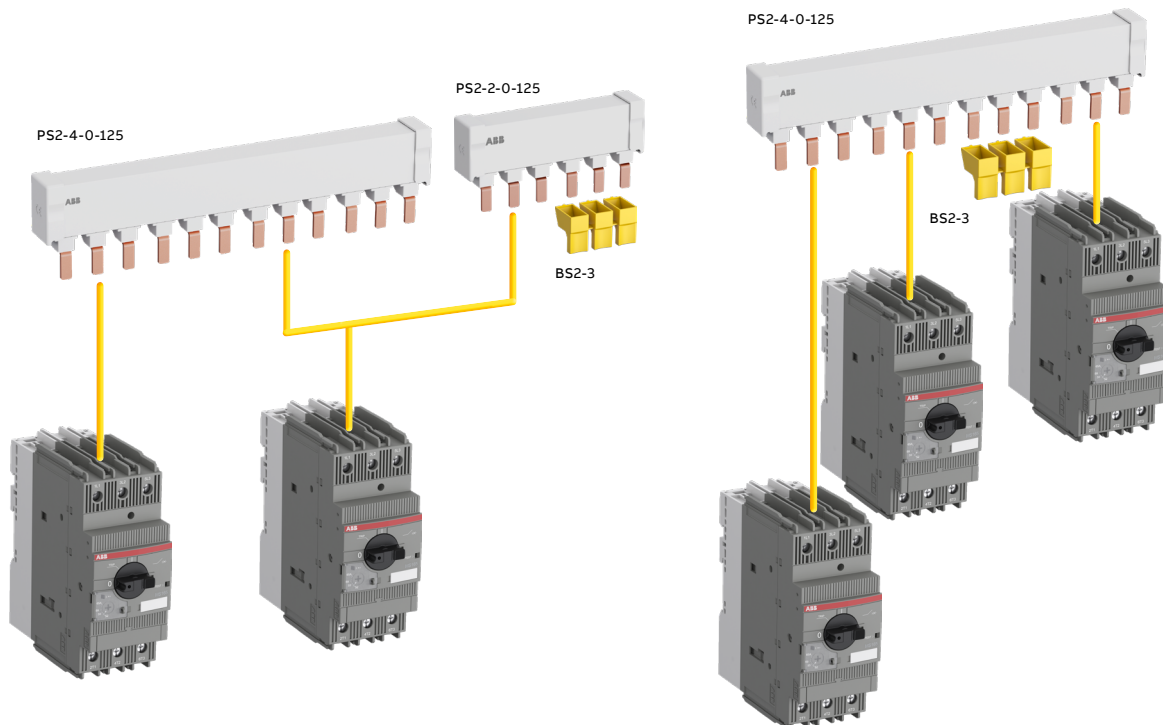


Three-phase busbar up to 125 A

Three-phase busbar up to 125 A

Starters

Manual motor starter accessories



Three-phase busbar

Operational current (A)	No. of MMS	No. of lateral aux.	Models	Ordering Code
65	2	0	MS116, MS132	PS1-2-0-65
65	3	0	MS116, MS132	PS1-3-0-65
65	4	0	MS116, MS132	PS1-4-0-65
65	5	0	MS116, MS132	PS1-5-0-65
65	2	1	MS116, MS132	PS1-2-1-65
65	3	1	MS116, MS132	PS1-3-1-65
65	4	1	MS116, MS132	PS1-4-1-65
65	5	1	MS116, MS132	PS1-5-1-65
65	2	2	MS116, MS132	PS1-2-2-65
65	3	2	MS116, MS132	PS1-3-2-65
65	4	2	MS116, MS132	PS1-4-2-65
65	5	2	MS116, MS132	PS1-5-2-65
92	3	0	MS116, MS132	PS1-3-0-100
92	4	0	MS116, MS132	PS1-4-0-100
92	5	0	MS116, MS132	PS1-5-0-100
92	3	1	MS116, MS132	PS1-3-1-100
92	4	1	MS116, MS132	PS1-4-1-100
92	5	1	MS116, MS132	PS1-5-1-100
125	3	0	MS165	PS2-2-0-125
125	2	2	MS165	PS2-2-2-125
125	2	0	MS165	PS2-3-0-125
125	3	2	MS165	PS2-3-2-125
125	3	0	MS165	PS2-4-0-125
125	4	2	MS165	PS2-4-2-125



Three-phase feeder terminals

Operational current (A)	Mounting form	Models	Ordering Code
63	Flat	MS116, MS132	S1-M1-25
63	High	MS116, MS132	S1-M2-25
63	UL/CSA Type E/F	MS116, MS132	S1-M3-25
92	UL/CSA Type E/F	MS116, MS132	S1-M3-35

Table continues on next page.

Starters

Manual motor starter accessories

General accessories



Description	Models	Ordering Code
Protection cover for busbars	MS116, MS132	BS1-3
Protection cover for busbars	MS165	BS2-3
Padlock + two keys	MS116, MS132	SA2
Lock handle	MS116	SA1
Terminal shroud	MS165	KA165
NEMA Type 12 yellow enclosure with red handle	MS116, MS132	IB132-Y
NEMA Type 12 grey enclosure with black handle	MS116, MS132	IB132-G
Door mount and handle for NEMA Type 12 yellow/red	MS116, MS132	DMS132-Y
Door mount and handle for NEMA Type 12 grey/black	MS116, MS132	DMS132-G
NEMA type 1, 3R, 12 black handle, IO/On-Off	MS116, MS132, MS165, MS49x	MSHD-LB
NEMA type 1, 3R, 12 yellow handle, IO/On-Off	MS116, MS132, MS165, MS49x	MSHD-LY
NEMA type 1, 3R, 12 black handle, IO/On-Off+trip	MS116, MS132, MS165, MS49x	MSHD-LTB
NEMA type 1, 3R, 12 yellow handle, IO/On-Off+trip	MS116, MS132, MS165, MS49x	MSHD-LTY
Shaft supporter	MS116, MS132, MS165, MS49x	MSAH1

Starters

Enclosed direct-on-line starters



DRAF UL enclosed direct-on-line starters

HP 3 phase		
440 V - 480 V	Control voltage	Ordering Code
5	24-60	DRAF09-11U
7.5	24-60	DRAF12-11U
7.5	100-250	DRAF12-13U
10	24-60	DRAF16-11U
10	100-250	DRAF16-13U

Control and protective relays

Section 13

Control and protective relays

Table of contents

Limit switches	13-1
Time relays	13-2
Pluggable relays	
CR-P PCB relays	13-3
CR-M miniature relays	13-3
CR-U universal relays	13-4
Slim electromechanical relays	
CR-S	13-5
Boxed electromechanical and solid state relays	
R600	13-5
Power supplies	
CP-S.1 sophisticated	13-6
CP-E economy	13-6
CP-T three-phase	13-6
Measuring and monitoring relays	
CM-Exx and CM-Sxx single-phase	13-7
CM-Px and CM-Pxx three-phase	13-7
CM-CT current transformer	13-7
CM-Ix insulation monitoring	13-8
CM-MSx thermistor motor protection	13-8
CM-TCx temperature monitoring	13-8
CM-ENx liquid level monitoring	13-8

Limit switches

Inventory



Casing width	Electrical connection	Casing material	Actuator type	Contact type	Contact block	Ordering code
20mm	Pre-wired	Metal	45mm rubber roller lever	Snap action	1 NC+1NO	LS20M42B11-U02
30mm	1/2" NPT	Plastic	n/a	Slow action	1 NC+1NO	LS35P80D11-S
30mm	1/2" NPT	Plastic	Adj 3mm SS rod lever	Snap action	1 NC+1NO	LS35P71B11
30mm	1/2" NPT	Plastic	18mm plastic roller lever	Snap action	1 NC+1NO	LS35P41B11
30mm	1/2" NPT	Plastic	18mm plastic roller lever	Snap action	2 NC	LS35P41B02-R
30mm	1/2" NPT	Metal	Adj 18mm plastic roller lever	Snap action	1 NC+1NO	LS35M51B11
30mm	1/2" NPT	Plastic	Adj 18mm plastic roller lever	Snap action	1 NC+1NO	LS35P51B11
30mm	1/2" NPT	Plastic	Adj 18mm plastic roller lever	Snap action	2 NC	LS35P51B02
30mm	Pre-wired	Metal	Plain steel plunger	Snap action	1 NC+1NO	LS20M11B11-U03
30mm	1/2" NPT	Plastic	Plain steel plunger	Snap action	1 NC+1NO	LS35P11B11
30mm	1/2" NPT	Plastic	Plastic roller plunger	Snap action	1 NC+1NO	LS35P13B11
30mm	1/2" NPT	Plastic	Plastic roller, steel plunger	Snap action	1 NC+1NO	LS35P31B11
30mm	1/2" NPT	Plastic	Plastic roller, steel plunger	Slow action	1 NC+1NO	LS35P32D11-R
30mm	1/2" NPT	Plastic	Spring rod	Snap action	1 NC+1NO	LS35P91B11
30mm	1/2" NPT	Plastic	Straight key	Snap action	1 NC+1NO	LS35P16B11
40mm	1/2" NPT	Metal	w/out head	Snap action	1 NC+1NO	LS45M00B11
40mm	1/2" NPT	Metal	Adj 3mm SS rod lever	Snap action	1 NC+1NO	LS45M71B11
40mm	1/2" NPT	Plastic	Adj 3mm SS rod lever	Snap action	2 NC+1NO	LS45P71B11
40mm	1/2" NPT	Metal	Adj 18mm plastic roller lever	Snap action	1 NC+1NO	LS45M51B11
40mm	1/2" NPT	Plastic	Adj 18mm plastic roller lever	Snap action	1 NC+1NO	LS45P51B11
40mm	1/2" NPT	Metal	18mm plastic roller lever	Snap action	1 NC+1NO	LS45M41B11
40mm	1/2" NPT	Metal	22mm SS roller	Snap action	1NC + 1NO	LS45M42B11
40mm	1/2" NPT	Metal	Adj 22mm SS ball-bearing roller	Snap action	1 NC+1NO	LS45M53B11
40mm	1/2" NPT	Metal	Adj 45mm rubber roller lever	Snap action	1 NC+1NO	LS45M54B11
40mm	1/2" NPT	Metal	Adj 52mm rubber roller lever	Snap action	1 NC+1NO	LS45M52B11
40mm	1/2" NPT	Metal	Plastic roller plunger	Snap action	1 NC+1NO	LS45M13B11
40mm	1/2" NPT	Metal	Spring rod	Snap action	1 NC+1NO	LS45M91B11
40mm	1/2" NPT	Metal	SS lateral plunger	Snap action	1 NC+1NO	LS45M21B11
60mm	1/2" NPT	Metal	Adj 18mm plastic roller lever	Snap action	1 NC+1NO	LS75P41B11
60mm	1/2" NPT	Metal	Pull action w/ring	Snap action	1 NC+1NO	LS75M98B11-A
Yellow free movement IPS footswitch					1 NC+1NO	IPSY1A11

See [catalog](#) for full description

Time relays

Inventory



Function	Time ranges	Input voltage	Output contacts	Ordering code
Timer-compact				
Multifunction CT-MFC	(0.05s-100h)	24-48VDC/24-240VAC	1 c/o	1SVR508020R0000
Multifunction CT-MFC	(0.05s-100h)	12-240VAC/DC	2 c/o	1SVR508020R1100
ON-delay CT-ERC	(0.05s-100h)	24-48VDC/24-240VAC	1 c/o	1SVR508100R0000
OFF-delay w/ auxilliary voltage CT-AHC	(0.05s-100h)	24-48VDC/24-240VAC	1 c/o	1SVR508110R0000
Timer-MDRC				
Multifunction CT-MFD.12	(0.05s-100h)	24-240V AC/24-48V DC	1 c/o	1SVR500020R0000
Multifunction CT-MFD.21	(0.05s-100h)	24-240V AC/24-48V DC	2 c/o	1SVR500020R1100
ON-delay CT-ERD.12	(0.05s-100h)	24-240V AC/24-48V DC	1 c/o	1SVR500100R0000
ON-delay CT-ERD.22	(0.05s-100h)	24-240V AC/24-48V DC	2 c/o	1SVR500100R0100
OFF-delay CT-AHD.12	(0.05s-100h)	24-240V AC/24-48V DC	1 c/o	1SVR500110R0000
OFF-delay CT-AHD.22	(0.05s-100h)	24-240V AC/24-48V DC	2 c/o	1SVR500110R0100
Flasher CT-EBD.12	(0.05s-100h)	24-240V AC/24-48V DC	1 c/o	1SVR500150R0000
Pulse generator CT-TGD.12	(0.05s-100h)	24-240V AC/24-48V DC	1 c/o	1SVR500160R0000
Timer-sophisticated				
Multifunction CT-MFS.21S	(0.05s-300h)	24-240VAC/DC	2 c/o	1SVR730010R0200
Multifunction CT-MVS.21S	(0.05s-300h)	24 - 48V DC/24 - 240V AC	2 c/o	1SVR730020R0200
Multifunction CT-MXS.22S	(0.05s-300h)	24 - 48V DC/24 - 240V AC	2 c/o	1SVR730030R3300
Impulse and flasher CT-WBS.22S	(0.05s-300h)	24 - 48V DC/24 - 240V AC	2 c/o	1SVR730040R3300
ON-delay CT-ERS.22S	(0.05s-300h)	24 - 48V DC/24 - 240V AC	2 c/o	1SVR730100R3300
ON-delay CT-ERS.21S	(0.05s-300h)	24 - 48V DC/24 - 240V AC	2 c/o	1SVR730100R0300
OFF-delay CT-ARS.21S	0.05 s to 300 h	24-240VAC/DC	2 c/o	1SVR730120R3300

See [catalog](#) for full description

Type selection

	multi-functional	single-functional	multi-functional	single-functional
Timing function	CT-C		CT-S	
☒ ON-delay	CT-MFC, CT-MKC	CT-ERC	CT-MVS, CT-MFS, CT-MBS, CT-WBS	CT-ERS
■ OFF-delay	CT-MFC, CT-MKC, CT-ARC	CT-AHC	CT-MVS, CT-MFS, CT-MBS	CT-APS, CT-AHS, CT-ARS
☒■ ON- and OFF-delay			CT-MVS, CT-MXS, CT-MFS, CT-MBS	
1☒ Impulse-ON	CT-MFC, CT-MKC	CT-VWC	CT-MVS, CT-MFS, CT-MBS, CT-WBS	
1■ Impulse-OFF	CT-MFC, CT-MKC, CT-ARC		CT-MVS, CT-MFS, CT-MBS	
1☒ Impulse-ON and OFF			CT-MXS	
☒ Flasher starting with ON	CT-MFC, CT-MKC	CT-EBC	CT-MFS, CT-MBS, CT-WBS	
☒ Flasher starting with OFF	CT-MFC, CT-MKC	CT-EBC	CT-MFS, CT-MBS, CT-WBS	
☒ Flasher starting with ON or OFF			CT-MVS	
☒ Pulse generator starting with ON or OFF		CT-TGC	CT-MXS	
☐ Pulse former	CT-MFC, CT-MKC		CT-MVS, CT-MFS, CT-MBS	
△ Star-delta change-over		CT-SDC, CT-SAC		CT-SDS
△1☒ Star-delta change-over with impulse			CT-MVS.2x, CT-MFS, CT-MBS	
☒+ ☒1☒ ■1☒ ☐ further functions (depending on device)			CT-MVS, CT-MXS, CT-MFS, CT-MBS, CT-WBS	

Pluggable relays

PCB and miniature relays



Pluggable interface relays

Description	Input Voltage	Output type	Contacts	Output contacts	Output rating	Ordering code
Pcb relays (CR-P)						
Relay	24V DC	Electromechanical	Standard	1 c/o	250V 16A	1SVR405600R1000
Relay	230V AC	Electromechanical	Standard	1 c/o	250V 16A	1SVR405600R3000
Relay	24V AC	Electromechanical	Standard	2 c/o	250V 8A	1SVR405601R0000
Relay	24V DC	Electromechanical	Standard	2 c/o	250V 8A	1SVR405601R1000
Relay	120V AC	Electromechanical	Standard	2 c/o	250V 8A	1SVR405601R2000
Logic socket w/ separation	---	---	---	---	---	1SVR405650R0000
Standard socket 1 or 2 c/o	---	---	---	---	---	1SVR405650R1000
Miniature relays (CR-M)						
Relay w/out LED	24V DC	Electromechanical	Standard	2 c/o	250V 12A	1SVR405611R1000
Relay w/LED	24V DC	Electromechanical	Standard	2 c/o	250V 12A	1SVR405611R1100
Relay w/LED	24V AC	Electromechanical	Standard	2 c/o	250V 12A	1SVR405611R0100
Relay w/LED	110V AC	Electromechanical	Standard	2 c/o	250V 10A	1SVR405611R7100
Relay w/LED	120V AC	Electromechanical	Standard	2 c/o	250V 12A	1SVR405611R2100
Relay w/out LED	24V DC	Electromechanical	Standard	3 c/o	250V 10A	1SVR405612R1000
Relay w/out LED	110V AC	Electromechanical	Standard	3 c/o	250V 10A	1SVR405612R7000
Relay w/out LED	120V AC	Electromechanical	Standard	3 c/o	250V 10A	1SVR405612R2000
Relay w/out LED	24V DC	Electromechanical	Standard	4 c/o	250V 6A	1SVR405613R1000
Relay w/out LED	110V AC	Electromechanical	Standard	4 c/o	250V 6A	1SVR405613R7000
Relay w/out LED	120V AC	Electromechanical	Standard	4 c/o	250V 6A	1SVR405613R2000
Relay w/LED	24V DC	Electromechanical	Standard	4 c/o	250V 6A	1SVR405613R1100
Relay w/LED	24V AC	Electromechanical	Standard	4 c/o	250V 6A	1SVR405613R0100
Relay w/LED	110V AC	Electromechanical	Standard	4 c/o	250V 6A	1SVR405613R7100
Relay w/LED	120V AC	Electromechanical	Standard	4 c/o	250V 6A	1SVR405613R2100
Relay w/LED gold-plated	120V AC	Electromechanical	Gold-plated	4 c/o	250V 6A	1SVR405618R2100

See [catalog](#) for full description

Accessories

Description	Input Voltage	Output type	Ordering code
Miniature relays (CR-M) only			
Socket for 2 c/o	---	---	1SVR405651R1000
Socket for 3 c/o	---	---	1SVR405651R2000
Socket for 2 or 4 c/o	---	---	1SVR405651R3000
Logic socket 2 or 4 c/o	---	---	1SVR405651R3100
Holder for CR-M socket	---	---	1SVR405659R1000
Metal holder for CR-M	---	---	1SVR405659R1100
PCB (CR-P) and miniature relays (CR-M)			
Polarity module	6 - 220V DC	A1+, A2-	1SVR405651R0000
Diode/LED/rev/free whl module	6-24V DC	Green, A1+, A2-	1SVR405652R1000



Pluggable relays

Universal relays



Universal relays

Description	Input voltage	Output type	Contacts	Output	Output rating	Ordering code
Relay w/out LED	24V DC	Electromechanical	Standard	2 c/o	250V 10A	1SVR405621R1000
Relay w/out LED	230V AC	Electromechanical	Standard	2 c/o	250V 10A	1SVR405621R3000
Relay w/LED	110V AC	Electromechanical	Standard	2 c/o	250V 10A	1SVR405621R7100
Relay w/LED	120V AC	Electromechanical	Standard	2 c/o	250V 10A	1SVR405621R2100
Relay w/out LED	120V AC	Electromechanical	Standard	3 c/o	250V 10A	1SVR405622R2000
Relay w/LED	24V DC	Electromechanical	Standard	3 c/o	250V 10A	1SVR405622R1100
Relay w/LED	120V AC	Electromechanical	Standard	3 c/o	250V 10A	1SVR405622R2100
Socket for 2 c/o & module	---	---	---	---	---	1SVR405670R0000
Socket for 3 c/o & module	---	---	---	---	---	1SVR405660R0000
Holder for CR-U socket	---	---	---	---	---	1SVR405669R0000

See [catalog](#) for full description

Relays

Slim, boxed electromechanical and solid state



Interface relays

Description	Input voltage	Output type	Contacts	Output	Output rating	Ordering code
Slim (CR-S)						
Pluggable relay	24 V DC	Electromechanical	Standard	1 c/o	250V 6A	1SVR405501R3010
relay + socket, screw	24 V AC/DC	Electromechanical	Standard	1 c/o	250V 6A	1SVR405541R3110
relay + socket, spring	110 V AC/DC	Electromechanical	Standard	1 c/o	250V 6A	1SVR405541R6210
Boxed (R600)						
Interface relay	24 V AC/DC	Electromechanical	Standard	1 c/o	250V 3mA- 6A	1SNA645001R0300
Interface relay	24 V DC	Electromechanical	Standard	1 c/o	250V 10mA- 6A	1SNA645071R0000
Interface relay	115V AC/DC	Electromechanical	Standard	1 c/o	250V 10mA- 6A	1SNA645003R0500
Interface relay, spring	24 V AC/DC	Electromechanical	Standard	1 c/o	250V 10mA- 6A	1SNA645501R0500
Interface relay	5 - 12 V DC	Transistor	Solid state	---	250V 100mA	1SNA645047R0000
Interface relay	5 - 12 V DC	MOS-FET	Solid state	---	250V 2A	1SNA645050R1700
Interface relay	24 V DC	Transistor	Solid state	---	250V 100mA	1SNA645021R2600
Interface relay	24 V DC	MOS-FET	Solid state	---	250V 2A	1SNA645051R0400
Interface relay	24 V DC	Triac	Solid state	---	250V 2A	1SNA645029R0600
Interface relay	24 V DC	Electromechanical	Gold-plated	1 c/o	250V 3mA- 6A	1SNA645072R0000
Interface relay	24 V AC/DC	Electromechanical	Gold-plated	1 c/o	250V 3mA- 6A	1SNA645005R0700
Interface relay	24 V AC/DC	Electromechanical	Gold-plated	2 c/o	250V 1mA - 8A	1SNA645012R2500
Interface relay	115V AC/DC	Electromechanical	Gold-plated	1 c/o	250V 3mA- 6A	1SNA645007R0100
Interface relay	115V AC/DC	Electromechanical	Gold-plated	2 c/o	250V 1mA - 8A	1SNA645041R0200

See [catalog](#) for full description

Power supplies

Sophisticated, economy and three-phase



Rated input voltage	Output voltage	Output current	Output power	Ordering code
Standard CP-S.1				
100-240 V AC / 100-250 V DC	24V	3A	72W	1SVR320361R1000
100-240 V AC / 100-250 V DC	24V	5A	120W	1SVR320561R1000
100-240 V AC / 100-250 V DC	24V	10A	240W	1SVR320661R1000
100-240 V AC / 100-250 V DC	24V	20A	480W	1SVR320761R1000
110-240 V AC / 110-250 V DC	24V	40A	960W	1SVR320861R1000
Economy CP-E				
100 - 240 V AC	5 V DC	3A	15W	1SVR427033R3000
100 - 240 V AC	12 V DC	2.5A	30W	1SVR427032R1000
115 / 230 V AC	12 V DC	10A	120W	1SVR427035R1000
100 - 240 V AC	24 V DC	0.75 A	18W	1SVR427030R0000
100 - 240 V AC	24 V DC	1.25 A	30W	1SVR427031R0000
100 - 240 V AC	24 V DC	2.5 A	60W	1SVR427032R0000
115 / 230 V AC	24 V DC	5A	120W	1SVR427034R0000
115 / 230 V AC	24 V DC	10A	240W	1SVR427035R0000
115 / 230 V AC	24 V DC	20A	480W	1SVR427036R0000
115 / 230 V AC	48 V DC	10A	480W	1SVR427035R2000
Three-phase CP-T				
3x 400 - 500 V AC	24 V DC	5A	120W	1SVR427054R0000
3x 400 - 500 V AC	24 V DC	10A	240W	1SVR427055R0000
3x 400 - 500 V AC	24 V DC	20A	480W	1SVR427056R0000

See [catalog](#) for full description

Measuring and monitoring relays

Inventory



Function	Supply voltage	Measuring range	Output	Ordering code
Single-phase monitoring - CM-E and CM-S				
Single function voltage*	24 - 240 V AC/DC	0.3-15 A	2 c/o	1SVR730760R0500
Single function voltage*	24 - 240 V AC/DC	0.3-15A RMS	2 c/o	1SVR730840R0500
Single function voltage*	24 - 240 V AC/DC	3 - 600 V	2 c/o	1SVR730750R0400
Single function voltage*	24 - 240 V AC/DC	3 - 600 V	2 c/o	1SVR730830R0400
Single function voltage*	24 - 240 V AC/DC	3 - 600 V	2 c/o	1SVR730830R0500
Single function voltage*	110 - 130 V AC	0.3-15A	1 c/o	1SVR730840R0300
Single function voltage*	110 - 130 V AC	0.3-15A RMS	2 c/o	1SVR730841R0500
Single function voltage*	110 - 130 V AC	3-600VRMS	2 c/o	1SVR740831R0400
Single function voltage*	110 - 130 V AC	3mA-1A RMS	1 c/o	1SVR730841R0200
Multifunctional*	24 - 240 V AC/DC	0.3-15A RMS	2 c/o	1SVR730840R0700
Three-phase monitoring CM-M and CP-P				
Multifunctional*	(L-N) 90 - 170 V AC	(L-N) 90 - 170 V AC	2 c/o	1SVR730885R1300
Multifunctional*	(L-L) 160 - 300 V AC	(L-L) 160 - 300 V AC	2 c/o	1SVR730884R1300
Multifunctional*	(L-L) 160 - 300 V AC	(L-L) 160 - 300 V AC	2 c/o	1SVR740774R1300
Multifunctional*	(L-L) 160 - 300 V AC	(L-L) 160 - 300 V AC	2 c/o	1SVR730794R1300
Multifunctional*	(L-L) 300 - 500 V AC	(L-L) 300 - 500 V AC	2 c/o	1SVR730884R3300
Multifunctional*	(L-L) 300 - 500 V AC	(L-L) 300 - 500 V AC	2 c/o	1SVR730774R3300
Multifunctional*	(L-L) 300 - 500 V AC	(L-L) 300 - 500 V AC	2 c/o	1SVR730794R3300
Multifunctional*	(L-L) 350 ... 580 V AC	(L-L) 350 ... 580 V AC	2 x 1 or 1 x 2 c/o	1SVR750487R8300
Multifunctional*	(L-L) 450 ... 720 V AC	(L-L) 450 ... 720 V AC	2 x 1 or 1 x 2 c/o	1SVR750488R8300
Phase sequence*	(L-L) 200 ... 500 V AC	(L-L) 200 ... 500 V AC	2 c/o	1SVR730824R9300
Phase sequence*	(L-L) 208 - 440 V AC	(L-L) 208 - 440 V AC	1 c/o	1SVR550824R9100
Current transformer CM-CT				
Current transformer*	---	75 A	---	1SVR450116R5100
DIN Snap-on fastener for CM-CT*	---	---	---	1SVR450118R1000

*See [catalog](#) for full description

Measuring and monitoring relays

Inventory



Function	Supply voltage	Measuring range	Output	Ordering code
Liquid level monitoring - CM-EN				
Liquid level*	24 - 240 V AC/DC	0.1-1000kOhm	2 c/o	1SVR730850R0300
Liquid level*	110-130VAC/220-240VAC	5-100kOhm	1 c/o	1SVR730850R2100
Liquid level*	110-130VAC/220-240VAC	0.1-1000kOhm	1 c/o	1SVR730850R2200
Temperature monitoring - CM-TC				
Temperature*	24 - 240 V AC/DC	---	2 x 1 or 1 x 2 c/o	1SVR730740R0300
Thermistor motor protection - CM-MS				
Thermistor motor*	110-130 V AC	1 sensor circuit	1 n/o	1SVR550800R9300
Thermistor motor*	24 V AC/DC	---	1 c/o	1SVR730700R0100
Thermistor motor*	24 - 240 V AC/DC	---	2 x 1 c/o	1SVR730712R1300
Thermistor motor*	24 - 240 V AC/DC	---	1 c/o + 1 n/o	1SVR730712R1400
Thermistor motor*	110-130VAC/220-240VAC	---	2 c/o	1SVR730712R2200
Thermistor motor*	24 - 240 V AC/DC	---	1 c/o + 1 n/o	1SVR730720R1400
Insulation monitoring CM-I				
Insulation*	24 - 240 V AC/DC	1 - 100 kΩ	1 c/o	1SVR730660R0100
Insulation*	0-690V AC / 0-1000V DC	1-100 kΩ 2-200 kΩ	1 x 2 c/o or 2 x 1 c/o	1SVR470670R1000

*See [catalog](#) for full description

—

14

Disconnect switches

Section 14

Disconnect switches

Table of contents

Enclosed disconnect switches	14-1
Non-fusible disconnect switches	
Ordering code construction – OT16...160	14-3
Ordering code construction – OT200-2000	14-4
UL508 and UL98	14-5
Flange handle operated switches	14-7
Accessories for fusible and non-fusible disconnect switches	14-11
Fusible disconnect switches	
Ordering code construction – OS30	14-8
Ordering code construction – OS60...1200	14-9
UL98 flange handle operated switches	14-10
Accessories for fusible and non-fusible disconnect switches	14-11
Accessories for rotary operated switches	14-12

Enclosed disconnect switches

UL508 and UL98

UL508 non-fusible manual disconnect switches Max voltage (AC): 600Vac



UL amp rating	Enclosure material	NEMA Type	Handle	Handle color	Aux contacts	Ordering Code	HP Rating
16	Plastic	3R/12	Selector	Black	-	EOT520N3PAP-SBA	5 HP / 240VAC, 10 HP / 480VAC, 10 HP / 600VAC
				Red/Yellow	-	EOT520N3PAP-SRA	5 HP / 240VAC, 10 HP / 480VAC, 10 HP / 600VAC
		4/4X	Pistol	Black	-	EOT520N3PAP-PBA	5 HP / 240VAC, 10 HP / 480VAC, 10 HP / 600VAC
				Black	1 NO	EOT520N3PAP-PB1	5 HP / 240VAC, 10 HP / 480VAC, 10 HP / 600VAC
	Steel	3R/12	Selector	Black	-	EOT520N3PA3-SBA	-
				Black	-	EOT520N3PA3-PBA	-
		4/4X	Pistol	Black	-	EOT520N3PAX-SBA	-
				Black	-	EOT520N3PAX-PBA	-
40	Plastic	3R/12	Selector	Black	-	EOT540N3PAP-SBA	10 HP / 240VAC, 20 HP / 480VAC, 25 HP / 600VAC
				Red/Yellow	-	EOT540N3PAP-SRA	10 HP / 240VAC, 20 HP / 480VAC, 25 HP / 600VAC
			Pistol	Black	-	EOT540N3PAP-PBA	10 HP / 240VAC, 20 HP / 480VAC, 25 HP / 600VAC
		4/4X	Pistol	Black	1 NO	EOT540N3PAP-PB1	10 HP / 240VAC, 20 HP / 480VAC, 25 HP / 600VAC
				Black	1 NO & 1 NC	EOT540N3PAP-PB1	10 HP / 240VAC, 20 HP / 480VAC, 25 HP / 600VAC
			Pistol	Red/Yellow	-	EOT540N3PAP-PRA	10 HP / 240VAC, 20 HP / 480VAC, 25 HP / 600VAC
	Steel	3R/12	Selector	Black	-	EOT540N3PA3-SBA	-
				Black	-	EOT540N3PA3-PBA	10 HP / 240VAC, 20 HP / 480VAC, 25 HP / 600VAC
			Selector	Black	-	EOT540N3PA3-SBA	10 HP / 240VAC, 20 HP / 480VAC, 25 HP / 600VAC
		4/4X	Pistol	Black	-	EOT540N3PAX-SBA	10 HP / 240VAC, 20 HP / 480VAC, 25 HP / 600VAC
				Black	-	EOT540N3PAX-PBA	10 HP / 240VAC, 20 HP / 480VAC, 25 HP / 600VAC
				Black	-	EOT540N3PAX-PBA	10 HP / 240VAC, 20 HP / 480VAC, 25 HP / 600VAC
60	Plastic	4/4X	Pistol	Black	-	EOT560N3PAP-PBA	15 HP / 240VAC, 30 HP / 480VAC, 30 HP / 600VAC
				Black	-	EOT560N3PA3-SBA	15 HP / 240VAC, 30 HP / 480VAC, 30 HP / 600VAC
				Black	-	EOT560N3PA3-PBA	15 HP / 240VAC, 30 HP / 480VAC, 30 HP / 600VAC
	Steel	4/4X	Pistol	Black	-	EOT560N3PAX-SBA	-
				Black	-	EOT560N3PAX-PBA	-
				Black	-	EOT560N3PAX-PBA	-
80	Plastic	4/4X	Pistol	Black	-	EOT580N3PAP-PBA	20 HP / 240VAC, 40 HP / 480VAC, 40 HP / 600VAC
	Steel	3R/12	Pistol	Black	-	EOT580N3PA3-PBA	20 HP / 240VAC, 40 HP / 480VAC, 40 HP / 600VAC



UL98 non-fusible disconnect switches Max voltage (AC): 600Vac



UL amp rating	Enclosure material	NEMA Type	Handle	Handle color	Aux contacts	Ordering Code	HP Rating
30	Steel	1	Pistol	Black	-	EOT930N3PA1-PBA	10 HP / 240VAC, 20 HP / 480VAC, 30 HP / 600VAC
			Pistol	Red/Yellow	-	EOT930N3PA1-PRA	10 HP / 240VAC, 20 HP / 480VAC, 30 HP / 600VAC
		12/3R	Pistol	Black	-	EOT930N3PA3-PBA	10 HP / 240VAC, 20 HP / 480VAC, 30 HP / 600VAC
			Pistol	Red/Yellow	-	EOT930N3PA3-PRA	10 HP / 240VAC, 20 HP / 480VAC, 30 HP / 600VAC
60	Steel	1	Pistol	Black	-	EOT960N3PA1-PBA	20 HP / 240VAC, 40 HP / 480VAC, 40 HP / 600VAC
		12/3R	Pistol	Black	-	EOT960N3PA3-PBA	20 HP / 240VAC, 40 HP / 480VAC, 40 HP / 600VAC
100	Steel	1	Pistol	Black	-	EOT9100N3PA1-PBA	30 HP / 240VAC, 50 HP / 480 VAC, 50 HP / 600VAC
		12/3R	Pistol	Black	-	EOT9100N3PA3-PBA	30 HP / 240VAC, 50 HP / 480 VAC, 50 HP / 600VAC
	Stainless Steel	4/4X	Pistol	Black	-	EOT9100N3PAX-PBA	30 HP / 240VAC, 50 HP / 480 VAC, 50 HP / 600VAC

Enclosed disconnect switches

UL508 and UL98

UL98 fusible disconnect switches
Max voltage (AC): 600Vac

UL amp rating	Enclosure material	NEMA Type	Fuse Type	Handle	Handle color	Ordering Code	HP Rating
30	Steel	1	J	Pistol	Red/Yellow	EOS930J3PA1-PRA	7.5 HP / 240VAC, 15 HP / 480VAC, 20 HP / 600VAC
		3R/12	J	Pistol	Black	EOS930J3PA3-PBA	7.5 HP / 240VAC, 15 HP / 480VAC, 20 HP / 600VAC


Non-fusible disconnect switches OT16...160

Ordering code construction

Understanding the type code keys below will help you quickly identify the correct product for your needs.

OT16F4N2				
ABB Brand		Included accessories N2 = Fourth pole, simultaneous function with the main contacts _ = No accessories included P = Pistol handle + shaft K = Direct mount handle (for base mounting versions only)		
OT = ABB switch-disconnector brand				
Switch size				
The second letter in the code indicates the ampere rating [A] of the product: 16...160A				
Operation/Mounting/Certification				
F = Base and DIN-rail mounting, front operated				
FT = Door mounting, front operated				
G = Base and DIN-rail mounting, front and side operated				
GT = Door mounting, front and side operated				
FL = Base and DIN-rail mounting, extended terminals on both sides of the switch, front operated				
FLA = Base and DIN-rail mounting, extended terminals on top side only, front operated				
FLB = Base and DIN-rail mounting, extended terminals on bottom side only, front operated				
M, ML = Installation switches for 45mm standard opening, base and DIN-rail mounting, front operated				
Number of poles and placing of the operating mechanism				
3 = 3 poles				
4 = 4 poles				
6 = 6 poles				
8 = 8 poles				
03 = 3 poles, operating mechanism at the left end of the switch				
04 = 4 poles, operating mechanism at the left end of the switch				
30 = 3 poles, operating mechanism at the right end of the switch				
40 = 4 poles, operating mechanism at the right end of the switch				

Pole configuration table, OT160G

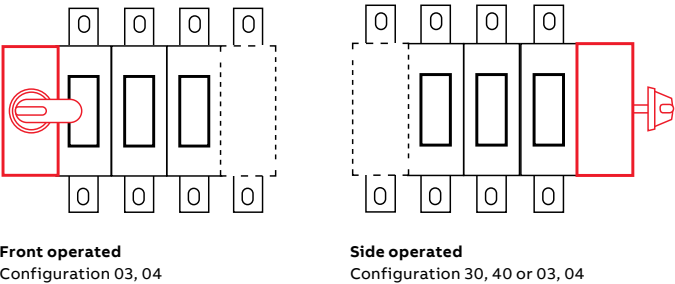

Reference only. For stocked items, see following pages.

OT Plus

Ordering code construction

Find your perfect fit, fast. Understanding the type code keys below will help you quickly identify the correct product for your needs.

	OT	63	G2-	3	B	S	Empty	N2
ABB Brand								
Switch size								N1 = Fourth pole simultaneous, mounted on the left side N2 = Fourth pole simultaneous, mounted on the right side
Indicates the ampere rating [A] of the product: 20...100 A								
Generation letter and frame size								
G2- = Frame 1								
G2- = Frame 2								
G3- = Frame 3								
Number of poles								
3 = 3 poles								
4 = 4 poles								
6 = 6 poles								
8 = 8 poles								
Included accessories								Empty = No accessories included (black padlockable knob handle included as standard) U = Without knob handle, locking ring included
Number of poles and placing of the operating mechanism								S = Screw terminals Q = Quick-Spring terminals
Mounting and operation								B = Base and DIN-rail mounting, front operated D = Door mounting, front operated M = DIN panel mounting, front operated



Reference only. For stocked items, see following pages.

Non-fusible disconnect switches OT200-2000

Ordering code construction

Understanding the type code keys below will help you quickly identify the correct product for your needs.

OT

400

U

03

W

P

ABB Brand
OT = Non-fusible disconnect switches

Switch size
The second letter in the code indicates the ampere rating [A] of the product: 160...4000A

Operation/Mounting/Certification
U = Front operated, base mounting, UL/CSA


Construction 2
K = With direct mount handle
P = External handle and metal shaft included

Construction 1
W = With wide phase distance

Number of poles and placing of the operating mechanism
03 = 3-poles, operating mechanism at the left end of the switch
04 = 4-poles, operating mechanism at the left end of the switch
12 = 3-poles, operating mechanism between the poles
22 = 4-poles, operating mechanism between the poles
30 = 3-poles, operating mechanism at the right end of the switch
40 = 4-poles, operating mechanism at the right end of the switch

Pole configuration table

The various placing options of the operating mechanism in relation to the 3 or 4 poles is illustrated below. The operating mechanism may be placed at the end of the switch or between poles.

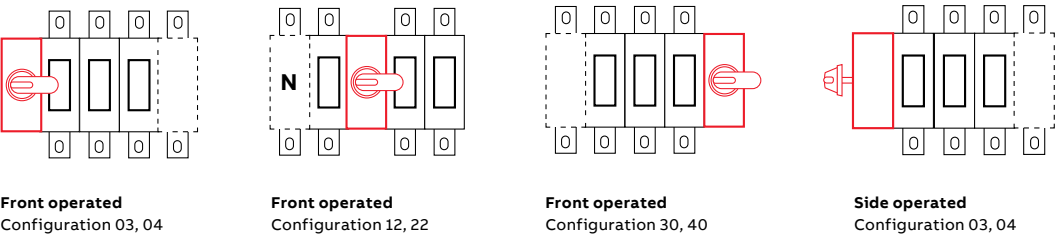

Reference only. For stocked items, see following pages.

Non-fusible disconnect switches

UL508 and UL98

For a complete assembly, please select one of each:


1 disconnect (page 14.5)

1 handle (page 14.12 , 14-13)

1 shaft (page 14.14)

1 terminal lug kit (page 14.16)

NOTE: For additional accessories, [see the buylog](#).
(Lug kits only necessary on switches 200A and above)

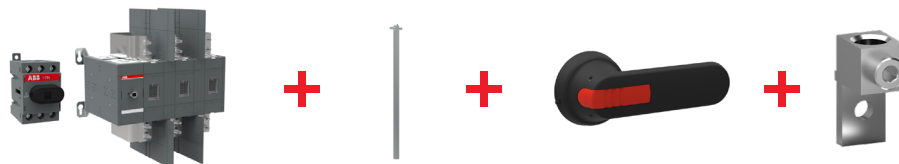

UL listing	UL general purpose amp rating	3 Pole ordering code	6 Pole ordering code	HP Rating
Base & DIN-rail mounted Max voltage (AC): 600Vac				
UL 508	20	OT16F3	---	5 HP / 240VAC, 10HP / 480VAC, 10 HP / 600VAC
	30	OT25F3	OT25F6	7.5 HP / 240VAC, 15 HP / 480VAC, 20 HP / 600VAC
	30	OT25F3/B50*	---	7.5 HP / 240VAC, 15 HP / 480VAC, 20 HP / 600VAC
	40	OT40F3	OT40F6	10 HP / 240VAC, 20 HP / 480VAC, 25 HP / 600VAC
	40	OT40F3/B50*	---	10 HP / 240VAC, 20 HP / 480VAC, 25 HP / 600VAC
	60	OT63F3	OT63F6	15 HP / 240VAC, 30 HP / 480VAC, 30 HP / 600VAC
	60	OT63F3/B50*	---	15 HP / 240VAC, 30 HP / 480VAC, 30 HP / 600VAC
	80	OT80F3	---	20 HP / 240VAC, 40 HP / 480VAC, 40 HP / 600VAC
UL 98	80	OT80F3/B50*	---	20 HP / 240VAC, 40 HP / 480VAC, 40 HP / 600VAC
	30	OT30F3	---	10 HP / 240VAC, 20 HP / 480VAC, 25 HP / 600VAC
	60	OT60F3	---	20 HP / 240VAC, 40 HP / 480VAC, 40 HP / 600VAC
	60	OT60F3/B25**	---	20 HP / 240VAC, 40 HP / 480VAC, 40 HP / 600VAC
	100	OT100F3	OT100F6	30 HP / 240VAC, 50 HP / 480 VAC, 50 HP / 600VAC
	100	OT100F3/B25**	---	30 HP / 240VAC, 50 HP / 480 VAC, 50 HP / 600VAC
	100 ¹	OT160G03	---	-
	200	OT200U03	---	75 HP / 240VAC, 150 HP / 480VAC, 200 HP / 600VAC
	400	OT400U03	---	125 HP / 240VAC, 250 HP / 480VAC, 350 HP / 600VAC
	600	OT600U03	---	200 HP / 240VAC, 450 HP / 480VAC, 500 HP / 600VAC
	800	OT800U03	---	250 HP / 240VAC, 500 HP / 480VAC, 500 HP / 600VAC
	1200	OT1200U03	---	-
Door mounted				
UL508	20	OT16FT3	---	5 HP / 240VAC, 10HP / 480VAC, 10 HP / 600VAC
	30	OT25FT3	---	7.5 HP / 240VAC, 15 HP / 480VAC, 20 HP / 600VAC
	40	OT40FT3	---	10 HP / 240VAC, 20 HP / 480VAC, 25 HP / 600VAC
	60	OT63FT3	---	15 HP / 240VAC, 30 HP / 480VAC, 50 HP / 600VAC
	80	OT80FT3	---	20 HP / 240VAC, 40 HP / 480VAC, 40 HP / 600VAC
UL98	30	OT30FT3	---	10 HP / 240VAC, 20 HP / 480VAC, 30 HP / 600VAC
	60	OT60FT3	---	20 HP / 240VAC, 40 HP / 480VAC, 40 HP / 600VAC
	100	OT100FT3	---	30 HP / 240VAC, 50 HP / 480 VAC, 50 HP / 600VAC

Table continues on next page.

Non-fusible disconnect switches

UL508 and UL98



OT63...80G2-3BS



OT63...80G2-4BSN2



OT30...100G3-3BS



OT30...100G3-4BSN2



UL listing	UL general purpose amp rating	3 Pole ordering code	6 Pole ordering code	HP Rating
Base & DIN-rail mounted Max voltage (AC): 600Vac				
Non-fusible double throw				
UL508	40	OT40F3C	---	10 HP / 240VAC, 20 HP / 480VAC, 25 HP / 600VAC
	60	OT63F3C	---	15 HP / 240VAC, 30 HP / 480VAC, 30 HP / 600VAC
	80	OT80F3C	---	20 HP / 240VAC, 40 HP / 480VAC, 40 HP / 600VAC
UL98	30	OT30F3C	---	10 HP / 240VAC, 20 HP / 480VAC, 30 HP / 600VAC
	60	OT60F3C	---	20 HP / 240VAC, 40 HP / 480VAC, 40 HP / 600VAC
	100	OT100F3C	---	30 HP / 240VAC, 50 HP / 480VAC, 50 HP / 600VAC
	200	OT200U30C	---	75 HP / 240VAC, 150 HP / 480VAC, 200 HP / 600VAC
	400	OT400U30C	---	125 HP / 240VAC, 250 HP / 480VAC, 350 HP / 600VAC
	600	OT600U30C	---	200 HP / 240VAC, 450 HP / 480VAC, 500 HP / 600VAC
	800	OT800U30C	---	250 HP / 240VAC, 500 HP / 480VAC, 500 HP / 600VAC

¹ UL listed to 100A, UL recognized to 125A

* Bulk Pack of 50 Pcs

** Bulk Pack of 25 Pcs

OT Plus disconnect switches

UL listing	UL general purpose amp rating	3 Pole ordering code	4 Pole ordering code	HP Rating
Base & DIN-rail mounted Max voltage (AC): 600Vac				
Non-fusible double throw				
UL 60947-4-1	20	OT20G1-3BS		5 HP/240VAC, 10 HP/480VAC, 10 HP/600VAC
	20	OT20G1-3DS		5 HP/240VAC, 10 HP/480VAC, 10 HP/600VAC
	30	OT30G1-3BS		7.5 HP/240VAC, 15 HP/480VAC, 20 HP/600VAC
	30	OT30G1-3DS		7.5 HP/240VAC, 15 HP/480VAC, 20 HP/600VAC
	40	OT40G1-3BS		10 HP/240VAC, 20 HP/480VAC, 25 HP/600VAC
	40	OT40G1-3DS		10 HP/240VAC, 20 HP/480VAC, 25 HP/600VAC
	63	OT63G2-3BS		20 HP/240VAC, 40 HP/480VAC, 40 HP/600VAC
	63	OT63G2-3DS		15 HP/230VAC, 30 HP/480VAC, 30 HP/600VAC
	80	OT80G2-3BS		15 HP/230VAC, 30 HP/480VAC, 30 HP/600VAC
UL98	80	OT80G2-3DS		20 HP/240VAC, 40 HP/480VAC, 40 HP/600VAC
	30	OT30G3-3BS		10 HP/230VAC, 20 HP/480VAC, 30 HP/600VAC
	60	OT60G3-3BS		20 HP/240VAC, 40 HP/480VAC, 50 HP/600VAC
	60	OT60G3-3DS		20 HP/240VAC, 40 HP/480VAC, 50 HP/600VAC
	100	OT100G3-3DS		30 HP/240VAC, 50 HP/480VAC, 60 HP/600VAC
	100	OT100G3-3BS		30 HP/240VAC, 50 HP/480VAC, 60 HP/600VAC
	100		OT100G3-4DSN2	30 HP/240VAC, 50 HP/480VAC, 60 HP/600VAC

OTDC DC disconnect switches

UL listing	UL general purpose amp rating 1500Vdc	2 pole ordering code
UL 98B	400	OTDC400UFV11


Non-fusible disconnect switches

Flange handle operated switches

For a complete shaft operated flange assembly,
please select one of each:

- 1 disconnect (page 14.7)
- 1 handle (page 14.14)
- 1 shaft (page 14.14)


NOTE: For additional accessories, [see the buylog](#).

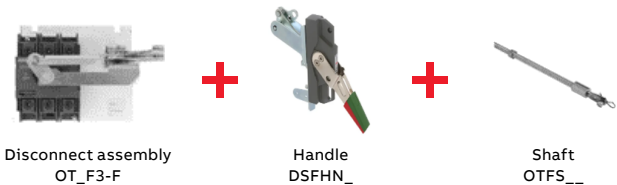

For a complete cable operated flange assembly, please select one of each:

- 1 disconnect (page 14.7)
- 1 handle (page 14.14)
- 1 mechanism (page 14.14)
- 1 cable (page 14.15)
- 1 terminal lug kit (page 14.16)

NOTE: For additional accessories, [see the buylog](#).
(Lug kits only necessary on switches 200A and above)

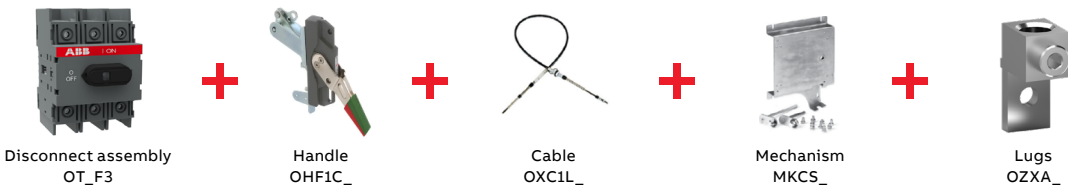

Flange handle shaft operated non-fusible disconnect
Max voltage (AC): 600Vac



UL listing	UL general purpose amp rating	Ordering Code	HP Rating
UL98	30	OT30F3-F	10 HP / 240VAC, 20 HP / 480VAC, 25 HP / 600VAC

Flange handle cable operated non-fusible disconnect
Max voltage (AC): 600Vac

UL listing	UL general purpose amp rating	Ordering Code	HP Rating
UL98	30	OT30F3	10 HP / 240VAC, 20 HP / 480VAC, 25 HP / 600VAC
	60	OT60F3	20 HP / 240VAC, 40 HP / 480VAC, 40 HP / 600VAC
	100	OT100F3	30 HP / 240VAC, 50 HP 480 VAC, 50 HP / 600VAC
	200	OT200U30	75 HP / 240VAC, 150 HP / 480VAC, 200 HP / 600VAC
	400	OT400U30-FC	125 HP / 240VAC, 250 HP / 480VAC, 350 HP / 600VAC
	800	OT800U30-FC	250 HP / 240VAC, 500 HP / 480VAC, 500 HP / 600VAC

Note: For flange handle and cables selection please check pages [14-14](#) and [14-15](#).

Fusible disconnect switches OS30

Ordering code construction

Type codes

Understanding the type code keys below will help you quickly identify the correct product for your needs. The simple naming system allows you to see the products type, Ampere rating, standard classification and number of poles, all in one glance.

OS

30F

AJ

-

22

-

F

-

ABB Brand
OS = ABB switch fuse/fusible switch

Switch size
The second part in the code indicates the ampere rating [A] of the product: 30A followed by the generation letter: F

Fuse type
AJ = J
ACC = CC

Switch operation
Blank = Front operation
S = Side operation

Number of poles and placing of the operating mechanism
12 = 3 poles, operating mechanism between the poles
22 = 4 poles, operating mechanism between the poles
30 = 3 poles, operating mechanism at the right end of the switch

Included handle
Blank = No handle included


Fourth pole/neutral terminal
F = Fused switched neutral
Blank = Terminal not included

Fuse size
Blank = Fuses not included


Pole configuration table

The various placing options of the operating mechanism in relation to the 3 or 4 poles is illustrated below. The operating mechanism may be placed at the end of the switch or between poles.

Between the poles OS_12 or 22:



Side operated types OS_30 or 40 / OS_03 or 04:



Reference only. For stocked items, see following pages.

Fusible disconnect switches OS60...1200

Ordering code construction

Type codes


Understanding the type code keys below will help you quickly identify the correct product for your needs. The simple naming system allows you to see the products type, Ampere rating, standard classification and number of poles, all in one glance.

OS100GJ-04N1--							
ABB Brand OS = ABB switch fuse/fusible switch		Switch size The second part in the code indicates the ampere rating [A] of the product: 60...1200A possibly followed by generation letter: G		Fuse type J = J L = L		Included handle Blank = No handle included	
Switch operation Blank = Front operation S = Side operation		Number of poles and placing of the operating mechanism 03 = 3 poles, operating mechanism at the left end of the switch 04 = 4 poles, operating mechanism between the poles 12 = 3 poles, operating mechanism between the poles 22 = 4 poles, operating mechanism between the poles 30 = 3 poles, operating mechanism at the right end of the switch 40 = 4 poles, operating mechanism at the right end of the switch		Terminals for special connection (only IEC) Blank = No special connection		Fourth pole/neutral terminal Blank = Neutral terminal not included N1 = Non-fused switched neutral on the left side F = Fused switched neutral	


Pole configuration table

The various placing options of the operating mechanism in relation to the 3 or 4 poles is illustrated below. The operating mechanism may be placed at the end of the switch or between poles.


At the end of the switch fuse OS_03 or 04:




Between the poles OS_12 or 22:




Side operated types OS_30 or 40 / OS_03 or 04:



BB-types:



LR-types:



Reference only. For stocked items, see following pages.


Fusible disconnect switches

UL98 flange handle operated switches

For a complete shaft operated flange assembly, please select one of each:

- 1 disconnect (page 14.10)
- 1 handle (page 14.15)
- 1 shaft (page 14.14)
- 1 terminal lug kit (page 14.16)

Note: For additional accessories, [see the buylog](#).
(Lug kits only necessary on switches 100A and above)

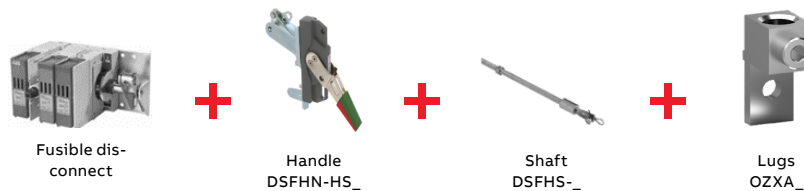

For a complete cable operated flange assembly, please select one of each:

- 1 disconnect (page 14.10)
- 1 handle (page 14.15)
- 1 cable (page 14.15)
- 1 terminal lug kit (page 14.16)

Note: For additional accessories, [see the buylog](#).
(Lug kits only necessary on switches 100A and above)



Flange handle shaft operated fusible disconnect Max voltage 600 (AC): 600Vac



UL listing	UL general purpose amp rating	UL Fuse Type	Ordering Code	HP Rating
UL98	30	J	OS30FAJF30	7.5 HP / 240VAC, 15 HP / 480VAC, 20 HP / 600VAC


Flange handle cable operated fusible disconnect Max voltage 600 (AC): 600Vac

UL listing	UL general purpose amp rating	UL Fuse Type	Ordering Code	HP Rating
UL98	30	CC	OS30FACC12	7.5 HP / 240VAC, 15 HP / 480VAC, 20 HP / 600VAC
	30	J	OS30FAJ12	7.5 HP / 240VAC, 15 HP / 480VAC, 20 HP / 600VAC
	60	J	OS60GJ12*	15 HP / 240VAC, 30 HP / 480VAC, 50 HP / 600VAC
	60	J	OS60GJ30	15 HP / 240VAC, 30 HP / 480VAC, 50 HP / 600VAC
	100	J	OS100GJ30	30 HP / 240VAC, 60 HP / 480VAC, 75 HP / 600VAC
	200	J	OS200J30	60 HP / 240VAC, 125 HP / 480VAC, 150 HP / 600VAC
	400	J	OS400J30-FC	125 HP / 240VAC, 250 HP / 480VAC, 350 HP / 600VAC
	600	J	OS600J30-FC	200 HP / 240VAC, 400 HP / 480VAC, 500 HP / 600VAC

Note: For flange handle and cables selection please check pages [14-14](#) and [14-15](#).
* Operated,12 (Between the Poles)

Fusible and non-fusible disconnect switches


Accessories



PNG2

1 - Additional poles for non-fusible

Description	For use on	AC Thermal amp rating	Mounting location	Panel or door mount	Ordering Code
Power poles - Fourth Pole simultaneous function with the main contacts					
	OT16-OT25, OT40	40	Left	Panel	OTPS40FPN1
	OT16-OT25, OT40	40	Right	Panel	OTPS40FPN2
	OT16-OT25, OT40	40	Left	Door	OTPS40FDN1
	OT16-OT25, OT40	40	Right	Door	OTPS40FDN2
	OT30, OT60	60		Panel	OTPS60FP
	OT30, OT60	60		Door	OTPS60FD
	OT63-OT80	80		Panel	OTPS80FP
	OT63G2-...OT100G2-	80		Door	PNG2
	OT100	100		Panel	OTPS125FP
	OT100	100		Door	OTPS125FD
Terminal poles					
Solid Neutral	OT16-OT25, OT40	40		Panel	OTPN40FP
	OT30, OT60	60		Panel	OTPN60FP
	OT63-OT80	80		Panel	OTPN80FP
	OT100	100		Panel	OTPN125FP
Detachable Neutral	OT16-OT25, OT40	40		Panel	OTPE40FP
Ground Terminal	OT16-OT25, OT40	40		Door	OTPE40FD



AUXGB-11

2 - Auxiliary contacts Vdc/Vac

Description	For use on	AC Thermal amp rating	Ordering Code
Snap-on mounting			
1 N.O.	OS30-1200, OT16-1200, OT16-800_C	10	OA1G10
1 N.C.	OT16-160	10	OA1G01
1 N.C.	OS30-1200, OT200-2000	10	OA3G01
1 N.O. & 1 N.C.	OT16-100	10	OA2G11
1 N.O. & 1 N.C.	OS30	6	OA4B1C
1 N.O. & 1 N.C.	OT20G1...OT50G1-_B_/M_, OT63G2-...OT100G2-_BS, OT30G3-...OT160G3-_BS		AUXGB-11
Snap-on mounting for double throw			
1 N.O.	OT16-800_C	10	OA1G10
1 N.O.	OT16-100_C	10	OA7G10
1 N.C.	OT16-100_C	10	OA1G01
1 N.C.	OT200-800_C	10	OA3G01
1 N.O. & 1 N.C.	OT16-100_C	10	OA2G11
Accessories			
Auxiliary contact frame (for OA1G10 and OA3G01)	OS30		OSZ4
Auxiliary contact mounting module (for OA1G10 and OA3G01)	OS200, OT200-400		OEA28

Fusible and non-fusible disconnect switches

Accessories for rotary operated switches

3 - Handles



For use on	NEMA Type	IP Rating	Shaft diameter in (mm)	Color	Marking	Ordering Code
Selector handles						
OT16...125F	1	IP54	0.24 (6)	Black	O/I & Off/On	OHBS3AH1
OT16...125F	1	IP54	0.24 (6)	Red/Yellow	O/I & Off/On	OHYS3AH1
OT16...80F	1	IP54	0.24 (6)	Black	O/I & Off/On	OHBS1AH1
OT16...125F	1, 3R, 12	IP65	0.24 (6)	Black	O/I & Off/On	OHBS2AJ1
OT16...125F	1, 3R, 12	IP65	0.24 (6)	Red/Yellow	O/I & Off/On	OHYS2AJ1
OT16...125F	1, 3R, 12	IP65	0.24 (6)	Black	O/I & Off/On	OHBS2AJ ¹
OT16...125F	1, 3R, 12	IP65	0.24 (6)	Red/Yellow	O/I & Off/On	OHYS2AJ ²
Selector handles with metal hasp						
OT16...125F	1, 3R, 12	IP65	0.24 (6)	Black	O/I & Off/On	OHBS2AJ1EH
Pistol handles						
						Length (mm)
OT16...125F	1, 3R, 12	IP65	0.24 (6)	Black	O/I & Off/On	1.8 (45) OHB45J6
OT200	1, 3R, 12	IP65	0.24 (6)	Black	O/I & Off/On	2.6 (65) OHB65J6
OT200	1, 3R, 12	IP65	0.24 (6)	Black	O/I & Off/On	3.1 (80) OHB80J6
OT16...125F	1, 3R, 12	IP65	0.24 (6)	Red/Yellow	O/I & Off/On	1.8 (45) OHY45J6
OT200	1, 3R, 12	IP65	0.24 (6)	Red/Yellow	O/I & Off/On	2.6 (65) OHY65J6
OT200	1, 3R, 12	IP65	0.24 (6)	Red/Yellow	O/I & Off/On	3.1 (80) OHY80J6
OT200	1, 3R, 12	IP65	0.24 (6)	Grey	O/I	3.1 (80) OHG80J6
OT16...125F	1, 3R, 12, 4, 4X	IP66	0.24 (6)	Black	O/I & Off/On	1.8 (45) OHB45L6
OT200	1, 3R, 12, 4, 4X	IP66	0.24 (6)	Black	O/I & Off/On	2.6 (65) OHB65L6
OT200	1, 3R, 12, 4, 4X	IP66	0.24 (6)	Black	O/I & Off/On	3.1 (80) OHB80L6
OT16...125F	1, 3R, 12, 4, 4X	IP66	0.24 (6)	Red/Yellow	O/I & Off/On	1.8 (45) OHY45L6
OT200	1, 3R, 12, 4, 4X	IP66	0.24 (6)	Red/Yellow	O/I & Off/On	2.6 (65) OHY65L6
OT200	1, 3R, 12, 4, 4X	IP66	0.24 (6)	Red/Yellow	O/I & Off/On	3.1 (80) OHY80L6
OT200...2000A and OS30...1200A	1, 3R, 12, 4, 4X	IP66	0.24 (6)	Stainless Steel	O/I & Off/On	2.6 (65) OHM65L6
OT400U_ And OTDC400	1, 3R, 12	IP65	0.47 (12)	Black	O/I & Off/On	3.7 (95) OHB95J12
OT600U_ And OTDC400	1, 3R, 12	IP65	0.47 (12)	Black	O/I & Off/On	4.9 (125) OHB125J12
OT600U_ And OS630...800	1, 3R, 12	IP65	0.47 (12)	Black	O/I & Off/On	5.7 (145) OHB145J12
OT800...1200U and OS1200	1, 3R, 12	IP65	0.47 (12)	Black T-Handle	O/I & Off/On	2X 5.9 (150) OHB150J12P
OS630...800	1, 3R, 12	IP65	0.47 (12)	Black	O/I & Off/On	6.9 (175) OHB175J12
OT800...1200U and OS1200	1, 3R, 12	IP65	0.47 (12)	Black T-Handle	O/I & Off/On	2X 7.9 (200) OHB200J12P
OT800...2000U_	1, 3R, 12	IP65	0.47 (12)	Black	O/I & Off/On	10.8(274) OHB274J12
OT600U_ And OS630...800	1, 3R, 12	IP65	0.47 (12)	Red/Yellow	O/I & Off/On	4.9 (125) OHY125J12
OT600U_ And OS630...800	1, 3R, 12	IP65	0.47 (12)	Red/Yellow	O/I & Off/On	5.7 (145) OHY145J12
OS630...800	1, 3R, 12	IP65	0.47 (12)	Red/Yellow	O/I & Off/On	6.9 (175) OHY175J12
OT800...1200U and OS1200	1, 3R, 12	IP65	0.47 (12)	Red/Yellow	O/I & Off/On	10.8 (274) OHY274J12
OT600U_ And OS630...800	1, 3R, 12	IP65	0.24 (6)	Grey	O/I	5.7 (145) OHG145J12
OT600U_ And OS630...800	1, 3R, 12, 4, 4X	IP66	0.47 (12)	Black	O/I & Off/On	4.9 (125) OHB125L12
OT600U_ And OS630...800	1, 3R, 12, 4, 4X	IP66	0.47 (12)	Black	O/I & Off/On	5.7 (145) OHB145L12
OS630...800	1, 3R, 12, 4, 4X	IP66	0.47 (12)	Black	O/I & Off/On	6.9 (175) OHB175L12
OT800...1200U and OS1200	1, 3R, 12, 4, 4X	IP66	0.47 (12)	Black	O/I & Off/On	10.8(274) OHB274L12
OT600U_800 And OS630...800	1, 3R, 12, 4, 4X	IP66	0.47 (12)	Red/Yellow	O/I & Off/On	5.7 (145) OHY145L12
OT600U_800 And OS630...800	1, 3R, 12, 4, 4X	IP66	0.47 (12)	Red/Yellow	O/I & Off/On	6.9 (175) OHY175L12
OT600U_800 And OS630...800	1, 3R, 12, 4, 4X	IP66	0.47 (12)	Stainless Steel	O/I & Off/On	6.9 (175) OHM175L12

Fusible and non-fusible disconnect switches

Accessories for rotary operated switches

3 - Handles (continued)



Direct mount handle

For use on	Color	Shaft	Ordering Code
OT16-OT25, OT40	Black	Yes	OHBS12
OT30, OT60, OT100	Black	No	OHBS2
OS30	Black	Yes	OHBS5
OS60-OS100	Black	No	OHBS4
OS200	Black	No	OSV200BK
OT200	Black	No	OTV250EK
OS400	Black	No	OSV400BK
OT400	Black	No	OTV400EK

Handle knobs for base and DIN-rail mounted switches for OT Plus Handle mounted directly on the switch



OHR-G3

Direct mount handle

For use on	Color	Shaft	Ordering Code
OT63G2-...OT100G2- OT30G3-...OT160G3-	Black	Yes	OHR-G3

¹ Possible to be used together with shaft, included in standard delivery

Selector handles for door mounted switches



Direct mount handle

NEMA Type	IP rating	Color	Ordering Code
Snap-on mounting - for use on OT16FT3 - OT40FT3			
1	IP54	Black	OHBS3PH
1	IP54	Red/Yellow	OHYS3PH
1, 3R, 12	IP65	Black	OHBS2PJ
1, 3R, 12	IP65	Red/Yellow	OHYS2PJ

Screw mounting - for use on OT16FT3 - OT100FT3. For OT30, OT60, and OT100 use OH_2_ only

1	IP54	Black	OHBS3RH
1	IP54	Red/Yellow	OHYS3RH
1, 3R, 12	IP65	Black	OHBS2RJ
1, 3R, 12	IP65	Red/Yellow	OHYS2RJ

3 Position for double throw switches




For use on	NEMA Type	IP Rating	Shaft diameter in (mm)	Color	Marking	Handle Length in (mm)	Order Code
Selector handles							
OT16...125F	1, 3R, 12	IP65	0.24 (6)	Black	I/O/II, ON/OFF/ON		OHBS2AJE011
Pistol handles							
OT16...160	1, 3R, 12	IP65	0.24 (6)	Black	I/O/II, ON/OFF/ON	2.6 (65)	OHB65J6E011
OT16...160	1, 3R, 12	IP65	0.24 (6)	Black	I/O/II, ON/OFF/ON	3.1 (80)	OHB80J6E011
OT630-800	1, 3R, 12	IP65	0.47 (12)	Black	I/O/II, ON/OFF/ON	5.7 (145)	OHB145J12E011
OT160-250	1, 3R, 12, 4, 4X	IP66	0.24 (6)	Black	I/O/II, ON/OFF/ON	2.6 (65)	OHB65L6E011

¹ The difference between OHBS2AJ and OHBS2AJ1 is that OHBS2AJ is defeatable.

² The difference between OHYS2AJ and OHYS2AJ1 is that OHYS2AJ is defeatable.

Fusible and non-fusible disconnect switches

Accessories for rotary operated switches

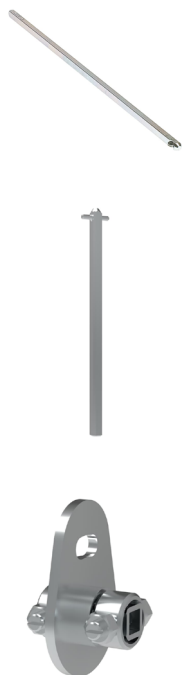

4 - Shafts

Shaft length in (mm)	Ordering Code
Shafts for selector handles - with diameter 0.24 (6)	
2.2 (57)	OXS6X57
3.3 (85)	OXS6X85
3.7 (95)	OXS6X95
4.1 (105)	OXS6X105
4.7 (120)	OXS6X120
5.1 (130)	OXS6X130
5.9 (150)	OXS6X150
7.1 (180)	OXS6X180
9.8 (250)	OXS6X250
13 (330)	OXS6X330

Description	Ordering Code
Shaft and handle accessories	
6mm shaft coupler	OESA-ZX167
Shaft support	OETL-ZX58
Shaft Coupler 12mm	OETL-ZX95
Shaft Guide	OHZX10
Adapter	OHZX6
Din Rail Adapter	OSGZD1

Shaft length in (mm)	Ordering Code
Shafts for pistol handles - with diameter 0.24 (6)	
2.2 (57)	EXP6X57
3.4 (87)	EXP6X87
5.2 (130)	EXP6X130
5.9 (150)	EXP6X150
6.2 (158)	EXP6X158
6.7 (170)	EXP6X170
7.1 (181)	EXP6X181
8.3 (210)	EXP6X210
10.4 (265)	EXP6X265
11.4 (290)	EXP6X290
14.2 (360)	EXP6X360
15.8 (400)	EXP6X400
16.9 (430)	EXP6X430
19.7 (500)	EXP6X500
27.6 (700)	EXP6X700
Shafts for pistol handles - with diameter 0.47 (12)	
7.3 (185)	EXP12X185
9.8 (250)	EXP12X250
11.0 (280)	EXP12X280
12.8 (325)	EXP12X325
15.6 (395)	EXP12X395
18.3 (465)	EXP12X465
21.1 (535)	EXP12X535
24.6 (625)	EXP12X625

5 - Flange handles

Flange handle, shaft operated for fusible and non-fusible disconnect switches		
NEMA type	Marking	Ordering Code
1, 3R, 12	OFF/ON	DSFHN-HS12
Flange handle shafts		
For use with:	Maximum enclosure depth	Ordering Code
OS30_ - OS100_	16"	DSFHS-12
Flange handle cable operating mechanism		
For use with:	Ordering Code	
OT30...100F3	MKCS1	
OS30AFJ12, OS30AAFCC12	MKCS2	
OS60GJ12	MKCS3	
OS60...100GJ30, OS200J30, OT200U30	MKCS4	

Table continues on next page.

Fusible and non-fusible disconnect switches

Accessories

5 - Flange handles (continued)



Flange handle, cable operated

For use with:	NEMA Type	Ordering Code
OS30FA_12, OS60...100GJ30, OS200J30	1, 3R, 12	OHF1C12
OT30...100F3, OT200U30	4, 4X	OHF1C4
OS400J30-FC, OT400...600U30-FC	1, 3R, 12	K7FCH
	4, 4X	K7FCH4
OS600J30-FC	1, 3R, 12	K8FCH
OS800...1200L30-FC, OT800...1200U30-FC	1, 3R, 12	K9FCH

6 - Cables for flange handle disconnect switches



For use with:	Ordering Code		
	36 in	48 in	60 in
OS30FA_12, OS60...100GJ30, OS200J30, OT30...100F3, OT200U30	OXC1L36	OXC1L48	OXC1L60
OS400...600J30-FC, OT400...600U30-FC	-	K7C048	K7C060

7 - Terminal shrouds



OTS40T3



TSG3-3



OSS160GG1L/3

Description	For Use On	Ordering Code
For non-fusible		
(1) 3 pole for use on line or load side	OT16-OT25, OT40	OTS40T3
	OT63-80	OTS63T3
	OT30, OT60, OT100	OTS125T3
(1) 4th pole for use on line or load side	OT16-OT25, OT40	OTS40T1
	OT63-80	OTS63T1
(3) 1 pole for use on line or load side	G2	TSG2-3
(3) 1 pole for use on line or load side	G3	TSG3-3
(3) 1 pole long type	OT200	OTS250G1L/3
(3) 1 pole short type	OT200	OTS250G1S/3
(1) 3 pole for use on line or load side	OT400	OTS403
(3) 1 pole long type	OT400	OTS400G1L/3
(3) 1 pole short type	OT400	OTS400G1S/3
(1) 3 pole for use on line or load side	OT600	OTS603
For non-fusible		
(3) 1 pole long type	OS100	OSS160GG1L/3
(3) 1 pole short type	OS100	OSS160GG1S/3
(3) 1 pole long type	OS200	OSS200G1L/3
(3) 1 pole short type	OS200	OSS200G1S/3
(3) 1 pole long type	OS400	OSS400G1L/3
(1) 3 pole for use on line or load side	OS400	OSS403
	OS400J30-FC	OSS403-FC

Table continues on next page.


Fusible and non-fusible disconnect switches

Accessories



7 - Terminal shrouds

Description	For Use On	Ordering Code
For non-fusible		
(1) 3 pole for use on line or load side	OS600	OSS603
	OS600J30-FC	OSS603-FC
(3) 1 pole long type	OS800	OSS800G1L/3



8 - Terminal lug kits

For Use On	Wire Size	Wire Type	Lugs/Kit	Ordering Code
OS100	#14-2/0	Cu/Al	6	OZXA-24
OT200, OS200	#4 - 300 kcmil	Cu/Al	6	OZXA-200
OT400, OS400	#2 - 600 kcmil	Cu/Al	6	OZXA-400
	(2) #4 - 300 kcmil	Cu/Al	6	OZXA-402
	(6) #14 - 6 AWG	Cu/Al	3	OZXA-406
OT600...800, OS600...800	(2) #2 - 600 kcmil	Cu/Al	6	OZXA-800
OS1200, OT800...2000	(4) #2 - 600 kcmil	Cu/Al	6	OZXA-1200



9 - Other accessories

Description	Ordering Code
Bridge bars OT200U_C	OTZC13
Bridge bars OT400U_C	OTZC23
Bridge bars for OT600U_C	OTZC33
Module for auxiliaries or fuse monitor mounting, OS30	OSZ4
Alignment ring	OHZX11
Stainless steel hasp	OHZX12
Stainless steel hasp	OHZX13

Performance data of auxiliary contacts

Ue	Ie	Ue	Ie
VAC	A	VDC	A
230	6	24	10
400	4	72	4
415	4	125	2
690	2	250	0.55
		440	0.1

Operator interface and signaling devices

Section 15

Operator interface and signaling devices

Table of contents

22mm - Modular plastic range

Modular plastic range	15-1
Modular pushbuttons - non-Illuminated and illuminated	15-2
Double pushbuttons - non-Illuminated and illuminated	15-3
Heavy duty pushbutton	15-3
Modular flush reset pushbutton with shaft	15-3
Emergency stop pushbuttons - non-Illuminated and illuminated	15-3
Modular pilot lights	15-3
Modular selector switch	15-4
Complete potentiometer	15-4
Toggle switch	15-4
Joysticks IP67 and IP69K	15-4
Accessories	15-5

22mm - Compact range

Compact pushbutton - non-Illuminated and illuminated	15-7
Emergency stop pushbuttons - non-Illuminated	15-7
Selector switch	15-7
Buzzer	15-8
LED pilot light	15-8
Accessories	15-8


22mm - Modular metal range

Modular metal pushbuttons - non-Illuminated and illuminated	15-9
Marked pushbuttons	15-9
Mushroom pushbuttons	15-9
Pilot lights	15-10
Accessories	15-11


30mm Heavy Duty range

Heavy duty push buttons and pilot lights	15-13
Heavy duty selector switches	15-14
Heavy duty accessories	15-15


Modular plastic range

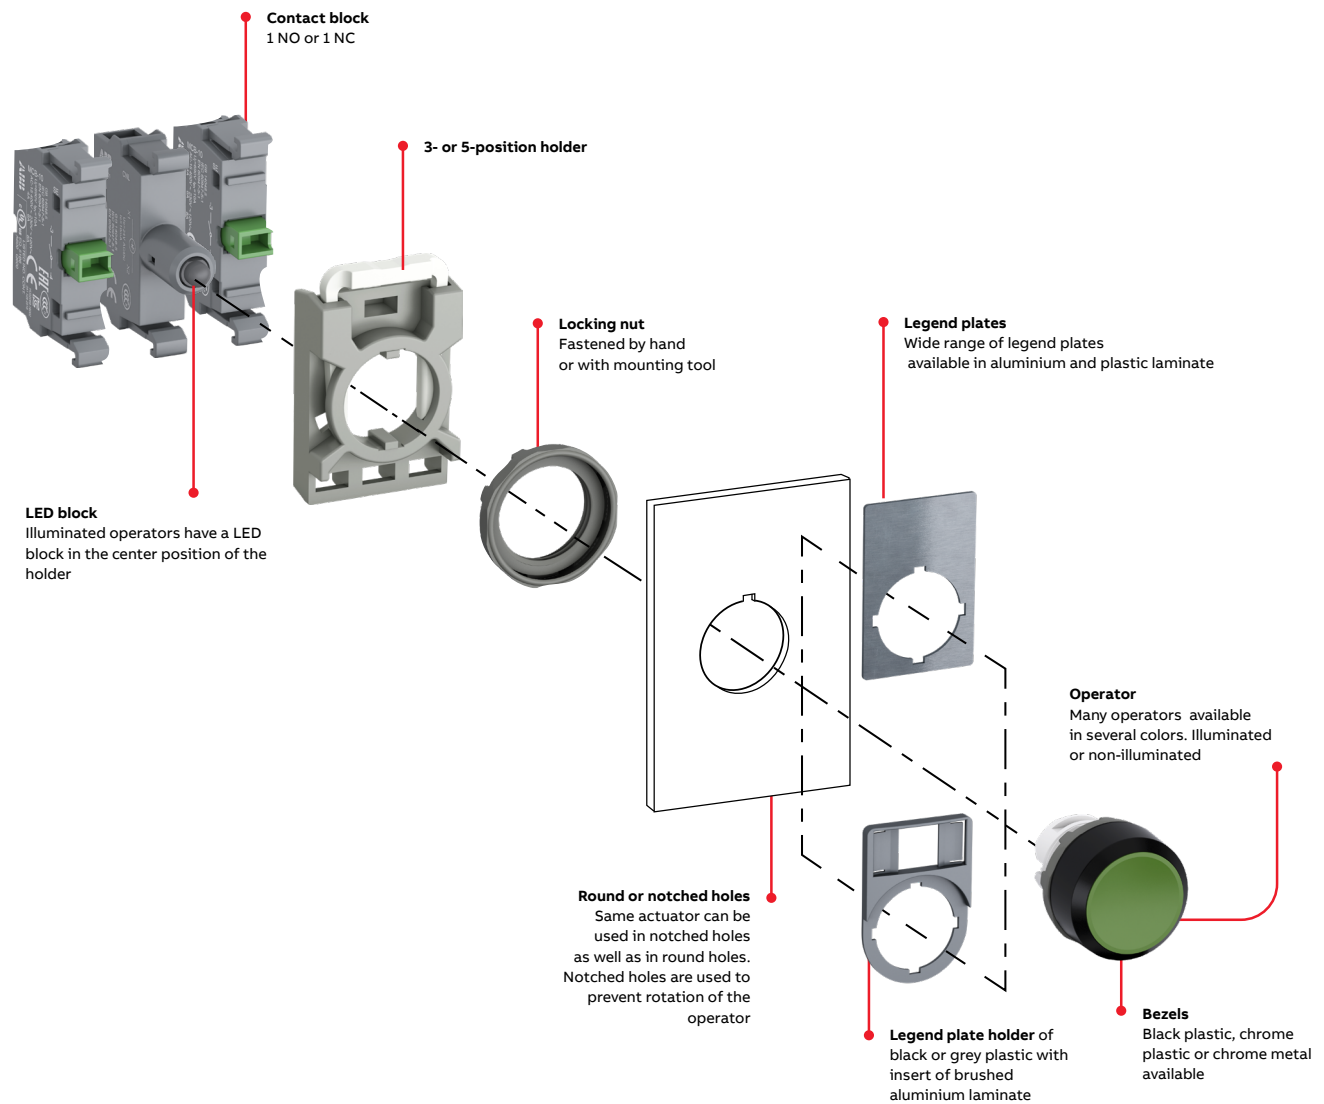


Easy to install




The operator is to be inserted from the front...



...and secured at the back with the nut.




The contact blocks/LED block are then snapped on to the holder...



...and the holder snaps on to the operator.

...and to remove

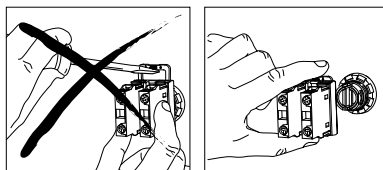

Press down the spring on the holder and pull the holder from the actuator.

Simple and fast installation



Watch the video

Pilot Devices

Stocked 22mm - Modular plastic range



Modular pushbuttons, 22mm, Non-Illuminated

Color	Bezel	Ordering code
Momentary flush pushbutton		
red	black plastic	MP1-10R
red	chrome metal	MP1-30R
green	black plastic	MP1-10G
green	chrome metal	MP1-30G
black	black plastic	MP1-10B
black	chrome metal	MP1-30B
clear	black plastic	MP1-10C
blue	black plastic	MP1-10L
white	black plastic	MP1-10W
yellow	black plastic	MP1-10Y
Momentary extended pushbutton		
red	black plastic	MP3-10R
green	black plastic	MP3-10G
black	black plastic	MP3-10B
clear	black plastic	MP3-10C



Modular pushbuttons, 22mm, Illuminated

Color	Bezel	Ordering code
Momentary flush pushbutton		
red	black plastic	MP1-11R
red	chrome metal	MP1-31R
green	black plastic	MP1-11G
green	chrome metal	MP1-31G
clear	black plastic	MP1-11C
blue	black plastic	MP1-11L
white	black plastic	MP1-11W
yellow	black plastic	MP1-11Y
Maintained flush pushbutton		
red	black plastic	MP2-11R
green	black plastic	MP2-11G
Momentary extended pushbutton		
red	black plastic	MP3-11R
green	black plastic	MP3-11G
white	black plastic	MP3-11W

Table continues on next page.

Pilot Devices

Stocked 22mm - Modular plastic range



Modular double pushbuttons, 22mm, Non-Illuminated

Upper button color	Upper button text	Lower button color	Lower button text	Ordering code
Extended lower pushbutton				
green	START	red	STOP	MPD15-11B



Modular double pushbuttons, 22mm, Illuminated

Upper button color	Upper button text	Lower button color	Lower button text	Indicator light	Ordering code
Extended lower pushbutton					
green	START	red	STOP	Clear	MPD15-11C



Modular heavy duty pushbutton

Color	Ordering code
Black	KP6-40B



Modular flush reset pushbutton with shaft

Color	Text	Ordering code
Black	RESET	KPR3-104B
Blue	R	KPR3-101L

Emergency stop pushbuttons



Diameter (mm)	Color	Release method	Ordering code
Non-illuminated			
30	Red	Twist release	MPET3-10R
40	Red	Twist release	MPET4-10R
40	Red	Pull release	MPEP4-10R
40	Red	Key release code 71/ronis 455	MPEK4-11R
60	Red	Twist release	MPMT4-10R
Illuminated			
40	Red	Twist release	MPMT3-11R
60	Red	Twist release	MPMT4-11R



Modular pilot lights



Color	Ordering code
clear	ML1-100C
green	ML1-100G
blue	ML1-100L
red	ML1-100R
white	ML1-100W
yellow	ML1-100Y


Pilot Devices

Stocked 22mm - Modular plastic range



Modular selector switch

Action	Color	Bezel	Illumination	Ordering code
2 position, short handle				
Maintained BC	Black	Black plastic	non-illuminated	M2SS1-10B
Maintained AC	Black	Black plastic	non-illuminated	M2SS2-10B
Maintained AC	Black	Chrome metal	non-illuminated	M2SS2-30B
3 position, short handle				
Maintained ABC	Black	Black plastic	non-illuminated	M3SS1-10B
Maintained ABC	Black	Chrome metal	non-illuminated	M3SS1-30B
Momentary, spring return from A to B and from C to B	Black	Black plastic	non-illuminated	M3SS2-10B
Momentary, spring return from C to B	Black	Black plastic	non-illuminated	M3SS3-10B
Momentary, spring return from A to B	Black	Black plastic	non-illuminated	M3SS7-10B
2 position, long handle				
Maintained BC	Black	Black plastic	non-illuminated	M2SS4-10B
Maintained AC	Black	Black plastic	non-illuminated	M2SS5-10B
3 position, long handle				
Maintained ABC	Black	Black plastic	non-illuminated	M3SS4-10B
2 position, short handle				
Maintained AC	Green	Black plastic	Illuminated	M2SS2-11G
Maintained ABC	Green	Black plastic	Illuminated	M3SS1-11G
2 position, key release code 71/ronis 455				
Maintained BC (key removed in both positions)	---	Black plastic	non-illuminated	M2SSK1-101
Maintained BC (key removed in position B only)	---	Black plastic	non-illuminated	M2SSK2-101
Momentary, spring return from C to B (removed B only)	---	Black plastic	non-illuminated	M2SSK3-101
3 position, key release code 71/ronis 455				
Maintained ABC (key removed in all positions)	---	Black plastic	non-illuminated	M3SSK1-101
Momentary, spring return from A to B and from C to B (key removed B only)	---	Black plastic	non-illuminated	M3SSK3-101



Complete potentiometer

Description	Bezel	Ordering code
Black knob with integrated position indication and marking in white		
With resistor 5 kohm	Black plastic	MT-105B
With resistor 5 kohm	Chrome metal	MT-305B
With resistor 10 kohm	Black plastic	MT-110B
With resistor 10 kohm	Chrome metal	MT-310B



Toggle switch

Description	Bezel	Ordering code
Maintained AC	Black plastic	MTS1-10B
Momentary, spring return from A to B and from C to B	Black plastic	MTS2-10B



Joysticks IP67 and IP69K

Description	Bezel	Ordering code
2-position momentary	Chrome metal	MJS2-60B
4-position momentary	Chrome metal	MJS6-60B



Pilot Devices

Stocked 22mm - Modular plastic range accessories



Holders

Description	Ordering code
3-positions	MCBH-00
5-positions	MCBH5-00



Contact blocks

Description	Ordering code
Single contact blocks for front mounting	
1 NO	MCB-10
1 NC	MCB-01
1 NO with gold plated contacts	MCB-10G
1 NC with gold plated contacts	MCB-01G
Micro switch contact blocks	
1 NO	MCBL-10
1 NC	MCBL-01
Double contact blocks for front mounting	
2 NO	MCB-20
2 NC	MCB-02
Single contact blocks for back mounting	
1 NO	MCB-10B
1 NC	MCB-01B



LED blocks, 10 mA	Rated voltage	Wave length mm	Luminance mcd	Ordering code
Color				
Red	24V AC/DC	620	250	MLBL-01R
Green	24V AC/DC	520	1500	MLBL-01G
Yellow	24V AC/DC	588	250	MLBL-01Y
Blue	24V AC/DC	468	450	MLBL-01L
White	24V AC/DC	---	600	MLBL-01W
Red	110-130V AC	620	200	MLBL-04R
Green	110-130V AC	520	1200	MLBL-04G
Yellow	110-130V AC	588	250	MLBL-04Y
White	110-130V AC	---	500	MLBL-04W
Red	110-130V DC	620	250	MLBL-05R
Red	230V AC	620	250	MLBL-07R
Green	230V AC	520	1500	MLBL-07G
Yellow	230V AC	588	300	MLBL-07Y

Specific Accessories for Modular Metal Range

Adapter ring for 30 mm hole to mount P9 22 mm in a 30 mm hole	P9A-RAM32
Locking ring wrench	P9A-CWAF
Shroud for modular emergency stop, yellow	MA1-8053
Shroud for compact emergency stop, yellow	CA1-8053
Protective cover for flush pushbuttons (modular/compact)	KA1-8010



Table continues on next page.

Pilot Devices

Stocked 22mm - Modular plastic range accessories



Specific Accessories for Modular Metal Range

Spacer, 1mm thick	SK615516-1
Blanking plug, black (modular/compact)	KA1-8028
Black legend plate holder	KA1-8120
Legend plate without text or symbol	KA1-8121
Legend plate "Start", 22mm	SK615550-44
Legend plate "Emergency stop", 22mm	SK615552-15
Legend plate "Forward", 22mm	SK615552-17
Legend plate "Off", 22mm	SK615552-21
Legend plate "On", 22mm	SK615552-22
Legend plate "Reverse", 22mm	SK615552-28
Legend plate "Run", 22mm	SK615552-29
Legend plate "Stop", 22mm	SK615552-31
Legend plate, black on yellow aluminum, "Emergency stop"	CA6-1026



Empty enclosures in plastic

1-seat - Grey	MEP1-0
2-seat - Grey	MEP2-0
3-seat - Grey	MEP3-0
4-seat - Grey	MEP4-0
6-seat - Grey	MEP6-0
1-seat - Yellow	MEPY1-0
For emergency stop pushbuttons - Yellow, Compact - IP66,67,69K	CEPY1-0



Empty enclosures in aluminium - Grey color

1-seat	080SP-1
2-seat	080SP-2
3-seat	080SP-3
4-seat	080SP-4

Pilot Devices

Stocked 22mm - Compact range

Compact pushbutton



Color	Contacts	Voltage rating	Bezel	Ordering code
Non-illuminated, momentary flush				
Red	1 NO	---	black plastic	CP1-10R-10
Red	1 NC	---	black plastic	CP1-10R-01
Red	1 NC	---	chrome metal	CP1-30R-01
Red	1 NO + 1 NC	---	black plastic	CP1-10R-11
Green	1 NO	---	black plastic	CP1-10G-10
Green	1 NO	---	chrome metal	CP1-30G-10
Green	1 NO + 1 NC	---	black plastic	CP1-10G-11
Green	2 NO	---	black plastic	CP1-10G-20
Yellow	1 NO	---	black plastic	CP1-10Y-10
Blue	1 NO	---	black plastic	CP1-10L-10
Black	1 NO	---	black plastic	CP1-10B-10
Black	1 NO + 1 NC	---	black plastic	CP1-10B-11
Black	2 NO	---	black plastic	CP1-10B-20
Illuminated, momentary flush				
Red	1 NO	24V AC/DC	black plastic	CP1-11R-10
Green	1 NO	24V AC/DC	black plastic	CP1-11G-10
Green	1 NO	110-130V AC/DC	black plastic	CP1-12G-10



Compact, non-illuminated emergency stop pushbuttons



Diameter (mm)	Color	Release method	Contacts	Ordering code
30	Red	Twist release	1 NC	CE3T-10R-01
30	Red	Twist release	2 NC	CE3T-10R-02
30	Red	Twist release	1 NO + 1 NC	CE3T-10R-11
40	Red	Pull release	2 NC	CE4P-10R-02
40	Red	Pull release	1 NO + 1 NC	CE4P-10R-11
40	Red	Twist release	1 NC	CE4T-10R-01
40	Red	Twist release	2 NC	CE4T-10R-02
40	Red	Twist release	1 NO + 1 NC	CE4T-10R-11
40	Red	Key release, ronix 455, key 71	2 NC	CE4K1-10R-02
40	Red	Key release, ronix 455, key 71	1 NO + 1 NC	CE4K1-10R-11

Compact selector switch



Action	Color	Bezel	Contacts	Ordering code
2 position, short handle				
Maintained BC	black	black plastic	1 NO	C2SS1-10B-10
Maintained BC	black	black plastic	1 NO + 1 NC	C2SS1-10B-11
Maintained BC	black	black plastic	2 NO	C2SS1-10B-20
Maintained AC	black	black plastic	1 NO	C2SS2-10B-10
Maintained AC	black	black plastic	1 NO + 1 NC	C2SS2-10B-11
Maintained AC	black	black plastic	2 NO	C2SS2-10B-20
3 position, short handle				
Maintained ABC	black	black plastic	2 NO	C3SS1-10B-20
Momentary, spring return from A to B and C to B	black	black plastic	2 NO	C3SS2-10B-20
Momentary, spring return from A to B and C to B	black	chrome metal	2 NO	C3SS230B-20

Pilot Devices

Stocked 22mm - Compact range and accessories



Compact buzzer

Action	Illumination	Color	Voltage rating	Ordering code
Pulsation	non-illuminated	Red	24V AC/DC	CB1-610R
Continuous	illuminated	Black	24V AC/DC	CB1-620B
Continuous	illuminated	Black	110-130V AC	CB1-621B
Pulsation	illuminated	Black	24V AC/DC	CB1-630B
Pulsation	illuminated	Black	110-130V AC	CB1-631B



Compact LED pilot light

Color	Voltage rating	Ordering code
red	24V AC/DC	CL2-502R
green	24V AC/DC	CL2-502G
clear	24V AC/DC	CL2-502C
blue	24V AC/DC	CL2-502L
yellow	24V AC/DC	CL2-502Y
green	110-130V AC	CL2-513G
red	110-130V AC	CL2-513R
yellow	110-130V AC	CL2-513Y
green	110-130V DC	CL2-515G
red	110-130V DC	CL2-515R
yellow	110-130V DC	CL2-515Y
clear	230V AC	CL2-523C
green	230V AC	CL2-523G
red	230V AC	CL2-523R
yellow	230V AC	CL2-523Y


Accessories



Description	Ordering code
Chrome metal pushbutton bezel (compact)	KA1-8021
30mm adaptors for 22mm operator, black plastic (modular/compact)	KA1-8029
30mm adaptors for 22mm operator, chrome metal (modular/compact)	KA1-8030
Mounting tool for tightening the locking nut	MA1-8015

Pilot Devices

Stocked 22mm - Modular metal range



Modular Metal pushbuttons - 22mm

Description		Ordering code
Momentary flush pushbutton		
red		P9M-PNRG
green		P9M-PNVG
black		P9M-PNNG
blue		P9M-PNLG
yellow		P9M-PNGG
white		P9M-PN BG
Momentary extended pushbutton		
red		P9M-PNRS
green		P9M-PNVS
black		P9M-PNNS
white		P9M-PNBS
Momentary flush pushbutton - Illuminated		
red		P9M-PLRGD
green		P9M-PLVGD
blue		P9M-PLLGD
yellow		P9M-PLGGD
white		P9M-PLBGD
Momentary extended pushbutton - Illuminated		
red		P9M-PLRSD
green		P9M-PLVSD
white		P9M-PLBSD
orange		P9M-PLASD
Marked pushbuttons - momentary	Text	
green	START	P9M-PNVG202
red	STOP	P9M-PNRG201
blue	R	P9M-PNLG037
red	O	P9M-PNRG029
green	I	P9M-PNVG028
black	I	P9M-PNNG028
Mushroom pushbuttons - maintained	Operator size	
red	Ø 40 mm	P9M-EM4RN
green	Ø 40 mm	P9M-EM4VN
black	Ø 40 mm	P9M-EM4NN
Mushroom pushbuttons - momentary	Release method	
red	Ø 40 mm Twist release	P9M-ER4RN
Mushroom pushbuttons - maintained with key	Key code	
red	Key code 37	P9M-EC4RN37
Mushroom pushbuttons - momentary - Illuminated	Operator size	
red	Ø 40 mm -	P9M-EM4RL
Mushroom pushbuttons - maintained - Illuminated	Operator size	Release method
red	Ø 40 mm	Pull release
		P9M-ET4RL1

Pilot Devices


Stocked 22mm - Modular metal range



Pilot lights	
	Ordering code
clear	P9M-LID
green	P9M-LVD
blue	P9M-LLD
red	P9M-LRD
white	P9M-LBD
yellow	P9M-LGD
orange	P9M-LAD

Pilot Devices

Stocked 22mm - Modular metal accessories



Selector switches

Key-operated 2-position	Ordering code
Maintained BC	P9M-SCI0C01
Momentary BC	P9M-SCI5C01
Key-operated 3-position	
Maintained ABC	P9M-SCZ0T01
Momentary ABC, spring return from A to B and from C to B	P9M-SCZ3C01
2-position	
Maintained AC	P9M-SMD0N
Maintained BC	P9M-SMI0N
Momentary BC, spring return from C to B	P9M-SMI5N
3-position - short handle	
Maintained ABC	P9M-SMZ0N
Momentary ABC, spring return from A to B and from C to B	P9M-SMZ3N
Momentary ABC, spring return from C to B	P9M-SMZ5N

Contact blocks

Description	Ordering code
Single contact blocks - Faston Terminals	
1 NO	P9B-10FN
1 NC	P9B-01FN
Holders	
3-position	P9A-CFS3
5-position	P9A-CFS5
Single contact blocks for front mounting	
1 NO	P9B-10VN
1 NC	P9B-01VN
Single contact blocks with N.O. early make contacts and N.C. late break contacts	
1 NO	P9B-10VA
1 NC	P9B-01VR
Double contact blocks	
1 NO + 1 NC	P9B-11VN
2 NO	P9B-20VN
2 NC	P9B-02VN
Power Supply block for LED bulbs (BA9S)	
Full voltage - bulb not included IEC: BA9S max 380 V - 2 W UL - CSA: BA9S max 250 V - 2 W	P9P-DNV0
Power Supply block for LED bulbs (BA9S) - Faston Terminals	
Full voltage - bulb not included IEC: BA9S max 380 V - 2 W UL - CSA: BA9S max 250 V - 2 W	P9P-DNF0
Full voltage - bulb not included IEC: BA9S max 380 V - 2 W UL - CSA: BA9S max 250 V - 2 W	P9P-DNF0-AA



Pilot Devices

Stocked 22mm - Modular metal accessories

LED blocks for front mounting	Voltage	Ordering code
green	24V AC/DC	P9P-LNVDV
blue	24V AC/DC	P9P-LNVDL
red	24V AC/DC	P9P-LNVDR
white	24V AC/DC	P9P-LNVDB
yellow	24V AC/DC	P9P-LNVDG
green	120V AC	P9P-LNVJV
blue	120V AC	P9P-LNVJL
red	120V AC	P9P-LNVJR
white	120V AC	P9P-LNVJB
yellow	120V AC	P9P-LNVJG
green	230V AC	P9P-LNVNV
blue	230V AC	P9P-LNVNL
red	230V AC	P9P-LNVNR
white	230V AC	P9P-LNVNB
yellow	230V AC	P9P-LNVNG

Accessories

Protection cover	Ordering code
Protection cover padlockable for standard pushbuttons, illuminated pushbuttons, selector switches, illuminated selector switches	P9A-CRCL

Maintained accessory	Ordering code
Device for standard pushbuttons, illuminated pushbuttons: To be used only with contact blocks P9B01VN, P9B01VR, P9B10VA and P9B01FN	P9A-CDPP

Tools	Ordering code
Locking ring wrench	P9A-CWAF

Adapter ring	Ordering code
Adapter ring for 30 mm hole to mount P9 22 mm in a 30 mm hole	P9A-RAM32

Terminal adapter	Ordering code
PCB adapter for faston contacts	P9A-CA6

Rubber protective caps (IP66) for standard pushbuttons	Ordering code
--	---------------

Flush Pushbuttons	
Red	080CP-R
Green	080CP-V
Black	080CP-N
Clear	080CP-T
Extended pushbuttons	Ordering code
Clear	P9A-RCST



Modular pilot devices

Heavy duty 30mm



Heavy duty 30mm push buttons

Color	Cap type	Contacts	Ordering code
All caps colors included	Extended	1NO+1NC	A3PBE1-6007-91
Green	Extended	1NO+1NC	A3PBE1-600G-91
Red	Extended	1NO+1NC	A3PBE1-600R-91
All caps colors included	Flush	1NO+1NC	A3PBF1-6007-91
Black	Flush	1NO	A3PBF1-600B-10
Green	Flush	1NO+1NC	A3PBF1-600G-91
Blue	Flush	1NO+1NC	A3PBF1-600L-91
Red	Flush	1NO+1NC	A3PBF1-600R-91

Heavy duty 30mm illuminated push buttons

Color	Cap type	Lamp voltage	Contacts	Ordering code
Green	Extended	24V AC/DC	1NO+1NC	A3PLE1-6L2G-91
Amber	Extended	24V AC/DC	1NO+1NC	A3PLE1-6L2M-91
Red	Extended	24V AC/DC	1NO+1NC	A3PLE1-6L2R-91
Green	Extended	120V AC/DC	1NO+1NC	A3PLE1-6L4G-91
Blue	Extended	120V AC/DC	1NO+1NC	A3PLE1-6L4L-91
Amber	Extended	120V AC/DC	1NO+1NC	A3PLE1-6L4M-91
Red	Extended	120V AC/DC	1NO+1NC	A3PLE1-6L4R-91
Green	Extended	Transformer 120V AC	1NO+1NC	A3PLE1-6L5G-91
Amber	Extended	Transformer 120V AC	1NO+1NC	A3PLE1-6L5M-91
Red	Extended	Transformer 120V AC	1NO+1NC	A3PLE1-6L5R-91
Green	Extended	Transformer 240V AC	1NO+1NC	A3PLE1-6L6G-11
Amber	Extended	Transformer 240V AC	1NO+1NC	A3PLE1-6L6M-11

Heavy duty 30mm pilot lights

Color	Lamp type	Lamp voltage	Ordering code
Green	Full Voltage LED	24V AC/DC	A3L4AA-6L2G
Blue	Full Voltage LED	24V AC/DC	A3L4AA-6L2L
Amber	Full Voltage LED	24V AC/DC	A3L4AA-6L2M
Red	Full Voltage LED	24V AC/DC	A3L4AA-6L2R
White	Full Voltage LED	24V AC/DC	A3L4AA-6L2W
Green	Full Voltage LED	120V AC/DC	A3L4AA-6L4G
Amber	Full Voltage LED	120V AC/DC	A3L4AA-6L4M
Red	Full Voltage LED	120V AC/DC	A3L4AA-6L4R
White	Full Voltage LED	120V AC/DC	A3L4AA-6L4W
Green	Transformer LED	120V AC	A3L4AA-6L5G
Blue	Transformer LED	120V AC	A3L4AA-6L5L
Amber	Transformer LED	120V AC	A3L4AA-6L5M
Red	Transformer LED	120V AC	A3L4AA-6L5R
Green	Transformer LED	240V AC	A3L4AA-6L6G
Red	Transformer LED	240V AC	A3L4AA-6L6R
Red	Transformer LED	480V AC	A3L4AA-6L8R
Green	Full Voltage LED	6-24V AC/ DC	A3L4AA-6LLG
Red	Full Voltage LED	6-24V AC/ DC	A3L4AA-6LLR

Modular pilot devices

Heavy duty 30mm

Heavy duty 30mm momentary mushroom push buttons

Color	Mushroom size	Contacts	Ordering code
Black	44mm	1NO+1NC	A3PB41-600B-91
Green	44mm	1NO	A3PB41-600G-10
Red	44mm	1NC	A3PB41-600R-01
Red	44mm	1NO	A3PB41-600R-10
Yellow	44mm	1NO	A3PB41-600Y-10

Heavy duty 30mm maintained mushroom push buttons

Color	Mushroom Size	Release type	Contacts	Ordering code
Black	44mm	Pull release	1NO+1NC	A3PP42-600B-11
Red	44mm	Pull release	1NO+1NC	A3PP42-600R-11
Red	44mm	Twist release	1NO+1NC	A3PT4R-600R-91

Heavy duty 30mm illuminated momentary mushroom push buttons

Color	Mushroom size	Contacts	Ordering code
Red	44mm	1NO	A3PL41-6LBR-10

Heavy duty 30mm illuminated maintained mushroom push buttons

Color	Mushroom size	Release type	Lamp voltage	Contacts	Ordering code
Green	44mm	Pull release	24V AC/DC	1NO+1NC	A3PP42-6L2G-11
Red	44mm	Pull release	24V AC/DC	1NO+1NC	A3PP42-6L2R-91
Red	44mm	Pull release	Transformer 120V AC	1NO+1NC	A3PP42-6L5R-91
Red	44mm	Pull release	120V AC/DC	1NO+1NC	A3PP42-6L4R-91

Heavy duty 30mm selector switches

Lever Insert Color	Position	CAM type	Contacts	Ordering code
White	2 Position	A CAM	None	A3SSAA-6AAB-00
White	2 Position	A CAM	1NO+1NC	A3SSAA-6AAB-91
White	3 Position	C CAM	None	A3SSCA-6AAB-00
White	3 Position	C CAM	1NO+1NC	A3SSCA-6AAB-91
White	3 Position	C CAM	None	A3SSCB-6AAB-00

Modular pilot devices

Heavy duty 30mm

Heavy duty 30mm accessories | Contact Blocks

Description	Contacts	Ordering code
Contact block	1NC	A3XC01
Contact block	1NC LATE BREAK	A3XC0B
Contact block	1NO	A3XC10
Contact block	1NO+1NC	A3XC91
Contact block	1NO EXTRA LATE BREAK	A3XC0N

Heavy duty 30mm accessories | Caps

Color	Lamp type	Ordering code
Red	44mm Mushroom Pushbutton	A3XL4NR
Red	60mm Mushroom Pushbutton	A3XL6NR
Clear	Extended Pushbutton	A3XLELC
Green	Extended Pushbutton	A3XLELG
Blue	Extended Pushbutton	A3XLELL
Amber	Extended Pushbutton	A3XLELM
Red	Extended Pushbutton	A3XLELR
White	Extended Pushbutton	A3XLELW
All Caps Colors Included	Extended Pushbutton	A3XLENA
Green	Extended Pushbutton	A3XLENG
Red	Extended Pushbutton	A3XLENR
All Caps Colors Included	Flush Pushbutton	A3XLFNA
Green	Flush Pushbutton	A3XLFNG
Blue	Flush Pushbutton	A3XLFNL
Red	Flush Pushbutton	A3XLFNR
Yellow	Flush Pushbutton	A3XLFNY
Green	Kit Knob and Lens	A3XLKLG
Amber	Kit Knob and Lens	A3XLKLM
Red	Kit Knob and Lens	A3XLKLR
White	Kit Knob and Lens	A3XLKLW
Clear	Illuminated Lens	A3XLLLC
Green	Illuminated Lens	A3XLLLG
Amber	Illuminated Lens	A3XLLLM
Red	Illuminated Lens	A3XLLLR
White	Illuminated Lens	A3XLLLW
Red	44mm Metal Mushroom	A3XLMNR
Red	44mm Illuminated Metal Mushroom	A3XLMNR
Red	44mm Mushroom Twist Release	A3XLTNR

Heavy duty 30mm accessories | Lamp module

Color	Voltage	Ordering code
Red	Full Voltage 24V AC/DC	A3XMLLR
Yellow	Full Voltage 24V AC/DC	A3XMLLY
Green	Full Voltage 24-240V AC/DC	A3XMLUG
No Color	Full Voltage 120V AC	A3XMN4N
No Color	Transformer 240V AC	A3XMN6N
No Color	Transformer 277V AC	A3XMN7N
No Color	Transformer 480V AC	A3XMN8N

Modular pilot devices

Heavy duty 30mm

Heavy duty 30mm accessories | Lamps

Color	Voltage	Ordering code
Green	Full Voltage 24V AC/DC	A3XBL2G
Red	Full Voltage 24V AC/DC	A3XBL2R
Blue	Full Voltage 120V AC/DC	A3XBL4L
Red	Full Voltage 120V AC/DC	A3XBL4R
Yellow	Full Voltage 120V AC/DC	A3XBL4Y
White	Full Voltage 6V AC/DC	A3XBL6W

Heavy duty 30mm accessories | Key and boots

Description	Ordering code
501 Spare Key	A3XK501
Black Protective Boot	A3XLP0B
Clear Protective Boot	A3XLP0C

Nameplates

Description	Ordering code
STOP (RED)	CR104PXN1RP040
HAND OFF	CR104PXN1BP070
OFF ON	CR104PXN1BP057
START	CR104PXN1BP037

Enclosures

Description	Color	Holes	Ordering code
NEMA Type 1, 3, 3R, 12, 13	Painted Sheet Steel	3	CR104PEG13
NEMA Type 1, 3, 3R, 12, 13	Painted Sheet Steel	2	CR104PEG12
NEMA Type 1, 3, 3R, 12, 13	Painted Sheet Steel	1	CR104PEG11

Machine safety

Section 16

Machine safety

Table of contents

Safety relays	
Sentry safety relays	16-1
Safety programmable logic controllers	
Vital safety controller, Pluto programmable safety controller and accessories	16-3
Safety sensors and emergency stops	
Eden non-contact safety sensors	16-4
Smile and Inca emergency stops and reset buttons	16-4
EStrong Z heavy duty emergency stop	16-4
Safety control devices	
SafeBall two-handed control actuator	16-5
Three position enabling devices (JSHD4)	16-5
Locks, gate boxes and switches	
Magne process locks and accessories	16-6
MKEY RFID mechanical solenoid safety switches	16-6
MKey mechanical safety switches	16-7
Sense non-contact magnetic safety switch	16-7
Optical safety devices	
Orion safety light curtains and accessories	16-8
Rope pull switches	
LineStrong	16-9
Safety accessories	
DYNlink Tina adapters	16-10
Cables and connectors	16-11

Safety relays

Sentry safety relays



Sentry with screw and push-in terminals

Screw-in connectors

Type	Voltage	Timer	Safety Outputs	Expansion of safe outputs	Manual Reset	Two hand device	Safety Mats, Edges and Bumpers	Dual channel OSSD devices	Dual Channel with NO/NC contacts	Dual Channel with 2NC contacts	Single Channel	Ordering Code
BSR10	24 V DC		3 NO + 1 NC	•					1	•		2TLA010040R0000
BSR11	24 V DC		4 NO	•					1	•		2TLA010040R0200
BSR23	24 V DC		4 NO + 1 NC	•					•			2TLA010041R0600
SSR10	24 V DC		3 NO + 1 NC	•	•			•	•	•		2TLA010050R0000
SSR20	24 V DC		3 NO + 1 NC		•	•						2TLA010051R0000
SSR32	24 V DC	Off delay 0.5s	2 NO + 2 NO delayed	•				•	•	•		2TLA010052R0400
SSR42	24 V DC	Off delay 1.5s	2 NO + 2 NO delayed	•				•	•	•		2TLA010053R0400
SSR10M	³		3 NO + 1 NC	•	•				•			2TLA010050R0100
SSR20M	³		3 NO + 1 NC		•	•						2TLA010051R0100
TSR10	24 V DC	0 - 999s ²	3 NO + 1 NC	•				•	•	•		2TLA010060R0000
TSR20	24 V DC	Off delay 0.5/1.5s	3 NO + 1 NC	•				•	•	•		2TLA010061R0000
TSR20M	³	Off delay 0.5/1.5s	3 NO + 1 NC	•					•			2TLA010061R0100
USR10	24 V DC	0 - 999s ²	3 NO + 1 NC		•	•	•	•	•	•	•	2TLA010070R0000
USR22	24 V DC	0 - 999s ²	2 NO + 2 NO delayed		•	•	•	•	•	•	•	2TLA010070R0400

¹ No monitoring of two-channel fault, i.e max Category 3 without fault exclusion

² Off-delay, On-delay, Time bypass or Time reset. Configurable model with display

³ 85-265 V AC / 120-275 V DC

Safety relays

Sentry safety relays

Push-in connectors

Type	Voltage	Timer	Safety Outputs	Expansion of safe outputs	Manual Reset	Two hand device	Safety Mats, Edges and Bumpers	Dual channel OSSD devices	Dual Channel with NO/NC contacts	Dual Channel with 2NC contacts	Single Channel	Ordering Code
BSR10P	24 V DC		3 NO + 1 NC	•						1	•	2TLA010040R0001
BSR11P	24 V DC		4 NO	•						1	•	2TLA010040R0201
BSR23P	24 V DC		4 NO + 1 NC	•						•		2TLA010041R0601
SSR10P	24 V DC		3 NO + 1 NC	•	•			•		•	•	2TLA010050R0001
SSR20P	24 V DC		3 NO + 1 NC		•	•						2TLA010051R0001
SSR32P	24 V DC	Off delay 0.5s	2 NO + 2 NO delayed		•			•		•	•	2TLA010052R0401
SSR42P	24 V DC	Off delay 1.5s	2 NO + 2 NO delayed		•			•		•	•	2TLA010053R0401
SSR10MP	³		3 NO + 1 NC	•	•					•		2TLA010050R0101
SSR20MP	³		3 NO + 1 NC		•	•						2TLA010051R0101
TSR10P	24 V DC	0 - 999s ²	3 NO + 1 NC	•				•		•	•	2TLA010060R0001
TSR20P	24 V DC	Off delay 0.5/1.5s	3 NO + 1 NC	•				•		•	•	2TLA010061R0001
TSR20MP	³	Off delay 0.5/1.5s	3 NO + 1 NC	•						•		2TLA010061R0101
USR10P	24 V DC	0 - 999s ²	3 NO + 1 NC		•	•	•	•	•	•	•	2TLA010070R0001
USR22P	24 V DC	0 - 999s ²	2 NO + 2 NO delayed		•	•	•	•	•	•	•	2TLA010070R0401

¹ No monitoring of two-channel fault, i.e max Category 3 without fault exclusion

² Off-delay, On-delay, Time bypass or Time reset. Configurable model with display

³ 85-265 V AC / 120-275 V DC

Safety programmable logic controllers

Safety controllers and accessories



Vital 1

Vital safety controller

Type	DYNlink circuits	Maximum DYNlink devices	Safe outputs	Ordering Code
VITAL1	1	30	2 NO	2TLA020052R1000



Pluto B46 v2

Pluto programmable safety controller

Type	Style	Number of I/O	FailSafe inputs	FailSafe input or non-safe outputs	Safe Outputs	Ordering Code
S20 v2	Stand Alone	20	8	8	4	2TLA020070R4700
S46 v2	Stand Alone	46	24	16	6	2TLA020070R1800
B20 v2	Safety Bus	20	8	8	4	2TLA020070R4600
B22	Safety Bus	22	14	8	0	2TLA020070R4800
B46 v2	Safety Bus	46	24	16	6	2TLA020070R1700

Note: Pluto programmable safety controller SIL 3/Plc safety rated



Pluto and accessories

Pluto Programmable Safety Controller Accessories

Type	Description	Ordering Code
GATE-E1P	Gateway for 2-way communication between the Pluto Safety Bus and Ethernet/IP	2TLA020071R9000
IDFIX-R	Identifier, read only. For assigning Pluto an address on the Pluto Safety Bus	2TLA020070R2000
IDFIX-RW	Identifier, read / write. For assigning Pluto an address on the Pluto Safety Bus	2TLA020070R2100
IDFIX-PROG 10k	External memory, 10 kbyte. For projects with only one Pluto, store the PLC program	2TLA020070R2600
Programming Cable USB	Cable for connecting PC, USB port to Pluto for programming with Pluto Manager	2TLA020070R5800

Safety sensors and emergency stops



Adam DYN Info and
Eva General code



Smile 11EA Tina



Inca 1 Tina V2



Smile 41 EWWWP



EStrong Z with and
without LED

Eden non-contact safety sensors

Type	Description	Ordering Code
Adam DYN Info	M12-5 for single & series applications, for use in DYNlink circuits	2TLA020051R5100
Adam DYN Status	M12-5, StatusBus for use in DYNlink circuits(Use on Pluto Only)	2TLA020051R5200
Eva General Code	All coded the same code	2TLA020046R0800
Eva Unique Code	Unique coding to prevent bypassing	2TLA020046R0900
Adam OSSD Info M12-5	M12-5 for single sensor applications, for use with Safety Relays	2TLA020051R5400
Adam OSSD Info M12-8	M12-8 for single & series applications, for use with Safety Relays	2TLA020051R5700

Smile and Inca emergency stops and resets buttons

Type	Description	Ordering Code
Smile 11EA Tina	Emergency stop (red) in an enclosure, 1 x M12 5-pin male connector, for use in DYNlink circuits	2TLA030050R0000
Smile 12EA Tina	Emergency stop (red) in an enclosure, 1 x M12 5-pin male connector and 1 x M12 5-pin female connector, for use in DYNlink circuits	2TLA030050R0200
Inca 1 Tina V2	Emergency stop (red) button for panel mounting, 22.5 mm holes, status LED in button, terminal block with screw terminals, for use in DYNlink circuits	2TLA030054R0010
Smile 11 RA	Reset button in an enclosure, 1 button + LED with colored lens covers, 1 x M12 5-pin male connector. For use with Vital/Safety Relays	2TLA030053R0000
Smile 11 RB	Reset button in an enclosure, 1 button + LED with colored lens covers, 1 x M12 5-pin male connector. For use with Pluto	2TLA030053R0100
Smile 41 EWWWP	Smile 41 push-button box with an emergency stop (red), 3 push-buttons and kit of colored lens covers, for use with Pluto	2TLA030057R0100
Smile 11 EA	Emergency stop (red) in an enclosure, 2 x NC, Status LED, 1 x M12 5-pin male connector. For use with Safety Relays	2TLA030051R0000
Smile 12 EA	Emergency stop (red) in an enclosure, 2 x NC, Status LED, 1 x M12 5-pin male connector and 1 x M12 5-pin female connector. For use with Safety Relays	2TLA030051R0200
INCA 1	Emergency stop (red) button for panel mounting, 22.5 mm holes, 2 x NC, Status LED, terminal block with screw terminals . For use with Safety Relays	2TLA030054R0100
Accessory	Emergency stop sign 22.5mm	2TLA030054R0900


EStrong Z Heavy duty emergency stop - Dual channel

Type	Description	Ordering Code
EStrong Z	Emergency Stop with 2 NC/2 NO, 1/2 NPT threads, SS	2TLA050220R1020
EStrong Z	Emergency Stop with 2 NC/2 NO, 1/2 NPT threads, SS, 24VDC LED	2TLA050220R1222
Accessory	1/2 NPT 316 SS Cable Gland	2TLA050040R0001

Safety control devices



JSTD1 and JSMC5



JSTD25H

SafeBall two-handed control actuator

Type	Description	Ordering Code
JSTD1-A	1 NO and 1 NC independent switches, maximum load of 30 V DC - 2A resistive. IP67 protection, plastic body, 2 meters molded cable	2TLA020007R3000
JSTD1-B	1 NO and 1 NC independent switches, maximum load of 30 V DC - 2A resistive. IP67 protection, plastic body, 0.2 M wires x 4 for direct connection into an enclosure	2TLA020007R3100
JSTD1-E	2 NO independent switches, maximum load of 30 V DC - 2A resistive. IP67 protection, plastic body, 0.2 M wires x 4 for direct connection	2TLA020007R3400
JSTD25H	JSTD25H with JSTD1-B Safeballs pre-wired to a M12 8-pin connector with protective flanges for the Safeballs	2TLA020007R6300
JSMC7	JSM-C7, Suspension shelf for JSTD25F/H/K	2TLA020007R1200
JSMC5	Angled ball joint for installation of a Safeball on a table or a steel housing	2TLA020007R0900

JSHD4 modular enabling device

Step 1 - Select the desired handle from among the 5 standard handles



JSJD4-2

Type	Description	Ordering Code
JSJD4-1	Handle, no LEDs, no buttons	2TLA020006R2100
JSJD4-2	Handle with LEDs, front button, and top button	2TLA020006R2200
JSJD4-3	Handle with LEDs	2TLA020006R2300
JSJD4-4	Handle with LEDs and front button	2TLA020006R2400
JSJD4-5	Handle with LEDs and top button	2TLA020006R2500

Step 2 - Select the desired "Bottom assembly", double check which options are available for the Handle selected



AA, AJ



AB



AC, AD



AL

Type	Description	Ordering Code
AA	With cable gland, only for use with JSJD4-1	2TLA020005R1000
AB	With Cannon connection	2TLA020005R1100
AC	With M12 connection (5 poles), only for use with JSJD4-1	2TLA020005R1200
AD	With M12 connection (8 poles)	2TLA020005R1300
AJ	With cable gland and PCB with 16 screw connections	2TLA020005R1800
AK	with Cannon connection (for replacement of older JSJD4 assemblies)	2TLA020005R1900
AL	Bottom assembly cable gland and 16 screw connections, holder for Eva	2TLA020005R2000

Step 3 (optional) - Choose mounting and fastening hardware

JSM55 enabling
switch holder

Type	Description	Ordering Code
JSM55	Wall Bracket	2TLA040005R0500
JSM5B	JSM5B Wall Bracket for 2 key switches, for ex. MKEY 4/5	2TLA040005R0700
JSM54A	Wall bracket for Adam. Used with AL bottom part that has a holder for Eva	2TLA020205R2800
JSM50G	Bottom Plate for MKEY 4/5	2TLA020205R6300

Locks, gate boxes and switches



Magne 4

Magne process locks and accessories

Type	Description	Ordering Code
Magne 3X	Magne 3X, No Safety Sensor, M12-5	2TLA042022R2700
Magne 4 DYN-Info	Magne 4 with Eden DYNlink, 8 Pin M12 Connector	2TLA042022R3400
Magne 4 OSSD-Info	Magne 4 with Eden OSSD, 8 Pin M12 Connector	2TLA042022R4600
Magne 4 DYN Info 2	Magne 4 with Eden DYNlink, 8 Pin M12 Connector, separate lock and closed outputs	2TLA042022R3410
Anchor 32D	Anchor plate, center mounting	2TLA042023R0410
Anchor 32E	Anchor plate with permanent magnet, center mounting	2TLA042023R0420
JSM D24	Mounting kit for Eva for conventional door	2TLA042023R0300
JSMD21C	Mount kit for anchor plate, center mounting	2TLA042023R0510



MKEY RFID

MKEY RFID mechanical solenoid safety switches

Type	Description	Ordering Code
MKEY9RFQC	Mechanical Solenoid Safety Switch, M12 QC, OSSD outputs, 24 V solenoid, plastic, no key, power to unlock	2TLA050007R2602
MKEY8RFQC	Mechanical Solenoid Safety Switch, M12 QC, OSSD outputs, 24 V solenoid, Die Cast, no key, power to unlock	2TLA050011R2612
MKEY8ZRFQC	Mechanical Solenoid Safety Switch, M12 QC, OSSD outputs, 24 V solenoid, Stainless Steel, no key, power to unlock	2TLA050011R2622
MKEY10RFER	Mechanical Solenoid Safety Switch, M12 QC, OSSD outputs, 24 V solenoid, Die Cast, no key, power to unlock, Rear Release and mounting for 4 buttons	2TLA050012R0652
Accessory	Standard MKEY RFID	2TLA050040R0240
Accessory	Flexible MKEY RFID	2TLA050040R0241

Locks, gate boxes and switches



MKEY 4



MKEY 8 and 9

MKey mechanical safety switches

Type	Description	Ordering Code
MKEY 1	Mechanical Compact safety switch 1/2 NPT threads, 2NC/1NO Angle key	2TLA050021R1100
MKEY 4	Mechanical Safety Switch 1/2 NPT threads, 2NC /1NO, with standard key	2TLA050001R1100
MKEY 4+	Mechanical Safety Switch 1/2 NPT threads, 2NC /1NO, 40N, with standard key	2TLA050001R1101
MKEY 4	Mechanical Safety Switch 1/2 NPT threads, 2NC /1NO, SS Head, with standard key	2TLA050001R1110
MKEY 8	Mechanical Solenoid Safety Switch, 1/2 NPT threads, 2NC/1NO, 24 V solenoid, die cast, standard key, power to unlock	2TLA050011R1132
MKEY 8M	Mechanical Solenoid Safety Switch, 1/2 NPT threads, 2NC/1NO, 24 V solenoid, die cast, standard key, power to lock	2TLA050013R1132
MKEY 8ER	Mechanical Solenoid Safety Switch, 1/2 NPT threads, 2NC/1NO, 24 V solenoid, die cast, standard key, power to unlock, rear release	2TLA050015R1132
MKEY 8ERZ	Mechanical Solenoid Safety Switch, 1/2 NPT threads, 2NC/1NO, 24 V solenoid, stainless steel, standard key, power to unlock, rear release	2TLA050015R1122
MKEY 9	Mechanical Solenoid Safety Switch, 1/2 NPT threads, 2NC/1NO, 24 V solenoid, plastic, standard key, power to unlock	2TLA050007R1112
MKEY 9M	Mechanical Solenoid Safety Switch, 1/2 NPT threads, 2NC/1NO, 24 V solenoid, plastic, with standard key, power to lock	2TLA050009R1112
Accessory	Mkey 4,5,6,8,9 Flat Actuator	2TLA050040R0220
Accessory	Mkey 4,5,6,8,9 Std. Actuator	2TLA050040R0202
Accessory	Mkey 4,5,6,8,9 Met. Flex Key	2TLA050040R0203

Sense non-contact magnetic safety switch



Sense 7Z

Type	Description	Ordering Code
Sense 5Z	Stainless Steel body, 5m cable, 2NC/1NO LED, 24VDC, coded actuator	2TLA050054R5120
Sense 5Z QC	Stainless Steel body, M12 8 pin quick connect, 2NC/1NO LED, 24VDC, coded actuator	2TLA050054R2120
Sense 6	Plastic body, 5m cable, 2NC/1NO LED, 24VDC	2TLA050074R5100
Sense 6 QC	Plastic body, M12 8 pin quick connect, 5m cable, 2NC/1NO LED, 24VDC	2TLA050074R2100
Sense 7Z	Stainless Steel body, 5m cable, 2NC/1NO LED, 24VDC, coded actuator	2TLA050056R5120
Sense 7Z QC	Stainless Steel body, M12 8 pin quick connect, 2NC/1NO LED, 24VDC, coded actuator	2TLA050056R2120
Sense 8	Plastic body, 5m cable, 2NC/1NO LED, 24VDC	2TLA050076R5100
Sense 8 QC	Plastic body, M12 8 pin quick connect, 2NC/1NO LED, 24VDC	2TLA050076R2100

Optical safety devices

Orion safety light curtains and accessories



Orion 1 base

Orion 1 safety light curtain base model

Types	Description	Ordering Code
Orion 1-4-14-030-B	Light curtain (both transmitter and receiver) base model with built in reset and EDM, 14mm resolution and 300mm/11.8inch height	2TLA022300R0100
Orion 1-4-14-060-B	Light curtain (both transmitter and receiver) base model with built in reset and EDM, 14mm resolution and 600mm/23.6inch height	2TLA022300R0300
Orion 1-4-14-090-B	Light curtain (both transmitter and receiver) base model with built in reset and EDM, 14mm resolution and 900mm/35.5inch height	2TLA022300R0500
Orion 1-4-30-030-B	Light curtain (both transmitter and receiver) base model with built in reset and EDM, 30mm resolution and 300mm/11.8inch height	2TLA022302R0100
Orion 1-4-30-045-B	Light curtain (both transmitter and receiver) base model with built in reset and EDM, 30mm resolution and 450mm/17.7inch height	2TLA022302R0200
Orion 1-4-30-060-B	Light curtain (both transmitter and receiver) base model with built in reset and EDM, 30mm resolution and 600mm/23.6inch height	2TLA022302R0300
Orion 1-4-30-075-B	Light curtain (both transmitter and receiver) base model with built in reset and EDM, 30mm resolution and 750mm/29.5inch height	2TLA022302R0400
Orion 1-4-30-090-B	Light curtain (both transmitter and receiver) base model with built in reset and EDM, 30mm resolution and 900mm/35.4inch height	2TLA022302R0500
Orion 1-4-30-120-B	Light curtain (both transmitter and receiver) base model with built in reset and EDM, 30mm resolution and 1200mm/47.2inch height	2TLA022302R0700



Orion 2 base

Orion 2 safety light grid base model perimeter guarding

Type	Description	Ordering Code
Orion 2-4-K4-120-B	Light grid (both transmitter and receiver) base model with built in reset and EDM, 4 beam with 300mm beam spacing. 1200mm/47.2inch height	2TLA022304R0300

Orion accessories

Type	Description	Ordering Code
M12-CT01BA	Transfer cable, for use with Tina 10A and 10C, puts basic model light curtain in auto reset with no EDM	2TLA022315R3000
JSM-ORION03	JSM-03 Rotational bracket for Orion 1 Base	2TLA022310R0100

Note: see page 16-11 for a list of cables available

Rope pull switches

LineStrong



LineStrong 1



LineStrong 2



LineStrong 3L



Rope pull kit



Pulley galvanized

LineStrong rope pull switches

Type	Description	Ordering Code
LineStrong 1	Rope pull for up to 50m, 2NC/2NO with 1/2 NPT threads	2TLA050200R1030
LineStrong 1	Rope pull for up to 50m, 2NC/2NO with 1/2 NPT threads, with 24VDC LED	2TLA050200R1232
LineStrong 2	Rope pull for up to 80m, 2NC/2NO with 1/2 NPT threads	2TLA050202R1030
LineStrong 2	Rope pull for up to 80m, 2NC/2NO with 1/2 NPT threads, with 24VDC LED	2TLA050202R1232
LineStrong 3D	Rope pull for up to 200m, 2NC/2NO with 1/2 NPT threads, with 24VDC LED	2TLA050204R1232
LineStrong 3D	Rope pull for up to 200m, 2NC/2NO with 1/2 NPT threads, with 120VAC LED	2TLA050204R1233
LineStrong 3L	Rope pull for up to 100m, 2NC/2NO with 1/2 NPT threads, with 24VDC LED	2TLA050206R1232
LineStrong 3L	Rope pull for up to 100m, 2NC/2NO with 1/2 NPT threads, with 120VAC LED	2TLA050206R1233
LineStrong 3R	Rope pull for up to 100m, 2NC/2NO with 1/2 NPT threads, with 24VDC LED	2TLA050208R1232
LineStrong 3R	Rope pull for up to 100m, 2NC/2NO with 1/2 NPT threads, with 120VAC LED	2TLA050208R1233
Accessory	Emergency Stop Button	2TLA050211R0005
Accessory	10m stainless steel rope pull kit with Allen Key	2TLA050210R0120
Accessory	30m stainless steel rope pull kit with Allen Key	2TLA050210R0420
Accessory	50m stainless steel rope pull kit with Allen Key	2TLA050210R0520
Accessory	10m galvanized steel rope pull kit with Allen Key	2TLA050210R0130
Accessory	30m galvanized steel rope pull kit with Allen Key	2TLA050210R0430
Accessory	50m galvanized steel rope pull kit with Allen Key	2TLA050210R0530
Accessory	Flex Roller eyebolt with adjustment	2TLA858006R1300
Accessory	1/2 NPT Stainless Steel cable gland	2TLA050040R0001
Accessory	Rope tensioner, stainless steel	2TLA050210R4020
Accessory	Rope tensioner, galvanized steel	2TLA050210R4030
Accessory	Pulley galvanized steel	2TLA050210R6030
Accessory	Safety Spring, 220MM, Stainless Steel	2TLA050211R0004

Note: Order Estop buttons for LineStrong 1/2/3 separately

Safety accessories

DYNlink Tina adapters



Tina 2A/B



Tina 3A



Tina 7A



Tina 10A/B/C

DYNlink adapters for dual channel devices

Type	Description	Type of connection to the DYNlink loop	Type of safety device commonly connected to	Ordering Code
Tina 2A	Mounted directly on the device enclosure to an M20 cable entry	Via the device connection	Devices with positively driven force-guided contacts like E-Stop buttons and key switches	2TLA020054R0100
Tina 2B	Placed inside the safety device enclosure			2TLA020054R1100
Tina 3A	Mounted directly on the device enclosure to an M20 cable entry	M12-5 male connector		2TLA020054R0200
Tina 3Aps	Two circuits and with supply voltage for a safety sensor. Connects to an M20 cable entry	M12-5 male connector with extra conductor for the supply of the safety device		2TLA020054R1400
Tina 7A	Mounted on a DIN rail in the electrical cabinet. Note that the connected safety device(s) must be mounted in the same cabinet	Removable terminal blocks		2TLA020054R0700
Tina 10A v2	Adaptation of OSSD to DYNlink. Two M12 connectors	M12-5 male connector	Devices with OSSD outputs like Orion light guards	2TLA020054R1210
Tina 10B v2	Adaptation of OSSD to DYNlink, for local reset, Three M12 connectors	M12-5 male connector		2TLA020054R1310
Tina 10C v2	Adaptation of OSSD to DYNlink with possibility to power the transmitter. Three M12 connectors	M12-5 male connector		2TLA020054R1610

Connection blocks for serial connection of DYNlink devices (or devices with Tina adapter)



Tina 4A

Type	Description	Ordering Code
Tina 4A	Connection block for the serial connection of up to 4 DYNlink devices with M12-5 connectors	2TLA020054R0300
Tina 8A	Connection block for the serial connection of up to 8 DYNlink devices with M12-5 connectors	2TLA020054R0500
Tina 11A	Connection block for the serial connection of up to 2 DYNlink devices with M12-5 connectors	2TLA020054R1700

Tina 1A is used to complete the serial connection on a Tina 4/8A safety port block



Tina 1A

Type	Description	Ordering Code
Tina 1A	Tina 1A is a blind plug connected to the unused M12 connectors of the connection blocks Tina 4A and Tina 8A	2TLA020054R0000

Safety accessories

Cables and connectors



Cables

Type	Description	Ordering Code
M12-C61	6m shielded cable Single Ended with M12 5 pin female connector	2TLA020056R0000
M12-C101	10m shielded cable Single Ended with M12 5 pin female connector	2TLA020056R1000
M12-C201	20m shielded cable Single Ended with M12 5 pin female connector	2TLA020056R1400
M12-C112	1m shielded cable Double Ended with M12 5 pin female connector and M12 5 pin male connector	2TLA020056R2000
M12-C312	3m shielded cable Double Ended with M12 5 pin female connector and M12 5 pin male connector	2TLA020056R2100
M12-C612	6m shielded cable Double Ended with M12 5 pin female connector and M12 5 pin male connector	2TLA020056R2200
M12-C1012	10m shielded cable Double Ended with M12 5 pin female connector and M12 5 pin male connector	2TLA020056R2300
M12-C2012	20m shielded cable Double Ended with M12 5 pin female connector and M12 5 pin male connector	2TLA020056R2400
M12-C63	6m shielded cable Single Ended with M12 8 pin female connector	2TLA020056R3000
M12-C103	10m shielded cable Single Ended with M12 8 pin female connector	2TLA020056R4000
M12-C203	20m shielded cable Single Ended with M12 8 pin female connector	2TLA020056R4100
M12-C134	1m shielded cable Double Ended with M12 8 pin female connector and M12 8 pin male connector	2TLA020056R5000
M12-C334	3m shielded cable Double Ended with M12 8 pin female connector and M12 8 pin male connector	2TLA020056R5100



Field wirable M12 5 pin

Field wirable connectors

Type	Description	Ordering Code
M12-C01	Field wirable M12 5 pin female with screw terminals	2TLA020055R1000
M12-C02	Field wirable M12 5 pin male with screw terminals	2TLA020055R1100



5 pin series Y-connector

Y-connectors

Type	Description	Ordering Code
M12-3A	5 pin series Y-connector for DYNlink devices	2TLA020055R0000
M12-3S	5 pin series Y-connector that supports DYNlink devices with StatusBus, Pluto Only	2TLA020055R0600
M12-3H	Series Y-connector for Adam OSSD 8 pin devices	2TLA020055R0800



ABB Inc.

305 Gregson Drive
Cary, NC 27511

electrification.us.abb.com

Technical support:

1-888-385-1221, option 1
eppc.support@us.abb.com