



Wallplates & Covers

R

Traditional	R-2
Decora®	R-11
Combination	R-16
Special Purpose	R-22
Adapters and Accessories	R-23
Connectivity Device Plates	R-25
Weatherproof Covers	R-26
FS/FD Mount Weatherproof Covers	R-31



Traditional Wallplates

Familiar and functional, Leviton traditional wallplates are designed for use with traditional Leviton devices. They represent styles and form factors that have stood the test of time. Their clean lines work in virtually any location, whether in new or retrofit construction, and they install quickly and easily. Leviton offers traditional wallplates in a vast array of colors and configurations.

Sample Traditional Wallplates



Features and Benefits

All Leviton Wallplates

- Easy to clean, smooth finish
- Non-combustible
- Color-matched metal mounting screws supplied
- UL Listed and CSA Certified
- Conforms to NEMA and ANSI standards
- Backed by a limited 10-year warranty (except thermoset wallplates)

Thermoset (Plastic) Wallplates (Residential Grade)

- Designed for high dielectric strength and arc resistance
- Meets or exceeds UL 514 testing requirements
- Resistant to fading, discoloration, grease, oil, organic solvents, moisture and scratches
- Backed by a limited 2-year warranty

Thermoplastic (Nylon) Wallplates (Residential/Commercial Grade)

- Molded thermoplastic for maximum resistance to impact, abrasion, fading and discoloration
- Resistant to mechanical stress associated with high abuse applications

Metal Wallplates (Commercial Grade)

- Rounded edges to prevent injury and wall damage
- Deluxe stainless steel is non-magnetic Type 302, .032" thick — brushed finish
- Standard stainless steel Type 430, .032" thick, also available — brushed finish
- Brass is 70/30 alloy 260, .040" thick — polished or brushed finish

Antimicrobial

- All antimicrobial devices use silver ions (Ag+) as the antimicrobial agent in the product material
- Antimicrobial material has been tested to show a consistent {3 log (>99.9%)} microbial reduction rate against a broad range of bacteria pursuant to the JIS Z 2801:2000 test protocol

Color Choices

Traditional wallplates are offered in a wide range of colors and finishes. To order colors, add suffix to Cat. No.



White
(-W)



Ivory
(-I)



Light Almond
(-T)



Gray
(-G/-GY)



Black
(-E)



Brown
(-/-B)



Blue
(-B)



Orange
(-O)



Red
(-R)



Brushed
Brass



Polished
Brass
(-PB)



Satin-Finish
Stainless
Steel



Aluminum



Chrome

Toggle

Features and Benefits

- Accent any wall covering with a wide selection of colors and finishes
- Mounting screws on one-gang thermoplastic (nylon) are preinstalled and captive
- Smooth face and rounded edges resist dust accumulation
- Available in a wide selection of materials, sizes and colors to complement any wall color or covering.

C-Series Stainless Steel Wallplates

- Smooth contours provide a modern, clean aesthetic
- Type 430 Stainless Steel (magnetic) for general commercial use and good corrosion resistance in indoor applications
- Type 302/304 (non-magnetic) Stainless Steel for superior chemical and corrosion resistance and harsh indoor or outdoor environments

Midway and Oversize

- **Midway wallplates** can be used to hide wall surface irregularities and are a full 0.375" taller and wider than standard wallplates
- **Oversize wallplates** can be used to hide greater wall surface irregularities and are a full 0.75" taller and wider than standard wallplates

Plastic, Nylon and Metal

Description	Color	Thermoset (Plastic)			Thermoplastic (Nylon)		Metal			
		Cat. No. STANDARD	Cat. No. MIDWAY	Cat. No. OVERSIZE	Cat. No. STANDARD	Cat. No. MIDWAY	Material Type	Cat. No. STANDARD	Cat. No. MIDWAY	Cat. No. OVERSIZE
1-Gang 	White	88001	80501-W	88101	80701-W	PJ1-W	Chrome	1901	—	—
	Ivory	86001	80501-I	86101	80701-I	PJ1-I	Aluminum	83001	—	—
	Lt. Almond	78001	80501-T	78101-T	80701-T	PJ1-T	Brass	81001	—	—
	Gray	87001	—	—	80701-GY	PJ1-GY	Polished Brass	81001-PB	—	—
	Black	—	—	—	80701-E	PJ1-E	Stainless Steel	84001	—	84101
	Brown	85001	80501	85101	80701	PJ1	C-Series 430 S/S	SL1	SLJ1-C	—
	Red	—	—	—	80701-R	PJ1-R	C-Series 302/304 S/S	SS1-40	SSJ1-C40	—
2-Gang 	White	88009	80509-W	88109	80709-W	PJ2-W	Chrome	1909	—	—
	Ivory	86009	80509-I	86109	80709-I	PJ2-I	Aluminum	83009	—	—
	Lt. Almond	78009	80509-T	78109-T	80709-T	PJ2-T	Brass	81009	—	—
	Gray	87009	—	—	80709-GY	PJ2-GY	Polished Brass	81009-PB	—	—
	Black	—	—	—	80709-E	PJ2-E	Stainless Steel	84009	—	—
	Brown	85009	80509	85109	80709	—	C-Series 430 S/S	SL2	SLJ2-C	—
	Red	—	—	—	80709-R	—	C-Series 302/304 S/S	SS2-40	SSJ2-C40	—
3-Gang 	White	88011	80511-W	88111	80711-W	PJ3-W	Aluminum	83011	—	—
	Ivory	86011	80511-I	86111	80711-I	PJ3-I	Brass	81011	—	—
	Lt. Almond	78011	80511-T	—	80711-T	PJ3-T	Polished Brass	81011-PB	—	—
	Gray	87011	—	—	80711-GY	—	Stainless Steel	84011	—	—
	Black	—	—	—	80711-E	PJ3-E	C-Series 430 S/S	SL3	—	—
	Brown	85011	80511	—	80711	PJ3	C-Series 302/304 S/S	SS3-40	—	—
	Red	—	—	—	80711-R	—	Non-Magnetic S/S	84011-40	SSJ3-40	84111-40
4-Gang 	White	88012	80512-W	—	80712-W	PJ4-W	Aluminum	83012	—	—
	Ivory	86012	80512-I	—	80712-I	PJ4-I	Brass	81012	—	—
	Lt. Almond	78012	80512-T	—	80712-T	PJ4-T	Polished Brass	81012-PB	—	—
	Gray	87012	—	—	80712-GY	—	Stainless Steel	84012	—	—
	Black	—	—	—	80712-E	—	Non-Magnetic S/S	84012-40	—	84112-40
	Brown	85012	80512	—	—	—	—	—	—	—
	Red	—	—	—	—	—	—	—	—	—

*Stainless Steel (Clear) — please contact customer service for other configurations and colors

Continued on next page



Related Products

Find the right antimicrobial switch for your antimicrobial wallplate.

See page B-10 and in the Switches & Motor Control section for more information.

Traditional Wallplates





Toggle



Continued from previous page

Toggle


Plastic, Nylon and Metal

Description	Color	Thermoset (Plastic)			Thermoplastic (Nylon)		Metal			
		Cat. No. STANDARD	Cat. No. MIDWAY	Cat. No. OVERSIZE	Cat. No. STANDARD	Cat. No. MIDWAY	Material Type	Cat. No. STANDARD	Cat. No. MIDWAY	Cat. No. OVERSIZE
5-Gang 	White	88023	—	—	80723-W	—	Brass	81023	—	—
	Ivory	86023	—	—	80723-I	—	Polished Brass	81023-PB	—	—
	Lt. Almond	78023	—	—	—	—	Non-Magnetic S/S	84023-40	—	—
	Brown	85023	—	—	—	—				
6-Gang 	White	88036	—	—	80736-W	—	Brass	81036	—	—
	Ivory	86036	—	—	80736-I	—	Polished Brass	84036-40	—	—
	Lt. Almond	78036	—	—	—	—	Non-Magnetic S/S			
	Brown	85036	—	—	—	—				
7-Gang 	White	S601-W*	—	—	—	—	Non-Magnetic S/S	84070-40	—	—
8-Gang 	White	S602-W*	—	—	—	—	Non-Magnetic S/S	84048-40	—	—
9-Gang 	White	S603-W*	—	—	—	—	Non-Magnetic S/S	84049-40	—	—
10-Gang 	White	S604-W*	—	—	—	—	Non-Magnetic S/S	84050-40	—	—

*Painted metal wallplates


Dimensions for Standard, Midway and Oversize — Single Gang

Standard Size Single-Gang




Note: Add 1.81" (46.0mm) for each additional gang.

Midway Size Single-Gang

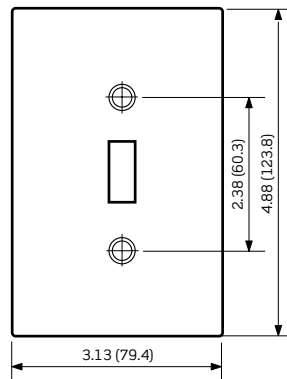

Note: Add 1.81" (46.0mm) for each additional gang. Midway wallplates can be mounted onto larger-volume outlet boxes and/or used to hide wall irregularities. Midway wallplates are a full 0.375" taller and wider than standard size wallplates.

Oversize Size Single-Gang

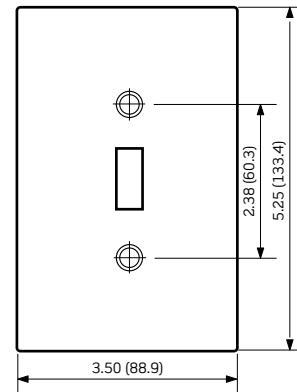



Note: Add 1.81" (46.0mm) for each additional gang. Oversized wallplates are used to conceal greater wall irregularities than those hidden by Midway wallplates. Oversized wallplates are a full 0.75" taller and wider than standard size wallplates.

Lockable Enclosures and Wallplates

Description	Mounting	Cat. No.	
Type 1 Steel Enclosure without Switch for 30A Motor Starters	Vertical	N13NC	
Lockout Wallplate (lock sold separately) Non-Magnetic S/S	Vertical	84001-LOK	
Switch Lockout Bracket	Vertical	LKOUT-40	

Duplex Receptacle

Plastic, Nylon and Metal

Description	Color	Thermoset (Plastic)			Thermoplastic (Nylon)		Metal			
		Cat. No. STANDARD	Cat. No. MIDWAY	Cat. No. OVERSIZE	Cat. No. STANDARD	Cat. No. MIDWAY	Material Type	Cat. No. STANDARD	Cat. No. MIDWAY	Cat. No. OVERSIZE
1-Gang 	White	88003	80503-W	88103	80703-W	PJ8-W	Chrome	—	—	—
	Ivory	86003	80503-I	86103	80703-I	PJ8-I	Aluminum	83003	—	—
	Lt. Almond	78003	80503-T	78103-T	80703-NT	PJ8-T	Brass	81003	—	—
	Gray	87003	—	—	80703-GY	PJ8-GY	Polished Brass	81003-PB	—	—
	Black	—	—	—	80703-E	PJ8-E	Stainless Steel	84003	—	84103
	Brown	85003	80503	85103	80703	PJ8	C-Series 430 S/S	SL8	SLJ8-C	—
	Red	—	—	—	80703-R	PJ8-R	C-Series 302/304 S/S	SS8-40	SSJ8-C40	—
	Blue	—	—	—	80703-BU	PJ8-BU	Non-Magnetic S/S	84003-40	SSJ8-40	84103-40
	Orange	—	—	—	80703-ORG	—				
2-Gang 	White	88016	80516-W	88116	80716-W	PJ82-W	Aluminum	83016	—	—
	Ivory	86016	80516-I	86116	80716-I	PJ82-I	Brass	81016	—	—
	Lt. Almond	78016	80516-T	78116-T	80716-T	PJ82-T	Stainless Steel	84016	—	84116
	Gray	87016	—	—	80716-GY	PJ82-GY	C-Series 430 S/S	SL82	SLJ32-C	—
	Black	—	—	—	80716-E	PJ82-E	C-Series 302/304 S/S	SS82-40	SSJ32-C40	—
	Brown	85016	80516	85116	80716	PJ82	Non-Magnetic S/S	84016-40	SSJ82-40	84116-40
	Red	—	—	—	80716-R	PJ82-R				
	Blue	—	—	—	80716-BU	—				
	Orange	—	—	—	80716-ORG	—				
3-Gang 	White	88030	—	—	80730-W	—	Non-Magnetic S/S	84030-40	SSJ83-40	84130-40
	Ivory	86030	—	—	80730-I	—				
	Lt. Almond	78030	—	—	—	—				
	Gray	—	—	—	80730-GY	—				
	Brown	85030	—	—	—	—				
	Red	—	—	—	80730-R	—				
4-Gang 	White	88041	—	—	—	—	Non-Magnetic S/S	84041-40	—	—
	Ivory	86041	—	—	—	—				
	Brown	85041	—	—	—	—				
5-Gang 							Non-Magnetic S/S	84055-40	—	—
6-Gang 							Non-Magnetic S/S	84056-40	—	—

Traditional Wallplates

Single Receptacle | Telephone or Cable Outlet



Single Receptacle

15A and 20A Straight Blade and 15A Locking (1.406" Diameter Hole)

Plastic, Nylon and Metal  										
		Thermoset (Plastic)			Thermoplastic (Nylon)		Metal			
Description	Color	Cat. No. STANDARD	Cat. No. MIDWAY	Cat. No. OVERSIZE	Cat. No. STANDARD	Cat. No. MIDWAY	Material Type	Cat. No. STANDARD	Cat. No. MIDWAY	Cat. No. OVERSIZE
1-Gang 	White	88004	80504-W	—	80704-W	PJ7-W	Aluminum	83004	—	—
	Ivory	86004	80504-I	—	80704-I	PJ7-I	Brass	81004	—	—
	Lt. Almond	78004	80504-T	—	80704-T	PJ7-T	C-Series 430 S/S	SL7	—	—
	Gray	—	—	—	80704-GY	—	C-Series 302/304 S/S	SS7-40	—	—
	Black	—	—	—	80704-E	—	Non-Magnetic S/S	84004-40	SSJ7-40	84104-40
	Brown	85004	80504	—	80704	—				
	Red	—	—	—	80704-R	PJ7-R				
	Orange	—	—	—	80704-ORG	—				
2-Gang 	White	88052	—	—	—	—	Non-Magnetic S/S	84052-40	—	—
	Ivory	86052	—	—	—	—				
	Brown	85052	—	—	—	—				
3-Gang 							Non-Magnetic S/S	S73-N	—	—

Telephone or Cable Outlet — Box Mounted

Plastic, Nylon and Metal  							
		Thermoset (Plastic)		Thermoplastic (Nylon)	Metal		
Description	Color	Cat. No. STANDARD	Cat. No. MIDWAY	Cat. No. MIDWAY	Material Type	Cat. No. STANDARD	Cat. No. MIDWAY
1-Gang Phone/Cable .312" dia. hole , with knock out to enlarge hole to .625" 	White	—	80513-W	—	Aluminum	83013	—
	Ivory	—	80513-I	—	Brass	81013	—
	Lt. Almond	—	80513-T	—	Polished Brass	81013-PB	—
					Stainless Steel	84013	—
1-Gang Phone/Cable .406" dia. hole 	White	88013	—	—	Non-Magnetic S/S	84061-40	—
	Ivory	86013	—	—			
	Lt. Almond	78013	—	—			
	Gray	—	—	—			
	Black	—	—	—			
	Brown	85013	—	—			
1-Gang Phone/Cable .625" dia. hole 	White	88017	—	—	Brass	81017	—
	Ivory	86017	—	—	Non-Magnetic S/S	84017-40	—
	Lt. Almond	78017-T	—	—			
2-Gang Phone/Cable .406" dia. hole 	White	88062	—	—	Non-Magnetic S/S	84062-40	—
	Ivory	86062	—	—			

Telephone or Cable Outlet — Strap Mounted


Plastic, Nylon and Metal  								
		Thermoset (Plastic)*		Thermoplastic (Nylon)*		Metal		
Description	Color	Cat. No. STANDARD	Cat. No. OVERSIZE	Cat. No. STANDARD	Cat. No. MIDWAY	Material Type	Cat. No. STANDARD	Cat. No. MIDWAY
1-Gang Phone/Cable .406" dia. hole , with knock out to enlarge hole to .625" 	White	88018	—	80718-W	PJ11-W			
	Ivory	86018	—	80718-I	PJ11-I			
	Light Almond	—	—	—	PJ11-T			
	Gray	—	—	80718-GY	PJ11-GY			
	Black	—	—	80718-E	PJ11-E			
	Brown	85018	—	80718	PJ11			
1-Gang Phone/Cable .406" dia. hole 	White	—	88113	—	—	Non-Magnetic S/S	84018-40	SSJ11-40
	Ivory	—	86113	—	—			
	Gray	—	—	—	—			
	Black	—	—	—	—			
	Brown	—	—	—	—			
1-Gang Phone/Cable .625" dia. hole 	White	88037	—	—	—	Non-Magnetic S/S	84037-40	84137-40

* Mounting strap included

Wallplate for Keylock Switches (1221-2kl series)

Type 302 Stainless Steel Wallplate w/Tamper-Resistant Screws and Spanner Tool  

Description	Color	Cat. No.
1-Gang	S/S	84071-40
2-Gang	S/S	84072-40
3-Gang	S/S	84073-40



84071-40

Blanks — Box Mounted

Plastic, Nylon and Metal

Description	Color	Thermoset (Plastic)			Thermoplastic (Nylon)		Metal			
		Cat. No. STANDARD	Cat. No. MIDWAY	Cat. No. OVERSIZE	Cat. No. STANDARD	Cat. No. MIDWAY	Material Type	Cat. No. STANDARD	Cat. No. MIDWAY	Cat. No. OVERSIZE
1-Gang 	White	88014	80514-W	88114	80714-W	PJ13-W	Aluminum	83014	—	—
	Ivory	86014	80514-I	86114	80714-I	PJ13-I	Aluminum w Gasket	83014-EXT	—	—
	Lt. Almond	78014	80514-T	—	80714-T	PJ13-T	Brass	81014	—	—
	Gray	87014	—	—	80714-GY	PJ13-GY	Stainless Steel	84014	—	84114
	Black	—	—	—	80714-E	PJ13-E	C-Series 430 S/S	SL13	SLJ13-C	—
	Brown	85014	80514	85114	80714	PJ13	C-Series 302/304 S/S	SS13-40	SSJ13-C40	—
	Red	—	—	—	80714-R	PJ13-R	Non-Magnetic S/S	84014-40	SSJ13-40	84114-40
2-Gang 	White	88025	80525-W	—	80725-W	PJ23-W	Aluminum w Gasket	83025-EXT	—	—
	Ivory	86025	80525-I	—	80725-I	PJ23-I	Brass	81025	—	—
	Lt. Almond	78025	80525-T	—	80725-T	PJ23-T	Polished Brass	81025-PB	—	—
	Gray	87025	—	—	80725-GY	PJ23-GY	Stainless Steel	84025	—	—
	Black	—	—	—	80725-E	PJ23-E	C-Series 430 S/S	SL23	SLJ23-C	—
	Brown	85025	80525	—	80725	—	C-Series 302/304 S/S	SS23-40	SSJ23-C40	—
							Non-Magnetic S/S	84025-40	—	84125-40
3-Gang 	White	88033	80533-W	—	80735-W	PJ33-W	C-Series 430 S/S	SL33	—	—
	Ivory	86033	80533-I	—	80735-I	PJ33-I	C-Series 302/304 S/S	SS33-40	—	—
	Gray	—	—	—	80735-GY	—	Non-Magnetic S/S	84033-40	—	84133-40
	Black	—	—	—	80735-E	—				
	Brown	85033	—	—	—	—				
4-Gang 	White	88064	—	—	—	—	Stainless Steel	84064	—	—
	Ivory	86064	—	—	—	—	Non-Magnetic S/S	84064-40	—	—
	Brown	85064	—	—	—	—				
5-Gang 							Non-Magnetic S/S	84065-40	—	—
6-Gang 							Non-Magnetic S/S	84066-40	—	—
7-Gang 							Non-Magnetic S/S	84067-40	—	—
8-Gang 							Non-Magnetic S/S	84068-40	—	—

Blanks — Strap Mounted

Plastic, Nylon and Metal  							
		Thermoset (Plastic)		Thermoplastic (Nylon)	Metal		
Description	Color	Cat. No. STANDARD	Cat. No. OVERSIZE	Cat. No. STANDARD	Material Type	Cat. No. STANDARD	Cat. No. OVERSIZE
1-Gang 	White	88019	—	80719-W	Stainless Steel Non-Magnetic S/S	84019	—
	Ivory	86019	—	80719-I		84019-40	84119-40
	Gray	—	—	80719-GY			
	Black	—	—	80719-E			
	Brown	85019	—	—			
	Red	—	—	80719-R			
2-Gang 	White	88034	—	80734-W	Non-Magnetic S/S	84034-40	84134-40
	Ivory	86034	—	80734-I			
	Black	—	—	80734-E			
	Red	—	—	80734-R			
3-Gang 	White	88035	—	—	Non-Magnetic S/S	84035-40	—
	Ivory	86035	—	—			
4-Gang 	White	88057	—	—	Non-Magnetic S/S	84057-40	—
	Ivory	86057	—	—			

Power Outlet Receptacles

Plastic, Nylon and Metal — 1-Gang  							
		Thermoset (Plastic)		Thermoplastic (Nylon)		Metal	
Description	Color	Cat. No. STANDARD	Cat. No. MIDWAY	Cat. No. STANDARD	Cat. No. MIDWAY	Material Type	Cat. No. STANDARD
20A and 30A Locking Receptacle, 1.60" dia. hole 	White	—	—	80720-W	—	C-Series 430 S/S C-Series 302/304 S/S Non-Magnetic S/S	SL721
	Ivory	—	—	80720-I	—		SS721-40
	Gray	—	—	80720-GY	—		84020-40
	Black	—	—	80720-E	—		
	Brown	—	—	80720	—		
	Red	—	—	80720-R	—		
30A and 50A Receptacle, 2.15" dia. hole 	White	—	80528-W	—	80728-W	Aluminum Brass Finish Steel Gray Painted Steel Stainless Steel C-Series 430 S/S C-Series 302/304 S/S	83028
	Ivory	—	80528-I	—	80728-I		4928
	Gray	—	—	—	80728-GY		4927
	Black	—	80528-BLK	—	80728-E		84028
	Brown	—	—	—	80728		SL723
							SS723-40

Note: Use with 278, 279, 5206, 5207, 5371, 5372, 5374

Continued on next page

Traditional Wallplates

Power Outlet Receptacles



Continued from previous page

Power Outlet Receptacles

Standard Size Plastic, Nylon and Metal — 2-Gang

		Thermoset (Plastic)		Thermoplastic (Nylon)	Metal	
Description	Color	Cat. No.	Cat. No.	Cat. No.	Material Type	Cat. No.
	30A and 50A Receptacle, 2.15" dia. hole	White	80526-W	80726-W	Aluminum	83026
		Ivory	80526-I	80726-I	Gray Painted Steel	4934
		Lt. Almond	80526-T	—	Stainless Steel	84026
		Black	80526-BLK	—	C-Series 430 S/S	SL703
		Brown	—	80726	C-Series 302/304 S/S	SS703-40
	30A and 50A Receptacle, 2.465" dia. hole	White	80530-W	—	Gray Painted Steel	S701-GY
		Ivory	80530-I	—	C-Series 430 S/S	SL701
		Lt. Almond	80530-T	—	C-Series 302/304 S/S	SS701-40
		Black	80530-BLK	—	Non-Magnetic S/S	S701-40
	30A and 50A Receptacle, 2.15" dia. hole offset				Stainless Steel	84022

Note: Use with 278, 279, 5206, 5207, 5371, 5372, 5374

Standard Size Metal — 2-Gang with Centered Opening

		Metal	
Description		Material Type	Cat. No.
	1-Decora®	Non-Magnetic S/S	S746-N
	1-Toggle	Brass Non-Magnetic S/S	81040 84040-40
	1-Duplex	C-Series 430 S/S C-Series 302/304 S/S Non-Magnetic S/S	SL748 SS748-40 84039-40
	1-Outlet 1.406" dia. hole	Non-Magnetic S/S	84092-40

Standard Size Louvre

		Painted Steel	Metal	
Description	Color	Cat. No.	Material Type	Cat. No.
	White	88079	Brass Non-Magnetic S/S	81079 84079-40
	White	88080	Brass Non-Magnetic S/S	81080 84080-40
			Non-Magnetic S/S	84081-40

Decora® and Decora Plus™ Wallplates

Leviton Decora Plus™ and Decora® Designer Wallplates — available in a wide spectrum of colors and styles — can add subtle elegance to any home. You can go modern with Decora Plus™ screwless, snap-on wallplates, which install fast and flawlessly. Sleek, versatile and convenient, they now come in a midway size that gives even greater coverage, and can hide unsightly wall surface irregularities. All Leviton decorative wallplates can stand up to heavy use while coordinating perfectly with paint or wallcoverings. Think of them as the finishing touch to giving a home its signature look.

Sample Decora® & Decora Plus™



Color Choices Decora® and Decora Plus™ wallplates are offered in a wide range of colors and finishes. To order colors, add suffix to Cat. No.

									
White (-W)	Ivory (-I)	Light Almond (-T)	Gray (-G/-GY)	Black (-E)	Brown (-/-B)	Blue (-NB)	Orange (-O)	Red (-R)	Brushed Brass
									
Polished Brass (-PB)	Satin-Finish Stainless Steel	Aluminum							

Decora® and Decora Plus™ Wallplates

Features and Benefits

All Decora® Wallplates

- Accent any wall covering with a wide selection of colors and finishes
- Smooth face and rounded edges resist dust accumulation
- Color-matched metal mounting screws supplied

Midway

- Midway wallplates can be used to hide wall surface irregularities
- Midway wallplates are a full 0.375" taller and wider than standard wallplates

Oversize

- Oversize wallplates can be used to hide greater wall surface irregularities than those hidden by Midway wallplates
- Oversize wallplates are a full 0.75" taller and wider than standard wallplates

Thermoset Wallplates

- Designed for high dielectric strength and arc resistance
- Meets or exceeds UL 514 testing requirements
- Resistant to fading, discoloration, grease, oils, organic solvents, moisture and scratches
- Backed by a limited 2-year warranty

Thermoplastic Wallplates

- Molded thermoplastic for maximum resistance to impact, abrasion, fading and discoloration
- Resistant to mechanical stress associated with high abuse applications
- Backed by a limited 10-year warranty

Metal Wallplates (Commercial Grade)

- Rounded edges to prevent injury and wall damage
- Deluxe stainless steel is non-magnetic Type 302, .032" thick — brushed finish
- Standard stainless steel Type 430, .032" thick, also available — brushed finish
- Brass is 70/30 alloy 260, .040" thick — polished or brushed finish
- Aluminum is 3004 alloy, .040" thick
- Backed by a limited 10-year warranty

Antimicrobial

- All antimicrobial devices use silver ions (Ag+) as the antimicrobial agent in the product material
- Antimicrobial material has been tested to show a consistent {3 log (>99.9%)} microbial reduction rate against a broad range of bacteria pursuant to the JIS Z 2801:2000 test protocol

Decora®

Plastic, Nylon and Metal										
Rating		Thermoset (Plastic)			Thermoplastic (Nylon)		Metal			
Description	Color	Cat. No. STANDARD	Cat. No. MIDWAY	Cat. No. OVERSIZE	Cat. No. STANDARD	Cat. No. MIDWAY	Material Type	Cat. No. STANDARD	Cat. No. MIDWAY	Cat. No. OVERSIZE
	White	80401-W	80601-W	88601-W	80401-NW	PJ26-W	Aluminum	83401	—	—
	Ivory	80401-I	80601-I	86601-I	80401-NI	PJ26-I	Brass	81401	—	—
	Light Almond	80401-T	80601-T	—	80401-NT	PJ26-T	Polished Brass	81401-PB	—	—
	Gray	80401-GY	—	—	80401-NGY	PJ26-GY	C-Series 430 S/S	SL26	SLJ82-C	S026
	Black	80401-E	—	—	80401-NE	PJ26-E	C-Series 302/304 S/S	SS26-40	SSJ82-C40	—
	Brown	80401	80601	—	80401-N	PJ26	Non-Magnetic S/S	84401-40	SSJ26-40	—
	Red	—	—	—	80401-NR	PJ26-R	Antimicrobial*	84401-A40	—	—
	Blue	—	—	—	80401-NB	—	EMERGENCY Antimicrobial*	84401-E40	—	—
	White	80409-W	80609-W	88602	80409-NW	PJ262-W	Aluminum	83409	—	—
	Ivory	80409-I	80609-I	—	80409-NI	PJ262-I	Brass	81409	—	—
	Light Almond	80409-T	80609-T	—	80409-NT	PJ262-T	Polished Brass	81409-PB	—	—
	Gray	80409-GY	—	—	80409-NGY	PJ262-GY	C-Series 430 S/S	SL262	SLJ62-C	—
	Black	80409-E	—	—	80409-NE	PJ262-E	C-Series 302/304 S/S	SS262-40	SSJ62-C40	—
	Brown	80409	80609	—	80409-N	PJ262-B	Non-Magnetic S/S	84409-40	—	S0262
	Red	—	—	—	80409-NR	—	Antimicrobial*	84409-A40	—	—
	White	80411-W	80611-W	—	80411-NW	PJ263-W	Aluminum	83411	—	—
	Ivory	80411-I	80611-I	—	80411-NI	PJ263-I	Brass	81411	—	—
	Light Almond	80411-T	80611-T	—	80411-NT	PJ263-T	Polished Brass	81411-PB	—	—
	Gray	80411-GY	—	—	80411-NGY	PJ263-GY	C-Series 430 S/S	SL263	—	—
	Black	80411-E	—	—	—	PJ263-E	C-Series 302/304 S/S	SS263-40	—	—
	Brown	80411	80611	—	80411-N	PJ263-B	Non-Magnetic S/S	84411-40	S0263	—
	White	80412-W	80612-W	—	80412-NW	PJ264-W	Brass	81412	—	—
	Ivory	80412-I	80612-I	—	80412-NI	PJ264-I	Non-Magnetic S/S	84412-40	—	—
	Light Almond	80412-T	80612-T	—	80412-NT	PJ264-T	—	—	—	—
	Gray	80412-GY	—	—	—	PJ264-GY	—	—	—	—
	Black	80412-E	—	—	—	PJ264-E	—	—	—	—
	Brown	80412	80612	—	80412-N	PJ264-B	—	—	—	—
	White	80423-W	—	—	—	—	Brass	81423	—	—
	Ivory	80423-I	—	—	—	—	Non-Magnetic S/S	84423-40	—	—
	Light Almond	80423-T	—	—	—	—	—	—	—	—
	Gray	80423-GY	—	—	—	—	—	—	—	—
	Black	80423-E	—	—	—	—	—	—	—	—
	Brown	80423	—	—	—	—	—	—	—	—
	White	80436-W	—	—	—	—	Non-Magnetic S/S	84436-40	—	—
	Ivory	80436-I	—	—	—	—	—	—	—	—
	Light Almond	80436-T	—	—	—	—	—	—	—	—
	Gray	80436-GY	—	—	—	—	—	—	—	—
	Black	80436-E	—	—	—	—	—	—	—	—
	Brown	80436	—	—	—	—	—	—	—	—
	White	80407-W**	—	—	—	—	—	—	—	—
	Ivory	80407-I**	—	—	—	—	—	—	—	—

*Stainless Steel (Clear) — please contact customer service for other configurations and colors

**Painted Metal Wallplate

Continued on next page



Related Products

Find the right antimicrobial switch for your antimicrobial wallplate.


See page B-23 in the Switches & Motor Control section for more information.

Continued from previous page

Decora®


Dimensions — Single Gang

Standard Size Single-Gang

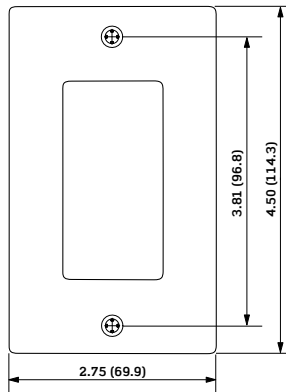


Note: Add 1.81" (46.0mm) for each additional gang.

Midway Size Single-Gang

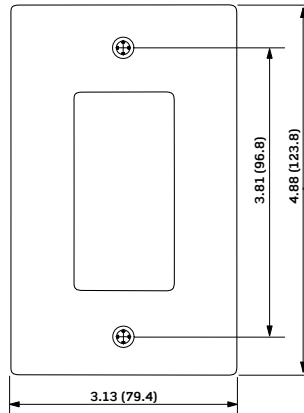

Note: Add 1.81" (46.0mm) for each additional gang. Midway wallplates can be mounted onto larger-volume outlet boxes and/or used to hide wall irregularities. Midway wallplates are a full 0.375" taller and wider than standard size wallplates.

Oversize Size Single-Gang

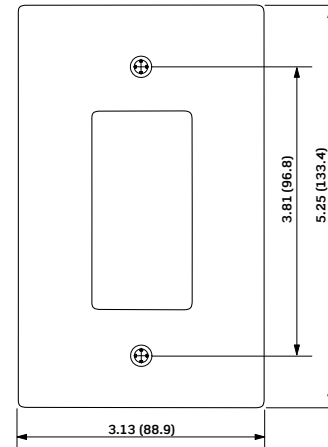

Note: Add 1.81" (46.0mm) for each additional gang. Oversized wallplates are used to conceal greater wall irregularities than those hidden by Midway wallplates. Oversized wallplates are a full 0.75" taller and wider than standard size wallplates.

Decora Plus™

Features and Benefits


- Screwless, snap-on design for contemporary architectural styling
- Subplate provides an easy, convenient wallplate installation with proprietary flat head combination head screws held captive
- Constructed of durable polycarbonate to withstand abuse
- Designed with top and bottom ratchets on single/multi-gang configurations and side ratchets on multi-gang configurations for a secure fit
- 1-6 Gang screwless wallplates each paired with a dedicated subplate for fast and easy installation

Screwless Snap-On Wallplates (with Subplate)


	Description	Color	Cat. No.		Description	Color	Cat. No.
	1-Gang	White Ivory Lt. Almond Gray Black Brown	80301-SW 80301-SI 80301-ST 80301-SGY 80301-SE 80301-S		4-Gang	White Ivory Lt. Almond Gray Black Brown	80312-SW 80312-SI 80312-ST 80312-SGY 80312-SE 80312
	2-Gang	White Ivory Lt. Almond Gray Black Brown	80309-SW 80309-SI 80309-ST 80309-SGY 80309-SE 80309-S		5-Gang	White Ivory Lt. Almond Gray Black	80321-SW 80321-SI 80321-ST 80321-SGY 80321-SE
	3-Gang	White Ivory Lt. Almond Gray Black Brown	80311-SW 80311-SI 80311-ST 80311-SGY 80311-SE 80311-S		6-Gang	White Ivory Lt. Almond Gray Black	80326-SW 80326-SI 80326-ST 80326-SGY 80326-SE

Dimensions for Screwless Snap-On Wallplates

1-Gang Wallplate

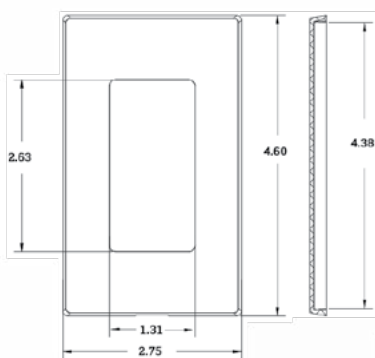


1-Gang Subplate

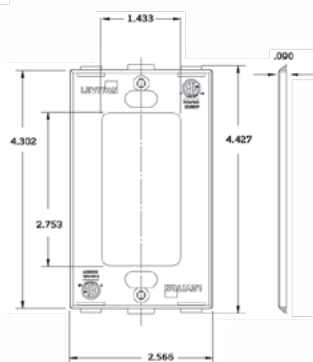


Note: Add 1.81" (46.0mm)
for each additional gang

2-Gang Wallplate

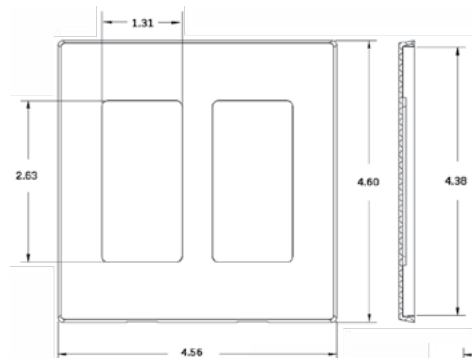


2-Gang Subplate

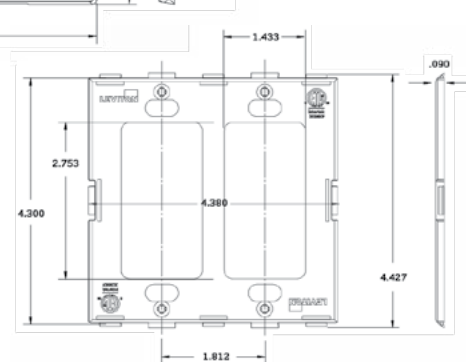

Combination Wallplates

Need a wallplate that does more than one job? Turn to Leviton's combination wallplate line. Leviton combination wallplates come in a variety of configurations and gangs; a broad selection of materials including aluminum, brass, stainless steel and plastic; and an assortment of colors. If you have a unique application, Leviton can also customize a wallplate for it.

Sample Combination Wallplates

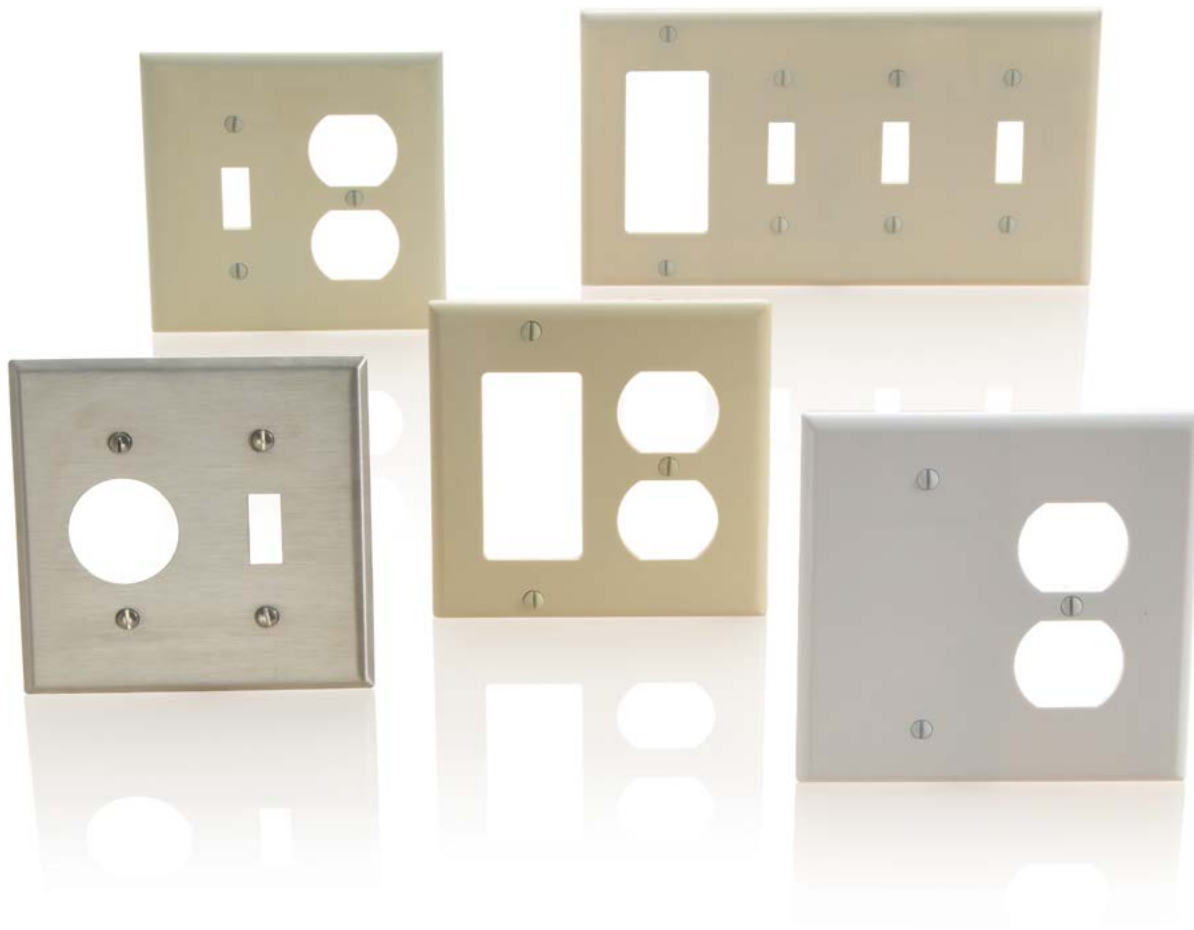

Single Receptacle Combination Wallplates

Plastic, Nylon and Metal								
		Thermoset (Plastic)			Thermoplastic (Nylon)		Metal	
Description	Color	Cat. No. STANDARD	Cat. No. MIDWAY	Cat. No. OVERSIZE	Cat. No. STANDARD	Cat. No. MIDWAY	Material Type	Cat. No. STANDARD
2-Gang: 1-Toggle, 1-Single 1.406" dia. Hole 	White Ivory	88007 86007	— —	— —	— —	— —	Stainless Steel Non-Magnetic S/S	84007 84007-40
3-Gang: 2-Toggle, 1-Single 1.406" dia. Hole 							Non-Magnetic S/S	84088-40
2-Gang: 1-Single 1.406" dia. Hole, 1-Duplex 	White	88046*	— —	— —	— —	— —	Non-Magnetic S/S	84146-40

*Painted Metal Wallplates

Duplex Receptacle Combination Wallplates

Plastic, Nylon and Metal									
		Thermoset (Plastic)			Thermoplastic (Nylon)		Metal		
Description	Color	Cat. No. STANDARD	Cat. No. MIDWAY	Cat. No. OVERSIZE	Cat. No. STANDARD	Cat. No. MIDWAY	Material Type	Cat. No. STANDARD	Cat. No. OVERSIZE
2-Gang: 1-Toggle, 1-Duplex 	White Ivory Lt. Almond Gray Black Brown Red	88005 86005 78005 87005 — 85005 —	80505-W 80505-I 80505-T — — — —	88105 86105 — — — — —	80705-W 80705-I 80705-T 80705-GY 80705-E 80705 80705-R	PJ18-W PJ18-I PJ18-T — PJ18-E — —	Aluminum Polished Brass Stainless Steel C-Series 430 S/S C-Series 302/304 S/S Non-Magnetic S/S	83005 81005-PB 84005 SL18 SS18-40 84005-40	— — — — — 84105-40
3-Gang: 2-Toggle, 1-Duplex 	White Ivory Lt. Almond Black Brown	88021 86021 78021 — 85021	80521-W 80521-I 80521-T — 80521	— — — — —	80721-W 80721-I — 80721-E —	PJ21-W PJ21-I PJ21-T — —	Brass Non-Magnetic S/S	81021 84021-40	— 84121-40
4-Gang: 3-Toggle, 1-Duplex 	White Ivory Lt. Almond Brown	P38-W P38-I P38-T P38	— — — —	— — — —	80743-W 80743-I — —	— — — —	Stainless Steel	84043	—

Continued on next page


Combination Wallplates

Duplex Receptacle | Decora®/GFCI



Continued from previous page

Duplex Receptacle Combination Wallplates

Plastic, Nylon and Metal  									
		Thermoset (Plastic)			Thermoplastic (Nylon)		Metal		
Description	Color	Cat. No. STANDARD	Cat. No. MIDWAY	Cat. No. OVERSIZE	Cat. No. STANDARD	Cat. No. MIDWAY	Material Type	Cat. No. STANDARD	Cat. No. OVERSIZE
5-Gang: 4-Toggle, 1-Duplex 	White	P48-W*	—	—	—	—	Non-Magnetic S/S	S48-N	—
3-Gang: 1-Toggle, 2-Duplex 	White Ivory Brown	88047 86047 85047	— — —	— — —	80747-W 80747-I —	— — —	Non-Magnetic S/S	84047-40	—
4-Gang: 2-Toggle, 2-Duplex 							Brass Non-Magnetic S/S	81045 84045-40	— —
2-Gang: 1-Duplex, 1-Decora®/GFCI 	White Ivory Lt. Almond Gray Black Brown Red	80455-W 80455-I 80455-T — — 80455 —	— — — — — — —	— — — — — — —	80746-W 80746-I 80746-T 80746-GY 80746-E 80746 80746-R	PJ826-W PJ826-I PJ826-T — — — —	Non-Magnetic S/S	84455-40	—

*Painted Metal Wallplates

Decora®/GFCI Combination Wallplates

Plastic, Nylon and Metal  							
		Thermoset (Plastic)		Thermoplastic (Nylon)		Metal	
Description	Color	Cat. No. STANDARD	Cat. No. MIDWAY	Cat. No. STANDARD	Cat. No. MIDWAY	Material Type	Cat. No. STANDARD
2-Gang: 1-Toggle, 1-Decora®/GFCI 	White Ivory Lt. Almond Gray Black Brown Red	80405-W 80405-I 80405-T 80405-GY 80405-E 80405 —	80605-W 80605-I 80605-T — — — —	80707-W 80707-I 80707-T 80707-GY 80707-E 80707 80707-R	PJ126-W PJ126-I PJ126-T — — PJ126 —	Stainless Steel C-Series 430 S/S C-Series 302/304 S/S	S126 SL126 SS126-40
3-Gang: 2-Toggle, 1-Decora®/GFCI 	White Ivory Lt. Almond Black Brown	80421-W 80421-I 80421-T — 80421	— — — — —	80745-W 80745-I — 80745-E —	PJ226-W PJ226-I PJ226-T — PJ226	Non-Magnetic S/S	84421-40
3-Gang: 2-Decora®/ GFCI, 1-Toggle 	White Ivory Lt. Almond Brown	80431-W 80431-I 80431-T 80431	— — — —	80731-W — — —	— — — —		
4-Gang: 3-Toggle, 1-Decora®/GFCI 	White Ivory Lt. Almond Brown	P326-W P326-I P326-T P326	— — — —	80732-W 80732-I — —	— — — —		

Continued on next page

Continued from previous page

Decora®/GFCI Combination Wallplates

Plastic, Nylon and Metal  							
		Thermoset (Plastic)		Thermoplastic (Nylon)		Metal	
Description	Color	Cat. No. STANDARD	Cat. No. MIDWAY	Cat. No. STANDARD	Cat. No. MIDWAY	Material Type	Cat. No. STANDARD
4-Gang: 2-Toggle, 2-Decora®/GFCI 	White Ivory		—	—	—	Painted Steel	P2262-W*
2-Gang: 1-Duplex, 1-Decora®/GFCI 	White Ivory Lt. Almond Gray Black Brown Red	80455-W 80455-I 80455-T — — 80455 —	— — — — — — —	80746-W 80746-I 80746-T 80746-GY 80746-E 80746 80746-R	PJ826-W PJ826-I PJ826-T — — — —		

*Painted Metal Wallplates

Blank Combination Wallplates

Plastic, Nylon and Metal  							
		Thermoset (Plastic)			Thermoplastic (Nylon)	Metal	
Description	Color	Cat. No. STANDARD	Cat. No. MIDWAY	Cat. No. OVERSIZE	Cat. No. STANDARD	Material Type	Cat. No. STANDARD
 2-Gang: 1-Toggle, 1-Blank, Box Mount	White Ivory Brown	88006 86006 85006	80506-W 80506-I 80506	— — —	— — —	Non-Magnetic S/S	84006-40
 2-Gang: 1-Toggle, 1-Blank, Strap Mount	White Ivory Lt. Almond Gray Red	— — — — —	— — — — —	— — — — —	80706-W 80706-I 80706-T 80706-GY 80706-R	Non-Magnetic S/S	84077-40
 3-Gang: 2-Toggle, 1-Blank, Strap Mount						Non-Magnetic S/S	S214-N
 2-Gang: 1-Blank, 1-Decora®/GFCI, Strap Mount	White Ivory Lt. Almond Gray Black Brown	P1426-W* — — — — —	80608-W 80608-I 80608-T — — 80608	— — — — — —	80708-W 80708-I 80708-T 80708-GY 80708-E 80708	Non-Magnetic S/S	S1426-N

*Painted Metal Wallplates

Continued on next page

Combination Wallplates

Blank | Telephone and CATV



Continued from previous page

Blank Combination Wallplates

Plastic, Nylon and Metal

		Thermoset (Plastic)			Thermoplastic (Nylon)		Metal	
Description	Color	Cat. No. STANDARD	Cat. No. MIDWAY	Cat. No. OVERSIZE	Cat. No. STANDARD	Cat. No. MIDWAY	Material Type	Cat. No. STANDARD
2-Gang: 1-Blank, 1-Duplex, Box Mount 	White Ivory Brown	88008 86008 85008	80508-W 80508-I —	— 86108 —	— N138-I —	— — —		
2-Gang: 1-Blank, 1-Duplex, Strap Mount 	White	88087*	— —	— —	— —	— —	Non-Magnetic S/S	84087-40
2-Gang: 1-Blank, 1-Single 1.406" dia. Hole, Strap Mount 	White	88085*	— —	— —	— —	— —	Non-Magnetic S/S	84085-40


*Painted Metal Wallplates

Telephone and CATV Wallplates

Plastic, Nylon and Metal

		Thermoset (Plastic)			Thermoplastic (Nylon)		Metal	
Description	Color	Cat. No. STANDARD	Cat. No. MIDWAY	Cat. No. OVERSIZE	Cat. No. STANDARD	Cat. No. MIDWAY	Material Type	Cat. No. STANDARD
2-Gang: 1-Toggle, 1-Phone/Cable .406" dia. Hole, Strap Mount 	White Ivory	88077 86077	— —	— —	— —	— —		
2-Gang: 1-Phone/Cable .406" dia. Hole, 1-Duplex, Strap Mount 	White Ivory	88078 86078	— —	— —	— —	— —	Non-Magnetic S/S	84078-40
2-Gang: 1-Phone/Cable .406" dia. Hole, 1-Decora®, Strap Mount 	White Ivory	80479-W 80479-I	— —	— —	— —	— —		

Thermoplastic and Metal Combination Specialty Wallplates

Thermoplastic (Nylon) Sectionals for Multi-Gang Installations*  			
		Center Panel	End Panel
Description	Color	Cat. No.	Cat. No.
Center End  Duplex Receptacle	White Ivory Lt. Almond	PSC8-W PSC8-I PSC8-T	PSE8-W PSE8-I PSE8-T
 Toggle Switch	White Ivory Lt. Almond	PSC1-W PSC1-I PSC1-T	PSE1-W PSE1-I PSE1-T
 Single Receptacle, 1.406" dia. Hole	White Ivory	PSC7-W PSC7-I	PSE7-W PSE7-I
 Blank, Strap Mount	White Ivory Lt. Almond	PSC14-W PSC14-I PSC14-T	PSE14-W PSE14-I PSE14-T
 Decora® Panels	White Ivory Lt. Almond	PSC26-W PSC26-I PSC26-T	PSE26-W PSE26-I PSE26-T

*Outer dimensions of Wallplates created from two or more sectional panels will be the same as standard multi-gang plates



Horizontal Split Plate for Terminated Cable, Nylon and Metal  				
		Thermoplastic (Nylon)	Metal	
Description	Color	Cat. No.	Material Type	Cat. No.
 1-Gang, .625" dia. Hole with Grommet, .406" Inner dia.	White Ivory	N751-W N751-I	Stainless Steel	S751-N



Special Purpose

Hot Stamped and Engraved Wallplates

Nylon and Metal							
		Thermoplastic (Nylon)			Metal		
Description	Color	Cat. No. STANDARD	Cat. No. STANDARD	Cat. No. MIDWAY	Material Type	Cat. No. STANDARD	
1-Gang, 1-Duplex, Stamped and Engraved "Emergency"	Red	80703-RE <i>Engraved Black Letters</i>	80703-REW <i>Engraved White Letters</i>	PJ8-RE <i>Engraved Black Letters</i>	Non-Magnetic S/S	84003-E40 <i>Engraved Red Letters</i>	
2-Gang, 2-Duplex, Stamped and Engraved "Emergency"	Red	80716-RE <i>Engraved Black Letters</i>	80716-REW <i>Engraved White Letters</i>	PJ82-RE <i>Engraved Black Letters</i>	Non-Magnetic S/S	84016-E40 <i>Engraved Red Letters</i>	
1-Gang, 1-Duplex, Stamped and Engraved "Isolated Ground"	Orange	80703-IG <i>Engraved Black Letters</i>	—	PJ8-IG <i>Engraved Black Letters</i>	Non-Magnetic S/S	84003-IG <i>Engraved Black Letters</i>	
2-Gang 2-Duplex Stamped and Engraved "Isolated Ground"	Orange	80716-IG <i>Engraved Black Letters</i>	—	—			
1-Gang, 1-Single, 1.406" dia. Hole Stamped and Engraved "Isolated Ground"	Orange	80704-IG <i>Engraved Black Letters</i>	—	—			
1-Gang, 1-Decora®, Stamped "Isolated Ground"	Orange	80401-IG <i>Engraved Black Letters</i>	—	—			
1-Gang, 1-Decora®, and Engraved "Emergency"	Red	—	80401-REW <i>Engraved White Letters</i>	—	Non-Magnetic S/S	84401-E40 <i>Engraved Red Letters</i>	
2-Gang, 2-Decora®, and Engraved "Emergency"	Red	—	80409-REW <i>Engraved White Letters</i>	—	Non-Magnetic S/S	84409-E40 <i>Engraved Red Letters</i>	
1-Gang, 1-Decora®, Stamped "GFCI Protected"	White Ivory	80401-GFW 80401-GFI <i>Engraved Black Letters</i>	—	—	Non-Magnetic S/S	84003-G40 <i>Engraved Black Letters</i>	
1-Gang, 1-Decora®, Stamped "Computer Only"	Ivory	80401-COI <i>Engraved Black Letters</i>	—	—			
1-Gang, 1-Toggle, Stamped and Engraved "Emergency"	Red	80701-RE <i>Engraved Black Letters</i>	80701-REW <i>Engraved White Letters</i>	—	Non-Magnetic S/S	84001-E40 <i>Engraved Red Letters</i>	
1-Gang, 1-Duplex, Stamped "Computer Only"	Orange	80703-COO <i>Engraved Black Letters</i>	—	—			

Adapters and Accessories

Decora Plus™ Standard Size Plastic Adapters  			
	Description	Color	Cat. No.
	CATV Jack	White Lt. Almond Black	80381-W 80381-T 80381-E
	Blank No Hole	White Lt. Almond Gray Black	80314-W 80314-T 80314-GY 80314-E

Plastic Adapters  			
	Description	Color	Cat. No.
	Dimmer Shaft .406" dia. Hole	White Ivory Lt. Almond Black Brown	80400-W 80400-I 80400-T 80400-E 80400
	Blank Decora® No Hole	White Ivory Lt. Almond Gray Black Brown	80414-W 80414-I 80414-T 80414-GY 80414-E 80414
	Blank Toggle No Hole	White Ivory Lt. Almond Gray Brown	80700-W 80700-I 80700-T 80700-GY 80700
	Wallbox Adapter: Extends shallow wallbox to fit GFCI/Decora® device	White Ivory Brown	6197-W 6197-I 6197
	Snap-in Grommet: Reduces 1.406" to 1.00" for use with single receptacle wallplates	Black	403-E
	Thermoplastic Yoke/Mounting Strap with Screws	White	404


All devices are UL Listed and CSA Certified

Adapters and Accessories

Wallplate Screws

	Description	Color	Cat. No.
	Oval Head Milled Slot 5/16" Long — 6-32 Thread, 100 per Box	White Ivory Lt. Almond Gray Stainless Steel	88400-PRT 86400-PRT 78400-PRT 87400-PRT 84400-PRT
	Oval Head Milled Slot, 1/2" Long — 6-32 Thread, 100 per Box	White Ivory Lt. Almond Brown Stainless Steel	88000-PRT 86000-PRT 78000-PRT 85000-PRT 84000-PRT
	Oval Head Milled Slot 7/8" Long — 6-32 Thread, 100 per Box	White Ivory Lt. Almond	88500-PRT 86500-PRT 78500-PRT

Tamper-Resistant Spanner Head Wallplate Screws

	Description	Color	Cat. No.
	Spanner Head 1/2" Long — 6-32 Thread, 100 per Box	Stainless Steel	84000-T
	Screwdriver for Spanner Head or Tamper-Resistant Screws	Black	84000-TSD

Pilot Light Jewels

	Description	Color	Cat. No.
	Round Fits Single Receptacle Hole 1.375-1.405" dia.	Red Green	405-R 405-GR
	Rectangular Fits Toggle Switch Hole .406 x .925"	Red Green	406-R 406-GR
	Lampholder Assembly for use with Jewels or Louvre Plates — use with standard 2.5" box and 4 watt bulb (bulb not included)		2152




Connectivity Device Plates

Dedicated to 46000 series devices, single-gang Leviton Voice/Data/CATV wallplates come in standard and Decora® style. They accommodate a Type “F”, Db9, Db15 or Bnc/Tnc “D” connectors and are constructed from an impact resistant, engineering grade polymer.

Sample Connectivity Device Plates



Voice/Data/CATV Standard Size Nylon and Metal

		Thermoplastic (Nylon)		Metal	
Description	Color	Cat. No.	Material Type	Cat. No.	
 1-Gang, Type “F” Connector	White	80781-W			
	Ivory	80781-I			
	Lt. Almond	80781-T			
 1-Gang, Duplex Type “F” Connector	Ivory	80782-W			
	White	80782-I			
	Lt. Almond	80782-T			
 1-Gang, Bnc/Tnc “D” Connector			Non-Magnetic S/S	84444-40	

Weatherproof Covers

The Leviton offering of Weatherproof Covers & Boxes comprises both 1- and 2-gang configurations that comply with the National Electric Code® (2017) Article 406.9 for weatherproof enclosures in damp and wet locations.

Sample Weatherproof Covers



Features and Benefits

Weatherproof Outlet Box Hoods (While-In-Use Covers)

- Compliant with NEC® 2017 Section 406.9(B)(1) for wet locations
- Safety lockout feature to prevent unauthorized use
- Extra Duty models meet or exceed the most stringent impact resistance tests required in UL 514D for Extra-Duty Outlet Box Hoods, ensuring maximum safety in abusive environments
- Pre-installed weatherproof gasket features custom fit inserts allowing for an easy to use installation available on Extra Duty Covers

Weatherproof Device Covers

- Complies with NEC® 2017 Section 406.9(A) for weatherproof enclosures in damp locations
- Heavy-duty gasket provides a weatherproof seal which protects from moisture and adds to ease of installation
- Three easy-to-install molded adapter plates for use with Toggle Switches, Duplex Receptacles, Decora®/GFCI and Single Receptacle devices
- Safety lockout feature to prevent unauthorized use available on some models

Weatherproof Boxes

- Constructed of heavy duty die-cast aluminum
- Includes ground screw, mounting hardware and inserts to cover unused openings to prevent insects and debris from entering the box

Weatherproof Blank Plates

- Equipped with heavy-duty weatherproof gasket to seal out moisture

Weatherproof Cover Kits

- Extra-Duty rated for outdoor applications
- Pre-installed gaskets and key hold screw access for easy installation
- Interchangeable inserts for a variety of options

Continued on next page

Continued from previous page

Weatherproof Outlet Box Hoods (While-In-Use Covers)

UV Resistant Polycarbonate  			
Description	Mounting	Color	Cat. No.
Extra-Duty Rated; 1-Gang, Decora®/GFCI with Adapter Plates for Duplex and Single Receptacle, Standard	Vertical	Gray	5980-UGY
		Clear	5980-UCL
	Horizontal	Gray	5981-UGY
		Clear	5981-UCL
Extra-Duty Rated; 2-Gang While-In-Use Cover for Decora®/GFCI and Duplex Outlets, Standard	Vertical	Gray	5982-UGY
		Clear	5982-UCL
Die-Cast Aluminum  			
Description	Mounting	Color	Cat. No.
Extra-Duty Rated; 1-Gang, Includes Inserts for Single, Duplex and Decora®/GFCI Receptacles	Horizontal	Gray	IUM1H-GY
	Vertical		IUM1V-GY
Extra-Duty Rated; 2-Gang, Includes Inserts for Duplex and Decora®/GFCI Receptacles	Vertical		IUM2V-GY



5980-UCL



5981-UGY



WM1S-GY



4976-GY



4979-GY

Weatherproof Device Covers

Weatherproof Device Covers Vertical and Horizontal Mounting				
Description	Mounting	Color	Metallic	Plastic
			Cat. No.	Cat. No.
1-Gang, Switch	Vertical or Horizontal	Gray	WM1S-GY	WP1S-GY
1-Gang, Duplex Receptacle	Horizontal, Oversized	Gray	—	4986-GY
	Vertical or Horizontal	Gray	WM1D-GY	WP1D-GY
		White	—	4976-W
	Horizontal	Gray	—	4976-GY
		Gray	—	4976-FS
	Vertical	Gray	—	4978-GY
1-Gang, Duplex and Single Receptacle; Includes Inserts for Decora®/GFCI	Horizontal	Gray	WM1H-GY	—
	Vertical	Gray	WM1V-GY	—
1-Gang, Decora®/GFCI Receptacle	Horizontal	Gray	—	4996-GY
		White	—	4996-W
	Vertical	Gray	—	4998-GY
		White	—	4998-W
	Horizontal, FS Box Mount	Gray	WM1HF-GY	—
	Vertical, FS Box Mount		WM1VF-GY	—
1-Gang, Single Receptacle; 1.406" Hole	Vertical	—	—	4979-GY
1-Gang, Single Receptacle; 1.60" Hole		—	—	4980-GY
2-Gang, Switch	Vertical or Horizontal	Gray	WM2S-GY	WP2S-GY
2-Gang, Duplex and Single Receptacle; Includes Inserts for Decora®/GFCI			WM2V-GY	WP2V-GY
2-Gang, Switch and GFCI			WM2SG-GY	WP2SG-GY
2-Gang, Switch and Duplex Receptacle			WM2SD-GY	WP2SD-GY



Related Products

Leviton's weather-resistant outdoor grade GFCIs are designed to withstand the elements with cold impact resistant face and buttons. **See page E-6 in the GFCIs and AFCIs section for more information.**

Weatherproof Boxes

Die-Cast Aluminum

Description	Color	Cat. No.
1-Gang, Three 1/2" Diameter Outlets	Gray	1GM53-GY
1-Gang, Three 3/4" Diameter Outlets		1GM73-GY
2-Gang, Three 1/2" Diameter Outlets		2GM53-GY
2-Gang, Five 1/2" Diameter Outlets		2GM55-GY
2-Gang, Three 3/4" Diameter Outlets		2GM73-GY
2-Gang, Five 3/4" Diameter Outlets		2GM75-GY



1GM73-GY



2GM53-GY

Weatherproof Blank Plates

Blank Box Mounted Wallplates with Weatherproof Gasket

Description	Color	Cat. No.
1-Gang, Die-Cast Aluminum	Gray	WM1B-GY
2-Gang, Die-Cast Aluminum		WM2B-GY



WM1B-GY

Weatherproof Cover Kits

Includes all components in one easy to install package

Description	Color	Cat. No.
GFCI Weatherproof Toggle Kit, (1) GFWT1-GY, (1) 4996-GY, and (1) 1GM53-GY	Gray	4996-KIT
Metallic Weatherproof Switch Kit, (1) WM1S-GY, (1) CS120-2GY		WM1SC-2GY
Vertical WIU Cover Receptacle Kit, (1) IUM1V-GY, (1) GFWT1-GY		IUMV1-KRG
Horizontal WIU Cover Receptacle Kit, (1) IUM1H-GY, (1) GFWT1-G		IUM1H-KRG
Vertical WIU Cover Receptacle and Box Kit, (1) IUM1V-GY, (1) GFWT1-GY, and (1) 1GM53-GY		IUM1V-KBG
Horizontal WIU Cover Receptacle and Box Kit, (1) IUM1H-GY, (1) GFWT1-GY, and (1) 1GM53-GY		IUM1H-KBG



WM1SC-2GY




IUM1V-KBG


Weatherproof Covers

Dimensions


5980

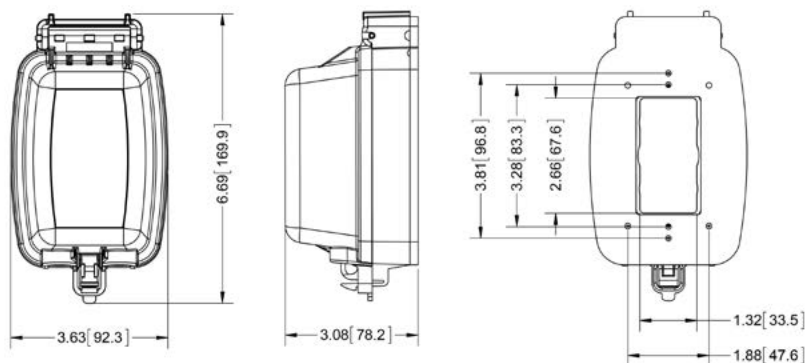


5981

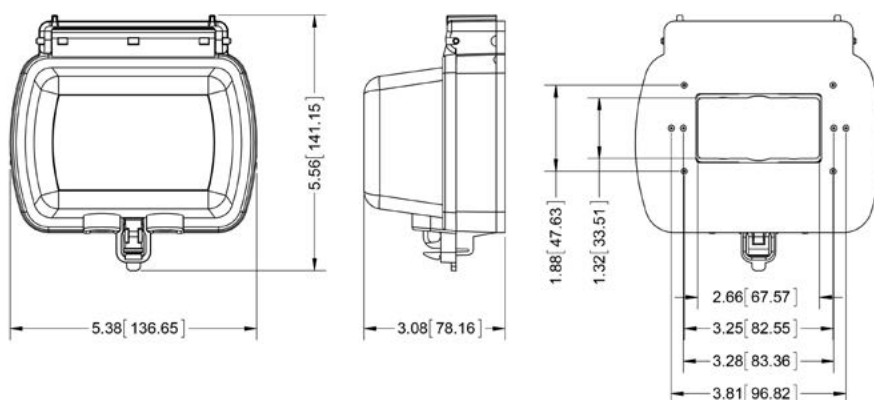


WM1S-GY

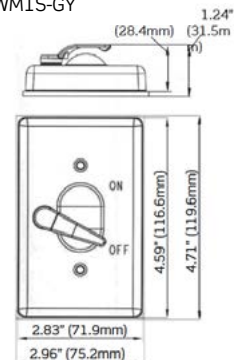

WP1S-GY

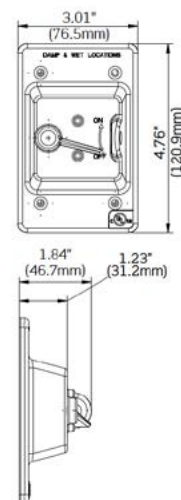

4978-GY/W

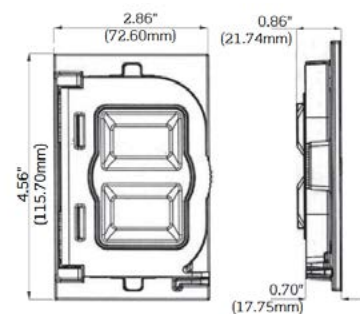

Continued on next page



Related Products

Leviton's weather-resistant outdoor grade GFCIs are designed to withstand the elements with cold impact resistant face and buttons. **See page E-6 in the GFCIs and AFCIs section for more information.**

Weatherproof Covers

Device Covers | **Commercial**




Continued from previous page


Weatherproof Covers

Dimensions


WM1V-GY

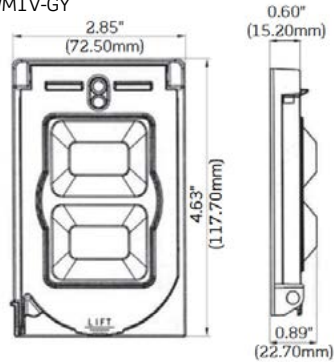


WM2S-GY

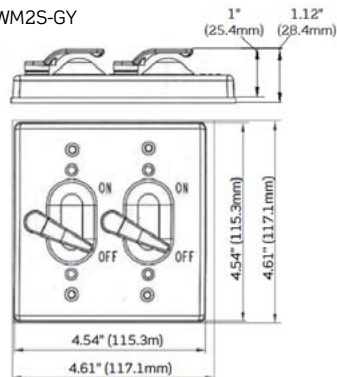


WP2V-GY

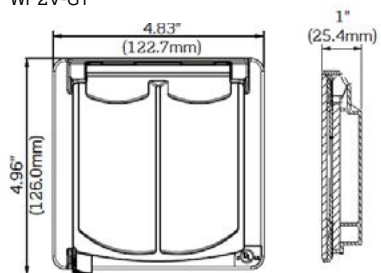


WP2S-GY

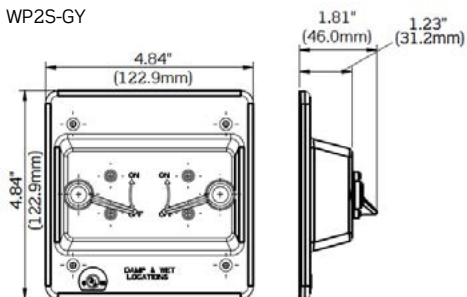


WM2V-GY

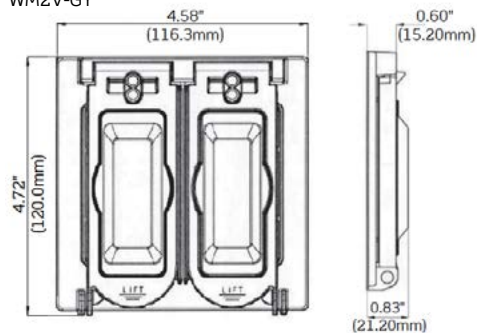


WP2SG-GY

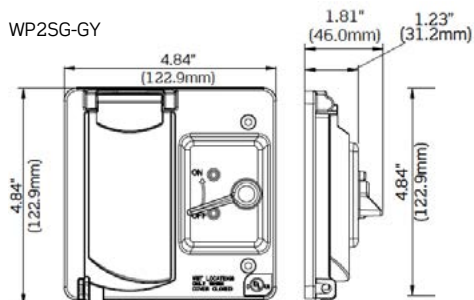


WP2SD-GY

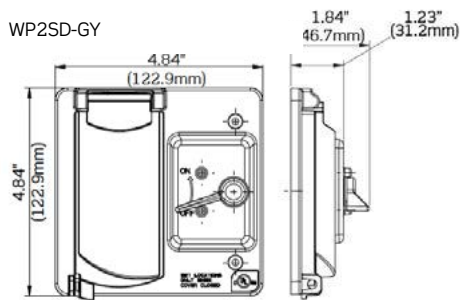

WM2SG-GY

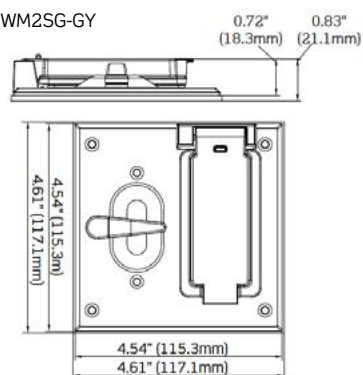

WM2SD-GY

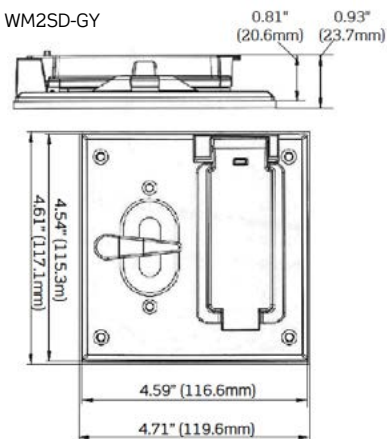

FS/FD Mount Weatherproof Covers

For strap mount and flanged devices in FD box and panel mount applications.

Sample Weatherproof Covers



Features and Benefits

- Vertical self-closing lid constructed of glass-filled thermoplastic provides ultimate impact resistance for use in abusive environments
- Includes provision for 2 padlocks for OSHA compliant lockout/tagout
- Molded-in label area on cover allows for circuit or ratings identification
- Pre-assembled gasket provides an easier installation and tighter seal from harsh elements*
- Stainless steel mounting screws and springs offer added corrosion resistance
- NEMA Type 3R and IP64 ratings with cover closed ensure protection for indoor and outdoor use
- Covers may be held open with a Hex Key or pin to ease installation

*All covers except WP4

For use with Strap Mount Devices

Description	Color	Dia. Opening	Cat. No.
For 20 amp or 30 amp strap-mount single flush mount receptacle	Yellow	1.60"	7420-YL
	Gray		7420-G
	Black		7420-EB

Continued on next page



7420-EB

Color Choices FS/FD Mount Weatherproof Covers are offered in these colors. To order colors, add suffix to Cat. No.



Gray
(-G)



Black
(-EB)



Yellow
(-YL)

Continued on next page

Continued from previous page

FS/FD Mount Weatherproof Covers

For use with Flanged Devices

Description	Color	Dia. Opening	Cat. No.
For 3-wire 15 amp and 20 amp straight blade or 15 amp locking flanged outlets or inlets	Yellow	1.72"	WP1-YL
	Gray		WP1-G
	Black		WP1-EB
For 3-, 4- or 5-wire 20 amp or 30 amp locking flanged inlets or outlets	Yellow	2.25"	WP2-YL
	Gray		WP2-G
	Black		WP2-EB
For 50 amp flanged inlets and outlets mounted from behind the panel with 2.6" panel cutout	Yellow	3"	WP3-YL
	Gray		WP3-G
	Black		WP3-EB
For 50 amp flanged inlets and outlets mounted from in front of the panel with 2.6" panel cutout	Yellow	2.6"	WP4-YL
	Gray		WP4-G
	Black		WP4-EB




WP4-YL

For use with Single Locking Receptacles


Description	Color	Dia. Opening	Cat. No.
1-Gang device cover for 50A locking receptacles	Yellow Thermoplastic	2.15"	7788-CR
	Gray Aluminum		7770

Dimensions

WP1, WP2,
WP3, 7420

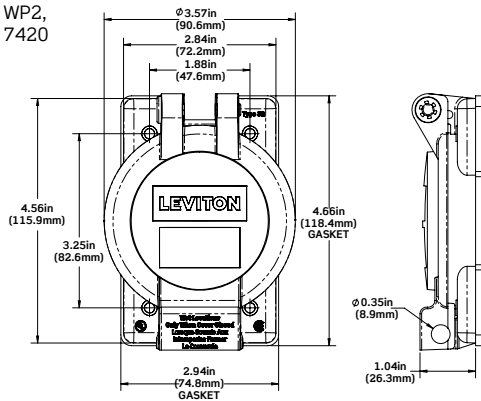

WP4

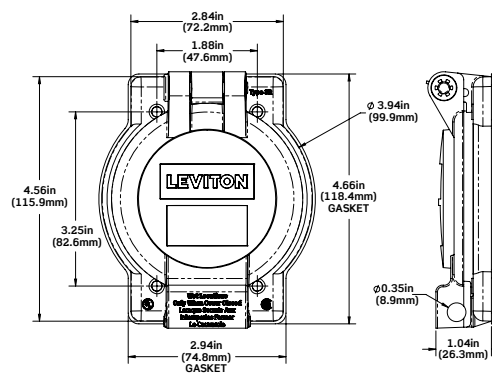

7770 & 7788-CR

